



- (51) **International Patent Classification:**
H04B 3/46 (2006.01) **H04M 3/30** (2006.01)
H04L 27/26 (2006.01)
- (21) **International Application Number:**
PCT/EP2013/065186
- (22) **International Filing Date:**
18 July 2013 (18.07.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
12305887.7 20 July 2012 (20.07.2012) EP
- (71) **Applicant:** ALCATEL LUCENT [FR/FR]; 3, avenue Octave Gréard, F-75007 Paris (FR).
- (72) **Inventors:** DE LIND VAN WIJNGAARDEN, Adriaan; 24 First Street, New Providence, Union, New Jersey 7974 (US). GUENACH, Mamoun; Vilvoordelaan 113, B-1830 Machelen (BE). NUZMAN, Carl; 892 Madison Avenue, Union, New Jersey 07083 (US).
- (74) **Agent:** ALU ANTWERP PATENT ATTORNEYS; (NO 365), Copernicuslaan 50, B-2018 Antwerp (BE).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

- (54)
- Title:**
- METHOD AND APPARATUS FOR FAST AND ACCURATE ACQUISITION OF CROSSTALK COEFFICIENTS

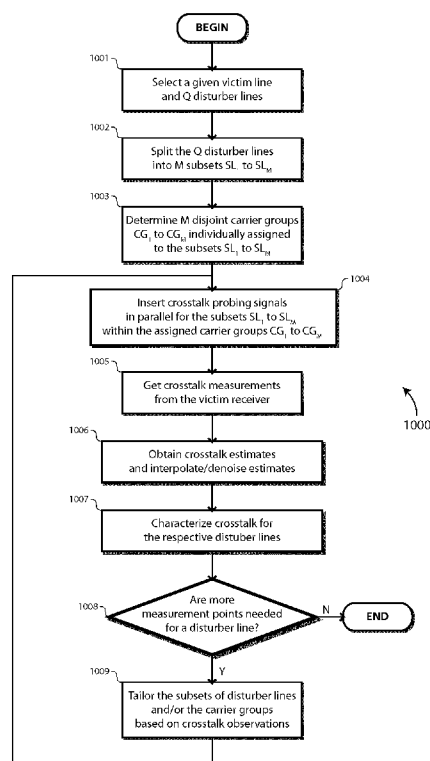


Fig. 2

(57) **Abstract:** The present invention relates to a method for acquiring crosstalk coefficients from a plurality of disturber lines (L_1 ; L_2) into a victim line (L_N) in a wired multi-carrier communication system (1). In accordance with an embodiment of the invention, the method comprises the steps of inserting a plurality of crosstalk probing signals (XTS_1 ; XTS_2) within the wired multi-carrier communication system for probing the crosstalk from respective ones of the plurality of disturber lines into the victim line, carrying out crosstalk measurements ($SNIR_n$) over the victim line, and estimating the crosstalk coefficients from the crosstalk measurements. The method further comprises the steps of organizing the plurality of disturber lines into subsets of disturber lines (SL_1 ; SL_2), and individually assigning disjoint groups of carriers (CG_1 ; CG_2) to the respective subsets of disturber lines. The insertion of the plurality of crosstalk probing signals is confined within the respectively assigned groups of carriers. The subsets of disturber lines and/or the groups of carriers used for a second or subsequent iteration are tailored based on crosstalk characteristics observed for the respective disturber lines during a previous iteration. The present invention also relates to a vectoring controller (130) for acquiring crosstalk coefficients from a plurality of disturber lines (L_1 ; L_2) into a victim line (L_N) in a wired multi-carrier communication system (1).

WO 2014/013018 A1



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, **Published:**
KM, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*

**METHOD AND APPARATUS FOR FAST AND ACCURATE ACQUISITION
OF CROSSTALK COEFFICIENTS**

Technical Field of the Invention

The present invention relates to a method and apparatus
5 for fast and accurate acquisition of crosstalk coefficients in a
wired multi-carrier or multi-tone communication system.

Technical Background of the Invention

Crosstalk (or inter-channel interference) is a major
source of channel impairment for Multiple Input Multiple Output
10 (MIMO) communication systems, such as Digital Subscriber Line
(DSL) communication systems.

As the demand for higher data rates increases, DSL
systems are evolving toward higher frequency bands, wherein
crosstalk between neighboring transmission lines (that is to
15 say, transmission lines that are in close vicinity such as
twisted copper pairs in a cable binder) is more pronounced (the
higher frequency, the more coupling).

A MIMO system can be described by the following linear
model:

20 $\mathbf{Y}(k) = \mathbf{H}(k)\mathbf{X}(k) + \mathbf{Z}(k) \quad (1)$

wherein the N-component complex vector $\mathbf{X}$, respectively $\mathbf{Y}$,
denotes a discrete frequency representation, as a function of
the frequency/carrier/tone index k , of the symbols transmitted
over, respectively received from, the N channels,

25 wherein the $N \times N$ complex matrix $\mathbf{H}$ is referred to as the channel
matrix: the (i,j) -th component of the channel matrix $\mathbf{H}$ describes
how the communication system produces a signal on the i -th
channel output in response to a symbol being transmitted to the
 j -th channel input; the diagonal elements of the channel matrix
30 describe direct channel coupling, and the off-diagonal elements
of the channel matrix describe inter-channel coupling (also
referred to as crosstalk coefficients),

and wherein the N-component complex vector $\mathbf{Z}$ denotes additive
noise over the N channels, such as Radio Frequency Interference
35 (RFI), thermal noise and alien interference.

Different strategies have been developed to mitigate
crosstalk and to maximize effective throughput, reach and line
stability. These techniques are gradually evolving from static

or dynamic spectral management techniques to multi-user signal coordination (or vectoring).

One technique for reducing inter-channel interference is joint signal precoding: the transmit data symbols are jointly
5 passed through a precoder before being transmitted over the respective communication channels. The precoder is such that the concatenation of the precoder and the communication channel results in little or no interference at the receiver. Typically, the precoder performs a matrix-product of a row-vector of
10 frequency samples to be jointly transmitted over multiple channels with a precoding matrix so as to compensate for an estimate of the coming crosstalk.

A further technique for reducing inter-channel interference is joint signal post-processing: the received data
15 symbols are jointly passed through a postcoder before being detected. The postcoder is such that the concatenation of the communication channel and the postcoder results in little or no interference at the receiver. Typically, the postcoder performs a matrix-product of a row-vector of frequency samples jointly
20 received from multiple channels with a crosstalk cancellation matrix so as to cancel an estimate of the incurred crosstalk.

Signal precoding is particularly suited for downstream communication (toward customer premises), while signal post-processing is particularly suited for upstream communication
25 (from customer premises). Either technique is often referred to as signal vectoring.

Signal vectoring is typically performed at a traffic aggregation point, where all the data symbols concurrently transmitted over, or received from, multiple communication
30 channels are available. For instance, signal vectoring is advantageously performed within a Digital Subscriber Line Access Multiplexer (DSLAM).

The choice of the vectoring group, that is to say the set of communication lines, the signals of which are jointly
35 processed, is rather critical for achieving good crosstalk cancellation performances. Within a vectoring group, each communication line is considered as a disturbing line inducing crosstalk into the other communication lines of the group, and

the same communication line is considered as a victim line receiving crosstalk from the other communication lines of the group. Crosstalk from lines that do not belong to the vectoring group is treated as alien noise and is not canceled.

5 Ideally, the vectoring group should match the whole set of communication lines that physically and noticeably interact with each other. Yet, local loop unbundling on account of national regulation policies and/or limited vectoring capabilities may prevent such an exhaustive approach, in which
10 case the vectoring group would include a sub-set only of all the physically interacting lines, thereby yielding limited crosstalk cancellation performances.

 The performance of signal vectoring depends critically on the component values of the precoding or cancellation matrix,
15 which component values are to be computed and updated according to the actual and varying crosstalk couplings.

 A prior art method for estimating the crosstalk coefficients comprises the steps of:

- simultaneously transmitting a plurality of mutually orthogonal
20 crosstalk pilot sequences through respective ones of a plurality of disturber channels,
- measuring errors induced over a victim channel while the pilot sequences are being transmitted,
- correlating the error measurements with respective ones of the
25 plurality of crosstalk pilot sequences, thereby yielding a plurality of correlated error measurements,
- estimating the crosstalk coefficients from the plurality of disturber channels into the victim channel based on respective ones of the plurality of correlated error measurements.

30 That is, transceiver units send downstream or upstream pilot sequences. Error samples, measuring both interference and noise over the victim channel, are fed back to a vectoring controller. The error samples are correlated with a given pilot sequence in order to obtain the crosstalk contribution from a
35 specific line. To reject the crosstalk contribution from the other lines, the pilot sequences are made orthogonal, for instance by using Walsh-Hadamard sequences comprising '+1' and '-1' anti-phase symbols. The crosstalk estimates are used for

updating the precoding or cancellation matrix. The process can be repeated as needed to obtain more and more accurate estimates.

This prior art method has been adopted by the
5 International Telecommunication Union (ITU) for use with VDSL2 transceivers, and is described in the recommendation entitled "Self-FEXT Cancellation (Vectoring) For Use with VDSL2 Transceivers", ref. G.993.5 (04/2010).

In this recommendation, the pilot signals are sent on
10 the so-called SYNC symbols, which occur periodically after every 256 DATA symbols.

On a given disturber line, a representative subset of the active carriers (or tones) of the SYNC symbol are 4-QAM modulated by the same pilot digit from a given orthogonal pilot
15 sequence, and thus all transmit one of two complex constellation points, either ' $1 + j$ ' corresponding to '+1', or ' $-1 - j$ ' corresponding to '-1'. The remaining carriers of the SYNC symbol keeps on carrying the typical SYNC-FLAG for On-Line Reconfiguration (OLR) message acknowledgment.

20 On a given victim line, error samples, which comprise both the real and imaginary part of the slicer error on a per tone or group-of-tones basis, quantized with a certain number of bits (typically 16), are measured and reported for a specific SYNC symbol to the vectoring controller for further crosstalk
25 estimation.

In G.993.5, it is further assumed that the access node transmits and receives the SYNC symbols over the vectored lines synchronously (super frame alignment) so as pilot signal transmission and interference measurements are carried out
30 synchronously over the respective transmission lines.

Also, a joining line confines transmission to SYNC symbols only during a preliminary initialization phase (O-P-VECTOR1) so as not to impair the communication over the active lines (no data is being transmitted during the SYNC symbols),
35 yet to allow the system to acquire the crosstalk coefficients, and to cancel the crosstalk, from that new joining line towards the already active lines. Then, the joining line can switch to full transmission once the crosstalk coefficients from that new

joining line have been determined and the precoder and postcoder have been updated to mitigate the crosstalk from that new joining line.

5 A further prior art method for estimating the crosstalk coefficients is described in Appendix III of ITU G.993.5 recommendation, and is particularly suited for legacy Customer Premises Equipment (CPE).

10 The method comprises the steps of superimposing a crosstalk probing signal over the victim line while measuring Signal to Noise and Interference Ratio (SNIR) over that victim line, and estimating the crosstalk coefficients from these SNIR measurements.

15 The probing signals consists of a complex-weighted sum of regular data signals transmitted over the respective disturber lines. Three successive SNIR measurement rounds with three distinct complex weight values are required so as to estimate both the amplitude and phase of the crosstalk coefficients from a given disturber line.

20 The basic SNIR method uses successive perturbations on the victim lines, followed by successive cancellation. Due to slow reporting times of SNIR measurements of up to 10 seconds per measurement round, the overall time needed to acquire the crosstalk coefficients for a joining legacy line in a scenario where many lines are active, is significant (e.g., for 48 lines
25 one iteration may take about 24 minutes, and multiple iterations are generally needed to obtain accurate estimates).

30 A solution is sought to rapidly acquire the crosstalk coefficients in a DSL communication system, in particular for situations where vectoring-compliant and legacy Customer Premises Equipment (CPEs) co-exist, and where one or more activating (or initializing) lines join a large number of active lines. It is essential to quickly attain vectored performance for both vectoring-compliant and legacy CPEs. More generally, we are concerned with fast and accurate acquisition of crosstalk
35 coefficients in a wired multi-carrier communication system from a set of disturber lines into a victim line.

Summary of the Invention

It is an object of the present invention to suppress or to mitigate the aforementioned shortcomings and drawbacks of the prior art.

5 In accordance with a first aspect of the invention, a method for acquiring crosstalk coefficients from a plurality of disturber lines into a victim line in a wired multi-carrier communication system, iterates through the steps of inserting a plurality of crosstalk probing signals within the wired multi-carrier communication system for probing the crosstalk from
10 respective ones of the plurality of disturber lines into the victim line, carrying out crosstalk measurements over the victim line, and estimating the crosstalk coefficients from the crosstalk measurements. The method iterates through the further steps of organizing the plurality of disturber lines into
15 subsets of disturber lines, and individually assigning disjoint groups of carriers to the respective subsets of disturber lines. The insertion of the plurality of crosstalk probing signals is confined within the respectively assigned groups of carriers. The subsets of disturber lines and/or the groups of carriers
20 used for a second or subsequent iteration are tailored based on crosstalk characteristics observed for the respective disturber lines during a previous iteration.

In accordance with another aspect of the invention, a
25 vectoring controller for acquiring crosstalk coefficients from a plurality of disturber lines into a victim line in a wired multi-carrier communication system is configured to iterate through the steps of inserting a plurality of crosstalk probing signals for probing the crosstalk from respective ones of the
30 plurality of disturber lines into the victim line, receiving crosstalk measurements carried out over the victim line, and estimating the crosstalk coefficients from the crosstalk measurements. The vectoring controller is further configured to iterate through the further steps of organizing the plurality of
35 disturber lines into subsets of disturber lines, and individually assigning disjoint groups of carriers to the respective subsets of disturber lines. The vectoring controller is further configured to confine the insertion of the plurality

of crosstalk probing signals within the respectively assigned groups of carriers, and to tailor the subsets of disturber lines and/or the groups of carriers used for a second or subsequent iteration based on crosstalk characteristics observed for the
5 respective disturber lines during a previous iteration.

The vectoring controller may form part of a Digital Subscriber Line Access Multiplexer (DSLAM), or more generally of any access node providing wired communication access to subscribers over a loop plant, such as an Ethernet bridge, an
10 edge router, etc. The access node may reside at a central location (e.g., at a central office), or at a fiber-fed remote location closer to subscriber premises (e.g., fiber-to-the-curb or fiber-to-the-cabinet architecture).

In one embodiment of the invention, the observed
15 crosstalk characteristics are indicative of the frequency coherence of the respective crosstalk channels.

In one embodiment of the invention, the observed crosstalk characteristics are indicative of the amounts of nominal crosstalk incurred from the respective disturber lines.

20 In one embodiment of the invention, the observed crosstalk characteristics are indicative of the amounts of residual crosstalk incurred from the respective disturber lines that remain uncompensated over the victim line.

In one embodiment of the invention, the subsets of
25 disturber lines are assigned interleaved carrier groups with respective decimation factors, and the decimation factors used for a first iteration are substantially greater than a typical frequency coherence of a typical crosstalk channel.

In one embodiment of the invention, the subsets of
30 disturber lines individually comprise one or more disturber lines.

In one embodiment of the invention, the step of estimating particular crosstalk coefficients from a particular disturber line into the victim line comprises the steps of
35 obtaining particular crosstalk measurements carried out over the victim line at particular frequency indexes of a particular carrier group assigned to a particular subset of disturber lines which the particular disturber line belongs to, estimating the

particular crosstalk coefficients at the particular frequency indexes from the particular crosstalk measurements, and determining the remaining particular crosstalk coefficients at the remaining frequency indexes by means of interpolation.

5 In one embodiment of the invention, the crosstalk measurements are SNIR measurements.

 In one embodiment of the invention, the plurality of crosstalk probing signals are weighted replicas of a plurality of regular signals transmitted over, or received from,
10 respective ones of the plurality of disturber lines, and the plurality of crosstalk probing signals are combined as a single crosstalk probing signal superimposed over a further regular signal transmitted over, or received from, the victim line.

 In one embodiment of the invention, the plurality of
15 crosstalk probing signals are weighted replicas of a regular signal transmitted over, or received from, the victim line, and the plurality of crosstalk probing signals are superimposed over respective ones of a plurality of further regular signals transmitted over, or received from, respective ones of the
20 plurality of disturber lines.

 In one embodiment of the invention, the crosstalk measurements are slicer error measurements.

 In one embodiment of the invention, the plurality of probing signals are obtained by modulating the carriers of the
25 respective carrier groups with orthogonal probing sequences, and the plurality of probing signals are synchronously transmitted over respective ones of the plurality of disturber lines during dedicated transmission slots.

 Embodiments of a method according to the invention
30 correspond with the embodiments of a vectoring controller according to the invention.

 The proposed crosstalk channel estimation mechanism selects disjoint subsets of tones and uses crosstalk measurements to determine crosstalk from multiple disturbers
35 simultaneously. The measurements are then used to determine the relative strength and smoothness of the crosstalk channel, and to select disjoint subsets of tones for the next measurement

round. Interpolation and denoising of the measurements are used to iteratively improve the crosstalk channel estimates.

5 A first measurement on the selected tones for multiple lines provides information on the relative strength and smoothness of the crosstalk channel in terms of their frequency coherence. Based on this information, new disjoint sets of tone groups are determined for further measurements, e.g. by reassigning the existing sets to other disturber lines and simultaneously estimating the crosstalk coefficient values for
10 the new sets of measurements. If there is a significant variation in the strength of the crosstalk coefficients, more measurement points can be allocated to the lines that cause more crosstalk into the victim lines at the expense of the number of measurement points for lines that cause less, or an easy to
15 predict amount of crosstalk. In addition, the algorithm can estimate a smoothness factor that measures the coherence of the crosstalk coefficients across frequency, based on which it can reduce the number of total measurements. During subsequent iterations, the difference between measured and predicted
20 crosstalk values is used to determine new sets of measurement points.

It is shown that this strategy can reduce the channel acquisition time significantly. Simulations confirm that the time required to attain a performance close to the single line
25 performance can be reduced by an order of magnitude for smooth channels with sufficient frequency coherence across nearby tones.

The present invention provides a method to perform much faster crosstalk channel acquisition and faster convergence
30 toward vectored performance. It is able to determine the relative strength of the crosstalk channels on the fly, and to concentrate measurements toward the most dominant disturber lines. A careful selection of measurement points as well as interpolation and denoising of the measurements lead to
35 significant improvements in convergence speed, in particular for smooth crosstalk channels with sufficient frequency coherence across tones.

If knowledge about the strength and local variation of the crosstalk channels is known a priori, this can be exploited immediately by tailoring the measurements across the lines and tones to exploit frequency coherence across tones and to rapidly
5 acquire the dominant crosstalk coefficients.

Brief Description of the Drawings

The above and other objects and features of the invention will become more apparent and the invention itself will be best understood by referring to the following
10 description of an embodiment taken in conjunction with the accompanying drawings wherein:

- fig. 1 represents an exemplary DSL communication system;
- fig. 2 represents a flow chart of a crosstalk acquisition algorithm as per the present invention;
- 15 - fig. 3 represents a DSLAM as per the present invention;
- fig. 4 represents an exemplary assignment of downstream carriers to the respective disturber lines; and
- fig. 5 represents a plot of the mean rate loss as a function of the carrier group decimation factor.

20 Detailed Description of the Invention

There is seen in fig. 1 a DSL communication system 1 for providing broadband access to subscribers.

The DSL communication system 1 comprises a loop plant 300, a DSLAM 100 and N CPEs 200₁ to 200_N (or CPE₁ to CPE_N). The
25 DSLAM 100 comprises N transceivers 110₁ to 110_N (or TU₁ to TU_N) coupled via N subscriber lines L₁ to L_N to respective ones of the N CPEs 200₁ to 200_N. The subscriber lines L₁ to L_N are for example Unshielded Twisted Pairs (UTP).

The subscriber lines L₁ to L_N are bundled together
30 within a common binder B, and induce crosstalk into each other as they are in close vicinity over whole or part of their length. The subscriber lines L₁ to L_N are assumed to form part of the same vectoring group.

Because downstream and upstream communications are
35 assigned different and non-overlapping frequency bands, a principle commonly referred to as Frequency Division Duplexing (FDD), crosstalk mostly reduces to Far-End Crosstalk (FEXT): some substantial amount of the signal transmitted by a

transceiver (the disturber) couples into a neighboring line and impairs reception of the direct signal received over that neighboring line at a remote transceiver (the victim). For instance, the downstream signal transmitted by the transceiver
5 110₁ over line L₁ couples into line L_N and is detected as noise by the CPE 200_N. Also, the upstream signal transmitted by the CPE 200_N over line L_N couples into line L₁ and is detected as noise by the transceiver 110₁.

Fig. 2 shows a flow chart of a crosstalk acquisition
10 algorithm 1000 as per the present invention.

As aforementioned, there are a number of prior art methods for estimating the crosstalk coefficients from a plurality of disturber lines, say lines L₁ to L_{N-1}, into a victim line, say line L_N. The number of observations, and hence the
15 time required, is proportional to N-1 (i.e., the number of disturber lines):

- using pilot sequence of length at least N-1, one needs error samples error(f) from at least N-1 SYNC symbols;
- using SNIR measurements with one disturber at a time, one
20 needs one shared base plus two perturbed SNIR measurements per disturber line per iteration, i.e. 1+2·(N-1) measurements per iteration (or 3·(N-1) if using new base SNIR measurement for each disturber line); or
- using SNIR method with simultaneous perturbations for all
25 disturber lines, one still needs 1+2·(N-1) to get a set of linearly-independent equations that can be solved.

The proposed crosstalk acquisition algorithm 1000 comprises the following steps.

In a first step 1001, select a given victim line, and Q
30 disturber lines whose crosstalk towards the victim line needs to be characterized ($Q \leq N-1$).

In a second step 1002, split the Q disturber lines into M subsets SL₁ to SL_M ($2 \leq M \leq Q$).

In a third step 1003, divide the tones into disjoint
35 but preferably interleaved carrier groups CG₁ to CG_M assigned to the subsets SL₁ to SL_M respectively.

In a fourth step 1004, insert crosstalk probing signals in parallel for the respective subsets of disturber lines SL₁ to

SL_M. The insertion of the crosstalk probing signals is frequency-confined within the respective carrier groups, i.e. within the carrier group CG₁ for disturber lines of the subset SL₁, within the carrier group CG₂ for disturber lines of the subset SL₂, and so on.

In a fifth step 1005, obtain crosstalk measurements from the victim receiver while crosstalk probing signals are being inserted.

In a sixth step 1006, obtain crosstalk estimates from the disturber lines in the subset SL₁ towards the victim line on tones in CG₁ in time proportional to the size of the subset SL₁, from the disturber lines in the subset SL₂ towards the victim line on tones in CG₂ in time proportional to the size of the subset SL₂, and so on; extend estimation using interpolation and/or denoising to the rest of the tones. Optionally, use part or all of these new crosstalk estimates for updating the precoder or postcoder.

In a seventh step 1007, determine crosstalk characteristics for the respective disturber lines, such as the frequency coherence of the crosstalk channels, the most dominant disturber lines for the given victim line, etc.

In a eighth step 1008, decide whether more measurement points are needed for one or more disturber lines out of the Q disturber lines. If so then proceed with the next step, else exit the algorithm.

In a ninth step 1009, and based on the crosstalk observations during step 1007, adjust the number Q of disturber lines selected for further crosstalk characterization, and/or the number M of subsets of disturber lines, and/or the respective composition of the subsets SL₁ to SL_M, and/or the respective composition of the carrier groups CG₁ to CG_M; and reiterate through the steps 1004 to 1008 with the newly determined subsets of disturber lines and/or the newly determined carrier groups until the crosstalk coefficients are adequately estimated.

For example, one or more difficult lines with rapid crosstalk variations across frequency and/or strong crosstalk are grouped in a first subset that is assigned a large closely-

spaced carrier group, and similarly easy lines with slow crosstalk variations across frequency and/or weak crosstalk are grouped in a second subset that is assigned a small widely-spaced carrier group.

5 The subsets of disturber lines and/or the carrier groups can also be tailored based on the residual crosstalk. So, for example, disturbers whose crosstalk has already been adequately suppressed in previous iterations do not need to be included in any subset, and so the size of the subsets can be
10 decreased and/or the number of tones in the carrier group can be increased.

 Since crosstalk acquisition is now done in parallel, the time required is proportional to the maximum size of the subsets SL_1 to SL_M , which, if designed properly, should be much
15 less than $N-1$ (typically $(N-1)/M$).

 Optionally, the first iteration may use a frequency spacing much larger than the frequency coherence of a typical crosstalk channel. In this case the estimates are not accurate enough to get close to full vectored performance, but this is
20 not the purpose. The purpose is rather to quickly distinguish disturbers that are significant from those which have no significant crosstalk. Then, in one or more subsequent iterations, the significant disturbers are targeted and estimated precisely with smaller frequency spacing. So there is
25 a fast yet rough determination step, followed by a targeted precise estimation step.

 Let F_1 denote a typical frequency coherence of a typical crosstalk channel expressed in tones (coherence across F_1 tones), i.e. how far can one interpolate and still get very
30 precise estimates hence full vectored performance; let F_2 denote a secondary frequency coherence, i.e. how far can one subsample and still detect whether a line is a significant disturber or not; let D denote the number of significant disturbers out of the $N-1$ potential disturbers (e.g., those in the same binder as
35 the given victim line). Typically, we have $F_1 \ll F_2$ and $D \ll N-1$.

 The time required using F_1 as default decimation factor is $T_0 = N/F_1$. In the new approach, the time required is

$T1 = N/F2$ for the first iteration, plus $T2 = D/F1$ for the second iteration. Typically $T2 \ll T0$ assuming $F2 \gg F1$. Typically $T1 \ll T0$ assuming $D \ll N$. Hence $T1 + T2 \ll T0$.

The proposed crosstalk acquisition algorithm 1000 may be used during initial start-up procedures, or for crosstalk tracking, or for rapidly reacting when changes in crosstalk occur for one or more vectored lines.

Fig. 3 provides further details about the DSLAM 100.

The DSLAM 100 comprises the following functional blocks:

- the N transceivers 110;
- a Vectoring Processing Unit 120 (or VPU); and
- a Vectoring Control Unit 130 (or VCU) for controlling the operation of the VPU 120.

Each one of the transceivers 110 is coupled to the VPU 120 and to the VCU 130. The VCU 130 is further coupled to the VPU 120.

The VPU 120 and the VCU 130 can be co-located with the transceivers 110 on a single Line Termination (LT) board for board level vectoring, or can form part of a dedicated Printed Board Assembly (PBA) for system level vectoring.

Each one of the transceivers 110 comprises:

- a Digital Signal Processor (DSP) 111,
- an Analog Front End (AFE) 112, and
- a Line Adaptation Unit (LAU) 113.

The N DSPs 111 are coupled to respective ones of the N AFE units 112. The N AFEs 112 are further coupled to respective ones of the N LAUs 113. The N LAUs 113 are further coupled to respective ones of the N lines L_1 to L_N .

Each one of the DSPs 111 is arranged to operate both a downstream and an upstream DSL communication channel.

Each one of the DSPs 111 is for encoding and modulating user and control data into digital data symbols, and for demodulating and decoding user and control data from digital data symbols.

The following transmit steps are typically performed within the DSPs 111:

- data encoding, such as data multiplexing, framing, scrambling, error correction encoding and interleaving,
- signal modulation, comprising the steps of ordering the carriers according to a carrier ordering table, parsing the encoded bit stream according to the bit loadings of the ordered carriers, and mapping each chunk of bits onto an appropriate transmit constellation point (with respective carrier amplitude and phase), possibly with Trellis coding,
- signal scaling,
- Inverse Fast Fourier Transform (IFFT)
- Cyclic Prefix (CP) insertion, and
- time-windowing.

The following receive steps are typically performed within the DSPs 111:

- time-domain signal equalization,
- Cyclic Prefix (CP) removal,
- Fast Fourier Transform (FFT),
- frequency-domain signal equalization,
- signal de-modulation and detection, comprising the steps of applying to each and every equalized frequency sample an appropriate constellation grid, the pattern of which depends on the respective carrier bit loading, detecting the expected transmit constellation point and the corresponding transmit bit sequence, possibly with Trellis decoding, and re-ordering all the detected chunks of bits according to the carrier ordering table,
- data decoding, such as data de-interleaving, RS decoding (byte errors, if any, are corrected at this stage), de-scrambling, frame delineation and de-multiplexing.

Each one of the DSPs 111 is further configured to operate an Embedded Overhead Channel (EOC) that is used to transport control and management messages, such as OLR commands and responses. The EOC data are multiplexed with the user data over the DSL channel.

Each one of the AFEs 112 comprises a Digital-to-Analog Converter (DAC) and an Analog-to-Digital Converter (ADC), a transmit filter and a receive filter for confining the signal energy within the appropriate communication frequency bands

while rejecting out-of-band interference, a line driver for amplifying the transmit signal and for driving the transmission line, and a Low Noise Amplifier (LNA) for amplifying the receive signal with as little noise as possible.

5 Each one of the LAUs 113 comprises a hybrid for coupling the transmitter output to the transmission line and the transmission line to the receiver input while achieving low transmitter-receiver coupling ratio (e.g., by means of echo cancellation techniques), further transmit and receive high-pass
10 filters for filtering out any unwanted signals present in the POTS/ISDN frequency bands, impedance-matching circuitry for adapting to the characteristic impedance of the line, and isolation circuitry (typically a transformer).

Each one of the DSPs 111 is further configured to
15 supply transmit frequency-domain samples to the VPU 120 before Inverse Fast Fourier Transform (IFFT) step for joint signal precoding, and to supply receive frequency-domain samples to the VPU 120 after Fast Fourier Transform (FFT) step for joint signal post-processing.

20 Each one of the DSPs 111 is further configured to receive corrected frequency-domain samples from the VPU 120 for further transmission or detection. Alternatively, the DSPs 111 may receive correction samples to add to the initial frequency-domain samples before further transmission or detection.

25 The VPU 120 is configured to mitigate the crosstalk induced over the transmission lines L_1 to L_N . This is achieved by multiplying a vector $\mathbf{S}$ of transmit frequency-domain samples with a precoding matrix $\mathbf{P}$ so as to compensate for an estimate of the coming crosstalk (downstream), or by multiplying a vector $\mathbf{R}$
30 of receive frequency-domain samples with a crosstalk cancellation matrix $\mathbf{G}$ so as to cancel an estimate of the incurred crosstalk (upstream).

Let i and j denote line indexes ranging from 1 to N , k a frequency index, and l a Discrete Multi-Tone (DMT) symbol
35 index.

Let $S_{i,k}^l$ and $S_{i,k}^{*l}$ denote the transmit frequency-domain samples transmitted over line L_i during DMT symbol l

before and after crosstalk pre-compensation by the VPU 121 respectively.

Similarly, let $R_{i,k}^1$ and $R_{i,k}^{*1}$ denote the receive frequency-domain samples received from line L_i during DMT symbol 1 before and after crosstalk cancellation respectively.

We have:

$$\mathbf{S}_k^{*1} = \begin{bmatrix} S_{1,k}^{*1} \\ S_{2,k}^{*1} \\ \vdots \\ S_{N,k}^{*1} \end{bmatrix} = \mathbf{P}_k \cdot \mathbf{S}_k^1 = \begin{bmatrix} 1 & P_{1,2,k} & \cdots & P_{1,N,k} \\ P_{2,1,k} & 1 & & \vdots \\ \vdots & & & P_{N-1,N,k} \\ P_{N,1,k} & \cdots & P_{N,N-1,k} & 1 \end{bmatrix} \cdot \begin{bmatrix} S_{1,k}^1 \\ S_{2,k}^1 \\ \vdots \\ S_{N,k}^1 \end{bmatrix} \quad (2), \text{ and}$$

$$\mathbf{R}_k^{*1} = \begin{bmatrix} R_{1,k}^{*1} \\ R_{2,k}^{*1} \\ \vdots \\ R_{N,k}^{*1} \end{bmatrix} = \mathbf{G}_k \cdot \mathbf{R}_k^1 = \begin{bmatrix} 1 & G_{1,2,k} & \cdots & G_{1,N,k} \\ G_{2,1,k} & 1 & & \vdots \\ \vdots & & & G_{N-1,N,k} \\ G_{N,1,k} & \cdots & G_{N,N-1,k} & 1 \end{bmatrix} \cdot \begin{bmatrix} R_{1,k}^1 \\ R_{2,k}^1 \\ \vdots \\ R_{N,k}^1 \end{bmatrix} \quad (3).$$

In the matrix $\mathbf{P}$ or $\mathbf{G}$, a row i represents a particular victim line L_i , while a column j represents a particular disturber line L_j . At the intersection, the coupling coefficient that should be applied to the corresponding disturber transmit or receive frequency-domain sample for mitigating over the victim line L_i the crosstalk from the disturber line L_j . Not all the coefficients of the matrix need to be determined, for instance on account of limited vectoring capabilities first assigned to the strongest crosstalkers, or still for instance due to the fact that some lines do not noticeably interact with each other. The undetermined coefficients are preferably set to 0.

The VCU 130 is basically for controlling the operation of the VPU 120, and more specifically for estimating or updating the crosstalk coefficients between vectored lines, and for initializing or updating the precoding matrix $\mathbf{P}$ and the crosstalk cancellation matrix $\mathbf{G}$ from the so-estimated crosstalk coefficients.

Presently, the VCU 130 makes use of the SNIR method for estimating or updating the crosstalk coefficients. The VCU 130 gathers SNIR measurements carried out over a particular victim line, say line L_N , while weighted replicas of regular signals transmitted over the disturber lines, say lines L_1 to L_{N-1} , are

being superimposed over the regular signal transmitted over the victim line.

For instance, the line L_N may be a legacy line that is being initialized and further brought into service, while the
5 lines L_1 to L_{N-1} are active lines in showtime mode. The crosstalk coefficients from and toward the initializing line L_N need to be estimated first before the crosstalk from and toward that line can be mitigated.

The description will now focus on crosstalk acquisition
10 from the disturber lines L_1 to L_{N-1} towards the victim line L_N for downstream communication.

In a first step, the VCU 130 splits the whole set of disturber lines L_1 to L_{N-1} ($Q = N-1$) into M subsets of disturber lines SL_1 to SL_M comprising one or more disturber lines
15 ($2 \leq M \leq N-1$). The subsets SL_1 to SL_M do not necessarily comprise an equal number of disturber lines.

The VCU 130 next assigns disjoint sets CG_1 to CG_M of downstream carriers to the subsets SL_1 to SL_M respectively. The carrier assignment algorithm shall take due account of the
20 measured SNIR granularity that is enforced by the SNIR measurements and reporting primitives.

Typically, SNIR is measured and averaged over multiple contiguous carriers and over successive DMT symbols (typically 256). An SNIR carrier group, i.e. a carrier group for which only
25 a single measured SNIR value is available, may comprise 1, 2, 4 or 8 contiguous carriers, depending on the transmission profile being used and the maximum carrier index being supported.

The VCU 130 first determines the SNIR downstream carrier groups based on the maximum carrier index being
30 supported. Next, the VCU 130 discards any SNIR downstream carrier groups, a carrier of which is not a member of the downstream MEDLEY set, i.e. the overall set of active downstream carriers that are used for downstream communication, as SNIR is not expected to be reported for those groups. Finally, the VCU
35 130 assigns the remaining SNIR carrier groups to the respective subsets SL_1 to SL_M .

Let Γ denote the overall number of valid SNIR downstream carrier groups, and let SCG_n denote the n th valid SNIR downstream carrier group ($1 \leq n \leq \Gamma$).

For a first initial crosstalk acquisition, the set CG_m of downstream carriers assigned to a particular subset SL_m ($1 \leq m \leq M$) could be determined as follows:

$$CG_m = \bigcup_n SCG_n, \text{ with } n = m + \lambda \cdot M, \quad 0 \leq \lambda \leq \Omega - 1, \quad \Omega = \lfloor \Gamma / M \rfloor \quad (4).$$

For instance, if SNIR measurements were averaged over two carriers, carriers would be pair-wise assigned to the respective subsets of disturber lines, say carrier pair $\{k; k+1\}$ to the first subset, carrier pair $\{k+2; k+3\}$ to the second subset, and so on.

The remaining SNIR downstream carrier groups $SCG_{\Omega \cdot M + 1}$ to SCG_Γ , if any, are evenly distributed to selected subsets of disturber lines in a fixed, arbitrary or random manner.

This initial carrier assignment applies a common decimation (or sub-sampling) factor to all the carrier groups, presently the number M of subsets of disturber lines, and achieves an almost-identical inter-carrier spacing pattern, thereby allowing a very first characterization of the crosstalk channels.

Subsequently, and depending on the smoothness and/or strength of the crosstalk estimates, different decimation factors could be applied to the respective subsets of disturber lines.

In a second step, crosstalk probing signals are being superimposed on the regular downstream signal transmitted over the victim line.

The crosstalk probing signal for estimating the crosstalk coefficients from a given disturber line L_j toward a given victim line L_i is a weighted replica of the regular downstream signal transmitted over the disturber line L_j , and is superimposed over the victim line L_i . The crosstalk probing signal additively or destructively interfere with the actual crosstalk signal from the disturber line L_j depending on the chosen weight values and the crosstalk coupling function.

Also, the VCU 130 confines the insertion of the crosstalk probing signals to the respective carrier groups, meaning that, at a particular frequency index $k \in CG_m$, the VCU 130 inserts one or more probing signals for one or more
 5 disturber lines that belong to the subset SL_m , and does not insert any probing signal for the disturber lines that do not belong to the subset SL_m .

Thus, we have:

$$XTS_{i,k}^1 = \sum_{j \neq i} \alpha_{j,k} \cdot S_{j,k}^1 \quad (5),$$

10 wherein $XTS_{i,k}^1$ denotes the k -th frequency sample of the overall crosstalk probing signal superimposed on the victim line L_i during DMT symbol 1, and $\alpha_{j,k}$ denotes a complex weight value used for the disturber line L_j on tone k ,
 and wherein $\alpha_{j,k} = \alpha_j$ (6a) for $k \in CG_m$ and for a disturber line
 15 $L_j \in SL_m$, and $\alpha_{j,k} = 0$ (6b) for $k \in CG_m$ and for a disturber line $L_j \notin SL_m$.

Equations (6a) and (6b) ensure that the crosstalk probing signals for the respective disturber lines are frequency-confined within the respective carrier groups. This
 20 non-overlapping frequency-interleaved signal insertion allows parallel and fast acquisition of crosstalk coefficients from multiple disturber lines.

Three successive SNIR measurement rounds with three distinct complex weight values are required for estimating both
 25 the amplitude and phase of the crosstalk coefficients from a given disturber line. Typically, $\alpha_j = 0$ (i.e., no crosstalk probing signal is inserted; this base SNIR measurement can be performed prior to or after the insertion of the crosstalk probing signals), $\alpha_j = \varepsilon$ (i.e., a scaled replica of the regular
 30 data signal is inserted), and $\alpha_j = j\varepsilon$ (i.e., a scaled quadrature replica of the regular data signal is inserted) for the three respective measurement rounds. A suitable value for ε is chosen such that the impact on the SNR is measurable but not excessive (typically no more than 3 dB SNIR variation at the
 35 victim receiver).

If a subset SL_m comprises more than one disturber line, then the corresponding crosstalk probing signals may be sent sequentially one after the other (e.g., as per Appendix III.2 of G.993.5 ITU recommendation), meaning a total of $1+2 \cdot \text{size}(SL_m)$ observations are required for acquiring the crosstalk coefficients from this subset of disturber lines, or the crosstalk probing signals may be combined all together with respective weight values $\{\alpha_j\}_{L_j \in SL_m}$ (e.g., as per Appendix III.3 of G.993.5 ITU recommendation). Yet, linearly-independent weight values are required so as to get a set of linearly-independent equations that can be solved, meaning still a total of $1+2 \cdot \text{size}(SL_m)$ observations.

The superimposition of the crosstalk probing signals can be easily achieved by adding the weight values $\alpha_{j,k}$ to the respective coefficients $P_{i,j,k}$, $j \neq i$ of the precoder matrix $\mathbf{P}$.

Initially, when a new joining line L_i joins an existing vectoring group, the off-diagonal elements of the i -th row of the precoding matrix $\mathbf{P}$ are all null as the crosstalk channels toward that new joining line L_i have not been characterized yet. So are the off-diagonal elements of the i -th column as the crosstalk channels from that new joining line L_i have not been characterized yet.

A first SNIR measurement round now takes place while first weight values $\alpha_{j,k}^{(1)} = \varepsilon^{(1)} / j \varepsilon^{(1)}$ are added to the current matrix coefficients values $P_{i,j,k}$, $j \neq i$: $P_{i,j,k}^{(1)} = \alpha_{j,k}^{(1)}$.

Next, the values of the matrix coefficients $P_{i,j}^{(1)}$ are determined from the first rough estimates of the crosstalk coefficients, and the VPU 120 starts canceling a part of the crosstalk induced over the victim line L_i . Yet, some residual crosstalk remains owing to the crosstalk estimation errors and SNIR measurement inaccuracies.

A new SNIR measurement round now takes place while new weight values $\alpha_{j,k}^{(2)} = \varepsilon^{(2)} / j \varepsilon^{(2)}$ are added to the current matrix coefficients values $P_{i,j,k}$, $j \neq i$: $P_{i,j,k}^{(2)} = P_{i,j,k}^{(1)} + \alpha_{j,k}^{(2)}$.

The value $\varepsilon^{(2)}$ used for that second measurement round is typically lower than the value $\varepsilon^{(1)}$ that was used during the first measurement round as part of the crosstalk is already canceled. The process re-iterates till the residual crosstalk power is below a pre-determined relative or absolute threshold.

In a third step, the VCU 130 instructs the corresponding transceiver 110, namely the transceiver 110_N, to fetch SNIR measurement values from the victim CPE, namely the CPE 200_N, while the crosstalk probing signals are being superimposed on the victim line L_N.

Thereupon, the transceiver 110_N sends multiple PMD READ commands to read the SNIR values as measured by the CPE 200_N. Typically, a single PMD READ command reads a single SNIR value SNIR_n as averaged over a particular SNIR downstream carrier group SCG_n and over successive DMT symbols. The SNIR values for all the SNIR downstream carrier groups are read sequentially while a single weight value is in force. Next, the weight values are adjusted, and the process re-iterates.

In a fourth step, the VCU 130 estimates the crosstalk coefficient values from the measured SNIR values as set forth in Appendix III of G.993.5 ITU recommendation, the content of which is entirely incorporated therein.

The missing crosstalk coefficients at intermediary frequency indexes are determined by means of interpolation. Denoising techniques may also be involved.

Optionally, the VCU 130 proceeds with the computation or update of the precoding matrix **P** from the new crosstalk estimates. The VCU 130 can use a first-order matrix inversion to compute the coefficients of the precoding matrix **P**, or any other suitable method.

The VCU 130 is further configured to quantify the variation across frequency of the crosstalk coefficients (both phase and amplitude), which is indicative of the frequency coherence of the crosstalk channel. The VCU 130 sorts the disturber lines based on the frequency coherence of the respective crosstalk channels. The VCU 130 may further sort the disturber lines based on the magnitude of the respective

crosstalk coefficients, which is indicative of the amount of crosstalk impairment induced over the victim line.

Based on the smoothness and/or magnitudes of the crosstalk coefficients, the VCU 130 adjusts the number M of subsets of disturber lines, and/or re-arranges the disturber lines into different subsets, and/or adjusts the decimation factors of the respective carrier groups as well as the dispatching of the downstream SNIR carrier groups to the respective carrier groups. The VCU 130 may also de-select disturber lines that do not (or no longer) noticeably interact with the victim line.

The VCU 130 next re-iterates through the second, third and fourth steps with the newly determined subsets of disturber lines and respective carrier groups until the crosstalk estimates converge.

It can be seen that the algorithm uses parallel rather than successive measurements, and that, after an initial sensing phases, the algorithm tailors the measurements and tone groups such that they focus on the dominant crosstalker(s) and further interpolation and denoising.

If any a priori information is available on the relative crosstalk strength and/or smoothness for some of the disturber lines, then the initial sensing phase can be skipped.

Crosstalk compensation can start at and around the measured tones (possibly with an attenuation to limit the effect of estimation errors). Depending on the smoothness of the channel, crosstalk over a smaller or larger region around the measured tone groups can be compensated. As soon as more measurements become available, a combination of interpolation and denoising is used to improve the crosstalk estimates and to adjust compensation.

For the purpose of interpolation and denoising, weighting may further be used to reduce the impact of measurement errors in the initial measurements.

For mixed vectored and legacy systems, the algorithm can reduce the convergence time of an activating line significantly, as well as the computational complexity of the crosstalk estimation algorithm.

In an alternative embodiment, and still making use of SNIR measurements over the victim line, a crosstalk probing signal is superimposed over each disturber line. The crosstalk probing signal is a weighted replica of the regular signal transmitted over the victim line. The crosstalk probing signals couples into the victim line through the crosstalk channels, and additively or destructively interfere with the direct victim signal depending on the chosen weight values and the crosstalk coupling function. Yet, this method is less preferred as the power of the crosstalk probing signal needs to be substantially increased to achieve the same estimation accuracy, which may severely impair the direct communication over the disturber lines.

In an alternative embodiment, a particular orthogonal pilot sequences assigned to a particular disturber line L_j modulates the carriers of the disjoint carrier groups CG_m assigned to the subset SL_m to which the subscriber line L_j belongs. The remaining carriers that are not member of the carrier group CG_m remain unmodulated, or may carry the SYNC-FLAG information. The resulting crosstalk probing signal is then transmitted over the disturber line L_j during dedicated transmission slots, such as during the SYNC symbols.

Multiple disturber lines may use the same orthogonal pilot sequence, yet this orthogonal pilot sequence will only modulate disjoint groups of carriers over the respective disturber lines.

Slicer errors are measured over the victim line and correlated with the pilot sequence of a given disturber line so as to isolate the crosstalk contribution from that disturber line.

There is seen in fig. 4 a pictorial view of an exemplary assignment of downstream carriers to the respective disturber lines as per the present invention.

First of all, the communication carriers are split into SNIR carrier groups according to the selected transmission profile. An SNIR carrier group comprise Δ contiguous carriers ($\Delta = 4$ in fig. 4). Let SCG_n^* denotes those initial SNIR carrier groups:

$$SCG_n^* = \{(n \times \Delta); (n \times \Delta) + 1; \dots; ((n+1) \times \Delta) - 1\} \quad (7)$$

Next, the SNIR carrier groups are intersected with the downstream MEDLEY set MEDLEY_DS, and any SNIR carrier group that remains unchanged after this intersect operation is kept, while
 5 the ones that do not are discarded. The remaining valid SNIR carrier groups are denoted as SCG_n and are renumbered from 1 to Γ .

Next, the $N-1$ disturber lines L_1 to L_{N-1} are organized into M subsets SL_1 to SL_M (presently $M = N-1$), and the Γ SNIR
 10 downstream carrier groups SCG_n are individually and evenly dispatched toward the M subsets SL_1 to SL_M , thereby yielding disjoint and interleaved set of downstream carriers groups CG_1 to CG_M for parallel crosstalk acquisition.

Within each carrier group CG_m , the inter-carrier
 15 spacing between contiguous SNIR carrier groups is typically equal to $(N-2) \cdot \Delta$ (with some discontinuities at the frequency gaps of the transmission profile, if any).

A crosstalk probing signal XTS_j is inserted over the victim line L_N for characterizing the crosstalk channel from a
 20 given disturber line L_j , $j \neq N$. The crosstalk probing signal XTS_j only modulates the carriers of the particular carrier group CG_m assigned to the subset SL_m to which the particular disturber line L_j belongs.

The crosstalk probing signals XTS_j , $j \neq N$ are then
 25 frequency-combined into one single crosstalk probing signal

$$XTS_N = \sum_{j=1 \dots N-1} XTS_j$$
 that is superimposed over the regular signal transmitted over the victim line L_N .

The induced SNIR changes are detected and measured at the victim CPE 200_N, and a single average SNIR value $SNIR_n$ is
 30 computed for each and every SNIR downstream carrier group SCG_n . The average SNIR values $SNIR_n$ are reported back to the DSLAM 100 for characterization of the crosstalk channels.

Fig. 5 shows a plot of the mean rate loss versus the carrier group sub-sampling factor for a DSL system with eight
 35 subscriber lines: the more sub-sampling, the more inter-carrier spacing, the less accurate the interpolation, the more residual

crosstalk, and thus the more rate loss compared to the nominal rate figures without any decimation. Yet, even for a very basic interleaving scheme, the rate-loss penalty is relatively low for sufficient smooth crosstalk channels.

5 Although the above description mostly focuses on acquisition of downstream crosstalk coefficients, it equally applies to the acquisition of upstream crosstalk coefficients.

For instance, the crosstalk probing signals that are used for estimating the upstream crosstalk coefficients are
10 weighted replicas of the receive signal samples from the respective disturber lines, and are superimposed over the receive signal samples from the victim line by appropriately adjusting the coefficients of the crosstalk cancellation matrix **G**.

15 The VCU 130 assigns disjoint sets of upstream carriers to the disturber lines. The upstream carriers are chosen from the upstream MEDLEY set. The SNIR is now measured by the transceiver 110_N, and directly made available to the VCU 130 for upstream crosstalk estimation.

20 It is to be noticed that the term 'comprising' should not be interpreted as being restricted to the means listed thereafter. Thus, the scope of the expression 'a device comprising means A and B' should not be limited to devices consisting only of components A and B. It means that with
25 respect to the present invention, the relevant components of the device are A and B.

It is to be further noticed that the term 'coupled' should not be interpreted as being restricted to direct connections only. Thus, the scope of the expression 'a device A
30 coupled to a device B' should not be limited to devices or systems wherein an output of device A is directly connected to an input of device B, and/or vice versa. It means that there exists a path between an output of A and an input of B, and/or vice versa, which may be a path including other devices or means.

35 The description and drawings merely illustrate the principles of the invention. It will thus be appreciated that those skilled in the art will be able to devise various arrangements that, although not explicitly described or shown

herein, embody the principles of the invention. Furthermore, all examples recited herein are principally intended expressly to be only for pedagogical purposes to aid the reader in understanding the principles of the invention and the concepts contributed by the inventor(s) to furthering the art, and are to be construed as being without limitation to such specifically recited examples and conditions. Moreover, all statements herein reciting principles, aspects, and embodiments of the invention, as well as specific examples thereof, are intended to encompass equivalents thereof.

The functions of the various elements shown in the figures may be provided through the use of dedicated hardware as well as hardware capable of executing software in association with appropriate software. When provided by a processor, the functions may be provided by a single dedicated processor, by a single shared processor, or by a plurality of individual processors, some of which may be shared. Moreover, a processor should not be construed to refer exclusively to hardware capable of executing software, and may implicitly include, without limitation, digital signal processor (DSP) hardware, network processor, application specific integrated circuit (ASIC), field programmable gate array (FPGA), etc. Other hardware, conventional and/or custom, such as read only memory (ROM), random access memory (RAM), and non volatile storage, may also be included.

CLAIMS

1. **A method** (1000) for acquiring **crosstalk coefficients** from **a plurality of disturber lines** (L_1 ; L_2) into **a victim line** (L_N) in **a wired multi-carrier communication system** (1), the method iterating through the steps of inserting **a plurality of crosstalk probing signals** (XTS_1 ; XTS_2) within the wired multi-carrier communication system for probing the crosstalk from respective ones of the plurality of disturber lines into the victim line, carrying out **crosstalk measurements** ($SNIR_n$) over the victim line, and estimating the crosstalk coefficients from the crosstalk measurements, *wherein* the method iterates through the further steps of organizing the plurality of disturber lines into **subsets of disturber lines** (SL_1 ; SL_2), and individually assigning **disjoint groups of carriers** (CG_1 ; CG_2) to the respective subsets of disturber lines, *wherein* the insertion of the plurality of crosstalk probing signals is confined within the respectively assigned groups of carriers, *and wherein* the subsets of disturber lines and/or the groups of carriers used for **a second or subsequent iteration** are tailored based on **crosstalk characteristics** observed for the respective disturber lines during **a previous iteration**.
2. **A method** according to claim 1, *wherein* the observed crosstalk characteristics are indicative of the frequency coherence of the respective crosstalk channels.
3. **A method** according to claim 1, *wherein* the observed crosstalk characteristics are indicative of the amounts of nominal crosstalk incurred from the respective disturber lines.
4. **A method** according to claim 1, *wherein* the observed crosstalk characteristics are indicative of the amounts of residual crosstalk incurred from the respective disturber lines that remain uncompensated over the victim line.

5. **A method** according to claim 1, *wherein* the subsets of disturber lines are assigned interleaved carrier groups with respective decimation factors,
and wherein the decimation factors used for **a first iteration**
5 are substantially greater than **a typical frequency coherence of a typical crosstalk channel**.

6. **A method** according to claim 1, *wherein* the subsets of disturber lines individually comprise one or more disturber
10 lines.

7. **A method** according to claim 1, *wherein* the step of estimating **particular crosstalk coefficients** from **a particular disturber line** into the victim line comprises the
15 steps of obtaining **particular crosstalk measurements** carried out over the victim line at **particular frequency indexes** of **a particular carrier group** assigned to **a particular subset of disturber lines** which the particular disturber line belongs to, estimating the particular crosstalk
20 coefficients at the particular frequency indexes from the particular crosstalk measurements, and determining the remaining particular crosstalk coefficients at the remaining frequency indexes by means of interpolation.

25 8. **A method** according to claim 1, *wherein* the crosstalk measurements are Signal to Noise and Interference Ratio SNIR measurements (SNIR_n).

9. **A method** according to claim 8, *wherein* the
30 plurality of crosstalk probing signals are weighted replicas of **a plurality of regular signals** transmitted over, or received from, respective ones of the plurality of disturber lines,
and wherein the plurality of crosstalk probing signals are
35 combined as **a single crosstalk probing signal** (XTS_N) superimposed over **a further regular signal** transmitted over, or received from, the victim line.

10. **A method** according to claim 8, *wherein* the plurality of crosstalk probing signals are weighted replicas of **a regular signal** transmitted over, or received from, the victim line,

5 *and wherein* the plurality of crosstalk probing signals are superimposed over respective ones of **a plurality of further regular signals** transmitted over, or received from, respective ones of the plurality of disturber lines.

10 11. **A method** according to claim 1, *wherein* the crosstalk measurements are **slicer error measurements**.

12. **A method** according to claim 11, *wherein* the plurality of probing signals are obtained by modulating the
15 carriers of the respective carrier groups with **orthogonal probing sequences**,

and wherein the plurality of probing signals are synchronously transmitted over respective ones of the plurality of disturber lines during **dedicated transmission slots**.

20

13. **A vectoring controller** (130) for acquiring **crosstalk coefficients** from **a plurality of disturber lines** (L_1 ; L_2) into **a victim line** (L_N) in **a wired multi-carrier communication system** (1), the vectoring controller
25 being configured to iterate through the steps of inserting **a plurality of crosstalk probing signals** (XTS_1 ; XTS_2) for probing the crosstalk from respective ones of the plurality of disturber lines into the victim line, receiving **crosstalk measurements** ($SNIR_n$) carried out over the victim line, and
30 estimating the crosstalk coefficients from the crosstalk measurements,

wherein the vectoring controller is further configured to iterate through the further steps of organizing the plurality of disturber lines into **subsets of disturber lines** (SL_1 ; SL_2),
35 and individually assigning **disjoint groups of carriers** (CG_1 ; CG_2) to the respective subsets of disturber lines,
and wherein the vectoring controller is further configured to confine the insertion of the plurality of crosstalk probing

signals within the respectively assigned groups of carriers, and to tailor the subsets of disturber lines and/or the groups of carriers used for **a second or subsequent iteration** based on **crosstalk characteristics** observed for the respective
5 disturber lines during **a previous iteration**.

14. **A Digital Subscriber Line Access Multiplexer DSLAM** (100) comprising **a vectoring controller** (130) according to claim 13.

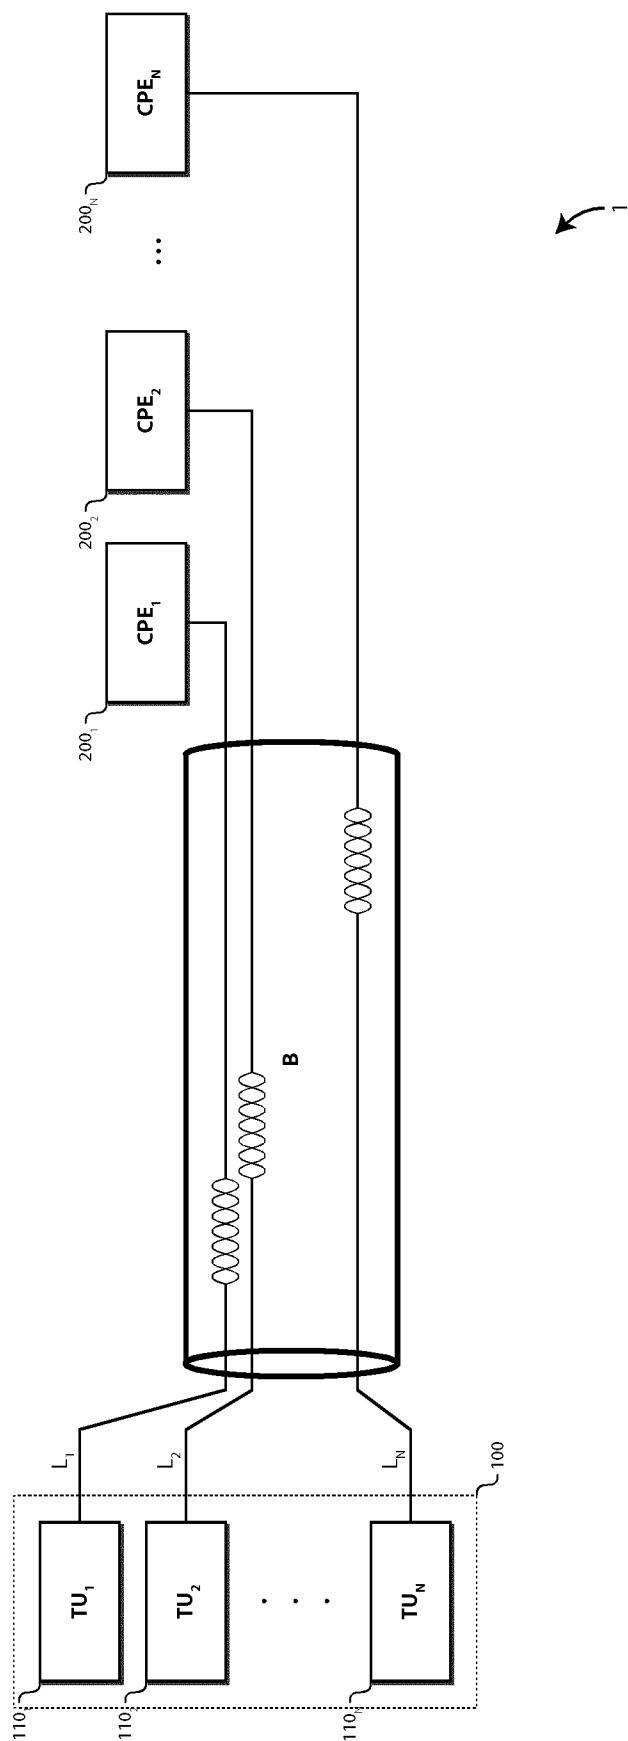


Fig. 1

- 2/5 -

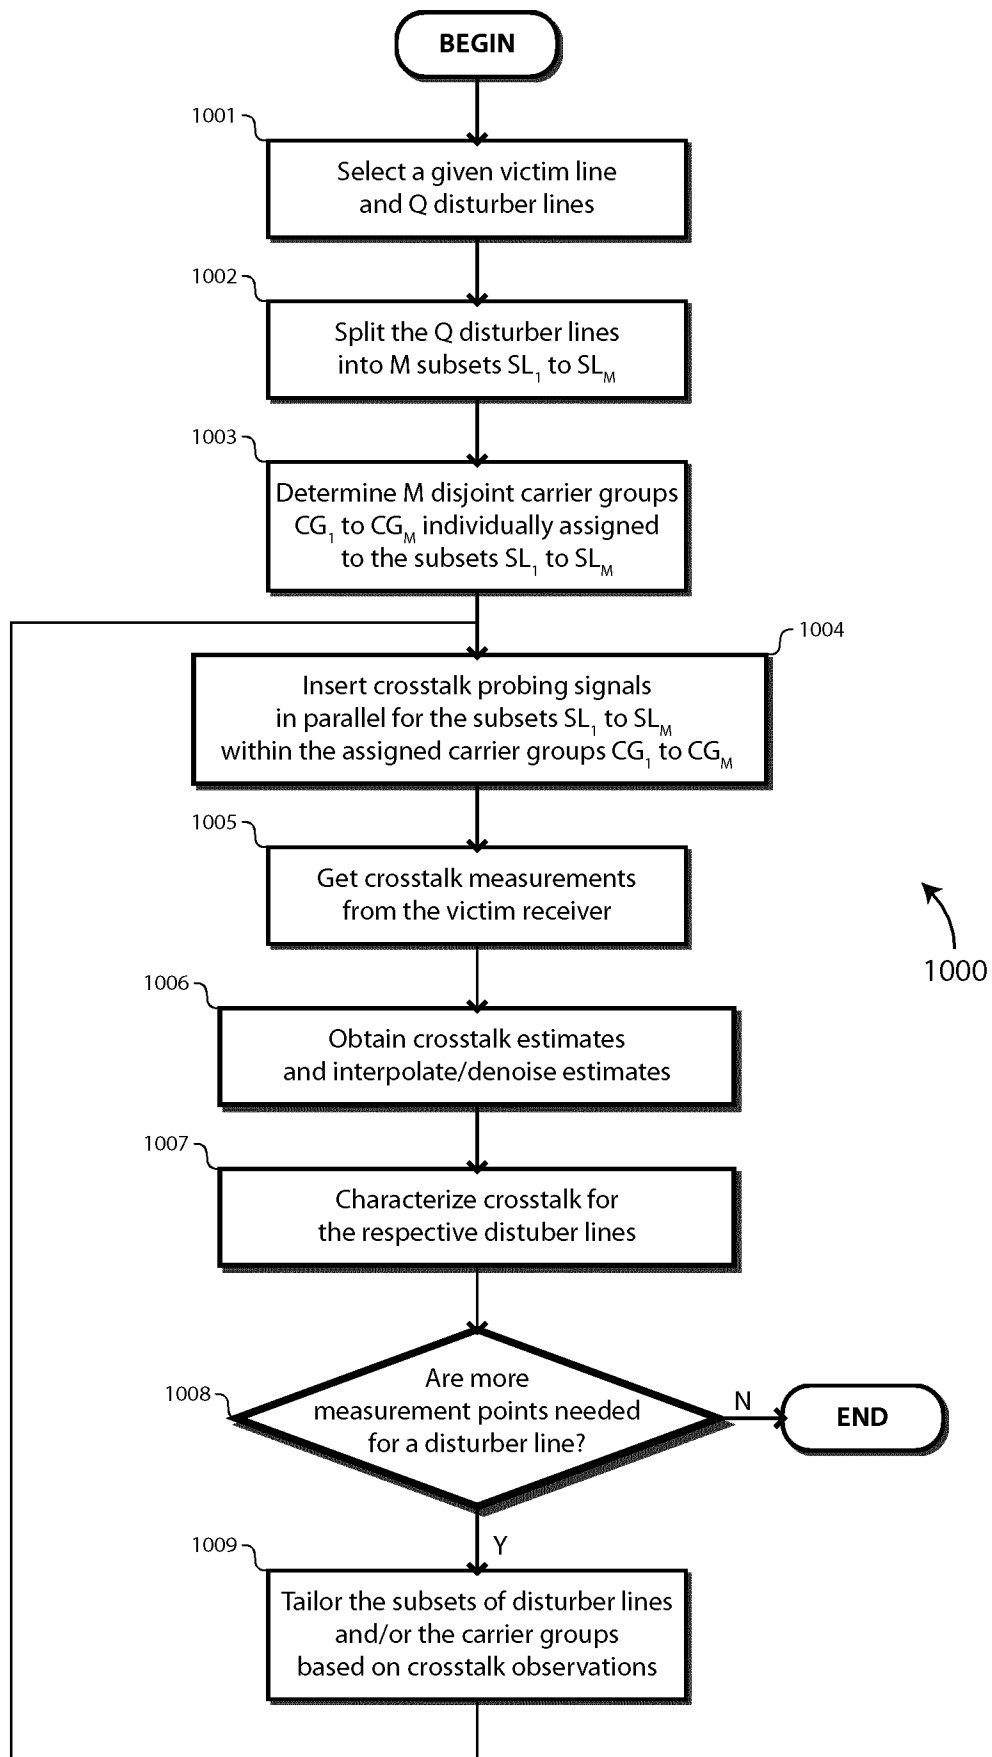


Fig. 2

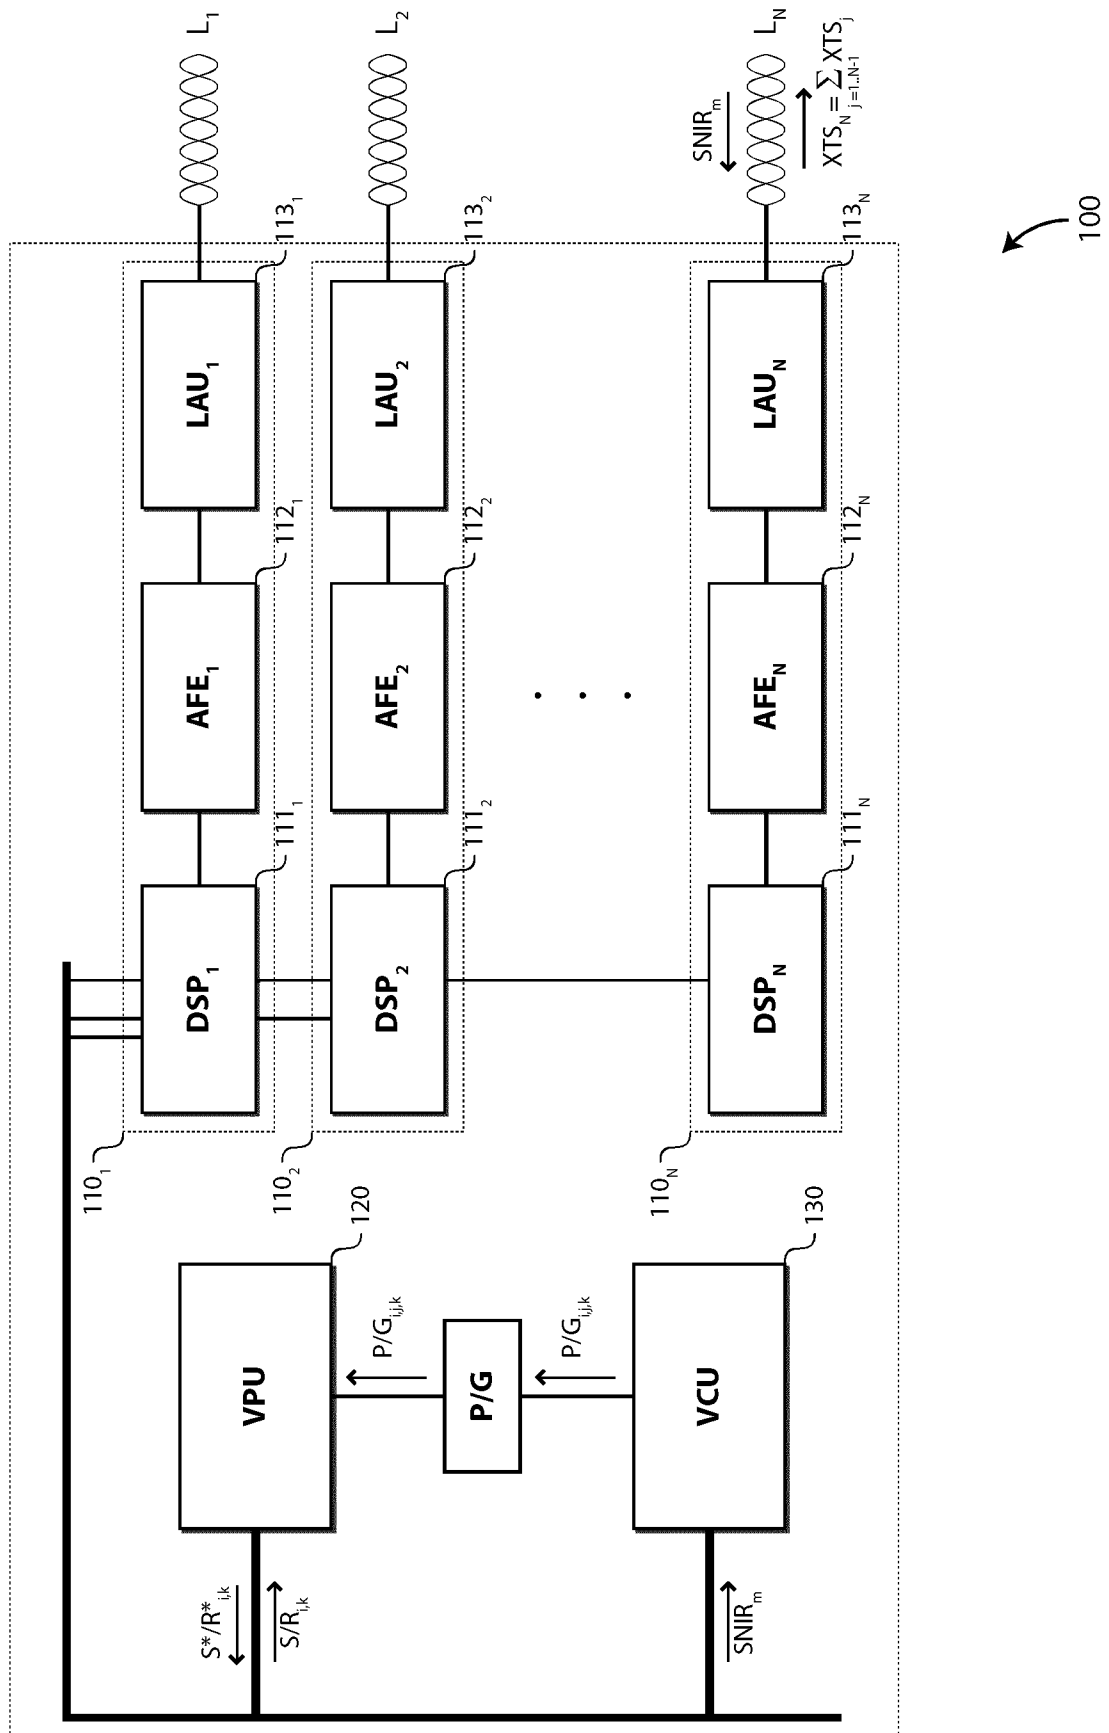


Fig. 3

- 4/5 -

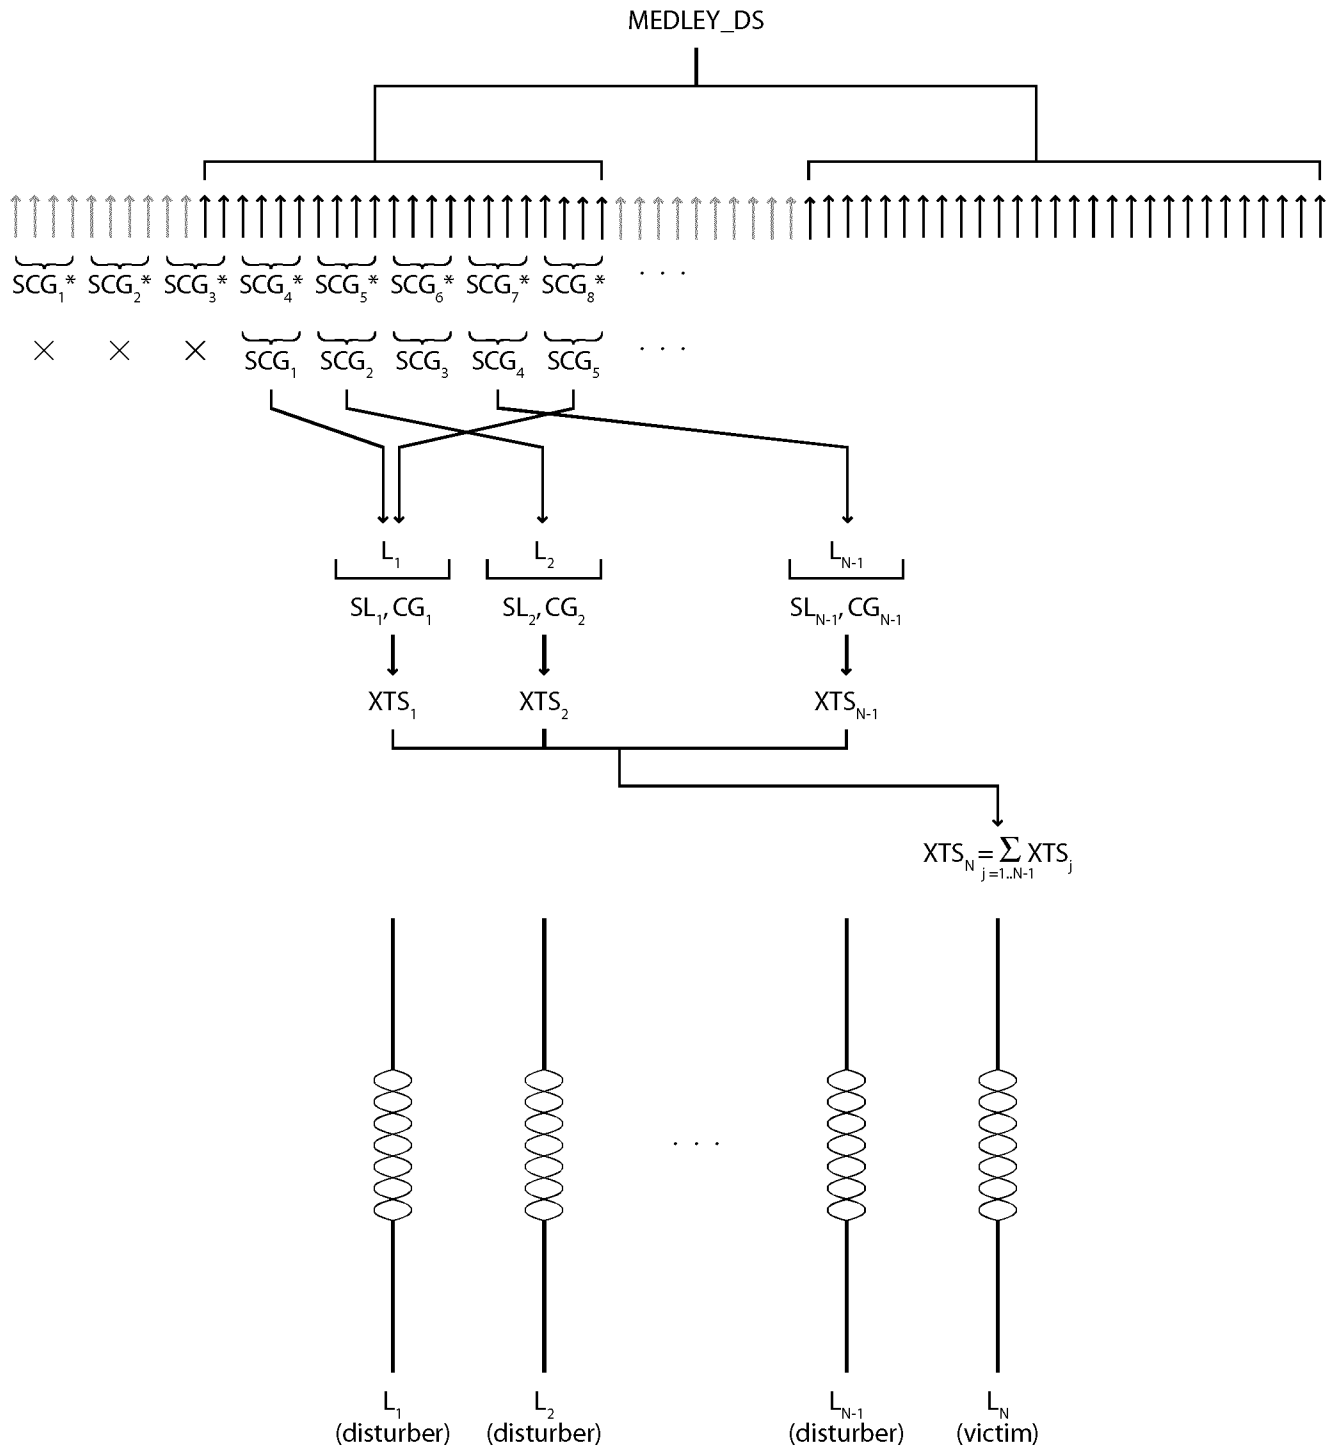


Fig.4

- 5/5 -

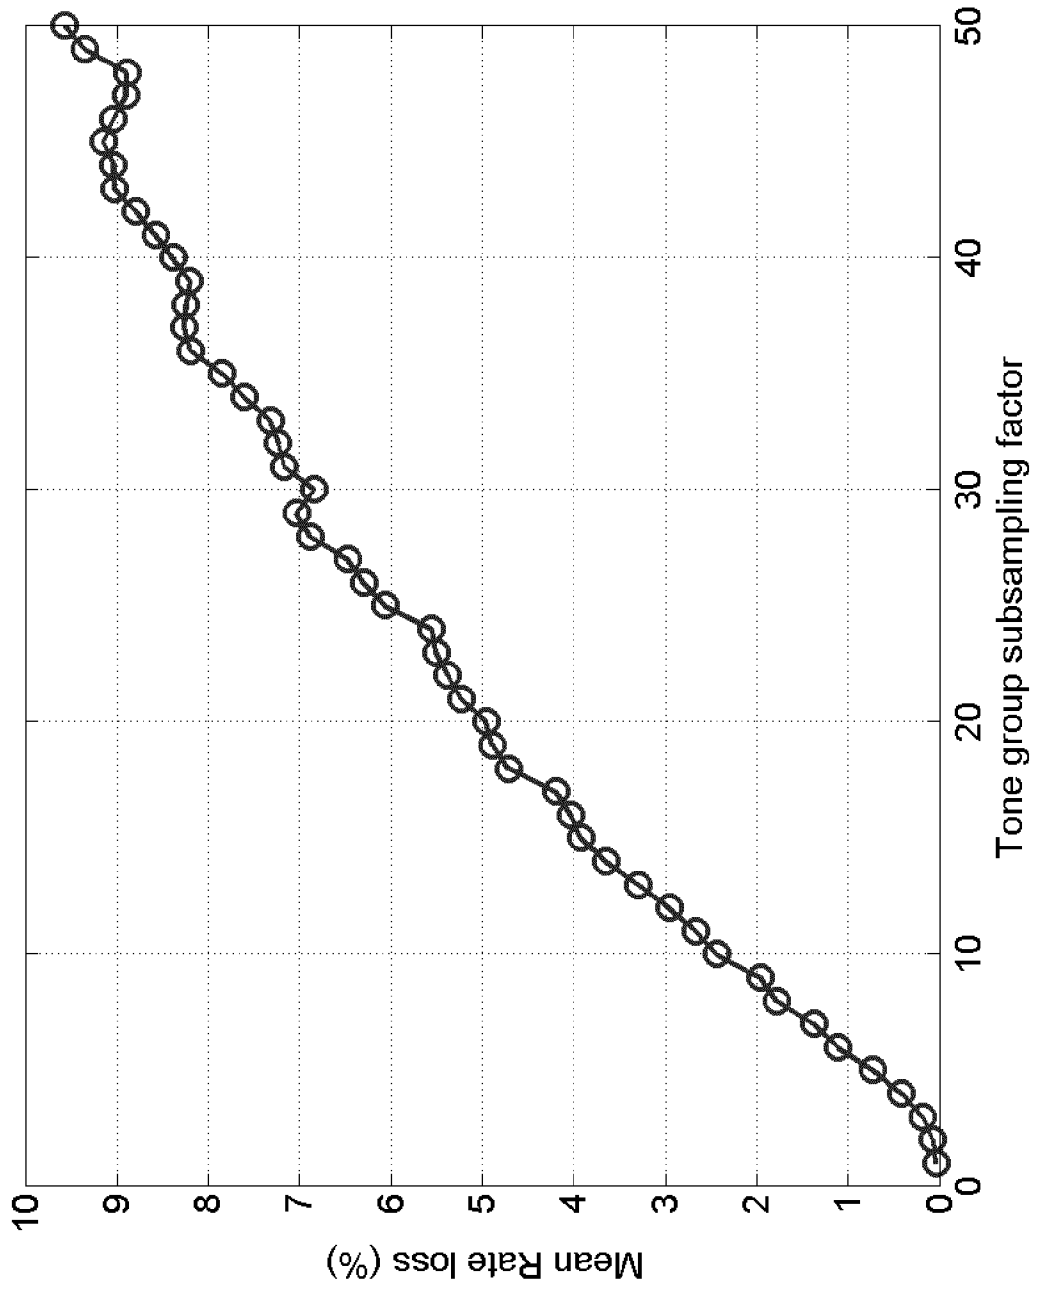


Fig. 5

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2013/065186

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04B3/46 H04L27/26 H04M3/30
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04B H04L H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data, COMPENDEX, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2011/110409 A1 (SANDS NICHOLAS P [US] ET AL) 12 May 2011 (2011-05-12) paragraph [0068] - paragraph [0071] paragraph [0076] - paragraph [0077] -----	1-13
A	US 2009/116582 A1 (ASHIKHMIN ALEXEI [US] ET AL) 7 May 2009 (2009-05-07) paragraph [0030] - paragraph [0033] -----	1-13
A	EP 2 136 477 A1 (ALCATEL LUCENT [FR]) 23 December 2009 (2009-12-23) paragraph [0015] - paragraph [0017] -----	1-13



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 August 2013

Date of mailing of the international search report

05/09/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Giglietto, Massimo

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2013/065186

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 2011110409	A1	12-05-2011	EP	2297912 A2	23-03-2011
			JP	2011529644 A	08-12-2011
			KR	20110038653 A	14-04-2011
			US	2011110409 A1	12-05-2011
			WO	2010002908 A2	07-01-2010

US 2009116582	A1	07-05-2009	AU	2008319316 A1	07-05-2009
			CN	101843000 A	22-09-2010
			EP	2215739 A1	11-08-2010
			JP	2011503967 A	27-01-2011
			JP	2013102450 A	23-05-2013
			KR	20100061853 A	09-06-2010
			RU	2010122046 A	10-12-2011
			US	2009116582 A1	07-05-2009
			WO	2009058306 A1	07-05-2009

EP 2136477	A1	23-12-2009	AT	519281 T	15-08-2011
			CN	101645754 A	10-02-2010
			EP	2136477 A1	23-12-2009
			KR	20110030578 A	23-03-2011
			US	2009310502 A1	17-12-2009
			WO	2009152992 A1	23-12-2009
