



Europäisches Patentamt
European Patent Office
Office européen des brevets

Publication number:

0 155 628
B1

12

EUROPEAN PATENT SPECIFICATION

45 Date of publication of patent specification: 22.06.88

51 Int. Cl.⁴: G 08 B 3/10, H 04 Q 7/02

21 Application number: 85102827.4

22 Date of filing: 12.03.85

54 Paging receivers.

30 Priority: 13.03.84 JP 46582/84

43 Date of publication of application:
25.09.85 Bulletin 85/39

45 Publication of the grant of the patent:
22.06.88 Bulletin 88/25

84 Designated Contracting States:
DE FR GB SE

58 References cited:
EP-A-0 110 506
GB-A-2 116 340
GB-A-2 118 337
GB-A-2 128 004
US-A-4 383 257

73 Proprietor: NEC CORPORATION
33-1, Shiba 5-chome, Minato-ku
Tokyo 108 (JP)

72 Inventor: Matai, Masahiro
c/o NEC Corporation 33-1, Shiba 5-chome
Minato-ku Tokyo (JP)
Inventor: Ohayagi, Takashi
c/o NEC Corporation 33-1, Shiba 5-chome
Minato-ku Tokyo (JP)
Inventor: Mori, Toshihiro
c/o NEC Corporation 33-1, Shiba 5-chome
Minato-ku Tokyo (JP)

74 Representative: Vossius & Partner
Siebertstrasse 4 P.O. Box 86 07 67
D-8000 München 86 (DE)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

Courier Press, Leamington Spa, England.

EP 0 155 628 B1

Description

Background of the invention

This invention relates to a paging receiver and more particularly a paging receiver having an individual paging number and at least one common paging number.

In advanced modern information communities importance of information has been increased drastically.

As the amounts of information increase, many types of information receivers for reception of valuable information have been developed, including a receiver capable of receiving only paging numbers or signals, a receiver capable of also receiving a series of messages constituted by digits and letters, a receiver having multiaddresses, to improve receiving performance.

The addresses of the multiaddress information receivers can be classified into (a) addresses corresponding to conventional paging services (hereinafter termed individual addresses) and (b) common addresses corresponding to information services (hereinafter termed common addresses).

Included in types of information that can be received by using the individual addresses (hereinafter termed individual address information) are addresses and telephone numbers of customers or users which should be confirmed at the time of receiving, and which should therefore be stored in memory means, although the frequency of receiving the addresses and telephone numbers is relatively small. On the other hand, included in types of information that can be received by using the common addresses (hereinafter termed common address information) are stock price information, merchandise trading information, or the like information. Since these types of information change from time to time, old information is of little value. Also, these types of information are frequently received at a rate of a predetermined unit time.

However, where the individual address information and the common address information are processed with conventional information receivers having memory areas inadequate for respective addresses, protection of the individual address information becomes impossible.

More particularly, the individual address information, like the common address information, is stored in a memory area. Accordingly, accumulation of the frequently received common address information expells the individual address information from the memory area of a limited capacity. This means that the memory area has no margin for the individual address information, thus raising a serious problem in the protection of important information.

In other words, the memory area of the limited capacity can not be used efficiently for the individual address information of great value.

As described above, in a multiaddress information receiver there is the problem of how to store information in respective addresses.

Summary of the invention

It is an object of this invention to provide a paging receiver capable of protecting an individual address information.

Another object of this invention is to provide a paging receiver capable of storing individual information and common address information in adequate memory areas and capable of efficiently utilizing the memory areas even when the user does not use all common addresses.

According to this invention, there is provided a paging receiver with an individual paging number and at least one common paging number, comprising memory means including individual memory areas capable of storing at least one message signal following the individual paging number, and specific memory areas capable of storing message signals following the common paging number.

According to a modification of this invention, there is provided a paging receiver having an individual paging number and at least one common paging number, comprising first memory means including individual memory areas storing at least one message signal following the individual paging signal, and specific memory areas storing message signals following the common paging number; second memory means storing information which determines whether a service of the common paging number is to be rendered or not; and control means responsive to the content of the second memory means, for processing a specific memory area corresponding to a common paging number being not in service as the individual memory area.

The US-A-4383257 discloses a paper with an individual address and a common group address. The pager according to GB-A-2118337 has a plurality of memory areas for storing a plurality of messages, but the memory areas are not reserved in one to one correspondence with the receiver addresses.

Brief description of the drawings

In the accompanying drawings:

Figs. 1a to 1c are diagrams showing one example of the received signals utilized in this invention;

Fig. 2 is a block diagram showing one embodiment of the display paging receiver in accordance with this invention;

Fig. 3 is a block diagram showing the message processing unit employed in the embodiment shown in Fig. 2;

Fig. 4 is a block diagram showing one example of a paging signal detecting circuit utilized in this invention;

Fig. 5 is a detailed block diagram showing one chip CPN shown in Fig. 3;

Figs. 6a to 6l show one example of registers and memory areas utilized for message storing; and

Figs. 7 to 10 are flow charts for explaining the operation of this invention.

Description of the preferred embodiments

To facilitate understanding of the principle of this invention, one example of the received signals will first be described with reference to Figs. 1a, 1b and 1c.

In Fig. 1a, F designates a frame synchronizing signal, A an address signal, M a message signal and E an end signal. If necessary, a plurality of message signals M are used depending upon the length of a message.

Fig. 1b shows a signal format wherein a signal comprising BCH (Bose-Chaudhuri-Hocquenghem) ending at 31st bit added with one parity bit at 32nd bit is used as the address signal or the message signal. This signal is made up of a 21-bit information area IA, 10-bit check area and 1-bit even parity bit EP, thus constituting one word with 32 bits. The information area utilizes its most significant bit (MSB) as an identification bit, and when its logic level is "0" this signal is processed as an address information signal, whereas when its logic level is "1" this signal is processed as a message information signal. Remaining 20 bits are used as the address information or message information.

Fig. 1c shows a format of the message information of a message signal received after reception of an address signal. In Fig. 1c, the MSB (the second bit in the information area) is used as a processing bit and when its logic level is "0", remaining 19 bits are processed as message processing information whereas when its logic level is "1", the remaining 19 bits are processed as message information. Regarding a succeeding message signal received after reception of a preceding message signal, 20 bits except the identification bit of the information area are processed as the message information.

Referring to Fig. 2, a display paging receiver embodying this invention comprises an antenna AN, a receiving unit REC for demodulating a radio signal received by the antenna AN, a waveform shaper WS for shaping the waveform of the output of the receiving unit REC, an address decoder ADR, a memory MEM such a P-ROM for storing a plurality of paging numbers, a message data processing unit MDI, a buffer register BUF inputted with the output of the ADR, a loudspeaker SP connected on the output side of the BUF, a display DP for displaying the output of the unit MDI, a clock pulse generating crystal oscillator XL for generating a timing clock pulse applied to the ADR, a switch SW₀ connected to the ADR, the switch SW₀ being operated to send, via the ADR, variation information or state information to the unit MDI for effecting stopping of alert or the like and switches SW₁ to SW₃ connected to the unit MDI and used for operating the information receiver.

The display paging receiver shown in Fig. 2 operates as follows:

The radio signal received by the antenna AN is demodulated by the unit REC and the waveform of the demodulated signal is shaped by the shaper WS and then converted into a digital signal by the ADR.

Then, an address signal *e* read out from the memory MEM storing a plurality of paging numbers is applied to the ADR which compares an input signal *a* from the shaper WS with the signal *e* bit by bit. When coincidence of the paging numbers is confirmed, the ADR applies a starting signal *b* to the unit MDI. This unit MDI performs reception and demodulation of the message signal M (shown in Fig. 1) in accordance with the starting signal *b*, and when it detects an end signal or stop signal E shown in Fig. 1 indicative of the end of the message, it sends the signal *b* to the ADR. In response to this signal *b*, the ADR sends an alert signal *d* to the BUF to drive the loudspeaker SP, thereby informing the user of the receiver that it is called. The unit MDI stores in its internal RAM, not shown, the decoded signal of the message signal M and sends a signal *c* to the display DP to provide visual information.

Fig. 3 shows the detailed construction of the unit MDI shown in Fig. 2, which comprises a one-chip CPU supplied with signal *b* from the ADR shown in Fig. 2 and information from switches SW₁ to SW₃, and a random access memory RAM₁ which exchanges a signal *b*₁ between it and the one-chip CPU. The memory RAM₁ corresponds to first memory means including individual memory areas storing at least one message signal following individual paging numbers and specific areas storing message signals following a common paging number.

The message data processing unit MDI also includes an LCD (liquid crystal display) power driver DV supplied with a signal *b*₂, a diode D, a capacitor C and a source V_{DD} which are connected as shown.

Fig. 4 shows details of the address detection circuit (paging signal detection circuit) in the ADR shown in Fig. 2, for a case wherein the number of addresses is four.

The address detection circuit shown in Fig. 4 comprises Exclusive NOR gates EX.NOR₁ to EX.NOR₄ respectively inputted with the address data signal *e* from the memory MEM shown in Fig. 2 and input data *a*, counters CNT₁ to CNT₄ respectively inputted with the output signals of the Exclusive NOR gates EX.NOR₁ to EX.NOR₄ and a clock pulse CK and are cleared at a rate of 32 bits by a signal supplied to a terminal R, an OR gate OR inputted with the outputs of the counters CNT₁ to CNT₄, and a converting circuit CONV inputted with the outputs of the counters CNT₁ to CNT₄ for converting the outputs into two bits (*l*₁, *l*₂). In Fig. 4, *e*(A), *e*(B), *e*(C) and *e*(D) designate address data signals inputted to the gates EX.NOR₁ to EX.NOR₄, respectively.

In the circuit shown in Fig. 4, the input data *a* and the address data *e* from the memory MEM are compared by the gates EX.NOR₁ to EX.NOR₄ and the counters CNT₁ to CNT₄ bit by bit. Although the counters are cleared at the rate of 32 bits by a signal applied to terminal R, when more than 29 bits coincide with each other before, they are cleared, the gate OR outputs a signal DET.

Since the output signals of the counters CNT₁ to

CNT₄ are supplied to the input terminals of the gate OR, so long as there is a counter output signal DET, the gate OR delivers out this signal. In the embodiment shown in Fig. 4 wherein the number of the addresses is four, the converter circuit CONV converts the address into received address information (I₁, I₂) of two bits.

Fig. 5 is a block diagram showing the detailed construction of the one-chip CPU shown in Fig. 3, which comprises input ports IP₁, IP₂ and IP₃ respectively inputted with the outputs of switches SW₃, SW₂ and SW₁, and input ports IP₄, IP₅, IP₆, IP₇ and IP₈ respectively inputted with the signal *b* from the address decoder ADR shown in Fig. 2 including data (received address information) I₂ and I₁ representing the address, a timing frequency *f_T*, a clock pulse CL corresponding to the transmission speed, and a message signal D. Denoted by OP₁ and OP₂ are output ports which send to the address decoder ADR shown in Fig. 2 a signal ME showing that the message has ended and an alert control signal AC, and denoted by OP₃, OP₄ and OP₅ are output ports sending to the random access memory RAM₁ control signals $\overline{CE}$, $\overline{A/D}$ and $\overline{R/W}$. Denoted by OP₆ and OP₇ are output ports sending to the LCD driver DV shown in Fig. 3 control signals $\overline{CS}$ and $\overline{C/D}$. Denoted by INTP is an interruption port outputted with the signal DET indicative of the address coincidence in the signal *b* from the address decoder ADR shown in Fig. 2 and an access signal R from switch SW₁, etc. Denoted by IF is a serial interface inputted with an input signal SI from the memory RAM₁ shown in Fig. 3 for sending an output signal SO and a system clock signal $\overline{SCK}$ to the LCD driver DV shown in Fig. 3, and denoted by DB is a data bus.

There are also provided a program counter PRO.CNT designating the contents of address, a program memory PRO.MEM storing an instruction sequence to be executed and accessed by the content of an address designated by the program counter PRO.CNT, an arithmetic and logic unit ALL executing such various operations as an arithmetic operation, logic operation, or the like, an instruction decoder INS.DR which decodes information from the program memory PRO.MEM for supplying a control signal corresponding to the instruction to various parts of the circuit, and a random access memory RAM₂ utilized to store various data, subroutines, program count at the time of interruption, and retreat of a program status. The random access memory RAM₂ corresponds to first memory means constituted by individual memory areas storing at least one message signal following the individual paging numbers and memory areas storing message signals following a common paging signal. Denoted by ACC is an accumulator utilized to transmit and receive data between the random access memory RAM₂ and various ports. Denoted by CKG is a system clock generating circuit generating a clock pulse that determines generating a clock pulse that determines an instruction execution cycle time.

The one chip CPU and the address decoder DR

shown in Fig. 2 exchange therebetween data (received address information) I₁, I₂ representing the address, a clock pulse CL corresponding to the transmission speed, the timing frequency *f_T*, the signal DET indicative of the address coincidence, the access signal R from switches SW₁ to SW₃ the message signal D, the signal ME informing the address decoder ADR of the fact that the message has ended, and the alert control signal AC. Furthermore, the one-chip CPU and the memory RAM₁ constituting the memory means shown in Fig. 3 exchange therebetween the system clock signal $\overline{SCK}$, output signal SO, input signal ST and control signals $\overline{CE}$, $\overline{A/D}$ and $\overline{R/W}$. Furthermore, the one-chip CPU and the LCD driver DV shown in Fig. 3 exchange the system clock pulse $\overline{SCK}$, the output signal SO and the control signals $\overline{CS}$ and $\overline{C/D}$.

Figs. 6a through 6l show examples of the registers and memory areas utilized for the message storing processings.

The registers and memory areas will be described below.

Fig. 6a shows one example of the construction of the memory area in which areas M₁ to M_n store message file numbers F_j corresponding to individual address information or the common address information and its individual addresses show the present state (new or old) of the information. The initial values of the data in the areas M₁ to M_n are all "0" meaning that there is no message stored. In this case, the data of M_j is designated by (M_j). By using this designation, (M₃) is F₂, for example.

Figs. 6b and 6c show examples of a file area and a sector area respectively in which file F₁ to F_m are assigned to respective corresponding message file numbers. In each file, sector names constituting message information are sequentially stored. Like M_j shown in Fig. 6a, the data stored in the file F_j shown in Fig. 6b is indicated by (F_j). More particularly, in the example shown in Fig. 6b, file F₁ is constituted by three sectors S₀, S₁ and S₃ in which message information is stored.

Sectors S₀ to S_k are also assigned corresponding to respective sector numbers and the message information is stored in these sector areas. The data in sector S_k is indicated by (S_k) and in Fig. 6c of this embodiment, (S₀) shows that 6 characters "PLEASE" are stored. The message information is sequentially stored in the sectors.

Thus, it can be noted that for file F₁ the message information is constituted by three sectors S₀, S₁ and S₃ to mean "PLEASE GO TO HOME".

The memory area shown in Fig. 6a, is located in the RAM₂ shown in Fig. 5, and the file area shown in Fig. 6b and the sector area shown in Fig. 6c are located in the memory RAM₁ shown in Fig. 3.

Registers MST(MSTATUS), FST(FSTATUS) and SST(SSTATUS) shown in Figs. 6d, 6e and 6f respectively will now be described.

Registers FST and SST shown in Figs. 6e and 6f respectively store states of use of the file and the sector, and "0" indicative of out-of-use or "1" indicative of in-use is stored in respective files and sectors. Accordingly, by using these regis-

ters, it is possible to know idle (vacant) files and idle sectors. The data of registers FST and SST are represented by FLST(F_j) and SCST(S_k). More particularly, FLST(F₃) shows that the data in a bit F₃ of the register FST is "0" or "1". In this embodiment "1" is present. Similarly, in this embodiment, SCST(S₂).

In the case of the register MST (shown in Fig. 6d) that designates the memory area storing the common address information, it is used as a register storing a fixed state of the memory area. In other words, this register is used for storing data as to whether memory area is used for storing the common address information or the individual address information. In this embodiment, when memory area is used for the common address information, the data is "1", used for the individual address information, the data is "0". Each bit of the register MST showing the mode of processing of the memory area corresponds to each address in one-to-one correspondence relationship. As a consequence, where there are four addresses A, B, C and D of which A is usable as an individual address, B and C are usable as common addresses, but D is not necessary to be used as a common address, it is possible to use the memory areas corresponding to the out-of-use common address for the individual address information by making "0" the state of a bit of the register MST shown in Fig. 6d which is in one-to-one correspondence relationship with the common address D. The data of this register MST is represented by MST(M_j). Thus, MST(M₃) is "1".

Registers MST, FST and SST shown in Figs. 6d, 6e and 6f are built in the memory RAM₂ shown in Fig. 5.

Registers shown in Figs. 6g, 6h, 6i, 6j, 6k and 6l operate as follows. These registers are also built in the memory RAM₂ shown in Fig. 5.

A register AD shown in Fig. 6g is adapted to store the received address information (I₁, I₂) (see Figs. 4 and 5), while a register IFN shown in Fig. 6h is used for storing an idle file number when there is an idle file, and its state is "0" when there is no idle file. A register ISN shown in Fig. 6j is adapted, like the register IFN, to store an idle sector number when there is an idle sector, and its state is "0" when there is no idle sector.

A register SC shown in Fig. 6j is for storing the number of sectors in use in one file, and a register STAD shown in Fig. 6k is for storing address number to be stored with message information. A register FI shown in Fig. 6 is used for storing the sector number constituting a file. When storing of the sector numbers of one file completes, the data is sent to the file area of the memory RAM₁, shown in Fig. 3.

The received signal, various circuits, the construction and function of the registers constituting the memory means have been described above. The processing of the received signal will now be described with reference to the flow charts shown in Figs. 7 to 10 in which Fig. 7 shows a flow chart showing one example of the

processing of the received signal, and Figs. 8 to 10 are detailed flow charts showing steps 13, 22, 24 shown in Fig. 7.

In Fig. 7, the receiver is at the initial state waiting for a synchronizing signal. At step STP-1, when the synchronizing signal is detected the receiver is brought to a state for waiting for the reception of a paging number corresponding to that stored in the memory MEM (see Fig. 2) of the receiver. If the circuit shown in Fig. 4 can not detect the paging number of the receiver which has been stored in the memory MEM (P-ROM) shown in Fig. 2 even after laps of a predetermined time following the receipt of the synchronizing signal (see STP-2 and STP-3), the program is returned to the initial state.

When the result of judgment of STP-2 is YES, the OR gate circuit OR shown in Fig. 4 detects signal DET to start the one chip CPU shown in Fig. 3 and to convert the received address into two-bit address information (I₁, I₂) by the converter CONV at STP-4. Consequently, the received address information (I₁, I₂) and the message signal "D" shown in Fig. 5, that is the received signal which are sent from the address decoder ADR shown in Fig. 2 are supplied to the one-chip CPU to be processed thereby and the result of processing is stored in the memory RAM₂ shown in Fig. 5 as shown by steps STP-5 and STP-6. At step STP-7, the arithmetic and logic unit ALL shown in Fig. 5 checks the identification bit of the received signal to judge whether the received signal is an address signal or a message signal.

When the received signal is an address signal, at step STP-8, a judgment is made as to whether there is a message signal before the address signal. More particularly, when the register SC shown in Fig. 6j is judged and a sector is used as the message information, at step STP-9, and end code is written into a sector area to execute storing, and display of the message information.

Where a sector is not used as a message information, it is judged that there is no message information sent by using the paging number of the receiver and the processing returns to the initial state.

Further, at step STP-7, when the received signal is judged as a message signal, at step STP-10, after starting the one chip CPU shown in Fig. 3 a judgement is made as to whether the message signal is the first message signal or not. When the result of judgment is YES, at step STP-11, a judgment of the state of the processing bit is made. When the state of the processing bit is "0", the received signal is stored in the register MST shown in Fig. 6d as a message information at step STP-12 at which the message signal is decoded to obtain information which determines whether service of the common paging signal is to be rendered or not.

Although in this embodiment, only the data of register MST was taken as the message processing information, other data representing the value of β to be described hereinafter can also be

used. Although, in this embodiment, upon completion of the storing, the program is returned to the initial state, if desired, information and display of the completion of the setting of the register MST may be informed and displayed. When it is judged that the data is message information, at step STP-13, a new area is set.

The setting of the new area will be described with reference to Fig. 8.

When the data is judged as message information, the received address information (I_1, I_2) is read out of the register AD shown in Fig. 6g, and the content of the register MST shown in Fig. 6d, in one-to-one correspondence relationship to the received address information (I_1, I_2), is read out at step STP-30 period. At step STP-31 it is judged whether the content of MST, MST(Mi) is 1 or not, i.e. it is judged whether a new area corresponding to the individual address information or to the common address information is to be set. At this stage, β utilized in steps STP-32 and STP-37 will be described.

Denoted by β is the number of sectors that can be used in one file, and β_1 and β_2 are values respectively corresponding to the common address information and the individual address information. For example, where the number of sectors each of which can store 32 characters is 36 and β_1 and β_2 are equally set to 9, it is possible to store messages of at least 4 files. As a result, if three common addresses are used, it is possible to store only one individual address information at the worst. On the other hand, if β_1 and β_2 are differently set to 6 and 9, respectively at least two pieces of individual address information can be stored even if three common addresses are used. By setting the values of β_1 and β_2 in this way, the old individual address information can be recognized. Usually, the individual address information comprises a long message such as ordering an action but the common address information comprises a short message such as stock prices, so that the above-described performance is considered to be appropriate. The values of β_1 and β_2 are selected in a manner as described above.

When the read-out MST content, MST(Mi), is decided to be 1, i.e., the received information is decided to be information relating to the common address in question, β is set to be β_1 at step STP-32, and then a file and a section which have been used for that common address are cleared. More specifically, at step STP-33, a judgment is made as to whether file number Fj is stored in a memory area corresponding to the received address information or not. When the result of judgment is NO, at steps STP-34, STP-35 and STP-36, the old information of the received common address is erased and the contents of registers FST and SST shown in Figs. 6e and 6f which have been used for the old information are changed to "0" thereby enabling to use their files and sectors. When the file number Fj is not being stored in a memory area corresponding to the received common address information, that is, when an initial service is rendered at that common address, at step STP-38,

a judgment is made as to whether there are an idle file and an idle sector or not. When the result of judgment is NO, the program returns to the original state in this embodiment. But if desired, it is possible to inform the user that there are not an idle file and an idle sector by alerting or displaying this fact.

When the result of judgment at STP-31 shows that the data is individual address information, at step STP-37, a value of β is set to be β_2 which is suitable for the individual address information, then the process goes on to step STP-38.

All pieces of initial or first message information after starting the CPU are advanced to step STP-39 to set necessary file and sector in a new area. In other words, the data in register FST (shown in Fig. 6e) corresponding to an idle file stored in register IFN shown in Fig. 6h is set to "1". In the same manner, the data of register SST (shown in Fig. 6e) corresponding to an idle sector stored in the register ISN shown in Fig. 6i is set to "1". Thus it is indicated that its file and sector are permitted for use. Moreover, since only one sector is used, the data of the register SC shown in Fig. 6j is set to "1".

Then, the first address of the sector to be used is set at step STP-40 in which α represents the number of characters that can be stored in one sector. For example, in the sector area shown in Fig. 6c, the number of characters that can be stored in one sector is 6, that is, $\alpha=6$. Suppose now that the idle sector number stored in the register ISN shown in Fig. 6i corresponds to the value of K; the sector number So becomes "0". The first address of the sector number So is "0", whereas the last address is "5". Since the sector number S_1 is "1", its first address is equal to the next address "6". In this manner, the first address of the used sector is expressed by $\alpha \times$ ISN, thus terminating the setting of the new area.

The first message information or succeeding message information whose new area has been set at step STP-13 shown in Fig. 7 is judged as to whether the information has data of one character or not at step STP-14. When the result of judgment is NO, a succeeding message signal is subjected to the same processing to obtain data of more than one character. When the result of judgement at step STP-14 is YES, at steps STP-15, STP-16 and STP-17, the data of one character is stored in an address designated by the register STAD shown in Fig. 6b and the address designated by the register STAD is set as the next address. After that, at step STP-18, a judgment is made as to whether one sector has been filled or not. When the result of judgment is NO, the program is advanced to step STP-23 where a judgment is made as to whether the processing of the data of the information area has ended or not. When the processing is not terminated, the program is returned to step STP-14 to process the remaining data of the information area. In contrast, when the processing of the data of the information area has completed, the program is advanced to step STP-6 to begin the processing of the next received signal.

When the result of judgment at step STP-18 is

YES, the sector number stored in the register ISN shown in Fig. 6i is stored in the SC-th address of register FI shown in Fig. 6l (see step STP-19) and the number of used sectors is incremented by one at step STP-20. At the next step STP-21, the number of sectors used in one file is supervised. When the number of sectors used in one file is larger than β , storing of the message information is interrupted, and the program is advanced to step STP-24. When the number of the used sectors is less than β , at step STP-22, the idle sector is supervised.

The supervision of the idle sector will be described with reference to Fig. 9.

When it is judged that the number of files in one file is smaller than β , at step STP-50, a judgment is made as to whether there is a sector that can be used next. When there is an idle sector, at step STP-51, the sector number of the idle sector is set in the register ISN shown in Fig. 6i and at step STP-52, the first address number of the idle sector is set, whereas when there is no idle sector, a processing is executed to prepare an idle sector. In this processing, at steps STP-53, STP-54 and STP-55, judgments are made as to whether the file number F_j is sequentially stored in memory areas M_n through M_i shown in Fig. 6a. When the file number F_j is stored, at steps STP-56 and 57, a judgment is made as to whether the memory area corresponds to an individual address or to a common address. When the memory area corresponds to the individual address, the information stored therein is erased and the register FST shown in Fig. 6e and the register SST shown in Fig. 6f and utilized for that information are changed to "0" to render the file and sector useable (see steps STP-58, 59 and 60). In this manner, an idle sector is prepared, and the program is advanced to succeeding steps STP-50, 51 and 52.

The above description corresponds to the idle sector supervision.

Subsequent to the supervision of the idle sector executed at step STP-22, the program is advanced to step STP-23 where a judgment is made as to whether the processing of the data of the information area has ended or not. The storing of the information in the sector area and register FI shown in Fig. 6l is continued by repeating the process described above and is completed when the message information terminates (see STP-9) or when a sector of one file overflows (see step STP-21). Then, at step STP-24, the information is stored in the file area and the memory area.

The storing operation of the information in the file area and the memory area shown in Figs. 6b and 6a will now be described with reference to the flow chart shown in Fig. 10.

The data of a sector number of one file stored in register FI (shown in Fig. 6l) in the random access memory RAM_2 (shown in Fig. 5) contained in the one chip CPU shown in Fig. 3 is sent to file F(IFN) shown by the register IFN (see Fig. 6b) of the RAM_1 shown in Fig. 3, so as to store the sector number of one file in the file F(IFN), at step STP-

70. Then, at step STP-71, the received address information (l_1, l_2) is read out from the register AD shown in Fig. 6g, while at the same time the content of the corresponding register MST shown in Fig. 6d is read out. Then at step STP-72, a judgment is made as to whether the read out information is stored in a memory area corresponding to the individual address information or the common address information. In the case of the common address information, at step STP-73, a number called file F(IFM) is stored in a memory area corresponding to the received common address. On the other hand, in the case of the individual address, the received address information is shifted within a memory area (shown in Fig. 6a) storing the individual address information to render idle (empty) the memory area M_i at steps 74 to 82. More particularly, at step STP-74, i is set to n . Then, at steps STP-75 to 77, the number M_i of the memory area (shown in Fig. 6a) storing the individual address information is searched starting from M_{n-1} . At step STP-78, the value of i is changed to x , thus preserving M_i storing the individual address information.

At steps STP-79 and 80, the individual address information is stored by using the new variable x , and the number M_x of the memory area which is larger than M_i is searched. Then, at step STP-81, the individual address information (M_i) is changed to M_x . The change of the individual information from M_{n-1} to M_1 is executed under the judgment executed at step STP-82. Upon completion of this change, the memory area M_1 shown in Fig. 6a becomes idle, so that a number termed file F(IFN) is stored in the memory area M_1 at step STP-83, thus completing the storing of the number in the file area shown in Fig. 6b and the memory area shown in Fig. 6a. Then, at step STP-25, the alerting and displaying are started and the program is returned to the initial state. The alerting is made by controlling the address decoder ADR shown in Fig. 2 with the alert control signal AC shown in Fig. 5, and then driving the loudspeaker SP via the buffer register BUF. A display is made on the display DP shown in Fig. 2 by controlling the LCD driver DV shown in Fig. 3 with the system clock signal $\overline{SCR}$ and output signal "SO" from the serial interface IF shown in Fig. 5, and the control signals ($\overline{CS}$, $C/\overline{D}$) from the output ports OP_7 and OP_8 .

Although the invention has been described with reference to a case wherein the setting of MSTATUS is made by a software message information processing of a received signal, it should be understood that the invention is not limited to this example and that any suitable hardware can be used. For example, for the one chip CPU shown in Fig. 3, may be provided input and output ports corresponding to respective receiving addresses, and the setting of MSTATNCS can be made by making respective input terminals to a high or low level.

As described above, according to this invention, RAM (shown in Fig. 5) of the one chip CPU shown in Fig. 3 is provided with a register AD

(shown in Fig. 6g) capable of storing addresses and a register MST (shown in Fig. 6d) designating the memory area of common address information so as to enable to store the individual address information and the common address information in memory areas according to the features of the address information. Accordingly, there is a merit that even when the user does not use all common addresses, the memory areas can be efficiently utilized.

As described above, according to this invention, with a simple construction, it is possible to store the individual address information and the common address information in memory areas commensurate with their features in accordance with the information from a register and to efficiently utilize the memory areas even when the user does not utilize all common addresses. Furthermore, the individual address information can be protected by providing memory areas corresponding to respective addresses. In an information receiver having a plurality of common addresses and memory areas corresponding to respective common addresses, where the user does not require specific common address information, efficient utilization of the memory areas can be realized by using a memory area capable of storing a particular common address as a memory area capable of storing the individual address information.

Claims

1. A paging receiver with an individual paging number and at least one common paging number, comprising:

memory means (MDI, RAM1) including individual memory areas capable of storing at least one message signal following said individual paging number, and specific memory areas capable of storing message signals following said common paging number.

2. The paging receiver according to claim 1, characterized by

second memory means (MEM) storing information which determines whether a service of said common paging number is to be rendered or not; and

control means (ADR) responsive to the content of said second memory means (MEM), for processing a specific memory area corresponding to a common paging number being not in service as said individual memory area.

3. The receiver according to claim 2 further comprising means for decoding said message signal to obtain information which determines whether said service of said common paging number is to be rendered or not.

4. The receiver according to claim 2 which further comprises means for producing information which determines whether said service of said common paging number is to be rendered or not, said information producing means comprising means for rendering a control ter-

minal corresponding to said common paging terminal to be logic "0" or logic "1".

5. The receiver according to any of claims 1 to 4 which further comprises display or alerting means (DP; SP) actuated by a message processing unit (MD1) storing a message signal.

Patentansprüche

1. Rufempfänger mit einer individuellen Rufnummer und mindestens einer gemeinsamen Rufnummer, mit:

einer Speichereinrichtung (MDI, RAM1), die individuelle Speicherbereiche zum Speichern mindestens eines der individuellen Rufnummer folgenden Nachrichtensignals und spezifische Speicherbereiche zum Speichern von der gemeinsamen Rufnummer folgenden Nachrichtensignalen aufweist.

2. Rufempfänger nach Anspruch 1, gekennzeichnet durch

eine zweite Speichereinrichtung (MEM) zum Speichern von Information, durch die bestimmt wird, ob eine Dienstleistung der gemeinsamen Rufnummer erbracht werden soll oder nicht; und

eine auf den Inhalt der zweiten Speichereinrichtung (MEM) ansprechende Steuereinrichtung (ADR) zum Verarbeiten eines spezifischen Speicherbereichs, der einer gemeinsamen Rufnummer entspricht, die nicht als der spezielle Speicherbereich in Betrieb ist.

3. Rufempfänger nach Anspruch 2, der ferner eine Einrichtung zum Decodieren des Nachrichtensignals aufweist, um Information zu erhalten, durch die bestimmt wird, ob die Dienstleistung der gemeinsamen Rufnummer erbracht werden soll oder nicht.

4. Rufempfänger nach Anspruch 2, der ferner eine Einrichtung zum Erzeugen von Information aufweist, durch die bestimmt wird, ob die Dienstleistung der gemeinsamen Rufnummer erbracht werden soll oder nicht, wobei die Informationserzeugungseinrichtung eine Einrichtung aufweist, um einen dem gemeinsamen Rufanschluß entsprechenden Steueranschluß in einen logischen "0"-Zustand oder einen logischen "1"-Zustand zu bringen.

5. Rufempfänger nach einem der Ansprüche 1 bis 4, der ferner eine Anzeige- oder Alarmeinrichtung (DP; SP) aufweist, die von einer ein Nachrichtensignal speichernden Nachrichtenverarbeitungseinheit (MDI) betätigt wird.

Revendications

1. Récepteur d'appel de personnes avec un numéro individuel d'appel de personnes, et au moins un numéro courant d'appel de personnes, comprenant:

— un moyen de mémoire (MDI, RAM1) comportant des zones individuelles de mémoire capables de stocker au moins un signal de message suivant le numéro individuel d'appel de personnes, et des zones spécifiques de mémoire

capables de stocker des signaux de message suivant le numéro courant d'appel de personnes.

2. Récepteur d'appel de personnes selon la revendication 1, caractérisé par un second moyen de mémoire (MEM) stockant une information qui détermine si un service du numéro courant d'appel de personne doit être rendu ou non; et

— un moyen de commande (ADR) répondant au contenu du second moyen de mémoire (MEM) pour traiter une zone spécifique de mémoire correspondant à un numéro courant d'appel de personnes qui n'est pas en service comme zone individuelle de mémoire.

3. Récepteur selon la revendication 2, comprenant en outre un moyen pour décoder le signal de message afin d'obtenir une information qui déter-

mine si le service du numéro courant d'appel de personnes doit être rendu ou non.

4. Récepteur selon la revendication 2, qui comprend en outre un moyen pour produire une information qui détermine si le service du numéro courant d'appel de personnes doit être rendu ou non, ce moyen de production d'information comportant un moyen pour faire passer au niveau logique "0" ou "1" une borne de commande correspondant à la borne courante d'appel de personnes.

5. Récepteur selon l'une quelconque des revendications 1 à 4, qui comprend en outre un moyen d'affichage ou d'alarme (DP; SP) actionné par un ensemble de traitement de message (MD1) stockant un signal de message.

20

25

30

35

40

45



50

55

60

65

9

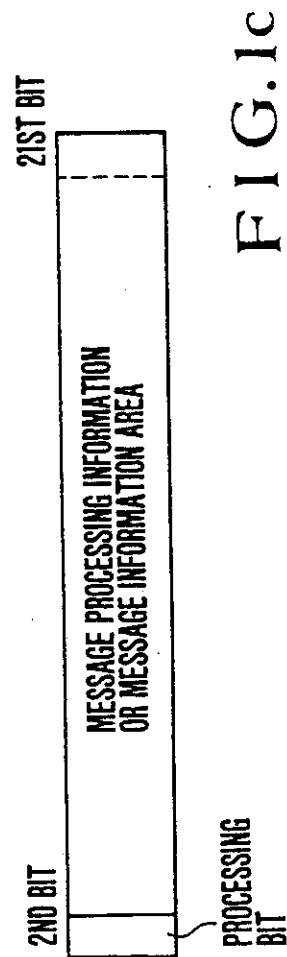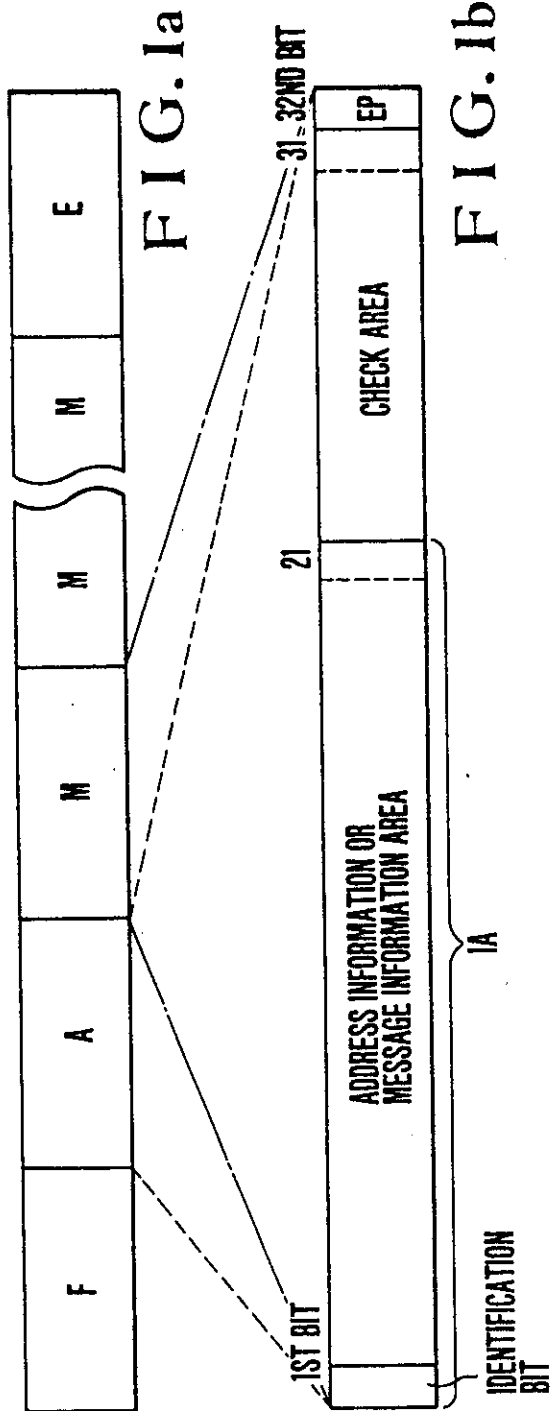

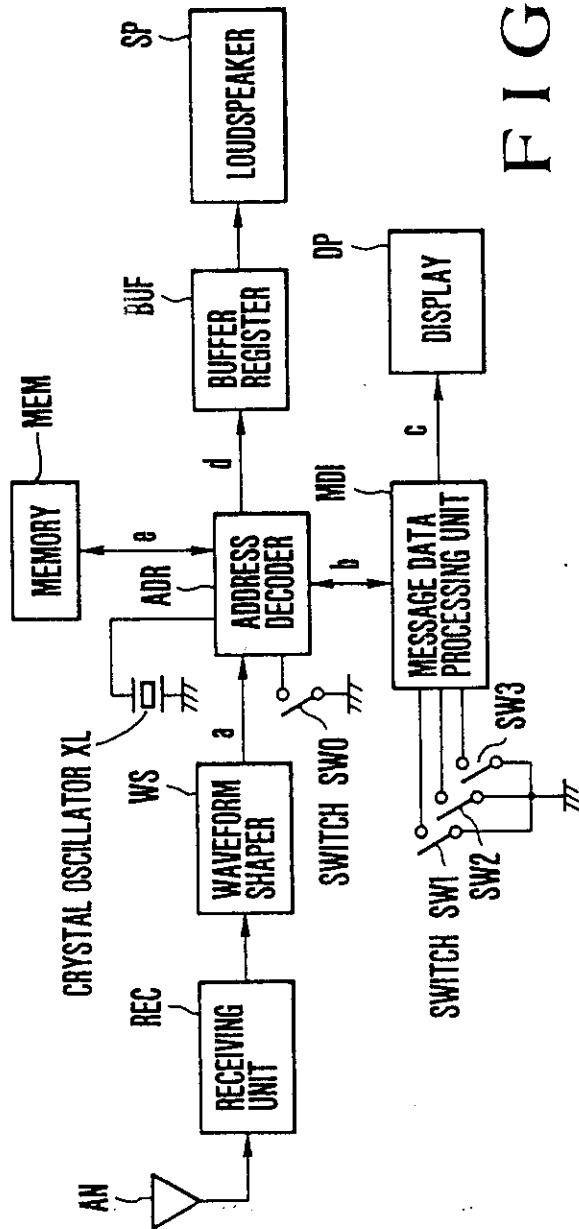


FIG. 2

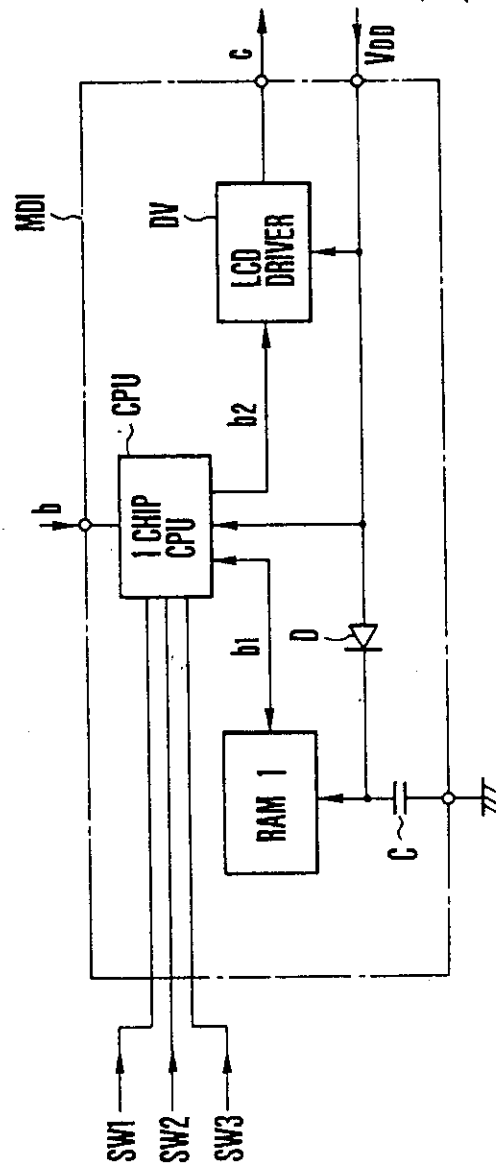


FIG. 3

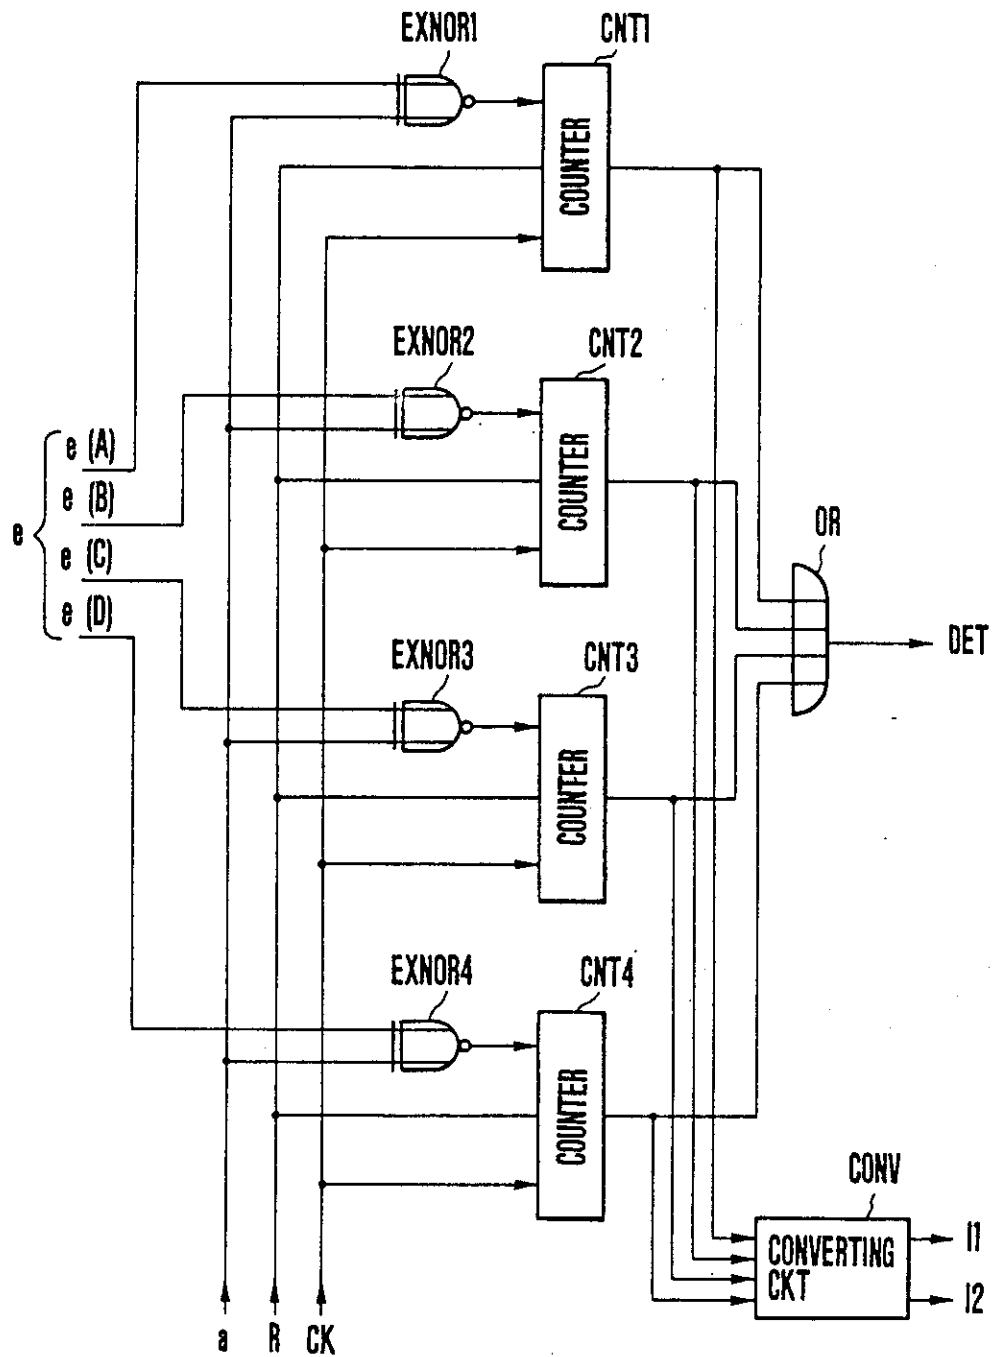


FIG.4

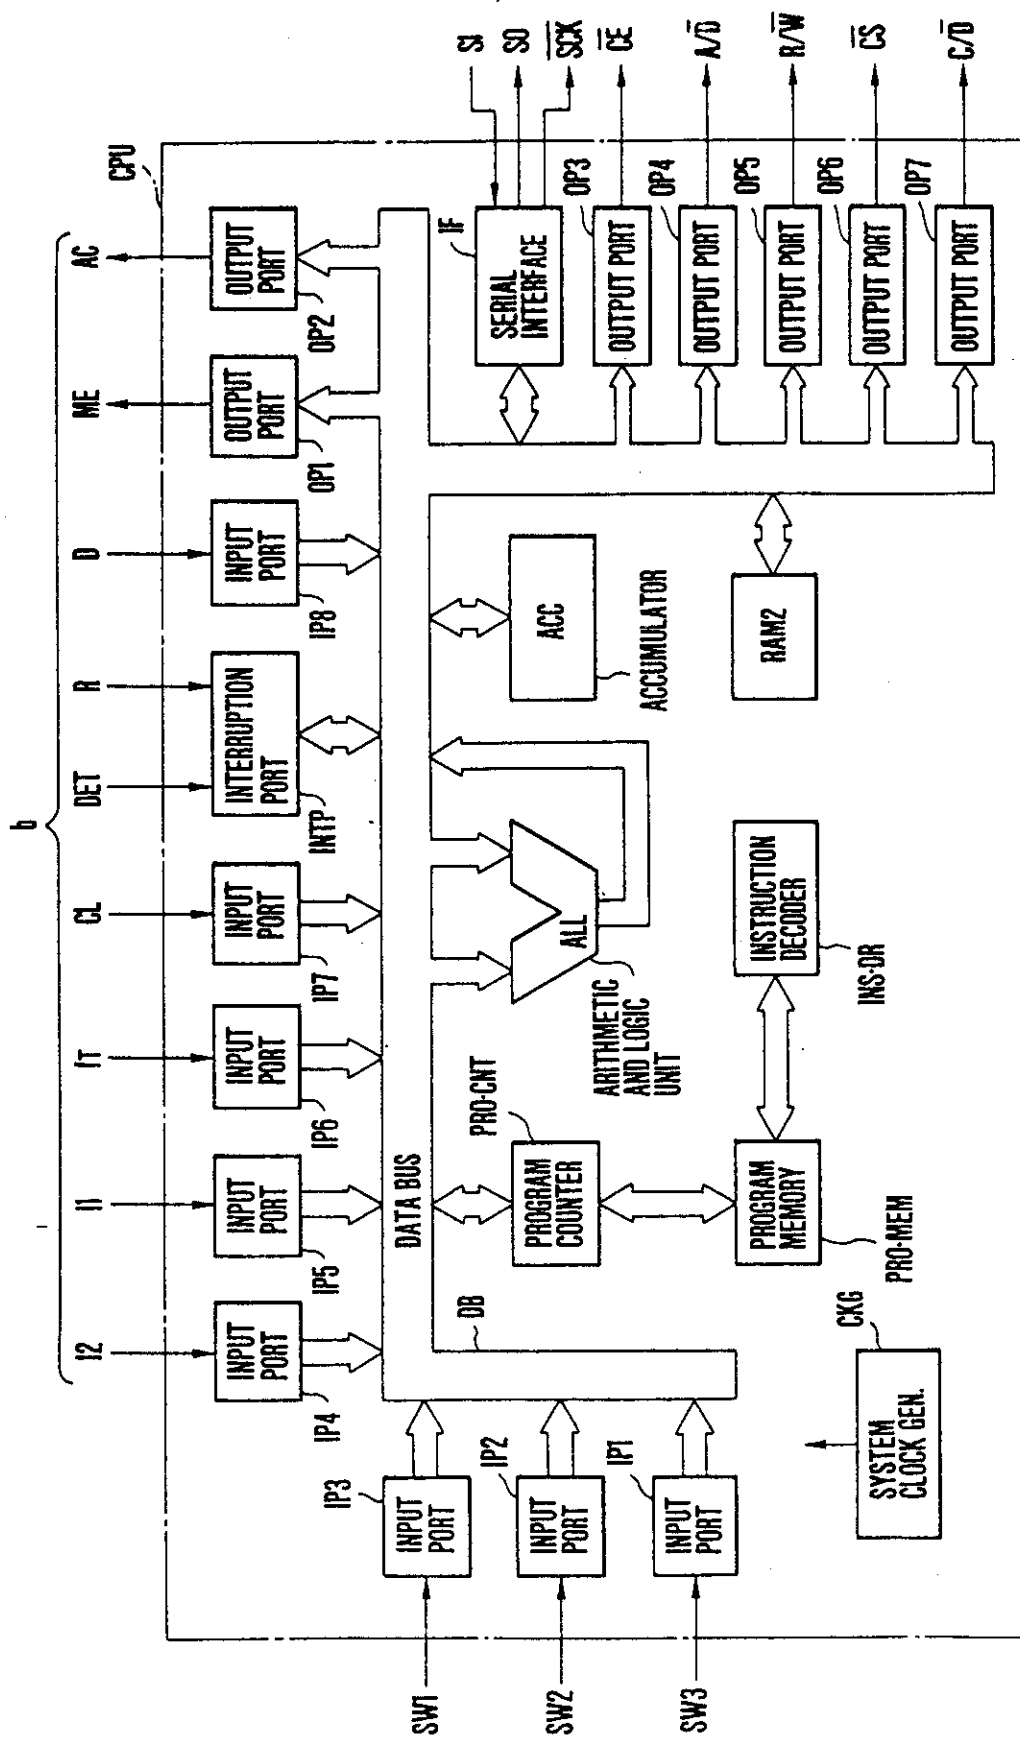


FIG.5

M1	F1
M2	F2
M3	F3
M4	F4
Mi	⋮
Mn	0

F1	S0	S1	S3	0	0
F2	S2	0	0	0	0
F3	S4	0	0	0	0
F4	S9	S10	0	0	0
Fj	⋮	⋮	⋮	⋮	⋮
Fm	0	0	0	0	0

S0	P	L	E	A	S	E
S1	G	0		T	0	
S2	0	4	5	9	7	6
S3	H	0	M	E		
Sk	⋮	⋮	⋮	⋮	⋮	⋮
Sz						

FIG.6a

FIG.6b

FIG.6c

M1	M2	M3	M4	M5	MST	Mn
0	1	1	0	0	⋮	0

FIG.6d

F1	F2	F3	F4	FST	Fm
1	1	1	1	⋮	0

FIG.6e

S0	S1	S2	S3	SST	Sz
1	1	1	1	⋮	

FIG.6f

AD
⋮

FIG.6g

IFN
⋮

FIG.6h

ISN
⋮

FIG.6i

SC
⋮

FIG.6j

STAD
⋮

FIG.6k

FI
⋮

FIG.6l

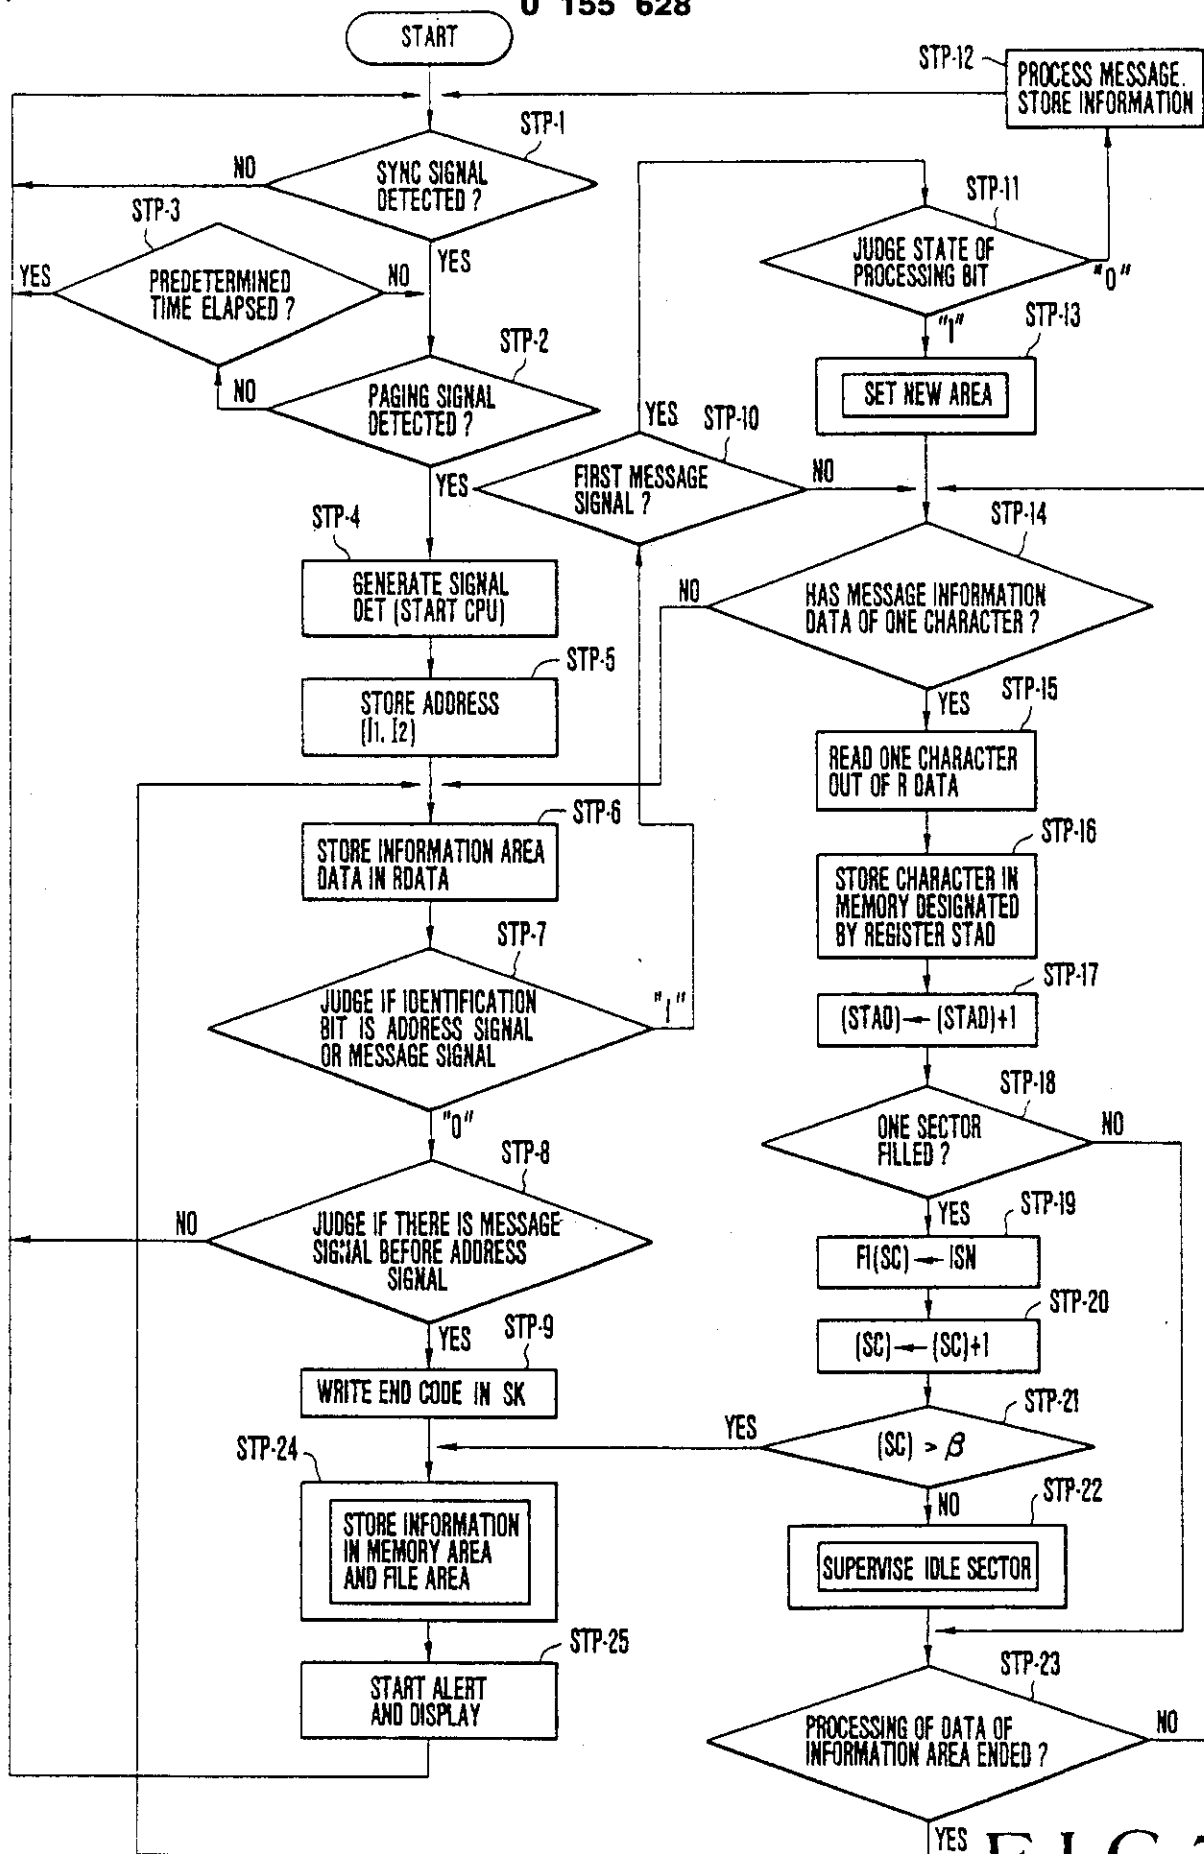


FIG. 7

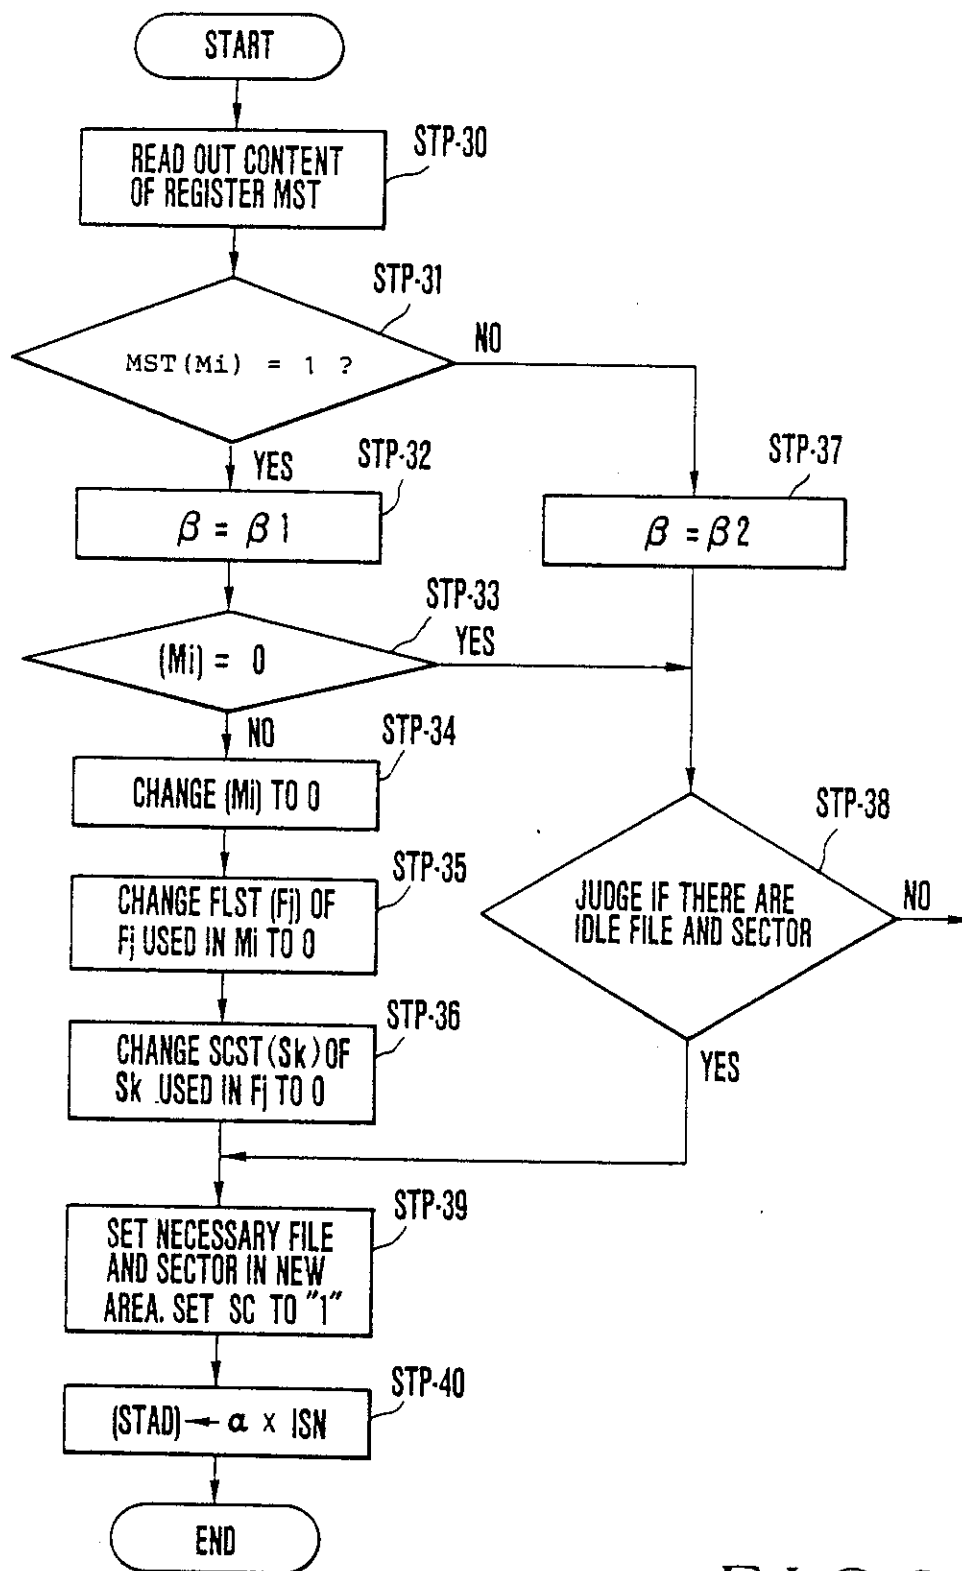


FIG.8


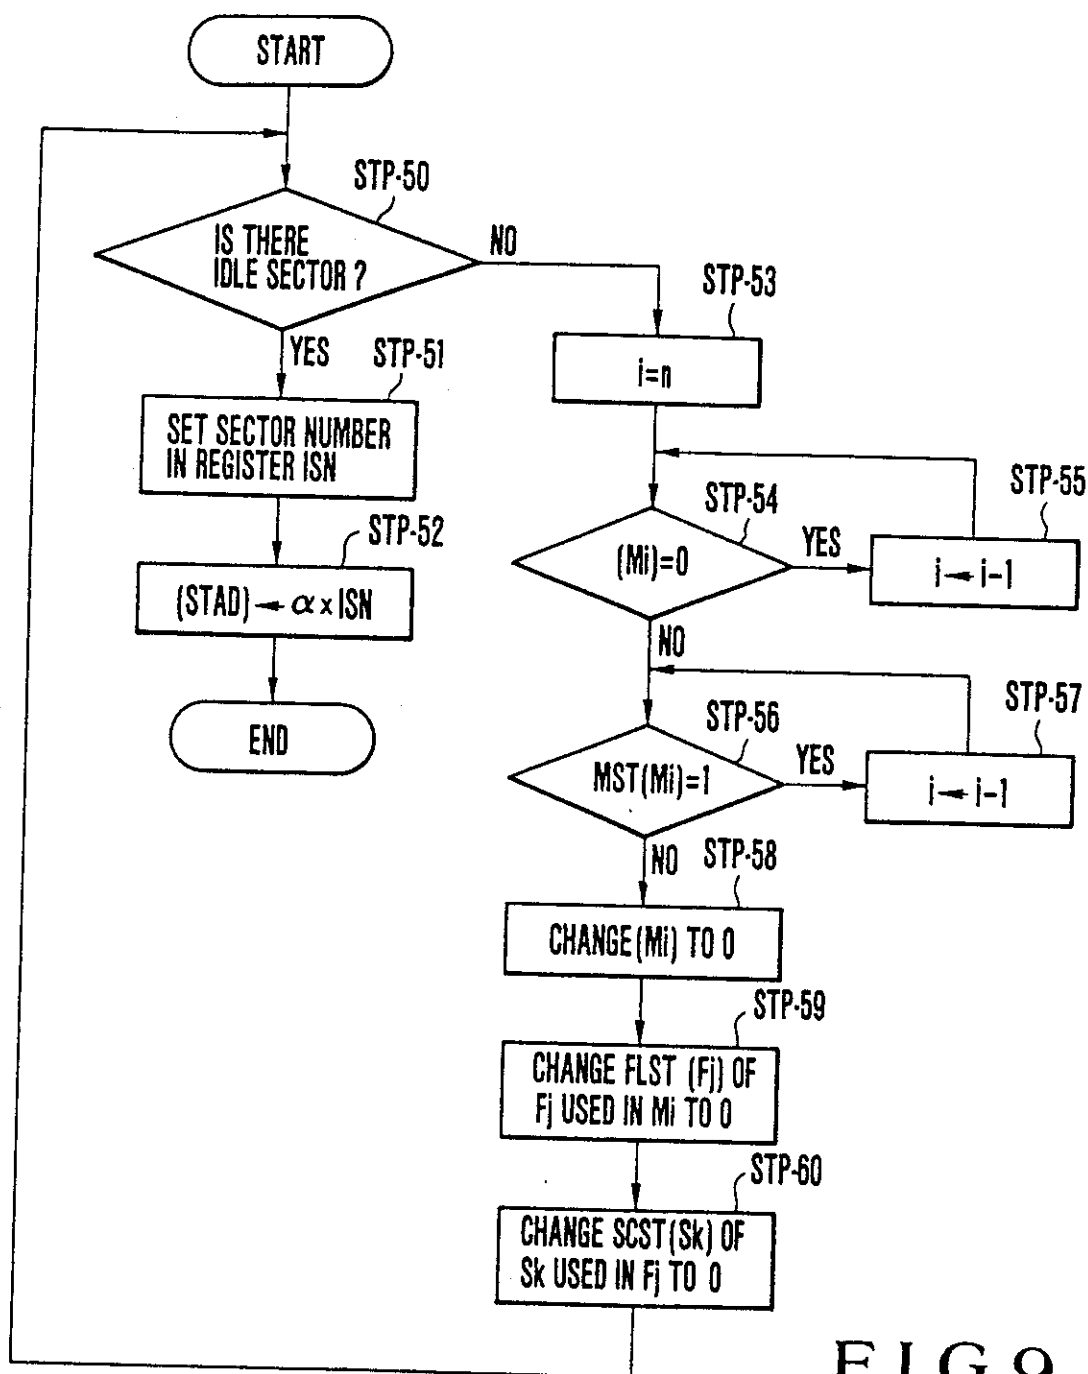


FIG. 9

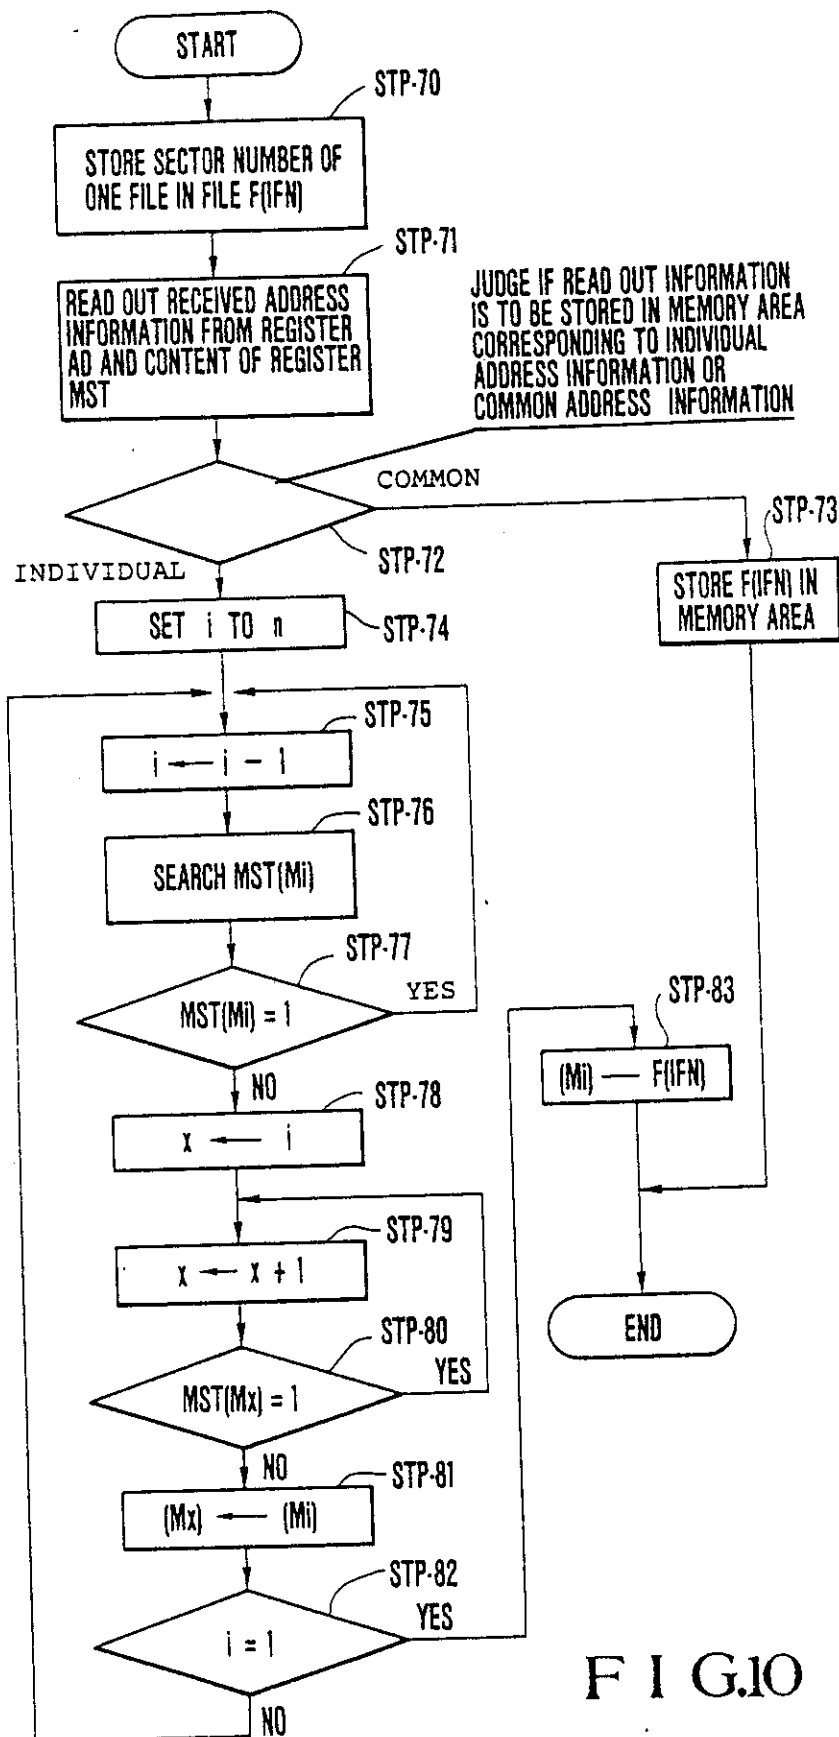

REGISTER ENTRY FOR EP0155628

European Application No EP85102827.4 filing date 12.03.1985

Priority claimed:

13.03.1984 in Japan - doc: 15465828

Designated States DE FR GB SE

Title

Applicant/Proprietor

NEC CORPORATION, 33-1, Shiba 5-chome, Minato-ku, Tokyo 108, Japan

[ADP No. 50045780002]

Inventors

MASAHIRO MATAI, c/o NEC Corporation 33-1, Shiba 5-chome, Minato-ku Tokyo,
Japan [ADP No. 53541710001]TAKASHI OHYAGI, c/o NEC Corporation 33-1, Shiba 5-chome, Minato-ku Tokyo,
Japan [ADP No. 53541728001]TOSHIHIRO MORI, c/o NEC Corporation 33-1, Shiba 5-chome, Minato-ku Tokyo,
Japan [ADP No. 53541736001]

Classified to

G4H

G08B H04Q

Address for Service

REDDIE & GROSE, 16 Theobalds Road, London, WC1X 8PL, United Kingdom

[ADP No. 00000091001]

EPO Representative

VOSSIUS & PARTNER, Siebertstrasse 4 P.O. Box 86 07 67, D-8000 München 86,
Federal Republic of Germany [ADP No. 50561281001]

Publication No EP0155628 dated 25.09.1985

Publication in English

Examination requested 12.03.1985

Patent Granted with effect from 22.06.1988 (Section 25(1)) with title PAGING
RECEIVERS

**** END OF REGISTER ENTRY ****