

AUSTRALIA

Patents Act

CONVENTION
606190

APPLICATION FOR A STANDARD PATENT

■/We GTE Valenite Corporation

of 100 W. 10th Street,
Wilmington,
Delaware,
UNITED STATES OF AMERICA.

hereby apply for the grant of a standard patent for an invention
entitled:

INDEXABLE INSERT FOR ROUGHING AND FINISHING

which is described in the accompanying complete specification.

Details of basic application

Number of basic application: 171,332

Convention country in which
basic application was filed: UNITED STATES OF AMERICA

Date of basic application : 21 March 1988

Address for Service:

PHILLIPS ORMONDE & FITZPATRICK
Patent and Trade Mark Attorneys
367 Collins Street
Melbourne 3000 AUSTRALIA

Dated: 8 August 1988

PHILLIPS ORMONDE & FITZPATRICK
Attorneys for:
GTE Valenite Corporation

By:

David B. Fitzpatrick

Our Ref : 101600
POF Code: 1497/89204

APPLICATION ACCEPTED AND AMENDMENTS

ALLOWED 30-10-90

AUSTRALIA

Patents Act

DECLARATION FOR A PATENT APPLICATION

▼ INSTRUCTIONS

(a) Insert "Convention"
if applicable(b) Insert FULL name(s)
of applicant(s)(c) Insert "of addition"
if applicable(d) Insert TITLE of
invention

In support of the (a) convention application made by

(b) GTE VALENITE CORPORATION

(hereinafter called "applicant(s) for a patent (c)
invention entitled (d)

for an

INDEXABLE INSERT FOR ROUGHING AND FINISHING

(e) Insert FULL name(s)
AND address(es) of
declarant(s)
(See headnote*)I/We (e) Donald A. Panek Assistant Secretary of
GTE Valenite Corporation of 100 W. 10th Street
Wilmington, Delaware, United States of America

do solemnly and sincerely declare as follows:

1. ~~I am/We are the applicant(s).~~
(or, in the case of an application by a body corporate)
1. I am/We are authorized to make this declaration on behalf of the applicant(s).
2. ~~I am/We are the actual inventor(s) of the invention.~~
(or, where the applicant(s) is/are not the actual inventor(s))
2. (f) James A. Pawlik: 39533 Owendale, Sterling Heights, Michigan,
48310, United States of America

(g) Recite how appli-
cant(s) derive(s)
title from actual
inventor(s)
(See headnote**)is/are the actual inventor(s) of the invention and the facts upon which the applicant(s)
is/are entitled to make the application are as follows:

(g)

The applicant is the assignee of the invention from the
said actual inventor.(Note: Paragraphs 3 and 4 apply only to Convention applications)(h) Insert country,
filing date, and
basic applicant(s)
for the/or EACH
basic application

3. The basic application(s) for patent or similar protection on which the application is based
is/are identified by country, filing date, and basic applicant(s) as follows:

(h)

United States of America
21 March, 1988
James A. Pawlik

4. The basic application(s) referred to in paragraph 3 hereof was/were the first application(s)
made in a Convention country in respect of the invention the subject of the application.

GTE Valenite Corporation

Donald A. Panek

Declared at (k) Donald A. Panek Assistant

Dated (l) Massachusetts Secretary

20 October, 1988

(m)

(k) Insert PLACE of
signing(l) Insert DATE of
signing(m) Signature(s) of
declarant(s)Note: No legalization or
other witness required

To: The Commissioner of Patents

10 NOV 83 13: 0

(12) PATENT ABRIDGMENT (11) Document No. AU-B-20500/88
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 606190

(54) Title
INDEXABLE INSERT FOR ROUGHING AND FINISHING

International Patent Classification(s)
(51)⁴ B23B 027/14 B23C 005/08 B23C 005/18 B23C 005/20

(21) Application No. : 20500/88 (22) Application Date : 08.08.88

(30) Priority Data

(31) Number (32) Date (33) Country
171332 21.03.88 US UNITED STATES OF AMERICA

(43) Publication Date : 21.09.89

(44) Publication Date of Accepted Application : 31.01.91

(71) Applicant(s)
GTE VALENITE CORPORATION

(72) Inventor(s)
JAMES A. PAWLIK

(74) Attorney or Agent
PHILLIPS ORMONDE & FITZPATRICK, 367 Collins Street, MELBOURNE VIC 3000

(56) Prior Art Documents
EP 6534
EP 9859
EP 19335

(57) Claim

1. A cutting tool comprising a body with central axis,

said body having at least one recessed pocket disposed
about said axis for receipt of at least one cutting insert,

means for securing said inserts in said pockets

said insert comprising a wafer of hardened material with
polygonal shaped top and bottom faces,

said faces oriented parallel to each other and separated by
at least three adjoining peripheral sides, sections,

each side forming at least one acute angle with an
adjoining side,

each side further comprising first and second planar
surfaces which intersect with each other to form an obtuse

.../2

(11) AU-B-20500/88
(10) 606190

-2-

included angle,

said intersecting ^{planar surfaces} ~~planes~~ forming a line parallel to
imaginary planes passing through said top and bottom faces,

said first surface of one side intersecting said top face
at a right angle,

said first and second surfaces of at least one adjoining
side intersecting said top face at an obtuse included angle
and said bottom face at a right angle respectively,

said adjacent first surfaces intersecting at an acute
included angle to form at least one cutting edge,

said cutting edge having a negative radial rake and
positive axial rake,

said cutting edge having a positive lead angle, and

said cutting edge having a negative true rake and a
positive angle of inclination.

17. A cutting tool comprising,

a tool body rotatable about a central axis,

said body having recessed pockets disposed therein for
receipt of indexable cutting inserts,

said pockets disposed about said axis in a staggered array
which provides for overlapping fields of cutting,

means for securing said inserts in said pockets,

said insert comprising a wafer of hardened material with
parallel polygonal top and bottom faces,

said faces oriented parallel to each other and separated by
at least four adjoining peripheral ~~side-sections~~ sides, .../3

(11) AU-B-20500/88
(10) 606190

-3-

said four sides comprising two pair of opposed sides where each side forms an acute and an obtuse angle with adjoining sides,

each of said sides further comprising first and second planar surfaces which intersect with each other to form an obtuse included angle,

said intersecting ^{planar surfaces} ~~planes~~ forming a line parallel to imaginary planes passing through said top and bottom faces,

said first surface of one side intersecting said top face at a right angle,

said first and second surfaces of ^{at} ~~at least~~ least one adjoining side intersecting said top face at an acute included angle and said bottom face at a right angle respectively,

said adjacent first surfaces intersecting at an acute included angle to form at least one cutting edge,

said insert having at least two oppositely oriented cutting edges per index,

said cutting edge having a negative radial rake and a positive axial rake,

said cutting edge having a positive lead angle, and

said cutting edge having a negative true rake and a positive angle of inclination. . - -

30. A cutting tool comprising,

a tool body rotatable about a central axis,

said body having recessed pockets disposed about said axis for receipt of indexable cutting inserts,

means for securing said inserts in said pockets,

.../4

(11) AU-B-20500/88
(10) 606190

-4-

said inserts comprising a wafer of hardened material with parallel top and bottom faces parallelogram in form having at least one pair of opposed acute angled corner sections,

said faces separated by four adjoining peripheral sides, ~~sections~~

said ^{sides,} ~~side~~ sections forming both an acute included and an obtuse included angle with said adjacent sides at said corner sections,

each of said sides further comprising first and second planar surfaces which intersect with each other to form an obtuse included angle,

said intersecting ^{planar surfaces} ~~planes~~ forming a line parallel to imaginary planes passing through said top and bottom face,

said first surfaces of opposite sides intersecting said top face to form right angles,

said first and second surfaces of at least one adjoining side intersecting said top face at an acute included angle and said bottom face at a right angle respectively,

said insert having at least two oppositely oriented cutting edges per index formed by adjoining first surfaces at each of said two oppositely oriented acute corner sections of said top and bottom faces,

said cutting edge having a negative radial rake and a positive axial rake,

said cutting edge having a negative true rake angle,

said cutting edge having a positive lead angle and a positive angle of inclination of between about 15° to about 25° degrees.

AUSTRALIA

Patents Act

606190

COMPLETE SPECIFICATION
(ORIGINAL)

Class

Int. Class

Application Number:
Lodged:

Complete Specification Lodged:
Accepted:
Published:

Priority

Related Art:

This document contains the
amendments made under
Section 49 and is correct for
printing.

APPLICANT'S REFERENCE: 87-2-140

Name(s) of Applicant(s):

GTE Valenite Corporation

Address(es) of Applicant(s):

100 W. 10th Street,
Wilmington,
Delaware,
UNITED STATES OF AMERICA.

Address for Service is:

PHILLIPS ORMONDE & FITZPATRICK
Patent and Trade Mark Attorneys
367 Collins Street
Melbourne 3000 AUSTRALIA

Complete Specification for the invention entitled:

INDEXABLE INSERT FOR ROUGHING AND FINISHING

Our Ref : 101600
POF Code: 1497/89204

The following statement is a full description of this invention, including
the best method of performing it known to applicant(s):

INDEXABLE INSERT FOR ROUGHING AND FINISHING

Field of the Invention

This invention relates to cutting tools employing lay down negative inserts and, more particularly, to indexable inserts with negative radial and positive axial rake angles.

Background of the Invention

10

20

The field of cutting tools employing indexable lay down inserts encompasses a wide range of tools including face mills, step mills, end mills, boring tools and turning tools to name a few. These tools incorporate an equally varied array of cutting edge designs to accommodate both the operational parameters of the tools and the production specifications of the workpiece. Where it is desirable to remove large volumes of material (rough cutting) by face milling, the cutting edge has been designed to withstand higher loading. For example, a face milling tool employed to rough cut carbon steel, driven by a 30-50 horsepower machine may operate at a feed rate of .015 inches per tooth at a 0.125 - 0.250 inch depth of cut utilizing a surface feed rate of 200-300 feet per minute. Smooth finish milling, however, places different conditions on cutting edge design. A face mill equipped with finishing inserts and operated in the same machine and in the same material above runs at a lower feed rate of .005 inch - .008 inches per tooth and at .020 - .030 inch depth of cut at 300-400 feet per minute. Although the cutting edge in finish milling is not

required to withstand the same load requirements as in rough cutting, the edge must provide a considerably smoother surface finish. Values in the range about 125 RMS for fine surface milling in comparison with about 250 RMS for rough cutting are not uncommon.

Several attempts have been made to improve cutting edge performance in both rough and finish cutting tools by changing the orientation of the cutting edge with respect to the tool seat. Though varied, the approaches have included the selection of a positive or a negative rake design.

Negative rake cutting tools provide an insert seat which is inclined at a negative rake angle relative to the cutting plane and a straight sidewall form. The inclination of the insert seat assures clearance under the cutting edge.

Positive rake cutting tools provide inserts fixed to inclined seats in such a manner that inserts are required to have an inclined sidewall form to provide clearance under the cutting edge. The back wall of the insert must be inclined rearwardly to complement the sidewall form of the insert. This provides a ramp surface rather than a pocket at the back wall of the insert and requires additional means for fastening the insert. Most positive rake inserts provide only half the number of available cutting edges because they cannot be indexed end over end. Use of a negative rake insert is therefore desirable. Examples of art employing positive rake inserts include United States Patent Nos. 3,938,231 and 3,868,752.

It is also known in the art to modify the orientation of

the cutting edge with respect to the cutting tool and workpiece by employing positive or negative radial and axial rake angles.

Generally, the term "rake" is the angular relationship measured between a reference plane and a reference face of the insert. The reference plane passes through the cutter body central line axis and the inserts cutting corner. The reference face sometimes referred to as rake face or first surface herein is the face that sees the work piece and is dependent upon the direction of cutter rotation.

The inserts radial rake angle is the angle formed by the referenced plane and the rake face as measured in the plane perpendicular to the cutter body axis.

Radial rake is defined as positive where the rake face forms an acute angle with respect to the reference plane such that the rake face slopes away from the direction of cutter rotation when applied to a workpiece. Radial rake is defined as negative where the rake face forms an obtuse angle with the reference planes and slopes toward the direction of cutter rotation. Generally, a negative rake is preferred in applications where the cutting edge is be subject to high loading.

The insert's axial rake connotes the angle formed between the reference plane and the rake face measured in a plane perpendicular to the radius of the cutting body, at the working cutting corner. The use of negative radial rakes in combination with negative or positive axial rakes is known in the art. One example is found in U.S. Patent Nos. 3,289,271.

It is also known in the art to further define the orientation of a cutting edge in terms of its true rake angle and angle of inclination or true shear. The true rake angle is defined by drawing an imaginary line normal to the cutting edge and intersecting the axis of the cutter body. The angle between the rake face and this imaginary line is the true rake angle.

- 10 The angle of inclination is defined by drawing an imaginary line through the center point of the cutter body and tangent to the radially outermost point of the cutting edge. The angle between this line and the cutting edge is the angle of inclination.

If the plane of the rake face passes through the cutter axis, the true rake is said to be zero. If the top working corner of the cutting edge is ahead of the lowermost point on the cutting edge, the true rake is said to be positive. If the radially outermost point of the cutting edge passes through the cut first, then the inclination angle is said to be negative.

GTE Valenite Patent No. 4,352,609 discloses a face milling cutter and a cutting edge with a positive true rake angle in the range of 0° to 3° and a radial rake on the order of 0° to 2° positive, with an axial rake on the order of 4° to 6° negative. A cutting edge utilizing a positive radial rake with a negative axial rake, however, tends to not only fracture under heavy loading but also directs spent chips
30 toward the workpiece. This results in recutting and scouring, requiring greater horse power per cubic inch of stock removed.

Attempts at modifying the performance characteristics of cutting tools has also included incorporating a lead angle. The term lead angle is known in the art and is defined as an angle formed between the radially outward facing insert edge that includes the working cutting corner and an imaginary line oriented parallel to the cutting body axis that passes through the cutting corner.

10 A cutting tool, which has high efficiency in both soft and difficult to machine materials and facilitates the formation of tight chip for rapid removal and also generates a smooth surface at high feed rates would be a desirable advance in the art of cutting tools. By optimizing the radial and axial rakes of the insert, the extent of the lead angle, true rake and angle of inclination, the problem of stocking multiple cutters and inserts for rough cutting and finishing is alleviated.

20 ~~One object, therefore, in the present invention is to provide a cutting tool employing lay down indexable inserts which includes an enhance cutting edge and which generates short, tightly curled chips.~~

A further object of the present invention is to provide a cutting tool employing a lay down indexable insert which can withstand high feed rates in difficult to machine materials without failure and simultaneously deliver a smooth final finish on the order of 125 RMS or better.

30 A further object of the present invention is to provide a cutting tool employing a lay down indexable insert which is easy to manufacture and where the dies for the insert are made ~~according to standard machining practices.~~



Summary of the Invention

According to the present invention there is provided a cutting tool comprising a body with central axis,

said body having at least one recessed pocket disposed about said axis for receipt of at least one cutting insert,

means for securing said inserts in said pockets,

said insert comprising a wafer of hardened material with polygonal shaped top and bottom faces,

10 said faces oriented parallel to each other and separated by at least three adjoining peripheral sides,

each side forming at least one acute angle with an adjoining side,

each side further comprising first and second planar surfaces which intersect with each other to form an obtuse included angle,

said intersecting planar surfaces forming a line parallel to imaginary planes passing through said top and bottom faces,

20 said first surface of one side intersecting said top face at a right angle,

said first and second surfaces of at least one adjoining side intersecting said top face at an obtuse included angle and said bottom face at a right angle respectively,

said adjacent first surfaces intersecting at an acute included angle to form at least one cutting edge,

said cutting edge having a negative radial rake and positive axial rake,

said cutting edge having a positive lead angle, and

30 said cutting edge having a negative true rake and a positive angle of inclination.

The present invention further provides a cutting tool comprising,

a tool body rotatable about a central axis,

said body having recessed pockets disposed therein for receipt of indexable cutting inserts,

said pockets disposed about said axis in a staggered array which provides for overlapping fields of cutting,



means for securing said inserts in said pockets,
said insert comprising a wafer of hardened material
with parallel polygonal top and bottom faces,

said faces oriented parallel to each other and
separated by at least four adjoining peripheral sides,

said four sides comprising two pair of opposed sides
where each side forms an acute and an obtuse angle with
adjoining sides,

10 each of said sides further comprising first and second
planar surfaces which intersect with each other to form an
obtuse included angle,

said intersecting planar surfaces forming a line
parallel to imaginary planes passing through said top and
bottom faces,

said first surface of one side intersecting said top
face at a right angle,

20 said first and second surfaces of at least one
adjoining side intersecting said top face at an acute
included angle and said bottom face at a right angle
respectively,

said adjacent first surfaces intersecting at an acute
included angle to form at least one cutting edge,

said insert having at least two oppositely oriented
cutting edges per index,

said cutting edge having a negative radial rake and a
positive axial rake,

said cutting edge having a positive lead angle, and

said cutting edge having a negative true rake and a
positive angle of inclination.

30 The present invention further provides a cutting tool
comprising,

a tool body rotatable about a central axis,

said body having recessed pockets disposed about said
axis for receipt of indexable cutting inserts,

means for securing said inserts in said pockets,

said inserts comprising a wafer of hardened material
with parallel top and bottom faces parallelogram in form
having at least one pair of opposed acute angled corner



sections,

said faces separated by four adjoining peripheral sides,

said sides forming both an acute included and an obtuse included angle with said adjacent sides at said corner sections,

each of said sides further comprising first and second planar surfaces which intersect with each other to form an obtuse included angle,

10 said intersecting planar surfaces forming a line parallel to imaginary planes passing through said top and bottom face,

said first surfaces of opposite sides intersecting said top face to form right angles,

said first and second surfaces of at least one adjoining side intersecting said top face at an acute included angle and said bottom face at a right angle respectively,

20 said insert having at least two oppositely oriented cutting edges per index formed by adjoining first surfaces at each of said two oppositely oriented acute corner sections of said top and bottom faces,

said cutting edge having a negative radial rake and a positive axial rake,

said cutting edge having a negative true rake angle,

said cutting edge having a positive lead angle and a positive angle of inclination of between about 15° to about 25° degrees.

30 The present invention still further provides a cutting tool comprising,


a tool body rotatable about a central axis,

said body having recessed pockets disposed about said axis for receipt of indexable cutting inserts,

said pockets having a planar seating face with adjoining abutment walls,

said seating face having a threading aperture,

said inserts comprising a wafer of cemented carbide with an aperture which transverses top and bottom faces



and is designed for receipt of a screw which mates with said seat aperture to forceably secure said insert into abutting relationship with said walls,

said inserts further comprising parallel top and bottom faces, parallelogram in form, with oppositely oriented pairs of edge surfaces,

said edge surfaces intersecting at four corner portions per face forming at least one pair of acute angles at opposite corners,

10 said faces separated by four adjoining peripheral sides,

said four sides comprising two pairs of oppositely oriented sides where each side forms both an acute included angle and an obtuse included angle with adjoining sides,

each of said sides further comprising first and second planar surfaces which intersect to form an obtuse included angle,

said intersecting planes forming a line parallel to imaginary planes passing through said top and bottom faces,

20 a pair of oppositely oriented first surfaces intersecting said top face to form right angles,

said first and second surfaces of at least one adjoining side intersecting said top face at an acute included angle and said bottom face at a right angle,

said insert having at least two oppositely oriented cutting edges per index formed by the intersection of said adjoining first surfaces at each of said two corner sections of said top and bottom faces,

30 said cutting edge having a negative radial rake of about 21° degrees and a positive axial rake of about 10° degrees,

said cutting edge having a negative true rake angle of about 8° degrees,

said cutting edge having a lead angle of about 45° degrees, and

said cutting edge having a positive angle of inclination of about 21° degrees.

Brief Description of the Drawings

The features of the invention will become apparent from a reading of a detailed description of a preferred embodiment taken in conjunction with the drawings in which:

10

20

30

39

-6c-



Figure 1 is a fragmentary axial view of a milling cutter fashioned in accordance with the principles of the invention;

Figure 2 is an elevated schematic side of a milling cutter illustrating overlapping fields of cutting;

Figure 3 is a schematic side elevation of a milling cutter illustrating the location of a single cutter insert in relation
10 to a fragmentary workpiece;

Figure 4 is a schematic mounting face view of an insert having parallel top and bottom faces, parallelogram in form;

Figure 5 is a view of a side face taken from the direction of line 1-1 of Figure 4;

Figure 6 is a perspective view taken from the direction of line 2-2 of an outermost side cutting corner of Figure 4;
20

Figure 7 is an edgewise view normal to at least one cutting edge of the cutter of Figure 1 illustrating a lead angle of the present invention;

Figure 8 is a view taken from the direction of line 3-3, of Figure 7, illustrating a radial rake angle;

Figure 9 is a view taken from the direction of line 4-4, of Figure 7, illustrating a true rake angle of the present
30 invention;

Figure 10 is a view taken from the direction of line 5-5, of Figure 7, illustrating an axial rake angle, and

Figure 11 is a view taken from the direction of line 6-6, of Figure 7, illustrating an angle of inclination of the present invention.

Detailed Description of The Preferred Embodiment

Referring to Figure 1 and 3, a cutting tool 1 is illustrated having a body 10 designed for rotation about a longitudinal axis 20. The body includes at least one recessed pocket 25 which is designed for receipt of an indexable insert 50. Figure 1 illustrates a face milling tool where the inserts are spaced at equivalent radial distances from the center axis. It should be readily apparent to those of ordinary skill in the art that the use of a face mill is for illustrative purposes only and the present invention could just as easily be adapted to any number of cutting tools mentioned above including those which stagger the orientation of the insert pockets to provide overlapping fields of cutting such as shown in Figure 2. It should also be apparent to those of ordinary skill in the art that the present invention could just as easily be employed in turning tool applications where the cutting tool remains stationary and the workpiece is rotated or in broaching applications.

Referring to Figure 3, each pocket is milled from the tool body by standard milling techniques to include a seat face 30 and at least one abutment wall 35. Preferably, a second abutment wall 40 is milled from the tool body to provide adjoining abutment wall surfaces. Seat face 30 is generally planar and includes an aperture which is threaded for a receipt of a retaining screw (not shown). It should be apparent that

the present invention is not limited to any particular means of fixing insert 50 in pocket 25. Reference hereafter will be made to screw which passes through aperture 55 and threads into the beforementioned aperture in seat face 30 to force the insert 50 into a secure abutting relationship with walls 35 and 40. The insert could just as easily employ any number of pin or clamp designs commonly available in the art. The present invention also recognizes that various brazes commonly known in the art may be employed to secure the insert. One particularly
10 braze is disclosed in United States Patent 4,389,074 assigned to GTE Products Corporation.

Insert 50 is a wafer of hardened material selected from the group including cemented carbides such as tungsten carbide, silicon nitride or ceramic or other materials sufficiently resilient to withstand the forces encountered in stock removal such as cast iron carbon steel, alloys of nickel, chrome materials, aluminum, and exotics such as titanium or composite materials. Preferably VC55 tungsten carbide produced by GTE Valenite is used in steel applications. Other carbide grades
20 are available from GTE Valenite the selection of which depends in part on the application to which the tool is applied.

Although the configuration of the insert is generally polygonal in form and therefore may include triangular, circular, or square geometries, reference hereafter will be to a parallelogram for purposes of convenience. As shown in Figures 3, 4, and 5, insert 50 includes an aperture 55 and recessed conical portions 60, 65 located in top face 70 and
30 bottom face 75. The top and bottom faces are generally parallel.

Each face 70, 75 is parallelogram in form with at least one and preferably two pairs of oppositely oriented corner sections 85, 90. Each face includes four-edge surfaces 105, 110, 115, 120 which intersect at oppositely oriented pairs of corners 85, 90 to form oppositely oriented acute and obtuse included angles of between about 0° and 90° and 90° and 180° , respectively.

Referring to Figures 4, 5 and 6, the top and bottom faces 70, 75 are separated by at least three and preferably four adjoining peripheral side sections 125, 130, 135, 140. In one embodiment, each side adjoins two other sides at corners 85, 90 to form two pair of sides opposed in orientation where each side 125 forms an acute included angle 145, and an obtuse included angle 155 with adjoining sides 120, 130. It is generally recognized to those of ordinary skill in the art that the range of the acute and obtuse angles may vary and are dependent on the shape of the insert and the application.

Each of the side sections include a first upper surface illustrated in Figure 6 at 165, 170, 175, 180, and a second lower surface at 185, 190, 195, 200. At least one pair of oppositely oriented first surfaces 170, 180 are parallel to each other and intersect with the top face 70 to sweep out right angles. At least two second surfaces 185, 195 are oppositely oriented, parallel to each other, and intersect with bottom face 75 to sweep out right angles. First surfaces 165, 175 (and 170, 180) form included obtuse angles with respect to top face 70 (and bottom face 75) of between about 91° to about 179° degrees. A range of between about 91° to about 140° degrees in conjunction with a lead angle of $0-45^{\circ}$ degrees is preferred when optimum surface finish is desired.

Each respective side section surrounds the periphery of the insert 50 with alternating planar first section forming right and obtuse angles with respect to top and bottom faces 70, 75. For each individual side, the respective first and second surfaces intersect to form a line 203 which is parallel to imaginary planes passing through the top face 70 and bottom face 75. On one index, the first surface 170 and the second surface 195 may be secured against adjoining abutment walls 35, 40 (see Figures 1, 3), when seated securely in pocket 25.

10

First surface 175 of side 135 intersects with first surface 170 of the second side 130 at corner 85 and forms one of at least two oppositely oriented cutting edges. The number of cutting edges selected, however, is dependent in part on the shape of the insert.

In an alternate embodiment, the oppositely oriented pair of first surfaces adjoining the vertical planar first surfaces referenced above are crowned to facilitate fine finished turning. The crown is formed by a radius calculated in accordance with the formula $R = \frac{C^2}{8H} + 4H^2$ where C

8H

constitutes the width or chord of the first section extending between the top face and its intersection with the second face, and H constitutes the height of the crown. An insert with a 5/8 I.C. and 5/16 inch thick, employs a crown height of between about .0002 inches to about .0015 inches. The width of the crown C is dependent in part upon the size of the insert selected. A radius of about 2.813 inches is employed where a chord width of .150 and a height of .001 are selected. The radius is measured perpendicular to the chord. The magnitude of the radius is dependent in part on the degree of surface

30

finish desired. The embodiment alleviates the problem of a wavy or shingled surface finish caused by spindle tilt.

In another embodiment, the insert may be scalloped to facilitate smaller chip width and to reduce horsepower requirements. A scalloped edge portion is oriented on the clearance face of the insert defined along the edge created by the intersection of the top face with a first surface or rake face which extends generally perpendicular thereto. The scalloped sections may be oppositely oriented where the insert configuration includes parallelogram shape top and bottom faces. The scallops may be produced on the insert by manufacturing methods known in the art such as disclosed in U.S. Patent No. 4,606,678, column 1, lines 65-68 and column 2, lines 1-25 of which are hereby incorporated by reference. Other methods are known in the art and will not be further discussed herein. The number of scallops per section is dependent on the surface finish desired. The greater the number of scallops, the finer the finish and the lower the horsepower requirements for machining. Each insert side, when mounted in a tool body, is phased differently from the remaining inserts to facilitate the removal of the high and low points formed by the scalloping. By staggering the orientation of the scalloped section, overlapping fields of cutting generate a smooth flat surface.

In another embodiment, the insert may include a crowned surface as disclosed above on the first surface (or rake face) in addition to the beforementioned scalloping.

In yet another embodiment, the intersection of first and second surfaces per side form a line which is skewed toward top

face 70 or bottom face 75 depending on the index. This serves to strengthen the cutting edge due to the additional material of the enlarged second surface. An enlarged length of cut is also provided due to the diminished portion of the first surface adjoining the cutting edge. Alternatively, the line may be skewed to provide an increasing section of the first surface. This serves to increase both the axial rake and the angle of inclination facilitating cutting in soft materials such as low silicon aluminum, soft brass or lead.

10

The orientation of the cutting edges with respect to the insert's radial and axial rake angles, lead angle, angle of inclination and true rake angle, is particularly important to the present invention. With regard to Figure 8, insert 50 has a negative radial rake angle 235 formed by the intersection of first surface 170 and top face 70 as measured in an imaginary plane 250 oriented perpendicular to the cutter body axis 20. Top face 70, as illustrated, slopes toward the direction of cutter rotation 255 when applied to workpiece (not shown). A negative radial rake of 0° to 30° augments cutting edge strength due to the 90° included corner. As stated above, the 90° edge is formed by the intersection of the first surface 170 and the top insert faces 70. Clearance is provided by the negative radial rake angle. As the cutting edge approaches 0° radial, the clearance angle lessens. In particular, a radial rake angle between 10° - 20° is preferred. A rake angle beyond 30° causes the true rake to become too negative to cut efficiently as the cutting face begins to become increasingly tangent to the work surface.

20

30

Insert 50 is oriented with a positive axial rake as illustrated in Figure 10. The axial rake angle 275 is formed

between the intersection of imaginary planes passing between the first surface 170 of insert 50 and a line 285 oriented parallel to the cutting tool axis of rotation 20. Preferably, the first surface 170 slopes away from the direction of cutter rotation as illustrated by arrow 255 when applied to a workpiece (not shown). A positive axial rake angle between about 10° to about 20° , directs material away from work surface and favors the formation of tightly spiraled chips. This helps to achieve a finer surface finish by eliminating, 10 recutting and scouring. In addition, the positive angle requiring less horse power because the positive axial rake functions as a chisel rather than a plow.

A preferred axial rake angle range of 10° to 15° positive combined with a negative radial rake results in obtaining a positive inclination of 15° to 25° degrees which provides for improved shearing of the material. As the axial rake increases beyond 20° degrees, the cutting edge became too frail to support heavy cutting in difficult to machine materials. A change from 20° to 30° degrees would 20 increase the negative radial rake and increase the negative true rake. A more positive angle of inclination would also be generated. If radial rake were not increased, the clearance of the flank surfaces would be thereby greatly reduced leading to heeling of the cutter and ultimately a diminished tool life.

Referring to Figure 7, a lead angle 240 of 0° - 90° degrees allows the cutter to advance a greater distance per tooth than the actual chip thickness. For example, with a 90^o lead and a feed rate of .010 inches per tooth, an actual chip thickness of .010 inch per tooth develops. With a 45^o lead and a feed rate of .010 per tooth, a .007 actual chip thickness is found. 20

The lead angle, therefore, allows for parts to be milled faster making the tool more economical.

Enhanced results may be obtained where the cutting edge employs a negative true rake angle between about 5° to about 10° . Referring to Figure 9, the true rake angle 290 is swept out by imaginary plane 295 formed through top face 70 and first surface 170. Plane 295 is normal to axis 20. A preferred range of 7° to 8° has been determined through testing. As the angle approaches 10° additional horse power is required to maintain cutting speed over the workpiece.

Referring to Figure 11, inclination angle 297 is defined by drawing an imaginary line 300 parallel to axis 20 and passing through corner 85. A preferred angle of 15° to about 25° directs chips away from the finish surface of the workpiece. As the angle of inclination increases, the cutting edge becomes too fragile for rough cutting. In addition, an angle in excess of 25° degrees renders the cutting edge too brittle for exotic materials.

An embodiment of the present invention as illustrated in Figure 1 was constructed for purposes of evaluation. The face mill utilized a 6 inch cutting diameter and was equipped with 12 inserts arranged about the periphery. Inserts were formed from GTE Valenite VC55 tungsten carbide were oriented with 21° negative radial and 10° positive axial rake angles and with an 8° negative true rake and 21° positive angle of inclination. Testing was done on a 50 horsepower Cincinnati vertical milling machine using 1045 (AISI) steel with a hardness coefficient of 210 bhn and a tensile strength at 120 ksi. Parameters of feed per tooth traveled, net horse power,

horse power per cubic inch and surface finish were measured.

TABLE I

<u>Cut No</u>	<u>FPT</u>	<u>Net HP</u>	<u>HP/IN3</u>	<u>RMS</u>
1	.0056	15.2	.95	63
2	.0064	16.9	.92	50
3	.0079	20.2	.86	52
4	.0092	22.2	.84	42
5	.0114	27.3	.83	27
6	.0131	30.5	.81	35
7	.0158	36.9	.81	58
8	.0183	40.9	.78	68
9	.0228	52.1	.79	86

As illustrated above, the embodiment produced mean value results of 84.3 for horse power per cubic inch milled and 53.4 RMS for surface finish.

It will be understood that other embodiments and modifications of the invention are contemplated. It is the intention to include all such embodiments and modifications within the scope of the invention as are defined by the appended claims.

~~IX Claims~~ The claims defining the invention are as follows:

1. A cutting tool comprising a body with central axis,
said body having at least one recessed pocket disposed
about said axis for receipt of at least one cutting insert,
means for securing said inserts in said pockets
10 said insert comprising a wafer of hardened material with
polygonal shaped top and bottom faces,
said faces oriented parallel to each other and separated by
at least three adjoining peripheral sides, ~~sides~~,
each side forming at least one acute angle with an
adjoining side,
each side further comprising first and second planar
20 surfaces which intersect with each other to form an obtuse
included angle,
said intersecting ^{planar surfaces} ~~planes~~ forming a line parallel to
imaginary planes passing through said top and bottom faces,
said first surface of one side intersecting said top face
at a right angle,
said first and second surfaces of at least one adjoining
30 side intersecting said top face at an obtuse included angle
and said bottom face at a right angle respectively,



- said adjacent first surfaces intersecting at an acute included angle to form at least one cutting edge,

said cutting edge having a negative radial rake and positive axial rake,

said cutting edge having a positive lead angle, and

10 said cutting edge having a negative true rake and a positive angle of inclination.

2. The cutting tool of claim 1 wherein said body is rotatable about said axis.

3. The cutting tool of claim 2 wherein said pockets comprise a planar seating face and include at least two adjoining abutment walls.

20 4. The cutting tool of claim 1 wherein said pockets are disposed about said axis in a staggered array which provides for overlapping fields of cutting.

5. The cutting tool of claim 3 wherein said seating face includes a threaded aperture.

6. The cutting tool of claim 5 wherein said bottom face is secured in said pocket seat.

30 7. The cutting tool of claim 6 wherein said inserts are indexable, having two cutting edges per index.

8. The cutting tool of claim 7 wherein said inserts are made of tungsten carbide.

9. The cutting tool of claim 8 wherein said inserts include an aperture which intersects said top and bottom faces and further includes conical sections recessed in said top and bottom faces.

10 10. The cutting tool of claim 9 wherein said mounting means comprises a screw which threads into said seating face and forceably securing said top or bottom face against said seating face.

11. The cutting insert of claim 10 wherein said top and bottom faces are parallelogram in shape with at least two pair of parallel sides.

12. The cutting insert of claim 11 wherein said cutting edge has a lead angle of between about 0° to about 90° .

20

13. The cutting edge of claim 12 wherein said negative radial rake is between about 0° to about 30° .

14. The cutting edge of claim 13 wherein said positive axial rake is between about 10° to about 20° .

15. The cutting edge of claim 14 wherein said negative true rake is between about 5° to about 10° .

30

16. The cutting edge of claim 15 where said positive angle of inclination is between about 0° to about 30° .



17. A cutting tool comprising,

a tool body rotatable about a central axis,

said body having recessed pockets disposed therein for receipt of indexable cutting inserts,

said pockets disposed about said axis in a staggered array which provides for overlapping fields of cutting,

10

means for securing said inserts in said pockets,

said insert comprising a wafer of hardened material with parallel polygonal top and bottom faces,

said faces oriented parallel to each other and separated by at least four adjoining peripheral ~~side sections~~ sides,

said four sides comprising two pair of opposed sides where
20 each side forms an acute and an obtuse angle with adjoining sides,

each of said sides further comprising first and second planar surfaces which intersect with each other to form an obtuse included angle,

said intersecting ^{planar surfaces} ~~planes~~ forming a line parallel to imaginary planes passing through said top and bottom faces,

30 said first surface of one side intersecting said top face at a right angle,



said first and second surfaces of ^{at} ~~at~~ least one adjoining side intersecting said top face at an acute included angle and said bottom face at a right angle respectively,

said adjacent first surfaces intersecting at an acute included angle to form at least one cutting edge,

said insert having at least two oppositely oriented cutting edges per index,

10

said cutting edge having a negative radial rake and a positive axial rake,

said cutting edge having a positive lead angle, and

said cutting edge having a negative true rake and a positive angle of inclination.

18. The cutting tool of claim 17 wherein said pockets
20 comprise a planar seating face and include at least two adjoining abutment walls.

19. The cutting tool of claim 18 wherein said seating face includes a threaded aperture.

20. The cutting tool of claim 19 wherein said bottom face is secured in said pocket seat.

21. The cutting tool of claim 20 wherein said inserts are
30 made of tungsten carbide.



22. The cutting tool of claim 21 wherein said inserts include an aperture which intersects said top and bottom faces and further includes conical sections recessed in said top and bottom faces.

23. The cutting tool of claim 22 wherein said mounting means comprises a screw which threads into said seating face forceably seeing said top or bottom face against said seating face.

10

24. The cutting insert of claim 23 wherein said top and bottom faces are parallelogram in shape with at least two pair of parallel sides.

25. The cutting insert of claim 24 wherein said cutting edge has a lead angle of between ~~about~~ 0° to ~~about~~ 90° .

26. The cutting edge of claim 25 wherein said negative radial rake is between ~~about~~ 0° to ~~about~~ 30° .

20

27. The cutting edge of claim 26 wherein said positive axial rake is between ~~about~~ 0° to ~~about~~ 20° .

28. The cutting edge of claim 27 when said negative true rake is between ~~about~~ 5° to ~~about~~ 10° .

29. The cutting edge of claim 28 wherein said positive angle of inclination is between ~~about~~ 0° to ~~about~~ 30° .



30. A cutting tool comprising,

a tool body rotatable about a central axis,

said body having recessed pockets disposed about said axis for receipt of indexable cutting inserts,

means for securing said inserts in said pockets,

said inserts comprising a wafer of hardened material with parallel top and bottom faces parallelogram in form having at least one pair of opposed acute angled corner sections,


said faces separated by four adjoining peripheral sides, ~~sections,~~

^{sides,}
said ~~side~~ ^{sides,} sections forming both an acute included and an obtuse included angle with said adjacent sides at said corner sections,

each of said sides further comprising first and second planar surfaces which intersect with each other to form an obtuse included angle,

^{planar surfaces}
said intersecting ~~planes~~ forming a line parallel to imaginary planes passing through said top and bottom face,

said first surfaces of opposite sides intersecting said top face to form right angles,



said first and second surfaces of at least one adjoining side intersecting said top face at an acute included angle and said bottom face at a right angle respectively,

said insert having at least two oppositely oriented cutting edges per index formed by adjoining first surfaces at each of said two oppositely oriented acute corner sections of said top and bottom faces,

10 said cutting edge having a negative radial rake and a positive axial rake,

said cutting edge having a negative true rake angle,

said cutting edge having a positive lead angle and a positive angle of inclination of between about 15° to about 25° degrees.

20 31. The cutting tool of claim 30 wherein said pockets comprise a planar seating face and include at least two adjoining abutment walls.

32. The cutting tool of claim 31 wherein said seating face includes a threaded aperture.

33. The cutting tool of claim 32 wherein said inserts are made of tungsten carbide.

30 34. The cutting tool of claim 33 wherein said bottom face is secured in said pocket seat.



35. The cutting tool of claim 34 wherein said inserts included an aperture which intersects said top and bottom faces and further includes conical sections recessed in said top and bottom faces.

36. The cutting tool of claim 35 wherein said mounting means comprises a screw which threads into said seating faces and forceably securing said top or bottom face against said seating face.

37. The cutting insert of claim 36 wherein said top and bottom faces are parallelogram in shape with at least two pair of parallel sides.

38. The cutting insert of claim 37 wherein said cutting edge has a lead angle of between ~~about~~ 0° to ~~about~~ 90° .

39. The cutting edge of claim 38 wherein said negative radial rake is between ~~about~~ 10° to ~~about~~ 20° .

40. The cutting edge of claim 39 wherein said positive axial rake is between ~~about~~ 0° to ~~about~~ 30° .

41. The cutting edge of claim 40 when said negative true rake is between ~~about~~ 5° to ~~about~~ 10° and said positive angle of inclination is between ~~about~~ 0° to ~~about~~ 30° .



42. A cutting tool comprising,

a tool body rotatable about a central axis,

said body having recessed pockets disposed about said axis for receipt of indexable cutting inserts,

said pockets having a planar seating face with adjoining abutment walls,

said seating face having a threading aperture,

said inserts comprising a wafer of cemented carbide with an aperture which transverses top and bottom faces and is designed for receipt of a screw which mates with said seat aperture to forceably secure said insert into abutting relationship with said walls,

said inserts further comprising parallel top and bottom faces, parallelogram in form, with oppositely oriented pairs of edge surfaces,

said edge surfaces intersecting at four corner portions per face forming at least one pair of acute angles at opposite corners,

said faces separated by four adjoining peripheral sides, sections.

said four sides comprising two pairs of oppositely oriented sides where each side forms both an acute included angle and an obtuse included angle with adjoining sides,



each of said sides further comprising first and second planar surfaces which intersect to form an obtuse included angle,

said intersecting planes forming a line parallel to imaginary planes passing through said top and bottom faces,

a pair of oppositely oriented first surface intersecting said top face to form right angles,

said first and second surfaces of at least one adjoining side intersecting said top face at an acute included angle and said bottom face at a right angle,

said insert having at least two oppositely oriented cutting edges per index formed by the intersection of said adjoining first surfaces at each of said two corner sections of said top and bottom faces,

said cutting edge having a negative radial rake of about 21° degrees and a positive axial rake of about 10° degrees,

said cutting edge having a negative true rake angle of about 8° degrees,

said cutting edge having a lead angle of about 45° degrees, and

said cutting edge having a positive angle of inclination of about 21° degrees.

43. The cutting tool of claim 42 wherein said inserts are made of tungsten carbide.

44. A cutting tool substantially as herein before described with reference to the accompanying drawings.

DATED: 9 OCTOBER, 1990

PHILLIPS ORMONDE & FITZPATRICK

10 Attorneys For:

GTE VALENITE CORPORATION

David Fitzpatrick

20




30





2364Z

39

-28-



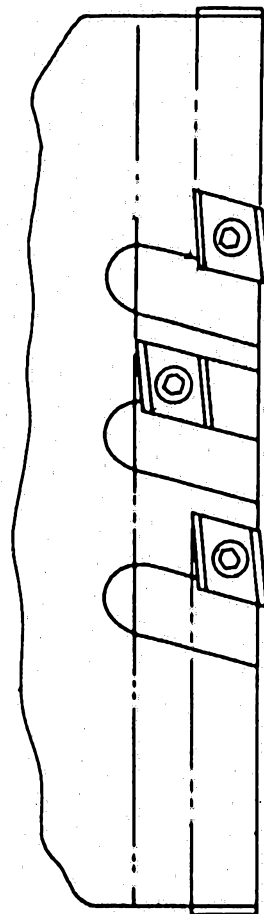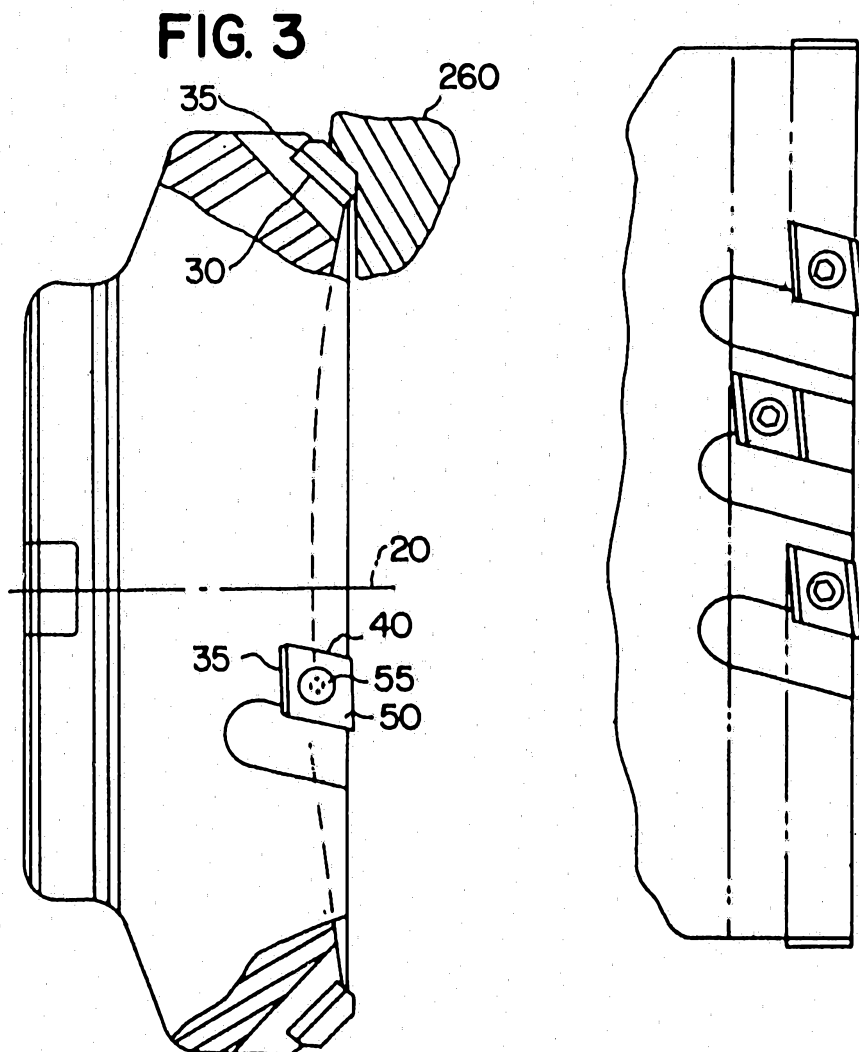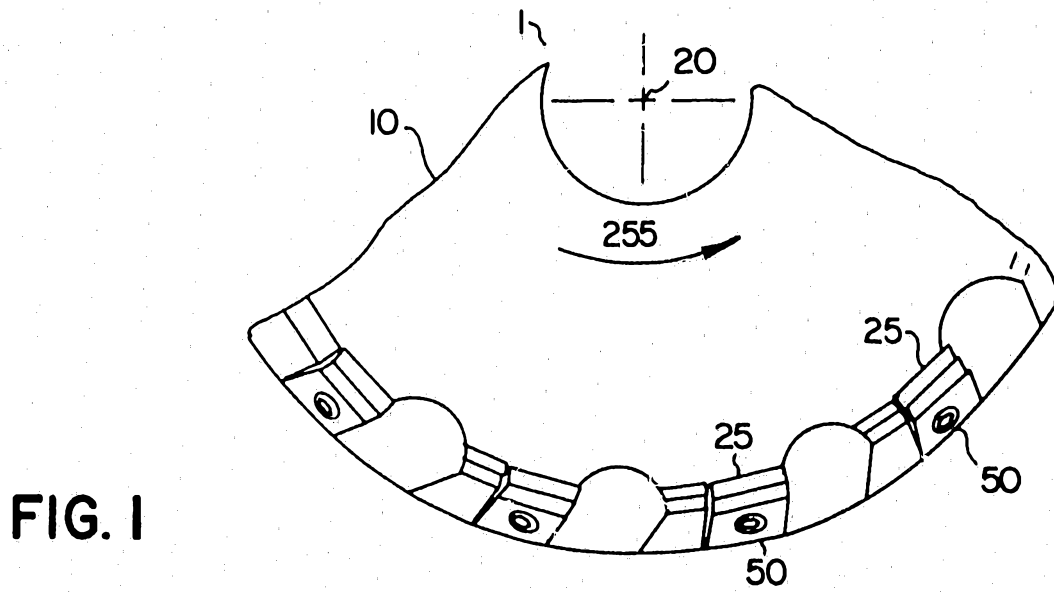

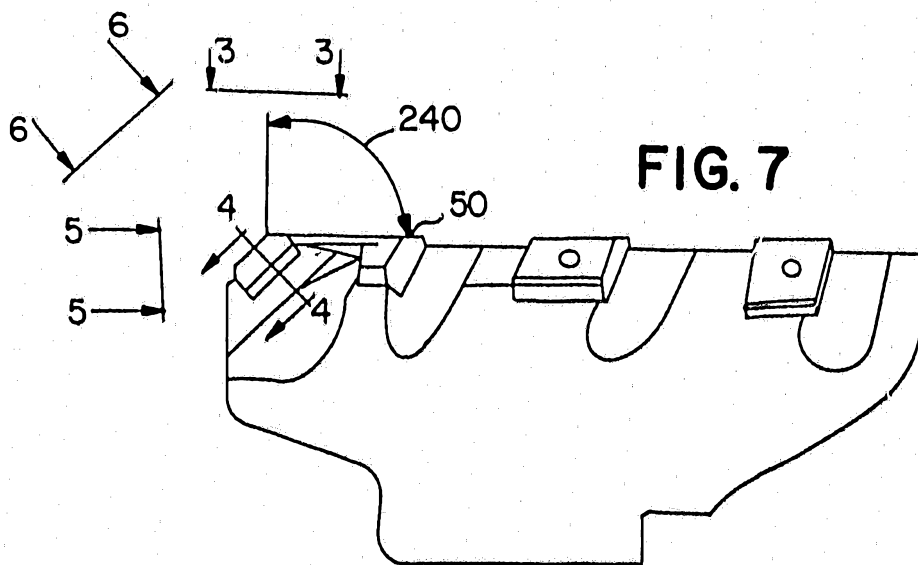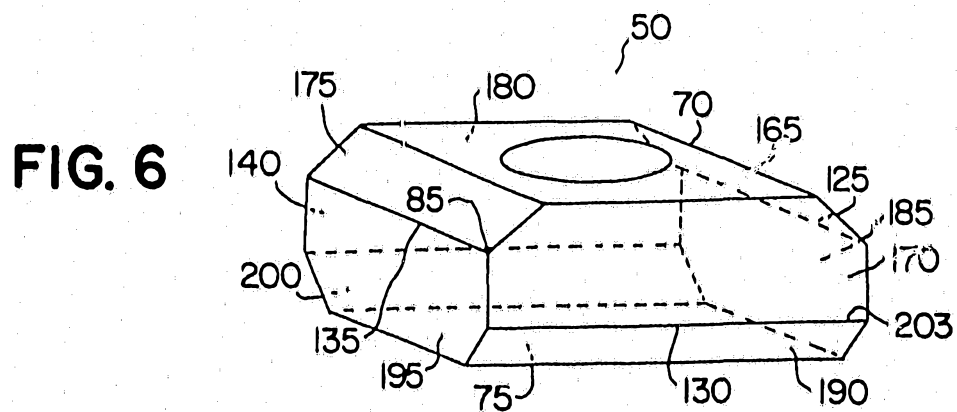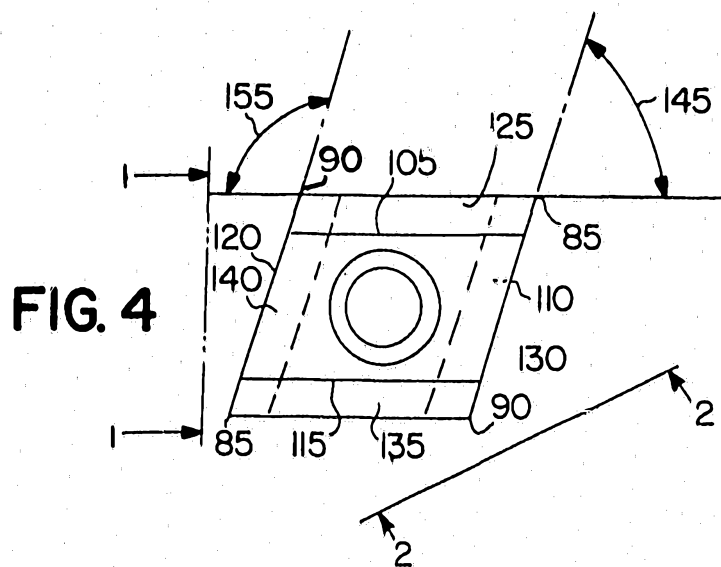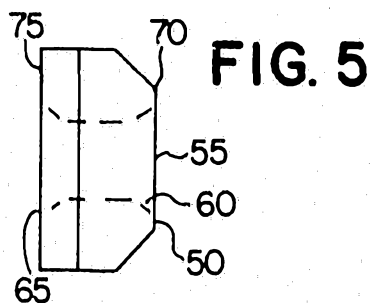

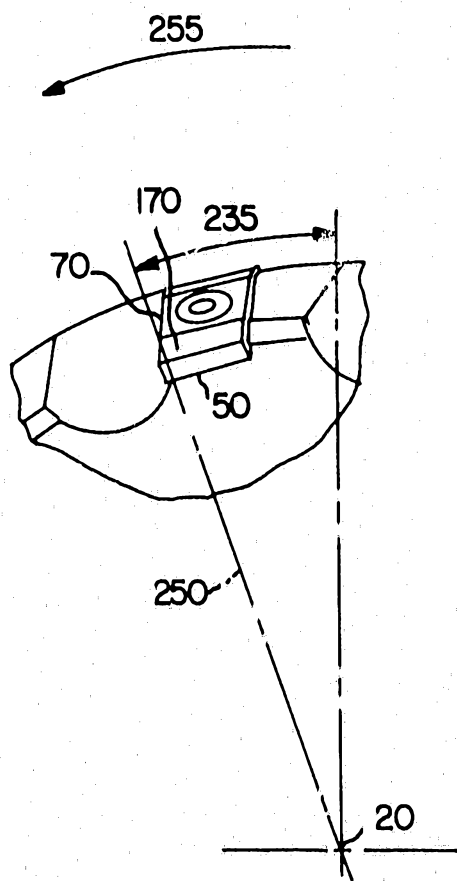


FIG. 8

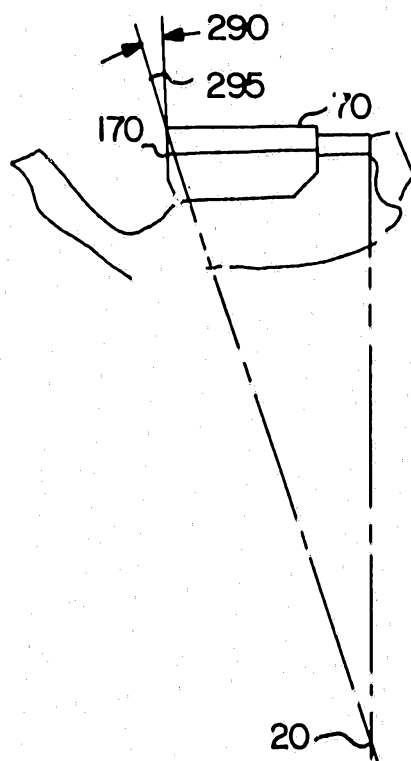


FIG. 9

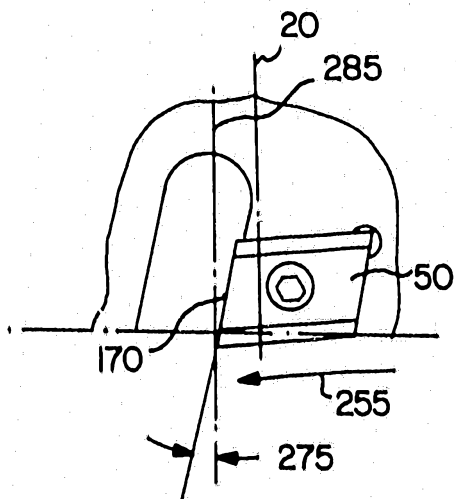


FIG. 10

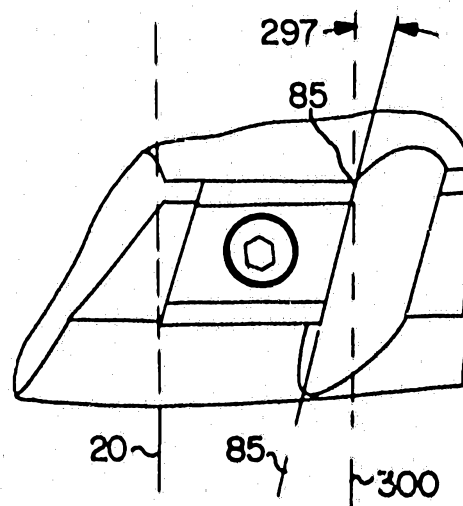


FIG. 11