

CONVENTION - COMPANY - PCT

65 62 25

P/00/008b
Section 29(1)
Regulation 3.1(2)

AUSTRALIA

PATENTS ACT 1990

NOTICE OF ENTITLEMENT

We, BRITISH TELECOMMUNICATIONS public limited company, of 151 Gower Street, London WC1E 6BA, England, being the applicant in respect of Application No. 24923/92, state the following:-

1. The person nominated for the grant of the patent has entitlement from the actual inventors as follows:


If a patent were granted to the actual inventors in respect of the invention the nominated person would be entitled to have the patent assigned to it.

2. The person nominated for the grant of the patent is the applicant of the basic application listed in the declaration under Article 8 of the PCT.

3. The basic application listed in the declaration under Article 8 of the PCT is the first application made in a Convention country in respect of the invention.

For and on behalf of

BRITISH TELECOMMUNICATIONS public limited company

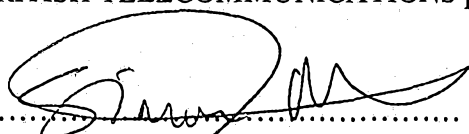

(Signature)

SIMON ROBERTS

Name:

PATENTS MANAGER

Title:

File: 16613.80

4 FEBRUARY 1994

(Date)

SHELSTON WATERS
55 CLARENCE STREET, SYDNEY, AUSTRALIA



AU9224923

(12) PATENT ABRIDGMENT (11) Document No. AU-B-24923/92
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 656225

- (54) Title
NON-LINEAR OPTICAL INTERFEROMETER WITH SATURATED AMPLIFIER
- International Patent Classification(s)
(51)^s **H04B 010/16 G02F 001/35**
- (21) Application No. : **24923/92** (22) Application Date : **28.08.92**
- (87) PCT Publication Number : **WO93/05592**
- (30) Priority Data
- (31) Number (32) Date (33) Country
9118843 03.09.91 GB UNITED KINGDOM
- (43) Publication Date : **05.04.93**
- (44) Publication Date of Accepted Application : **27.01.95**
- (71) Applicant(s)
BRITISH TELECOMMUNICATIONS PUBLIC LIMITED COMPANY
- (72) Inventor(s)
KEVIN SMITH; ELAINE JANE GREER
- (74) Attorney or Agent
SHELSTON WATERS , 55 Clarence Street, SYDNEY NSW 2000
- (57) Claim

1. An optical transmission system comprising an interferometer and a source of optical signals, the interferometer comprising a four-port optical coupler having first and second input ports and first and second output ports, an optical coupling means coupling the first and second output ports and including an optical non-linearity, and an optical fibre amplifier, the source of optical signals being coupled to the first input port of the interferometer, wherein the system is such that the optical signals saturate the optical fibre amplifier thereby suppressing any oscillatory output, and such that the power of the optical signals is sufficient to switch an input signal coupled to the first input port to the second input port.



AU9224923

TY (PCT)

<p>(51) International Patent Classification ⁵ : H04B 10/16, G02F 1/35</p>	<p>A1</p>	<p>(11) International Publication Number: WO 93/05592 (43) International Publication Date: 18 March 1993 (18.03.93)</p>
<p>(21) International Application Number: PCT/GB92/01579 (22) International Filing Date: 28 August 1992 (28.08.92) (30) Priority data: 9118843.3 3 September 1991 (03.09.91) GB (71) Applicant (for all designated States except US): BRITISH TELECOMMUNICATIONS PUBLIC LIMITED COMPANY [GB/GB]; 81 Newgate Street, London EC1A 7AJ (GB). (72) Inventors; and (75) Inventors/Applicants (for US only) : SMITH, Kevin [GB/GB]; 39 Bredfield Street, Woodbridge, Suffolk IP12 4NH (GB). GREER, Elaine, Jane [GB/GB]; 134 Henslow road, Ipswich, Suffolk IP4 5EJ (GB).</p>		<p>(74) Agent: PRATT, David, Martin; BT Group Legal Services, Intellectual Property Department, 13th Floor, 151 Gower Street, London WC1E 6BA (GB). (81) Designated States: AU, CA, GB, JP, KR, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, SE). Published With international search report.</p>



(54) Title: NON-LINEAR OPTICAL INTERFEROMETER WITH SATURATED AMPLIFIER



(57) Abstract

An optical transmission system includes: an interferometer (2) and a source of optical signals (24). The interferometer (2) which comprises a four-port optical coupler (4) having first and second input ports (6 and 8) and first and second output port (10 and 12), a silica optical fibre (14) coupling the first and second output ports (10 and 12) which exhibits the Kerr optical non-linearity, and an erbium fibre optical amplifier (18) situated asymmetrically between the output ports (10 and 12). The source of optical signals (24) is coupled to the first input port (6) of the interferometer (2). The system is operated in a regime in which the optical signals saturate the amplifier (18) thereby suppressing any oscillatory output, and their power is sufficient to switch an input signal coupled to the first input port (6) to the second input port (8). This provides pulse shaping and amplification characteristics which are relatively insensitive to the input power of the optical signals from the optical source (24).

NON-LINEAR OPTICAL INTERFEROMETER WITH SATURATED AMPLIFIER

This invention relates to an optical transmission system.

A known optical transmission system includes an
5 interferometer and a source of optical signals. The
interferometer comprises a four port optical coupler having
first and second input ports and first and second output
ports, an optical coupling means coupling the first and second
output ports and including an optical non-linearity, and an
10 optical amplifier. The source of optical signals is coupled
to the first input port of the interferometer.

An optical input signal coupled to an input port of
such an interferometer is split into two portions by the
optical coupler, which portions counter-propagate round the
15 coupling means, for example an optical fibre loop, to return
to, and recombine at, the coupler. For a symmetric coupler,
the optical path along the coupling means is the same for the
two portions. So, for a 50:50 coupler and a symmetrically
positioned amplifier, the portions recombine such that the
20 input signal emerges from the port to which it was originally
input. The input signal is said to be "reflected" by the
interferometer. For this reason, this configuration is often
described as a loop mirror, the "loop" being the optical
coupling means.

25 The specification of our co-pending International
patent application, publication number WO 88/02875, describes
an interferometer having a non-linear optical coupling means,
namely a silica optical fibre loop, in which the symmetry of
the two counter-propagating directions along the coupling
30 means is broken to provide a differential non-linear effect
(and so is called a non-linear optical loop mirror or NOLM).
This can be achieved in various ways. For example, a non-50:50
coupler can be used. In this case, the intensities of the
signal portions coupled into the ends of the waveguide loop
35 are not equal. When the input signal is of sufficient
intensity, the signal portions propagating in opposite
directions around the waveguide experience different

refractive indices. This results in the two counter-propagating signal portions experiencing different phase shifts, so that, when the signals return to the coupling means, they have an intensity-dependent relative phase shift. 5 The intensity dependence of the relative phase shift results in a device whose output at an input port is, as is well known, an oscillatory function of the intensity of the input signal. Any signal exiting the second input port (that is to say the port to which the input signal is not coupled) is said 10 to be "transmitted" by the interferometer.

A further way of breaking the symmetry of a NOLM is discussed in an article entitled "Nonlinear Amplifying Loop Mirror", by N E Fermann, F Haberl, M Hoffer, and H Hochreiter, Opt. Lett., 15, p. 752, (1990), in which an amplifier is placed 15 asymmetrically within the non-linear loop close to one of the output ports of the optical coupler, which in this case is a 50:50 coupler. Such an arrangement improves the performance of the conventional NOLM, in particular by better exploitation of the waveguide loop non-linearity, as it can be accessed by 20 a smaller input signal. The experiments described in the Fermann et al article were carried out at low signal powers, and at repetition rates which did not saturate the gain of the amplifier. It was there noted, however, that amplifier saturation leads to a reduction in the overall gain of the 25 device although, owing to the low pulse fluences, amplifier saturation in each individual pulse could still be neglected. Such a device is called a non-linear amplifying loop mirror (NALM).

Such NOLMs and NALMs can provide pulse shaping in 30 optical transmission systems, and in particular provide pedestal suppression. Thus, these devices have the potential for the suppression of inter-pulse radiation, and for filtering bits in long-distance, all-optical communications systems. Such applications are discussed in an article 35 entitled "Pulse Shaping, Compression, and Pedestal Suppression employing a Non-Linear Optical Loop Mirror" by K Smith, N J Doran, and P G J Wigley, Opt. Lett., 15, p. 1294 (1990).

A NALM could provide amplification in addition to such pulse shaping in an all-optical communications system. However, if the NALM has an oscillatory output, the intensity of the input signal must be relatively constant in order to
5 avoid reflection by the loop mirror.

One way of removing the oscillatory output of a NALM is disclosed in an article titled "All-Optical Pulse Compression Using Amplifying Sagnac Loop" by R A Betts, S J Frisken, C A Telford and P S Atherton in Electronics Letters Vol 27 No. 10
10 (9th May 1991). In their apparatus, the non-linear element in the loop is a semiconductor laser amplifier (SLA). This provides a saturating non-linearity which suppresses the oscillatory behaviour to provide a linear but rising response. A NALM which provides an approximately constant
15 output would be more attractive for use in optical communications systems.

The present invention provides an optical transmission system comprising an interferometer and a source of optical signals, the interferometer comprising a four-port optical
20 coupler having first and second input ports and first and second output ports, an optical coupling means coupling the first and second output ports and including an optical non-linearity, and an optical amplifier, the source of optical signals being coupled to the first input port of the
25 interferometer, wherein the system is such that the optical signals saturate the amplifier thereby suppressing any oscillatory output, and such that the power of the optical signals is sufficient to switch an input signal coupled to the first input port to the second input port.

30 This optical transmission system achieves an approximately constant output over a range of intensities of input signal, so that a range of intensities of input optical pulse will all be switched to the output of the interferometer. Moreover, the signals will be amplified to an
35 approximately constant intensity. The optical transmission system, therefore, provides amplification of the signal, as well as pulse shaping and noise filtering as described in the

- 4 -

article by Smith et al. This is of particular application to optical communications systems.

The optical source may be a pulsed laser, in which case
5 the optical transmission system of the present invention provides, at the second input port, noise-filtered optical pulses of substantially constant peak power, even for what may be variable peak power input pulses. The system of the invention could, therefore, be used as a repeater in a long
10 distance optical communications link, for example a submarine link.

The optical amplifier may comprise part of the coupling means, as described with reference to the NALMs referred to above, or may be coupled to the first input port to amplify
15 the input signals prior to their being switched. In this latter case, the interferometer will require the symmetry to be broken by, for example, a non-50:50 coupler as the amplifier no longer forms part of the coupling means. The interferometer may include an optical fibre loop, although
20 other forms of waveguide may be used, for example, a waveguide formed in a planar substrate such as lithium niobate.

In the case of an optical fibre interferometer, the optical amplifier is conveniently an optical fibre amplifier
25 spliced to the fibre forming the loop. Alternatively, a semiconductor laser amplifier may be employed.

The optical fibre of the loop may be made of material exhibiting the desired non-linearity, or a separate non-linear element may be included in the loop. For example, a
30 highly non-linear element may be incorporated to shorten the loop length, for example a semiconductor laser amplifier.

The invention also provides a method of using an interferometer which comprises a four-port optical coupler having first and second input ports and first and second
35 output ports, an optical coupling means coupling the first and second output ports and including an optical non-linearity, and an optical amplifier, the method comprising coupling a source of optical signals to the first input port of the interferometer in such a manner that the optical
40 signals



5 saturate the amplifier thereby suppressing any oscillatory output, and such that the power of the optical signals is sufficient to switch an input signal coupled to the first input port to the second input port.

Embodiments of the present invention will now be described, by way of example, with reference to the accompanying drawings, of which:

10 Figure 1 is a schematic representation of a non-linear optical loop mirror including an optical amplifier asymmetrically positioned within the waveguide loop;

Figure 2 is a schematic representation of a non-linear optical loop mirror having an amplifier coupled to an input port;

15 Figure 3 is a graph showing the power circulating in the loop for the non-linear optical mirror shown in Figure 1, and the resultant non-linear phase difference produced by various input peak powers;

20 Figure 4 is a graph showing the peak output power from the embodiment of Figure 1 as a function of peak input power for three pulse repetition rates;

Figure 5 is a graph of the non-linear phase of the embodiment of Figure 1 as a function of input peak power;

25 Figure 6 is a graph showing the gain of the embodiment of Figure 1 as a function of input peak power compared to the gain provided by the amplifier of the embodiment of Figure 1 alone;

Figure 7 is a graph showing the compression ratio provided by the embodiment of Figure 2;

30 Figures 8a and 8b are reproductions of an oscillogram showing the auto-correlation traces of input pulses with substantial inter-pulse radiation and pedestal free, compressed pulses amplified by the embodiment of Figure 1, respectively;

35 Figure 9 is a graph showing the auto-correlation width compression ratio as a function of input power; and

Figure 10 is a graph showing the gain verses average input power of the embodiment of Figure 1.



Referring to the drawings, Figure 1 shows an optical transmission system formed from a Sagnac loop interferometer 2 which comprises a four-port, fused-fibre optical coupler 4 having first and second input ports 6 and 8, and first and second output ports 10 and 12. The output ports 10 and 12 are optically coupled by an optical fibre loop 14. The interferometer 2 is conveniently formed from a single optical fibre 14, two portions of which are fused to form the coupler 4. In this embodiment, the loop 14 comprises an 8.8 km length of dispersion-shifted fibre with a dispersion zero around 1.55 μm obtained from Corning Corporation. The nature of this fibre ensures that pulse shaping due to propagation effects is negligible. Fibre polarisation controllers 16 are also included in the loop 14 to adjust the device to reflection mode at low powers.

A 30m long erbium doped fibre amplifier (EDFA) 18 is spliced to the output port 10 of the fibre coupler 4. An optical fibre coupler 20 is used to couple pump radiation for the EDFA 18 from a high-power MQW semiconductor laser 22 with a maximum pump power of the order of 50 mW at 1.48 μm . Under these conditions, the EDFA 18 has a small signal gain of 28 dB, and a time-average saturation power of 24 μW . For the above loop parameters, and an effective loop length of 7 km, the saturation power of the amplifier is of the order of 0.6mW.

An optical source 24 (an actively mode-locked semiconductor laser providing pulses at 1.545 μm of about 12 ps duration at a repetition rate of 2.5 GHz and a mean power of about 50 μW) is connected to the input port 6. The measured time-bandwidth products of the pulses produced by the laser 24 are at best 0.4.

It can be easily shown that, for the configuration of Figure 1, the square pulse transmissivity, T, is given by

$$T = P_t/P_i = G\{1 - 2\alpha(1 - \alpha) [1 + \cos [(1 - \alpha)G - \alpha]\phi]\} \quad (1)$$

where $\phi (= 2\pi n_2 P_i L / \lambda A_{eff})$ is the non-linear phase shift, P_t and P_i are the transmitted and input powers respectively, α is the

power coupling coefficient of the coupler, L is the loop length, λ is the wavelength, n_2 is the non-linear (Kerr) coefficient ($= 3.2 \times 10^{-20} \text{ m}^2/\text{W}$), A_{eff} is the effective fibre core area, and G is the power gain ($P_{\text{out}}/P_{\text{in}}$) of the amplifier. The
 5 switching power of the device, P_{Sa} , ($= \lambda A_{\text{eff}} / 2n_2 [(1 - \alpha)G - \alpha]$) is derived by setting the argument of the cosine function to π . The use of the amplifier 18 to break the loop symmetry provides low switching powers, together with absolute pedestal suppression for $\alpha = 0.5$. As an example, for $G_{\text{SS}} = 30$ dB, $\alpha =$
 10 0.5 and $L = 10$ km, P_{Sa} is of the order of 0.25 mW ($A_{\text{eff}} = 50 \mu\text{m}^2$, $\lambda = 1.55 \mu\text{m}$).

Considering now the effect of gain saturation of the configuration shown in Figure 1, and assuming a gain of the form $1 + G_{\text{SS}} / (1 + P/P_{\text{sat}})$ where G_{SS} is the small signal gain and
 15 P_{sat} is the input power at which the gain is compressed by 3 dB. This simple equation describes well all the measured EDFA characteristics for low to medium powers (< 1 mW average), and also remains physically accurate in the highly-saturated regime. The influence of the gain saturation is best
 20 described with reference to Figure 5, where the argument of the cosine function in equation (1), that is to say the non-linear phase difference between the counter-propagating waves, is plotted against P_i , for $G_{\text{SS}} = 30$ dB, $P_{\text{sat}} = 0.001 (= P_{\text{Sa}})$, $\alpha = 0.5$ and $n_2 L / \lambda A_{\text{eff}} = 1$.

25 At high input powers, the non-linear phase difference becomes clamped to $\pi G_{\text{SS}} P_{\text{sat}}$, which can also be expressed as $\pi P_{\text{sat}} / P_{\text{Sa}}$ since P_{Sa} is approximately equal to $1/G_{\text{SS}}$ for large G_{SS} . Therefore, by choosing $P_{\text{sat}} = P_{\text{Sa}}$ we limit the maximum non-linear phase difference to π .

30 The evolution of the non-linear phase is apparent in Figure 6, which shows the computed gain characteristics for sech^2 intensity profile pulses (dashed curve). For comparison, the fibre amplifier gain characteristics are also shown for the same values of G_{SS} and P_{sat} (full curve). At low
 35 input powers, the device is in reflecting mode, and hence the small signal gain is well suppressed. As the input power is increased, however, the device approaches a transmitting state, and the efficiency closely follows that of the EDFA 18

for $P_i > P_{s_1}$. It is expected that the varying response of the loop throughout the pulse gives rise to incomplete switching and pulse shaping. Although this is largely responsible for the small (2-3 dB) reduction in efficiency relative to the
5 EDFA 18 at high powers, the loop amplifier benefits from pulse compression and low-level light suppression.

In addition, since amplifier saturation gives rise to a non-linear phase difference which, over the power range of interest, is relatively constant, the pulse shaping
10 characteristics are fairly insensitive to the input level. This is one of the key aspects of the present invention, and is illustrated in Figure 7, where the compression ratio (τ_{out}/τ_{in}) is shown to vary only from 0.55 to 0.75 over five decades of input power. This is in stark contrast to the
15 complex pulse shaping previously observed for loop mirror configurations, where the input power can cycle through the sinusoidal output of such prior art NOLMs. Although not obvious for the range of input power in Figure 7, τ_{out}/τ_{in} tends to unity for low power (linear) operation.

20 Pulse durations are inferred from the second harmonic auto-correlation measurements. The auto-correlation shape of the transmitted pulses does not change significantly as a function of the input power, this being clearly illustrated in Figure 9, where the ratio of the input and output correlation
25 widths is plotted against the input power for average powers up to 3.5 mW (120 mW peak). It should be noted that the ratio of about 0.55 varies by less than 20% over a range of power of the order of $200 \times P_{s_1}$. The device gain follows the trend described in Figure 6, with a maximum of 17 dB occurring at an
30 average input power of 50 μ W (1.6 mW peak). The performance is well in keeping with that indicated by Figure 6, bearing in mind a 3 dB loss associated with the loop fibre 14 and a lower (28 dB) EDFA gain. It should also be noted that the measured time-bandwidth products of the filtered pulses are essentially
35 the same as the input.

A further clear demonstration of the intensity filtering properties is shown in Figures 8a and 8b. Here, the amplified, shortened (to 6 ps) and pedestal-free output

(Figure 8b) is shown for input pulses with substantial inter-pulse radiation (Figure 8a). This behaviour is observed over the total range of input power.

A further embodiment of the present invention is shown in Figure 2, in which the erbium amplifier 18 of Figure 1 is now coupled to the input port 6 of the interferometer 2. Like elements are given the same reference numerals as in Figure 1.

In this case, the symmetry of the NOLM is broken by use of a non-symmetric coupler 24 in place of the symmetric 50:50 coupler 4 of Figure 1, and the switching power P_{sb} is that of the standard loop mirror ($= P_{sa}$ with $G = 1$) divided by the gain of the amplifier 18. The ratio of the switching powers of the devices of Figure 1 and Figure 2 is, therefore, given by

$$P_{sb}/P_{sa} = [(1 - \alpha)G - \alpha]/[(1 - 2\alpha)G] \quad (2)$$

One can see that, for large G (which is generally true), equation (2) simplifies to $P_{sb}/P_{sa} = (1 - \alpha)/(1 - 2\alpha)$. For a value of $\alpha = 0.4$, the switching power advantage of the device of Figure 1 is at most a factor of 3. However, the real benefit of the device of Figure 1 is realised as α approaches 0.5. In this case, since the fibre amplifier 18 breaks the loop symmetry, low switching powers are maintained, together with absolute pedestal suppression for $\alpha = 0.5$. As an example, for $G_{ss} = 30$ dB, $\alpha = 0.5$ and $L = 10$ km, P_{sa} is of the order of 0.25 mW ($A_{eff} = 50 \mu\text{m}^2$, $\lambda = 1.55 \mu\text{m}$). For the device of Figure 2, however, as α approaches 0.5 the switching power rapidly goes to infinity.

Referring now to Figure 3, there is shown the power circulating in the two counter-propagating directions as a function of input peak power for the embodiment of Figure 1, where (a) is the power circulating anti-clockwise between the port 12 and the input of the erbium amplifier 18, and (b) is the power circulating in the loop in a clockwise direction from the erbium amplifier to the output port 12. The solid curve (c) of the graph of Figure 3 shows the non-linear phase shift of the pulses circulating in the two directions round the loop as a function of input peak power; and, as can be

clearly seen, the non-linear phase shift becomes substantially constant at higher peak powers.

Referring now to Figure 4, there is shown a graph of the peak output power from the port 8 as a function of peak input power (in mW) of an optical signal input at the input port 6 at three different pulse repetition rates f equal to 1, 2 and 3 kHz. In this case, for f equal to 1 kHz, P_{sat} equals five times the switching power, P_{sa} , of the interferometer of Figure 1. It can be seen that the output power is an oscillatory function of the input power. As the saturation power moves closer to the switching power with increasing frequency, the peak output power becomes more nearly a constant for peak input powers corresponding to P_{sa} . It can be seen then that, if the interferometer 2 is operated in an optical transmission system such that amplifier saturation occurs at approximately the power necessary to switch the input power to the second input port 8 at the first switching peak, then approximately constant output power is achieved above the switching power. This provides pulse shaping and amplification characteristics which are relatively insensitive to the input power of the optical signals from the optical source.

Referring now to Figure 10 there is shown a graph of the gain of the embodiment of Figure 1 as a function of the average input power of the optical signals from the optical source 24.

CLAIMS

1. An optical transmission system comprising an interferometer and a source of optical signals, the
5 interferometer comprising a four-port optical coupler having first and second input ports and first and second output ports, an optical coupling means coupling the first and second output ports and including an optical non-linearity, and an optical fibre amplifier, the source of
10 optical signals being coupled to the first input port of the interferometer, wherein the system is such that the optical signals saturate the optical fibre amplifier thereby suppressing any oscillatory output, and such that the power of the optical signals is sufficient to switch an
15 input signal coupled to the first input port to the second input port.
2. A system as claimed in claim 1, wherein the optical source is a pulsed laser.
3. A system as claimed in claim 2, wherein the system is
20 such as to provide at the second input port, noise-filtered optical pulses of substantially constant peak power.
4. A system as claimed in any one of claims 1 to 3, wherein the optical amplifier constitutes part of the coupling means.
- 25 5. A system as claimed in any one of claims 1 to 3, wherein the optical amplifier is coupled to the first input port upstream of the output ports, thereby to amplify the input signals prior to their being switched.
6. A system as claimed in claim 5, wherein the optical
30 coupler is a non-50:50 coupler.
7. A system as claimed in any one of claims 1 to 6, wherein the interferometer includes an optical fibre loop.



06 JULY 1993

- 12 -

8. A system as claimed in claim 7, wherein the optical fibre amplifier is spliced to the fibre forming the loop.
9. A system as claimed in anyone of claims 7 to 8, wherein the optical fibre is made of a material exhibiting the desired non-linearity.
10. A system as claimed in anyone of claims 7 to 8, wherein a separate non-linear element is included in the optical fibre loop.
11. A system as claimed in claim 10, wherein the separate non-linear element comprises a semiconductor laser amplifier.
12. A system as claimed in any one of claims 1 to 6, wherein the interferometer is a waveguide formed in a planar substrate such a lithium niobate.
13. A method of using an interferometer which comprises a four-port optical coupler having first and second input ports and first and second output ports, an optical coupling means coupling the first and second output ports and including an optical non-linearity, and an optical fibre amplifier, the method comprising coupling a source of optical signals to the first input port of the interferometer in such a manner that the optical signals saturate the optical fibre amplifier thereby suppressing any oscillatory output, and such that the power of the optical signals is sufficient to switch an input signal coupled to the first input port to the second input port.



1/5

24923/92

Fig. 1.


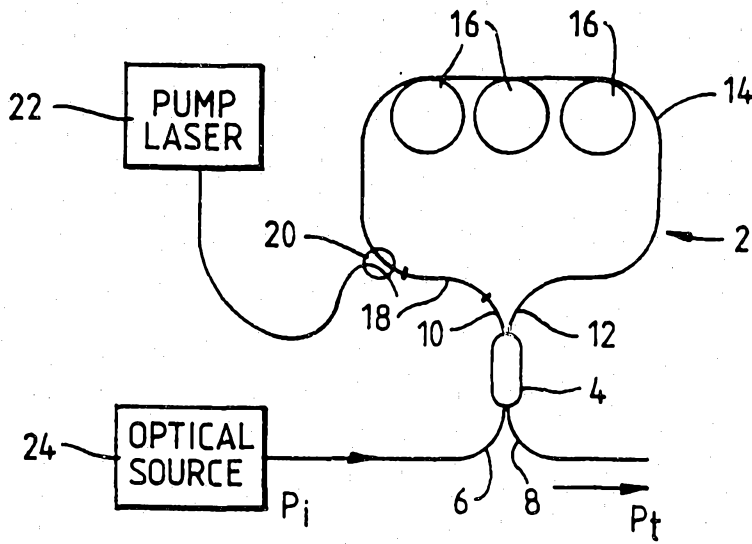


Fig. 2.

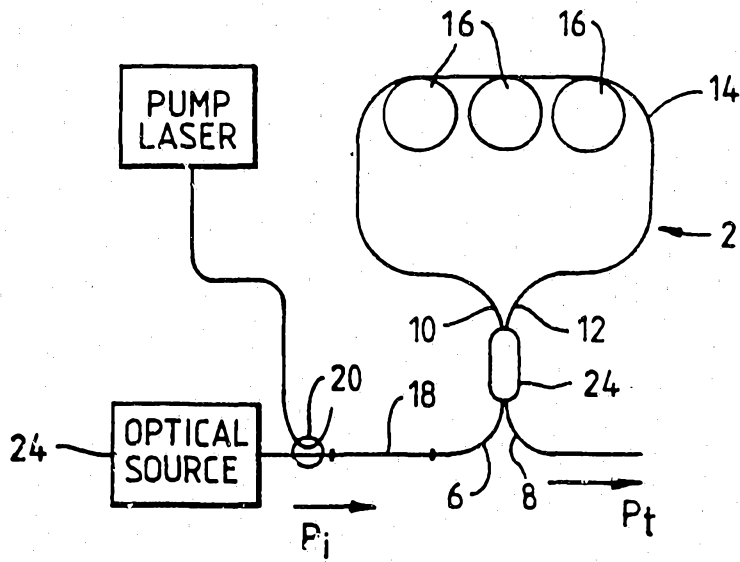

SUBSTITUTE SHEET

2/5

Fig. 3.


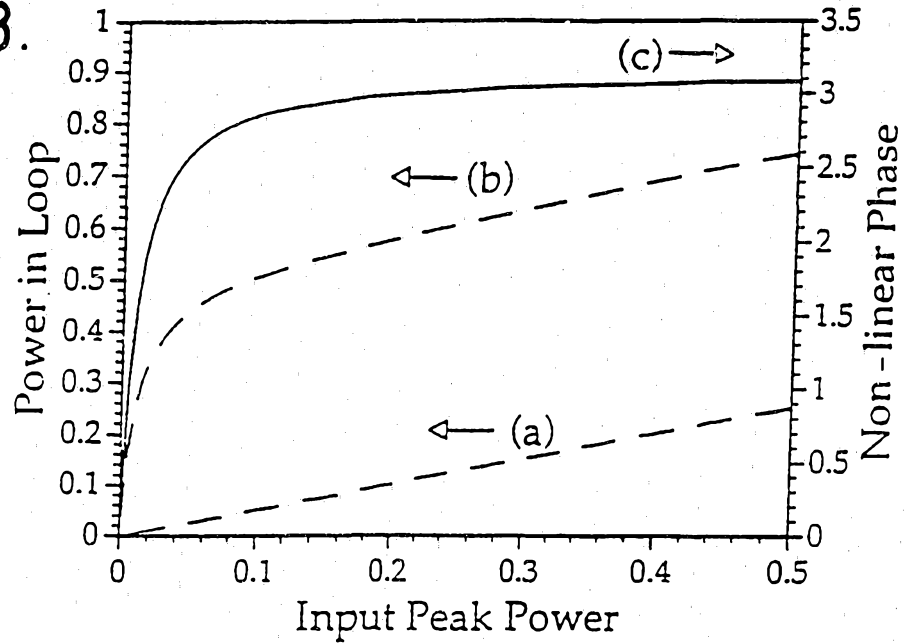


Fig. 4.

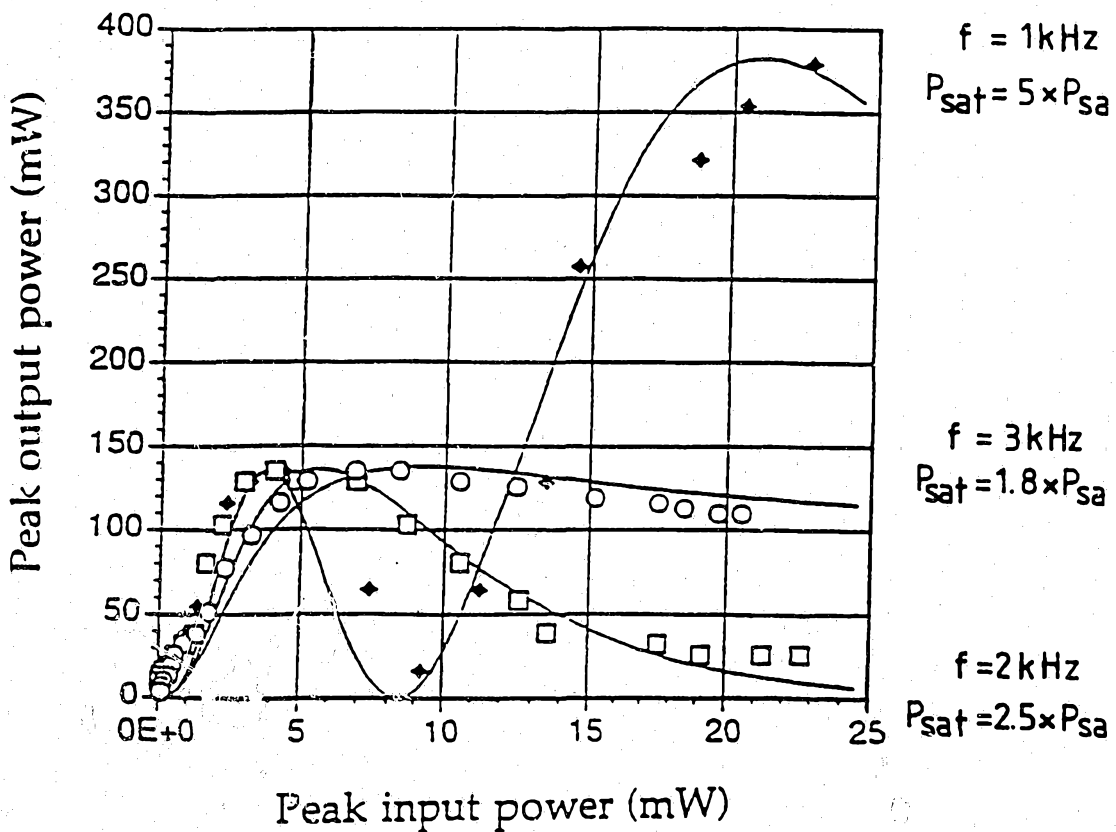

3/5

Fig.5.

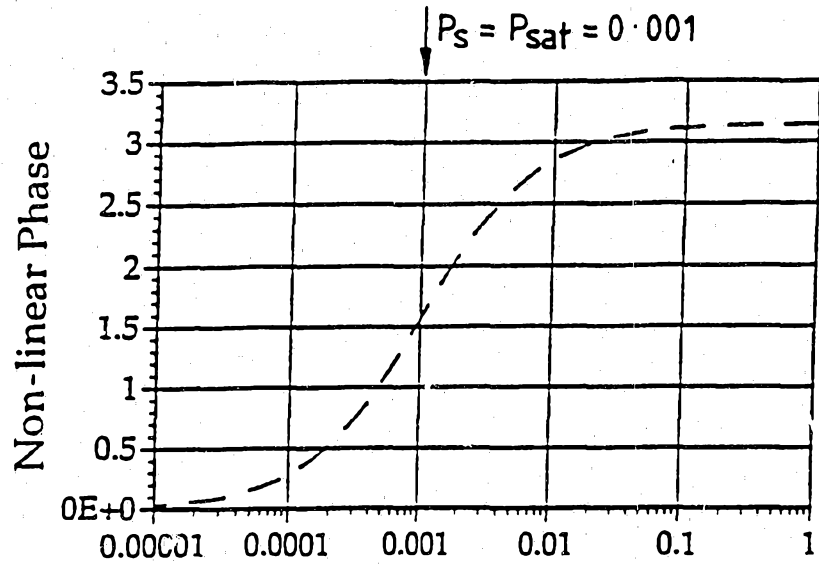


Fig.6.



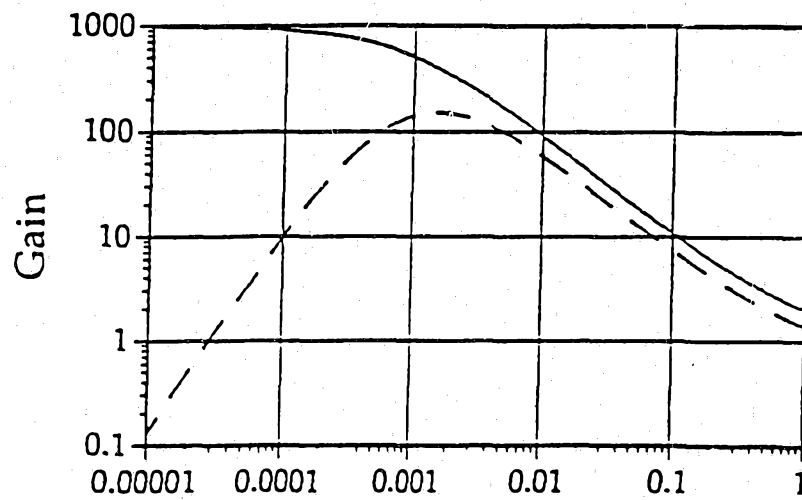


Fig.7.

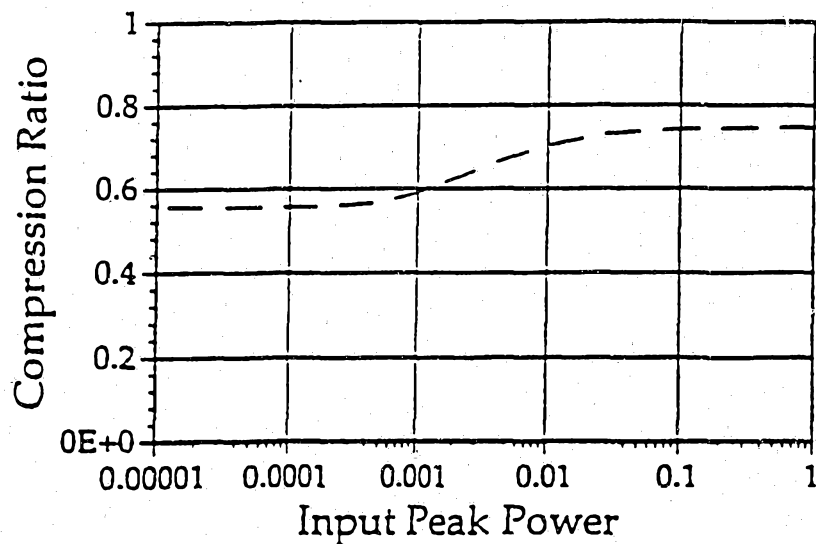


4/5

Fig. 8 (a).

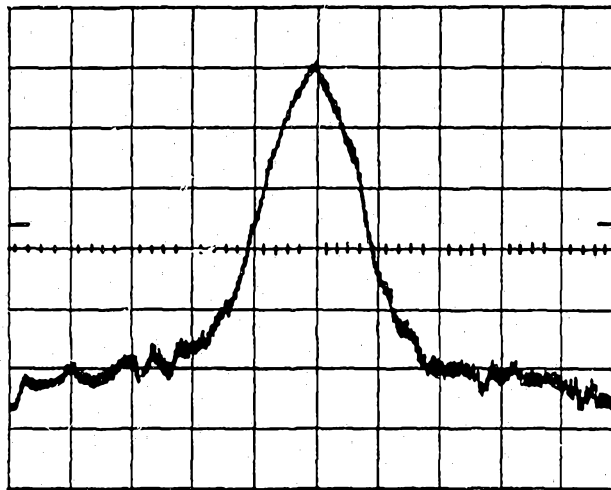

INPUT PULSE

Fig. 8 (b).

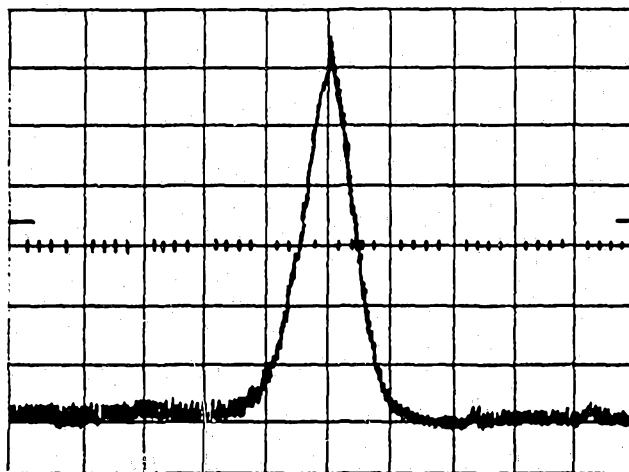

OUTPUT PULSE

5/5

Fig. 9.


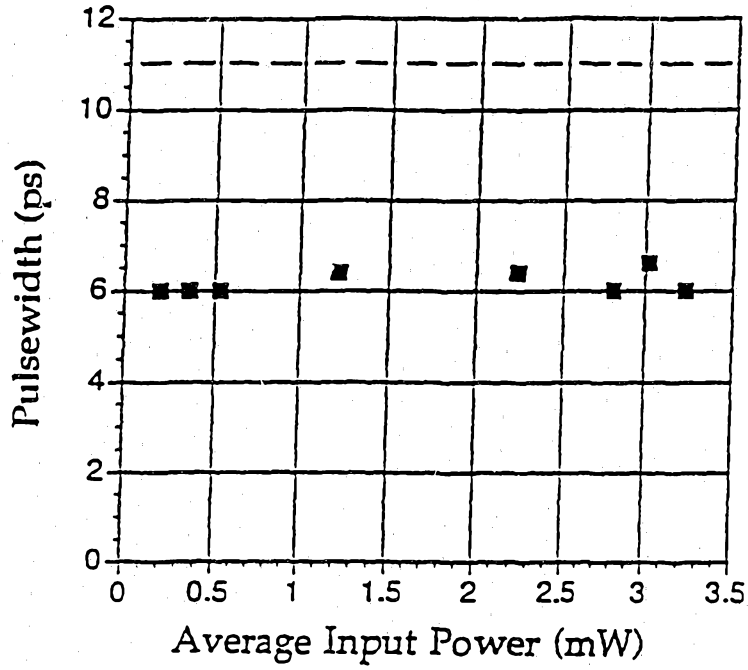


Fig. 10.

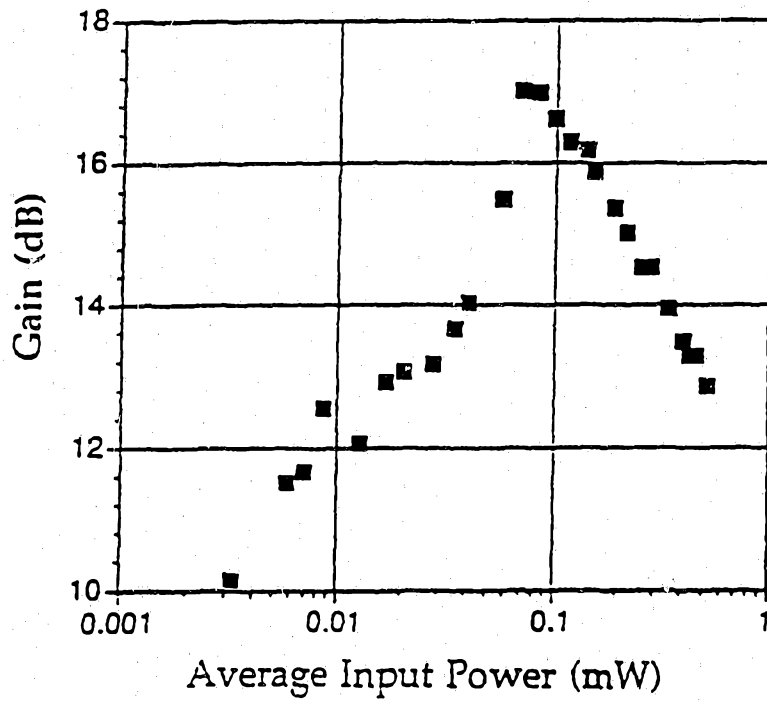

INTERNATIONAL SEARCH REPORT

PCT/GB 92/01579

International Application No

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all)⁶

According to International Patent Classification (IPC) or to both National Classification and IPC
 Int.Cl. 5 H04B10/16; G02F1/35

II. FIELDS SEARCHED

Minimum Documentation Searched⁷

Classification System	Classification Symbols
Int.Cl. 5	H04B ; G02F ; H01S


Documentation Searched other than Minimum Documentation
 to the Extent that such Documents are Included in the Fields Searched⁸

III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹

Category ⁹	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
Y	ELECTRONICS LETTERS. vol. 27, no. 10, 9 May 1991, STEVENAGE GB pages 858 - 860 BETTS ET AL 'All-optical pulse compression using amplifying Sagnac loop' cited in the application see page 858, right column, line 26 - line 27 see page 858, right column, line 32 - line 34 see page 859, left column, line 21 - line 25 see page 859, right column, line 14 - line 16 see page 859, right column, line 19 - line 21; figures 1-4	1-3, 7-11,14
A	---	4-6, 12, 13

- ⁹ Special categories of cited documents: ¹⁰
- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed
- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "A" document member of the same patent family

IV. CERTIFICATION

Date of the Actual Completion of the International Search 14 OCTOBER 1992	Date of Mailing of this International Search Report 0 2 NOV 1992
International Searching Authority EUROPEAN PATENT OFFICE	Signature of Authorized Officer WILLIAMS Michael 

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category ^o	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.
Y	<p>ELECTRONICS LETTERS. vol. 26, no. 21, 11 October 1990, STEVENAGE GB pages 1779 - 1781 RICHARDSON ET AL 'Very low threshold Sagnac switch incorporating an erbium doped fibre amplifier' see page 1779, right column, line 11 - line 20 see page 1780, left column, line 1 - line 3 see page 1780, left column, line 8 - line 9 see page 1780, left column, line 32 - line 35 see page 1780, left column, line 38 - line 40 see page 1780, left column, line 46 - line 47 see page 1781, left column, line 24 - line 25; figure 1</p>	<p>1-3, 7-11,14</p>
A	---	4-6,12, 13
A	<p>OPTICS LETTERS. vol. 15, no. 13, 1 July 1990, NEW YORK US pages 752 - 754 FERMANN ET AL 'Nonlinear amplifying loop mirror' cited in the application see page 752, left column, line 14 - line 21 see page 752, left column, line 37 - line 41; figure 1</p>	<p>1,6-8, 10,11</p>
A	<p>ELECTRONICS LETTERS. vol. 27, no. 1, 3 January 1991, STEVENAGE GB pages 75 - 76 JINNO ET AL 'Demonstration of laser-diode-pumped ultrafast all-optical switching in a nonlinear sagnac interferometer' see page 75, right column, line 13 - line 15 see page 75, right column, line 23 - line 24; figure 1</p>	<p>5</p>