



(51) International Patent Classification:
C03C 23/00 (2006.01)

(21) International Application Number:
PCT/US2020/013796

(22) International Filing Date:
16 January 2020 (16.01.2020)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/801,835 06 February 2019 (06.02.2019) US

(71) Applicant: **CORNING INCORPORATED** [US/US]; 1
Riverfront Plaza, Corning, New York 14831 (US).

(72) Inventors: **PHENES, Craig Marshall**; 109 Cavalcade Drive,
Danville, Kentucky 40422 (US). **SHARPS, Robert Wendell**; 5 West Sixth Street, Corning, New York 14830
(US). **SUSCH, Nicholas Leon**; 3375 Fieldstone Lane,
Painted Post, New York 14870 (US). **WEN, Lianggong**; 87
W William St., Corning, New York 14830 (US).

(74) Agent: **ABLE, Kevin M.**; Corning Incorporated, Intellectual
Property Department, SP-TI-03-1, Corning, New York
14831 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: METHODS OF PROCESSING A VISCOUS RIBBON

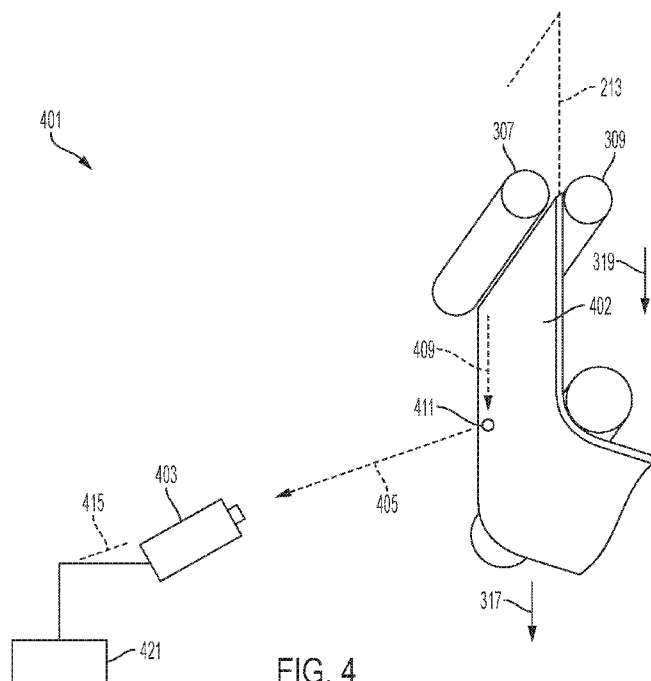


FIG. 4

(57) Abstract: Methods of processing a viscous ribbon include supplying a molten material from a supply vessel. Methods include forming the molten material into the viscous ribbon. The viscous ribbon travels along a travel path. Methods include receiving thermal light energy produced from the viscous ribbon. Methods include generating an image of the viscous ribbon from the thermal light energy. Methods include detecting a defect of the viscous ribbon from the image.

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*

METHODS OF PROCESSING A VISCOUS RIBBON

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of priority of U.S. Provisional Application Serial No. 62/801,835 filed on February 6, 2019 the contents of which are relied upon and incorporated herein by reference in their entirety as if fully set forth below.

FIELD

[0002] The present disclosure relates generally to methods for processing a viscous ribbon and, more particularly, to methods for processing a viscous ribbon with an image.

BACKGROUND

[0003] It is known to generate an image of a glass ribbon with a camera. The image is inspected to identify any defects within the glass ribbon. However, certain types of defects, for example, inclusions within the glass ribbon, have been difficult to identify with the camera. Further, it has been difficult to separate defects from artifacts within the image. As a result, inspection of the images generated by the camera may allow for some types of defects to be identified, while allowing other types of defects to go undetected.

SUMMARY

[0004] The following presents a simplified summary of the disclosure to provide a basic understanding of some embodiments described in the detailed description.

[0005] In accordance with some embodiments, methods of processing a viscous ribbon can comprise supplying a molten material from a supply vessel. Methods can comprise forming the molten material into the viscous ribbon, with the viscous ribbon traveling along a travel path. Methods can comprise receiving thermal light energy produced from the viscous ribbon. Methods can comprise generating an image of the viscous ribbon from the thermal light energy. Methods can comprise detecting a defect of the viscous ribbon from the image.

[0006] In some embodiments, the generating the image of the viscous ribbon comprises rectifying the image to a perspective that is orthogonal to a plane defined by the viscous ribbon.

[0007] In some embodiments, the detecting the defect of the viscous ribbon comprises determining if the defect is an inclusion within the viscous ribbon or a surface characteristic at a major surface of the viscous ribbon.

[0008] In some embodiments, the detecting the defect of the viscous ribbon comprises determining a position of the defect.

[0009] In some embodiments, methods can comprise tracking a first segment of the viscous ribbon, which comprises the defect.

[0010] In some embodiments, the tracking the first segment comprises measuring a first velocity of the viscous ribbon.

[0011] In some embodiments, methods can comprise removing the first segment from the viscous ribbon downstream from a portion of the viscous ribbon that is imaged.

[0012] In some embodiments, methods can comprise generating the thermal light energy from one or more of the viscous ribbon or the supply vessel.

[0013] In accordance with some embodiments, methods of processing a viscous ribbon can comprise supplying a molten material from a supply vessel. Methods can comprise forming the molten material into the viscous ribbon, the viscous ribbon traveling along a travel path. Methods can comprise receiving thermal light energy produced from the viscous ribbon. Methods can comprise generating an image of the viscous ribbon from the thermal light energy. Methods can comprise identifying an area of interest in the image. Methods can comprise determining if the area of interest comprises a defect of the viscous ribbon.

[0014] In some embodiments, the determining if the area of interest comprises the defect comprises measuring a first velocity of the viscous ribbon and a second velocity of the area of interest.

[0015] In some embodiments, if the first velocity is substantially equal to the second velocity, then classifying the area of interest as comprising the defect.

[0016] In some embodiments, the determining if the area of interest comprises the defect comprises identifying the area of interest in consecutive images of the viscous ribbon.

[0017] In some embodiments, if the area of interest is in consecutive images of the viscous ribbon, then classifying the area of interest as comprising the defect.

[0018] In some embodiments, methods can comprise separating the viscous ribbon downstream from a portion of the viscous ribbon that is imaged.

[0019] In some embodiments, methods can comprise generating the thermal light energy from one or more of the viscous ribbon or the supply vessel.

[0020] In some embodiments, the generating the image of the viscous ribbon comprises rectifying the image to a perspective that is orthogonal to a plane defined by the viscous ribbon.

[0021] In accordance with some embodiments, methods of processing a viscous ribbon can comprise moving the viscous ribbon along a travel path in a travel direction. Methods can comprise receiving thermal light energy produced from the viscous ribbon. Methods can comprise generating an image of the viscous ribbon from the thermal light energy. Methods can comprise detecting a defect of the viscous ribbon from the image. Methods can comprise removing from the viscous ribbon a first segment of the viscous ribbon that comprises the defect.

[0022] In some embodiments, methods can comprise tracking the first segment by measuring a first velocity of the viscous ribbon.

[0023] In some embodiments, the detecting the defect of the viscous ribbon comprises determining if the defect is an inclusion within the viscous ribbon or a surface characteristic at a major surface of the viscous ribbon.

[0024] In some embodiments, the detecting the defect of the viscous ribbon comprises determining a position of the defect.

[0025] Additional features and advantages of the embodiments disclosed herein will be set forth in the detailed description that follows, and in part will be clear to those skilled in the art from that description or recognized by practicing the embodiments described herein, including the detailed description which follows, the claims, as well as the appended drawings. It is to be understood that both the foregoing general description and the following detailed description present embodiments intended to provide an overview or framework for understanding the nature and character of the embodiments disclosed herein. The accompanying drawings are included to provide further understanding, and are incorporated into and constitute a part of this

specification. The drawings illustrate various embodiments of the disclosure, and together with the description explain the principles and operations thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

[0026] These and other features, embodiments and advantages are better understood when the following detailed description is read with reference to the accompanying drawings, in which:

[0027] **FIG. 1** schematically illustrates example embodiments of a glass forming apparatus in accordance with embodiments of the disclosure;

[0028] **FIG. 2** illustrates a perspective cross-sectional view of the glass forming apparatus along line **2-2** of **FIG. 1** in accordance with embodiments of the disclosure;

[0029] **FIG. 3** illustrates a schematic end view of example embodiments of a ribbon source in accordance with embodiments of the disclosure;

[0030] **FIG. 4** is a perspective view of example embodiments of a processing apparatus in accordance with embodiments of the disclosure;

[0031] **FIG. 5** is a front view of example embodiments of an image of a portion of a viscous ribbon generated by a camera in accordance with embodiments of the disclosure;

[0032] **FIG. 6** is a front view of example embodiments of a second image of the portion of the viscous ribbon generated by the camera in accordance with embodiments of the disclosure;

[0033] **FIG. 7** is a front view of example embodiments of the viscous ribbon comprising a plurality of segments in accordance with embodiments of the disclosure;

[0034] **FIG. 8** is a front view of example embodiments of the viscous ribbon comprising a segment comprising a defect being separated from the viscous ribbon in accordance with embodiments of the disclosure;

[0035] **FIG. 9** is a front view of example embodiments of the segment comprising the defect being removed from the viscous ribbon in accordance with embodiments of the disclosure; and

[0036] **FIG. 10** schematically illustrates example embodiments of methods of processing a viscous ribbon in accordance with embodiments of the disclosure.

DETAILED DESCRIPTION

[0037] Embodiments will now be described more fully hereinafter with reference to the accompanying drawings in which example embodiments are shown. Whenever possible, the same reference numerals are used throughout the drawings to refer to the same or like parts. However, this disclosure may be embodied in many different forms and should not be construed as limited to the embodiments set forth herein.

[0038] The present disclosure relates to a viscous ribbon processing apparatus and methods of processing a viscous ribbon. Methods and apparatus for processing a viscous ribbon will now be described by way of example embodiments for forming a viscous ribbon from a quantity of molten material. As schematically illustrated in **FIG. 1**, in some embodiments, an exemplary glass manufacturing apparatus **100** can comprise a glass melting and delivery apparatus **102** and a forming apparatus **101** comprising a supply vessel **140** designed to produce a ribbon **103** from a quantity of molten material **121**. In some embodiments, the ribbon **103** can comprise a central portion **152** positioned between opposite edge portions (e.g., edge beads) formed along a first outer edge **153** and a second outer edge **155** of the ribbon **103**, wherein a thickness of the edge beads can be greater than a thickness of the central portion. Additionally, in some embodiments, a separated glass ribbon **104** can be separated from the ribbon **103** along a separation path **151** by a glass separator **149** (e.g., scribe, score wheel, diamond tip, laser, etc.). In some embodiments, before or after separation of the separated glass ribbon **104** from the ribbon **103**, the edge beads formed along the first outer edge **153** and the second outer edge **155** can be removed to provide the central portion **152** as a high-quality separated glass ribbon **104** having a uniform thickness.

[0039] In some embodiments, the glass melting and delivery apparatus **102** can comprise a melting vessel **105** oriented to receive batch material **107** from a storage bin **109**. The batch material **107** can be introduced by a batch delivery device **111** powered by a motor **113**. In some embodiments, an optional controller **115** can be operated to activate the motor **113** to introduce a desired amount of batch material **107** into the melting vessel **105**, as indicated by arrow **117**. The melting vessel **105** can heat the batch material **107** to provide molten material **121**. In some embodiments, a melt probe **119** can be employed to measure a level of molten material **121** within a standpipe **123** and communicate the measured information to the controller **115** by way of a communication line **125**.

[0040] Additionally, in some embodiments, the glass melting and delivery apparatus **102** can comprise a first conditioning station comprising a fining vessel **127** located downstream from the melting vessel **105** and coupled to the melting vessel **105** by way of a first connecting conduit **129**. In some embodiments, molten material **121** can be gravity fed from the melting vessel **105** to the fining vessel **127** by way of the first connecting conduit **129**. For example, in some embodiments, gravity can drive the molten material **121** through an interior pathway of the first connecting conduit **129** from the melting vessel **105** to the fining vessel **127**. Additionally, in some embodiments, bubbles can be removed from the molten material **121** within the fining vessel **127** by various techniques.

[0041] In some embodiments, the glass melting and delivery apparatus **102** can further comprise a second conditioning station comprising a mixing chamber **131** that can be located downstream from the fining vessel **127**. The mixing chamber **131** can be employed to provide a homogenous composition of molten material **121**, thereby reducing or eliminating inhomogeneity that may otherwise exist within the molten material **121** exiting the fining vessel **127**. As shown, the fining vessel **127** can be coupled to the mixing chamber **131** by way of a second connecting conduit **135**. In some embodiments, molten material **121** can be gravity fed from the fining vessel **127** to the mixing chamber **131** by way of the second connecting conduit **135**. For example, in some embodiments, gravity can drive the molten material **121** through an interior pathway of the second connecting conduit **135** from the fining vessel **127** to the mixing chamber **131**.

[0042] Additionally, in some embodiments, the glass melting and delivery apparatus **102** can comprise a third conditioning station comprising a delivery vessel **133** that can be located downstream from the mixing chamber **131**. In some embodiments, the delivery vessel **133** can condition the molten material **121** to be fed into an inlet conduit **141**. For example, the delivery vessel **133** can function as an accumulator and/or flow controller to adjust and provide a consistent flow of molten material **121** to the inlet conduit **141**. As shown, the mixing chamber **131** can be coupled to the delivery vessel **133** by way of a third connecting conduit **137**. In some embodiments, molten material **121** can be gravity fed from the mixing chamber **131** to the delivery vessel **133** by way of the third connecting conduit **137**. For example, in some embodiments, gravity can drive the molten material **121** through an interior

pathway of the third connecting conduit **137** from the mixing chamber **131** to the delivery vessel **133**. As further illustrated, in some embodiments, a delivery pipe **139** can be positioned to deliver molten material **121** to forming apparatus **101**, for example the inlet conduit **141** of the supply vessel **140**.

[0043] Forming apparatus **101** can comprise various embodiments of supply vessels in accordance with embodiments of the disclosure, for example, forming apparatus **101** can comprise a supply vessel with a wedge for fusion drawing the ribbon, a supply vessel with a slot to slot draw the ribbon, or a supply vessel provided with press rolls to press roll the ribbon from the supply vessel. By way of illustration, the supply vessel **140** shown and disclosed below can be provided to fusion draw molten material **121** off a bottom edge, defined as a root **145**, of a forming wedge **209** to produce a ribbon of molten material **121** that can be drawn into the ribbon **103**. For example, in some embodiments, the molten material **121** can be delivered from the inlet conduit **141** to the supply vessel **140**. The molten material **121** can then be formed into the ribbon **103** based, in part on the structure of the supply vessel **140**. For example, as shown, the molten material **121** can be drawn off the bottom edge (e.g., root **145**) of the supply vessel **140** along a draw path extending in a draw direction **154** of the glass manufacturing apparatus **100**. In some embodiments, edge directors **163**, **164** can direct the molten material **121** off the supply vessel **140** and define, in part, a width “**W**” of the ribbon **103**. In some embodiments, the width “**W**” of the ribbon **103** extends between the first outer edge **153** of the ribbon **103** and the second outer edge **155** of the ribbon **103**.

[0044] In some embodiments, the width “**W**” of the ribbon **103**, which extends between the first outer edge **153** of the ribbon **103** and the second outer edge **155** of the ribbon **103**, can be greater than or equal to about 20 millimeters (mm), for example, greater than or equal to about 50 mm, for example, greater than or equal to about 100 mm, for example, greater than or equal to about 500 mm, for example, greater than or equal to about 1000 mm, for example, greater than or equal to about 2000 mm, for example, greater than or equal to about 3000 mm, for example, greater than or equal to about 4000 mm, although other widths less than or greater than the widths mentioned above can be provided in further embodiments. For example, in some embodiments, the width “**W**” of the ribbon **103** can be from about 20 mm to about 4000 mm, for example, from about 50 mm to about 4000 mm, for example, from about 100 mm to

about 4000 mm, for example, from about 500 mm to about 4000 mm, for example, from about 1000 mm to about 4000 mm, for example, from about 2000 mm to about 4000 mm, for example, from about 3000 mm to about 4000 mm, for example, from about 20 mm to about 3000 mm, for example, from about 50 mm to about 3000 mm, for example, from about 100 mm to about 3000 mm, for example, from about 500 mm to about 3000 mm, for example, from about 1000 mm to about 3000 mm, for example, from about 2000 mm to about 3000 mm, for example, from about 2000 mm to about 2500 mm, and all ranges and subranges therebetween.

[0045] **FIG. 2** shows a cross-sectional perspective view of the forming apparatus **101** (e.g., supply vessel **140**) along line **2-2** of **FIG. 1**. In some embodiments, the supply vessel **140** can comprise a trough **201** oriented to receive the molten material **121** from the inlet conduit **141**. For illustrative purposes, cross-hatching of the molten material **121** is removed from **FIG. 2** for clarity. The supply vessel **140** can further comprise the forming wedge **209** comprising a pair of downwardly inclined converging surface portions **207**, **208** extending between opposed ends **210**, **211** (See **FIG. 1**) of the forming wedge **209**. The pair of downwardly inclined converging surface portions **207**, **208** of the forming wedge **209** can converge along the draw direction **154** to intersect along the root **145** of the supply vessel **140**. A draw plane **213** of the glass manufacturing apparatus **100** can extend through the root **145** along the draw direction **154**. In some embodiments, the ribbon **103** can be drawn in the draw direction **154** along the draw plane **213**. As shown, the draw plane **213** can bisect the forming wedge **209** through the root **145** although, in some embodiments, the draw plane **213** can extend at other orientations relative to the root **145**.

[0046] Additionally, in some embodiments, the molten material **121** can flow in a direction **156** into and along the trough **201** of the supply vessel **140**. The molten material **121** can then overflow from the trough **201** by simultaneously flowing over corresponding weirs **203**, **204** and downward over the outer surfaces **205**, **206** of the corresponding weirs **203**, **204**. Respective streams of molten material **121** can then flow along the downwardly inclined converging surface portions **207**, **208** of the forming wedge **209** to be drawn off the root **145** of the supply vessel **140**, where the flows converge and fuse into the ribbon **103**. The ribbon **103** of molten material can then be drawn off the root **145** in the draw plane **213** along the draw direction **154**. In some embodiments, the ribbon **103** comprises one or more states of material based on

a vertical location of the ribbon **103**. For example, at one location, the ribbon **103** can comprise the viscous molten material **121**, such that the ribbon **103** comprises a viscous ribbon, and at another location, the ribbon **103** can comprise an amorphous solid in a glassy state (e.g., a glass ribbon).

[0047] The ribbon **103** comprises a first major surface **215** and a second major surface **216** facing opposite directions and defining a thickness “**T**” (e.g., average thickness) of the ribbon **103**. In some embodiments, the thickness “**T**” of the ribbon **103** can be less than or equal to about 2 millimeters (mm), less than or equal to about 1 millimeter, less than or equal to about 0.5 millimeters, for example, less than or equal to about 300 micrometers (μm), less than or equal to about 200 micrometers, or less than or equal to about 100 micrometers, although other thicknesses may be provided in further embodiments. For example, in some embodiments, the thickness “**T**” of the ribbon **103** can be from about 50 μm to about 750 μm , from about 100 μm to about 700 μm , from about 200 μm to about 600 μm , from about 300 μm to about 500 μm , from about 50 μm to about 500 μm , from about 50 μm to about 700 μm , from about 50 μm to about 600 μm , from about 50 μm to about 500 μm , from about 50 μm to about 400 μm , from about 50 μm to about 300 μm , from about 50 μm to about 200 μm , from about 50 μm to about 100 μm , including all ranges and subranges of thicknesses therebetween. In addition, the ribbon **103** can include a variety of compositions including, but not limited to, soda-lime glass, borosilicate glass, alumino-borosilicate glass, alkali-containing glass, or alkali-free glass.

[0048] In some embodiments, the glass separator **149** (see **FIG. 1**) can then separate a separated glass ribbon **104** from the ribbon **103** along the separation path **151** as the ribbon **103** is formed by the supply vessel **140**. As illustrated, in some embodiments, the separation path **151** can extend along the width “**W**” of the ribbon **103** between the first outer edge **153** and the second outer edge **155**. Additionally, in some embodiments, the separation path **151** can extend perpendicular to the draw direction **154** of the ribbon **103**. Moreover, in some embodiments, the draw direction **154** can define a direction along which the ribbon **103** can be drawn from the supply vessel **140**.

[0049] The separated glass ribbon can then be processed into a desired application, e.g., a display application. For example, the separated glass ribbon can be used in a wide range of display applications, including liquid crystal displays (LCDs),

electrophoretic displays (EPD), organic light emitting diode displays (OLEDs), plasma display panels (PDPs), and other electronic displays.

[0050] Referring to **FIG. 3**, it will be appreciated that the ribbon may be provided by one or more types of sources. **FIG. 3** illustrates a source of the ribbon, though, other sources may be provided in further embodiments. For example, in some embodiments, one source may comprise the supply vessel **140** illustrated and described relative to **FIGS. 1-2**. The supply vessel **140** may comprise the forming wedge **209** comprising the downwardly inclined converging surface portions **207**, **208** and the root **145**. The molten material **121** can be supplied from the supply vessel **140**, whereupon the molten material **121** can be formed into the ribbon **103**, with the ribbon **103** traveling along a travel path.

[0051] In some embodiments, another source of the ribbon may comprise a supply vessel **301** with a slot to slot draw the ribbon. For example, the supply vessel **301** may be hollow and can contain molten material. In some embodiments, an outlet tube **303** can be coupled to the supply vessel **301** and may define a passageway through which molten material **305** can exit the supply vessel **301**. For example, the molten material **305** can flow from the supply vessel **301** and through the outlet tube **303**, wherein the outlet tube **303** can comprise a slot (e.g., an opening, a hole, etc.) through which the molten material **305** can exit the outlet tube **303**. In some embodiments, the outlet tube **303** can be oriented along a direction of gravity, such that the molten material **305** can flow downwardly along the direction of gravity through the outlet tube **303**. The outlet tube **303** can be positioned above a pair of forming rolls **307**, **309**. The forming rolls **307**, **309** can be spaced apart from each other to form a gap between the forming rolls **307**, **309**. In some embodiments, the forming rolls **307**, **309** can rotate counter to each other. For example, in the orientation shown in **FIG. 3**, one forming roll **307** can rotate in a clockwise direction while the other forming roll **309** can rotate in a counter-clockwise direction.

[0052] In some embodiments, the molten material **305** may be delivered from the outlet tube **303** to a location between the forming rolls **307**, **309**. The molten material **305** can accumulate between the forming rolls **307**, **309**, whereupon the forming rolls **307**, **309** can rotate to flatten, thin, and smooth the stream of molten material **305** into a ribbon **311**. In this way, the forming rolls **307**, **309** can direct the molten material **305** from the outlet tube **303** and through the gap. The ribbon **311** can

exit the forming rolls **307**, **309** and may be delivered to a pair of pulling rolls **313**, **315**. The pulling rolls **313**, **315** can pull downwardly on the ribbon **311** and, in some embodiments, can generate a tension in the ribbon **311** to stabilize and/or stretch the ribbon **311**. In some embodiments, the pulling rolls **313**, **315** can rotate counter to each other. For example, in the orientation shown in **FIG. 3**, one pulling roll **313** can rotate in a clockwise direction while the other pulling roll **315** can rotate in a counter-clockwise direction. In some embodiments, the ribbon **311** can move along a travel path **317** in a travel direction **319**. In some embodiments, the ribbon **311** can comprise one or more states of material based on the vertical location of the ribbon **311**. For example, at one location (e.g., directly below the forming rolls **307**, **309**), the ribbon **311** can comprise the viscous molten material **305**, such that the ribbon **311** comprises a viscous ribbon. At another location (e.g., directly above the pulling rolls **313**, **315**), the ribbon **311** can comprise an amorphous solid in a glassy state.

[0053] Referring to **FIG. 4**, a processing apparatus **401** for processing a viscous ribbon **402** is illustrated. In some embodiments, the viscous ribbon **402** can comprise the ribbon **103** (e.g., illustrated in **FIGS. 1-2**) at a vertical location where the ribbon **103** comprises the viscous molten material **121** and is in a viscous state. Likewise, in some embodiments, the viscous ribbon **402** can comprise the ribbon **311** (e.g., illustrated in **FIG. 3**) at a vertical location where the ribbon **311** comprises the viscous molten material **305** and is in a viscous state. Due to relatively high temperature of the viscous ribbon **402**, the viscous ribbon **402** can generate and emit thermal light energy **405**. For example, a portion of the viscous ribbon **402** can be imaged by a camera **403**, wherein the portion of the viscous ribbon **402** that is imaged may comprise a temperature from about 1000° C to about 1500° C and may comprise a viscosity from about 1500 poise to about 2500 poise. In addition or in the alternative, in some embodiments, a portion of the emitted thermal light energy **405** can comprise thermal light energy **409** that may be generated from the supply vessel **140**, **301** (e.g., illustrated in **FIGS. 1-3**) and/or from the molten material **121**, **305**. For example, the supply vessel **140**, **301** may comprise a temperature from about 500° C to about 2000° C while the molten material **121**, **305** exiting the supply vessel **140**, **301** may comprise a temperature from about 1000° C to about 2000° C. Thermal light energy **409** can be emitted from the supply vessel **140**, **301** and/or from the molten material **121**, **305** and can propagate along the viscous ribbon **402** from the supply vessel **140**, **301**, with the

viscous ribbon **402** acting as a light guide. In some embodiments, the thermal light energy **409** propagating along the viscous ribbon **402** can impinge upon a defect **411** in the viscous ribbon **402**, whereupon the thermal light energy **409** can propagate outwardly from the viscous ribbon **402** and may be received by the camera **403**. In some embodiments, the emitted thermal light energy **405** can comprise one or more of the thermal light energy generated from the viscous ribbon **402** at the imaging location or the thermal light energy **409** that may be emitted from one or more of the supply vessel **140**, **301** or the molten material **121**, **305** that impinges upon the defect **411** in the viscous ribbon **402**.

[0054] In some embodiments, the processing apparatus **401** can comprise the camera **403** that may be positioned downstream from the supply vessel **140**, **301**. For example, the camera **403** can be positioned to image a portion of the viscous ribbon **402** that may be downstream from the supply vessel **140**, **301**. In some embodiments, to image the viscous ribbon **402**, the camera **403** can receive thermal light energy **405** from the viscous ribbon **402** and generate an image of a portion of the viscous ribbon **402** based on the received thermal light energy **405**. The camera **403** can comprise, for example, an infrared camera that is configured to detect infrared light and generate an image based on the detected infrared light. In some embodiments, based on the image generated by the camera **403**, the processing apparatus **401** can detect a defect that may be present in the viscous ribbon **402**.

[0055] In some embodiments, the camera **403** may be oriented in a direction that may be non-orthogonal to a plane (e.g., draw plane **213**) defined by the viscous ribbon **402** traveling along the travel path **317**. For example, in some embodiments, the camera **403** may be positioned below the viscous ribbon **402**. By being positioned below the viscous ribbon **402**, the camera **403** may be positioned below a plane that may be orthogonal to the plane defined by the viscous ribbon **402**. Such a position may be beneficial, for example, due to the camera **403** being exposed to a lower temperature when the camera is farther away from the supply vessel **140**, **301**. In some embodiments, the camera **403** can receive the thermal light energy **405** along an axis **415** that may intersect the viscous ribbon **402**. In some embodiments, the axis **415** may form a non-orthogonal angle (e.g., an angle that may be greater than or less than 90 degrees) relative to the viscous ribbon **402**. However, such a position of the camera **403** is not intended to be limiting, and in some embodiments, the camera **403** can be

positioned such that the axis **415** may be substantially orthogonal relative to the viscous ribbon **402**. In some embodiments, the camera **403** may comprise a high-resolution area scan camera that can record images of the viscous ribbon **402** at a rate of from about 2 frames per second to about 10 frames per second. In some embodiments, the camera **403** can generate images of the viscous ribbon **402**, with an image resolution of from about 8 megapixels to about 10 megapixels, or about 9 megapixels. In some embodiments, to reduce the likelihood of the camera **403** incurring damage due to the temperature to which the camera **403** is exposed, the camera **403** may be housed within a cooled jacket, such as a water-cooled jacket, a gas-cooled jacket, etc. The cooled jacket can reduce the likelihood of overheating of the camera **403** and limit damage to components of the camera **403**.

[0056] In some embodiments, the camera **403** can be coupled to a controller **421**. The controller **421** may comprise, for example, a multi-variable controller that can receive imaging data related to the thermal light energy **405** from the camera **403**. The controller **421** can comprise image processing software for evaluating generated images of the ribbon **402** and detecting defects within the ribbon **402** based on the generated image. In some embodiments, the controller **421** can comprise a programmable logic controller that can determine one or more characteristics of the viscous ribbon **402**, such as a velocity of the viscous ribbon **402** moving along the travel direction **319**, size of the viscous ribbon **402**, defects within the viscous ribbon **402**, a position of any defects within the viscous ribbon **402**, size of the defects, etc. In some embodiments, the controller **421** comprises a memory for storing information related to the viscous ribbon **402**, such as frequency of defects over a given time period, types of defects (e.g., inclusions, fault-lines, etc.), etc. In some embodiments, the controller **421** can be coupled to a display, such that the information related to the viscous ribbon **402** can be displayed and may be viewable by a user.

[0057] Referring to **FIG. 5**, an image **501** of the viscous ribbon **402** can be generated by the camera **403**. In some embodiments, the camera **403** can initially receive the thermal light energy from the viscous ribbon **402**. The thermal light energy emitted from the viscous ribbon **402** may be at a higher intensity or brightness than thermal light energy from the surrounding environment. As such, the area of the image **501** corresponding to a higher intensity or brightness may be indicative of the viscous ribbon **402**, while adjacent areas that are at a lower intensity or brightness may be

indicative of the surrounding environment. In some embodiments (e.g., as illustrated in **FIG. 4**), when the camera **403** is oriented at a direction that is non-orthogonal to the plane defined by the viscous ribbon **402**, an initial image of the viscous ribbon **402** may be from a perspective that may be non-orthogonal to the plane defined by the viscous ribbon **402**, wherein the axis **415** forms a non-orthogonal angle relative to the viscous ribbon **402**. In some embodiments, it may be beneficial to rectify the initial image from the perspective that is non-orthogonal to the plane to a perspective that is orthogonal to the plane. These benefits may comprise, for example, ease with which dimensions of the viscous ribbon **402** can be obtained, such as a dimension of the viscous ribbon **402**, a dimension of any defects within the viscous ribbon **402**, a location of any defects relative to an edge of the viscous ribbon **402**, etc. As such, methods of processing the viscous ribbon **402** can comprise rectifying the image **501** to a perspective that may be orthogonal to the plane defined by the viscous ribbon **402** traveling along the travel path **317**.

[0058] In some embodiments, to rectify the image **501** to a perspective that is orthogonal to the plane defined by the viscous ribbon **402**, a calibration target may initially be positioned in place of the viscous ribbon **402** prior to the viscous ribbon **402** being formed (e.g., such as when the source is not in operation, for example), or the calibration target may initially be positioned in front of the viscous ribbon **402** between the camera **403** and the viscous ribbon **402**. The calibration target can have known dimensions (e.g., length and width) and may be positioned at a known distance and angle from the camera **403**. The camera **403** can generate an initial image of the calibration target from the perspective that may be non-orthogonal to a plane defined by the calibration target. Based on the known dimensions of the calibration target and the known distance and angle between the calibration target and the camera **403**, the initial image of the calibration target can be rectified to the perspective that may be orthogonal to the plane defined by the calibration target. The rectification of the initial image of the calibration target may comprise rotation and scaling of the initial image. In this way, the degree to which the initial image may be rotated from the non-orthogonal perspective to the orthogonal perspective and a proper scaling of the image can be determined. This degree of rotation and scaling can thereafter be applied to the initial image of the viscous ribbon **402** that may be generated from the camera **403**,

such that the image of the viscous ribbon **402** can be rectified to the perspective that may be orthogonal to the plane (e.g., as illustrated in **FIG. 5**).

[0059] After rectifying the image, methods of processing the viscous ribbon **402** can comprise identifying one or more areas of interest **503**, **505**, **507**, **509** in the image **501**. For example, the image **501** may be generated based on the thermal light energy **405** received from the viscous ribbon **402**. In some embodiments, the thermal light energy **405** received from a portion **511** of the viscous ribbon **402** that does not comprise the area of interest **503** may be at a first intensity. The thermal light energy **405** received from the area of interest **503**, **505**, **507**, **509** may be at a second intensity that may be greater than the first intensity. In some embodiments, the disparity between the first intensity and the second intensity may be due, in part, to thermal light energy **405** impinging upon and/or reflecting from the area of interest **503**, **505**, **507**, **509**. As such, the thermal light energy **405** that has impinged upon and/or reflected from the area of interest **503**, **505**, **507**, **509** may be at a higher intensity (e.g., the second intensity) than the thermal light energy **405** received from other portions (e.g., the portion **511**) of the viscous ribbon **402** that may not comprise areas of interest. In some embodiments, the area of interest **503**, **505**, **507**, **509** may be represented within the image **501** as a brighter area or region while the other portions (e.g., portion **511**) of the viscous ribbon **402** that do not comprise an area of interest may be represented as a less bright area or region. In some embodiments, identifying one or more areas of interest **503**, **505**, **507**, **509** in the image **501** can comprise recognizing areas within the image **501** that area at a higher intensity than surrounding areas, which are at a lower intensity, and then classifying these higher intensity areas as the area(s) of interest **503**, **505**, **507**, **509**.

[0060] In some embodiments, the viscous ribbon **402** can comprise a plurality of areas of interest, such as a first area of interest **503**, a second area of interest **505**, a third area of interest **507**, and a fourth area of interest **509**. In some embodiments, the area of interest **503**, **505**, **507**, **509**, may comprise a defect within the viscous ribbon **402**, such as an inclusion or a surface characteristic. An inclusion may occur when gas or an unwanted material is present within the viscous ribbon **402**. A surface characteristic may comprise, for example, a scratch on one or more of the first major surface or the second major surface of the viscous ribbon **402**, a crack within the viscous ribbon **402**, other types of fault lines on or within the viscous ribbon **402**, etc. The area

of interest **503**, **505**, **507**, **509** may not be limited to comprising a defect, however, and in some embodiments, the area of interest **503**, **505**, **507**, **509** may comprise an artifact, which may be representative of a false-positive in the image **501**. An artifact differs from a defect in that an artifact may not be representative of an imperfection of the viscous ribbon **402** and, as such, may not be an inclusion, fault-line, crack, scratch, etc. Rather, an artifact represents a false-positive within the image **501**, such as by appearing to potentially be a defect, while not actually being a defect. An artifact may comprise, for example, a reflection of hardware equipment near the camera **403**, a particle (e.g., dust, moisture, etc.) in the air or on a lens of the camera **403**, aberrations in the imaging process, etc.

[0061] Referring to **FIG. 6**, a second image **601** of the viscous ribbon **402** can be generated, wherein the second image **601** may be representative of the viscous ribbon **402** after a period of time has passed from when the image **501** of the viscous ribbon **402** in **FIG. 5** was generated by the camera **403**. For example, the viscous ribbon **402** can move in the travel direction **319**, which may be downward in some embodiments. An upper boundary **603** (e.g., illustrated with a dashed line in **FIG. 6**) may be representative of an upper boundary of the image **501** in **FIG. 5**, wherein the upper boundary **603** has moved downwardly as the viscous ribbon **402** moves along the travel direction **319**. As illustrated in **FIG. 6**, the upper boundary **603** and some of the areas of interest (e.g., the first area of interest **503** and the third area of interest **507**) have moved a first distance **604** downwardly along the travel direction **319** relative to **FIG. 5** as the viscous ribbon **402** moves along the travel direction **319**. In some embodiments, the second image **601** can represent a consecutive image of the viscous ribbon **402** after the image **501**. For example, by representing a consecutive image, no intervening images of the viscous ribbon **402** between the image **501** and the second image **601** may have been generated, such that following the generated image **501** of the viscous ribbon **402**, the next generated image of the viscous ribbon **402** may comprise the second image **601**. In other embodiments, however, the second image **601** may not represent a consecutive image, such that one or more intervening images of the viscous ribbon **402** may be generated between the image **501** and the second image **601**.

[0062] In some embodiments, once the area of interest **503**, **505**, **507**, **509** has been identified, methods of processing the viscous ribbon **402** can comprise

determining if the area of interest comprises a defect **605**, **607** of the viscous ribbon **402**. For example, the determining if the area of interest **503**, **505**, **507**, **509** comprises the defect **605**, **607** can comprise measuring a first velocity of the viscous ribbon **402** and a second velocity of the area of interest **503**, **505**, **507**, **509**. In some embodiments, the first velocity of the viscous ribbon **402** may already be known, while in other embodiments, the first velocity of the viscous ribbon **402** can be measured (e.g., such as by measuring the distance that the upper boundary **603** has moved from the image **501** to the second image **601**). For example, measuring the first velocity of the viscous ribbon **402** can comprise determining the first distance **604** that the viscous ribbon **402** has moved between a first position (e.g., illustrated in **FIG. 5**) and a second position (e.g., illustrated in **FIG. 6**). The first distance **604** can then be divided by a period of time, such as, for example, the amount of time that has elapsed between when the viscous ribbon **402** is in the first position and the second position. The result of dividing the first distance **604** by the amount of time that has elapsed can yield the first velocity of the viscous ribbon **402**.

[0063] In some embodiments, measuring the second velocity of the area of interest **503**, **505**, **507**, **509** can comprise dividing a second distance that the area of interest **503**, **505**, **507**, **509** has moved between the first position (e.g., illustrated in **FIG. 5**) and the second position (e.g., illustrated in **FIG. 6**) over the period of time. For example, the first area of interest **503** can travel a first distance between the image **501** and the second image **601**. Likewise, the second area of interest **505** can travel a second distance between the image **501** and the second image **601**. The third area of interest **507** can travel a third distance between the image **501** and the second image **601**. The fourth area of interest **509** can travel a fourth distance between the image **501** and the second image **601**. These distances (e.g., the first distance of the first area of interest **503**, the second distance of the second area of interest **505**, the third distance of the third area of interest **507**, and the fourth distance of the fourth area of interest **509**) can be divided by the amount of time that has elapsed between when the viscous ribbon **402** is in the first position (e.g., illustrated in **FIG. 5**) and the second position (e.g., illustrated in **FIG. 6**) to obtain a second velocity of each of the first area of interest **503**, the second area of interest **505**, the third area of interest **507**, and the fourth area of interest **509**. If the first velocity (e.g., of the viscous ribbon **402**) is substantially equal to the second velocity (e.g., of the first area of interest **503** and the third area of interest

507), then the area of interest 503 may be classified as comprising the defect 605, 607. For example, the viscous ribbon 402 can move at the first velocity along the travel path 317 in the travel direction 319. If the viscous ribbon 402 comprises a defect, then the defect may likewise move with the viscous ribbon 402 along the travel path 317 in the travel direction 319. In some embodiments, if the viscous ribbon 402 and the area of interest 503 are moving at substantially the same velocity (e.g., wherein the first velocity is substantially equal to the second velocity), then it may be likely that the area of interest 503 comprises a defect.

[0064] In some embodiments, the area of interest (e.g., the second area of interest 505 and the fourth area of interest 509) may not comprise a defect of the viscous ribbon 402, but, rather, the area of interest (e.g., the second area of interest 505 and the fourth area of interest 509) may comprise an artifact 609. In some embodiments, to differentiate between a defect and an artifact, after measuring the first velocity of the viscous ribbon 402 and the second velocity of the area of interest 503, 505, 507, 509, the first velocity and the second velocity can be compared. For example, if the second velocity is less than the first velocity, then the area of interest 503, 505, 507, 509 may not comprise a defect. Rather, in some embodiments, if the second velocity is close to zero such that the area of interest 503, 505, 507, 509 does not move with the viscous ribbon 402 along the travel path 317 in the travel direction 319, then the area of interest 503, 505, 507, 509 may be classified as an artifact. For example, the fourth area of interest 509 has not moved with the viscous ribbon 402 when comparing the image 501 and the second image 601, such that a distance traveled by the fourth area of interest 509 may be zero. Therefore, the second velocity of the fourth area of interest 509 may likewise be zero. In some embodiments, due to the fourth area of interest 509 comprising the second velocity (e.g., zero) that may be less than the first velocity, then the fourth area of interest 509 can comprise an artifact 609. In contrast, the first area of interest 503 and the second area of interest 507 are illustrated as having moved between the first image 501 and the second image 601, such that the second velocity of the first area of interest 503 and the second area of interest 507 may be greater than zero.

[0065] In some embodiments, if the area of interest (e.g., the second area of interest 505) is present in the image 501, but subsequently disappears and/or is not present in the following images, then the area of interest (e.g., the second area of interest

505) may comprise an artifact. For example, the determining if the area of interest comprises the defect can comprise identifying the area of interest 503, 505, 507, 509 in consecutive images of the viscous ribbon 402. For example, the second area of interest 505 may be present in the image 501 of FIG. 5, but the second area of interest 505 may not be present in the second image 601 of FIG. 6. Due to the second area of interest 505 not appearing in a subsequent, consecutive image of the viscous ribbon 402 (e.g., in the second image 601), then the second area of interest 505 may be classified as an artifact. As such, in some embodiments, if the area of interest is in consecutive images of the viscous ribbon 402, then the area of interest may be classified as comprising a defect provided that the second velocity of the area of interest may be substantially equal to the first velocity of the viscous ribbon 402. However, if the area of interest 503, 505, 507, 509 does not appear in consecutive images of the viscous ribbon 402, then the area of interest (e.g., the second area of interest 505) may not be classified as a defect, but, rather, may be classified as an artifact.

[0066] In some embodiments, after an area of interest has been determined to comprise a defect, the detecting the defect of the viscous ribbon 402 can comprise determining if the defect comprises an inclusion within the viscous ribbon 402 or a surface characteristic at a major surface of the viscous ribbon 402. In some embodiments, different types of defects can be found within the viscous ribbon 402, for example, inclusions or surface characteristics. An inclusion may comprise gas or an unwanted material that may be present within the viscous ribbon 402. In some embodiments, an inclusion may comprise a bubble formed within the viscous ribbon 402. In some embodiments, a surface characteristic may comprise a scratch on the major surface of the viscous ribbon, a crack within the viscous ribbon 402, other types of fault lines on or within the viscous ribbon 402, etc.

[0067] Determining whether the first defect 605 comprises an inclusion or a surface characteristic can comprise measuring the first defect 605 to obtain a first dimension 615 of the first defect 605 in a first direction 617 that may be parallel to the travel direction 319 of the viscous ribbon 402 and a second dimension 619 of the first defect 605 in a second direction 621 that may be orthogonal to the travel direction 319. In some embodiments, if the first dimension 615 and the second dimension 619 are less than a preset dimension, then the defect (e.g., the first defect 605) can be classified as comprising an inclusion. For example, in some embodiments, the preset dimension can

be about 10 millimeters (mm). As such, if the first dimension **615** of the first defect **605** is less than about 10 mm, and if the second dimension **619** of the first defect **605** is less than about 10 mm, then the first defect **605** may comprise an inclusion. In some embodiments, the defect (e.g., the second defect **607**) can comprise a surface characteristic. For example, determining whether the second defect **607** comprises an inclusion or a surface characteristic can comprise measuring the second defect **607** to obtain a first dimension **625** of the second defect **607** in a first direction **627** that may be parallel to the travel direction **319** of the viscous ribbon **402** and a second dimension **629** of the second defect **607** in a second direction **631** that may be orthogonal to the travel direction **319**. In some embodiments, if the first dimension **625** or the second dimension **629** are greater than a preset dimension, then the defect (e.g., the second defect **607**) can be classified as comprising a surface characteristic. For example, in some embodiments, the present dimension can be about 10 mm. As such, if the first dimension **625** of the second defect **607** is greater than about 10 mm, or if the second dimension **629** of the second defect **607** is greater than about 10 mm, then the second defect **607** comprises a surface characteristic. In some embodiments, if it is determined that a plurality of defects are in close proximity to each other, and if each of the plurality of defects is classified as comprising an inclusion, then the plurality of defects may be grouped together and collectively determined to be a surface characteristic at the major surface of the viscous ribbon **402**. For example, when a grouping of inclusions is near each other, and the grouping comprises a first dimension or a second dimension that may be greater than the preset dimension, then it may be likely that the grouping comprises a fault-line or scratch at a major surface of the viscous ribbon **402**, such that the grouping of inclusions may be determined to be a surface characteristic.

[0068] In some embodiments, the detecting the defect (e.g., the first defect **605** and/or the second defect **607**) of the viscous ribbon **402** can comprise determining a position of the defect (e.g., the first defect **605** and/or the second defect **607**) by measuring a distance from an edge of the viscous ribbon **402** to the defect (e.g., the first defect **605** and/or the second defect **607**). For example, with reference to the first defect **605**, a position of the first defect **605** can be determined by measuring a distance from one or more edges of the viscous ribbon **402** to the first defect **605**. In some embodiments, a first separating distance **641** can be measured between the first defect **605** and a first edge **643** of the viscous ribbon **402**, with the first separating distance

641 measured along a direction that may be orthogonal to the travel direction **319** of the viscous ribbon **402**. The first separating distance **641** can comprise a minimum distance between the first defect **605** and the first edge **643**. In some embodiments, a second separating distance **645** can be measured between the first defect **605** and a second edge **647** of the viscous ribbon **402**, with the second separating distance **645** measured along a direction that may be orthogonal to the travel direction **319** of the viscous ribbon **402**. The second separating distance **645** can comprise a minimum distance between the first defect **605** and the second edge **647**.

[0069] In some embodiments, the position of the first defect **605** may not be limited to determining the first separating distance **641** from the first edge **643** and the second separating distance **645** from the second edge **647**. Rather, in some embodiments, the determining the position of the defect can comprise determining a position of the first defect **605** along a direction that may be parallel to the travel direction **319** of the viscous ribbon **402**. For example, in some embodiments, the upper boundary **603** can represent a separation path along which a portion of the viscous ribbon **402** can be separated by the glass separator **149** (e.g., scribe, score wheel, diamond tip, laser, etc.) at a downstream location from where the viscous ribbon **402** may be imaged by the camera **403**. A third separating distance **651** can be measured between the first defect **605** and the upper boundary **603** of the viscous ribbon **402**, with the third separating distance **651** measured along a direction that may be parallel to the travel direction **319** of the viscous ribbon **402**. The third separating distance **651** can comprise a minimum distance between the first defect **605** and the upper boundary **603**. In some embodiments, after measuring the first separating distance **641**, the second separating distance **645**, and the third separating distance **651**, a position of the defect (e.g., the first defect **605**) relative to the first edge **643**, the second edge **647** and optionally the upper boundary **603** can be known.

[0070] Referring to **FIG. 7**, in some embodiments, the viscous ribbon **402** can comprise a plurality of segments. For example, the viscous ribbon **402** can comprise a first segment **701**, a second segment **703**, a third segment **705**, a fourth segment **707**, a fifth segment **709**, a sixth segment **711**, a seventh segment **713**, and an eighth segment **715**, although in further embodiments, the viscous ribbon **402** can comprise more or fewer than eight segments. In some embodiments, the segments **701**, **703**, **705**, **707**, **709**, **711**, **713**, **715** can be separated from each other at a location downstream from

where the viscous ribbon **402** may be imaged, such that the segments **701**, **703**, **705**, **707**, **709**, **711**, **713**, **715** can each form a separated glass ribbon. In some embodiments, the seventh segment **713** and the eighth segment **715** are illustrated as having already been separated from the viscous ribbon **402** by the glass separator **149**. In some embodiments, at a leading end of the viscous ribbon **402**, the viscous ribbon **402** comprises a sixth separation path **731** along which the sixth segment **711** can be separated from the fifth segment **709** of the viscous ribbon **402** by the glass separator **149**. In some embodiments, the viscous ribbon **402** comprises a fifth separation path **729** along which the fifth segment **709** can be separated from the fourth segment **707** of the viscous ribbon **402** by the glass separator **149**. In some embodiments, the viscous ribbon **402** comprises a fourth separation path **727** along which the fourth segment **707** can be separated from the third segment **705** of the viscous ribbon **402** by the glass separator **149**. In some embodiments, the viscous ribbon **402** comprises a third separation path **725** along which the third segment **705** can be separated from the second segment **703** of the viscous ribbon **402** by the glass separator **149**. In some embodiments, the viscous ribbon **402** comprises a second separation path **723** along which the second segment **703** can be separated from the first segment **701** of the viscous ribbon **402** by the glass separator **149**. In some embodiments, the viscous ribbon **402** comprises a first separation path **721** along which the first segment **701** can be separated from an upstream portion of the viscous ribbon **402** by the glass separator **149**. It will be appreciated that, for illustrative purposes, the first segment **701** comprises the first defect **605** and the second defect **607**, while the other segments **703**, **705**, **707**, **709**, **711**, **713**, **715** do not comprise defects. However, in other embodiments, one or more of the other segments **703**, **705**, **707**, **709**, **711**, **713**, **715** may comprise defects, while the first segment **701** may or may not comprise the first defect **605** and/or the second defect **607**.

[0071] In some embodiments, methods of processing the viscous ribbon **402** can comprise tracking the first segment **701** of the viscous ribbon **402**, which comprises the defect. In some embodiments, the tracking the first segment **701** can comprise measuring the first velocity of the viscous ribbon **402**. For example, as described above, measuring the first velocity of the viscous ribbon **402** can comprise dividing a first distance that the viscous ribbon **402** has moved between a first position and a second position by a period of time, for example, the amount of time that has elapsed between

when the viscous ribbon **402** is in the first position and the second position. In some embodiments, the first velocity of the viscous ribbon **402** may already be known, while in other embodiments, the first velocity can be measured. As described above, the positions of the first defect **605** and the second defect **607** within the first segment **701** may be known. For example, the separating distances of the first defect **605** and the second defect **607** from the first edge **643** and the second edge **647** may be known. Likewise, in some embodiments, the separating distances of the first defect **605** and the second defect **607** from the first separation path **721** may also be known. As such, due to measuring the first velocity of the first segment **701**, the first segment **701** can be tracked from the camera **403** to a downstream location where the first segment **701** may be separated. Further, the positions of the first defect **605** and the second defect **607** within the first segment **701** relative to the first edge **643**, the second edge **647**, and the first separation path **721** may also be known. In some embodiments, a distance of the first defect **605** and/or the second defect **607** from the second separation path **723** may likewise be determined in a similar manner as the distance of the first defect **605** and/or the second defect **607** from the first separation path **721**.

[0072] In some embodiments, methods of processing the viscous ribbon **402** can comprise categorizing the segments **701**, **703**, **705**, **707**, **709**, **711**, **713**, **715** into defect-containing segments and defect-free segments. Defect-containing segments may comprise segments (e.g., the first segment **701**) comprising one or more defects, such as the first defect **605**, the second defect **607**, etc., while defect-free segments may comprise segments (e.g., segments **703**, **705**, **707**, **709**, **711**, **713**, **715**) that do not comprise defects. In some embodiments, the processing apparatus **401** can determine which of the segments **701**, **703**, **705**, **707**, **709**, **711**, **713**, **715** contain defects, categorize the segments **701**, **703**, **705**, **707**, **709**, **711**, **713**, **715** that contain defects as defect-containing segments, and track the defect-containing segments (e.g., the first segment **701**). In some embodiments, the processing apparatus **401** can track the defect-containing segments (e.g., the first segment **701**) from a location where the segment may be imaged by the camera **403** to a downstream location, such as after the defect-containing segment (e.g., the first segment **701**) has been separated from the viscous ribbon **402**. By categorizing and tracking the segments of the viscous ribbon **402**, ease of removing the defect-containing segments may be improved. For example, an operator may know not only which of the segments **703**, **705**, **707**, **709**, **711**, **713**,

715 contain defects after the defect-containing segments have been separated from the viscous ribbon 402, but also the location of defects within the defect-containing segments.

[0073] Referring to FIG. 8, in some embodiments, as the viscous ribbon 402 moves in the travel direction 319, the segments can be separated from the ribbon with the glass separator 149. For example, the second segment 703 can be separated from the ribbon (e.g., at a downstream location of the viscous ribbon 402 wherein the ribbon is in a glassy state) with the glass separator 149 along the second separation path 723 (e.g., illustrated in FIG. 7). Likewise, after the second segment 703 has been separated, the first segment 701 can be separated from the ribbon (e.g., at a downstream location of the viscous ribbon 402 wherein the ribbon is in a glassy state) with the glass separator 149 along the first separation path 721 (e.g., illustrated in FIG. 7). In some embodiments, one or more of the segments 701, 703, 705, 707, 709, 711, 713, 715 can be stacked to form a stack of separated glass ribbon segments. Prior to or after the stacking of the segments, it may be beneficial to separate the defect-containing segments from the defect-free segments.

[0074] Referring to FIG. 9, in some embodiments, methods of processing the viscous ribbon 402 can comprise removing 901 the first segment 701 from the ribbon (e.g., at a downstream location of the viscous ribbon 402 wherein the ribbon is in a glassy state) downstream from a portion of the viscous ribbon 402 that is imaged. In some embodiments, due to the second segment 703, the third segment 705, the fourth segment 707, the fifth segment 709, the sixth segment 711, the seventh segment 713, and the eighth segment 715 not comprising defects, these segments (e.g., the second segment 703, the third segment 705, the fourth segment 707, the fifth segment 709, the sixth segment 711, the seventh segment 713, and the eighth segment 715) may not be removed from the ribbon. For example, the processing apparatus 401 can track the segments 701, 703, 705, 707, 709, 711, 713, 715 of the viscous ribbon 402 after the segments 701, 703, 705, 707, 709, 711, 713, 715 have been separated from the viscous ribbon 402 by the glass separator 149. In some embodiments, to separate the defect-containing segments (e.g., the first segment 701) from the defect-free segments (e.g., the second segment 703), the first segment 701 can be removed 901 from the defect-free segments. Due to the prior determination of the location of the first defect 605 and the second defect 607 within the first segment 701, an operator can remove and inspect

the first segment **701** to confirm that the first segment **701** not only comprises the first defect **605** and the second defect **607**, but also that the first segment **701** comprises the first defect **605** and the second defect **607** in an expected location relative to edges of the first segment **701**. The removing **901** of the first segment **701** can comprise segregating the first segment **701**, which comprises defects, from the other segments **703**, **705**, **707**, **709**, **711**, **713**, **715** which do not comprise defects.

[0075] Referring to **FIG. 10**, a schematic flow diagram **1001** illustrating methods of processing the viscous ribbon **402** is illustrated. In some embodiments, methods of processing the viscous ribbon **402** can comprise receiving images of the viscous ribbon **402** from the camera **403** at an image acquisition node **1003**. For example, the camera **403** can receive the thermal light energy **405** from the viscous ribbon **402** and generate an image (e.g., the image **501**, the second image **601**, etc.) of the viscous ribbon **402**. In some embodiments, the camera **403** can generate images of the viscous ribbon **402** at a rate of from about 2 images per second to about 10 images per second. In some embodiments, the camera **403** can generate 3 or more images per defect in the viscous ribbon **402**. By generating multiple images of each defect in the viscous ribbon **402**, the processing apparatus **401** can confirm that the viscous ribbon **402** comprises the defect and not, for example, an artifact.

[0076] In some embodiments, methods of processing the viscous ribbon **402** can comprise receiving the images of the viscous ribbon **402** from the image acquisition node **1003** at a first image processing node **1005** and a second image processing node **1007**. Image processing of the images can occur at the first image processing node **1005** and the second image processing node **1007**. For example, by comprising a plurality of image processing nodes, the time to process a plurality of images may be reduced (e.g., as compared to embodiments with a single image processing node). The image acquisition node **1003** can send one image to the first image processing node **1005** for image processing. The image acquisition node **1003** can send the next consecutive image to the second image processing node **1007** for image processing. In this way, a backlog of images to be processed at one or more of the first image processing node **1005** or a second image processing node **1007** may be reduced.

[0077] In some embodiments, the first image processing node **1005** and the second image processing node **1007** can first rectify the images to the perspective that may be orthogonal to the plane defined by the viscous ribbon **402** traveling along the

travel path. Following image rectification, the first image processing node **1005** and the second image processing node **1007** can identify one or more areas of interest within the image **501**, **601**, such as, for example, the first area of interest **503**, the second area of interest **505**, the third area of interest **507**, and/or the fourth area of interest **509**. The area of interest may be identified based on areas within the generated image **501**, **601** that have a higher intensity (e.g., higher brightness) than surrounding areas of the image **501**, **601**. Next, the first image processing node **1005** and the second image processing node **1007** can determine if the area of interest **503**, **505**, **507**, **509** comprises a defect (e.g., the first defect **605**, the second defect **607**, etc.) or an artifact (e.g., the artifact **609**). Determination of whether the area of interest **503**, **505**, **507**, **509** comprises the defect can comprise, for example, measurement and comparison of the first velocity of the viscous ribbon **402** and the second velocity of the area of interest **503**, **505**, **507**, **509**. In addition or in the alternative, in some embodiments, determination of whether the area of interest **503**, **505**, **507**, **509** comprises the defect can comprise determining if the area of interest **503**, **505**, **507**, **509** is in consecutive images of the viscous ribbon **402**. The first image processing node **1005** and the second image processing node **1007** can then classify any found defects (e.g., the first defect **605**, the second defect **607**, etc.) as an inclusion or a surface characteristic based on whether measured dimensions of the defects are greater than a preset dimension. Information related to the defects may also be determined, for example, the position of the defects within the viscous ribbon **402** (e.g., the separating distance of the defect from edges and/or boundaries of the viscous ribbon **402**, etc.), the size of the defects, etc.

[0078] In some embodiments, the images of the viscous ribbon **402** and the information related to any defects within the viscous ribbon **402** may be sent from the first image processing node **1005** and the second image processing node **1007** to an inspection results node **1009**. At the inspection results node **1009**, data related to the viscous ribbon **402** and/or the defects within the viscous ribbon **402** may be transmitted to a display, such as a monitor. In some embodiments, the data may comprise the velocity of the viscous ribbon **402**, the size of the viscous ribbon **402**, the presence and/or absence of defects within the viscous ribbon **402**, types of defects, the size of the defects, the position of the defects within the viscous ribbon **402**, etc. In some embodiments, the inspection results node **1009** can trigger an alarm if a defect has been detected by the first image processing node **1005** or the second image processing node

1007. In some embodiments, the defect information and the image of the viscous ribbon **402** may then be sent from the inspection results node **1009** to a tracking node **1011**. Within the tracking node **1011**, the defects can be further classified and tracked as the viscous ribbon **402** moves in the travel direction **319**. Information related to the identified defects, the viscous ribbon **402**, and the images of the viscous ribbon **402** may then be sent to a database **1013** for storage.

[0079] In some embodiments, the processing apparatus **401** can provide several benefits associated with detecting defects within the viscous ribbon **402**. For example, the camera **403** can receive thermal light energy from the viscous ribbon **402** and generate an image of the viscous ribbon **402** based on the received thermal light energy. As such, due to the use of the thermal light energy, additional light sources may not be used. In addition, the processing apparatus **401** can separately classify defects within the viscous ribbon **402** from artifacts, and classify the types of defects that may be detected. For example, the images generated by the camera **403** can be processed to determine not only that a defect may be present within the viscous ribbon **402**, but also whether the defect may be an inclusion within the viscous ribbon **402**, a surface characteristic at a major surface of the viscous ribbon **402**, etc. In addition, the processing apparatus **401** can facilitate removal of segments of the viscous ribbon **402** that comprise defects. For example, the processing apparatus **401** can identify segments within the viscous ribbon **402** that comprise defects, and track these segments based on a measured velocity of the viscous ribbon **402**. By tracking these defect-containing segments, the processing apparatus **401** can indicate to an operator, following separation of the defect-containing segment, which of the defect-containing segments should be removed. Further, the processing apparatus **401** can also determine a location of the defect within the segment. As such, the operator can verify that the proper defect-containing segment has been removed by comparing the actual location of the defects (e.g., a distance from the edges of the segment) to a location determined by the processing apparatus. The operator can further verify that the defects and the artifacts within the segment have been properly classified.

[0080] Embodiments and the functional operations described herein can be implemented in digital electronic circuitry, or in computer software, firmware, or hardware, including the structures disclosed in this specification and their structural equivalents, or in combinations of one or more of them. Embodiments described herein

can be implemented as one or more computer program products, i.e., one or more modules of computer program instructions encoded on a tangible program carrier for execution by, or to control the operation of, data processing apparatus. The tangible program carrier can be a computer readable medium. The computer readable medium can be a machine-readable storage device, a machine-readable storage substrate, a memory device, or a combination of one or more of them.

[0081] The term “processor” or “controller” can encompass all apparatus, devices, and machines for processing data, including by way of example a programmable processor, a computer, or multiple processors or computers. The processor can include, in addition to hardware, code that creates an execution environment for the computer program in question, e.g., code that constitutes processor firmware, a protocol stack, a database management system, an operating system, or a combination of one or more of them.

[0082] A computer program (also known as a program, software, software application, script, or code) can be written in any form of programming language, including compiled or interpreted languages, or declarative or procedural languages, and it can be deployed in any form, including as a standalone program or as a module, component, subroutine, or other unit suitable for use in a computing environment. A computer program does not necessarily correspond to a file in a file system. A program can be stored in a portion of a file that holds other programs or data (e.g., one or more scripts stored in a markup language document), in a single file dedicated to the program in question, or in multiple coordinated files (e.g., files that store one or more modules, sub programs, or portions of code). A computer program can be deployed to be executed on one computer or on multiple computers that are located at one site or distributed across multiple sites and interconnected by a communication network.

[0083] The processes described herein can be performed by one or more programmable processors executing one or more computer programs to perform functions by operating on input data and generating output. The processes and logic flows can also be performed by, and apparatus can also be implemented as, special purpose logic circuitry, e.g., an FPGA (field programmable gate array) or an ASIC (application specific integrated circuit) to name a few.

[0084] Processors suitable for the execution of a computer program include, by way of example, both general and special purpose microprocessors, and any one or

more processors of any kind of digital computer. Generally, a processor will receive instructions and data from a read only memory or a random-access memory or both. The essential elements of a computer are a processor for performing instructions and one or more data memory devices for storing instructions and data. Generally, a computer will also include, or be operatively coupled to receive data from or transfer data to, or both, one or more mass storage devices for storing data, e.g., magnetic, magneto optical disks, or optical disks. However, a computer need not have such devices. Moreover, a computer can be embedded in another device, e.g., a mobile telephone, a personal digital assistant (PDA), to name just a few.

[0085] Computer readable media suitable for storing computer program instructions and data include all forms data memory including nonvolatile memory, media and memory devices, including by way of exemplary semiconductor memory devices, e.g., EPROM, EEPROM, and flash memory devices; magnetic disks, e.g., internal hard disks or removable disks; magneto optical disks; and CD ROM and DVD-ROM disks. The processor and the memory can be supplemented by, or incorporated in, special purpose logic circuitry.

[0086] To provide for interaction with a user, embodiments described herein can be implemented on a computer comprising a display device, e.g., a CRT (cathode ray tube) or LCD (liquid crystal display) monitor, and the like for displaying information to the user and a keyboard and a pointing device, e.g., a mouse or a trackball, or a touch screen by which the user can provide input to the computer. Other kinds of devices can be used to provide for interaction with a user as well; for example, input from the user can be received in any form, including acoustic, speech, or tactile input.

[0087] Embodiments described herein can be implemented in a computing system that includes a back end component, e.g., as a data server, or that includes a middleware component, e.g., an application server, or that includes a front end component, e.g., a client computer comprising a graphical user interface or a Web browser through which a user can interact with implementations of the subject matter described herein, or any combination of one or more such back end, middleware, or front end components. The components of the system can be interconnected by any form or medium of digital data communication, e.g., a communication network.

Embodiments of communication networks include a local area network (“LAN”) and a wide area network (“WAN”), e.g., the Internet.

[0088] The computing system can include clients and servers. A client and server are generally remote from each other and typically interact through a communication network. The relationship of client and server arises by virtue of computer programs running on the respective computers and comprising a client-server relationship to each other.

[0089] As used herein the terms "the," "a," or "an," mean "one or more," and should not be limited to "only one" unless explicitly indicated to the contrary. Thus, for example, reference to "a component" includes embodiments having two or more such components unless the context clearly indicates otherwise.

[0090] As used herein, the term “about” means that amounts, sizes, formulations, parameters, and other quantities and characteristics are not and need not be exact, but may be approximate and/or larger or smaller, as desired, reflecting tolerances, conversion factors, rounding off, measurement error and the like, and other factors known to those of skill in the art. When the term “about” is used in describing a value or an end-point of a range, the disclosure should be understood to include the specific value or end-point referred to. Whether or not a numerical value or end-point of a range in the specification recites “about,” the numerical value or end-point of a range is intended to include two embodiments: one modified by “about,” and one not modified by “about.” It will be further understood that the endpoints of each of the ranges are significant both in relation to the other endpoint, and independently of the other endpoint.

[0091] The terms “substantial,” “substantially,” and variations thereof as used herein are intended to note that a described feature is equal or approximately equal to a value or description. For example, a “substantially planar” surface is intended to denote a surface that is planar or approximately planar. Moreover, as defined above, “substantially similar” is intended to denote that two values are equal or approximately equal. In some embodiments, “substantially similar” may denote values within about 10% of each other, for example within about 5% of each other, or within about 2% of each other.

[0092] As used herein, the terms “comprising” and “including,” and variations thereof shall be construed as synonymous and open-ended, unless otherwise indicated.

[0093] While various embodiments have been described in detail relative to certain illustrative and specific embodiments thereof, the present disclosure should not be considered limited to such, as numerous modifications and combinations of the disclosed features are envisioned without departing from the scope of the following claims.

What is claimed is:

1. A method of processing a viscous ribbon comprising:
supplying a molten material from a supply vessel;
forming the molten material into the viscous ribbon, the viscous ribbon traveling along a travel path;
receiving thermal light energy produced from the viscous ribbon;
generating an image of the viscous ribbon from the thermal light energy; and
detecting a defect of the viscous ribbon from the image.
2. The method of claim 1, wherein the generating comprises rectifying the image to a perspective that is orthogonal to a plane defined by the viscous ribbon.
3. The method of any one of claims 1-2, wherein the detecting comprises determining if the defect is an inclusion within the viscous ribbon or a surface characteristic at a major surface of the viscous ribbon.
4. The method of any one of claims 1-3, wherein the detecting comprises determining a position of the defect.
5. The method of any one of claims 1-4, further comprising tracking a first segment of the viscous ribbon, which comprises the defect.
6. The method of claim 5, wherein the tracking comprises measuring a first velocity of the viscous ribbon.
7. The method of claim 6, further comprising removing the first segment from the viscous ribbon downstream from a portion of the viscous ribbon that is imaged.
8. The method of any one of claims 1-7, further comprising generating the thermal light energy from one or more of the viscous ribbon or the supply vessel.
9. A method of processing a viscous ribbon comprising:

supplying a molten material from a supply vessel;
forming the molten material into the viscous ribbon, the viscous ribbon traveling along a travel path;
receiving thermal light energy produced from the viscous ribbon;
generating an image of the viscous ribbon from the thermal light energy;
identifying an area of interest in the image; and
determining if the area of interest comprises a defect of the viscous ribbon.

10. The method of claim 9, wherein the determining comprises measuring a first velocity of the viscous ribbon and a second velocity of the area of interest.

11. The method of claim 10, wherein if the first velocity is substantially equal to the second velocity, then classifying the area of interest as comprising the defect.

12. The method of any one of claims 9-11, wherein the determining comprises identifying the area of interest in consecutive images of the viscous ribbon.

13. The method of claim 12, wherein if the area of interest is in consecutive images of the viscous ribbon, then classifying the area of interest as comprising the defect.

14. The method of any one of claims 9-13, further comprising separating the viscous ribbon downstream from a portion of the viscous ribbon that is imaged.

15. The method of any one of claims 9-14, further comprising generating the thermal light energy from one or more of the viscous ribbon or the supply vessel.

16. The method of any one of claims 9-15, wherein the generating the image of the viscous ribbon comprises rectifying the image to a perspective that is orthogonal to a plane defined by the viscous ribbon.


17. A method of processing a viscous ribbon comprising:
moving the viscous ribbon along a travel path in a travel direction;

receiving thermal light energy produced from the viscous ribbon;
generating an image of the viscous ribbon from the thermal light energy;
detecting a defect of the viscous ribbon from the image; and
removing from the viscous ribbon a first segment of the viscous ribbon that comprises the defect.

18. The method of claim 17, further comprising tracking the first segment by measuring a first velocity of the viscous ribbon.

19. The method of any one of claims 17-18, wherein the detecting comprises determining if the defect is an inclusion within the viscous ribbon or a surface characteristic at a major surface of the viscous ribbon.

20. The method of any one of claims 17-19, wherein the detecting comprises determining a position of the defect.

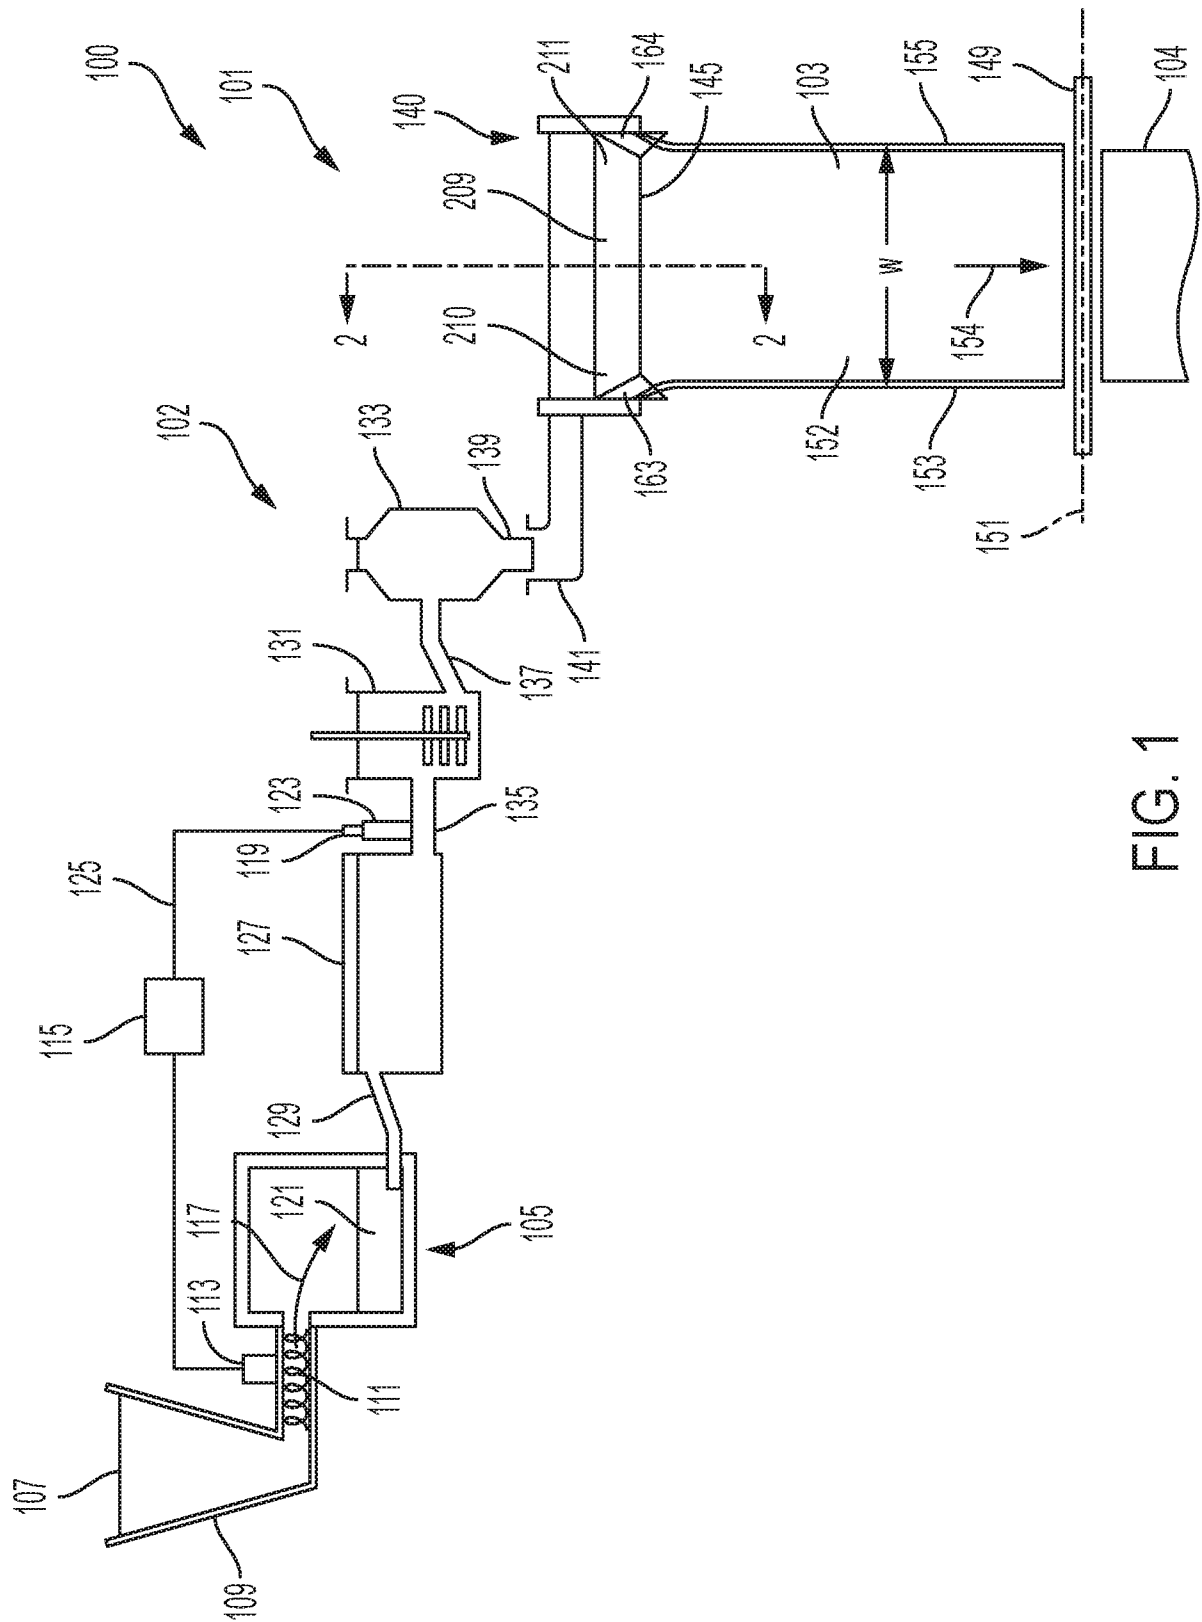

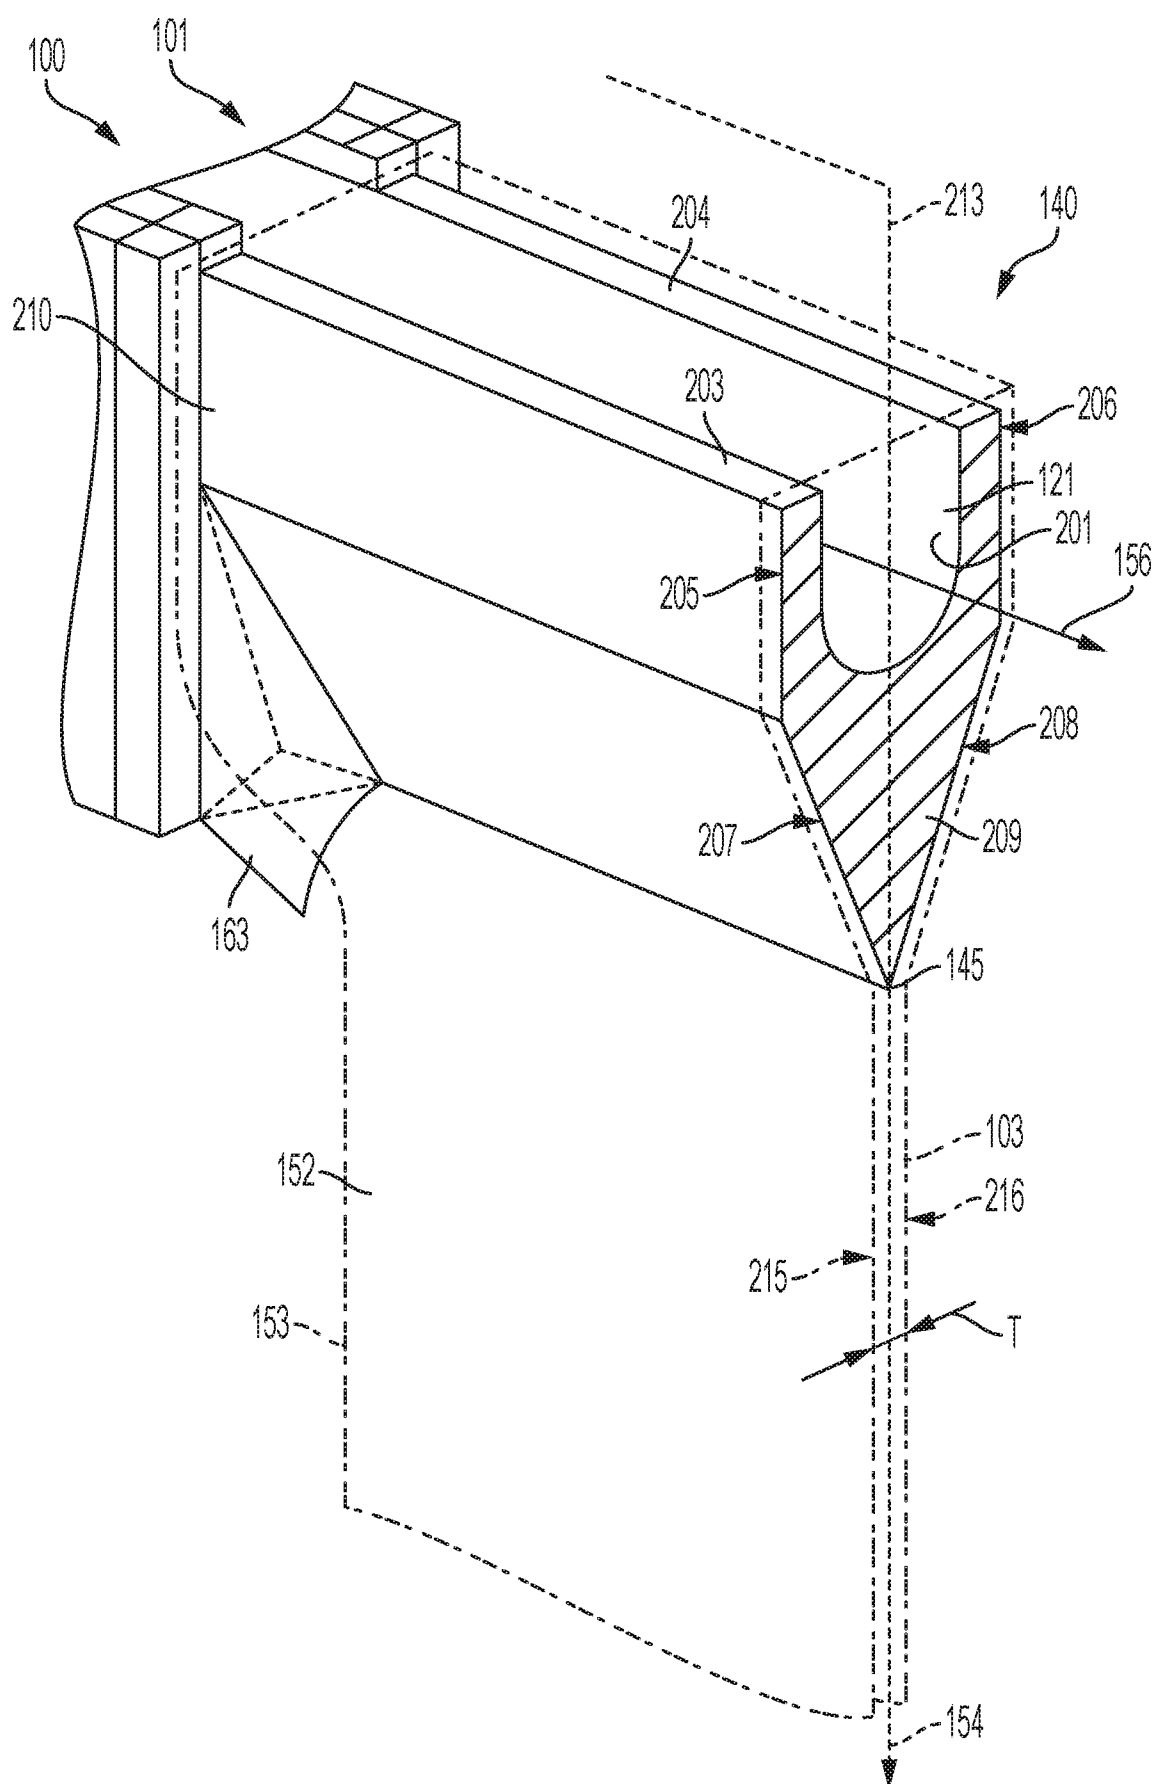


FIG. 2

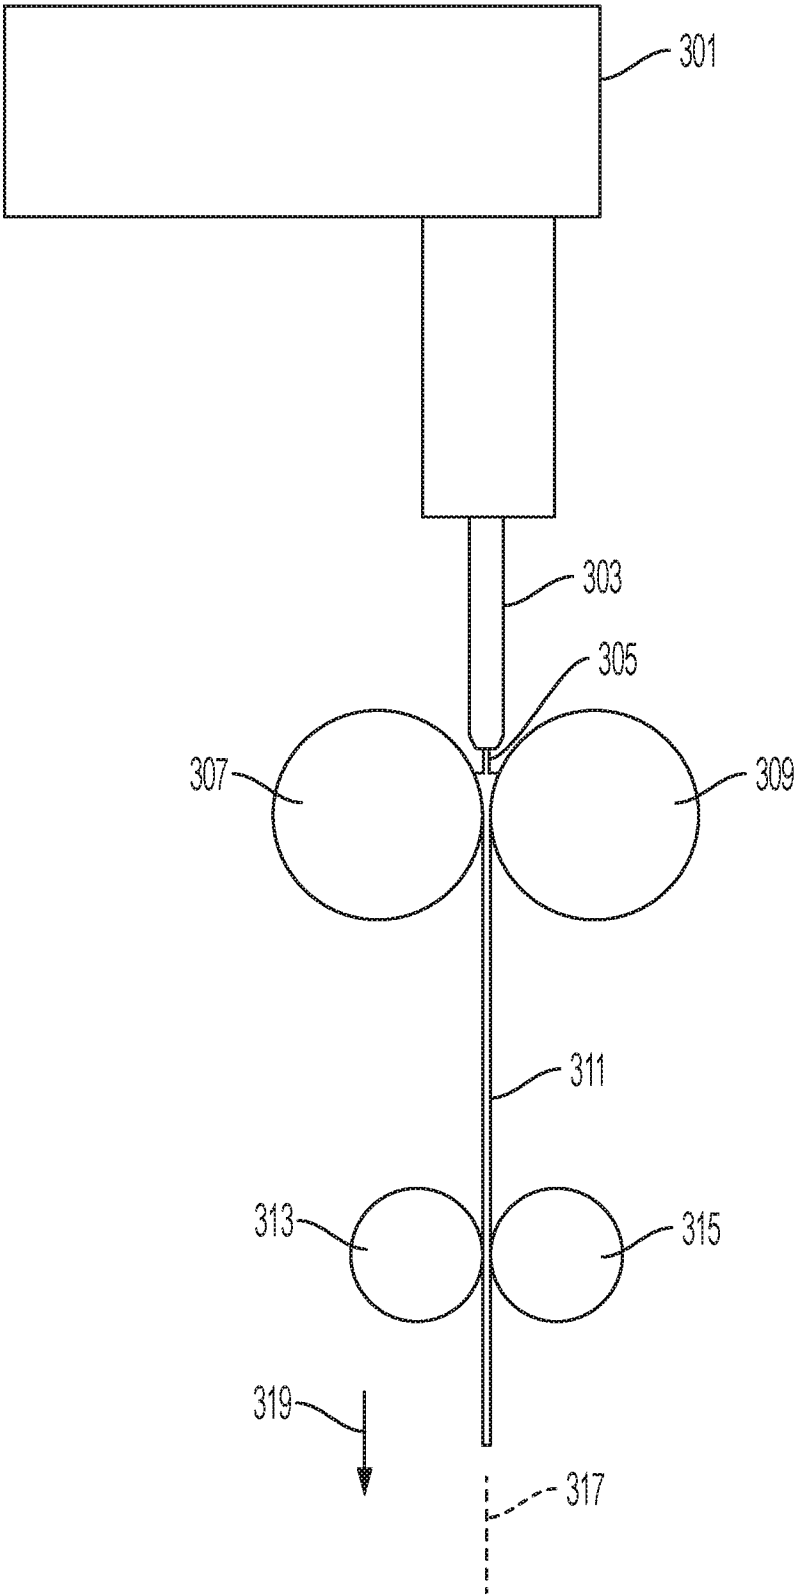
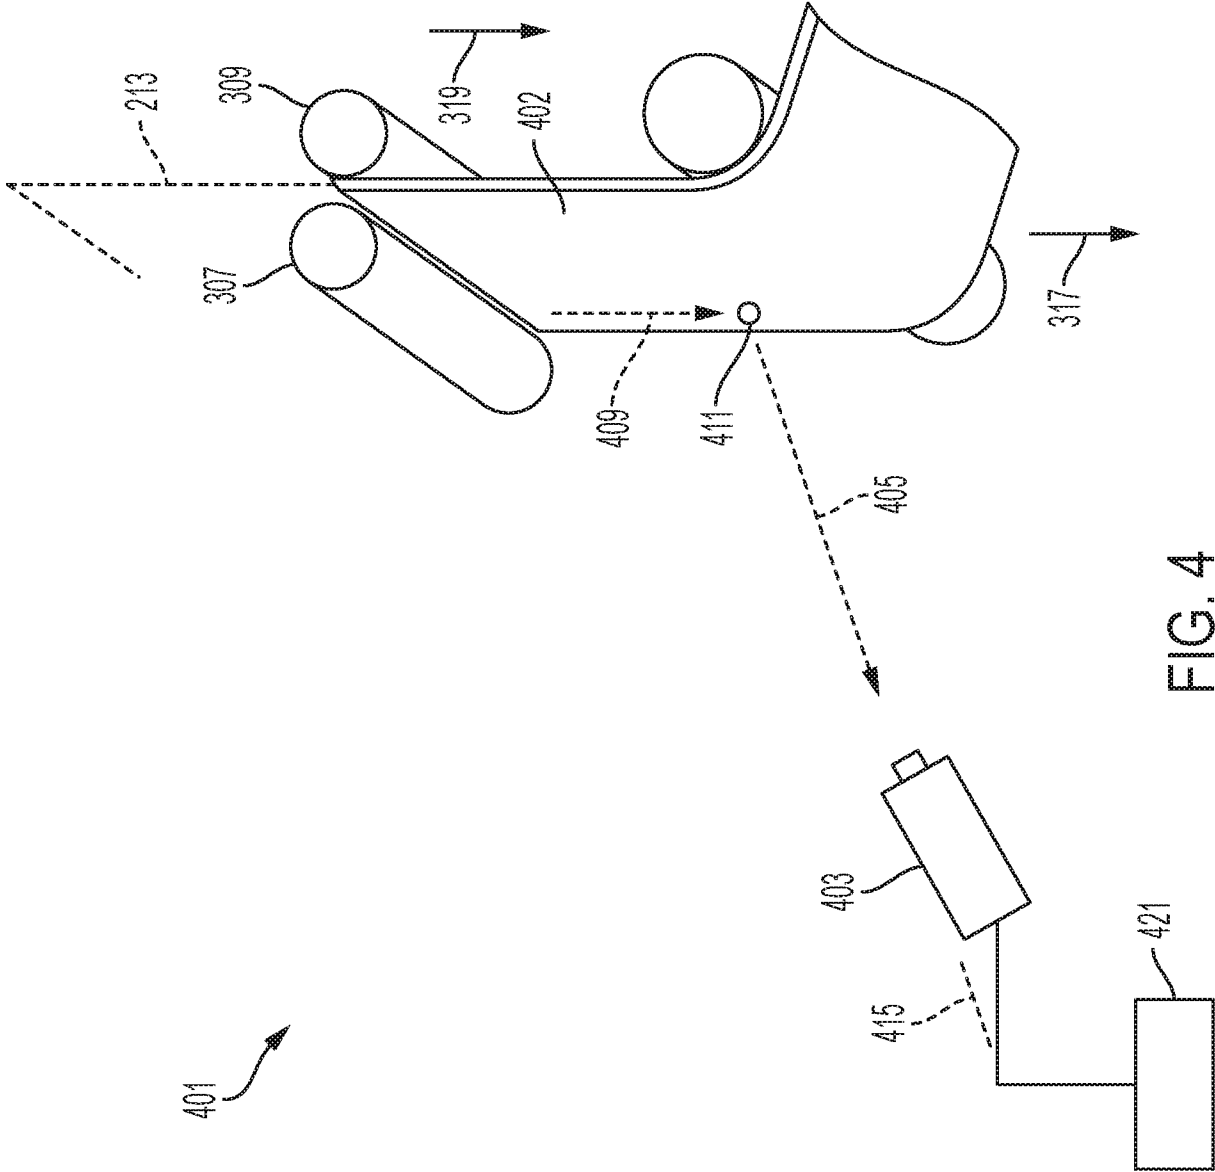


FIG. 3



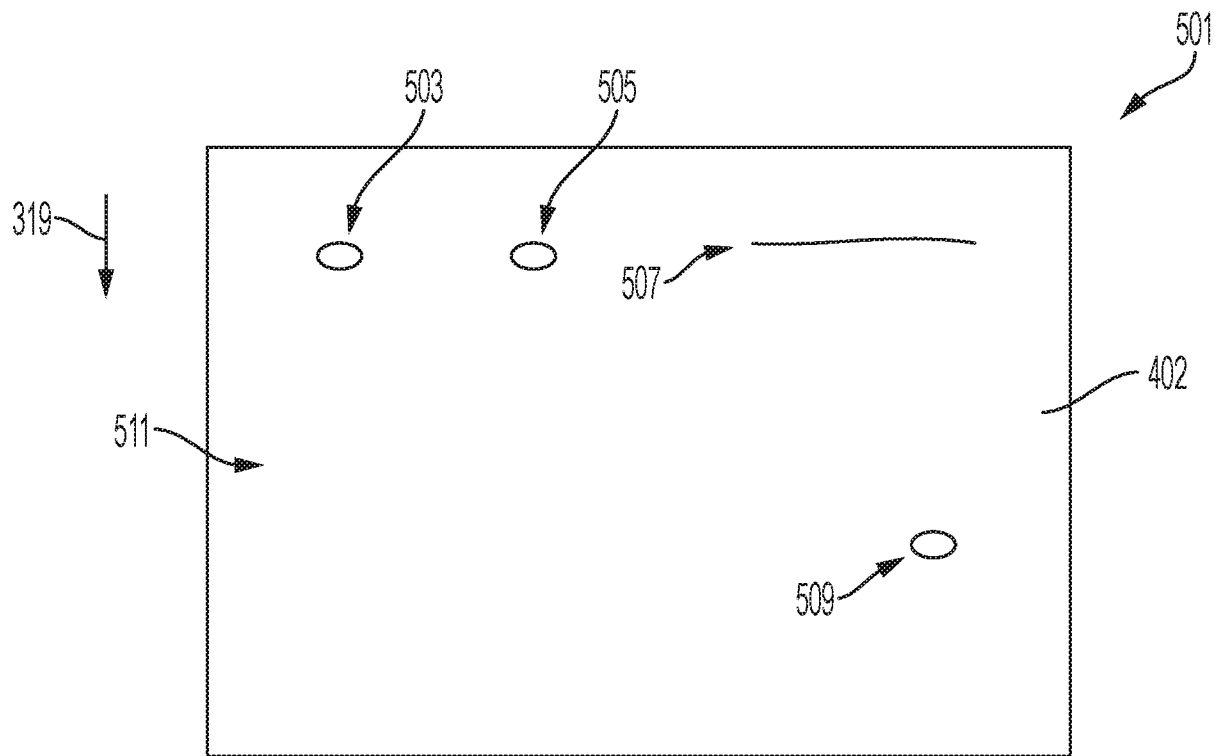


FIG. 5

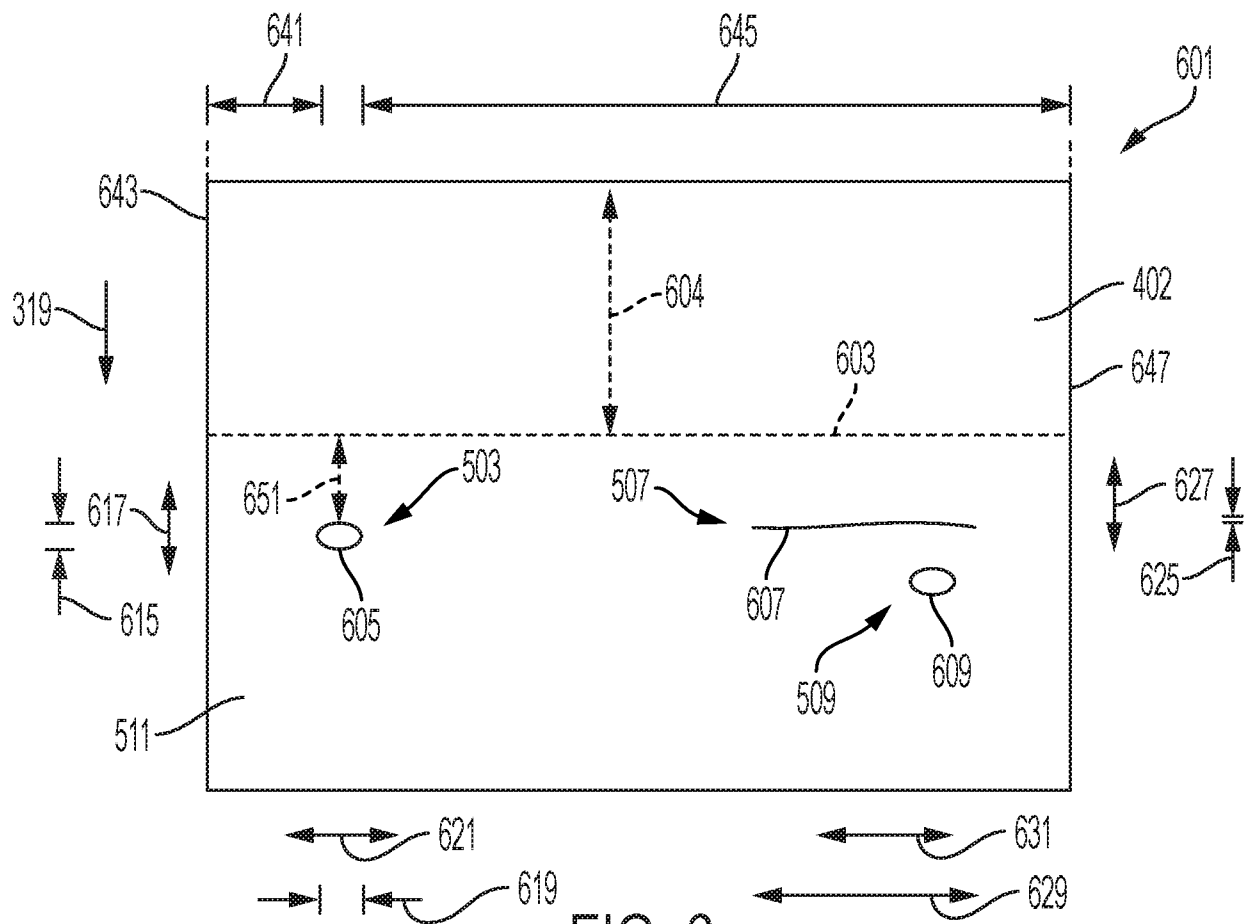


FIG. 6

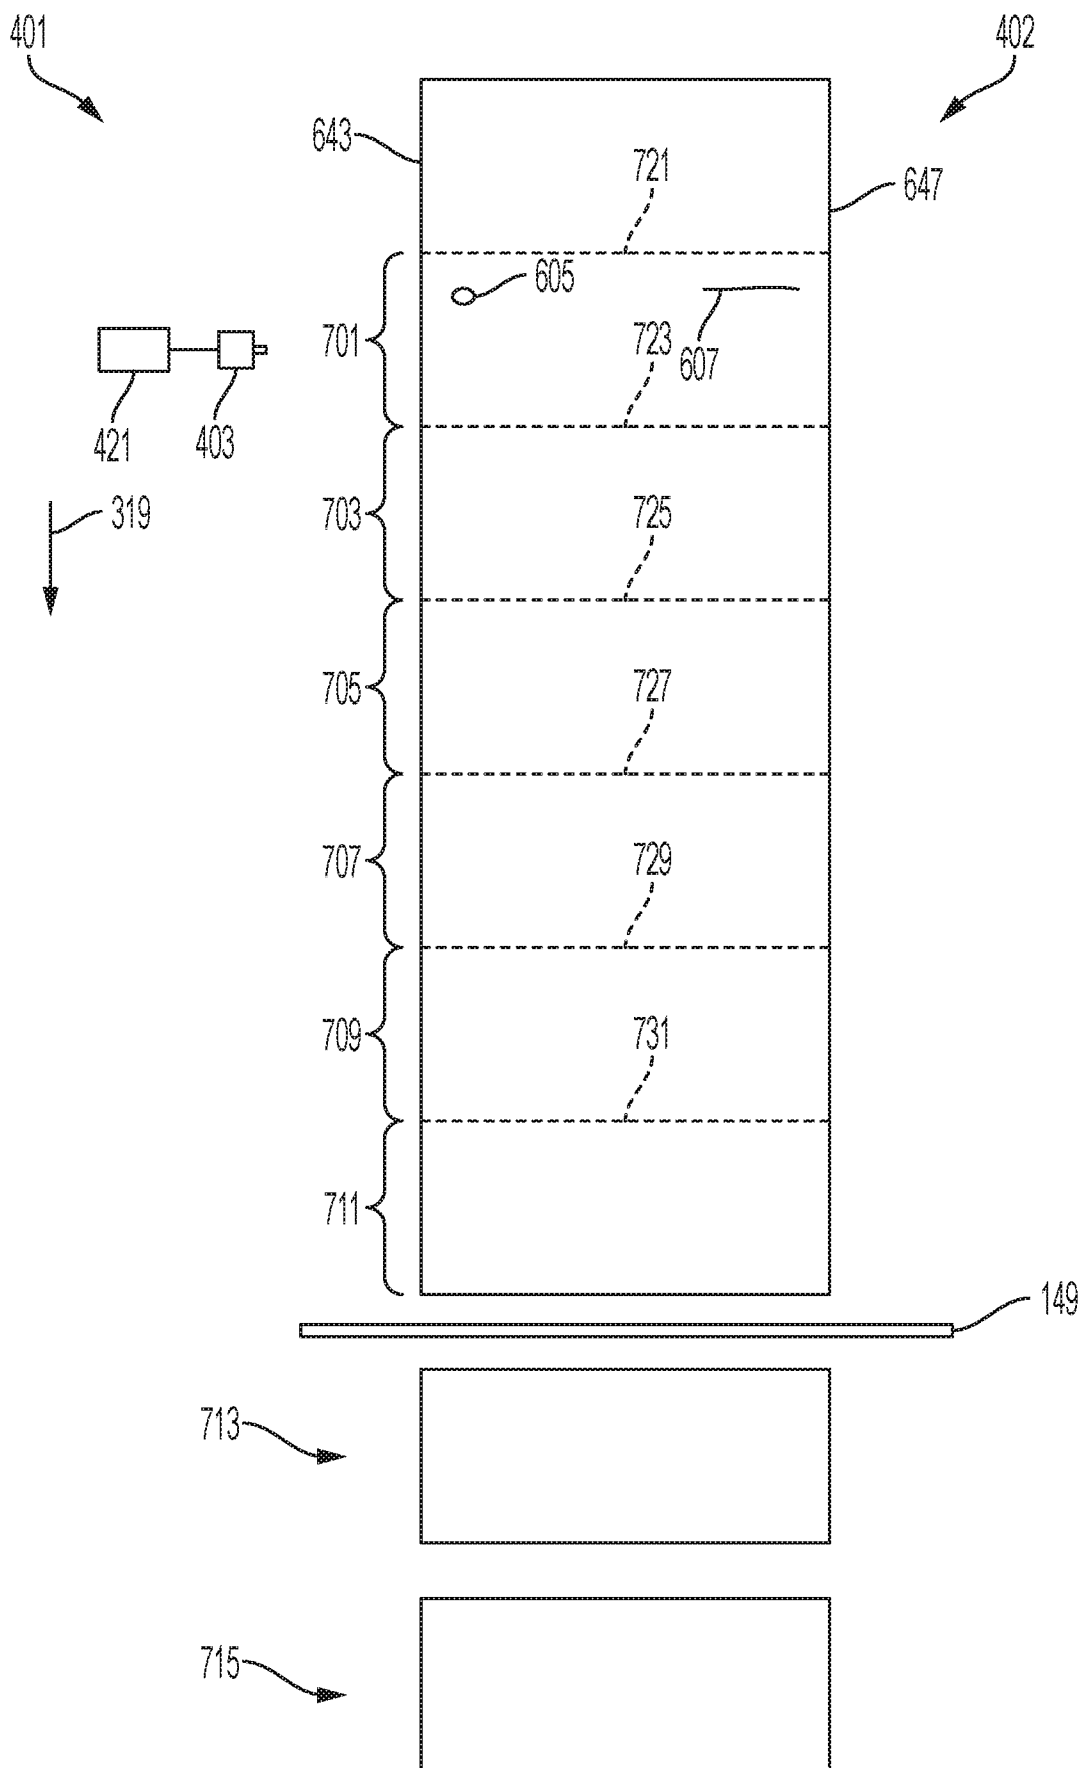


FIG. 7

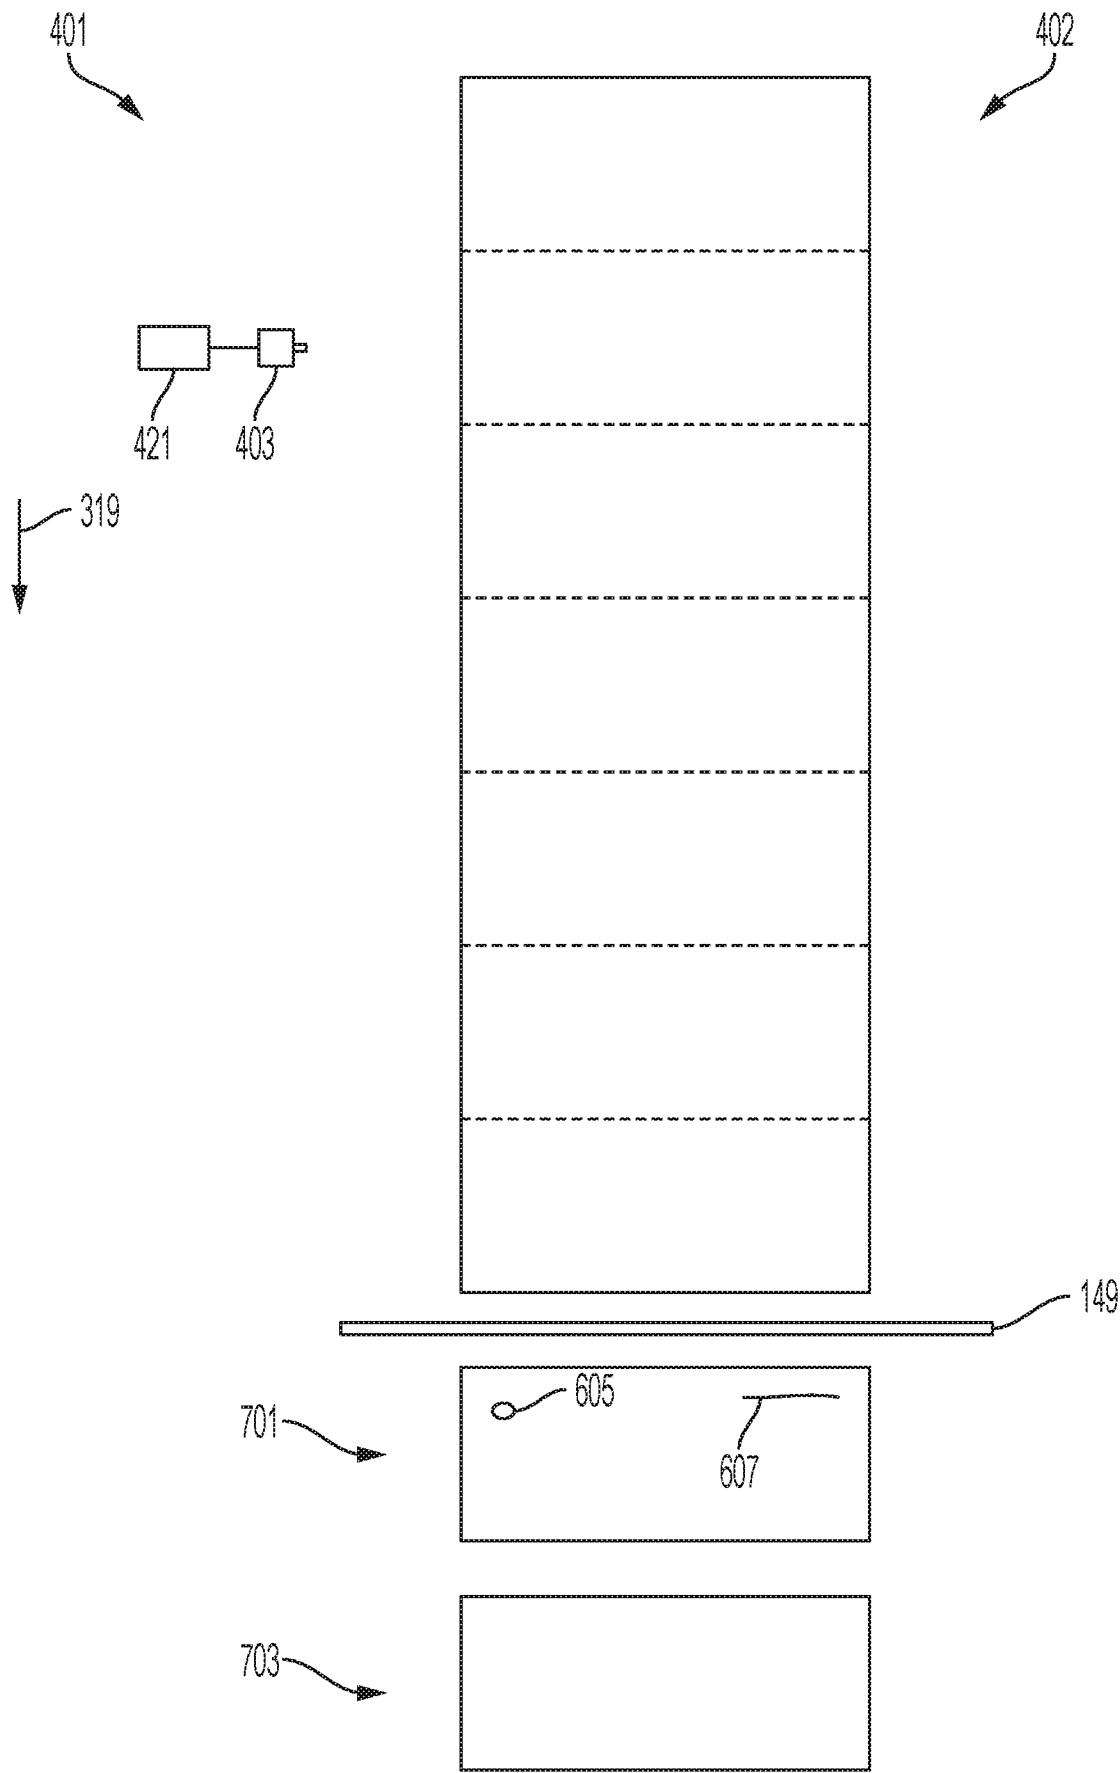


FIG. 8

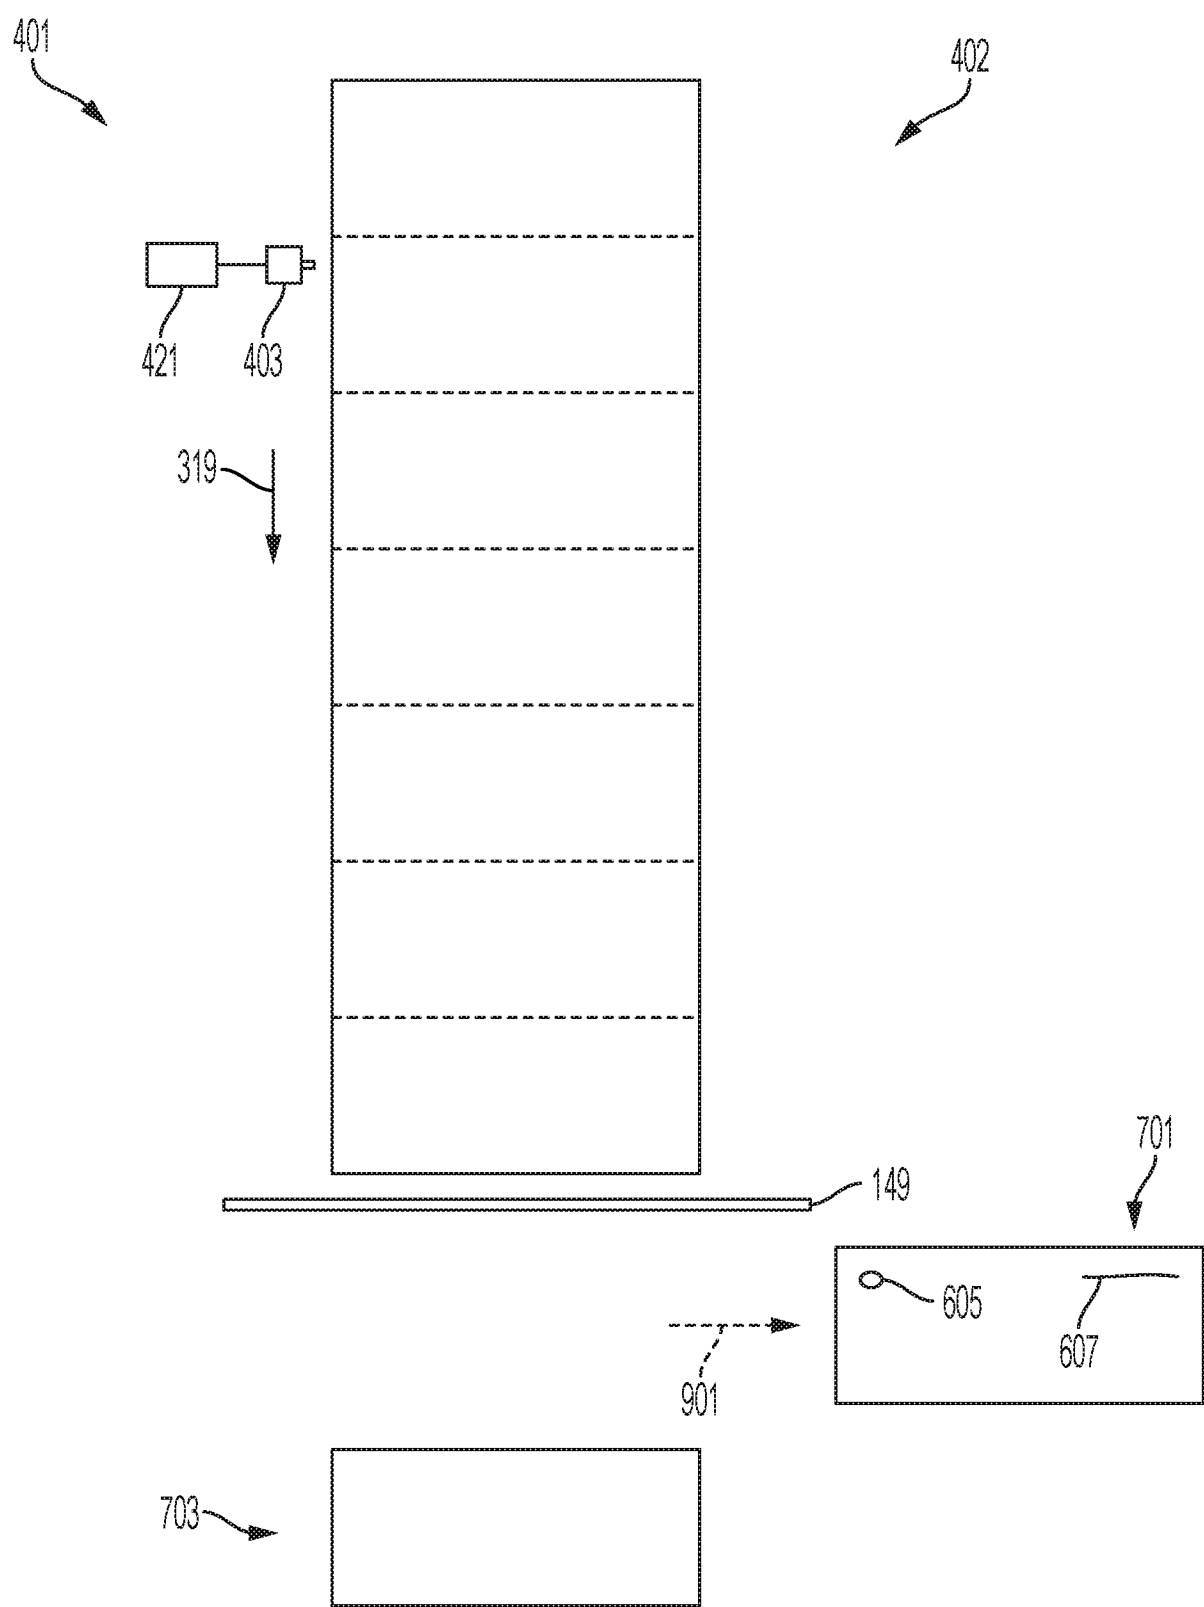


FIG. 9

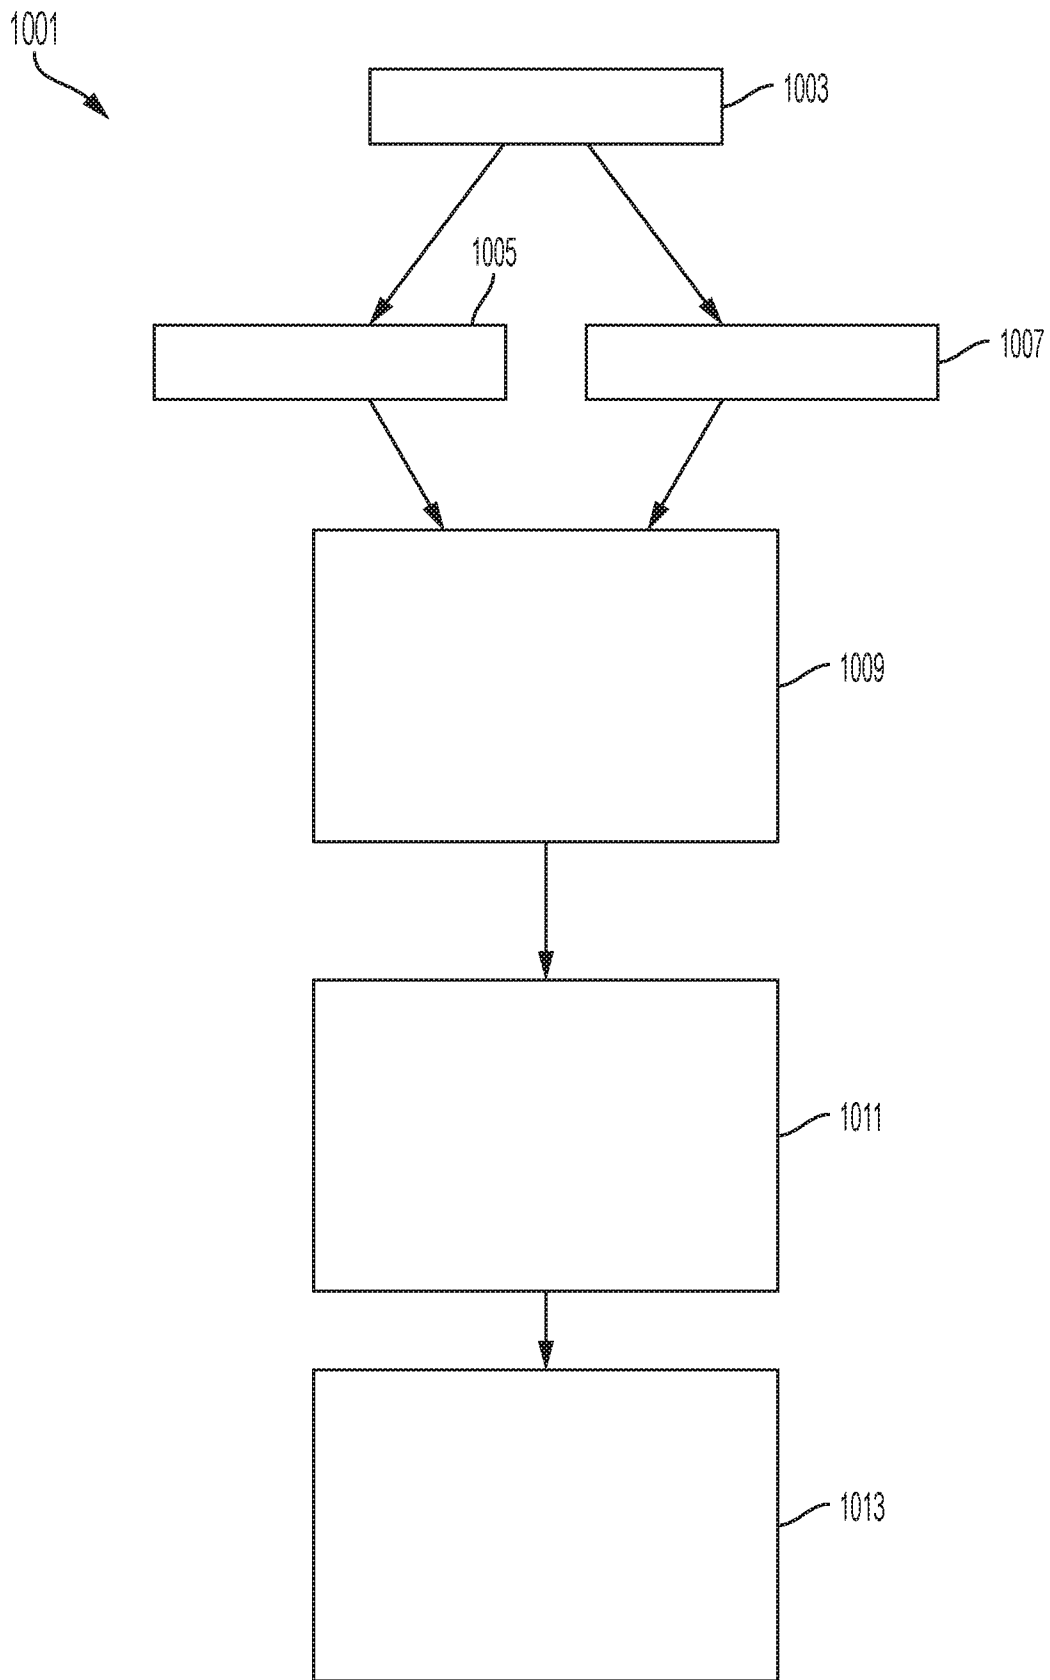


FIG. 10

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2020/013796**A. CLASSIFICATION OF SUBJECT MATTER****C03C 23/00(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C03C 23/00; C03B 17/06; C03B 37/018; G01B 11/06; G01B 11/30; G01N 21/896; G01N 21/90; G01N 25/72

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: glass, ribbon, thermal light energy, image, defect

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 2018-529615 A (CORNING INCORPORATED) 11 October 2018 claims 1, 2, 9	1-3, 9-13, 17-19
Y	JP 3332208 B2 (CENTRAL GLASS CO., LTD.) 07 October 2002 claims 1, 2; paragraph [0012]	1-3, 9-13, 17-19
Y	KR 10-0663460 B1 (SAMSUNG ELECTRONICS CO., LTD.) 02 January 2007 paragraph [0030]	1-3, 9-13, 17-19
A	US 2014-0137601 A1 (CORNING INCORPORATED) 22 May 2014 whole document	1-3, 9-13, 17-19
A	JP 2007-132930 A (EMHART GLASS SA.) 31 May 2007 whole document	1-3, 9-13, 17-19



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"D" document cited by the applicant in the international application

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

04 June 2020 (04.06.2020)

Date of mailing of the international search report

04 June 2020 (04.06.2020)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

MIN, In Gyou

Telephone No. +82-42-481-3326



INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2020/013796

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☒ Claims Nos.: 6,7
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
Claims 6, 7 are unclear, because they refer to multiple dependent claims which do not comply with PCT Rule 6.4(a).

3. ☒ Claims Nos.: 4,5,8,14-16,20
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.

2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of any additional fees.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2020/013796

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2018-529615 A	11/10/2018	CN 108137367 A EP 3353121 A1 KR 10-2018-0059476 A TW 201725184 A US 2018-0297884 A1 WO 2017-053843 A1	08/06/2018 01/08/2018 04/06/2018 16/07/2017 18/10/2018 30/03/2017
JP 3332208 B2	07/10/2002	JP 11-014334 A	22/01/1999
KR 10-0663460 B1	02/01/2007	CN 1994945 A US 2007-0151298 A1	11/07/2007 05/07/2007
US 2014-0137601 A1	22/05/2014	CN 105636915 A JP 2016-501173 A KR 10-2015-0087268 A US 9315408 B2 WO 2014-078262 A1	01/06/2016 18/01/2016 29/07/2015 19/04/2016 22/05/2014
JP 2007-132930 A	31/05/2007	FR 2893133 A1 FR 2893133 B1 JP 4601598 B2 US 2007-0102628 A1 US 7256389 B2	11/05/2007 27/12/2013 22/12/2010 10/05/2007 14/08/2007