



(51) International Patent Classification:

H01L 29/739 (2006.01) H01L 27/07 (2006.01)
H01L 25/07 (2006.01) H01L 29/24 (2006.01)

(21) International Application Number:

PCT/US2010/035713

(22) International Filing Date:

21 May 2010 (21.05.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/183,214 2 June 2009 (02.06.2009) US
12/610,582 2 November 2009 (02.11.2009) US

(71) Applicant (for all designated States except US): **CREE, INC.** [US/US]; 4600 Silicon Drive, Durham, North Carolina 27703 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ZHANG, Qingchun** [CN/US]; 108 Hickorywood Blvd., Cary, North Carolina 27519 (US). **RICHMOND, James Theodore** [US/US]; 1516 Poplar Lane, Hillsborough, North Carolina 27278 (US). **AGARWAL, Anant K.** [US/US]; 208 Black Tie Lane, Chapel Hill, North Carolina 27514 (US). **RYU,**

Sei-Hyung [KR/US]; 102 Tawny Ridge Lane, Cary, North Carolina 27513 (US).

(74) Agent: **MYERS BIGEL SIBLEY & SAJOVEC, P.A.**; P.O. Box 37428, Raleigh, North Carolina 27627 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: POWER SWITCHING DEVICES HAVING CONTROLLABLE SURGE CURRENT CAPABILITIES

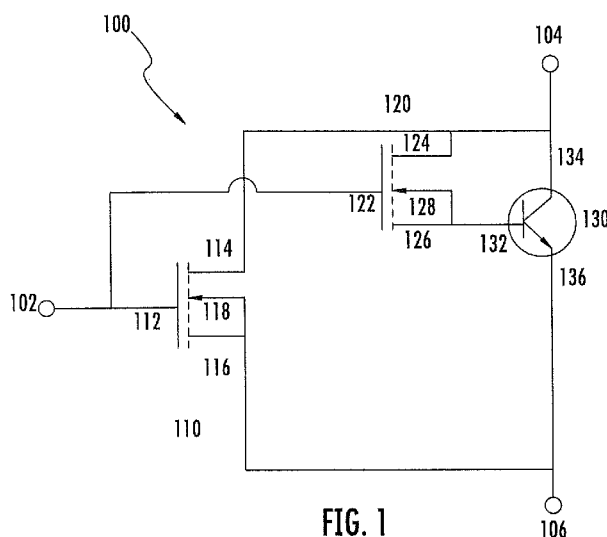


FIG. 1

(57) **Abstract:** Semiconductor switching devices include a wide band-gap power transistor, a wide band-gap surge current transistor that is coupled in parallel to the power transistor, and a wide band-gap driver transistor that is configured to drive the surge current transistor. Substantially all of the on-state output current of the semiconductor switching device flows through the channel of the power transistor when a drain-source voltage of the power transistor is within a first voltage range, which range may correspond, for example, to the drain-source voltages expected during normal operation. In contrast, the semiconductor switching device is further configured so that in the on-state the output current flows through both the surge current transistor and the channel of the power transistor when the drain-source voltage of the power transistor is within a second, higher voltage range.

WO 2010/141238 A1



Published:

— *with international search report (Art. 21(3))*

POWER SWITCHING DEVICES HAVING CONTROLLABLE SURGE CURRENT CAPABILITIES

CROSS-REFERENCE TO RELATED APPLICATION

[0001] The present application claims priority under 35 U.S.C. § 119(e) to U.S. Provisional Patent Application Serial No. 61/183,214, filed June 2, 2009, the content of which is incorporated herein by reference as if set forth in its entirety.

FIELD OF THE INVENTION

[0002] The present invention relates to semiconductor devices and, more particularly, to power semiconductor devices having surge current capabilities.

BACKGROUND

[0003] Power Metal Oxide Semiconductor Field Effect Transistors ("MOSFET") are a well known type of semiconductor transistor that may be used as a switching device in high power applications. A power MOSFET may be turned on or off by applying a gate bias voltage to a gate electrode of the device. When a power MOSFET is turned on (i.e., it is in its "on-state"), current is conducted through a channel of the MOSFET. When the bias voltage is removed from the gate electrode (or reduced below a threshold level), the current ceases to conduct through the channel. By way of example, an n-type MOSFET turns on when a gate bias voltage is applied that is sufficient to create a conductive n-type inversion layer in a p-type channel region of the device. This n-type inversion layer electrically connects the n-type source and drain regions of the MOSFET, thereby allowing for majority carrier conduction therebetween.

[0004] The gate electrode of a power MOSFET is separated from the channel region by a thin insulating layer. Because the gate of the MOSFET is insulated from the channel region, minimal gate current is required to maintain the MOSFET in a conductive state or to switch the MOSFET between its on state and off state. The gate current is kept small during switching because the gate forms a capacitor with the channel region. Thus, only minimal

charging and discharging current ("displacement current") is required during switching, allowing for less complex gate drive circuitry. Moreover, because MOSFETs are unipolar devices in which current conduction occurs solely through majority carrier transport, MOSFETs may exhibit very high switching speeds. The drift region of a power MOSFET, however, may exhibit a relatively high on-resistance, which arises from the absence of minority carrier injection. This increased resistance can limit the forward current density achievable with power MOSFETs.

[0005] Most power semiconductor devices are formed of silicon ("Si"), although a variety of other semiconductor materials have also been used. Silicon carbide ("SiC") is one of these alternate materials. Silicon carbide has potentially advantageous semiconductor characteristics including, for example, a wide band-gap, high electric field breakdown strength, high thermal conductivity, high melting point and high-saturated electron drift velocity. Thus, relative to devices formed in other semiconductor materials such as, for example, silicon, electronic devices formed in silicon carbide may have the capability of operating at higher temperatures, at high power densities, at higher speeds, at higher power levels and/or under high radiation densities. Power silicon carbide MOSFETs are known in the art that are used as switching devices in a variety of power applications because of their ability to handle relatively large output currents and support relatively high blocking voltages.

[0006] In a number of applications, the amount of current that is carried by a switch can vary significantly. By way of example, the current carried by switches used in the electrical power grid varies based on the fluctuating power demand of the users served by the power grid. Thus, the switches used in the grid must be designed to handle peak current levels, even though the average current levels may be significantly lower than the peak levels. Thus, the ability to handle surge currents is an important requirement for power switching devices. In particular, surge current capability is important for the reliability of the future power grid, due to the presence of power fluctuations and/or short circuits or other failures that can create surge current within the grid.

SUMMARY

[0007] Pursuant to embodiments of the present invention, semiconductor switching devices are provided that include a power transistor, a surge current transistor that is coupled in parallel to the power transistor and a driver transistor that is configured to drive the surge current transistor. These devices are configured so that, in their on-state, substantially all of

the output current of the device flows through the channel of the power transistor when the voltage across the channel is within a first voltage range, whereas the output current flows through both the surge current transistor and the channel of the power transistor when the voltage across the channel is within a second, higher, voltage range. The surge current transistor may comprise a bipolar junction transistor ("BJT"), the power transistor may comprise a power MOSFET, and the driver transistor may comprise a driver MOSFET. The BJT, the power MOSFET and the driver MOSFET may each comprise a silicon carbide based device.

[0008] In some embodiments, these devices may be configured to saturate a surge current flowing through the semiconductor switching device. In such embodiments, the saturation level may be a function of the voltage across the channel of the power MOSFET and a bias voltage that is applied to the gates of the power MOSFET and the driver MOSFET.

[0009] In some embodiments, the gate of the power MOSFET may be electrically connected to the gate of the driver MOSFET, the first source/drain region of the power MOSFET may be electrically connected to the collector of the BJT, and the second source/drain region of the power MOSFET may be electrically connected to the emitter of the BJT. The first source/drain region of the driver MOSFET may be electrically connected to the collector of the BJT and the second source/drain region of the driver MOSFET may be electrically connected to a base of the BJT.

[0010] In some embodiments, the switching device may comprise an n-type silicon carbide drift layer and a p-type silicon carbide base layer and a silicon carbide p-well that are on the n-type silicon carbide drift layer. An n-type silicon carbide emitter region is provided on the p-type silicon carbide base layer, and a first n-type source/drain region of the driver MOSFET is provided in an upper portion of the silicon carbide p-well. A first n-type source/drain region of the power MOSFET is provided in an upper portion of the silicon carbide p-well. The device may also include a heavily-doped p-type silicon carbide region on the p-type silicon carbide base layer adjacent the n-type silicon carbide emitter region and an electrical connection between the heavily-doped p-type silicon carbide region and the first n-type source/drain region of the driver MOSFET. In such embodiments, the n-type silicon carbide drift layer may act as the collector of the BJT, the second source/drain region of the power MOSFET and the second source/drain region of the driver MOSFET.

[0011] Pursuant to further embodiments of the present invention, semiconductor switches are provided that include a first semiconductor device that has a first switching speed and a second semiconductor device that has a second, slower, switching speed. These

switches are configured so that substantially all of the output current of the switch flows through the first semiconductor device for a first range of output current levels, whereas the output current flows through both the first and second semiconductor devices for a second, higher, range of output current levels.

[0012] In some embodiments, the first semiconductor device may be a unipolar device and the second semiconductor device may be a bipolar device. For example, the first semiconductor device may be a power MOSFET and the second semiconductor device may be BJT. The BJT and the power MOSFET may be implemented in parallel so that the collector of the BJT and the first source/drain region of the power MOSFET form a first common node, and the emitter of the BJT and the second source/drain region of the power MOSFET form a second common node. The power semiconductor switch may also include a driver MOSFET that is configured to provide a base current to a base of the BJT. In some embodiments, the BJT, the power MOSFET and the driver MOSFET may each be a silicon carbide semiconductor device.

[0013] Pursuant to still further embodiments of the present invention, power switching devices are provided that include a first wide band-gap MOSFET, a second wide band-gap MOSFET and a wide band-gap BJT. In these devices, the gate of the first MOSFET is electrically connected to the gate of the second MOSFET, and the first source/drain region of the first MOSFET is electrically connected to the first source/drain region of the second MOSFET and to the collector of the BJT. The second source/drain region of the first MOSFET is electrically connected to the emitter of the BJT, and the second source/drain region of the second MOSFET is electrically connected to the base of the BJT.

BRIEF DESCRIPTION OF DRAWINGS

[0014] **FIG. 1** is a circuit diagram of a controllable surge MOSFET ("CST") according to embodiments of the present invention.

[0015] **FIG. 2** is a graph showing the measured current that flows through the CST of **FIG. 1** as a function of the collector voltage and the gate bias voltage.

[0016] **FIG. 3** is a schematic cross-sectional diagram of an embodiment of the CST of **FIG. 1** where the device is implemented as a monolithic structure having a planar gate electrode structure.

[0017] **FIG. 4** is a schematic cross-sectional diagram of another embodiment of the CST of **FIG. 1** where the device is implemented as a monolithic structure having a trench gate electrode structure.

[0018] FIG. 5 is a plan view of yet another embodiment of the CST of FIG. 1 where the device is implemented as a hybrid structure.

[0019] FIG. 6 is a graph that illustrates the measured switching time of a controllable surge MOSFET according to embodiments of the present invention.

[0020] FIG. 7 is a graph illustrating the on-state resistance for comparably-rated silicon carbide BJTs and MOSFETs.

[0021] FIG. 8 is a photograph of a CST power switch according to certain embodiments of the present invention.

DETAILED DESCRIPTION

[0022] The invention is described more fully hereinafter with reference to the accompanying drawings, in which embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. In the drawings, the size and relative sizes of layers and regions may be exaggerated for clarity. It will be understood that when an element or layer is referred to as being "on", "connected to" or "coupled to" another element or layer, it can be directly on, connected or coupled to the other element or layer, or intervening elements or layers may be present. In contrast, when an element is referred to as being "directly on," "directly connected to" or "directly coupled to" another element or layer, there are no intervening elements or layers present. As used herein, the term "and/or" includes any and all combinations of one or more of the associated listed items. Like numbers refer to like elements throughout.

[0023] It will be understood that although the terms first and second are used herein to describe various regions, layers and/or elements, these regions, layers and/or elements should not be limited by these terms. These terms are only used to distinguish one region, layer or element from another region, layer or element. Thus, a first region, layer or element discussed below could be termed a second region, layer or element, and similarly, a second region, layer or element may be termed a first region, layer or element without departing from the scope of the present invention.

[0024] Furthermore, relative terms, such as "lower" or "bottom" and "upper" or "top," may be used herein to describe one element's relationship to another element as illustrated in the drawings. It will be understood that relative terms are intended to

encompass different orientations of the device in addition to the orientation depicted in the drawings. For example, if the device in the drawings is turned over, elements described as being on the "lower" side of other elements would then be oriented on "upper" sides of the other elements. The exemplary term "lower" can, therefore, encompass both an orientation of "lower" and "upper," depending of the particular orientation of the figure. Similarly, if the device in one of the figures is turned over, elements described as "below" or "beneath" other elements would then be oriented "above" the other elements. The exemplary terms "below" or "beneath" can, therefore, encompass both an orientation of above and below.

[0025] The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used herein, the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms "comprises," "comprising," "includes" and/or "including," when used herein, specify the presence of stated features, elements, and/or components, but do not preclude the presence or addition of one or more other features, elements, components, and/or groups thereof.

[0026] Embodiments of the invention are described herein with reference to cross-sectional illustrations that are schematic illustrations. As such, variations from the shapes of the illustrations as a result, for example, of manufacturing techniques and/or tolerances, are to be expected. Thus, embodiments of the invention should not be construed as limited to the particular shapes of regions illustrated herein but are to include deviations in shapes that result, for example, from manufacturing. For example, an implanted region illustrated as a rectangle will, typically, have rounded or curved features and/or a gradient of implant concentration at its edges rather than a binary change from implanted to non-implanted region. Likewise, a buried region formed by implantation may result in some implantation in the region between the buried region and the surface through which the implantation takes place. Thus, the regions illustrated in the figures are schematic in nature and their shapes are not intended to illustrate the actual shape of a region of a device and are not intended to limit the scope of the invention.

[0027] Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. It will be further understood that terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of this disclosure and the relevant art and will not be interpreted in an idealized or overly formal sense unless expressly so defined herein.

[0028] As used herein, source and drain regions may be generically referred to as "source/drain regions," which is a term used to refer to either a source region or a drain region.

[0029] It will likewise be appreciated that the embodiments described herein can be combined in any way and/or combination.

[0030] High power silicon carbide MOSFETs are in wide use today for applications requiring high voltage blocking such as voltage blocking of 5,000 volts or more. By way of example, silicon carbide MOSFETs are commercially available that are rated for current densities of 10 A/cm² or more that will block voltages of at least 10 kV. To form such a high power silicon carbide MOSFET, a plurality of "unit cells" are typically formed, where each unit cell comprises a single MOSFET that includes a gate electrode, a source region and a drain region. In practice, a single gate electrode is typically formed on a first side of a semiconductor substrate that acts as the gate electrode for all of the unit cells. The opposite side of the semiconductor substrate acts as a common drain (or source) for the device. A plurality of source (or drain) regions are interposed within openings in the gate electrode. These source regions are also electrically connected to each other.

[0031] As noted above, the gate electrode of a typical high power silicon carbide MOSFET extends across the entire active area of the device, with openings provided in the gate electrode to provide access to the source (or drain) regions of the unit cells. Moreover, in order to increase the rated current of the device, the number of unit cells is typically increased. As the total gate area of the device is a function of the number of unit cells, the size of the active area generally increases as the rated current is increased. As the active area of the silicon carbide MOSFET increases, so does the total area of the gate insulation layer that separates the gate electrode from the underlying channels of each unit cell of the MOSFET.

[0032] Unfortunately, it can be difficult to manufacture both silicon carbide substrates and gate insulation layers on silicon carbide substrates that are free from defects. Defects that are present in the silicon carbide substrate and/or in the gate insulation layer can cause a high power silicon carbide MOSFET to fail various specified performance parameters such as, for example, minimum breakdown voltage, current rating, etc. As the size of the active area and the gate insulation layer are increased, the probability that a fatal defect is present may also increase. As such, the manufacturing yield (i.e., the percentage of devices manufactured that meet specifications) for silicon carbide MOSFETs having high current ratings can be relatively low.

[0033] Additionally, as discussed above, in certain applications where silicon carbide or other wide band-gap semiconductor MOSFET switches are employed such as, for example, electrical power distribution, the switch must be rated to handle peak current levels that may periodically flow through the switch and/or surge currents that may result from short-circuits in the power grid. The peak surge currents may be, for example, five times or more the average current that flows through the switch. In order to handle these surge currents, the number of unit cells in each MOSFET switch must be increased by a corresponding factor. This can significantly increase the manufacturing cost, and may significantly lower manufacturing yields due to the above described problems that may result due to defects in the silicon carbide substrate and/or in the gate insulation layer. In addition, under certain bias conditions, power silicon carbide MOSFETs may become uncontrollable in that very small increases in the voltage across the channel may lead to very large increases in the current flow, with no natural saturation of the surge current level. The very high current levels that can flow during such surge conditions can damage or destroy the MOSFET and/or other equipment downstream from the MOSFET switch.

[0034] Pursuant to embodiments of the present invention, power switching devices and/or circuit configurations are provided that are capable of handling surge currents are provided. These devices may have extremely fast switching speeds during normal operating conditions (e.g., switching speeds comparable to the speeds of power MOSFETs). Although the switching speeds of the power switching devices according to embodiments of the present invention may be reduced when the devices are conducting surge current levels, even under these switching conditions the device may still exhibit switching speeds that are more than sufficient for power grids and various other applications.

[0035] According to some embodiments of the present invention, high power silicon carbide or other wide band-gap MOSFET switches are provided that include a controllable surge current capability. These devices, which are referred to herein as controllable surge MOSFETs or "CSTs", couple a MOS-gated bipolar junction transistor ("BJT") in parallel to the power MOSFET. The MOS-gated BJT may carry little or no current during normal operation of the CST. However, when surge currents are received at the CST, the driver MOSFET of the MOS-gated BJT turns on the BJT, and the surge current is split between the power MOSFET and the BJT. The power CSTs according to embodiments of the present invention may, for example, carry surge currents as high as 100 amps or more. Moreover, the CSTs according to embodiments of the present invention may naturally saturate surge

currents, thereby providing a power switch which clamps surge currents, which may protect both the CST itself and downstream equipment from surge current damage.

[0036] As known to those of skill in the art, a BJT is a three-terminal device constructed of a doped semiconductor material. A BJT includes two p-n junctions that are formed in close proximity to each other in the semiconductor material. In operation, charge carriers enter a first region of the semiconductor material (which is called the emitter) that is adjacent one of the p-n junctions. Most of the charge carriers exit the device from a second region of the semiconductor material (which is called the collector) that is adjacent the other p-n junction. The collector and emitter are formed in regions of the semiconductor material that have the same conductivity type. A third region of the semiconductor material, known as the base, is positioned between the collector and the emitter and has a conductivity type that is opposite the conductivity type of the collector and the emitter. Thus, the two p-n junctions of the BJT are formed where the collector meets the base and where the base meets the emitter. By flowing a small current through the base of a BJT, a proportionally larger current passes from the emitter to the collector.

[0037] A BJT may be a "PNP" device or an "NPN" device. In a PNP BJT, the emitter and collector are formed in p-type regions of the semiconductor material, and the base is formed in an n-type region of the semiconductor that is interposed between the two p-type regions. In an NPN BJT, the emitter and collector are formed in n-type regions of the semiconductor material, and the base is formed in a p-type region of the semiconductor that is interposed between the two n-type regions.

[0038] BJTs are current controlled devices in that a BJT is turned "on" (i.e., it is biased so that current flows between the emitter to the collector) by flowing a current through the base of the transistor. For example, in an NPN BJT, the transistor is typically turned on by applying a positive voltage to the base to forward bias the base-emitter p-n junction. When the device is biased in this manner, holes flow into the base of the transistor where they are injected into the emitter. The holes are referred to as "majority carriers" because the base is a p-type region, and holes are the predominant charge carriers in such a region under equilibrium conditions. At the same time, electrons are injected from the emitter into the base, where they diffuse toward the collector. These electrons are referred to as "minority carriers" because electrons are not the predominant charge carrier in the p-type base region under equilibrium conditions.

[0039] The base of a BJT is made to be relatively thin in order to minimize the percentage of the minority carriers (i.e., the electrons injected into the base from the emitter

in an NPN BJT) that recombine with the majority carriers that flow between the base and the emitter. The collector-base p-n junction is reverse biased by applying a positive voltage to the collector. This facilitates sweeping the electrons that are injected from the emitter into the base to the collector. BJTs are referred to as "bipolar" devices because the emitter-collector current includes both electron and hole current (i.e., both majority and minority carriers). This is in contrast to unipolar devices such as MOSFETs which only include majority carriers. The majority current that flows through the base of a BJT controls the emitter-collector current.

[0040] FIG. 1 is a circuit diagram of a CST 100 according to certain embodiments of the present invention. As shown in FIG. 1, the CST 100 includes an n-type power MOSFET 110 such as, for example, a 20 amp silicon carbide MOSFET. The power MOSFET 110 has a gate 112, a drain 114 and a source 116. An NPN power BJT such as, for example, a 20 amp silicon carbide BJT 130 is provided in parallel to the power MOSFET 110 for handling surge currents. The BJT 130 includes a base 132, a collector 134 and an emitter 136. A second n-type silicon carbide MOSFET 120 that has a gate 122, a drain 124 and a source 126 is also provided, which is referred to herein as the driver MOSFET 120. The CST 100 includes a gate terminal 102, a drain terminal 104 and a source terminal 106.

[0041] As shown in FIG. 1, the gate 112 of the power MOSFET 110 and the gate 122 of the driver MOSFET 120 are electrically connected to the gate terminal 102 of CST 100. The drain 114 of the power MOSFET 110, the drain 124 of the driver MOSFET 120 and the collector 134 of the BJT 130 are commonly coupled to the drain terminal 104 of CST 100. The source 116 of power MOSFET 110 and the emitter 136 of BJT 100 are commonly coupled to the source terminal 106 of CST 100. The driver MOSFET 120 and the BJT 130 are configured as a Darlington pair so that the channel current of the driver MOSFET 120 drives the base 132 of the BJT 130 through the source 126 of MOSFET 120. As the BJT 130 will have a high current gain, the driver MOSFET 120 may be a relatively small MOSFET as it does not have to provide a large current to drive the BJT 130.

[0042] The BJT 130 has a current gain β_{BJT} . Thus, during surge conditions where the BJT operates in its active region, the transconductance of the CST 100 $g_{\text{m,CST}}$ is a function of the transconductance $g_{\text{m,MOSFET}}$ of the driver MOSFET 120 and the current gain β_{BJT} of the BJT 130. Due to the relatively large current gain of the BJT 130, the transconductance of CST 100 may be quite high. As a result, the forward voltage drop of the CST 100 may remain relatively low, even during surge current conditions.

[0043] The CST 100 of FIG. 1 may operate as follows. An external drive circuit (not shown in FIG. 1) is connected to the gate terminal 102 of CST 100. When the external drive circuit applies a bias voltage to the gate terminal 102 of the CST 100 that is greater than the threshold voltage of gate 112 of MOSFET 110, an inversion layer is formed under the gate 112 which acts as a channel 118 that allows current to flow from the drain 104 to the source 106 of power MOSFET 110. However, so long as the drain-source voltage V_{DS} of the power MOSFET 110 (i.e., the voltage drop between drain terminal 104 and source terminal 106) is less than, for example, about 2.5 volts, the driver MOSFET 120 does not provide sufficient current to the base 132 of BJT 130 to turn BJT 130 on. Thus, for drain-source voltages of less than, for example, about 2.5 volts, the CST 100 operates essentially like a power MOSFET. However, when the drain-source voltage exceeds approximately 2.5 volts, the current flow through the channel 128 of the driver MOSFET 120 is sufficient to turn on the BJT 130. At this point, the power MOSFET 110 and the BJT 130 conduct in parallel, and the current flowing through CST 100 is split between these two current paths. In this manner, the BJT 130 can be used to handle surge currents through the CST 100.

[0044] The CSTs according to embodiments of the present invention may exhibit a number of advantages as compared to conventional power MOSFETs. First, the power MOSFET 110, the driver MOSFET 120 and the BJT 130 may all comprise silicon carbide devices (or a different wide band-gap semiconductor). Consequently, the above-noted advantages that silicon carbide and other wide band gap semiconductors may have in power applications are achieved with the CSTs according to embodiments of the present invention.

[0045] Second, due to its lower on-state drift region resistance, a silicon carbide BJT can typically conduct significantly more current than can a similarly-sized silicon carbide MOSFET. For example, a silicon carbide BJT will typically support current densities 2-5 times (or more) higher than a similarly-sized silicon carbide MOSFET. Thus, the CSTs according to embodiments of the present invention can provide a significant increase in surge current capability as compared to similarly-sized MOSFET switches. For example, assuming that the BJT supports current densities that are four times the current density supported by a similarly sized MOSFET, a CST according to embodiments of the present invention that includes a MOSFET and a similarly sized BJT (thereby resulting in a device that is approximately twice as large as a stand-alone MOSFET) can support a current that is five times higher than the current that can be supported by the stand-alone MOSFET. Thus, the CSTs according to embodiments of the present invention can support very high surge currents with a compact device.

[0046] Third, the CSTs according to embodiments of the present invention may operate at high frequencies (i.e., exhibit high switching speeds) during normal operation, as essentially all of the current flows through the power MOSFET of the CST during normal operating conditions and as the BJT is relatively small and hence does not add a large capacitance to the circuit that significantly impacts switching speed. In other words, because the BJT only turns on during surge conditions, it does not substantially affect the switching characteristics of the device under normal operating conditions, and thus the CST acts as a unipolar device under such normal operating conditions. As discussed above, because current conduction in the MOSFET occurs solely through majority carrier transport, the delay associated with the recombination of excess minority carriers that occurs in BJTs is not present in MOSFET devices, allowing for switching speeds that can be orders of magnitude faster than that of BJTs. While the switching speeds of the CSTs according to embodiments of the present invention may be reduced when the CSTs are conducting higher currents due to the bipolar nature of the current flow through the BJT, in many applications, the BJT may conduct current only a small percentage of the time.

[0047] Fourth, the CSTs according to embodiments of the present invention may have controllable (clamped) surge current capability with a low voltage drop due to the low saturation voltage of the BJT. This can help the device to survive a short-circuit without thermal failure.

[0048] Fifth, the CSTs according to embodiments of the present invention may have a low incremental fabrication cost compared to the cost of fabricating a comparably-rated MOSFET switch. In particular, the fabrication cost of a silicon carbide BJT is much less than the fabrication cost of a similarly-sized silicon carbide MOSFET, and the device yield of for the BJT is typically much higher than the yield for a comparably sized MOSFET due to the absence of a MOS channel and gate dielectric. As BJTs support higher current densities than comparably sized MOSFETs, the size of a CST chip may be much smaller than the size of a MOSFET switch that is designed to handle similar surge current levels.

[0050] FIG. 2 is a graph showing current-voltage (I-V) characteristics of the CST 100 of FIG. 1. As shown in FIG. 2, at a drain-source voltage V_{DS} of less than about 2.5 volts, the CST 100 exhibits the output characteristics of the driver MOSFET 110, showing that at low drain-source voltages, the current through the CST 100 is carried through the channel 118 of the driver MOSFET 110. However, when V_{DS} exceeds about 2.5 volts, the driver MOSFET 120 provides sufficient base current to the BJT 130 to turn the BJT 130 on,

at which point the BJT 130 starts to handle the excessive (surge) current through the CST 100.

[0051] As shown in FIG. 2, the CST 100 may support a total surge current of about 100 amps at a gate voltage V_G of 20 volts and a forward voltage drop V_{CE} of 8 volts. The total surge current is the sum of the currents through the power MOSFET 110 and the BJT 130, where the BJT 130 conducts about 60 of the 100 amps. The current flowing through the BJT 130 is limited in this case by the wire bonding in the device. FIG. 2 also shows that the surge current is well controlled in response to gate bias (i.e., if the gate voltage V_G is reduced to 10 volts, the surge current drops from about 100 amps to about 22 amps at a forward voltage drop of 8 volts). As is further shown in FIG. 2, the surge current flowing through the CSTs saturates as V_{DS} increases. By way of example, for a gate voltage of 10 volts, the total current I_{DS} through the device saturates at approximately 30 amps. As a result, surge currents are less likely to cause thermal damage to the CST 100, and the CST 100 may protect other downstream components from surge currents.

[0052] The 200 W/cm² package power dissipation limit is also shown in FIG. 2. As can be seen, during normal operation (i.e., operation under this limit), the CST 100 exhibits an I-V response that is characteristic of the response of a silicon carbide MOSFET, showing that, at these normal operating conditions, the output current is substantially carried by the power MOSFET 110. However, when surge currents occur which, as shown in FIG. 2, can far exceed the 200 W/cm² line, the I-V response deviates substantially from the characteristic response of a silicon carbide MOSFET, showing that the BJT 130 starts to carry a significant amount of the output current. While the surge currents shown in FIG. 2 clearly exceed the 200 W/cm² package power dissipation limit, these surge currents typically only occur infrequently, and for short periods of time, and hence the CST 100 can typically survive the surge currents without damage.

[0053] As is also shown in FIG. 2, the forward voltage drop at surge conduction can remain at a relatively low value (e.g., 8 volts for a surge current of 100 amps) as a result of the high transconductance of the CST 100. In contrast, mathematical calculation shows that the forward voltage drop during surge conditions can exceed 20 volts if the entire 100 amp surge current were instead conducted by a single MOSFET that has a plan view area equal to the combined areas of the power MOSFET 110 and the BJT 130 of the CST 100. This reduction in forward voltage drop from >20 volts to 8 volts can significantly reduce the thermal dissipation and thermal stress on the package.

[0054] CSTs according to embodiments of the present invention can be fabricated as either monolithic devices or as hybrid devices. **FIGS. 3** and **4** are schematic cross-sectional illustrations of two exemplary monolithic implementations of CSTs according to embodiments of the present invention, while **FIG. 5** is a plan view of hybrid CST according to embodiments of the present invention.

[0055] As shown in **FIG. 3**, pursuant to certain embodiments of the present invention, a CST **200** having the circuit diagram of CST **100** of **FIG. 1** may be implemented as a monolithic device on a single substrate. As shown in **FIG. 3**, the CST **200** includes a power MOSFET **210**, a driver MOSFET **220** and a BJT **230**. All three devices **210**, **220**, **230** are formed on the same bulk single crystal n-type silicon carbide substrate **250**. In some embodiments, the substrate **250** may be omitted. An n⁻ silicon carbide drift layer **255** is provided on the substrate **250**. A p-type silicon carbide layer **260** is provided in an upper surface of the n⁻ drift layer **255**. At least part of the p-type silicon carbide layer **260** may be heavily doped (p⁺). As discussed below, the p-type silicon carbide layer **260** may act as the base **232** of the BJT **230** and may also be used to form a p-well **262** in which the source regions of the MOSFETs **210** and **220** are formed. A heavily-doped (n⁺) n-type silicon carbide layer **265** is formed in upper regions of the p-type silicon carbide layer **260**. Additionally, a second heavily doped (p⁺) p-type silicon carbide layer **270** is provided on a portion of the p-type silicon carbide layer **260**. All of the layers **255**, **260**, **265** and **270** may comprise 4H-SiC layers.

[0056] As is further shown in **FIG. 3**, the heavily-doped (n⁺) n-type silicon carbide layer **265** comprises regions **216** and **226** which act as the sources of the MOSFETs **210** and **220**, respectively, and a region **236** that acts as the emitter of the BJT **230**. Portions of the n⁻ drift layer **255** act as the drain regions **214** and **224** of the MOSFETs **210** and **220**, respectively, and the n⁻ drift layer **255** also acts as the collector **234** of the BJT **230**. A channel region **218** is provided in the p-well **262** between the source region **216** and the drain region **214** of MOSFET **210**, and a channel region **228** is provided between the source region **226** and the drain region **224** of MOSFET **220**. An insulated gate electrode **212** of power MOSFET **210** is formed on the n⁻ drift layer **255**, the p-well **262** and the source region **216**. The gate **212** may comprise, for example, a doped polysilicon or silicon carbide layer, and the insulating layer **213** surrounding the gate **212** may comprise, for example, silicon dioxide. Likewise, an insulated gate **222** of driver MOSFET **220** is formed on the n⁻ drift layer **255**, the p-well **262**, the source region **226** and the second heavily doped (p⁺) p-type silicon carbide layer **270**. The gate **222** may comprise, for example, a doped polysilicon or silicon

carbide layer, and the insulating layer **223** surrounding the gate **222** may comprise, for example, silicon dioxide. A metal layer **246** or other conductive layer electrically connects the source region **226** of driver MOSFET **220** to the base **232** of BJT **230** through the second heavily doped (p^+) p-type silicon carbide layer **270**.

[0057] An ohmic contact **240** (e.g., a metal layer) is formed on the n^+ source region **216** (in CST **200**, the ohmic contact **240** also electrically connects source region **216** to the source region of a neighboring unit cell) and an ohmic contact **242** is formed on the emitter region **236** of BJT **230**. The ohmic contacts **240** and **242** may be electrically connected to each other by a conductive line, wire, via or the like (not shown in **FIG. 3**) to form the source terminal **206** of the CST **200**. An ohmic contact **244** is formed on the back side of the n^+ silicon carbide substrate **250** that acts as the drain terminal **204** of the CST **200**. The gate electrodes **212** and **222** are electrically connected to each other by a conductive line, wire, via or the like (not shown in **FIG. 3**) to form the gate terminal **202** of the CST **200**.

[0058] With regard to the carrier concentrations, the p^+ and n^+ conductivity type regions and epitaxial layers described above may be as heavily doped as possible without causing excessive fabrication defects. Suitable dopants for producing the p-type silicon carbide regions include aluminum, boron or gallium. Suitable dopants for producing the n-type silicon carbide regions include nitrogen and phosphorus.

[0059] Operation of the CST **200** will now be discussed. When a bias voltage that exceeds the threshold voltage of the power MOSFET **210** is applied to the gate **212**, an n-type inversion layer is created in the channel **218**, and an electron current **219** flows across the channel **218** of MOSFET **210**. This current comprises the current flowing from the source **106** to the drain **104** of the CST **100** of **FIG. 1**. As the current flow through the device increases, the drain-source voltage V_{DS} of the driver MOSFET **220** increases. When V_{DS} exceeds about 2.5 volts, an electron current **229** flows from the source **226** to the drain **224** of driver MOSFET **220** into the base **232** of BJT **230**. This electron current **229** turns on the BJT **230**. In response to this electron current **229**, an electron current **239** flows from the collector **234** of BJT **230** (i.e., substrate **250** in **FIG. 3**) to the emitter **236** of BJT **230** (i.e., SiC region **265** in **FIG. 3**) through the n^- silicon carbide layer **255** and the base **232**. Thus, once the driver MOSFET **220** and the BJT **230** turn on, the current through the device is split between the power MOSFET **210** and the BJT **230**, with the BJT **230** handling a majority of the current as the current density increases.

[0060] **FIG. 4** is a cross-sectional diagram of a CST **300** according to embodiments of the present invention that has a trench gate structure. The CST **300** may have the circuit

diagram of CST 100 of FIG. 1. As shown in FIG. 4, the CST 300 is implemented as a monolithic device on a bulk single crystal n-type silicon carbide substrate 350, and includes a power MOSFET 310, a driver MOSFET 320 and a BJT 330. It will also be appreciated that, in some embodiments, the substrate 350 may be omitted.

[0061] As shown in FIG. 4, an n⁻ silicon carbide drift layer 355 is provided on the substrate 350. A heavily doped (p⁺) p-type silicon carbide layer 360 is provided in an upper surface of the n⁻ drift layer 355. At least part of the p-type silicon carbide layer 360 may be heavily doped (p⁺). A portion 332 of the p-type silicon carbide layer 360 acts as the base of the BJT 330, while a portion 362 of the p-type silicon carbide layer 360 is used to form a p-well in which the source regions 316, 326 of the MOSFETs 310 and 320 are formed. A heavily-doped (n⁺) n-type silicon carbide layer 365 is formed in upper regions of the p-type silicon carbide layer 360. Additionally, a heavily doped (p⁺) p-type silicon carbide layer 370 is provided on a portion of the p-type silicon carbide layer 360. All of the layers 355, 360, 365 and 370 may comprise 4H-SiC layers.

[0062] As is further shown in FIG. 4, the heavily-doped (n⁺) n-type silicon carbide layer 365 comprises regions 316 and 326 which act as the sources of the MOSFETs 310 and 320, respectively, and a region 336 that acts as the emitter of the BJT 330. Upper portions of the n⁻ drift layer 355 act as the drain regions 314 and 324 of the MOSFETs 310 and 320, respectively, and the n⁻ drift layer 355 also acts as the collector 334 of the BJT 330.

[0063] An insulated gate electrode 312 of power MOSFET 310 is formed to extend through the p-type silicon carbide layer 360 and into an upper portion of the n⁻ drift layer 355. The gate 312 may comprise a silicon carbide layer, and the insulating layer 313 surrounding the gate 312 may comprise, for example, silicon dioxide. Likewise, an insulated gate electrode 322 of driver MOSFET 320 is formed to extend through the p-type silicon carbide layer 360 and into an upper portion of the n⁻ drift layer 355. The gate 322 may comprise a silicon carbide layer, and the insulating layer 323 surrounding the gate 322 may comprise, for example, silicon dioxide. A channel region 318 is provided in the p-well 362 between the source region 316 and the n⁻ drift layer 355 (which acts as the drain region 314 of MOSFET 310), and a channel region 328 is provided between the source region 326 and the n⁻ drift layer 355 (which also acts as the drain region 324 of MOSFET 320). A metal layer 346 electrically connects the source region 326 of driver MOSFET 320 to the base 332 of BJT 330 through the second heavily doped (p⁺) p-type silicon carbide layer 370.

[0064] An ohmic contact 340 is formed on the n⁺ source region 316, and an ohmic contact 342 is formed on the emitter region 336 of BJT 330. The ohmic contacts 340 and 342

may be electrically connected to each other by a conductive line, wire, via or the like (not shown in **FIG. 4**) to form the source terminal **306** of the CST **300**. An ohmic contact **344** is formed on the back side of the n^+ silicon carbide substrate **350** that acts as the drain terminal **304** of the CST **300**. The gate electrodes **312** and **322** are electrically connected to each other by a conductive line, wire, via or the like (not shown in **FIG. 4**) to form a gate terminal **302** of the CST **300**.

[0065] Operation of the CST **300** may be similar to the operation of CST **200** discussed above, and hence will not be repeated here.

[0066] While **FIGS. 3** and **4** may operate as stand-alone devices, it will be appreciated that in typical applications the devices depicted in **FIGS. 3** and **4** will comprise unit cells of a larger, high power switch that has increased current carrying and voltage blocking capability. It will be appreciated that to form such a high power CST, a plurality of the CSTs **200** or **300** would be implemented in parallel. In some embodiments, the power MOSFETs **210** or **310** may be spatially separated from the driver MOSFETs **220** or **320** and/or the BJTs **230** or **330** while, in other embodiments, the transistors may be intermixed throughout the device. In either case, the combination of an individual power MOSFET **210** (or **310**), an individual driver MOSFET **220** (or **320**) and an individual BJT **230** (or **330**) may functionally be viewed as a unit cell of the high power CST.

[0067] While **FIGS. 3** and **4** illustrate the structure of n-channel CSTs **200** and **300**, respectively, according to embodiments of the present invention, it will be appreciated that p-channel CSTs may be provided pursuant to further embodiments of the present invention. For example, in exemplary embodiments, unit cells of p-channel CSTs may be provided that have the same structure as shown in **FIGS. 3** or **4**, except that the polarity of each of the semiconductor layers is reversed.

[0068] **FIGS. 3** and **4** illustrate CSTs according to embodiments of the present invention that are implemented as monolithic devices that are formed on a single substrate. According to further embodiments of the present invention, a CST may be implemented as a hybrid device that comprises two or more chips. **FIG. 5** is a plan view of one such hybrid CST **400** according to embodiments of the present invention.

[0069] As shown in **FIG. 5**, the CST **400** comprises a first semiconductor chip **401** and a second semiconductor chip **403**. The first semiconductor chip **401** includes a power MOSFET **410** that has a source **416** that comprises most of the top surface of the chip **401** and a drain **414** that comprises the backside (substrate side) of the chip **401**. The chip **401** further includes a driver MOSFET **420** that has a source **426** that comprises an upper right

corner of the top surface of the chip **401** and a drain **424** that is common with the drain **414** of power MOSFET **410** and thus comprises the backside (substrate side) of the chip **401**.

[0070] The second semiconductor chip **403** comprises a BJT **430** that includes a base **432**, a collector **434** and an emitter **436**. As shown in **FIG. 5**, most of the top surface of chip **403** comprises the emitter **436** of BJT **430**, with the remaining portion of the top surface of the chip comprises the base **432** of the BJT **430**. The collector **434** comprises the backside (substrate side) of the chip **403**. An electrical connection **440** (shown in **FIG. 6** as a pair of wires) is provided between the source **426** of the drive MOSFET **420** and the base **432** of BJT **430** to allow the driver MOSFET **420** to provide a drive current to the BJT **430**.

[0071] The CSTs according to embodiments of the present invention may also exhibit high switching speeds, even though the devices include a bipolar junction transistor. This can be seen in **FIG. 6**, which is a graph that illustrates the measured switching time of the CST **200** of **FIG. 3**. In **FIG. 6**, curve **450** illustrates the bias voltage V_G that is applied to the gate terminal of the CST as a function of time, curve **460** illustrates the drain-source voltage V_{DS} of the CST as a function of time, curve **470** illustrates the collector current (I_{DS}) as a function of time. As shown in **FIG. 6**, a bias voltage V_G of 20 volts (curve **450**) is applied to the gate terminal of the CST. In response thereto, the drain-source voltage V_{DS} (curve **460**) is driven to nearly zero and the collector current I_{DS} (curve **470**) starts to flow. As shown in **FIG. 6**, the time for the CST to turn on is approximately 100 nanoseconds. Thereafter, the bias voltage V_G is removed (curve **450**) and, in response thereto, the drain-source voltage V_{DS} (curve **460**) increases to over 20 volts, and the collector current I_{DS} (curve **470**) shuts off. As shown in **FIG. 6**, the time for the CST to turn-off is approximately 250 nanoseconds.

[0072] Thus **FIG. 6** illustrates that the CST may have a theoretical switching speed on the order of 350 nanoseconds, which corresponds to a switching frequency of nearly 3 MHz. While actual switching speeds are typically an order of magnitude less than the theoretical switching speed, this still indicates a switching frequency on the order of 300 kHz, which far exceeds the 20 kHz switching frequency that are typically required for power grid switching applications. These high switching speeds may be obtained by the CSTs according to embodiments of the present invention because the BJT included therein acts almost as a unipolar device, and hence the delay associated with the recombination of excess minority carriers that occurs in most BJTs is less of an issue in the CSTs according to embodiments of the present invention.

[0073] **FIG. 7** is a graph illustrating the specific on-state resistance ($R_{sp,on}$) for comparable BJTs and MOSFETs. In particular, **FIG. 7** shows the specific on-state resistance for a 1.2 kV MOSFET as compared to the specific on-state resistance of a 1.2 kV BJT as a function of the drain voltage, and further shows the specific on-state resistance of a 3.3 kV MOSFET as compared to the specific on-state resistance of a 3.3 kV BJT as a function of the drain voltage V_{DS} . In particular, curve **500** is a graph of $R_{sp,on}$ for a 1.2 kV SiC BJT with a 2.5 volt offset, while curve **510** is a graph of $R_{sp,on}$ for a 1.2 kV SiC MOSFET with a gate voltage V_G of 15 volts. Curve **520** is a graph of $R_{sp,on}$ for a 3.3 kV SiC BJT with a 2.5 V offset, while curve **530** is a graph of $R_{sp,on}$ for a 3.3 kV SiC MOSFET. The dashed extension of curve **530** represents a trend line for the 3.3 kV SiC MOSFET.

[0074] As shown in **FIG. 7**, at low drain voltages, the specific on-state resistance of each power MOSFET is less than the specific on-state resistance of its comparably-rated BJT. However, as the drain voltage increases, this relationship reverses, such that the specific on-state resistance of the BJT is less than the specific on-state resistance of the comparably-rated MOSFET at drain voltages above about 3.5 volts (once the offset is accounted for). The ratio of the current that passes through the power MOSFET versus through the BJT of the CSTs according to embodiments of the present invention varies with the ratio of the specific on-state resistances of the MOSFET and BJT. Thus, **FIG. 7** shows that at low drain voltages, the current will be completely or at least primarily carried by the power MOSFET, but at higher drain voltages, the BJT will carry an increasingly larger percentage of the current.

[0075] **FIG. 8** illustrates a CST **600** according to certain embodiments of the present invention that includes a 20 amp power silicon carbide MOSFET **610**, a driver silicon carbide MOSFET **620**, and a 20 amp silicon carbide BJT **630**. Each of these transistors **610**, **620**, **630** has a 1600 volt blocking voltage. The chip sizes for the power MOSFET **610** and the BJT **630** are $4 \times 4 \text{ mm}^2$ and $3.5 \times 3.5 \text{ mm}^2$, respectively.

[0076] Thus, pursuant to some embodiments of the present invention, semiconductor switching devices are provided that include a wide band-gap power MOSFET, a wide band-gap BJT coupled in parallel to the power MOSFET, and a wide band-gap driver MOSFET having a channel that is coupled to the base of the BJT. Substantially all of the on-state output current of the semiconductor switching device flows through the channel of the power MOSFET when a voltage across the channel of the power MOSFET is within a first voltage range, which range may correspond, for example, to the voltages expected across the channel during normal operation. In contrast, the semiconductor switching device is further configured so that in the on-state the output current flows through both the BJT and the

channel of the power MOSFET when the voltage across the channel of the power MOSFET is within a second, higher voltage range.

[0077] Pursuant to further embodiments of the present invention, power semiconductor switches are provided that include a first wide band-gap semiconductor device that has a first switching speed and a second wide band-gap semiconductor device that has a second switching speed that is slower than the first switching speed. These switches are configured so that substantially all of the output current of the device flows through the first wide band-gap semiconductor device for a first range of output current levels and so that the output current of the device flows through both the first and second wide band-gap semiconductor devices for a second range of output current levels that are higher than the output current levels in the first range of output current levels.

[0078] While the present invention has been primarily described above with respect to silicon carbide MOSFETs that include a MOS-gated BJT surge current path, it will be appreciated that in other embodiments the device could comprise a wide band-gap semiconductor other than silicon carbide such as, for example, gallium nitride, zinc selenide or any other II-VI or III-V wide band gap compound semiconductor. Herein, the term wide band-gap encompasses any semiconductor having a band-gap of at least 1.4 eV. Likewise, it will be appreciated that, in other embodiments, wide band-gap power transistors could have gate insulation layers that are not oxide layers. Accordingly, it will be appreciated that embodiments of the present invention may include MISFET transistors that do not include oxide layers, and that the present invention is not limited to devices that include MOSFET transistors.

[0079] As discussed above, the CSTs according to embodiments of the present invention may facilitate handling surge currents, and may also naturally saturate surge currents. Herein, the term "surge current" refers to a current that is more than twice the current rating of the power transistor of the CST (e.g., the power MOSFET of the above-described embodiments). As is known to those of skill in the art, the current rating of a transistor is the maximum channel current that does not exceed the package power dissipation limit of the transistor package.

[0080] While the above embodiments are described with reference to particular figures, it is to be understood that some embodiments of the present invention may include additional and/or intervening layers, structures, or elements, and/or particular layers, structures, or elements may be deleted. Although a few exemplary embodiments of this invention have been described, those skilled in the art will readily appreciate that many

modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of this invention. Accordingly, all such modifications are intended to be included within the scope of this invention as defined in the claims. Therefore, it is to be understood that the foregoing is illustrative of the present invention and is not to be construed as limited to the specific embodiments disclosed, and that modifications to the disclosed embodiments, as well as other embodiments, are intended to be included within the scope of the appended claims. The invention is defined by the following claims, with equivalents of the claims to be included therein.

THAT WHICH IS CLAIMED IS:

1. A semiconductor switching device, comprising:
a wide band-gap power transistor;
a wide band-gap surge current transistor coupled in parallel to the wide band-gap power transistor; and
a wide band-gap driver transistor that is configured to drive the wide band-gap surge current transistor;
wherein the semiconductor switching device is configured so that in its on-state substantially all of an output current of the semiconductor switching device flows through a channel of the wide band-gap power transistor when a drain-source voltage of the wide band-gap power transistor is within a first voltage range; and
the semiconductor switching device is further configured so that in its on-state the output current flows through both the wide band-gap surge current transistor and the channel of the wide band-gap power transistor when the drain-source voltage of the wide band-gap power transistor is within a second voltage range having voltages that are higher than the voltages in the first voltage range.
2. The semiconductor switching device of Claim 1, wherein the wide band-gap power transistor comprises a wide band-gap power MOSFET, wherein the wide band-gap surge current transistor comprises a wide band-gap bipolar junction transistor ("BJT"), and the wide band-gap driver transistor comprises a wide band-gap driver MOSFET that is configured to provide a base current to the wide band-gap BJT.
3. The semiconductor switching device of Claim 2, wherein the semiconductor switching device is configured to saturate a surge current flowing through the semiconductor switching device.
4. The semiconductor switching device of Claim 3, wherein the saturation level is a function of the drain-source voltage of the wide band-gap power MOSFET and a bias voltage that is applied to the gates of the wide band-gap power MOSFET and the wide band-gap driver MOSFET.
5. The semiconductor switching device of Claim 1, wherein the wide band-gap surge current transistor, the wide band-gap power transistor and the wide band-gap driver transistor each comprise a silicon carbide based device.

6. The semiconductor switching device of Claim 2, wherein the wide band-gap BJT, the wide band-gap power MOSFET and the wide band-gap driver MOSFET each comprise a silicon carbide based device, and wherein a gate of the power MOSFET is electrically connected to a gate of the driver MOSFET, wherein a first source/drain region of the power MOSFET is electrically connected to a collector of the BJT, and wherein a second source/drain region of the power MOSFET is electrically connected to an emitter of the BJT.

7. The semiconductor switching device of Claim 6, wherein a first source/drain region of the driver MOSFET is electrically connected to the collector of the BJT and a second source/drain region of the driver MOSFET is electrically connected to a base of the BJT.

8. The semiconductor switching device of Claim 2, wherein the switching device comprises:

- an n-type silicon carbide drift layer;
- a p-type silicon carbide base layer and a p-type silicon carbide p-well on the n-type silicon carbide drift layer;
- an n-type silicon carbide emitter region on the p-type silicon carbide base layer;
- a first n-type source/drain region of the driver MOSFET in an upper portion of the silicon carbide p-well; and
- a first n-type source/drain region of the power MOSFET in an upper portion of the silicon carbide p-well.

9. The semiconductor switching device of Claim 8, wherein the switching device further comprises:

- a heavily-doped p-type silicon carbide region on the p-type silicon carbide base layer adjacent the n-type silicon carbide emitter region; and
- an electrical connection between the heavily-doped p-type silicon carbide region and the first n-type source/drain region of the driver MOSFET.

10. The semiconductor switching device of Claim 9, wherein the n-type silicon carbide drift layer comprises a collector of the BJT, the second source/drain region of the power MOSFET and the second source/drain region of the driver MOSFET.

11. A power semiconductor switch that conducts an output current when in an on-state, comprising:

a first wide band-gap semiconductor device that has a first switching speed;
a second wide band-gap semiconductor device that has a second switching speed that is slower than the first switching speed;

wherein the power semiconductor switch is configured so that the output current flows through the first wide band-gap semiconductor device for a first range of output current levels; and

the power semiconductor switch is further configured so that the output current flows through both the first and second wide band-gap semiconductor devices for a second range of output current levels that are higher than the output current levels in the first range of output current levels.

12. The power semiconductor switch of Claim 11, wherein the first wide band-gap semiconductor device is a unipolar device and the second wide band-gap semiconductor device is a bipolar device, and wherein the second range of output current levels comprise surge current levels.

13. The power semiconductor switch of Claim 12, wherein the first wide band-gap semiconductor device comprises a power MOSFET and the second wide band-gap semiconductor device comprises a bipolar junction transistor ("BJT").

14. The power semiconductor switch of Claim 13, wherein the BJT and the power MOSFET are implemented in parallel so that a collector of the BJT and a first source/drain region of the power MOSFET form a first common node, and an emitter of the BJT and a second source/drain region of the power MOSFET form a second common node.

15. The power semiconductor switch of Claim 14, further comprising a driver MOSFET that is configured to provide a base current to a base of the BJT.

16. The power semiconductor switch of Claim 15, wherein the BJT, the power MOSFET and the driver MOSFET each comprise a silicon carbide semiconductor device.

17. A power switching device, comprising:
a first wide band-gap MISFET having a gate, a first source/drain region and a second source/drain region;

a second wide band-gap MISFET having a gate, a first source/drain region and a second source/drain region; and

a wide band-gap bipolar junction transistor ("BJT") having a base, a collector and an emitter;

wherein the gate of the first wide band-gap MISFET is electrically connected to the gate of the second wide band-gap MISFET;

wherein the first source/drain region of the first wide band-gap MISFET is electrically connected to the first source/drain region of the second wide band-gap MISFET and to the collector;

wherein the second source/drain region of the first wide band-gap MISFET is electrically connected to the emitter; and

wherein the second source/drain region of the second wide band-gap MISFET is electrically connected to the base.

18. The high power switching device of Claim 17, wherein the BJT is configured to provide a current carrying path for at least a portion of surge currents that flow through the power switching device.

19. The high power switching device of Claim 17, wherein the BJT, the first wide band-gap MISFET and the second wide band-gap MISFET comprise silicon carbide based devices.

20. The high power switching device of Claim 17, wherein the switching device comprises:

an n-type silicon carbide drift layer that comprises the collector, the first n-type source/drain region of the power MISFET and the first n-type source/drain region of the driver MISFET;

a p-type silicon carbide base layer that comprises the base on the n-type silicon carbide drift layer;

a p-type silicon carbide p-well on the n-type silicon carbide drift layer;

an n-type silicon carbide emitter region that comprises the emitter on the p-type silicon carbide base layer;

a first gate electrode on the p-well and separated from the second n-type source/drain region of the driver MISFET and the n-type silicon carbide drift layer by a first gate insulation layer; and

a second gate electrode on the p-well and separated from the second n-type source/drain region of the power MISFET and the n-type silicon carbide drift layer by a second gate insulation layer;

wherein the first source/drain region of the driver MISFET comprises an n-type silicon carbide region in an upper portion of the silicon carbide p-well; and

wherein the first n-type source/drain region of the power MISFET comprises an n-type silicon carbide region in an upper portion of the silicon carbide p-well;

21. The high power switching device of Claim 20, wherein the switching device further comprises:

a heavily-doped p-type silicon carbide region on the p-type silicon carbide base layer adjacent the n-type silicon carbide emitter region; and

an electrical connection between the heavily-doped p-type silicon carbide region and the first n-type source/drain region of the driver MISFET.

1/4

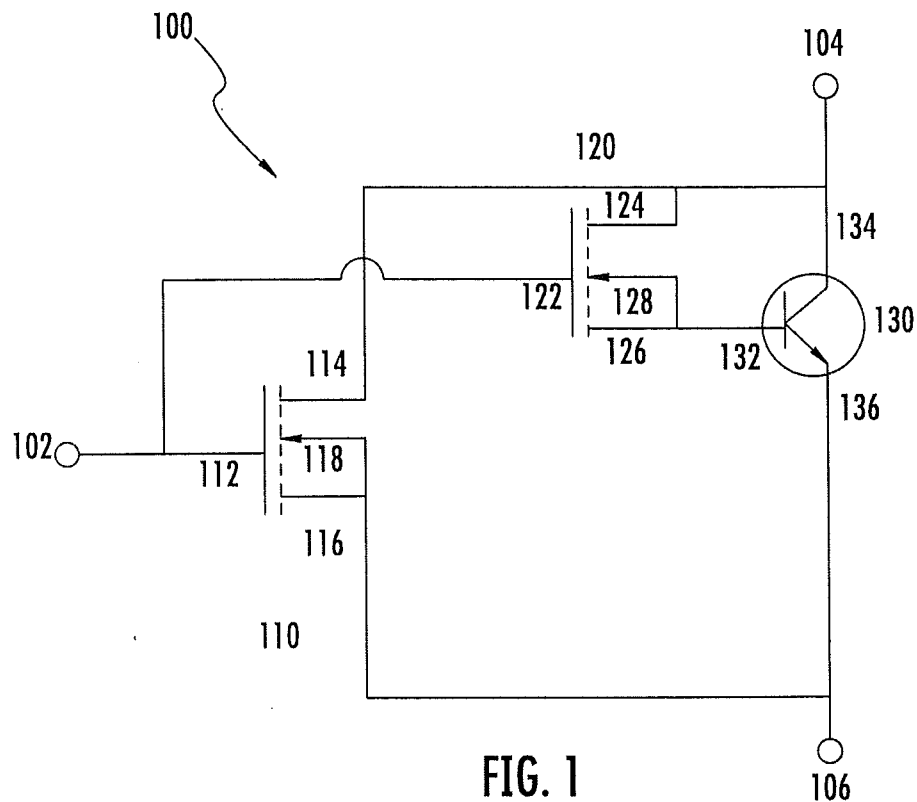


FIG. 1

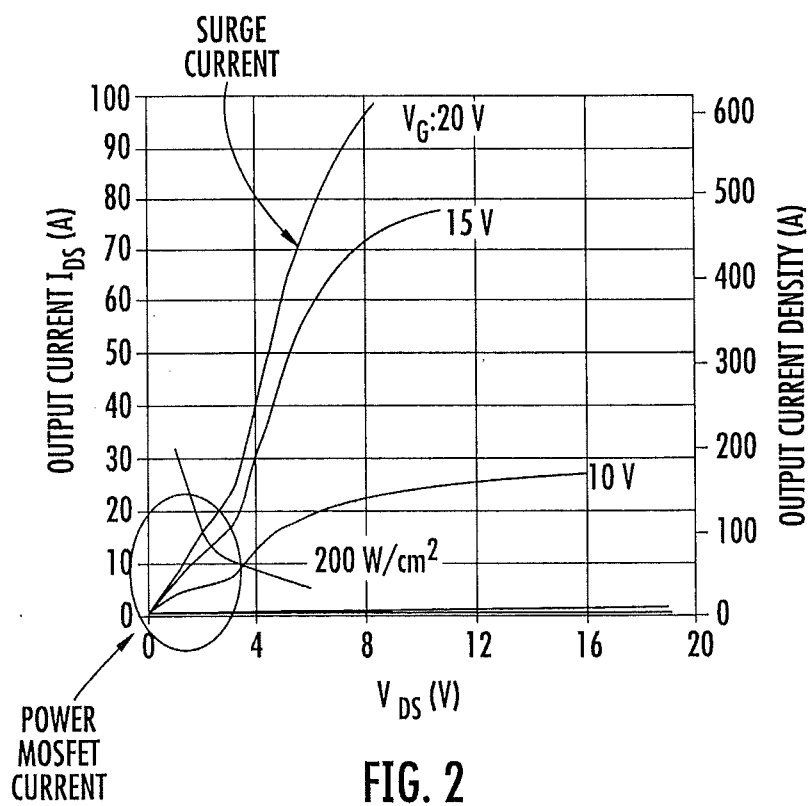


FIG. 2

2/4

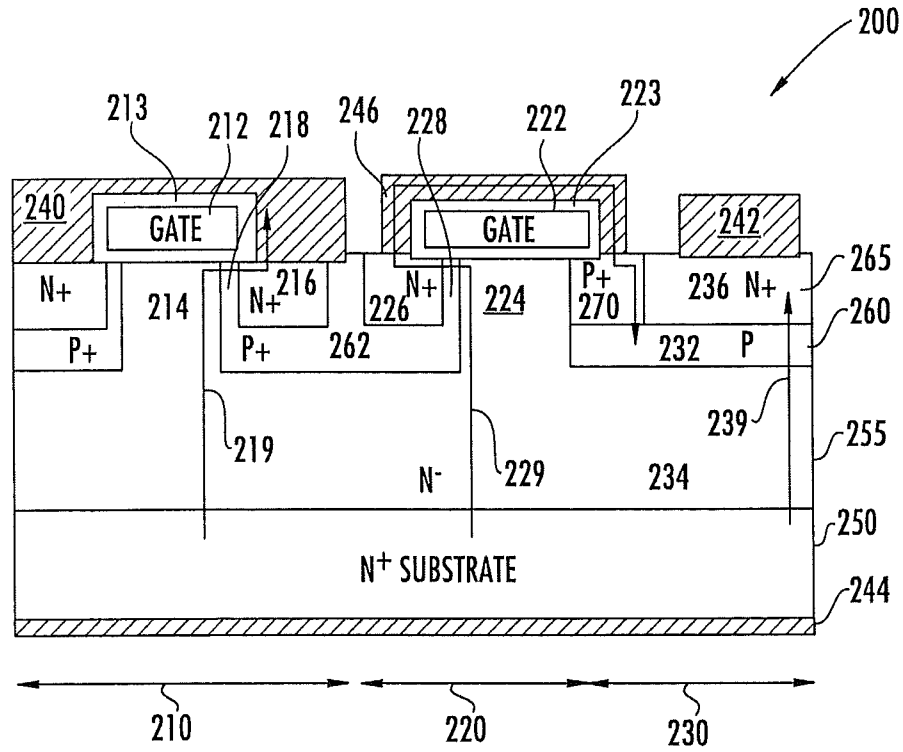


FIG. 3



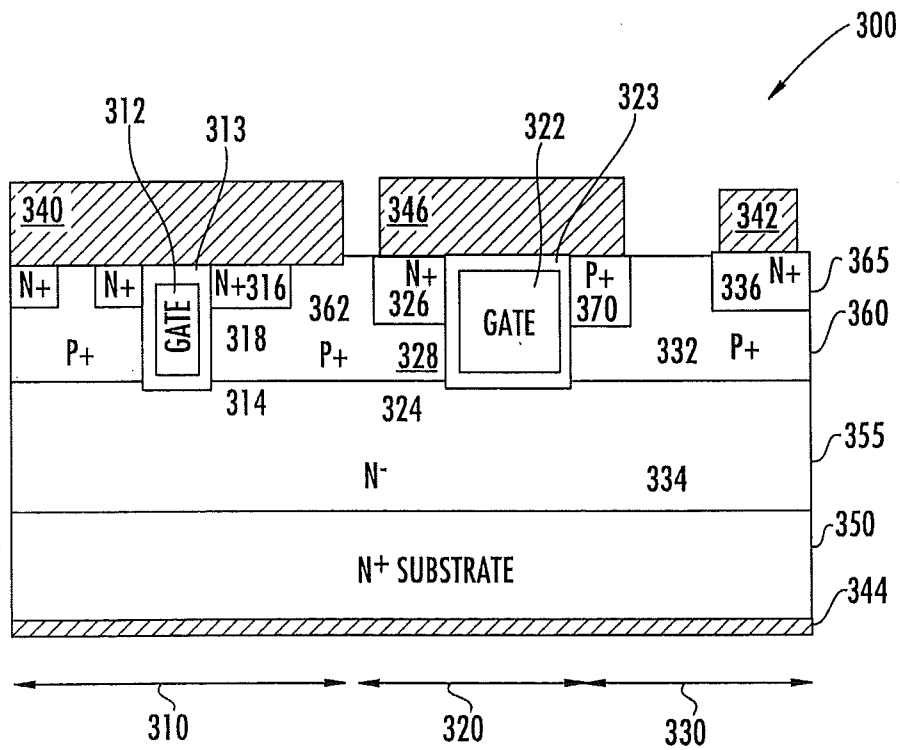


FIG. 4

3/4

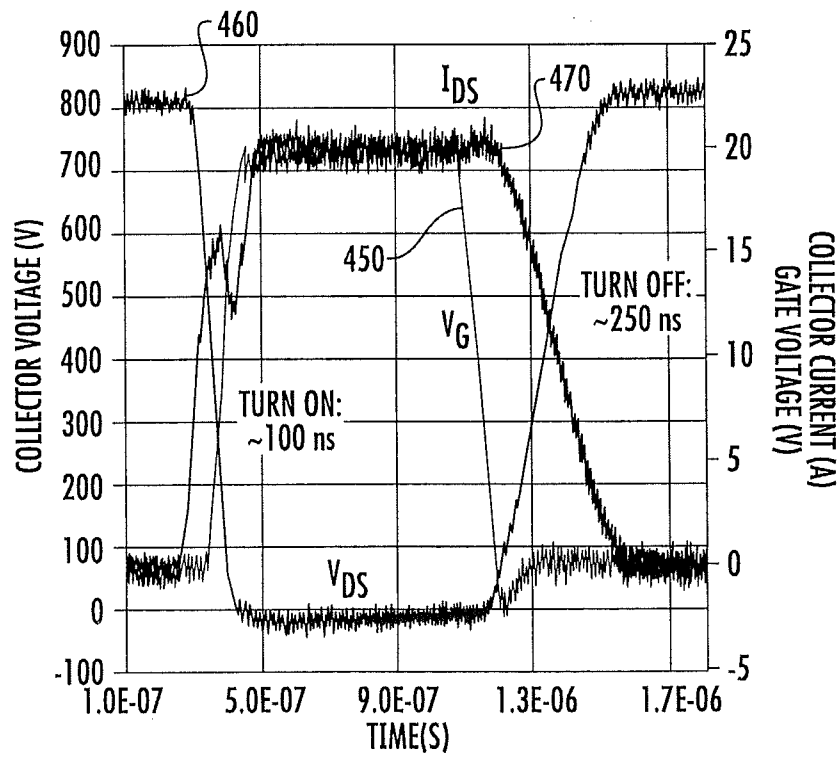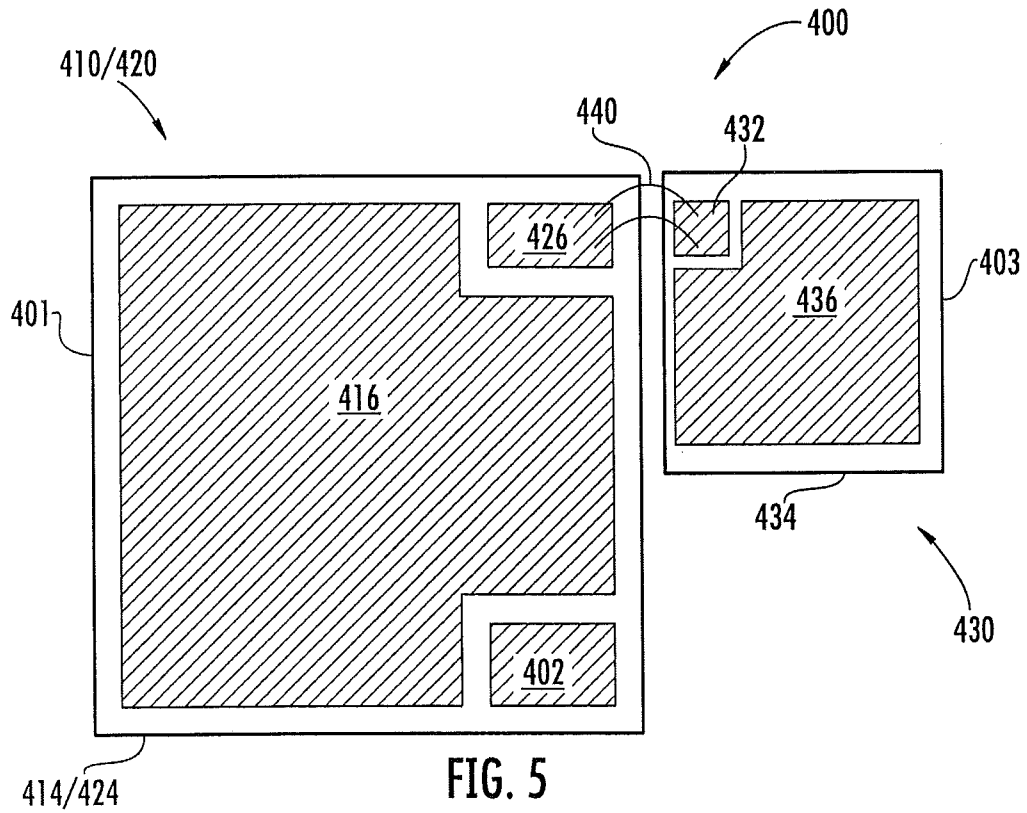

4/4

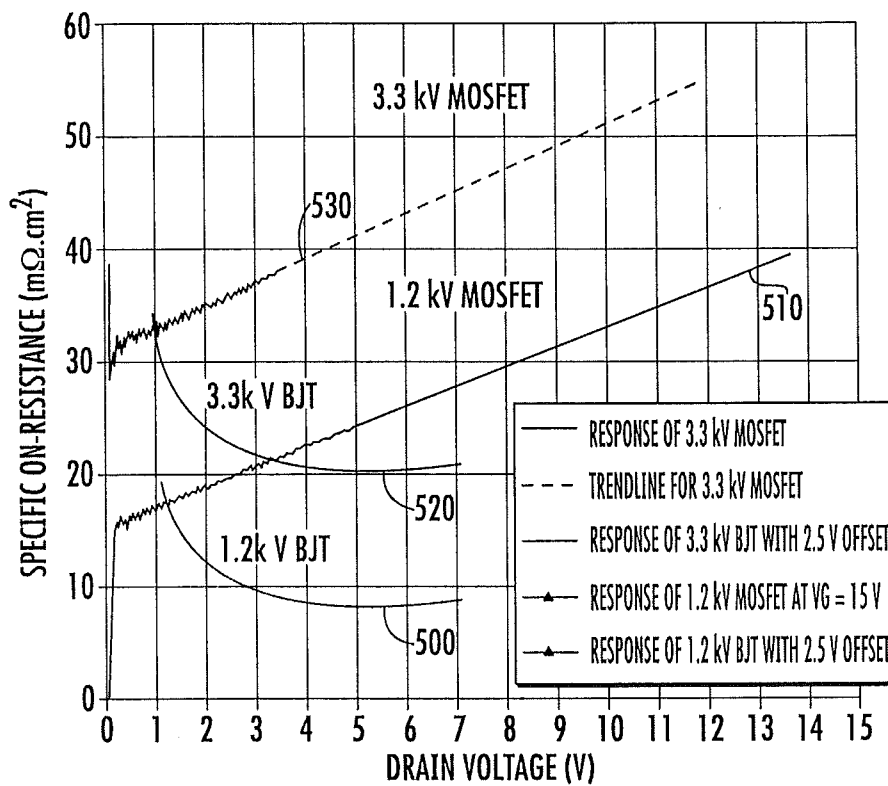


FIG. 7

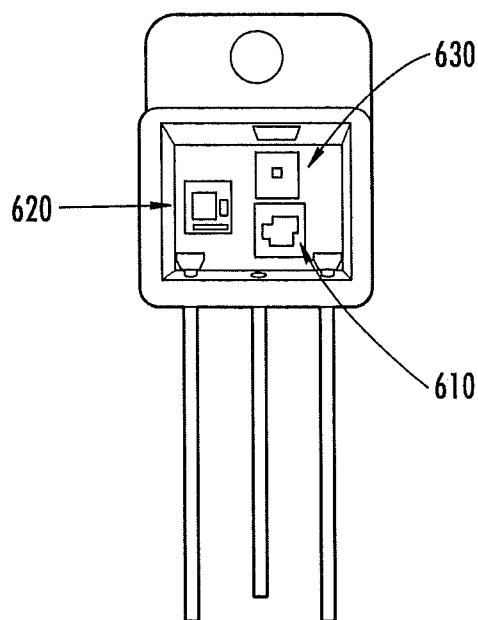


FIG. 8

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2010/035713

A. CLASSIFICATION OF SUBJECT MATTER

INV. H01L29/739 H01L25/07 H01L27/07
ADD. H01L29/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, COMPENDEX, INSPEC, IBM-TDB

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 028 977 A (K O KENNETH [US] ET AL) 2 July 1991 (1991-07-02) figure 11 -----	1-21

☐

Further documents are listed in the continuation of Box C.

☒

See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

19 July 2010

Date of mailing of the international search report

27/07/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Moehl, Sebastian

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2010/035713

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5028977	A	02-07-1991	NONE