

(51) International Patent Classification:
H04B 1/40 (2006.01) *H04B 1/12* (2006.01)(21) International Application Number:
PCT/US2009/056881(22) International Filing Date:
15 September 2009 (15.09.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/248,421 9 October 2008 (09.10.2008) US(71) Applicant (for all designated States except US):
FREESCALE SEMICONDUCTOR INC. [US/US];
6501 William Cannon Drive West, Austin, Texas 78735
(US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PRATT, Patrick**
[IE/IE]; Gormagreige Upperquarterstown, Mallow (IE).
SOBCHAK, Charles, LeRoy [US/US]; 540 Greateon
Ave, Davie, Florida 33325 (US).(74) Agents: **KING, Robert, L.** et al.; 7700 W. Parmer Lane,
MD: TX32/PL02, Austin, TX 78729 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT,
TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report (Rule 48.2(g))

(54) Title: ADAPTIVE IIP2 CALIBRATION

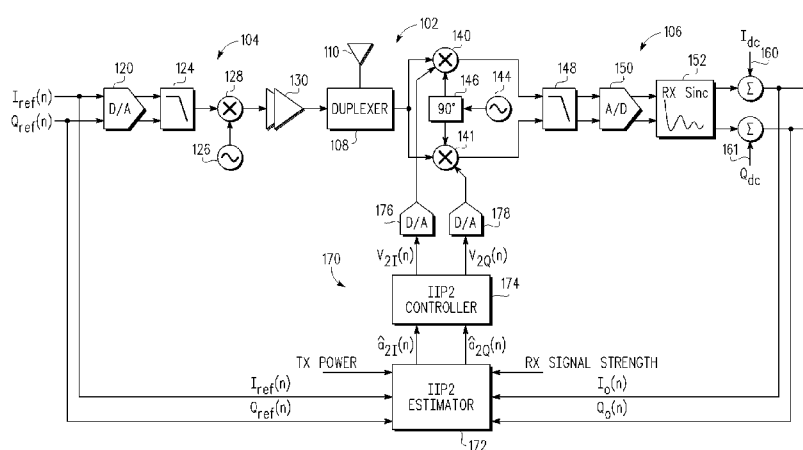


FIG. 1

(57) Abstract: A radio frequency transceiver (102), including a transmitter (104), a duplexer (108) and a direct-conversion receiver (106) including a mixer (140 and 141). An IIP2 calibration system (170), coupled to the transceiver, includes an IIP2 coefficient estimator (172) for calculating an estimate of second-order distortion intermodulation distortion, and an IIP2 controller (174) for adjusting an IIP2 tuning port of the mixer in the receiver to minimize second-order distortion intermodulation distortion in the receiver that may be caused by the receiver receiving a transmit RF signal leaking through the duplexer.

ADAPTIVE IIP2 CALIBRATION

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] This invention relates generally to radio frequency receivers, and more specifically to reducing second-order intermodulation distortion in a direct-conversion receiver.

Related Art

[0002] A radio frequency (RF) receiver uses the frequency response of a low noise amplifier (LNA), a surface acoustic wave (SAW) filter and a duplexer to attenuate signals that are far from a center frequency of the receiver sufficiently enough to not corrupt a desired signal. If the LNA and the SAW filter are removed from the analog line-up of the receiver, problems that can detrimentally affect the performance of the receiver may arise. In a transceiver, which comprises a transmitter and a receiver, one such problem is a signal transmitted by the transmitter leaking into the receiver. In a transceiver having only a duplexer to isolate the receiver from the transmitter, there is considerably less attenuation in the receiver of signals at the transmit frequency. A receiver that lacks a SAW filter requires additional and/or tighter constraints on the second-order intercept point (IP2) of the mixer. Without a sufficiently high IP2 of the mixer, the presence of second-order intermodulation distortion (IMD2) substantially reduces the sensitivity of the receiver. The IMD2 results from an unwanted squaring of the transmitted signal at the mixer of the receiver.

[0003] Most cellular wireless transceivers use a direct-conversion receiver because a high level of integration can be obtained. However, a direct-conversion receiver requires a high input-related second-order intercept point (IIP2), which is the theoretical input level at which the power of the IMD2 products are equal in power to the power of a desired signal.

[0004] When the receiver is at sensitivity and the transmitter is at maximum output power, the self-blocking effect of the transmitter can, through a second-order nonlinearity of the mixer, desensitize the receiver. In such a receiver, transmitted signals are attenuated via the duplexer by approximately 50dB; nevertheless, attenuated transmitted signals leak into the receive signal path prior to a front-end amplifier. For example, in the receiver, the duplexer attenuates a strong

signal, transmitted by the transmitter of the transceiver, of +25dBm (316milliwatts) located at 190MHz from the center frequency by only 50dB, thus resulting in a signal of -25dBm (3.16μwatts) at the input of the front-end amplifier. This -25dBm signal creates strong IMD2 products that land on the desired signal, thus producing interference.

[0005] The IP2 of the mixer in a direct-conversion receiver that lacks a SAW can vary due to manufacturing processes and/or change in temperature. Any mismatch between differential signals in the mixer causes a reduction in the IP2 from an optimal IP2. The mismatch can be due to variations in manufacturing processes or due to temperature changes during operation of the receiver, or due to both causes. The mismatch can also occur due to direct current (DC) offset, local oscillator leakage, or other factors. When there is a large mismatch between differential signals in the mixer, a worst case IP2 of approximately 25dBm can occur. The following example uses the worst case IP2 of 25dBm from measured data of a known 3G receiver.

$$[0006] \quad \text{IMD2} = P_{\text{in}} - (\text{IP}_2 - (P_{\text{in}})) = -25 - (25 - (-25)) = -75\text{dBm} = 3.16\mu\text{watts}$$

[0007] When a transmit signal is at maximum power, 25dBm, the IMD2 referred to the input of a transconductance amplifier (not shown) is -75dBm. The received power spectral density, Ior, as per the sensitivity specification set forth in the 3rd Generation Partnership Project (3GPP) standard, should be at or below -106.7dBm to achieve a 0.1% bit error rate. The thermal noise, kTBF, in this example is approximately -99dBm. Because the power of the IMD2 over the bandwidth of the desired signal is much greater than the kTBF, the sensitivity rises to -82.7dB, i.e., 24dB above the required sensitivity. Therefore, a receiver, including, in particular, a direct-conversion receiver that lacks a SAW, should have a sufficiently large IP2 to meet the specifications of the 3GPP standard.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] The present invention is illustrated by way of example and is not limited by the accompanying figures, in which like references indicate similar elements. Elements in the figures are illustrated for simplicity and clarity and have not necessarily been drawn to scale.

[0009] FIG. 1 illustrates a simplified functional block diagram of portions of a direct-conversion transceiver and a simplified functional block diagram of an IIP2 calibration system that includes an estimator and a controller;

[0010] FIG. 2 is a functional block diagram of the estimator;

[0011] FIG. 3 is a functional block diagram of the controller;

[0012] FIG. 4 is a flow diagram illustrating operation of IIP2 calibration system;

[0013] FIG. 5 is a chart of an IIP2 coefficient for a real component of a received signal versus voltage of an I-channel digital-to-analog converter;

[0014] FIG. 6 is a chart of an IIP2 coefficient for an imaginary component of a received signal versus voltage of a Q-channel digital-to-analog converter;

[0015] FIG. 7 is a chart of the IIP2 coefficient versus a code outputted by one of the I-channel and the Q-channel digital-to-analog converters; and

[0016] FIG. 8 is a chart of step size versus IIP2.

DETAILED DESCRIPTION OF THE EXEMPLARY EMBODIMENT

[0017] FIG. 1 illustrates a simplified functional block diagram of portions of a direct-conversion transceiver **102** that includes a portion of a transmitter **104** and a portion of a receiver **106**. The transmitter **104** and the receiver **106** share a duplexer **108** and an antenna **110**. The transmitter **104** includes a reference transmit baseband signal comprising an I-channel reference signal I_{ref} and a Q-channel reference signal Q_{ref} outputted from another portion (not shown) of the transmitter. The I-channel reference signal I_{ref} and the Q-channel reference signal Q_{ref} are fed into a respective digital-to-analog (D/A) converter **120**. For simplicity of illustration, only one schematic symbol is shown in FIG. 1 for the D/A converter **120** and for several other

components that occur in pairs in the I-channel and Q-channel signal paths of the transmitter **104** and the receiver **106**. The output from the D/A converter **120** is fed into an analog lowpass filter **124**. The transmitter includes a transmit oscillator **126**. The output from the lowpass filter **124**, which is at baseband, is multiplied with an output from the transmit oscillator **126** at a mixer **128**. The output from the mixer **128** is amplified by a power amplifier **130**. The output from the power amplifier **130** is a transmitted radio frequency (RF) signal that is fed into the antenna **110** through the duplexer **108**.

[0018] The receiver **106** is coupled to the antenna **110** through the duplexer **108**. To a limited extent, the duplexer **108** isolates the receiver **106** and the transmitter **104**. In an exemplary embodiment, the duplexer **108** provides approximately 50dB of isolation. A received RF signal is fed into an I-channel mixer **140** and a Q-channel mixer **141**. The received RF signal is at a different frequency from the transmitted RF frequency. In an exemplary embodiment, the frequency of the received RF signal and the frequency of the transmitted RF signal are separated by approximately 45-180 MHz, depending upon the frequency band. In an exemplary embodiment, the transceiver **102** operates in one or more frequency bands between approximately 800MHz and approximately 2GHz. In an exemplary embodiment, the transceiver **102** transmits and receives a spread-spectrum modulated RF signal, such as a signal compatible with a wideband code division multiple access (WCDMA) protocol. The receiver **106** includes a receive oscillator **144** coupled directly to the I-channel mixer **140** and coupled to the Q-channel mixer **141** via a phase shifter **146** that shifts the signal going to the Q-channel mixer **141** by 90°. The signals outputted from each mixer **140** and **141** are at baseband, and the output from each mixer is coupled to a respective analog lowpass filter **148**.

[0019] In addition to a desired component downconverted to baseband from a desired received RF signal, the signal outputted by the I-channel mixer **140** and the Q-channel mixer **141** may also have components at other frequencies as a result of non-linearities in the mixers, such as an undesired, problematic component downconverted to baseband from a RF signal transmitted by the transmitter **104** and leaked into the receiver **106** through the duplexer **108**. The undesired, problematic signal is downconverted to baseband as a result of a second-order nonlinearity in the mixer **140** and **141**. Any component at baseband other than the component downconverted from the desired, receive signal detrimentally raises the noise figure of the receiver **106**.

[0020] In general, the output $z(t)$ of a nonlinear device can be represented as follows:

$$z(t) = a_1s(t) - a_2s^2(t) - a_3s^3(t) - a_4s^4(t) - a_5s^5(t) \dots \quad (1)$$

[0021] where $s(t)$ is the signal at the input of the nonlinear device, and a_N are dimensionless gain terms associated with the nonlinear device. If all nonlinearities higher than second-order are ignored, the above equation becomes,

$$z(t) = a_1s(t) - a_2s^2(t) \quad (2)$$

where $a_2s^2(t)$ represents a second-order intermodulation distortion product.

[0022] The output $y_I(t)$ of I-channel mixer **140** and the output $y_Q(t)$ of the Q-channel mixer **141** may include a second-order intermodulation distortion product caused by a second-order nonlinearity in the mixers. Therefore, the I-channel mixer **140** is a nonlinear device, and its output $y_I(t)$ can be represented as follows (if all the nonlinearities higher than second-order are ignored):

$$y_I(t) = a_{1I}S_I(t) - a_{2I}S_I^2(t) \quad (3)$$

[0023] The actual I-channel mixer **140**, which is a nonlinear device, can be modeled as an ideal mixer receiving an input signal $I_{ref}\cos\omega_{tx}t$ that is multiplied with a receive oscillator signal $\cos\omega_{rx}t$. The output of the ideal mixer has no second-order or higher nonlinearities; therefore, the output of the ideal mixer is $(I_{ref}\cos\omega_{tx}t)(\cos\omega_{rx}t)$. The model further includes adding the second-order intermodulation distortion product $a_{2I}S_I^2(t)$ to the output of the ideal mixer, so that the output of the actual mixer becomes $(I_{ref}\cos\omega_{tx}t)(\cos\omega_{rx}t) + a_{2I}S_I^2(t)$.

[0024] It can be shown also that the second-order intermodulation distortion product for the I-channel mixer is

$$y_{2I}(t) = a_{2I}S_I^2(t) = |x(t)\cos(\omega_{rx}t+\phi_0)|^2 = |A_{ref}\cos(\omega_{tx}t+\phi_{ref})\cos(\omega_{rx}t+\phi_0)|^2 \quad (4)$$

[0025] The signal $x(t)$ that is transmitted by the transmitter **104**, which may be leaked into the receiver **106** through the duplexer **108**, can be represented as:

$$x(t) = I_{ref}\cos(\omega_{tx}t) + Q_{ref}\sin(\omega_{tx}t) \quad (5)$$

[0026] Alternatively, it can be represented as:

$$x(t) = A_{ref}\cos(\omega_{tx}t+\phi_{ref}) \quad (6)$$

[0027] At the I-channel mixer **140** in the receiver **106**, $x(t)$ is multiplied by a signal $\cos(\omega_{rx}t + \phi_0)$ from the receive oscillator **144**; therefore, for the I-channel mixer,

$$s_I = x(t)\cos(\omega_{rx}t + \phi_0) \quad (7)$$

[0028] After substituting equation (5) into equation (7), yields

$$s_I = (I_{ref}\cos(\omega_{tx}t) + Q_{ref}\sin(\omega_{tx}t)) \cos(\omega_{rx}t + \phi_0) \quad (8)$$

[0029] Performing the multiplication indicated in equation (8), yields the following equation (9):

$$s_I(t) = \frac{I_{ref}}{2}\cos((\omega_{tx} - \omega_{rx})t - \phi_0) + \frac{I_{ref}}{2}\cos((\omega_{tx} + \omega_{rx})t + \phi_0) + \frac{Q_{ref}}{2}\sin((\omega_{tx} + \omega_{rx})t + \phi_0) - \frac{Q_{ref}}{2}\sin((\omega_{rx} - \omega_{tx})t + \phi_0)$$

[0030] If there were no second-order intermodulation distortion products produced in the I-channel mixer **140**, the output of the mixer would be:

$$y_{II}(t) = a_{II}s_I(t) \quad (10)$$

[0031] However, second-order intermodulation distortion products may be produced in the I-channel mixer **140**, in which case the output of the mixer would include a second-order intermodulation distortion product. The output of the second-order intermodulation distortion product, alone, from the I-channel mixer **140** can be represented as follows:

$$y_{2I}(t) = a_{2I}s_I^2(t) \quad (11)$$

[0032] Substituting equation (9) into equation (11) yields the following equation (12),

$$y_{2I}(t) = a_{2I}\left(\frac{I_{ref}}{2}\cos((\omega_{tx} - \omega_{rx})t - \phi_0) + \frac{I_{ref}}{2}\cos((\omega_{tx} + \omega_{rx})t + \phi_0) + \frac{Q_{ref}}{2}\sin((\omega_{tx} + \omega_{rx})t + \phi_0) - \frac{Q_{ref}}{2}\sin((\omega_{rx} - \omega_{tx})t + \phi_0)\right)^2$$

[0033] Performing the indicated squaring operation in the above equation, and removing all cross terms because they result in higher frequency terms that will be filtered out by the analog filter **148**, yields the following equation (13),

$$y_{2I}(t) = a_{2I}\left(\frac{I_{ref}^2}{4}(\cos((\omega_{tx} - \omega_{rx})t - \phi_0))^2 + \frac{I_{ref}^2}{4}(\cos((\omega_{tx} + \omega_{rx})t + \phi_0))^2 + \frac{Q_{ref}^2}{4}(\sin((\omega_{tx} + \omega_{rx})t + \phi_0))^2 + \frac{Q_{ref}^2}{4}(\sin((\omega_{rx} - \omega_{tx})t + \phi_0))^2\right)$$

[0034] Removing the double-angle terms after squaring, and saving only the terms located at or near DC, from equation (13) yields,

$$y_{2I}(t) = a_{2I} \left(\frac{I_{\text{ref}}^2}{8} + \frac{I_{\text{ref}}^2}{8} + \frac{Q_{\text{ref}}^2}{8} + \frac{Q_{\text{ref}}^2}{8} \right) = a_{2I} \left(\frac{I_{\text{ref}}^2}{4} + \frac{Q_{\text{ref}}^2}{4} \right) \quad (14)$$

$$y_{2I}(t) = a_{2I} \left(\frac{I_{\text{ref}}^2 + Q_{\text{ref}}^2}{4} \right) = \frac{a_{2I}}{4} A_{\text{ref}}^2 \quad (15)$$

[0035] In a similar fashion, it can be shown that

$$y_{2Q}(t) = a_{2Q} \left(\frac{I_{\text{ref}}^2 + Q_{\text{ref}}^2}{4} \right) = \frac{a_{2Q}}{4} A_{\text{ref}}^2 \quad (16)$$

[0036] Therefore, the total in-band second-order distortion product, $y_2(t)$, of the receiver **106** can be written as follows:

$$\text{IMD2}_I = y_2(t) = y_{2I}(t) + jy_{2Q}(t) = \frac{(a_{2I} + ja_{2Q})}{4} (I_{\text{ref}}^2 + Q_{\text{ref}}^2) = \frac{a_{2I} + ja_{2Q}}{4} A_{\text{ref}}^2 = \frac{a_2}{4} A_{\text{ref}}^2 \quad (17)$$

where $a_2 = a_{2I} + a_{2Q}$.

[0037] At the IIP2 intersection, $s(t) = V_{\text{iip2}}$, and the following equations hold:

$$y_{II}(t) = a_{II} s_I(t) = y_{2I}(t) = a_{2I} s_I^2(t) \quad (18)$$

$$a_{II} = a_{2I} A_{\text{iip2I}_v} \quad (19)$$

[0038] If the IIP2 is measured in V_{rms} , then the following equation holds (with a_{II} being the linear gain of the I-channel mixer **140**).

$$a_{2I} = \frac{a_{II}}{\sqrt{2} A_{\text{iip2I}_v \text{rms}}} \quad (20)$$

[0039] If the IIP2 were measured in decibels V_{rms} , then a_{2I} could be expressed as follows:

$$a_{2I} = \frac{a_{II}}{\sqrt{2}} 10^{\frac{\text{IIP2}_I}{20}} \quad (21)$$

[0040] In a similar fashion, it can be shown that a_{2Q} can be expressed as follows:

$$a_{2Q} = \frac{a_{1Q}}{\sqrt{2}} 10^{-\frac{IIP2_Q}{20}} \quad (22)$$

[0041] Therefore, minimizing the value of a_{2I} and a_{2Q} is equivalent to maximizing the value of $IIP2_I$ and $IIP2_Q$, respectively, in the receiver **106**. Maximizing the $IIP2$ minimizes the $IMD2$.

[0042] The output from each lowpass filter **148** is fed into a sigma-delta digital-to-analog (D/A) converter **150**. The output from each D/A converter **150** is fed into a decimation filter **152**, which acts as a lowpass filter. In one embodiment, the decimation filter **152** is a sinc filter or a series of multi-rate filters. In another embodiment, the decimation filter **152** is a root raised cosine filter. The output from each decimation filter **152** is an $I_o(n)$ and a $Q_o(n)$ signal, respectively. The $I_o(n)$ signal and the $Q_o(n)$ signal include an I_{dc} signal **160** and a Q_{dc} signal **161**, respectively. The I_{dc} signal **160** and the Q_{dc} signal **161** are direct current (DC) offsets that are produced in the receiver **106** at various points in the receiver because of non-idealities in the receiver. The I_{dc} signal **160** and the Q_{dc} signal **161** may include residual DC offsets that are produced by effects, such as a common-mode effects, that are unrelated to the DC produced as a result of the second-order nonlinearity in the mixers **140** and **141**. In FIG. 1, the I_{dc} signal **160** and the Q_{dc} signal **161** are shown as being inserted into the receive path at a single point as a simplified idealization. Although the majority of the DC contributions occur in the analog section of the receiver **106**, and thus the DC could be extracted prior to the A/D converter **150**; it is, nevertheless, mathematically accurate to apply the DC after the A/D converter, where $I_{dc} = I_{dc_analog}$ (potentially quantized). The baseband signal in the receiver **106** after the decimation filter **152** can be represented as $I_o(n) + jQ_o(n)$, and this signal is fed into a demodulator (not shown).

[0043] The baseband signal in the receiver **106** after the decimation filter **152** can be further represented as follows:

$$I_o(n) + jQ_o(n) = \{a_{2I} + ja_{2Q}\} G_{tx_rx} |A_{ref}(n - D)|^2 + I_{dc} + jQ_{dc} + w_I(n) + jw_Q(n) \quad (23)$$

where $\{a_{2I} + ja_{2Q}\}$ represents $IIP2$ coefficients; G_{tx_rx} represents a linear gain from baseband in the transmitter **104** to baseband in the receiver **106**; $|A_{ref}(n - D)|^2$ represents an amplitude squared of the reference transmit baseband signal; D represents a propagation delay of a signal from baseband in the transmitter **104** to baseband in the receiver **106**; the term $I_{dc} + jQ_{dc}$ represents DC

offsets; and the term $w_I(n) + jw_Q(n)$ represents residual noise, which includes the desired receive signal, blockers, circuit noise and numerical noise. However, the term “blockers”, as used in the preceding sentence, does not include the transmit signal self-blocker at 3.84MHz. For the reference sensitivity level specified in Technical Specification 25.101 of the 3GPP standard, the worst case blocker, -49dBm at 3.25MHz, occurs when a CDMA signal (for example, Interim Standard 95, which has 1.2288Mchips per second) interferes with the 3GPP signal being received by the receiver **106**. Other examples of blockers include adjacent channel interference and co-channel interference. It can be shown that the IIP2 coefficients, a_{2I} and a_{2Q} , are proportional to the cross correlation between the received signal and the amplitude squared of the transmit signal. It can be shown also that the IIP2 coefficients, a_{2I} and a_{2Q} , are proportional to the second-order intermodulation distortion occurring in the mixer **140** and **141**, respectively. The value of D is determined for each different design of a transceiver **102**, and then remains constant for all copies of each such different design. The value of G_{tx_rx} depends upon transmit power out, P_{OUT} , of the transmitter **104**, the amount of isolation provided by the duplexer **108**, and a setting of an automatic gain control (AGC) of the receiver **106**. More precisely, G_{tx_rx} is an estimate of the linear gain from a baseband portion of the transmitter **104** through the transmitter, through the duplexer **108**, and to the receiver **106** from its front end to its baseband portion. Furthermore, it can be shown that

$$G_{tx_rx} = G_{tx}^2 G_{dx}^2 G_{rx} \quad (24)$$

where G_{tx} is a gain from the baseband portion of the transmitter **104** to the duplexer **108**, G_{dx} is a gain of, or the degree of isolation afforded by, the duplexer **108**, and G_{rx} is a gain from the front end of the receiver **106** to its baseband portion.

[0044] FIG. 1 also illustrates a simplified functional block diagram of an adaptive IIP2 calibration system **170** (hereinafter “calibration system”) that includes an IIP2 estimator (hereinafter “estimator”) **172**, an IIP2 nonlinear controller (hereinafter “controller”) **174** operatively coupled to the estimator, and D/A converters **176** and **178** operatively coupled to the mixers **140** and **141**, respectively, and to the controller. Input signals to the estimator **172** include I_{ref} and Q_{ref} signals from the baseband portion of the transmitter **104**; I_o and Q_o signals from the baseband portion of the receiver **106**; a TX_POWER signal obtained from an automatic output controller (AOC) of the transmitter **104**, whose value is indicative of the power of the

signal transmitted by the transmitter **104**; and a RX_POWER, or received signal strength indication (RSSI) obtained from the AGC of the receiver, whose value is indicative of the strength of the signal received by the receiver measured at baseband before any baseband amplifier. The RSSI may contain only the power associated with the bandwidth necessary for the desired received signal or the RSSI may contain the power associated with a wider bandwidth to allow for adjacent channels to be estimated. In one embodiment, the RSSI contains an estimate of the power over the same bandwidth as seen at the output of the decimation filter **152**. The estimator **172** outputs to the controller **174** an $\hat{a}_{2I}$ signal and an $\hat{a}_{2Q}$ signal, which are estimates of the IIP2 in the I-channel and the Q-channel, respectively. The controller **174** outputs a tuning signal v_{2I} and a tuning signal v_{2Q} , whose values are converted, at the D/A converters **176** and **178**, to analog voltages used for tuning the mixers **140** and **141**, respectively, to counteract any second-order intermodulation distortion that may be otherwise occurring in the mixers. The controller **174** adjusts the IIP2 tuning voltages v_{2I} and v_{2Q} to minimize the IIP2 coefficients a_{2I} and a_{2Q} , respectively. In an exemplary embodiment, the D/A converters **176** and **178** operate at approximately 96MHz. Advantageously, the calibration system **170** is usable during normal receive operation of the receiver **106**.

[0045] The calibration system **170** is a closed-loop, digital, adaptive, self-calibrating, on-line method for optimally tuning the IIP2 setting so as to minimize the second-order nonlinearity of the receiver **106**. The calibration system **170** compares an original transmitted signal (as it appears at baseband in the transmitter **102**) with a received signal (as it subsequently appears at baseband in the receiver **106**). The amplitude squared of the transmitted signal is used as a reference source to estimate a level of correlation between the received signal (as it appears at baseband in the receiver) and the original transmitted signal (as it appeared at baseband in the transmitter) that is then transmitted as an RF signal by the transmitter **104** and that blocks, or jams, the receiver **106** due to second-order mixing. The amplitude squared of the original transmitted signal is used as a reference source because the transmit signal that falls into the receive band (at baseband) in the receiver **106** due to second-order mixing is proportional to the amplitude squared of the original transmitted signal. The level of correlation is a measure of the amount of the transmit signal that falls into the receive band (at baseband) in the receiver **106** due to second-order mixing. The level of correlation is used as a measure of the second-order

nonlinearity of the receiver **106**. The desired receive signal also falls into the receive band (at baseband) in the receiver **106**; however, this occurs because of first-order mixing. The controller **174** adjusts the IIP2 setting of the receiver **106** to drive $\hat{a}_{2I}$ and $\hat{a}_{2Q}$ to as close to zero as it can. The calibration system **170** uses a “live” signal, or self-blocker transmitted by the transmitter **104**, as a training signal to drive the calibration algorithm. The calibration system **170** tunes the receiver **106** for maximum IIP2 in the presence of temperature drift. Because the calibration system **170** operates on-line, it can dynamically track out IIP2 temperature variations during normal operation of the transceiver **102** including during normal receive operation of the receiver **106**.

[0046] FIG. 2 is a functional block diagram of the estimator **172**. The estimator **172** distinguishes between the amount of the transmit signal that may fall into the receive band (at baseband) in the receiver **106** due to second-order mixing, and the amount of other signals in the receive band such as the desired receive signal that falls into the receive band due to first-order mixing. The estimator **172** actively estimates the IIP2 coefficients a_{2I} and a_{2Q} , based on the amplitude-squared signal transmitted by the transmitter **104** and a detected in-band signal received by the receiver **106**. The estimator **172** includes state machines **204** which, using values of the TX_POWER signal and the RSSI signal, determine an adaptive gain (or step size) μ_a of the estimator, a gain μ_{dc} of a DC estimator **260**, an adaptation (or update) rate F_C of the controller **174**, and a linear gain G_{tx_rx} . The state machines **204** are configured, initiated and triggered, and then they run autonomously. The estimator **172** includes an estimator gain look-up table **206**, a DC estimator gain look-up table **207**, a controller rate look-up table **208** and a linear gain look-up table **209**. The values of the adaptation rate coefficient μ_a of the estimator **172**, the gain μ_{dc} of the DC estimator **260**, the update rate F_C of the controller **174**, and the linear gain G_{tx_rx} of the transceiver **102** are predetermined (during a laboratory characterization stage) and are stored in the look-up tables **206**, **207**, **208** and **209** in firmware. The rate of operation of the estimator **172** is, in one embodiment, sixteen (16) times the chip rate. In one embodiment, the chip rate is 3.84MHz. The estimator **172** uses a synchronized, scaled, amplitude-squared signal transmit signal as a reference for IIP2 estimation.

[0047] The estimator **172** includes a magnitude element **212** that receives signals I_{ref} and Q_{ref} from the baseband portion of the transmitter **104** and that determines a magnitude A_{ref} of the

transmit reference signal. The signal A_{ref} incurs the delay, D , at a delay element **214**, and then the delayed magnitude is squared, or multiplied by itself, at a multiplier **216**. The resulting signal $|A_{\text{ref}}(n-D)|^2$ is filtered by a decimation filter **218**. The decimation filter **218** is used because although a WCDMA signal has a bandwidth of 5MHz, the signal $|A_{\text{ref}}(n-D)|^2$ has a bandwidth much wider than 5MHz. The decimation filter **218** reduces the bandwidth of the signal $A_{\text{ref}}^2(n-D)$ back to approximately 5MHz. In one embodiment, the decimation filter **218** is a sinc filter. In another embodiment, the decimation filter **218** is a root raised cosine filter. In any event, the decimation filter **218** is of a same type of filter as the decimation filter **152** in the receiver **106**. In addition, if the analog filter **148** or any other filters in the receiver **106** shape $|A_{\text{ref}}(n-D)|^2$, i.e., the squared version of the transmitted signal, then the decimation filter **218** should have a response that is a composite of all filters in the receiver that impact the bandwidth of the signal $|A_{\text{ref}}(n-D)|^2$. It is insufficient to model the decimation filter **152** by its latency alone. When the estimator **172** is used with the embodiment of the receiver **106** that includes a sinc filter as the decimation filter **152**, it is necessary to model, in the estimator, the sinc effect on the amplitude squared of the transmit reference signal; therefore, in such case, the estimator **172** includes a sinc filter **218** as its decimation filter **218**. The signal $|A_{\text{ref}}(n-D)|^2$ outputted by the decimation filter **218** is fed into update equations **240** where it is multiplied with ϵ_I and ϵ_Q . Separately, the signal $|A_{\text{ref}}(n-D)|^2$ is also fed into a multiplier **230** where it is multiplied with the linear gain $G_{\text{tx_rx}}$ outputted by one of the state machines **204**. Therefore, the output of the multiplier **230** is $G_{\text{tx_rx}}|A_{\text{ref}}(n-D)|^2$.

[0048] The estimator **172** determines an amount of second-order intermodulation distortion in the receiver **106** by estimating a value of a_2 using update equations **240**, as follows:

$$\hat{a}_{2I}(n) = \hat{a}_{2I}(n-1) + \mu_a A_{\text{ref}}^2(n-D) \epsilon_I(n) \quad (25)$$

$$\hat{a}_{2Q}(n) = \hat{a}_{2Q}(n-1) + \mu_a A_{\text{ref}}^2(n-D) \epsilon_Q(n) \quad (26)$$

[0049] The update equations **240** may start blindly with arbitrary initial values for the estimated $\hat{a}_{2I}$ and the estimated $\hat{a}_{2Q}$. Alternatively, the update equations **240** may start with better initial values for the estimated $\hat{a}_{2I}$ and the estimated $\hat{a}_{2Q}$ that are based on *a priori* knowledge of the range of IIP2 values of the mixer to be tuned. For example, if it is known that the IIP2 of a given mixer is in the range of 30-60dBm, one could set an initial value of $\hat{a}_2$ to the value that

corresponds to an IIP2 of 30dBm. Inputs to the update equations **240** include the signal $|A_{\text{ref}}(n-D)|$, error signals, ε_I and ε_Q , and the signal μ_a . Error signal ε_I is the difference between a desired signal I_o and an estimated signal $\hat{I}_o$. Error signal ε_Q is the difference between a desired signal Q_o and an estimated signal $\hat{Q}_o$. At occurrence of each update, each update equation **240** outputs an estimated value of a_2 , which are $\hat{a}_{2I}(n)$ and $\hat{a}_{2Q}(n)$. The estimator **172** includes multipliers **250** and **251** that multiplies $\hat{a}_{2I}(n)$ and $\hat{a}_{2Q}(n)$, respectively, with the signal $G_{\text{tx_rx}}|A_{\text{ref}}(n-D)|^2$. It can be shown that the I-channel IMD2 is proportional to $\hat{a}_{2I}(n)G_{\text{tx_rx}}|A_{\text{ref}}(n-D)|^2$, and that the Q-channel IMD2 is proportional to $\hat{a}_{2Q}(n)G_{\text{tx_rx}}|A_{\text{ref}}(n-D)|^2$.

[0050] In one embodiment, a least mean squares (LMS) based optimization algorithm is used in the estimator **172** to estimate the IIP2 coefficient. In another embodiment, a sign-sign LMS-based algorithm is used in the estimator **172**, in which case the values of the terms $\mu_a A_{\text{ref}}^2(n-D)\varepsilon_I(n)$ in the update equations **240** are replaced by their signs. In still other embodiments, one of a gradient search algorithm, a signed error algorithm, and a recursive least squares algorithm is used in the estimator **172**. In yet another embodiment, a cross correlator is used in the estimator **172**. A modified sign-sign LMS-based algorithm is used in the controller **174**.

[0051] The transmit-to-receive gain of the transceiver **102** can change, by multiple decibels, from transceiver to transceiver and from frequency band to frequency band. Therefore, the version of the sign-sign LMS-based algorithm used in the controller **174** uses a variable step size depending on the magnitude of $\hat{a}_2$. The variable step size advantageously desensitizes the transient performance of the controller **174** from variations in the transmit-to-receive gain. If the controller **174** were sensitive to such gain variations, then the transient, or settling time, of the loop would be highly variable.

[0052] The selection of a step size of the controller **174** is based on the IIP2 estimation to desensitize the transient or convergence behavior of the controller from system loop gain variation. Otherwise, variation in isolation by the duplexer **108**, for example, could hamper the tracking performance of the calibration system **170**. The gain of the estimator **172** and the update rate of the controller **174** are automatically adjusted based on the P_{OUT} of the transmitter **104** and the received signal strength of the receiver **106**, so as to maximize the signal-to-noise

ratio (SNR) and tracking performance of the calibration algorithm. Depending on the embodiment, the update equations **240** are implemented with hardware, firmware or software.

[0053] The estimator **172** includes an on-line, adaptive DC estimator **260** (hereinafter “DC estimator”) that removes any non-IIP2 DC components from the signals being estimated by the estimator **172**, thereby mitigating any degrading of the estimation of the IIP2 coefficients a_{2I} and a_{2Q} caused by such non-IIP2 DC components. In another embodiment, the IIP2 estimation algorithm runs such that I_{dc} and Q_{dc} contain all the DC in I_o and Q_o , including the DC due to IIP2 products, thereby allowing the estimator **172** to remove all the DC components from the signals being estimated. In this other embodiment, the signal $|A_{ref}(n-D)|^2$ at the output of the decimation filter **218** is further filtered with a high pass filter (not shown) such that the DC component of the signal $|A_{ref}(n-D)|^2$ is removed. This further filtering allows I_{dc} and Q_{dc} to be used by the DC estimator **260** to estimate all DC contributions in I_o and Q_o .

[0054] In one embodiment, the DC estimator **260** uses an LMS-based algorithm, and performs the following I_{dc} and Q_{dc} update equations:

$$\hat{I}_{dc}(n) = \hat{I}_{dc}(n-1) + \mu_{dc} \varepsilon_I(n) \quad (27)$$

$$\hat{Q}_{dc}(n) = \hat{Q}_{dc}(n-1) + \mu_{dc} \varepsilon_Q(n) \quad (28)$$

[0055] Depending on the embodiment, the preceding I_{dc} and Q_{dc} update equations are implemented with hardware, firmware or software. Adaptive DC correction is employed to remove any non-IIP2 DC components to more accurately measure the IIP2.

[0056] The receiver **106** includes a DC offset correction circuit (not shown), or a coarse DC offset correction circuit and fine DC offset correction circuit (not shown), which correct for all DC offsets. The coarse DC offset correction algorithm measures a coarse estimate of DC offset due to the analog portion of the receiver **106**, as this is typically run during cold calibration without a transmit signal present. The fine DC offset correction circuit runs during normal receive operation to correct all additional DC (residual DC offset remaining after the coarse DC offset correction circuit, and DC due to IMD2 effects). When the transmitter power is below a certain threshold, the DC measured by the fine DC offset will be only the residual DC of the analog portion. The fine DC offset can be used to aid in the estimation of the initial values of I_{dc}

and Q_{dc} in the DC estimator **260**.

[0057] The DC estimator **260** may start blindly with arbitrary initial values for the estimated I_{dc} and the estimated Q_{dc} . Alternatively, the DC estimator **260** may start with better initial values for the estimated I_{dc} and the estimated Q_{dc} that are based on *a priori* knowledge of the DC offset of the analog portion of the receiver **106**. By “better” it is meant that the initial values for the estimated I_{dc} and the estimated Q_{dc} are closer in value to the values of I_{dc} and Q_{dc} than are arbitrary initial values. In one embodiment, where a coarse DC offset is being applied in the analog portion, one could use the residual DC offset as a starting point (where the residual DC offset is due to the DAC size for the coarse DC steps). Because the DC offset of the analog portion changes as a function of the AGC gain, this information can be used to initiate a new DC offset measurement, instead of waiting X microseconds (see step **401** of FIG. 4). Inputs to the DC estimator **260** include error signals, ε_I and ε_Q , and a signal μ_{dc} , which is a gain of the DC estimate update equations. The variable μ_{dc} defines a step size for the DC estimate. The magnitude of the step size μ_{dc} is variably changed. Alternatively, for an initial $I_{dc}(n)$ and $Q_{dc}(n)$, the magnitude of the step size μ_{dc} is loaded into the DC estimate update equations because the value of the residual non-IMD2 DC term will likely be known from the coarse DC offset correction setting and the fine DC offset corrections setting. The step size μ_{dc} could be made larger after an AGC step for a few updates, m , because an AGC change will result in larger residual DC in the receiver **106**. When the AGC changes, the amount of DC seen by the DC estimator **260** may change, thus it would be beneficial to initially have a coarser step size μ_{dc} , then adjust it to a finer step size μ_{dc} . This improves the overall tracking performance of the DC estimation algorithm. Outputs from the DC estimator **260** comprise the signals $\hat{I}_{dc}$ and $\hat{Q}_{dc}$, which are feed into adder **270** and **271**, respectively, where they are added to the signals $\hat{a}_{2I} \hat{G}_{tx-rx} |A_{ref}(n-D)|^2$ and $\hat{a}_{2Q} \hat{G}_{tx-rx} |A_{ref}(n-D)|^2$, respectively. Therefore, the output signal from adder **270** is $\hat{a}_{2I} \hat{G}_{tx-rx} |A_{ref}(n-D)|^2 + \hat{I}_{dc}$, and the output signal from adder **271** is $\hat{a}_{2Q} \hat{G}_{tx-rx} |A_{ref}(n-D)|^2 + \hat{Q}_{dc}$. The signals $\hat{I}_{dc}$ and $\hat{Q}_{dc}$ are estimates of the non-IIP2 DC components of $I_o(n)$ and $Q_o(n)$, respectively. The output signal from each of adder **270** and **271** is fed into adder **280** and **281**, respectively, where it is subtracted from $I_o(n)$ and $Q_o(n)$, respectively, to obtain error signals, ε_I and ε_Q , respectively.

[0058] A firmware-based supervisor algorithm (see FIG. 4) configures the estimator **172** and the controller **174** for optimal convergence, based on the transmit power level and the received signal strength. The larger the transmit power with respect to the received signal strength, the more accurate and faster is the performance of the calibration system **170** and vice versa. The estimator **172** has a gain, or adaptation rate coefficient μ_a , that can be set to trade off convergence with respect to noise rejection. The larger the transmit power with respect to the received signal strength, the larger μ_a can be set and vice versa. The transmit signal acts as a signal, and the desired receive signal acts as noise, as far as the estimator **172** is concerned. Therefore, a decrease in transmit P_{out} degrades the SNR of the algorithm, and an increase in received signal strength also degrades the SNR of the algorithm. As the SNR increases, μ_a is increased to accelerate convergence. Conversely, as the SNR reduces, μ_a is decreased to average out the effect of increased noise on the estimator **172**. Similarly, the update rate F_C of the controller **174** is programmed with respect to the SNR. As the SNR reduces, the update rate F_C is reduced (i.e., the controller runs slower), and vice versa. One of the state machines **204** sets the G_{tx_rx} , based on the transmit power level and the received signal strength.

[0059] The calibration algorithm of the estimator **172** estimates a baseband component of a received signal that is correlated with the amplitude squared of a transmit signal. The estimate is proportional to the cross correlation between the receive in-band signal and the amplitude squared of the transmit signal. All other sources (e.g., receive signal, blockers, ...) appear as uncorrelated noise. The calibration algorithm of the controller **174** adjusts the D/A converters **176** and **178** to minimize the IIP2 component in the receiver **106** caused by the signal transmitted by the transmitter **104**.

[0060] The controller **174** tunes the IIP2 port of the mixers **140** and **141** to maximize the IIP2 of the receiver **106**. The step sizes are based on the IIP2 estimation. The controller **174** implements a search algorithm that finds an optimum setting of v_2 that minimizes a_2 . In one embodiment, the search algorithm that the controller **174** employs is an approximation of the LMS algorithm. In another embodiment, the search algorithm that the controller **174** employs is a steepest descent algorithm.

[0061] The LMS algorithm to minimize a_2 with respect to v_2 can be described as follows:

$$v_2(n) = v_2(n-1) - \mu_c \frac{\partial a_2}{\partial v_2} a_2 \quad (29)$$

where μ_c is the gain of the controller **174**. FIG. 8 is a chart of step size versus IIP2.

[0062] Upon substituting an estimate of $\hat{a}_2$ for the actual a_2 , equation (29) becomes:

$$v_2(n) = v_2(n-1) - \mu_c \frac{\partial \hat{a}_2}{\partial v_2} \hat{a}_2 \quad (30)$$

[0063] A first order numerical approximation of the LMS gradient can be expressed as follows, with k being the latency between v_2 and a_2 :

$$\frac{\partial \hat{a}_2}{\partial v_2} \cong \frac{\hat{a}_2(n) - \hat{a}_2(n-1)}{v_2(n-k) - v_2(n-1-k)} \quad (31)$$

[0064] The sign, alone, of the gradient can be used in the controller **174** rather than the sign and a value of the gradient, which avoids division and reduces complexity, but which preserves the directional information of gradient. If the sign, alone, of the gradient is used, then equation (31) can be further approximated as follows:

$$\frac{\partial \hat{a}_2}{\partial v_2} \approx \text{sgn}\{\hat{a}_2(n) - \hat{a}_2(n-1)\} \text{sgn}\{v_2(n-k) - v_2(n-1-k)\} \quad (32)$$

[0065] Equation (32) can be substituted into equation (30). Equation (30) then becomes:

$$v_2(n) = v_2(n-1) - \mu_c \{\text{sgn}\{\hat{a}_2(n) - \hat{a}_2(n-1)\} \text{sgn}\{v_2(n-k) - v_2(n-1-k)\}\} \hat{a}_2 \quad (33)$$

[0066] FIG. 5 is a chart of an IIP2 coefficient for a real component of a received signal versus voltage of an I-channel D/A converter **176**.

[0067] FIG. 6 is a chart of an IIP2 coefficient for an imaginary component of a received signal versus voltage of a Q-channel D/A converter **178**. In general, the shape of the curve in FIG. 5 is different from the shape of the curve in FIG. 6. Accordingly, the minimum $\hat{a}_{2I}$ and its corresponding v_{2I} for the I-channel shown in FIG. 5 are different from the minimum $\hat{a}_{2Q}$ and its corresponding v_{2Q} for the Q-channel shown in FIG. 6.

[0068] FIG. 7 is a chart of a cost function, or the IIP2 coefficient versus a code outputted by one of the I-channel D/A converter **176** and the Q-channel D/A converter **178**. The controller **174**

selects a code that produces a lowest a_2 .

[0069] FIG. 8 is a chart of an exemplary embodiment of step size versus IIP2. For the exemplary embodiment shown in FIG. 8, the gained estimate of a_2 in equation (33), i.e., $\mu_c \hat{a}_2$, can have one of the values $\frac{1}{2}$, 1 and 2, depending on the value of a_2 , the value of a_2 being proportional to IIP2. For example, if the value of the IIP2 is less than -60dBm, the step size is $\frac{1}{2}$; if the value of the IIP2 is greater than -50dBm, the step size is 2; otherwise, the step size is 1. Alternatively, a 10dB margin of error could be added to the value of the IIP2 to ensure enough margin for temperature variations. When the TX_POWER is weak and the RSSI is strong or interferences are strong, it may not be beneficial to run the calibration algorithm. Having an additional margin ensures that during the periods that the calibration algorithm is not running, the receiver **106** still has an excellent IIP2. The use of a nonlinear, sign-sign variation of the LMS algorithm in the controller **174** advantageously makes the closed loop dynamics less sensitive to variations in gain.

[0070] Alternatively, the gained estimate of a_2 in equation (33), i.e., $\mu_c \hat{a}_2$, can be replaced by its sign, i.e., $\text{sgn}\{\mu_c \hat{a}_2\}$. This replacement means that the controller **174** has no gain.

$$\mu_c \hat{a}_2 \rightarrow \text{sgn}\{\mu_c \hat{a}_2\} = 1 \quad (34)$$

[0071] This replacement allows the algorithm to be desensitized from variations in the linear gain, $G_{\text{tx_rx}}$, particularly variations in the amount transmitter-receiver isolation afforded by the duplexer **108**. With this replacement, no multipliers or gain stages are required in the controller **174**.

[0072] Alternatively,

$$\mu_c \hat{a}_2 \rightarrow \text{sgn}\{\mu_c \hat{a}_2\} = C \quad (34a)$$

where the gain C could be derived from a step size look-up table **342** in which the value of C is a function of a present value of $\hat{a}_2$.

[0073] Equation (34a) can be substituted into equation (33). Equation (33) then becomes:

$$v_2(n) = v_2(n-1) - C \text{sgn}\{\hat{a}_2(n) - \hat{a}_2(n-1)\} \text{sgn}\{v_2(n-k) - v_2(n-1-k)\} \quad (35)$$

[0074] where k represents a delay, measured in number of samples, for a reaction to occur in $\hat{a}_{21}$

and $\hat{a}_{2Q}$ after a change in v_{2I} and v_{2Q} , respectively. The presence of the k term assures that v_{2I} and v_{2Q} is proper aligned with $\hat{a}_{2I}$ and $\hat{a}_{2Q}$, respectively. It takes a certain amount of time, after changing v_{2I} and v_{2Q} , to update the D/A converters **176** and **178**, and for a new IMD2 to be passed through analog and digital portions of the receiver **106** and into the estimator **172** updating $\hat{a}_{2I}$ and $\hat{a}_{2Q}$ and finally passing these estimates into the IIP2 algorithm of the controller **174**. If the delay in the I-channel is different from the delay in the Q-channel, the value k can be replaced with k_I and k_Q , respectively. This delay mismatch could be the result of I/Q mismatches of the analog filters **148**. If these delays are different, one must make sure that v_{2I} and v_{2Q} are always updated at the same instant regardless of when the new estimates of $\hat{a}_{2I}$ and $\hat{a}_{2Q}$ are ready. Alternatively, to ensure that v_{2I} and v_{2Q} are updated at the same instant, one can choose the larger of k_I and k_Q and use it for both v_{2I} and v_{2Q} .

[0075] The controller **174** comprises an I-channel controller **300** and a Q-channel controller. The I-channel controller **300** and the Q-channel controller operate independently of each other. FIG. 3 illustrates a functional block diagram of the I-channel controller **300**. A functional block diagram of Q-channel controller is not shown because it is substantial similar to I-channel controller **300**.

[0076] The I-channel controller **300** operates at a rate of F_C . The I-channel controller **300** receives values of $\hat{a}_{2I}$ from the estimator **172** at a rate equal to the rate of operation of the estimator. Usually, the rate of operation F_C of the controller **174** is less than or equal to the rate of operation of the estimator **172**. In one embodiment of a 3G transceiver, the rate of operation F_C of the controller **174** is two (2) to thirty-two (32) times the chip rate. F_C is a function of the data rate, and, for the long term evolution (LTE) standard, the data rate can be smaller or larger, i.e., the data rate is a function of the symbol/bit/chip rate. A value of $\hat{a}_{2I}$ is fed into a differentiator **304**, where a difference between a present value of $\hat{a}_{2I}$ and a previous value $\hat{a}_{2I}$ is performed, i.e., $\hat{a}_{2I}(n) - \hat{a}_{2I}(n-1)$. Alternatively, a true derivative is performed at the differentiator **304**. The output from the differentiator **304** is fed into a sign element **308**, the output of which is defined as

$$\text{sgn}\{a_{2I}(n)-a_{2I}(n-1)\} \quad (36)$$

[0077] The output of the sign element **308** can be theoretically one of -1, 0 and +1. However,

the output of the sign element **308** is almost certainly either +1 or -1. It is unlikely that the output of the sign element **308** be zero because noise is always present.

[0078] The output $v_{2I}(n)$ is fed back into a differentiator **330**, where a difference between a present value of v_{2I} and a previous value v_{2I} is performed, i.e., $v_{2I}(n) - v_{2I}(n-1)$. The output from the differentiator **330** is fed into a sign element **334**, the output of which is defined as

$$\text{sgn}\{v_{2I}(n)-v_{2I}(n-1)\} \quad (37)$$

[0079] However, for the sign element **334**, the operation $\text{sgn}\{0\}$ is defined as being equal to the value 1, to avoid stalling on start-up of the controller **174**. Therefore, the output of the sign element **334** is always either +1 or -1. The output of the sign element **334** is fed into a delay element **338** that delays the signal by k samples. The output of the delay element **338** is defined as

$$\text{sgn}\{v_{2I}(n-k)-v_{2I}(n-1-k)\} \quad (38)$$

[0080] Equation (36) and equation (38) are multiplied at the gradient direction element **312**. The output of the gradient direction element **312** is defined as

$$\text{sgn}\{a_{2I}(n)-a_{2I}(n-1)\} * \text{sgn}\{v_{2I}(n-k)-v_{2I}(n-1-k)\} \quad (39)$$

[0081] The output of the gradient direction element **312** is the gradient direction of the change in a_2 with respect to a change in v_2 . The gradient direction is one of -1, 0 and +1. The gradient direction is based a combination $\{\hat{a}_{2I}, v_{2I}\}$ that consists of the sign of the derivative of the $\hat{a}_{2I}$ and the sign of the derivative of the v_{2I} . The output of the gradient direction element **312** is as follows:

[0082] If $\{-1, -1\}$ or $\{1, 1\}$ then the gradient direction is -1.

[0083] Else if $\{+1, -1\}$ or $\{-1, +1\}$ then the gradient direction is +1.

[0084] Otherwise, the gradient direction is 0, i.e., $\text{sgn}\{\Delta\hat{a}_{2I}\} = 0$.

[0085] The output of the gradient direction element **312**, which is either +1 or -1, is fed into a dynamic step size limiter **316**. The dynamic step size limiter **316** ensures stability. The controller includes a step size look-up table **342** in which are stored a plurality of values of $\hat{a}_{2I}$ and associated step sizes C (for example, -2, -1, -0.5, +0.5, 1, 2). The step size C reduces as $\hat{a}_2$

diminishes. As well, one could control the step size as a function of the output of the gradient direction element **312**. Once the output of the gradient direction element **312** switches between +1 and -1 on consecutive updates, the algorithm of the controller **174** is getting closer to the minima (or, most likely, has passed the minima). When this occurs, the step size can be reduced. The step size could be a function of the integral of the output of the gradient direction element **312**. As the integral of the output of the gradient direction element **312** goes to zero, the step size could be decreased. At the dynamic step size limiter **316**, the step size C from the step size look-up table **342** and the gradient direction from the gradient direction element **312** are combined and outputted to an adder **320**. The value and sign of the output from the dynamic step size limiter **316** determine which direction and by what amount to change, or step, the next setting of v_2 . At the adder **320**, the previous value of $v_2(n)$ is updated by the output from the dynamic step size limiter **316**, to produce $v_2(n+1)$, i.e., $v_2(n+1) = v_2(n) \pm C$. At a delay element **324**, $v_2(n+1)$ is delayed by one sample, thereby becoming $v_{2I}(n)$. The bottom input to the adder **320** (i.e., output of the delay element **324**) is $v_{2I}(n)$. The output of the adder **320** is $v_{2I}(n+1)$. The input to the delay element **324** is $v_{2I}(n+1)$.

[0086] FIG. 4 is a flow diagram **400** illustrating operation of the calibration system **170**. The method of operation of the calibration system **170** estimates the IIP2 coefficient, and minimizes the IIP2 estimation. The method of operation of the calibration system **170** starts at step **401**. At step **403**, a determination is made whether TX_POWER is greater than a predetermined level F . If it is not, the method returns to step **401**. If it is, the method proceeds to step **405**. At step **405**, a determination is made whether RSSI is less than a predetermined level H . If it is, the method proceeds to step **407**. If it is not, the method returns to step **401** and waits a predetermined period of X microseconds for a change to occur in the level of one or both of the TX_POWER and the RSSI. In addition, any change in the AGC settings, the RSSI, or the TX_POWER could initiate an update by the estimator **172**. At step **407**, state machines **204** determine whether a change in one or more of G_{TX_RX} , μ_a , F_C and μ_{dc} is required, based upon the present level of TX_POWER and RSSI, and any such required change is made. At step **409**, the estimator **172** operates, which estimates values of $\hat{a}_{2I}(n)$ and $\hat{a}_{2Q}(n)$. At step **411**, the controller **174** operates, which minimizes $V_{2I}(n)$ and $V_{2Q}(n)$, thereby minimizing IIP2 in the receiver **106**. At step **413**, the flow returns to step **401**.

[0087] Maximum SNR means that the transmitter P_{OUT} is 24dBm at receive sensitivity and that there are no in-band blockers. As the SNR decreases, the adaptive gain μ_a of the estimator **172** is turned down proportionally and the adaptation (or update) rate F_C of the controller **174** is decreased proportionally. As the SNR decreases, the IIP2 becomes less critical; however, it is still desirable to be able to track out temperature drift of the IIP2.

[0088] As the transmit power reduces, the performance of the calibration system **170** becomes less critical. The gain μ_a of the estimator **172** is automatically scaled with P_{OUT} via G_{tx_rx} isolation gain setting (i.e., set via firmware as a function of P_{OUT} and received signal strength). A lower gain μ_a of the estimator **172** increases settling or latency of the estimator, which, in the limit, leads to instability. The adaptation (or update) rate F_C of the controller **174** is reduced to facilitate reduction in the gain μ_a of the estimator **172**.

[0089] As received signal strength increases above sensitivity, the performance of the calibration system **170** becomes less critical. As the received signal strength increases, the adaptive gain μ_a and the adaptation (or update) rate F_C are turned down. The adaptation (or update) rate F_C of the controller **174** becomes progressively slower as received signal strength increases. For a high enough received signal strength, the calibration algorithm is essentially stalled or turned off.

[0090] The desired receive signal and in-band blockers act as uncorrelated “noise” sources. The larger the power of the desired receive signal plus the in-band blockers is, the smaller is the SNR recognized by the estimation algorithm. The “linear” residual baseband component dominates SNR recognized by the estimation algorithm.

[0091] As the signal strength of the desired signal plus any in-band blocker increases, the gain μ_a of the estimator **172** is reduced to maintain a required level of noise rejection. The rate F_C of the controller **174** is reduced to maintain overall stability of the calibration algorithm. As transmit power reduces, the G_{tx_rx} of the calibration algorithm decreases proportionally and the adaptation (or update) rate F_C of the controller **174** (the rate of the calibration algorithm) is decreased, to maintain loop stability. As transmit power decreases below a predetermined level and/or as the received signal strength increases above a predetermined level, adaptation is essentially off.

[0092] As the transmit-receive isolation of the duplexer **108** increases above its specified minimum, G_{tx_rx} decreases proportionately at a 2:1 rate. For every 1dB increase in the transmit-

receive isolation provided by the duplexer **108**, G_{tx_rx} decreases by 2dB. Without knowing what the reduction in isolation is, any such reduction results in slower convergence of the estimator **172** and a 2:1 proportional reduction in the a_2 estimate. The controller **174** is designed without any gain terms to desensitize it from such gain variations. For every 1dB increase in gain before the mixer **140** and **141**, the IMD2 will increase by 2dB.

[0093] The calibration system **170** is effective at any SNR; however, the calibration system is most effective when the receiver **106** is at sensitivity and the transmitter **104** is at maximum power out, P_{OUT} . The calibration system **170** maximizes IIP2 performance when the receiver **106** is at sensitivity (i.e., attempting to receive a signal at approximately -106.7dBm), and when the transmitter **104** is at maximum P_{OUT} and the transmit signal detrimentally leaking into the receiver, which, after attenuation by the duplexer **108**, is at approximately -25dBm (i.e., several orders of magnitude stronger than the receive signal). If the SNR at the estimator **172** is sufficient at the maximum IIP2, then the calibration system **170** tunes to that point. Therefore, although the SNR will not be best when the transmitter **104** is not at maximum power, the calibration system **170** still can tune to the optimal IIP2.

[0094] The calibration system **170** optimizes IIP2 performance to allow the receiver **106** to satisfy the linearity requirement of third generation (3G) Universal Mobile Telecommunications System (UMTS) receivers.

[0095] The calibration system **170** may include a processor (not shown), operatively coupled to the estimator **172** and to the controller **174**, which controls some of or all the operation of the calibration system **170**. It should be understood that all circuitry described herein may be implemented either in silicon or another semiconductor material or alternatively by software code representation of silicon or another semiconductor material.

[0096] In one embodiment, the transceiver **102** and the calibration system **170** are disposed on an integrated circuit fabricated using a deep dual-oxide, complementary metal oxide semiconductor (CMOS) process.

[0097] Although the invention is described herein with reference to specific embodiments, various modifications and changes can be made without departing from the scope of the present invention as set forth in the claims below. For instance, although the exemplary embodiments

show that the invention is used with a direct-conversion 3G receiver **106** that lacks both an LNA and a SAW filter, the invention is usable in a direct-conversion 3G receiver that includes one of, or both, an LNA and a SAW filter. Furthermore, the invention is not limited to use with a direct-conversion 3G receiver; the invention is usable in any type of receiver. Although the exemplary embodiments show that the calibration system **170** is used with a transceiver **102** that uses spread-spectrum RF modulation, the invention is usable with a transceiver that uses any of various other RF modulations in which the transmitter **104** transmits at the same moment as the receiver **106** receives. Although the exemplary embodiments show that the calibration system **170** is used with the WCDMA protocol, the invention is usable with other types of protocols. Although the exemplary embodiment of the transceiver **102** operates in one or more frequency bands in a range between approximately 800MHz and approximately 2GHz, the invention is also usable with a transceiver **102** that operates in one or more frequency bands outside of that range. Although the exemplary embodiments show that the calibration system **170** is used to tune the second-order intercept point (IP2) to reduce second-order intermodulation distortion (IMD2), the invention also applies to any higher order intercept point (IP_n) and a corresponding higher order intermodulation distortion product (IMD_n), where n is an even integer. Although in one exemplary embodiment, the transceiver **102** and the calibration system **170** are disposed on an integrated circuit fabricated using CMOS technology; the invention can also be used with an integrated circuit fabricated using other technologies.

[0098] Accordingly, the specification and figures are to be regarded in an illustrative rather than a restrictive sense, and all such modifications are intended to be included within the scope of the present invention. Any benefits, advantages, or solutions to problems that are described herein with regard to specific embodiments are not intended to be construed as a critical, required, or essential feature or element of any or all the claims.

[0099] Unless stated otherwise, terms such as “first” and “second” are used to arbitrarily distinguish between the elements such terms describe. Thus, these terms are not necessarily intended to indicate temporal or other prioritization of such elements.

[00100] What is claimed is:

CLAIMS

1. An input-related, second-order intercept point (IIP2) calibration system for a receiver of a transceiver including a transmitter, comprising:
 - an estimator, coupled to a transmitter of a transceiver and to a receiver of the transceiver, for calculating an estimate of second-order intermodulation distortion in the receiver as a result of second-order intermodulation distortion occurring in a mixer of the receiver, wherein the estimator uses a live transmit signal from the transmitter as reference signal; and
 - a controller, coupled to the estimator, for adjusting an IIP2 tuning port of the mixer, based on the estimate of second-order intermodulation distortion in the receiver, to reduce second-order intermodulation distortion in the receiver.
2. The IIP2 calibration system of claim 1, wherein the estimator eliminates direct current from a baseband receive signal, while calculating the estimate of second-order intermodulation distortion.
3. The IIP2 calibration system of claim 2, including state machines for configuring the estimator and the controller, the configuring being based on a power output of the transmitter and a received signal strength of the receiver.
4. The IIP2 calibration system of claim 3, wherein a state machine sets a gain of the estimator and a rate of the controller, based on a ratio of transmit power of the transmitter to detected received signal strength of the receiver.
5. The IIP2 calibration system of claim 4, wherein the controller uses a sign-sign least means squared optimization algorithm to estimate the IIP2 coefficients.
6. The IIP2 calibration system of claim 5, wherein the sign-sign least means squared optimization algorithm has a variable step size, the variable step size depending on a magnitude of the IIP2 coefficient estimation.

7. The IIP2 calibration system of claim 6, wherein the receiver is a direct-conversion receiver.
8. The IIP2 calibration system of claim 7, wherein the transmitter transmits simultaneously as the direct-conversion receiver receives.
9. A radio frequency transceiver, comprising:
 - a duplexer;
 - a transmitter coupled to the duplexer;
 - a direct-conversion receiver including a mixer, coupled to the duplexer, wherein the receiver receives a leaked signal comprising a transmit RF signal leaked through the duplexer;
 - circuitry that determines a transmit power output of the transmitter;
 - circuitry that determines a received signal strength indication of the receiver;
 - circuitry that determines a linear gain between baseband of the transmitter and baseband of the receiver; and
 - a calibration system, including
 - circuitry, coupled to baseband of the transmitter, that determines a filtered, delayed, amplitude squared version of a baseband transmit signal,
 - circuitry that multiplies the filtered, delayed, amplitude squared version of a baseband transmit signal with the linear gain to produce a first signal,
 - circuitry that compares the first signal with a baseband receive signal that includes a second-order intermodulation distortion product produced in the mixer from the leaked signal, wherein the circuitry that compares uses a version of a sign-sign least means squared optimization algorithm for estimating a value of an IIP2 coefficient that is proportional to the second-order intermodulation distortion product produced in the mixer, and
 - circuitry that produces, in response to results from the optimization algorithm, a tuning voltage for tuning an IIP2 port of the mixer to reduce the second-order intermodulation distortion occurring in the mixer.
10. The radio frequency transceiver of claim 9, wherein the transmitter transmits simultaneously as the direct-conversion receiver receives.

11. The radio frequency transceiver of claim 10, wherein the calibration system includes circuitry that compensates for any DC offset in the baseband receive signal while the calibration system compares the first signal with a baseband receive signal, to reduce degradation of the estimation by the presence of the DC offset.
12. The radio frequency transceiver of claim 11, wherein the circuitry that compensates uses a sign-sign least means squared optimization algorithm to estimate the IIP2 coefficient.
13. The radio frequency transceiver of claim 12, wherein the sign-sign least means squared optimization algorithm has a variable step size, the variable step size depending on a magnitude of the IIP2 coefficient estimation.
14. The radio frequency transceiver of claim 10, wherein the calibration system includes circuitry that compensates only for a certain type of DC offset in the baseband receive signal while comparing the first signal with a baseband receive signal to reduce degradation of the estimation by the presence of the DC offset, the certain type of DC offset being the type of DC offset caused by effects other than second-order intermodulation distortion in the mixer.
15. The radio frequency transceiver of claim 10, in which the radio frequency transceiver is implemented in an integrated circuit.
16. A method of tuning a input-related, second-order intercept point (IIP2) of a mixer in a receiver of a transceiver including a transmitter, comprising the steps of:
- determining whether power output of the transmitter is greater than a predetermined power output level F;
 - determining whether a received signal strength indication of the receiver is less than a predetermined received signal strength indication level H;
 - providing values for a gain of an IIP2 estimator and an update rate of a IIP2 controller;
 - using the gain of the IIP2 estimator, performing an optimization algorithm for estimating an estimated value of an IIP2 coefficient that is proportional to second-order intermodulation

distortion occurring in the mixer;

using the update rate of the IIP2 controller and the estimated value of the IIP2 coefficient, performing an optimization algorithm for changing a tuning voltage of the mixer;

waiting a period for a change to occur in one or both of the power output level of the transmitter and a received signal strength indication of the receiver;

after waiting the period, determining whether a change in one or both of the gain of the IIP2 estimator and the update rate of the IIP2 controller has occurred;

based upon one of or both the change of the power output level and the received signal strength indication, determining whether a change in one or both of the gain of the IIP2 estimator and the update rate of the IIP2 controller are required; and

if any such change is required, making a change in one or both of the gain of the IIP2 estimator and the update rate of the IIP2 controller, based upon information stored in a look-up table.

17. The method of claim 16, wherein the step of performing the optimization algorithm for estimating the estimated value of the IIP2 coefficient includes a step of compensating for DC offset in the receiver, thereby reducing any degradation of the estimate caused by the presence of the DC offset.

18. The method of claim 17, wherein the values for the gain of the IIP2 estimator and the update rate of the IIP2 controller are obtained from respective look-up tables, based upon the power output of the transmitter and the receiver signal strength indication of the receiver.

19. The method of claim 16, wherein the optimization algorithm is a sign-sign least means squared optimization algorithm.

20. The method of claim 19, wherein the sign-sign least means squared optimization algorithm has a variable step size, the variable step size depending on a magnitude of the IIP2 coefficient estimation.



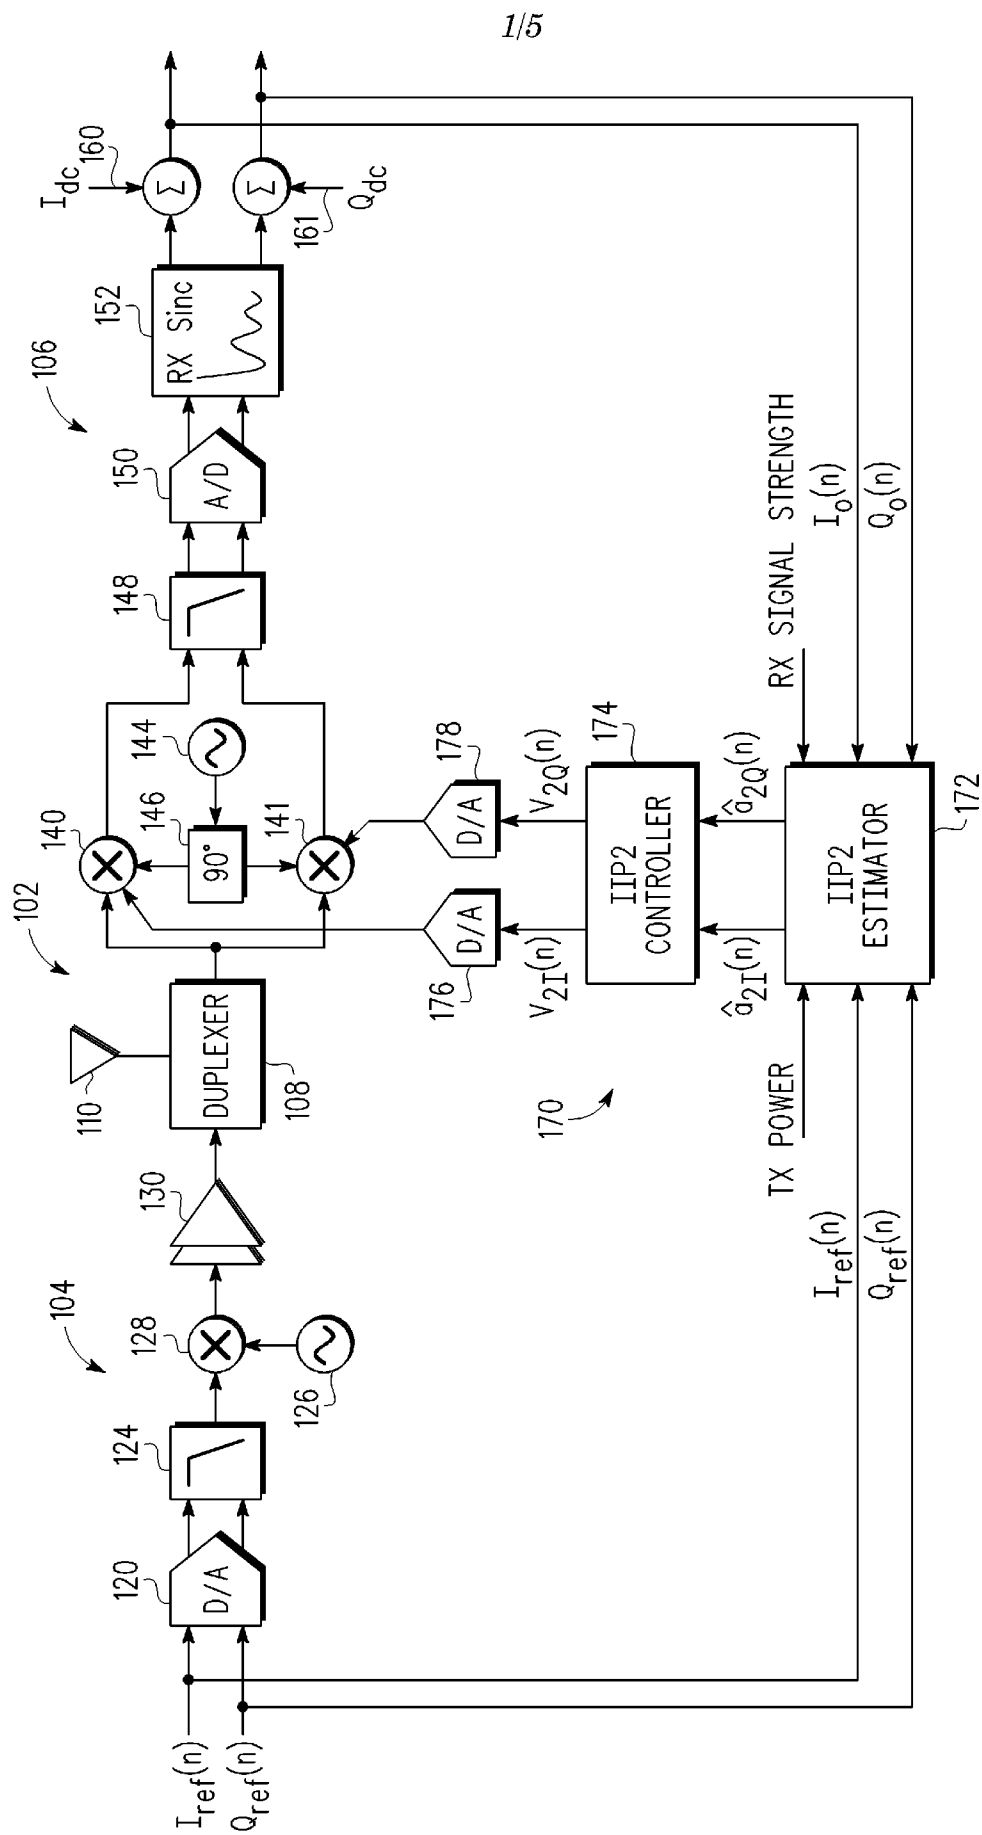


FIG. 1

FIG. 2

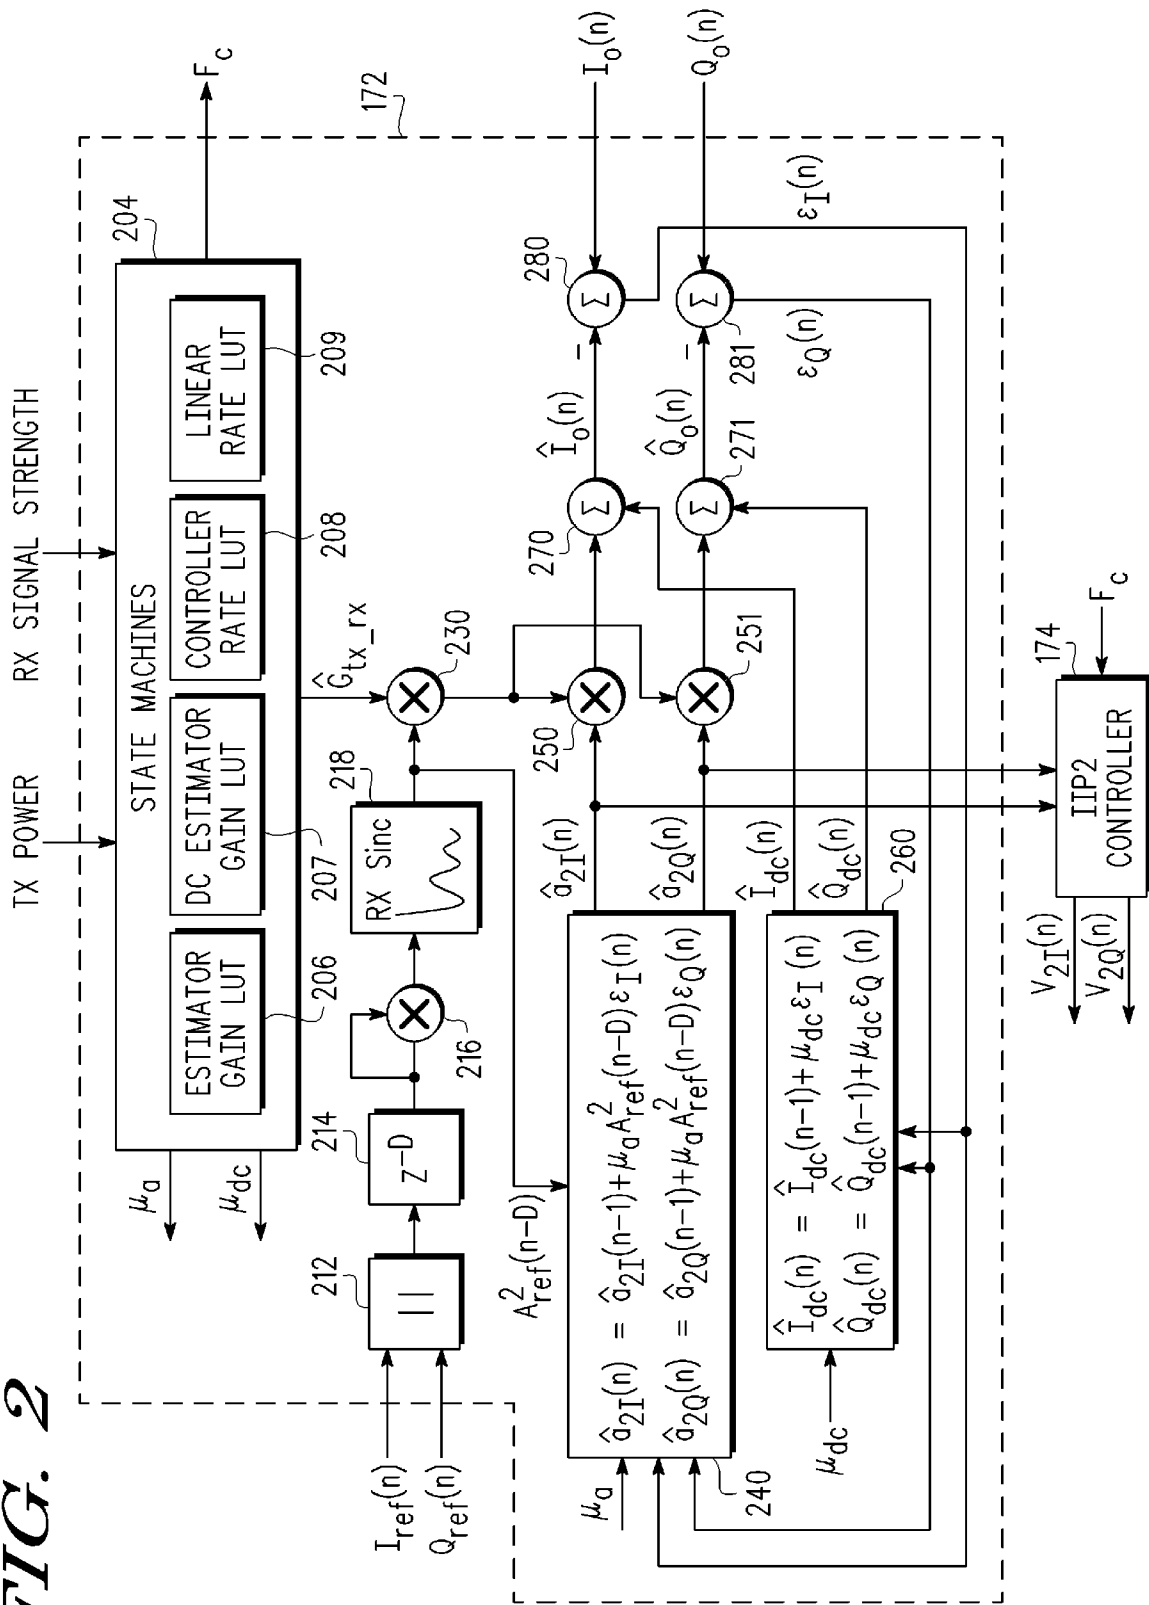


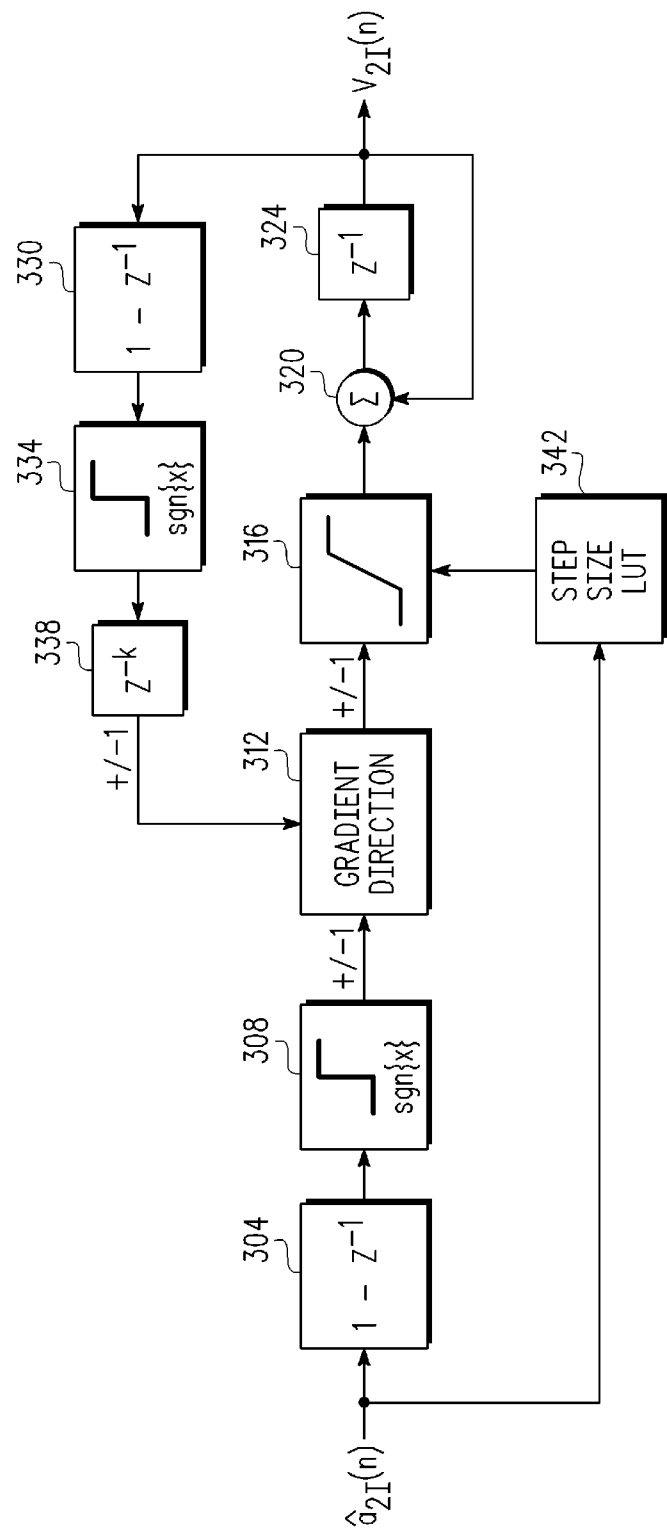

300

FIG. 3

4/5

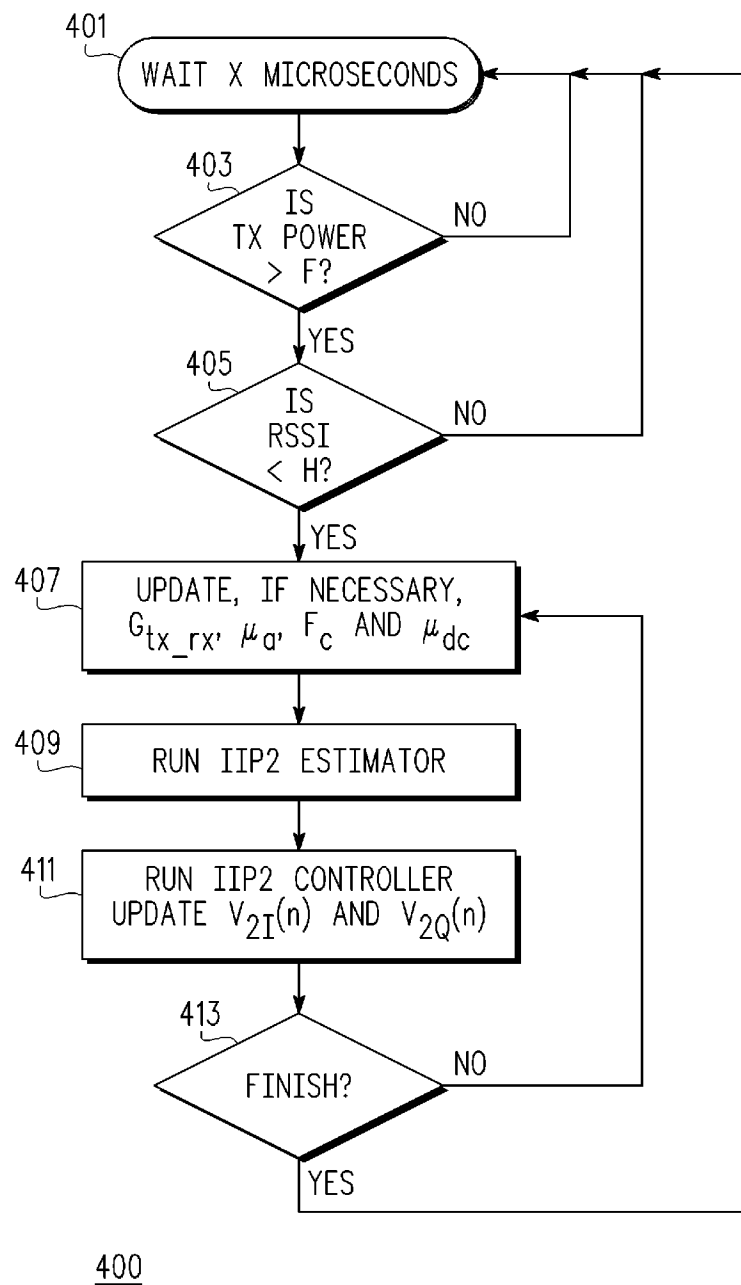**FIG. 4**

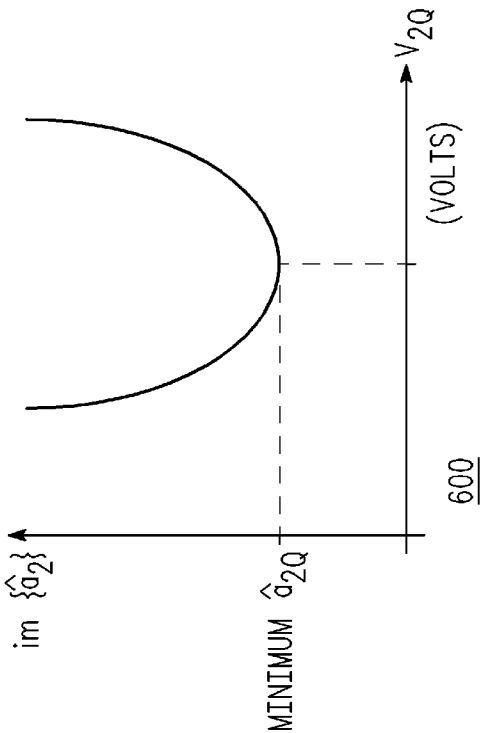


FIG. 5

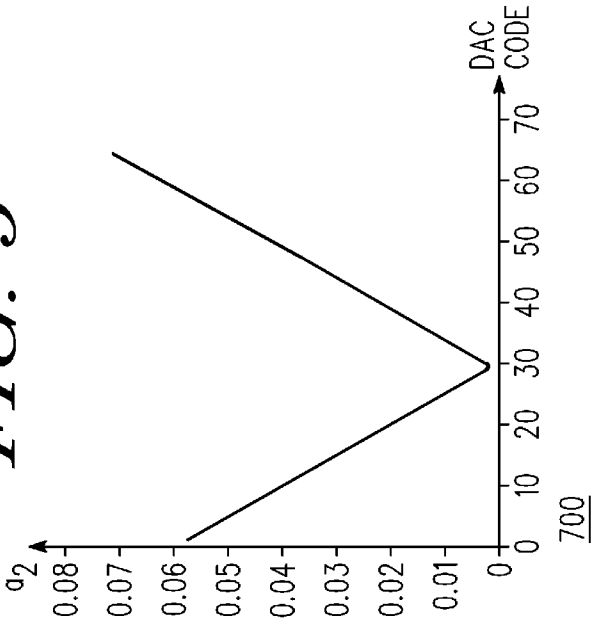


FIG. 7

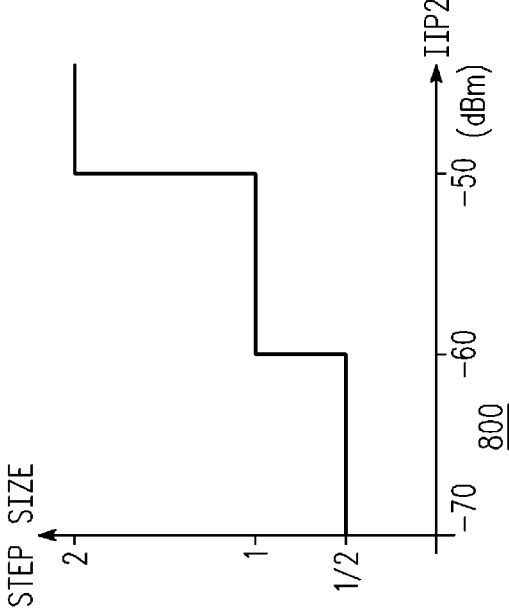


FIG. 8

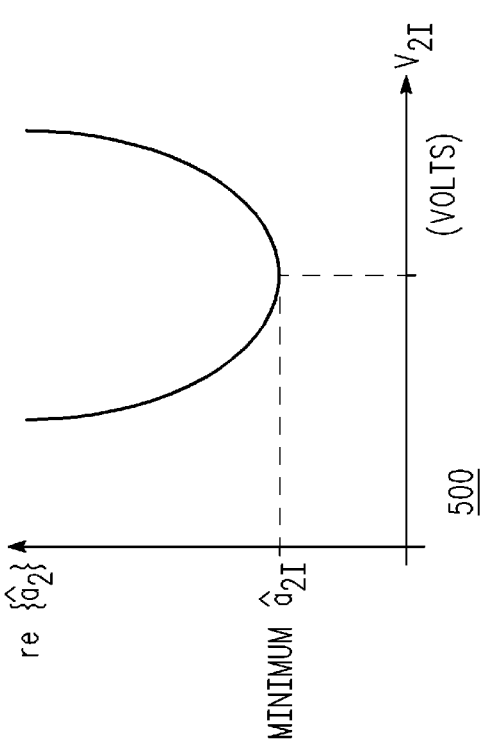


FIG. 6