




(86) **Date de dépôt PCT/PCT Filing Date:** 2017/01/24
(87) **Date publication PCT/PCT Publication Date:** 2018/08/02
(45) **Date de délivrance/Issue Date:** 2024/01/02
(85) **Entrée phase nationale/National Entry:** 2019/07/24
(86) **N° demande PCT/PCT Application No.:** CN 2017/072421
(87) **N° publication PCT/PCT Publication No.:** 2018/137127

(51) **Cl.Int./Int.Cl.** *H01M 50/296* (2021.01),
B25F 5/00 (2006.01), *H01M 50/552* (2021.01)
(72) **Inventeurs/Inventors:**
PENG, ZHIGANG, CN;
FAN, HUA, CN
(73) **Propriétaire/Owner:**
TTI (MACAO COMMERCIAL OFFSHORE) LIMITED, CN
(74) **Agent:** MARKS & CLERK

(54) **Titre : SUPPORT DE BORNE DE BATTERIE POUR OUTILS ELECTRIQUES**

(54) **Title: BATTERY TERMINAL HOLDER FOR ELECTRIC TOOLS**

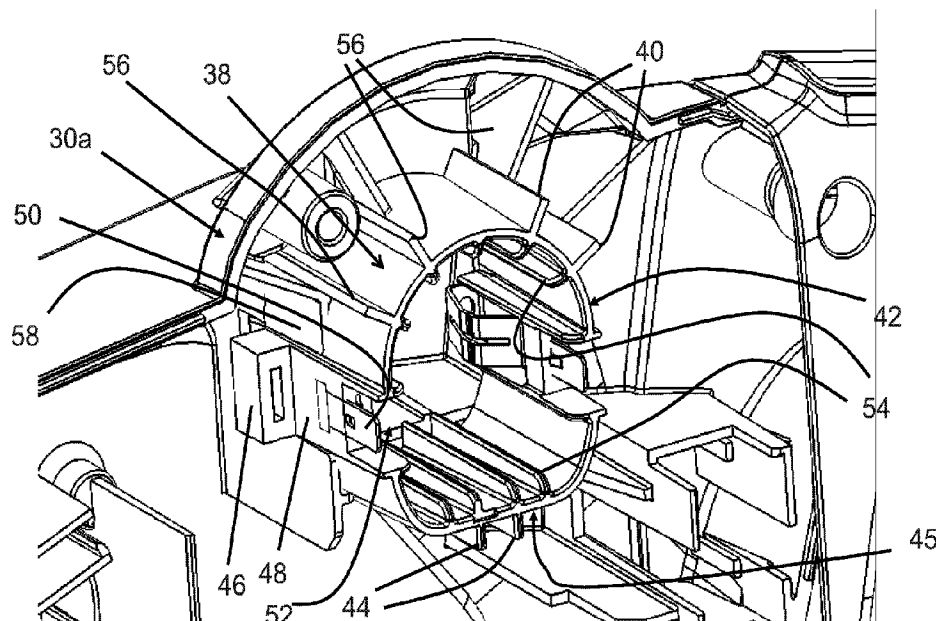

(57) **Abrégé/Abstract:**

An electric tool (20) allowing an external battery pack (26) to detachably connect thereto is disclosed. The electric tool (20) includes a housing and a motor (22) installed in the housing, and in addition the electric tool (20) includes a supporting part fixedly coupled to the housing; and a terminal holder (38). The terminal holder (38) is adapted to contact with terminals on an external battery pack (26) in order to form a consistent electrical connection. The terminal holder (38) is confined by the supporting member (56, 58) and in the meantime adapted to move relative to the supporting part. The terminal holder (38) has a hollow shape and is adapted to contact with the support member (56, 58) at an exterior surface of the terminal holder (38). As the terminal holder (38) is tightly fitted with the battery pack (26) but at the same time loosely fitted with the tool housing, chances of generating sparks or electric arc between the metal terminals can be minimized.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
02 August 2018 (02.08.2018)



(10) International Publication Number
WO 2018/137127 A1

(51) International Patent Classification:

H01M 2/10 (2006.01) *B25F 5/00* (2006.01)

(21) International Application Number:

PCT/CN2017/072421

(22) International Filing Date:

24 January 2017 (24.01.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **TTI (MACAO COMMERCIAL OFFSHORE) LIMITED** [CN/CN]; Units A-C, 26/F Centro Comercial da Praia Grande No. 429 Avenida da Praia Grande, Macao (CN).

(72) Inventors: **PENG, Zhigang**; No.1 Chuang Ke Road, Houjie Town Industrial Park, Houjie Town, Dongguan, Guang-

dong 523960 (CN). **FAN, Hua**; No.1 Chuang Ke Road, Houjie Town Industrial Park, Houjie Town, Dongguan, Guangdong 523960 (CN).

(74) Agent: **RUNPING & PARTNERS**; Suite 515, Yingu Mansion, No.9 Beisihuanxilu, Haidian District, Beijing 100190 (CN).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,

(54) Title: BATTERY TERMINAL HOLDER FOR ELECTRIC TOOLS

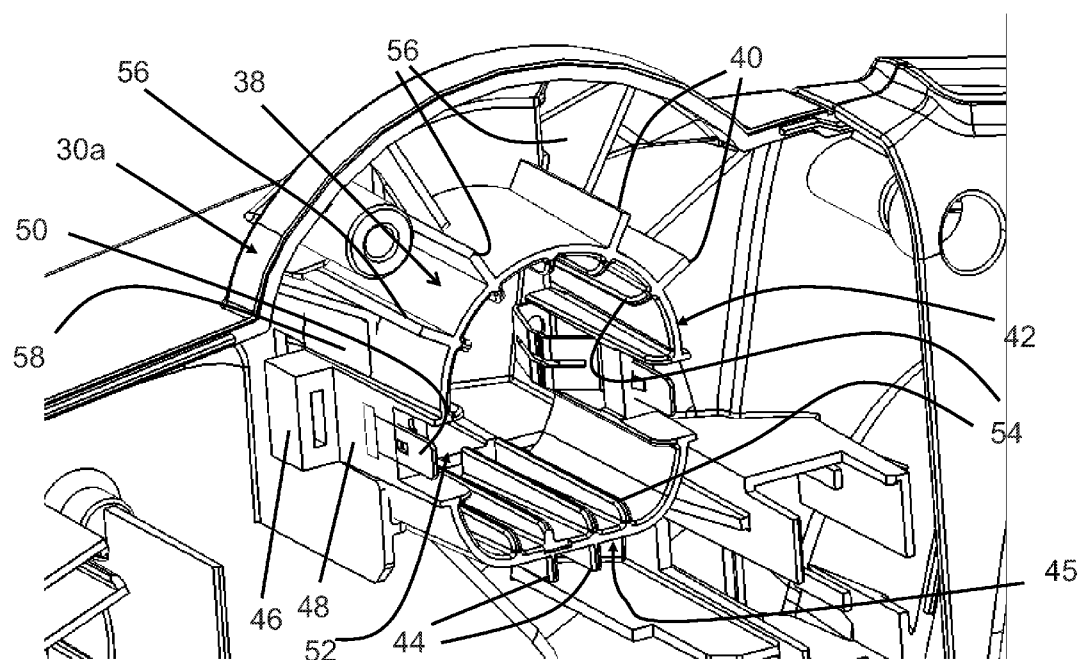


Fig. 4a

(57) Abstract: An electric tool (20) allowing an external battery pack (26) to detachably connect thereto is disclosed. The electric tool (20) includes a housing and a motor (22) installed in the housing, and in addition the electric tool (20) includes a supporting part fixedly coupled to the housing; and a terminal holder (38). The terminal holder (38) is adapted to contact with terminals on an external battery pack (26) in order to form a consistent electrical connection. The terminal holder (38) is confined by the supporting member (56, 58) and in the meantime adapted to move relative to the supporting part. The terminal holder (38) has a hollow shape and is adapted to contact with the support member (56, 58) at an exterior surface of the terminal holder (38). As the terminal holder (38) is tightly fitted with the battery pack (26) but at the same time loosely fitted with the tool housing, chances of generating sparks or electric arc between the metal terminals can be minimized.

[Continued on next page]



WO 2018/137127 A1

WO 2018/137127 A1

SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

Battery Terminal Holder for Electric Tools

FIELD OF INVENTION

5 [001] This invention relates to battery-powered electric tools, and in particular to the connecting interface on the electric tool for the battery.

BACKGROUND OF INVENTION

10 [002] Many modern power tools are designed to be battery-powered and are suitable for portable use so that in environments where mains power supply is not available (e.g. outdoor environments), people may still operate these power tools in a handy way. The battery packs for the power tools often have a high capacity along with desired voltage / current output, and even for impact-type power tools the battery pack would enable a long battery life for work before it needs to be recharged.

15 [003] For conventional impact-type power tools, the battery pack is configured to connect to the power tool in a rigid way so that the battery pack does not accidentally detach from the power tool during operation, and a reliable electrical connection between the power tool and the battery pack can be achieved. However, during operation there are inevitably great vibrations and impacts created by the motor in the power tool and/or due to the
20 contact between the electric tool and the workpiece. These vibrations and impacts are transmitted to the battery pack via the power tool housing, which then pose potential damage to the battery pack itself as well as to the electric coupling mechanism between the battery pack and the power tool. Undesired consequences such as electric arc or sparks between the terminals may occur.

25

SUMMARY OF INVENTION

[004] In the light of the foregoing background, it is an object of the present invention to provide an alternate battery terminal holder which eliminates or at least alleviates the above technical problems.

[005/6] One skilled in the art will derive from the following description other objects of the invention. Therefore, the foregoing statements of object are not exhaustive and serve
5 merely to illustrate some of the many objects of the present invention.

[007] Accordingly, the present invention in one aspect discloses an electric tool allowing an external battery pack to detachably connect thereto. The electric tool includes a housing and a motor installed in the housing, and in addition the electric tool includes a supporting part fixedly coupled to the housing; and a terminal holder. The terminal holder
10 is adapted to contact with terminals on an external battery pack in order to form a consistent electrical connection. The terminal holder is confined by the supporting member and in the meantime adapted to move relative to the supporting part. The terminal holder has a hollow shape and is adapted to contact with the support member at an exterior surface of the terminal holder.

15 [008] Preferably, the terminal holder includes an engaging part which is movably coupled to the supporting part.

[009] According to one variation of the invention, the engaging part contains at least one first rib formed on the exterior surface of the terminal holder and extending therefrom. The supporting part contains two second ribs fixed to the housing. The first rib is adapted
20 to move within a space bounded by the second ribs but unable to leave the space.

[010] Preferably, the engaging part contains a plurality of said first ribs which are distributed along a perimetric direction on the exterior surface of the terminal holder.

[011] More preferably, there are two first ribs present in the space bounded by the second ribs.

25 [012] According to another variation of the invention, the engaging part includes at least one rib formed on the exterior surface of the terminal holder and extending therefrom along a first direction. The rib has an elongated shape defining a first length along a

second direction perpendicular to the first direction. The supporting part includes an elongated cover defining a second length along the second direction. The cover has a cross-section in a substantially U shape. The first rib is at least partially received in the cover but adapted to move relative to the cover along the second direction.

5 [013] Preferably, the first length of the rib is larger than the second length of the cover.

[014] According to a further variation of the invention, the engaging part contains a pair of opposing projections on the exterior surface of the terminal holder. The supporting part includes, corresponding to each of the projections, a channel receiving the projection and allowing the latter to move therein in a sliding manner.

10 [015] Preferably, each channel is formed by two ribs formed at the housing and separated apart from each other.

[016] More preferably, on each of the projections there is mounted an electrical terminal for contacting with the terminals on the external battery pack.

15 [017] More preferably, at least one said electrical terminal comprises a portion which is in a wavy shape.

[018] In an exemplary implementation of the present invention, the terminal holder includes, at its interior surface, a plurality of internal ribs for holding a portion of the external battery pack.

20 [019] In another exemplary implementation of the present invention, the terminal holder has a substantially ring shape.

[020] In a further exemplary implementation of the present invention, the electric tool is a chainsaw.

25 [021] According to another aspect of the invention, there is provided an apparatus containing comprising an electric tool and a battery pack. The battery pack further contains a base part, and a connecting part extending from the base part. The electric tool includes a housing and a motor installed in the housing, and in addition the electric tool

includes a supporting part fixedly coupled to the housing; and a terminal holder. The terminal holder is adapted to contact with terminals on an external battery pack in order to form a consistent electrical connection. The terminal holder is confined by the supporting member and in the meantime adapted to move relative to the supporting part.

5 The terminal holder has a hollow shape and is adapted to contact with the support member at an exterior surface of the terminal holder.

[022] Preferably, the connecting part includes a pair of opposing battery terminals.

[023] There are many advantages to the present invention as compared to battery terminal holders in conventional electric tools. In the proposed electric tools, the terminal holder is
10 tightly fitted to the battery pack once the battery pack is installed on the electric tool, and as a result there is no or little relative movement between the terminal holder and the battery pack. In comparison, the terminal holder, although being part of the electric tool, is not tightly connected to the housing of the electric tool. Rather, there exists a loose fit between the terminal holder and the housing of the electric tool, and in other words the
15 terminal holder is “floating” in the electric tool housing. In case of large vibrations caused by the motor in the electric tool, or great impacts caused by the electric tool contacting with the workpiece, the terminal holder and the battery pack effectively become a single part which moves relative to the electric tool housing, and such relative movement effectively filters or say absorbs the vibrations that would otherwise be
20 transmitted to the terminal holder. Therefore, potential electric arc or spark between the metal terminals on the terminal holder and the battery pack will be eliminated as much as possible and damages to the metal terminals can be avoided.

[024] On the other hand, since the terminal holder keeps a tight connection to the battery pack during operation, there is ensured a good and consistent electrical connection
25 between the terminal holder and the battery pack. As a result, the normal operation of the electric tool will not be affected due to any vibration or impact suffered by the electric tool.

BRIEF DESCRIPTION OF FIGURES

[025] The foregoing and further features of the present invention will be apparent from the following description of preferred embodiments which are provided by way of example only in connection with the accompanying figures, of which:

5 [026] Fig. 1 is a perspective view of an electric tool with a battery pack installed to the tool, according to a first embodiment of the present invention.

[027] Fig. 2 shows another perspective view of the electric tool in Fig. 1, with the battery pack detached from the tool but at a ready-to-insert position.

10 [028] Fig. 3 shows the electric tool and the battery pack in Fig. 2, with a half housing of the tool removed to expose the battery terminal holder in the electric tool.

[029] Fig. 4a shows a closer perspective view of the terminal holder residing in the half housing of the electric tool in Fig. 3.

[030] Fig. 4b is the top view of the terminal holder in Fig. 4a.

15 [031] Fig. 5a is a cross-sectional view of the electric tool of Figs. 1-4b along the line A-A in Fig. 4b.

[032] Fig. 5b is a cross-sectional view of the electric tool of Figs. 1-4b along the line B-B in Fig. 4b.

[033] Figs. 6a and 6b show respectively a perspective view and a side view of the electrical terminal, which is adapted to be mounted on the terminal holder of Figs. 2-5b.

20 [034] Fig. 7 shows the terminal holder in Figs. 2-5b affixed to the battery pack, with the rest parts of the electric tool hidden.

[035] Fig. 8a illustrates a perspective view of a terminal holder residing in a half housing of an electric tool, according to another embodiment of the present invention.

[036] Fig. 8b is the top view of the terminal holder in Fig. 8a.

[037] Fig. 9a illustrates a perspective view of a terminal holder residing in a half housing of an electric tool, according to a further embodiment of the present invention.

[038] Fig. 9b is the top view of the terminal holder in Fig. 9a.

[039] Fig. 10 is a cross-sectional view of an electric tool near its terminal holder,
5 according to a further embodiment of the present invention.

[040] In the drawings, like numerals indicate like parts throughout the several embodiments described herein.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

10 [041] In the claims which follow and in the preceding description of the invention, except where the context requires otherwise due to express language or necessary implication, the word “comprise” or variations such as “comprises” or “comprising” is used in an inclusive sense, i.e. to specify the presence of the stated features but not to preclude the presence or addition of further features in various embodiments of the
15 invention.

[042] As used herein and in the claims, “couple” or “connect” refers to electrical coupling or connection either directly or indirectly via one or more electrical means unless otherwise stated.

[043] Terms such as “horizontal”, “vertical”, “upwards”, “downwards”, “above”,
20 “below” and similar terms as used herein are for the purpose of describing the invention in its normal in-use orientation and are not intended to limit the invention to any particular orientation.

[044] Referring now to Figs. 1-3, the first embodiment of the present invention is an electric tool in the form of a chainsaw **20**. For the simplicity of illustration, the saw blade of the chainsaw **20** has been omitted from Figs. 1-3. The chainsaw **20** has a tool housing
25 which is consisted of two half housing **30a**, **30b** which are assembled together to form an

internal space for accommodating different internal parts of the chainsaw **20**. The chainsaw **20** contains a rear handle **24** for the user to hold the chainsaw **20** firmly during operation. A motor assembly **22** is located in the chainsaw **20** near its front end to provide mechanical driving power to a transmission module (not shown) and in turn to the saw blade. The overall structure of the chainsaw **20** and its working principle are well-known to persons skilled in the art, and will not be described in details herein.

[045] An external battery pack **26** can be detachably installed to a battery receptacle located generally between the rear handle **24** and the motor assembly **22** on the chainsaw **20**. Fig. 1 and Figs. 2-3 show respectively the states of the battery pack **26** when it is installed to the chainsaw **20**, or separated from the chainsaw **20**. As best seen in Fig 2, the battery receptacle contains a slightly recessed portion **36** on the chainsaw **20**, and an opening **34** which is more recessed than the portion **36**. The opening **34** has interior dimensions generally corresponding to a connecting part **32** of the battery pack **26**, where the connecting part **32** projects from a base part **33** of the battery pack **26**. Inside the opening **34** there is configured a terminal holder **38** used to mechanically engage with the connecting part **32** of the battery pack **26** and also to establish electrical connection between the chainsaw **20** and the battery pack **26**. The battery pack **26** further contains a pair of user actuated latches **28** for engaging with corresponding stops **35** located on the rim of the portion **36**, which facilitates mechanical locking of the battery pack **26** to the chainsaw **20** and that the battery pack **26** does not accidentally detach from the chainsaw **20**. Fig. 3 shows the chainsaw **20** with a half housing **30b** hidden to illustrate the terminal holder **38**. However, it should be noted that although the battery pack **26** is installed and locked to the tool housing of chainsaw **20**, it does not mean that there is a rigid connection between the two. Rather, the battery pack **26** is allowed to slightly move relative to the tool housing, as will be explained in more details later.

[046] Turning to Figs. 4a to 4b, the terminal holder **38** has a hollow shape defining both an exterior surface and an interior surface of the terminal holder **38**. The terminal holder **38** as illustrated has a substantially ring shape. The terminal holder **38** has a depth which is defined by its dimension on the direction along which the terminal holder **38** extends

from the half housing **30a**. In particular, the terminal holder **38** includes a semi-circular part **42**, two intermediate parts **48**, and as a flat part **45**. Each of the semi-circular part **42** and the flat part **45** is formed by a thin sheet of material in a belt shape. The semi-circular part **42** is attached to the flat part **45** at their respective ends via the intermediate parts **48**.

5 Together, the semi-circular part **42**, the two intermediate parts **48**, and the flat part **45** constitute the closed shape of the terminal holder **38**. That said, the entire terminal holder **38** is in fact formed as an integral piece by overmolded plastic. Note that despite its name, the flat part **45** is actually consisted of a straight part and two arc-shaped parts connected respectively at the two ends of the straight part.

10 [047] The terminal holder **38** contacts with the half housing **30a** partially at various ribs **56**, **58** which are formed as part of the half housing **30a**, and in other words these ribs **56**, **58** are fixedly coupled to the tool housing. The ribs **56**, **58**, which are also referred to as supporting part in the tool housing, confine the terminal holder **38** in position in the tool housing. However, as will be described in more details below the terminal holder **38** is
15 not tightly fixed to any half housing of the tool housing including the half housing **30a**, but instead is configured to move relatively to the tool housing to a certain extent.

[048] In particular, the terminal holder **38** contains a plurality of first ribs **40** formed on the exterior surface thereof, and more specifically on the exterior surface of the semi-circular part **42**. These first ribs **40** as a part of an engaging part of the terminal holder **38**
20 are distributed along the perimetric direction of the terminal holder **38** on the semi-circular part **42** along its circumference. Corresponding to the first ribs **40**, multiple second ribs **56** are formed on the half housing **30a** for the first ribs **40** to movably, matingly engage with the second ribs **56**. The ends of the second ribs **56** extend to positions close to the exterior surface of the semi-circular part **42**, and every first rib **40** is
25 accommodated in a space bounded by two adjacent second ribs **56**. As shown in Figs. 4a-4b there can be just one first rib **40** between two adjacent second ribs **56**, or two first ribs **40** between two adjacent second ribs **56**. In either case, the first ribs **40** are allowed to move within the space bounded by the second ribs **56** (i.e. “floating”), but would not be possible to escape from the space. For the case of two first ribs **40** in the same space

bounded by two adjacent second ribs **56**, the span between the two first ribs **40** is smaller than that between the two second ribs **56** so the relative movement of the two first ribs **40** to the second ribs **56** is possible.

[049] On the other hand, on the flat part **45** there are formed two ribs **44** which are aligned to be parallel to each other. The ribs **44** are also a part of the engaging part of the terminal holder **38**. The shape of a single rib **44** is similar to that of a first rib **40** described previously. Fig. 4b and Fig. 5a further show that on the half housing **30a** there are formed two ribs **60** which extend along the same direction as the ribs **44**. However, the ribs **60** on the half housing **30a** have no direct relationship with the ribs **44** on the terminal holder as they are not intended to cooperate with each other. Rather, the ribs **60** are placed simply as a retaining means for preventing the terminal holder **38** as a whole from moving further toward the half housing **30a** and away from the half housing **30b** (see Fig. 5a). The ribs **44** are used for engaging with a substantially U shaped cover **62** formed on the other half housing **30b** as shown in Fig. 5a. As the half housing **30a** and **30b** are assembled together in an opposing manner, the cover **62** on the half housing **30b** is also opposing the ribs **60** on the half housing **30a**. A part of the ribs **44** are received within an internal space formed by the cover **62** as the ribs **44** have a length longer than that of the cover **62**. Here the length is defined as the dimension of the ribs **44** or the cover **62** along the depth direction of the terminal holder **38**, which is perpendicular to the direction along which the ribs **44** project from the flat part **45**. The ribs **44** are adapted to slide relative to the cover **62** since the cover **62** in fact forms a groove allowing the elongated ribs **44** to move within it.

[050] The two intermediate parts **48** are located on the terminal holder **38** to oppose each other. Each of the intermediate parts **48** has a substantially elongated shape along the depth direction of the terminal holder **38**. On each intermediate part **48**, there is a projection **46** extending along a radial direction of the terminal holder **38** which is perpendicular to the depth direction. The projections **46** are also a part of the engaging part of the terminal holder **38**. The projections **46** have a cubic shape with a width identical to the width of the intermediate parts **48**. The projections **46** are received in

corresponding channels **52** formed by two ribs **58** which are formed integrally with the half housing **30a**. The channels **52** have a width slightly larger than the width of the projections **46** and the projections **46** are allowed to move within corresponding channels **52** in a sliding manner along the depth direction of the terminal holder **38**. However, the
5 projections **46** are not able to escape from the channels **52**.

[051] A metal terminal **50** is mounted firmly on each intermediate part **48** which is adapted to contact with corresponding terminals (not shown) on the battery pack **26**, and on the other hand is connected to the internal electric circuit in the chainsaw via electric wires (not shown). The two metal terminals **50** are arranged in an opposing manner to
10 each other, as illustrated in Fig. 5b. The metal terminal **50** has a curved portion **70** which is located adjacent to the interior surface of the terminal holder **38** and faces inwardly. As shown in Figs. 6a-6b, each metal terminal **50** is made from a single piece of metal material. The metal terminal **50** contains a pin portion **66** at its one end, which is used to couple with electric wires for connecting to the internal electric circuit in the chainsaw as
15 mentioned above. On the other end of the metal terminal **50** there is a hook portion **68** for securing the metal terminal **50** to the intermediate part **48**. The curved portion **70** is located between the hook portion **68** and the pin portion **66** and has a convex shape facing the above mentioned inward direction to facilitate contact with the battery terminals. On the curved portion **70**, there is formed a wave shape **64** with the peak of the
20 wave shape **64** oriented towards a focal point of the convex shape of the curved portion **70**. The wave shape **64** on the curved portion **70** increases the number of contact points between the metal terminal **50** and the battery terminal so a better electrical connection can be achieved. Also, the wave shape **64** is adapted to receive grease which helps absorb any spark that may occur due to vibration.

[052] Within the terminal holder, there are also multiple internal ribs **54** arranged both on the interior surfaces of the flat part **45** and the semi-circular part **42**, as shown in Figs. 4a-4b. The internal ribs **54** are used to hold and keep a connecting part of the battery pack in a firm way, i.e. there is no or minimum relative movement between the terminal holder **38** and the connecting part of the battery pack. Fig. 7 shows the terminal holder **38**

engaged with the connecting part **32** of the battery pack **26**. When they are engaged, the connecting part **32** is tightly fitted to the terminal holder **38**, as all internal ribs **54** will contact with the connecting part **32** at the same time and thus hold the terminal holder **38** in many directions along the circumference. The metal terminal **50** of the terminal holder **38** have a firm contact with the battery terminals **72** on the connecting part **32**. The battery terminals **72** are also arranged in an opposing way so that each of the battery terminals **72** corresponds to its counterpart metal terminal **50**.

[053] Now turning to the operation of the terminal holder and the chainsaw described above. The terminal holder **38** as mentioned above is not tightly fitted to any one of the half housing **30a**, **30b**, but there are various types of “floating” mechanisms supporting the terminal holder **38**. The floating mechanisms are formed by the engaging part of the terminal holder and the supporting part of the tool housing as described above. During operation of the chainsaw, when great vibration is generated due to the electric motor in the chainsaw and/or impact of the chainsaw on the workpiece to be cut, such vibration will be transmitted to the tool housing, but the various “floating” mechanisms will stop or at least minimize such vibrations from being further transmitted to the terminal holder **38**. By reference to Figs. 4a and 4b, the first ribs **40** on the terminal holder **38** are allowed to move relative to the second ribs **44** on the half housing **30a** in a swaying motion like a bucket in a well. Such relative movement stops vibrations of the tool housing from being transmitted to the terminal holder **38**. Moreover, the protrusions **46** are allowed to move in a sliding manner in their respective channel **52** and again such relative movement stops vibration of the tool housing, particular along the depth direction of the terminal holder **38**, be transmitted to the terminal holder **38**. In addition, the rib **44** on the terminal holder **38** as slidably received in the internal space of cover **62** (see Fig. 5a) also helps absorbing the vibration from the tool housing to the terminal holder **38**. On the other hand, the terminal holder **38** always keeps a tight fitting with the battery pack once the latter is installed on the chainsaw. Such tight fitting ensures that there is a good and consistent electrical connection between the metal terminal **50** and the respective terminals on the battery pack, thus reducing the chance of electric arc or sparks. The terminal holder **38** is connected electrically to other components in the chainsaw **20** by electric wires, which

are flexibly resilient so as not to impede the relative movement of the terminal holder in the tool housing.

[054] Turning now to Figs. 8a-8b, in another embodiment of the present invention an electric tool contains a terminal holder **138** which is different from the terminal holder described in Figs. 1-7. For the sake of brevity, only the difference in the terminal holder **138** as compared to the terminal holder described in Figs. 1-7 will be described herein, while the common or identical features will be omitted from discussion. In the terminal holder **138** one can see that on the there is no more ribs formed on the exterior surface of the semi-circular part **142**. While the second ribs **156** are still present in the half housing **130a**, these second ribs **156** now only function to hold the terminal holder **138** from radial directions. However, the vibration-absorbing effect is still maintained due to the presence of the protrusion **146** received in the channel **152** formed by the two ribs **158** on the half housing **130a**.

[055] Figs. 9a-9b show a further embodiment of the present invention in which an electric tool contains a terminal holder **238** which is different from the terminal holders described in Figs. 1-8b. For the sake of brevity, only the difference in the terminal holder **238** as compared to the terminal holders described previously will be described herein, while the common or identical features will be omitted from discussion. In the terminal holder **238**, not only there is no external ribs formed on exterior surface of the semi-circular part **242**, but also the external ribs on the flat part **245** are also removed. In other words, there is no external rib formed anywhere on the exterior surface of the terminal holder **238**. However, the vibration-absorbing effect is still maintained due to the presence of the protrusion **246** received in the channel **252** formed by the two ribs **258** on the half housing **230a**.

[056] Fig 10 shows a further embodiment of the present invention in which an electric tool is different from those described in Figs. 1-9b. For the sake of brevity, only the difference in structure of the electric tool as compared to the previous ones will be described herein, while the common or identical features will be omitted from discussion. The electric tool contains two half housing **330a**, **330b** which are assembled together to

form the tool housing. However, unlike the half housing shown in Fig.5a, in the present embodiment there is no more cover formed on the half housing **330b** for confining the ribs **344** formed on the flat part **345** of the terminal holder **338**. In other words, the ribs **344** do not function as a “floating” structure.

5 [057] The exemplary embodiments of the present invention are thus fully described. Although the description referred to particular embodiments, it will be clear to one skilled in the art that the present invention may be practiced with variation of these specific details. Hence this invention should not be construed as limited to the embodiments set forth herein.

10 [058] While the invention has been illustrated and described in detail in the drawings and foregoing description, the same is to be considered as illustrative and not restrictive in character, it being understood that only exemplary embodiments have been shown and described and do not limit the scope of the invention in any manner. It can be appreciated that any of the features described herein may be used with any embodiment. The
15 illustrative embodiments are not exclusive of each other or of other embodiments not recited herein. Accordingly, the invention also provides embodiments that comprise combinations of one or more of the illustrative embodiments described above. Modifications and variations of the invention as herein set forth can be made without departing from the spirit and scope thereof, and, therefore, only such limitations should
20 be imposed as are indicated by the appended claims.

[059] It is to be understood that, if any prior art publication is referred to herein, such reference does not constitute an admission that the publication forms a part of the common general knowledge in the art, in Australia or any other country.

[060] For example, the shape of the terminal holder as illustrated in the embodiments
25 above is substantially annual but includes both semi-circle portions and flat portions. However, skilled persons in the art would easily think of other shapes of terminal holder according to the specification of the battery pack to be used with, such as square, ring

shape, or oval shape. All these variations of shapes would still fall within the scope of the present invention.

[061] In addition, the above-described embodiments illustrate one or more of the three different floating mechanisms including the first and second ribs arranged in a staggering
5 manner, ribs received in a U-shape cover, and the protrusions moving within channels formed by ribs on the tool housing. It should be noted that either one of these floating mechanisms alone could be used to provide the vibration absorbing effect, or they are independent from each other.

10

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. An electric tool allowing an external battery pack to detachably connect thereto, the electric tool comprising a housing and a motor installed in the housing; the electric tool further comprising:

- a) a supporting part fixedly coupled to the housing; and
- b) a terminal holder adapted to contact with terminals on an external battery pack in order to form a consistent electrical connection; the terminal holder confined by the supporting member and in the meantime adapted to move relative to the supporting part;

wherein the terminal holder has a hollow shape and is adapted to contact with the support member at an exterior surface of the terminal holder.

2. The electric tool according to claim 1, wherein the terminal holder comprises an engaging part which is movably coupled to the supporting part.

3. The electric tool according to claim 2, wherein the engaging part comprises at least one first rib formed on the exterior surface of the terminal holder and extending therefrom; the supporting part comprising two second ribs fixed to the housing; the first rib adapted to move within a space bounded by the second ribs but unable to leave the space.

4. The electric tool according to claim 3, wherein the engaging part comprises a plurality of said first ribs which are distributed along a perimetric direction on the exterior surface of the terminal holder.

5. The electric tool according to claim 4, wherein two of said first ribs are present in the space bounded by the second ribs.

6. The electric tool according to claim 2, wherein the engaging part comprises at least one rib formed on the exterior surface of the terminal holder and extending therefrom along a first direction; the rib having an elongated shape defining a first length along a second direction perpendicular to the first direction; the supporting part comprising an elongated cover defining a second length along the second direction; the cover having a cross-section in a substantially U shape; the first rib at least partially received in the cover but adapted to move relative to the cover along the second direction.
7. The electric tool according to claim 6, wherein the first length of the rib is larger than the second length of the cover.
8. The electric tool according to claim 2, wherein the engaging part comprises a pair of opposing projections on the exterior surface of the terminal holder; the supporting part comprising, corresponding to each of the projections, a channel receiving the projection and allowing the latter to move therein in a sliding manner.
9. The electric tool according to claim 8, wherein each said channel is formed by two ribs formed at the housing and separated apart from each other.
10. The electric tool according to claim 8 or 9, wherein on each of the projections there is mounted an electrical terminal for contacting with the terminals on the external battery pack.
11. The electric tool according to claim 8, 9 or 10, wherein at least one said electrical terminal comprises a portion which is in a wavy shape.
12. The electric tool according to any one of claims 1 to 11, wherein the terminal holder comprises, at its interior surface, a plurality of internal ribs for holding a portion of the external battery pack.
13. The electric tool according to any one of claims 1 to 12, wherein the terminal holder has a substantially ring shape.

14. The electric tool according to any one of claims 1 to 13, wherein the electric tool is a chainsaw.
15. An apparatus, comprising an electric tool as defined in any one of claims 1 to 14, and a battery pack; the battery pack further comprising a base part, and a connecting part extending from the base part.
16. The apparatus according to claim 15, wherein the connecting part comprises a pair of opposing battery terminals.

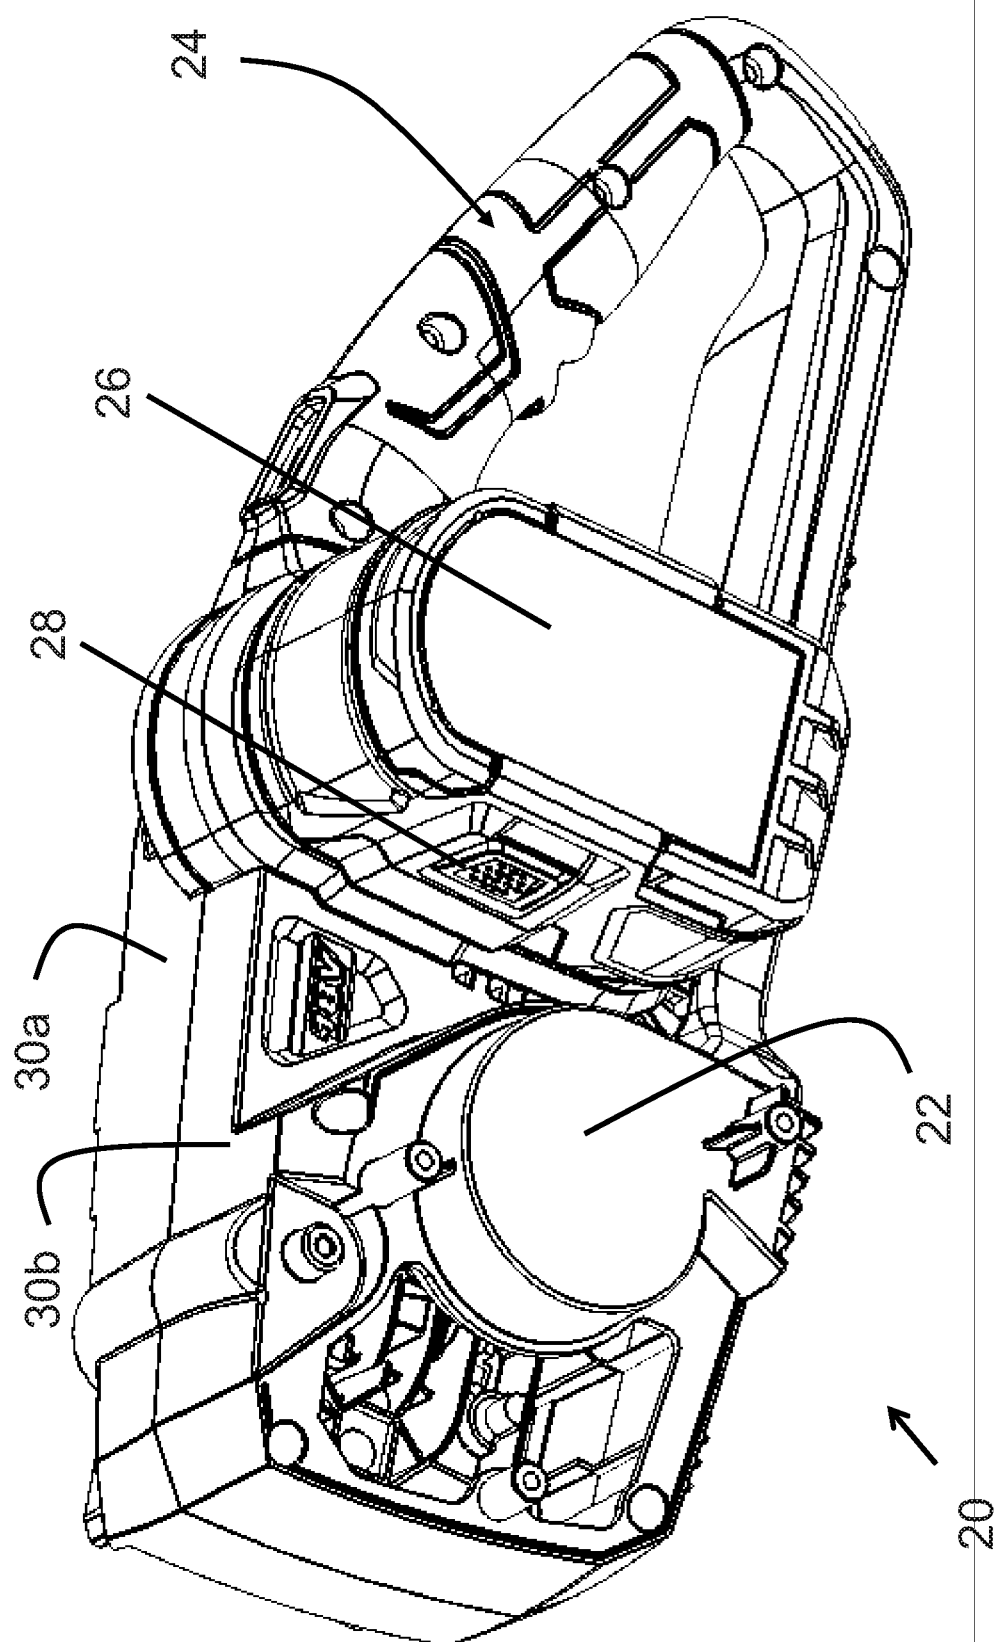


Fig.1

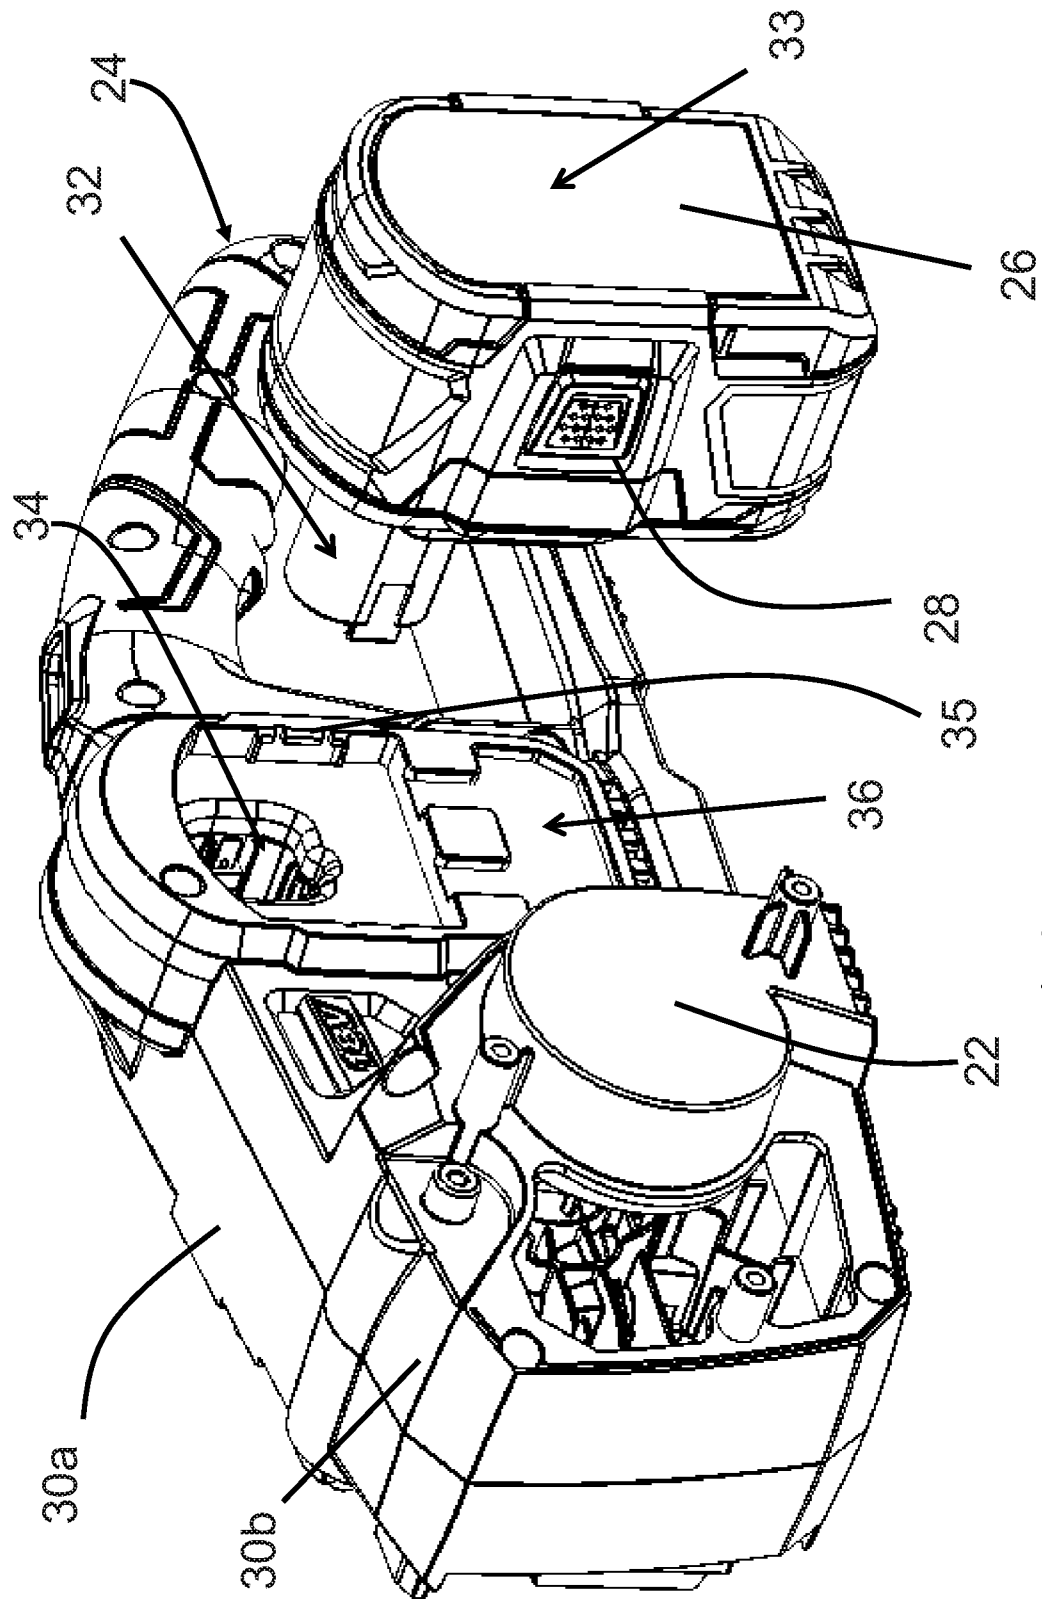


Fig.2

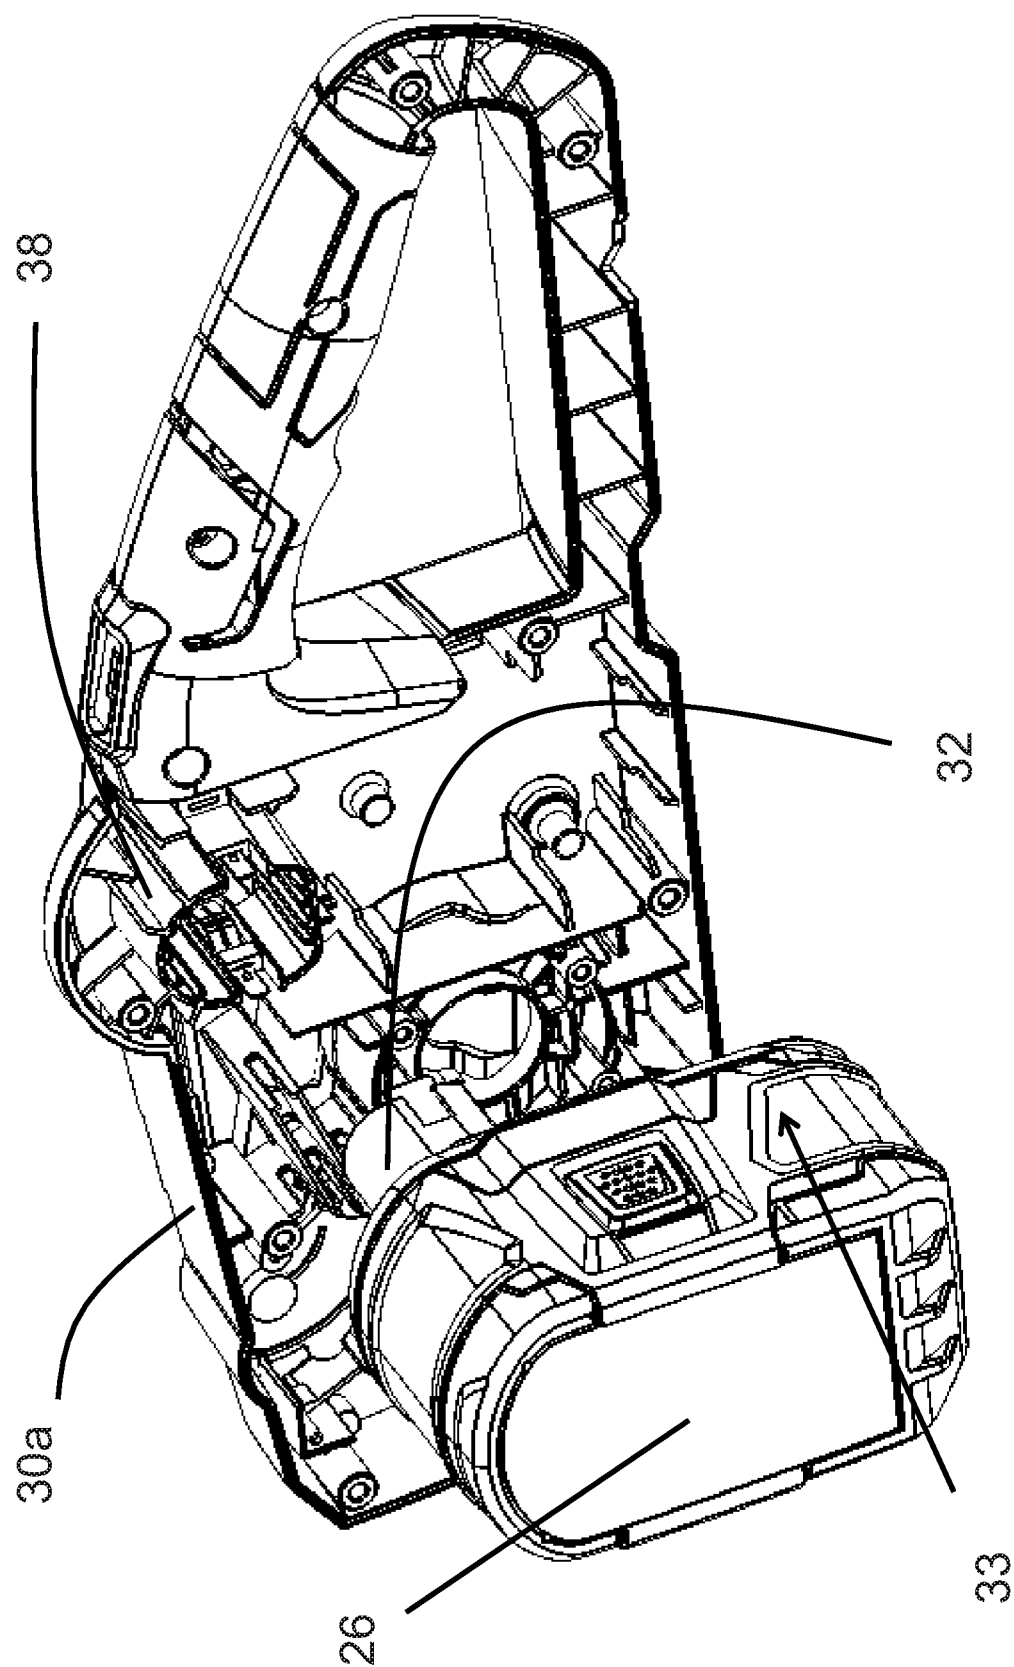


Fig.3

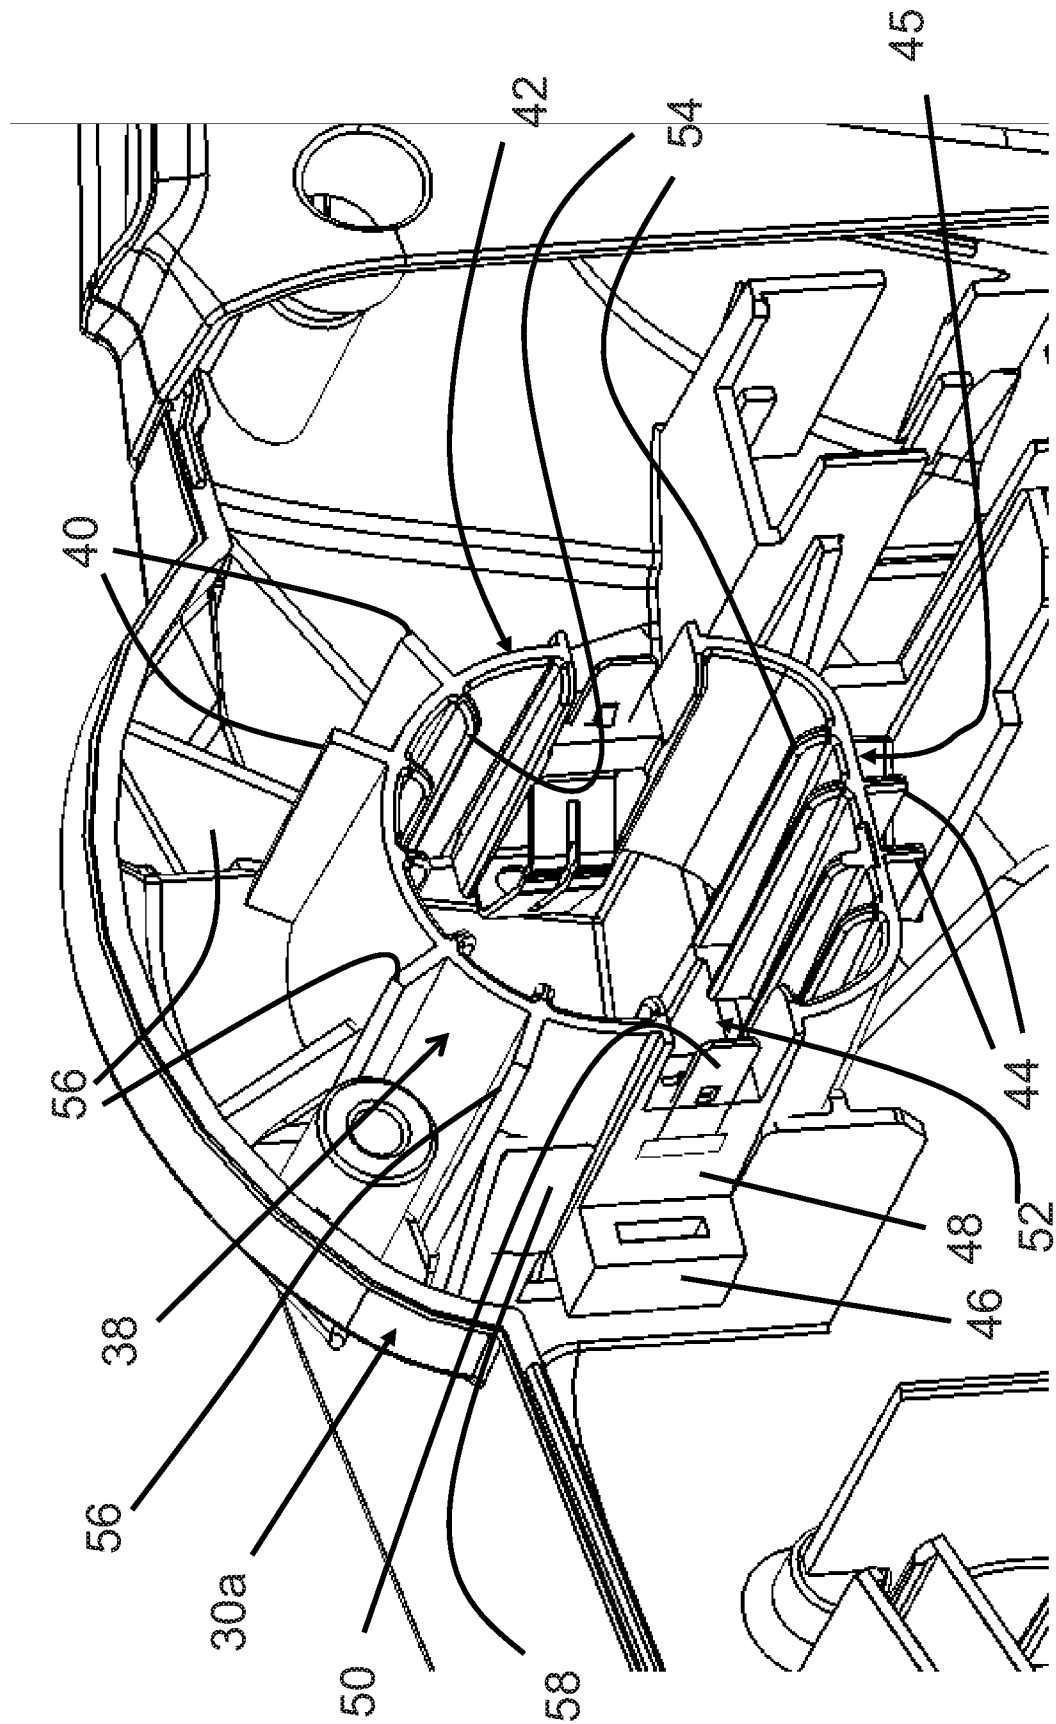
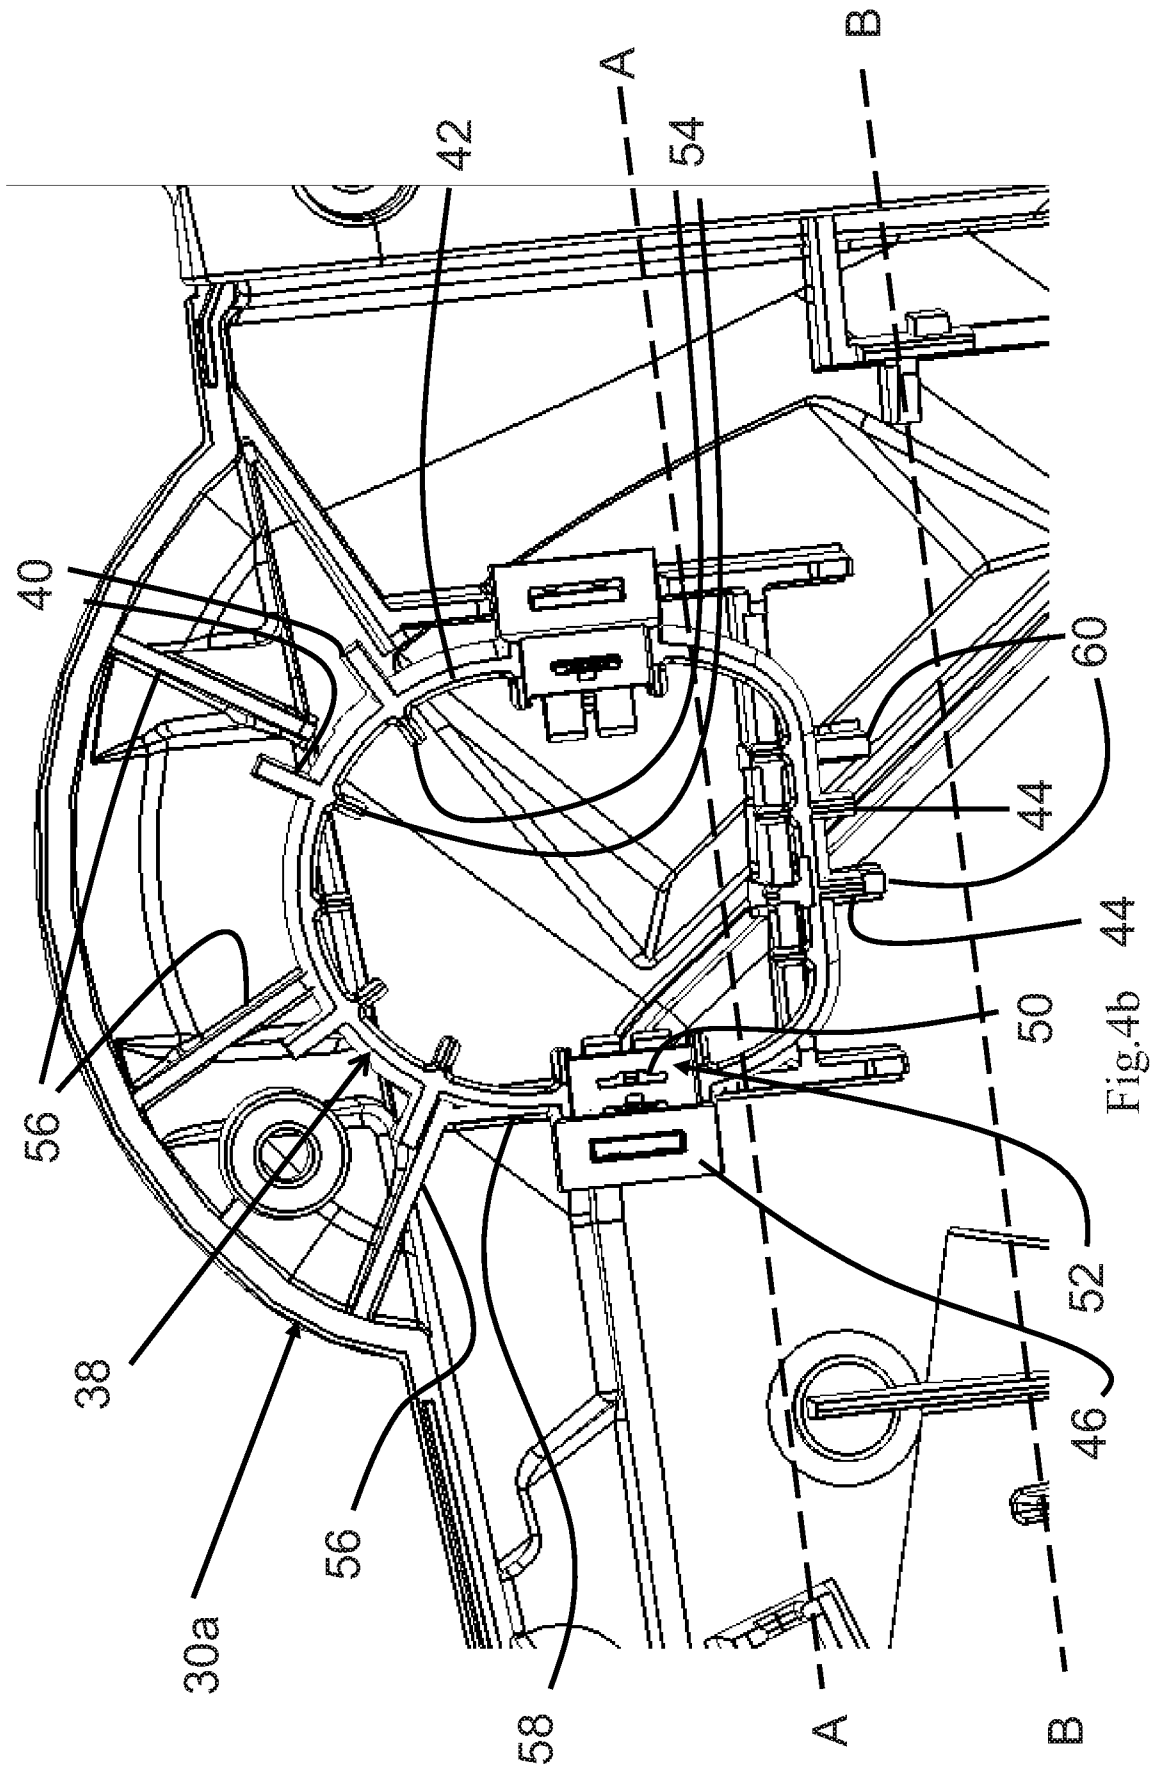
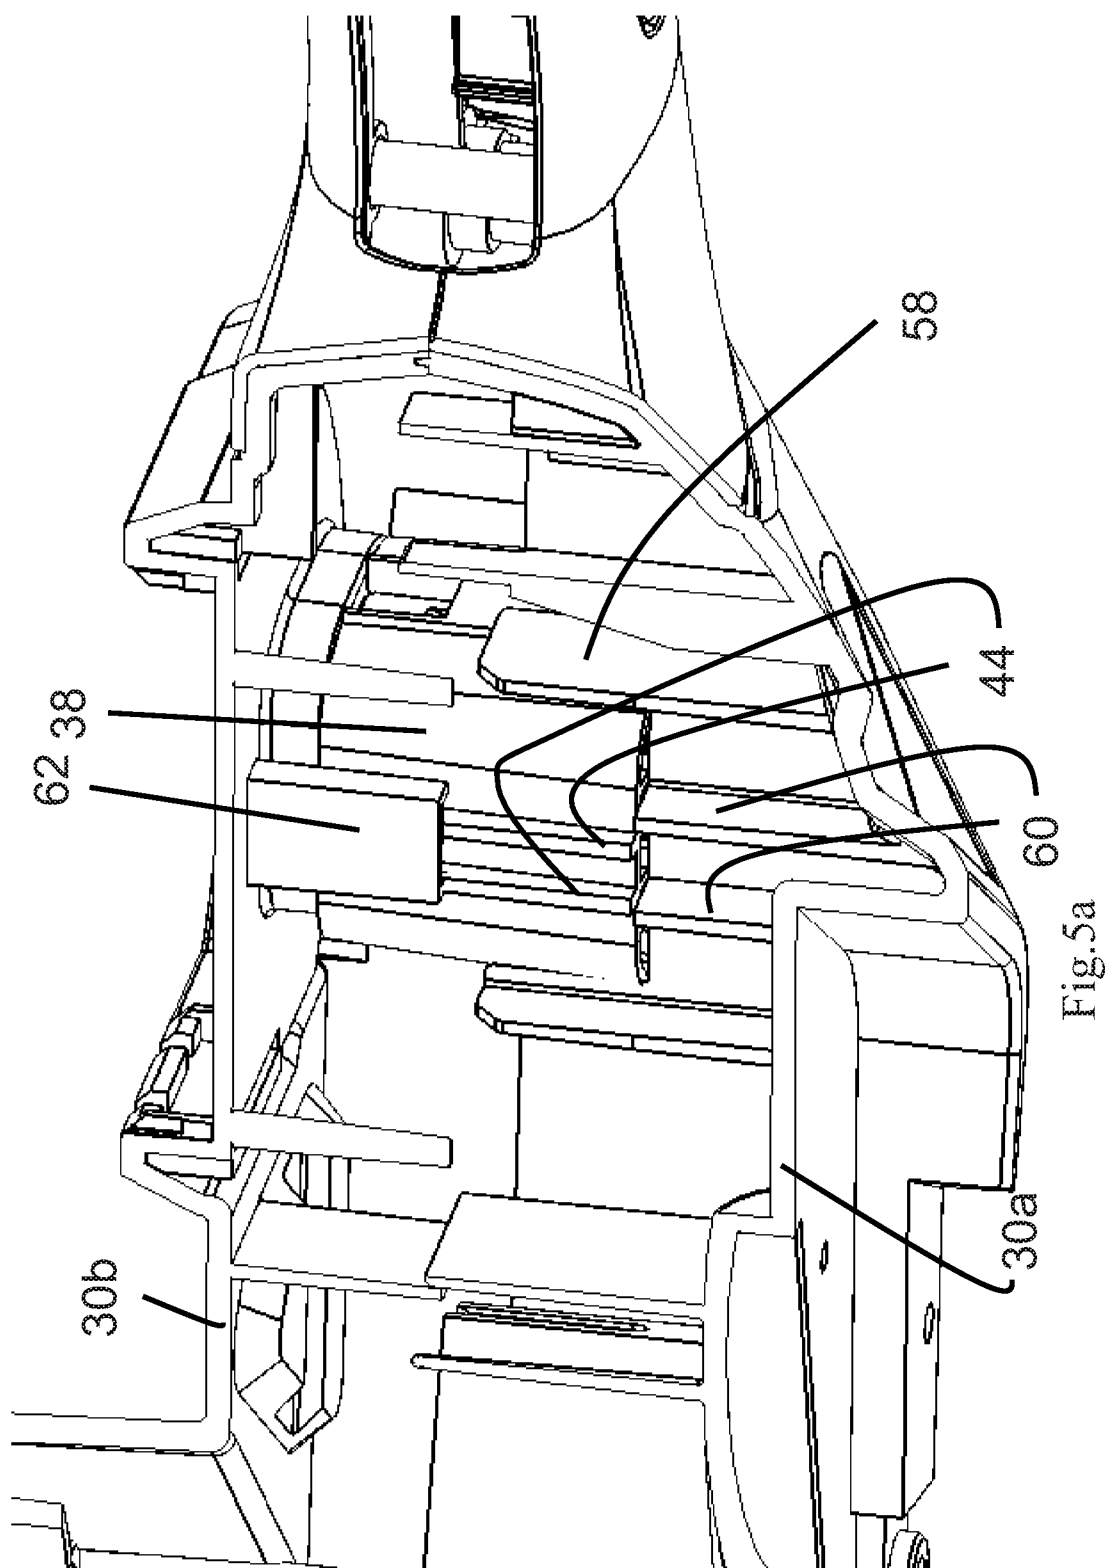
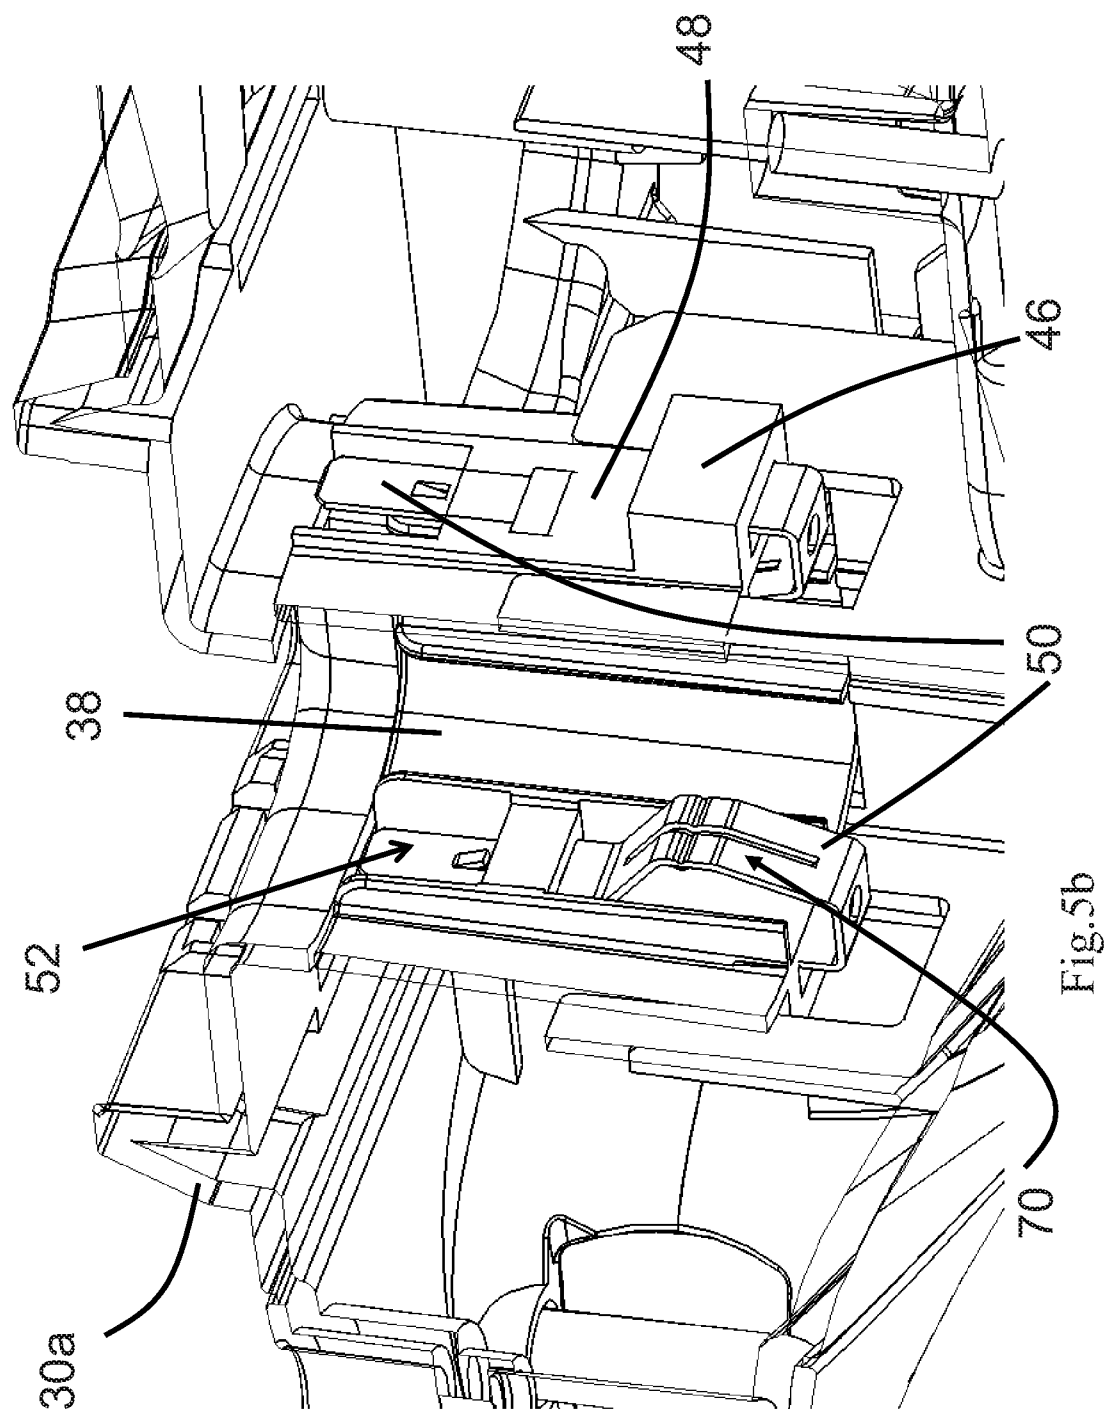
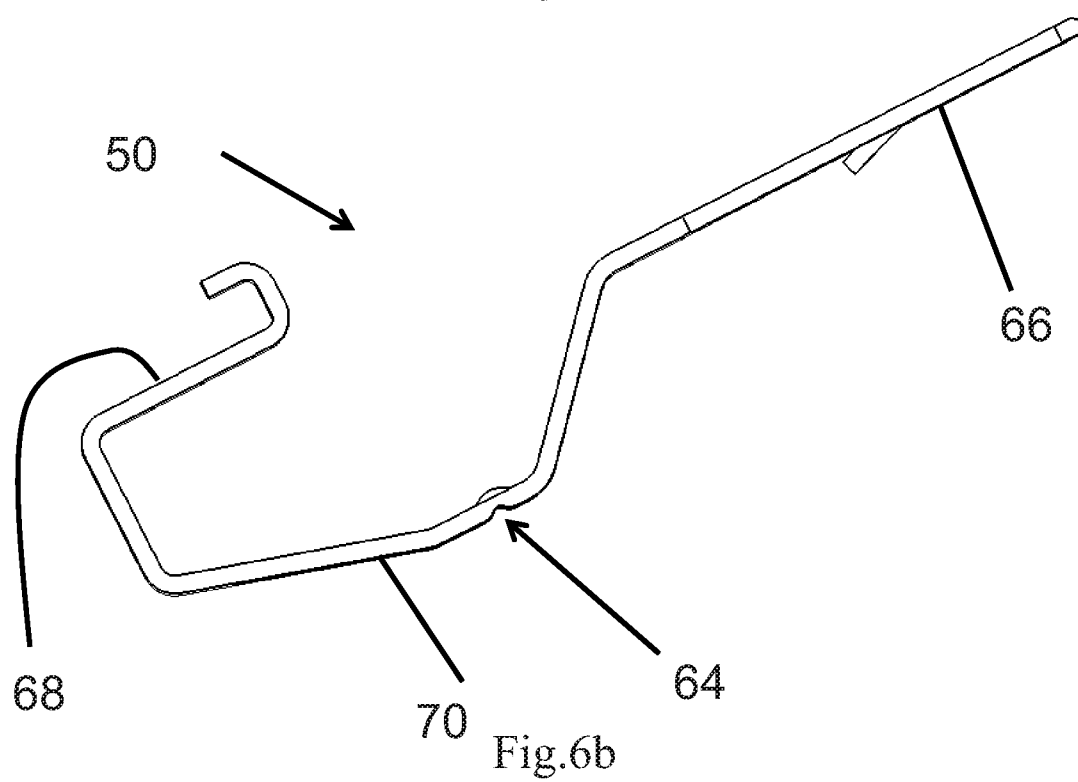
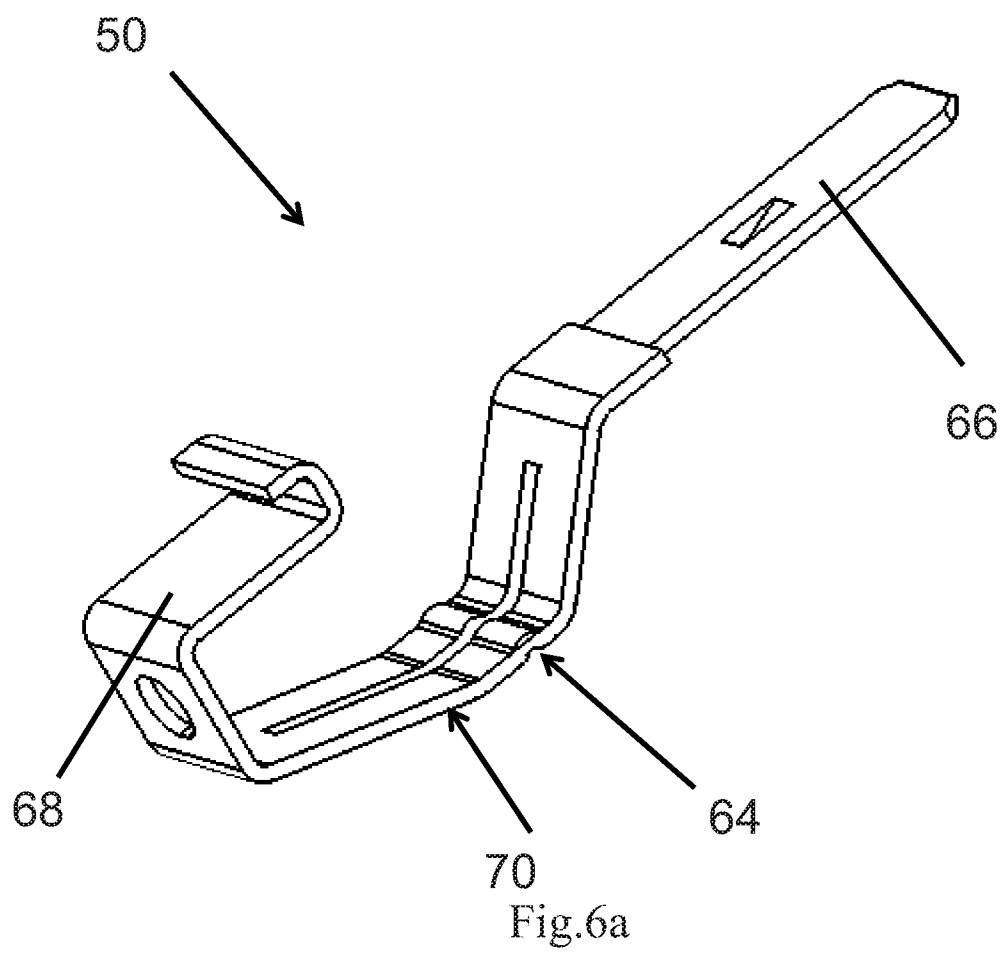


Fig. 4a









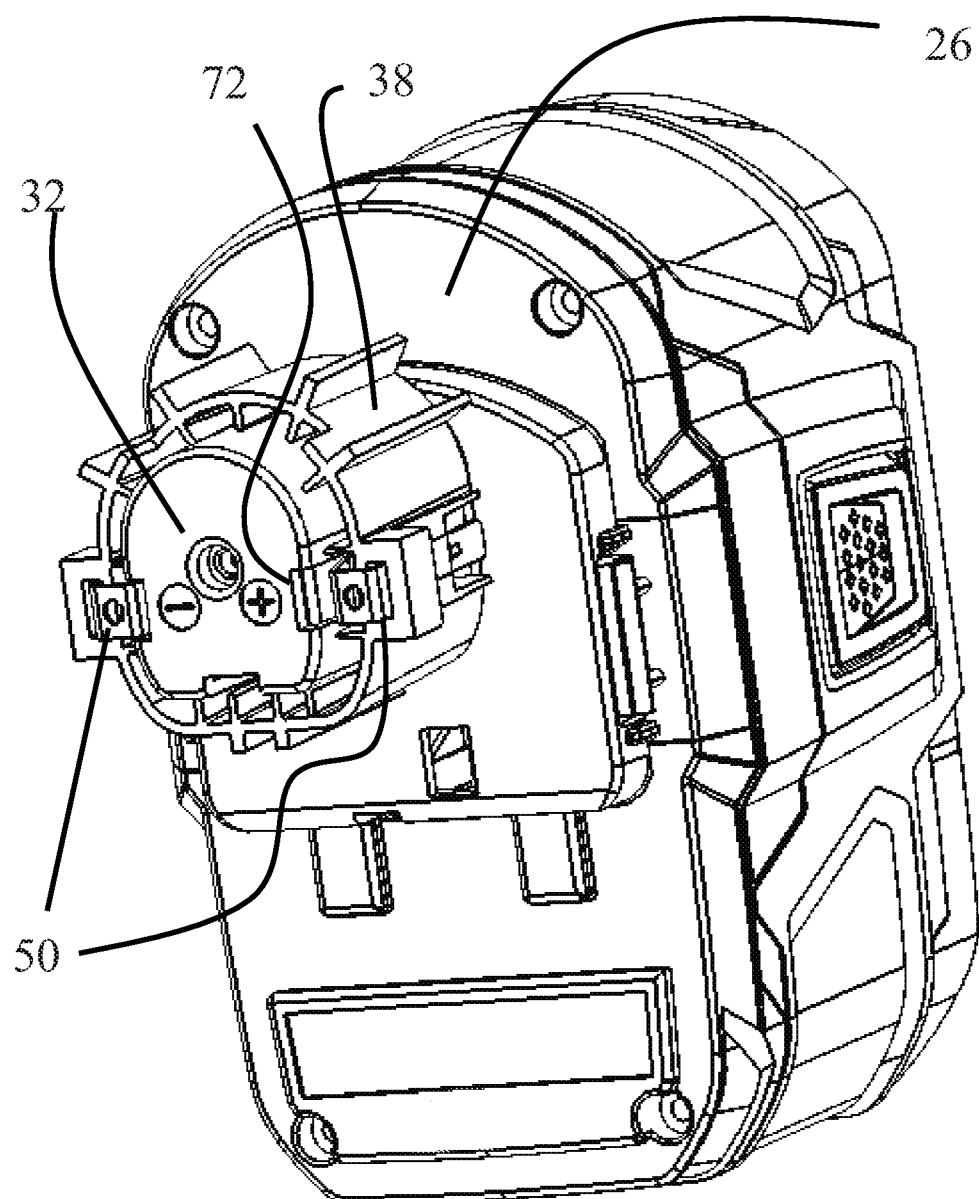


Fig.7

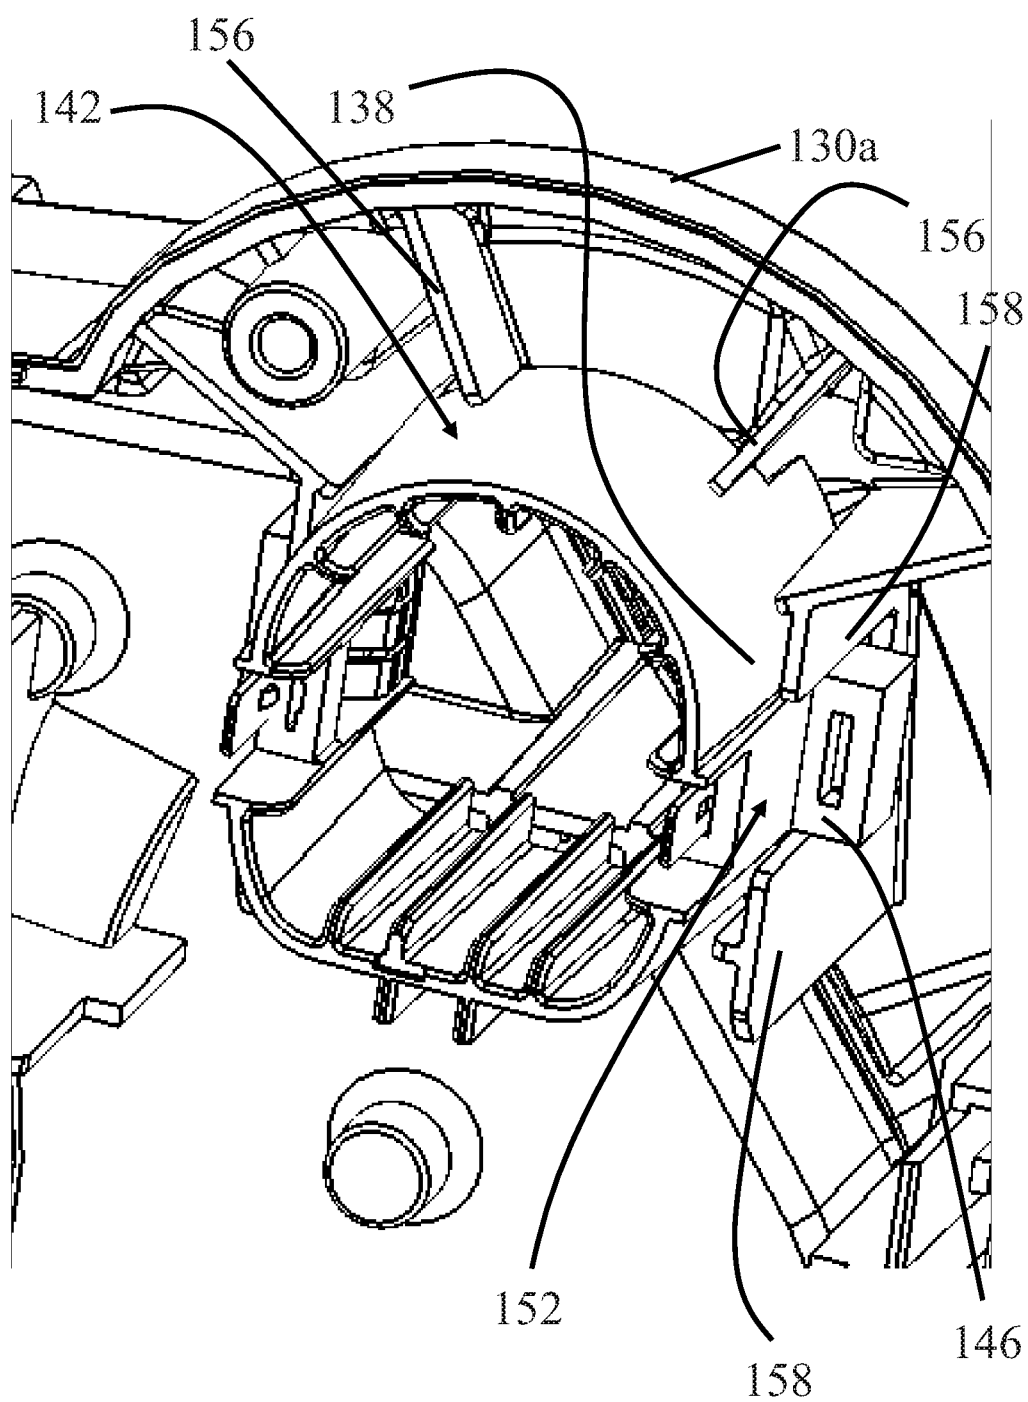


Fig.8a

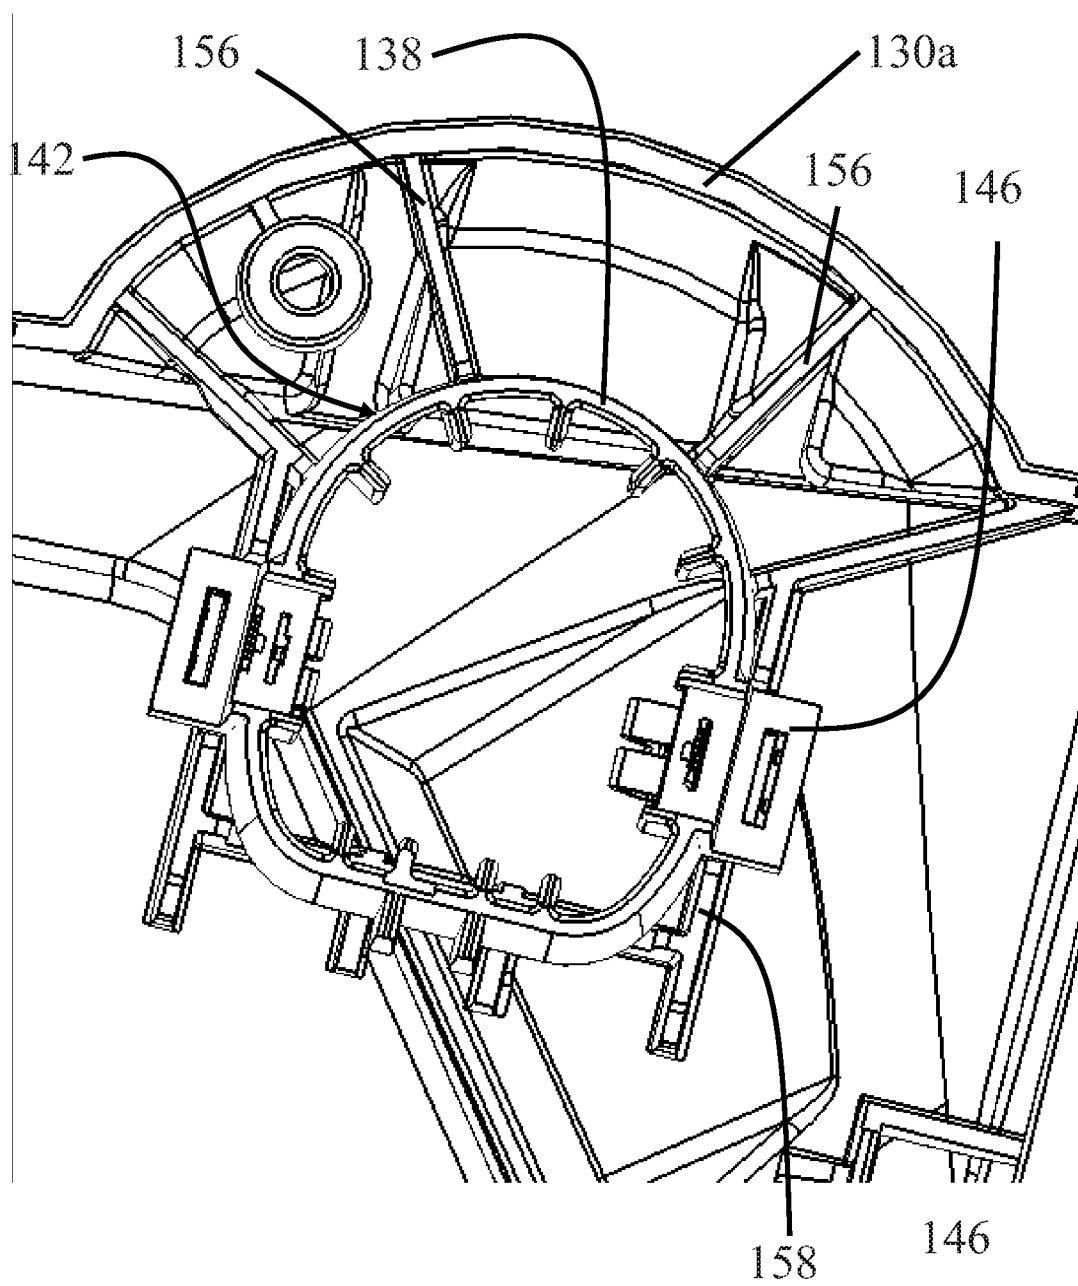


Fig.8b

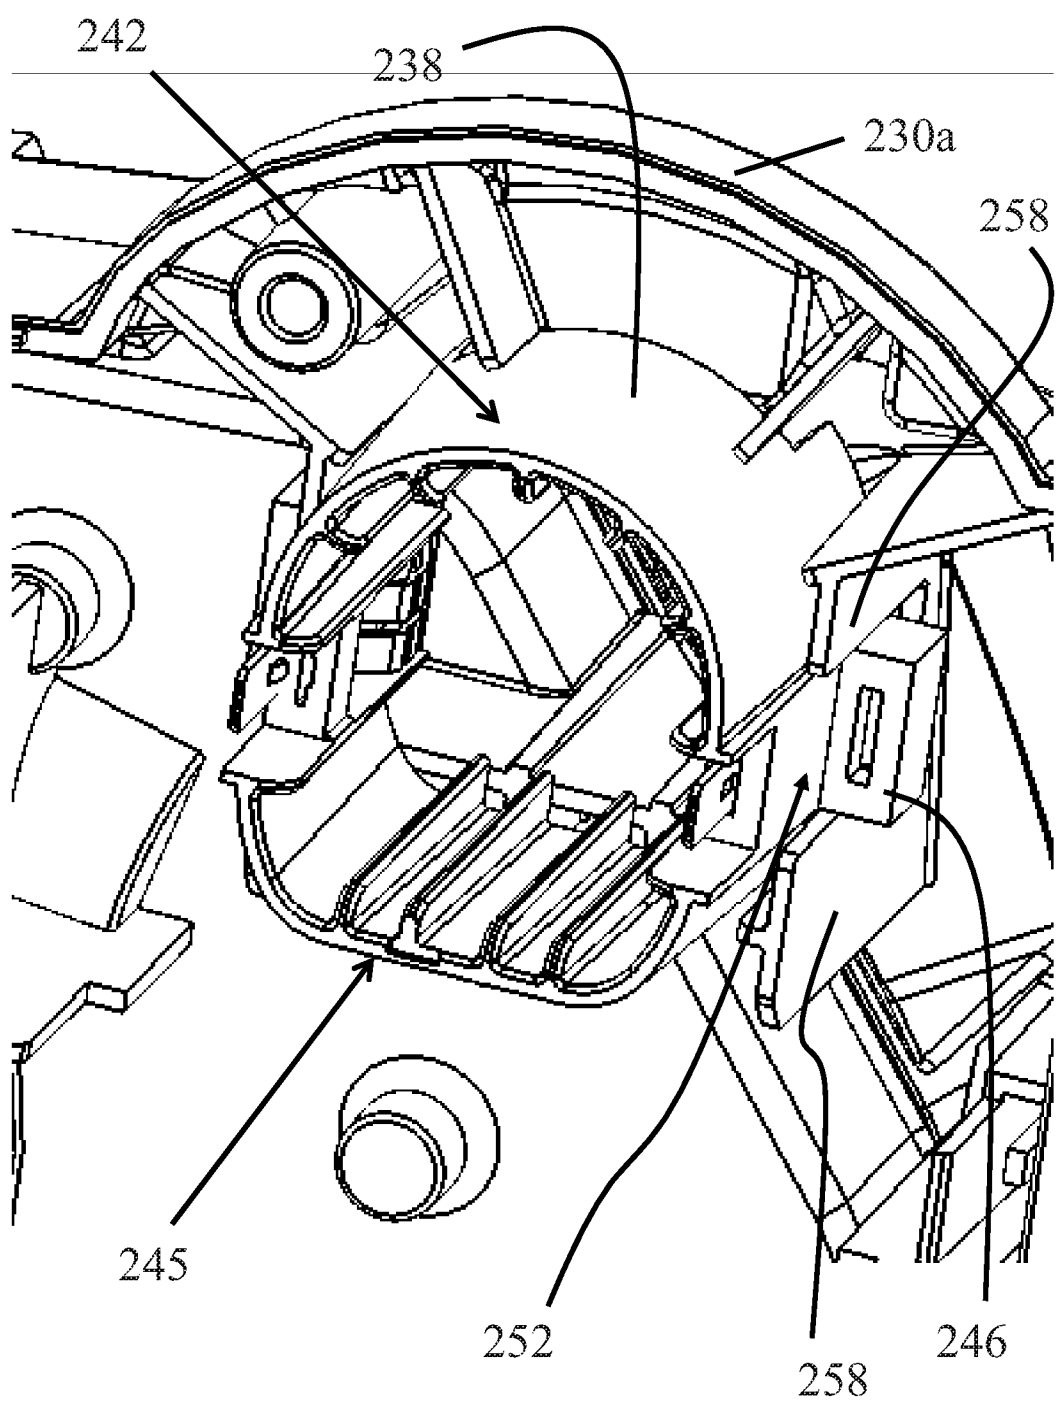


Fig.9a

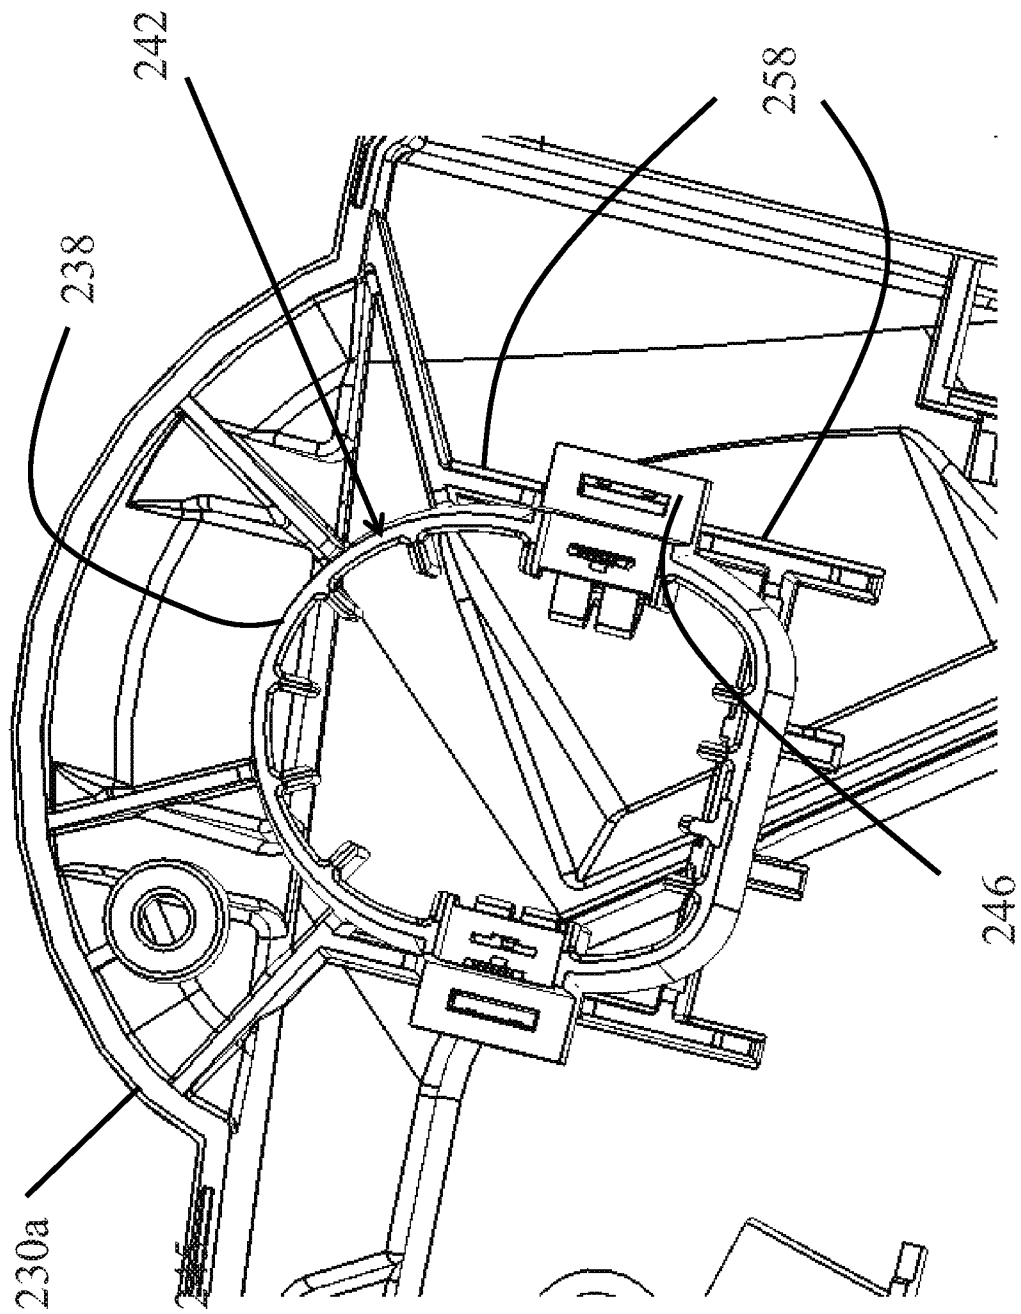


Fig.9b

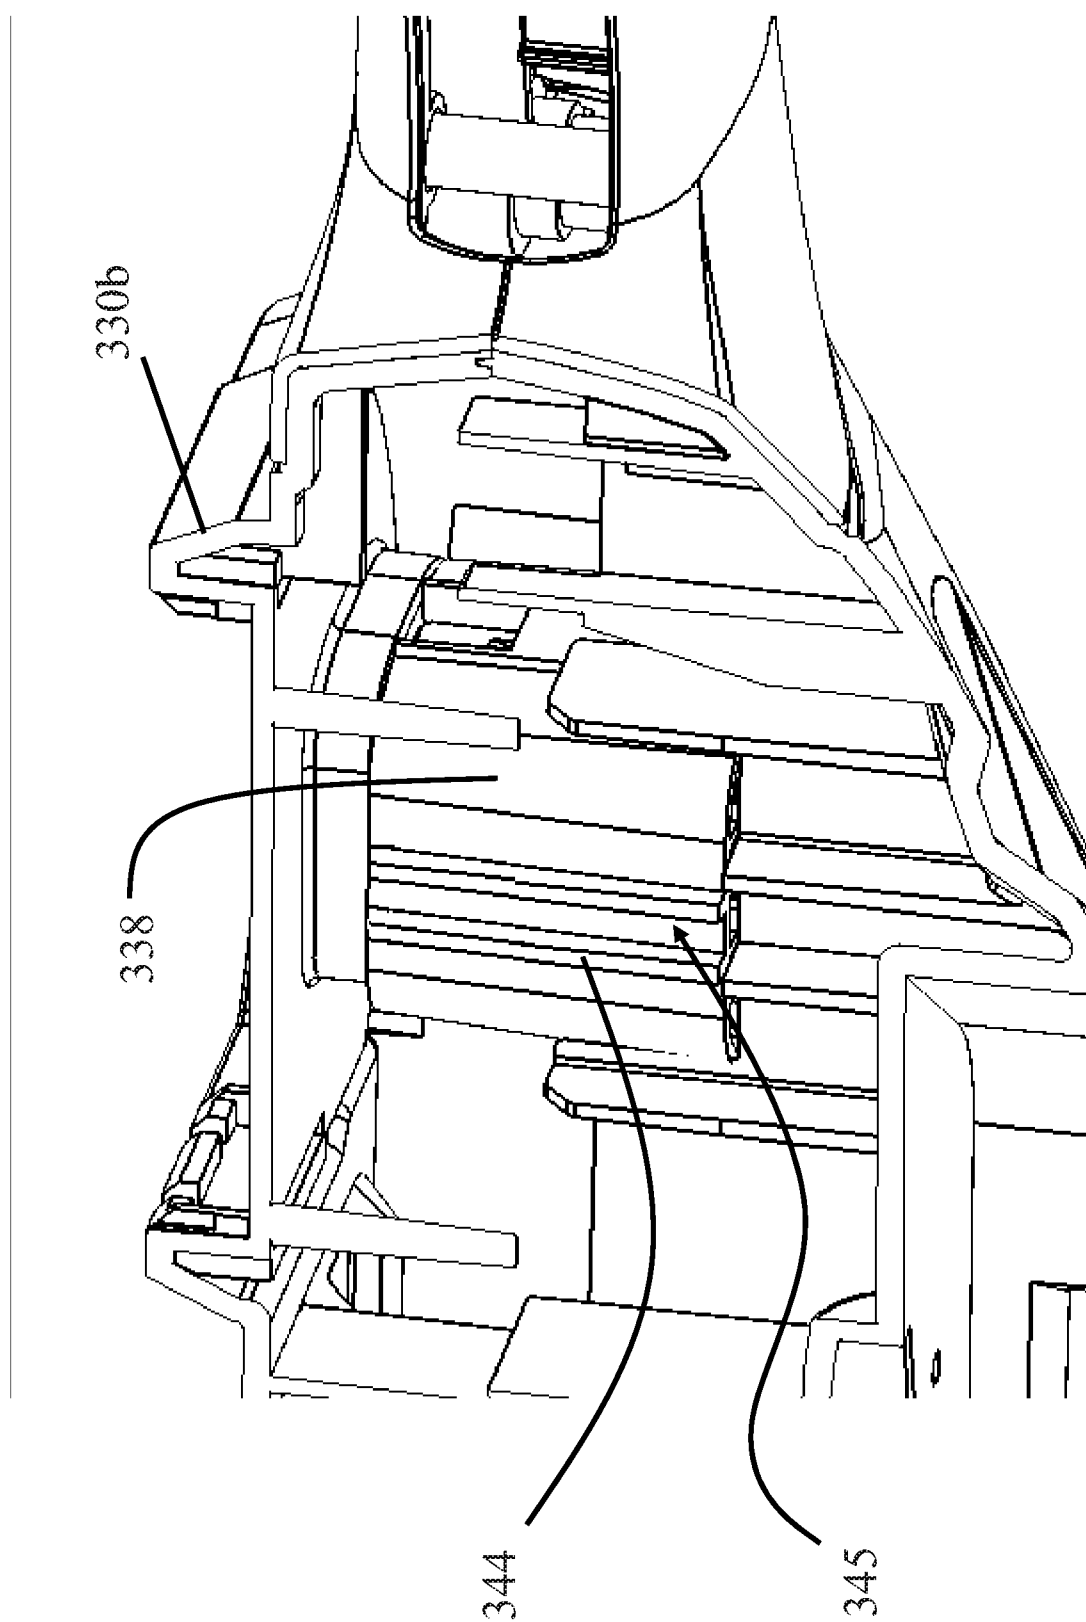


Fig.10

