

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
8 January 2009 (08.01.2009)

PCT

(10) International Publication Number
WO 2009/005915 A1(51) International Patent Classification:
B05B 5/04 (2006.01) *B05B 12/08* (2006.01)
B05B 7/08 (2006.01)

(74) Agent: HAUPTMAN, Benjamin, J.; Lowe Hauptman Ham & Berner, LLP, 1700 Diagonal Road, Suite 300, Alexandria, Virginia 22314 (US).

(21) International Application Number:
PCT/US2008/064953

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 28 May 2008 (28.05.2008)

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language: English

Published:

— with international search report

(26) Publication Language: English

(30) Priority Data:
11/773,156 3 July 2007 (03.07.2007) US

(71) Applicant (for all designated States except US): ILLINOIS TOOL WORKS INC. [US/US]; 3600 West Lake Avenue, Glenview, Illinois 60026 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): SEITZ, David, M. [US/US]; 3600 West Lake Avenue, Glenview, Illinois 60026 (US). CEDOZ, Roger, T. [US/US]; 3600 West Lake Avenue, Glenview, Illinois 60026 (US).

(54) Title: SPRAY DEVICE HAVING A PARABOLIC FLOW SURFACE

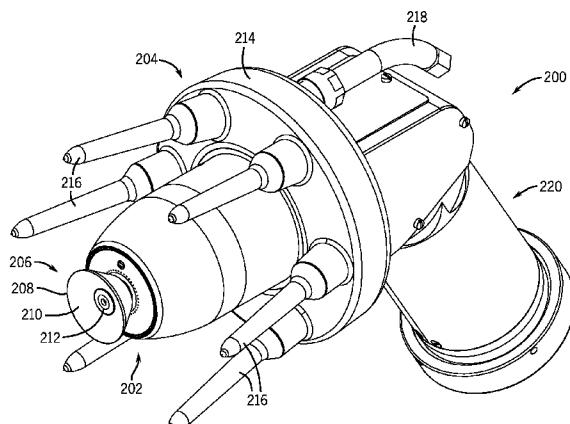


FIG. 3

(57) **Abstract:** A rotary atomizer spray coating device (202), in certain embodiments, has a bell cup (206) with a generally parabolic flow surface (210). This generally parabolic flow surface (210) provides additional surface area for dehydration of coating fluids, thereby improving color matching as compared to traditional bell cups, for example, by affording capability for higher wet solids content. In addition, the coating fluid accelerates along the generally parabolic flow surface, resulting in the fluid leaving the bell cup at a greater velocity than in traditional bell cups. Furthermore, a splash plate (212) disposed adjacent the bell cup, in certain embodiments, is designed such that fluid accelerates through an annular area between the splash plate and the generally parabolic flow surface. This acceleration may substantially reduce or eliminate low-pressure cavities in which fluid and/or particulate matter may be trapped, resulting in an even application of coating fluid and more effective cleaning of the bell cup as compared with traditional bell cups.

WO 2009/005915 A1

SPRAY DEVICE HAVING A PARABOLIC FLOW SURFACE

BACKGROUND

[0001] This section is intended to introduce the reader to various aspects of art that may be related to various aspects of the present invention, which are described and/or claimed below. This discussion is believed to be helpful in providing the reader with background information to facilitate a better understanding of the various aspects of the present invention. Accordingly, it should be understood that these statements are to be read in this light, and not as admissions of prior art.

[0002] Spray coating devices, often described as spray guns, are used to spray a coating onto a wide variety of work products. In addition, there are a variety of different types of spray coating devices. Some spray coating devices are manually operated, while others are operated automatically. One example of a spray coating device is a rotary atomizer. Rotary atomizers utilize a spinning disc or bell to atomize a coating material, such as paint, by centrifugal action. An electrostatic charge may be imparted to the atomized paint particles with a small amount of shaping air to project the particles forward toward the object that is being coated. Rotary atomizers may generally have a splash plate to direct fluids toward the surface of the bell, where the fluid is dehydrated as it flows to the edge of the bell. In some cases, inadequate dehydration may cause variations in the spray coating color. In addition, fluid and/or particulate matter may become lodged between the splash plate and the bell cup, causing irregularities in the spray coating and difficulty in cleaning the spray device.

BRIEF DESCRIPTION

[0003] Certain aspects commensurate in scope with the originally claimed invention are set forth below. It should be understood that these aspects are presented merely to provide the reader with a brief summary of certain forms the invention might take and that these aspects are not intended to limit the scope of the invention. Indeed, the invention may encompass a variety of aspects that may not be set forth below.

[0004] A spray coating device, in one embodiment, includes a bell cup having a generally parabolic flow surface. A spray coating system, in another embodiment, includes a bell cup having a central opening, an outer edge downstream from the central opening, and a flow surface between the central opening and the outer edge. The flow surface has a flow angle relative to a central axis of the bell cup, and the flow angle decreases in a flow path along the flow surface. A method for dispensing a spray coat, in another embodiment, includes flowing fluid from a central opening in a bell cup to an outer edge of the bell cup at least partially along a generally parabolic path.

DRAWINGS

[0005] These and other features, aspects, and advantages of the present invention will become better understood when the following detailed description is read with reference to the accompanying drawings in which like characters represent like parts throughout the drawings, wherein:

[0006] FIG. 1 is a diagram illustrating an embodiment of a spray coating system having a spray coating device with a parabolic flow surface;

[0007] FIG. 2 is a flow chart illustrating an embodiment of a spray coating process using a spray coating device having a parabolic flow surface;

[0008] FIG. 3 is a perspective view of an embodiment of a spray coating device having a parabolic flow surface;

[0009] FIG. 4 is a front view of an embodiment of the spray coating device of FIG. 3;

[0010] FIG. 5 is a side view of an embodiment of the spray coating device of FIG. 3;

[0011] FIG. 6 is a cross-sectional view of an embodiment of the spray coating device of FIG. 4 taken along line 6-6;

[0012] FIG. 7 is a partial cross-sectional view of an embodiment of the spray coating device of FIG. 6 taken along line 7-7;

[0013] FIG. 8 is a partial view of a serrated edge of an embodiment of the spray coating device of FIG. 7 taken along line 8-8;

[0014] FIG. 9 is a cross-sectional view of an embodiment of a bell cup having a parabolic flow surface for use with a spray coating device;

[0015] FIG. 10 is a cross-sectional view of a splash plate for use with a spray coating device; and

[0016] FIGS. 11-13 are cross-sectional views of embodiments of bell cups for use with various spray coating devices.

DETAILED DESCRIPTION

[0017] One or more specific embodiments of the present invention will be described below. In an effort to provide a concise description of these embodiments, not all features of an actual implementation are described in the specification. It should be appreciated that in the development of any such actual implementation, as in any engineering or design project, numerous implementation-specific decisions must be made to achieve the developers' specific goals, such as compliance with system-related and business-related constraints, which may vary from one implementation to another. Moreover, it should be appreciated that such a development effort might be complex and time consuming, but would nevertheless be a routine undertaking of design, fabrication, and manufacture for those of ordinary skill having the benefit of this disclosure.

[0018] A rotary atomizer spray coating device, in certain embodiments, has a bell cup with a curved flow surface, such as a generally parabolic flow surface, in a flow path for fluid flowing downstream to create a spray. In other words, an angle tangent to the flow surface progressive changes along the flow path, for example, in a completely continuous manner, in small steps, or with compounded curves. The

curved flow surface, e.g., generally parabolic or with curves approximating a parabolic curve, is contrastingly different from a conical flow surface in terms of function, way, and result associated with the fluid flow, spray characteristics, color matching, and cleaning, among other things. For example, the generally parabolic flow surface provides additional surface area for dehydration of coating fluids, thereby improving color matching as compared to traditional bell cups, for example, by affording capability for higher wet solids content. In addition, the coating fluid accelerates along the generally parabolic flow surface, resulting in the fluid leaving the bell cup at a greater velocity than in traditional bell cups. Furthermore, a splash plate disposed adjacent the bell cup, in certain embodiments, is designed such that fluid accelerates through an annular area between the splash plate and the generally parabolic flow surface. This acceleration may substantially reduce or eliminate low-pressure cavities in which fluid and/or particulate matter may be trapped, resulting in an even application of coating fluid and more effective cleaning of the bell cup as compared with traditional bell cups.

[0019] FIG. 1 is a flow chart illustrating an exemplary spray coating system 10, which generally includes a spray coating device 12 having a curved flow surface (e.g., a generally parabolic flow surface) for applying a desired coating to a target object 14. Again, as mentioned above and discussed in further detail below, the curved flow surface of the spray coating device 12 provides significant advantages over existing conical flow surfaces. For example, the function of the curved flow surface may include increasing dehydration of the fluid, accelerating the fluid flow as it flows downstream, and progressively increasing force on the fluid as it flows downstream. The increased dehydration is provided by the increased surface area attributed to the curved geometry as compared to a conical geometry. In addition, the thickness of the sheet of fluid flowing across the curved flow surface decreases from the center of the surface outward. The accelerated fluid flow is provided by the progressively changing angle of the fluid flow attributed to the curved geometry as compared to a conical geometry. The progressively increasing force is also provided by the progressively changing angle of the fluid flow attributed to the curved geometry as compared to a conical geometry. The thickness of the fluid sheet as it leaves the edge of the curved

flow surface may be greater than that of a traditional conical bell cup, however the greater force and/or greater acceleration of the fluid flowing along and leaving the bell cup provides improved color matching, improved atomization, and reduced clogging (e.g., the system is cleaner) as compared to traditional conical bell cups.

[0020] The spray coating device 12 may be coupled to a variety of supply and control systems, such as a fluid supply 16, an air supply 18, and a control system 20. The control system 20 facilitates control of the fluid and air supplies 16 and 18 and ensures that the spray coating device 12 provides an acceptable quality spray coating on the target object 14. For example, the control system 20 may include an automation system 22, a positioning system 24, a fluid supply controller 26, an air supply controller 28, a computer system 30, and a user interface 32. The control system 20 also may be coupled to a positioning system 34, which facilitates movement of the target object 14 relative to the spray coating device 12. Accordingly, the spray coating system 10 may provide synchronous computer control of coating fluid rate, air flow rate, and spray pattern. Moreover, the positioning system 34 may include a robotic arm controlled by the control system 20, such that the spray coating device 12 covers the entire surface of the target object 14 in a uniform and efficient manner. In one embodiment, the target object 14 may be grounded to attract charged coating particles from the spray coating device 12.

[0021] The spray coating system 10 of FIG. 1 is applicable to a wide variety of applications, fluids, target objects, and types/configurations of the spray coating device 12. For example, a user may select a desired object 36 from a variety of different objects 38, such as different material and product types. The user also may select a desired fluid 40 from a plurality of different coating fluids 42, which may include different coating types, colors, textures, and characteristics for a variety of materials such as metal and wood. As discussed in further detail below, the spray coating device 12 also may comprise a variety of different components and spray formation mechanisms to accommodate the target object 14 and fluid supply 16 selected by the user. For example, the spray coating device 12 may comprise an air atomizer, a rotary atomizer, an electrostatic atomizer, or any other suitable spray formation mechanism.

[0022] The spray coating system 10 may be utilized according to an exemplary process 100 for applying a desired spray coating to the target object 14, as illustrated in FIG. 2. The process 100 begins by identifying the target object 14 for application of the desired fluid (block 102). The process 100 then proceeds by selecting the desired fluid 40 for application to a spray surface of the target object 14 (block 104). The spray coating device 12 may be configured for the identified target object 14 and selected fluid 40 (block 106). As the spray coating device 12 is engaged, an atomized spray of the selected fluid 40 is created (block 108). The spray coating device 12 may then apply a coating of the atomized spray to the desired surface of the target object 14 (block 110). The applied coating is then cured and/or dried (block 112). If an additional coating of the selected fluid 40 is requested at a query block 114, then the process 100 proceeds through blocks 108, 110, and 112 to provide another coating of the selected fluid 40. If an additional coating of the selected fluid is not requested at query block 114, then the process 100 proceeds to a query block 116 to determine whether a coating of a new fluid is needed. If a coating of a new fluid is requested at query block 116, then the process 100 proceeds through blocks 104, 106, 108, 110, 112, and 114 using a new selected fluid for the spray coating. If a coating of a new fluid is not requested at query block 116, then the process 100 is finished (block 118).

[0023] A perspective view of an exemplary embodiment of a spray device 200 for use in the system 10 and process 100 is illustrated in FIG. 3. The spray device 200 includes a rotary atomizer 202 and an electrostatic charge generator 204. The rotary atomizer 202 includes at its front a bell cup 206 having an atomizing edge 208 and a flow surface 210. As mentioned above and discussed in detail below, the flow surface 210 advantageously includes a curved flow surface, such as a generally parabolic flow surface, as opposed to a substantially or entirely conical flow surface. A splash plate 212 is disposed within the bell cup 206. The electrostatic charge generator 204 includes a high voltage ring 214, high voltage electrodes 216, and a connector 218 for connection to a power source. A neck 220 of the spray device 200 includes at its distal end air and fluid inlet tubes and a high voltage cable inlet. FIGS. 4 and 5 are front and side views, respectively, of an embodiment of the spray device 200 of FIG. 3.

[0024] FIG. 6 is a cross-sectional view of an embodiment of the spray device 200 taken along line 6-6 of FIG. 4. The rotary atomizer 202 includes an atomizer spindle 222 and a spindle shaft 224. An air turbine rotates the spindle shaft 224 within the spindle 222. The bell cup 206 is coupled to a proximal end of the spindle shaft 224 such that rotation of the spindle shaft 224 also rotates the bell cup 206. When fluid enters the rotating bell cup 206, the fluid travels along the flow surface 210 (e.g., curved, parabolic, or substantially continuously changing) and is atomized into fluid particles as it leaves the atomizing edge 208.

[0025] A fluid tube 226 is disposed within the spindle shaft 224 for supplying fluids, such as the desired coating fluid 40, to the bell cup 206. The illustrated fluid tube 226 is not coupled to the spindle shaft 224 and does not rotate with respect to the spray device 200. One or more fluid passageways 228 may be disposed within the fluid tube 226 and may extend to one or more fluid supplies. In some instances, it may be desirable to clean the bell cup 206 without purging the system. Accordingly, the fluid passageways 226 may include separate passageways for the coating fluid 40 and a solvent. In addition, a solvent nozzle 230 is located adjacent to the bell cup 206 and is configured to direct a spray of cleaning solvent to the exterior of the bell cup 206. A fluid valve 232 is disposed within the coating fluid passageway 228 and is configured to selectively enable flow of the coating fluid 40 when air is supplied to the air turbine. That is, the valve 232 opens when rotation of the spindle shaft 224 and the bell cup 206 is activated.

[0026] Air is supplied to the turbine via one or more air passageways 234. The air passageways 234 also supply air to shaping air jets 236. The shaping air jets 236 are configured to direct the fluid particles toward the target object 14 as the particles leave the atomizing edge 208 of the bell cup 206. In addition, the high voltage electrodes 216 are configured to generate a strong electrostatic field around the bell cup 206. This electrostatic field charges the atomized fluid particles such that the particles are attracted to the grounded target object 14. The high voltage electrodes 216 are energized via the high voltage ring 214. The connector 218 is configured to couple the high voltage ring 214 to a high voltage cable. The high voltage cable may exit the neck 220 at an opening 240 to couple with the connector 218.

[0027] FIG. 7 is a close-up cross-sectional view of an embodiment of the spray coating device 200 taken along line 7-7 of FIG. 6. A fluid tip 242 is connected to a proximal end of the fluid tube 226. One or more fluid inlets 244 in the fluid tip 242 are connected to the one or more fluid passageways 228 in the fluid tube 226. Fluid exits the tip 242 at a fluid outlet 246 and impacts a rear surface 248 of the splash plate 212. The rear surface 248 of the splash plate 212 directs the fluid radially outward toward the flow surface 210. As the bell cup 206 rotates, the fluid travels along the flow surface 210 to the atomizing edge 208. As discussed further below, the flow path between the rear surface 248 of the splash plate 212 and the flow surface 210 (e.g., curved, parabolic, or substantially continuously changing) may converge the fluid flow that is flowing toward the edge 208, thereby reducing the potential for low pressure zones, clogging, and so forth. Thus, the converging flow may ensure that the spray coating device 200 remains clean, thereby reducing downtime for cleaning or repair due to debris buildup.

[0028] In one embodiment, the atomizing edge 208 may include serrations 250, as illustrated in FIG. 8. As the bell cup 206 rotates, fluid travels along the flow surface 210 generally in the direction of arrows 252. As the fluid reaches a tapered end 254 of the serrations 250, separate fluid paths 256 are formed between the serrations 250. The serrations 250 may increase in width and height away from the tapered ends 254, decreasing the width of the fluid paths 256. As a result of the serrations 250, the fluid may tend to leave the edge 208 of the bell cup 206 traveling generally in a direction along the fluid paths 256. Other structures may also be utilized, such as, for example, ridges or grooves. Moreover, as mentioned above, the curved geometry (e.g., generally parabolic) of the flow surface 210 may accelerate the fluid flow and increase the force applied to the fluid in the path toward the edge 208. As a result, the increased acceleration and force on the fluid flow may improve the effectiveness of the serrations 250, which then improves atomization, color matching, and so forth.

[0029] Referring now to FIG. 9, if the bell cup 206 does not have a sufficient rotational velocity, fluid may enter the bell cup 206 at a greater rate than it can be dispersed. Accordingly, there is provided a flow cavity 258 having holes 260 which are in fluid communication with the exterior of the bell cup 206 via channels 262.

Excess fluid exiting the fluid outlet 246 may travel to the flow cavity 258 and out of the bell cup 206 rather than backing up in the fluid tube 226.

[0030] In the exemplary embodiment illustrated in FIG. 9, the flow surface 210 of the bell cup 206 extends from a central opening 263 to the atomizing edge 208. The illustrated flow surface 210 has a curved shape, which is a generally parabolic shape. That is, the flow surface 210 may be defined by a parabolic curve rotated about a center axis 264. However, a variety of other curved surfaces also may be used for the flow surface 210 of the bell cup 206. It should be noted that the flow surface 210 is at least partially, substantially, or entirely curved, but is not substantially or entirely conical. For example, the flow surface 210 may be 10, 20, 30, 40, 50, 60, 70, 80, 90, 95, or 100 percent curved in a path extending between the central opening 263 and the edge 208. The curved geometry, e.g., parabolic, may be defined as a single continuous curve, a compounded curve, a series of curves in steps one after another (e.g., stepwise curve), and so forth. For example, each step may be less than 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, or possibly a greater percent of the distance between the opening 263 and the edge 208.

[0031] In certain embodiments, an angle of the flow surface 210 relative to the central axis 264 decreases progressively from the center of the bell cup 206 to the atomizing edge 208. This angle decrease can be seen in angles α and β , defined by lines 266 and 268, respectively, with relation to the center axis 264. The line 266 is tangential to the flow surface 210 near the splash plate 212, and the line 268 is tangential to the flow surface 210 near the atomizing edge 208. The curved geometry (e.g., parabolic) of the flow surface 210 provides a greater surface area as compared to traditional bell cups (e.g., conical) for a given bell cup diameter. This improved surface area provides additional dehydration surface for color matching of waterborne coatings by affording capability for higher wet solids content. In addition, the parabolic flow surface 210 results in increasing force on the fluid as it travels to the atomizing edge 208. This increasing force enables the fluid to leave the atomizing edge 208 at a greater velocity than in traditional bell cups. In addition, in bell cups with serrations 250 at or near the atomizing edge 208, the increasing force enables the fluid to flow through the serrations 250 at a greater velocity. The curved flow surface

210 may also result in a thicker sheet of coating at the atomizing edge 208, therefore the curve of the parabola may be determined by balancing the desired sheet thickness against dehydration and fluid velocity requirements. The parabolic flow surface 210 may be manufactured in a stepwise manner such that each step is angled in relation to the previous step. That is, the flow surface 210 may be a number of stepwise surfaces having variably changing angles with respect to the center axis 264.

[0032] In addition, the splash plate 212 and bell cup 206 are designed such that there is a converging annular passageway 269 between the rear surface 248 and the flow surface 210. The convergence of the fluid flow may be a constant rate of convergence or it may be an increasing rate of convergence in various embodiments of the spray coating device. As illustrated, a distance 270 near the center axis 264 between the rear surface 248 and the flow surface 210 is greater than a distance 272 away from the center axis 264 between the rear surface 248 and the flow surface 210. This convergence results in an accelerating fluid flow through the annular passageway. The acceleration may be a constant rate of acceleration or it may be an increasing rate of acceleration. In addition, in the illustrated embodiment, there are no flat sections on either the flow surface 210 or the rear surface 248, such that there are no low-pressure cavities in which fluid and/or particulate matter may be trapped. As a result, the coating fluid may be applied at a generally even velocity, and the bell cup 206 may be cleaned more effectively than a traditional bell cup. The splash plate 212 further includes small holes 274 through which fluid may flow. A small amount of fluid may seep through the holes 274 to wet a front surface 276 of the splash plate 212 so that specks of coating fluid do not dry on the splash plate 212 and contaminate the applied coating.

[0033] A more detailed view of the splash plate 212 is illustrated in FIG. 10. The splash plate 212 includes two sections, a disc section 278 and an insert section 280. The sections 278 and 280 are held together by connectors 282. The connectors 282 may include, for example, pins or screws. The insert section 280 is configured to be inserted into the central opening 263 in the bell cup 206. A locking ring 284 secures the splash plate 212 to the bell cup 206.

[0034] A similar embodiment of the bell cup is illustrated in FIG. 11. In a bell cup 286, the generally parabolic flow surface 210 extends to a flip edge 288 which extends to the atomizing edge 208. A junction region 289 connects the flow surface 210 to the flip edge 288. An angle γ is defined by a line 290 tangential to the flip edge 288 and the central axis 264. As can be seen in FIG. 11, the angle γ is significantly smaller than the angle β . In addition, the difference between the angles β and γ is much larger than the difference between the angles α and β . This is due to a greater curvature in the junction region 289 than in the flow surface 210. The flip edge 288 may have a constant angle relative to the center axis 264 or may have a progressively decreasing angle similar to the flow surface 210. As fluid reaches the junction region 289, the increased curvature accelerates the fluid at a greater rate as compared to the flow surface 210. Accordingly, fluid may leave the atomizing edge 208 with a greater velocity when the flip edge 288 is present, as in the bell cup 286, than when the flip edge is not present, as in the bell cup 206 of FIG. 9.


[0035] FIGS. 12 and 13 illustrate alternative embodiments of the bell cup and splash plate. A cross-sectional view of a bell cup 292 and a splash plate 294 are illustrated in FIG. 12. The bell cup 292 has a generally parabolic flow surface 296. A rear surface 298 of the splash plate 294 has a generally concave shape from a center point 300 to an edge 302. As with the embodiment illustrated in FIG. 9, the splash plate 294 and the bell cup 292 are configured such that the rear surface 298 and the flow surface 296 converge in the flow path away from the center point 300 of the splash plate 294. In addition, a distance 304 between the edge 302 of the splash plate 294 and the flow surface 296 is greater than the distance 272 in FIG. 9, allowing for a greater flow rate of fluid. In a similar embodiment of the bell cup, illustrated in FIG. 13, a bell cup 306 has a flip edge 308.

[0036] While only certain features of the invention have been illustrated and described herein, many modifications and changes will occur to those skilled in the art. It is, therefore, to be understood that the appended claims are intended to cover all such modifications and changes as fall within the true spirit of the invention.

CLAIMS:


1. A spray coating device, comprising a bell cup having a generally parabolic flow surface.
2. The device of claim 1, wherein the generally parabolic flow surface is configured to improve color matching.
3. The device of claim 1, comprising a rotary atomizer having the bell cup.
4. The device of claim 1, comprising a splash plate disposed adjacent the generally parabolic flow surface.
5. The device of claim 4, wherein the splash plate and the generally parabolic flow surface define a converging fluid passageway.
6. The device of claim 5, wherein the converging fluid passageway is configured to accelerate a flow of fluid therethrough.
7. The device of claim 4, wherein a rear surface of the splash plate and the generally parabolic flow surface do not comprise flat surfaces in a space between the splash plate and the generally parabolic flow surface.
8. The device of claim 1, wherein the generally parabolic flow surface comprises a plurality of stepwise surfaces having variably changing angles with respect to a central axis of the bell cup.

9. The device of claim 1, wherein the generally parabolic flow surface comprises a surface defined by a revolution of a parabolic curve about a central axis of the bell cup.
10. The device of claim 1, comprising a flip edge between the generally parabolic flow surface and an outer edge of the bell cup, wherein the flip edge has an angle discontinuous from the generally parabolic flow surface.
11. The device of claim 1, wherein the generally parabolic flow surface comprises a surface area greater than a generally conical flow surface.
12. The device of claim 1, wherein the generally parabolic flow surface is configured to accelerate a flow rate of a fluid thereon.

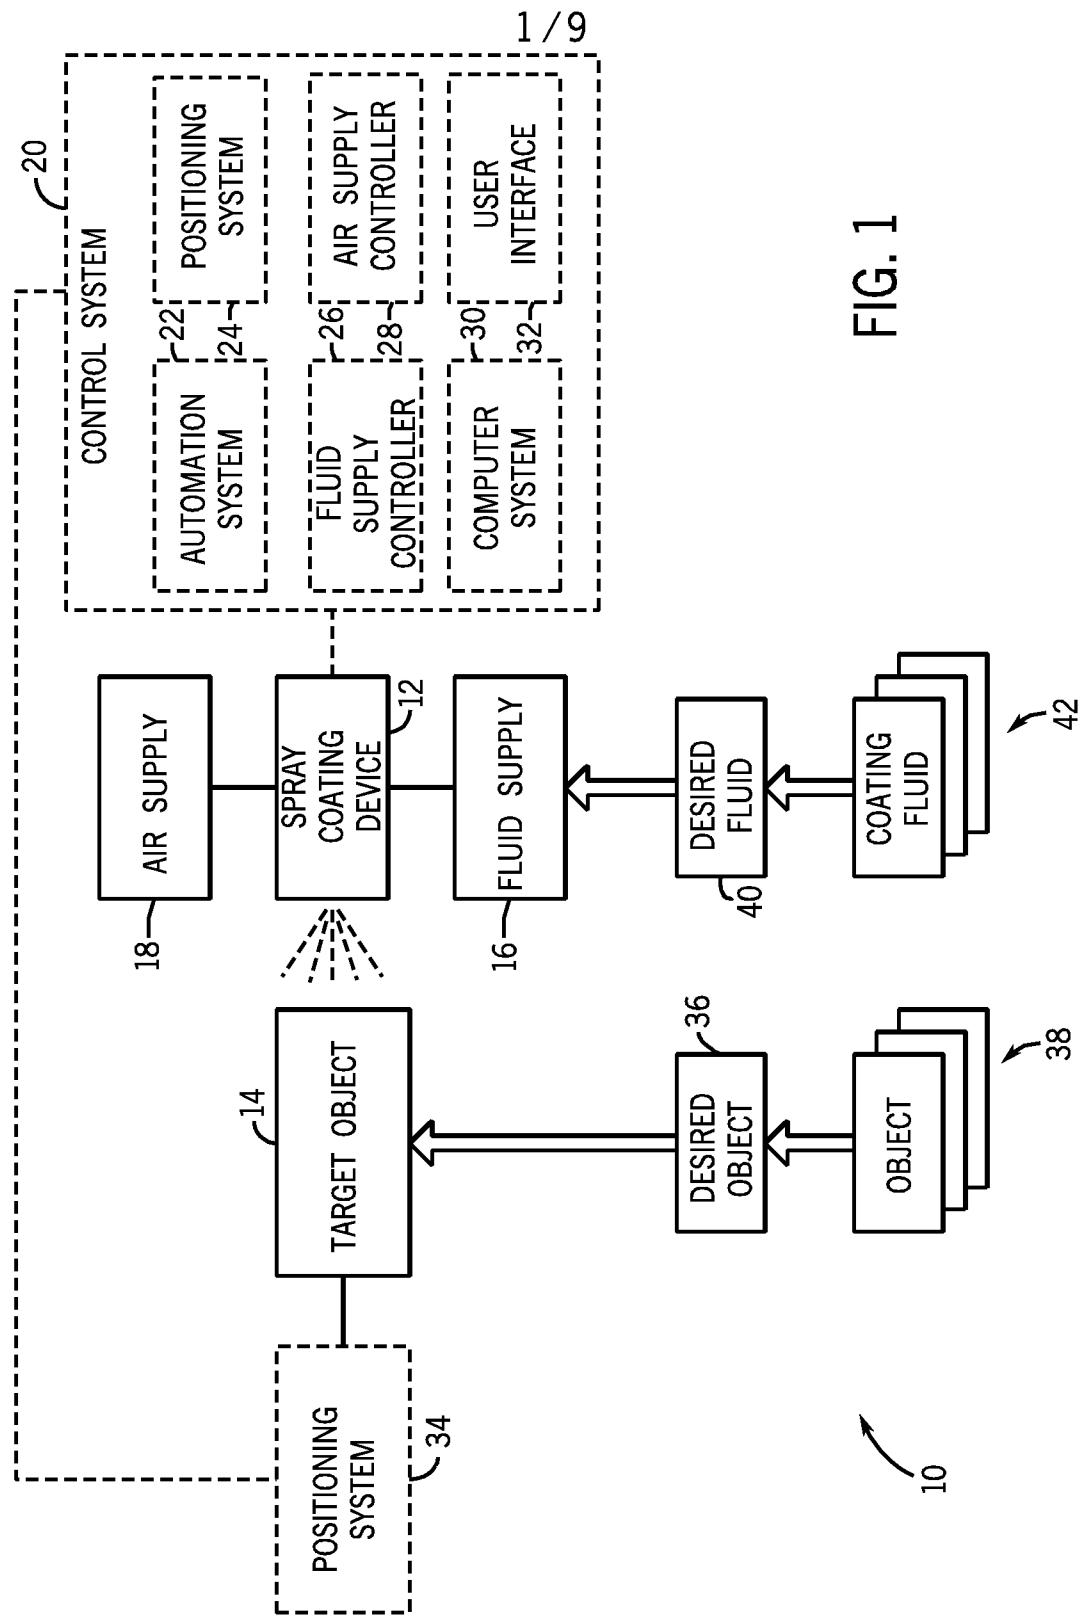

2 / 9

FIG. 2

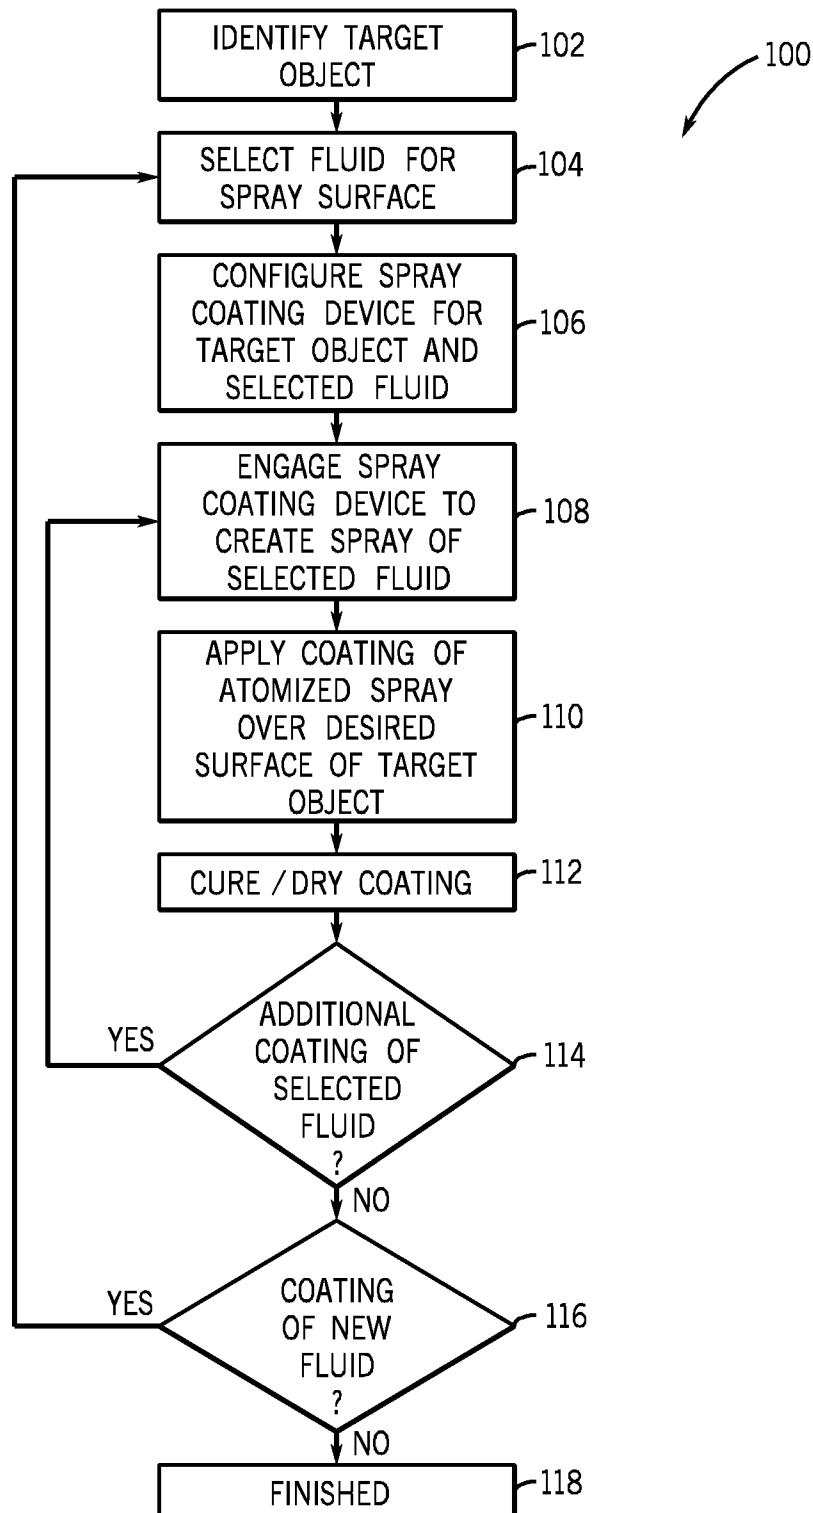

3 / 9

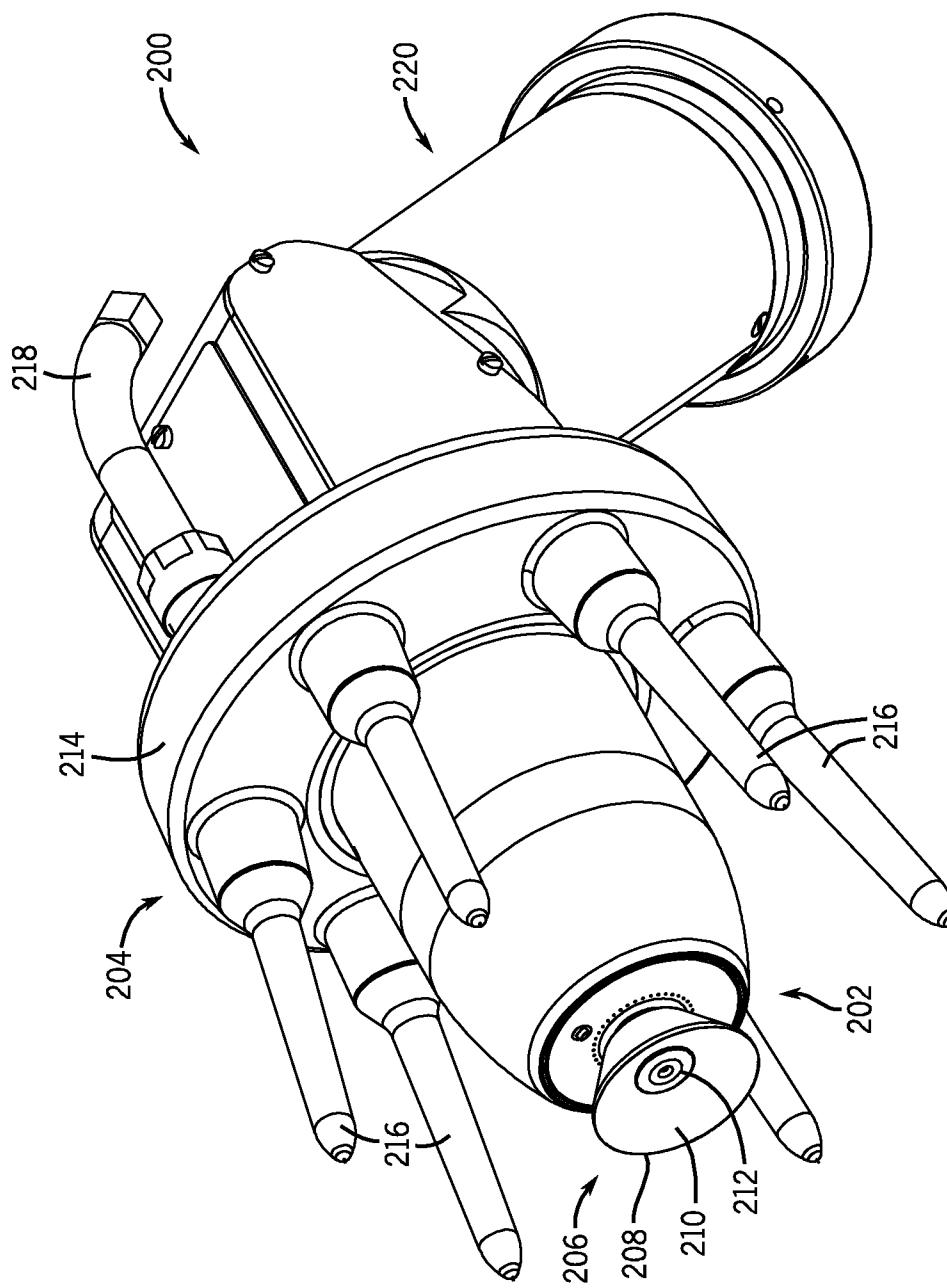


FIG. 3

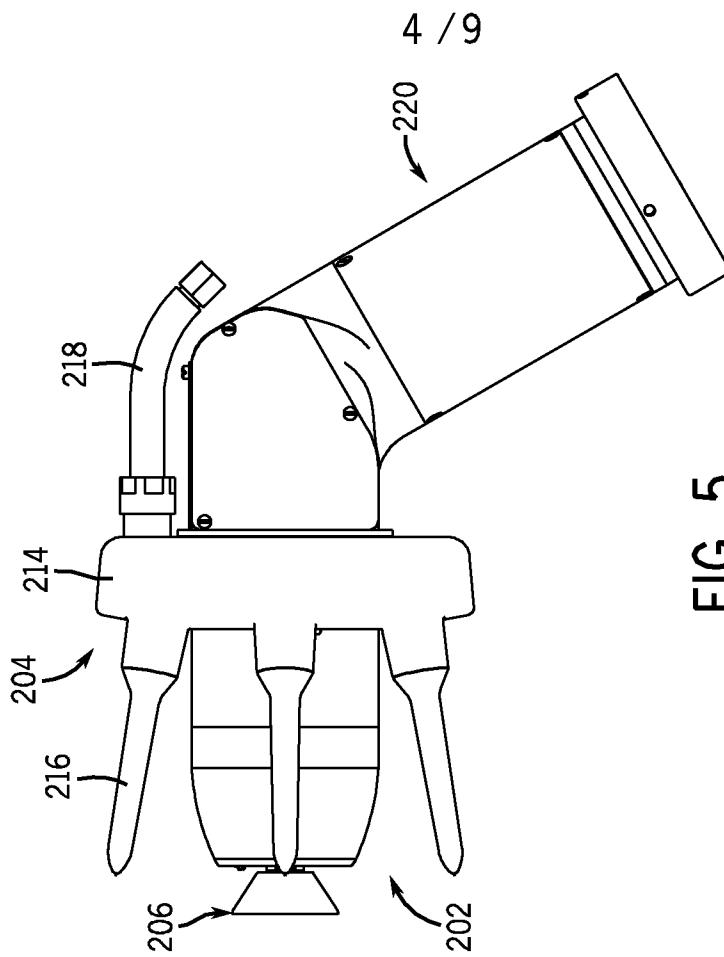


FIG. 5

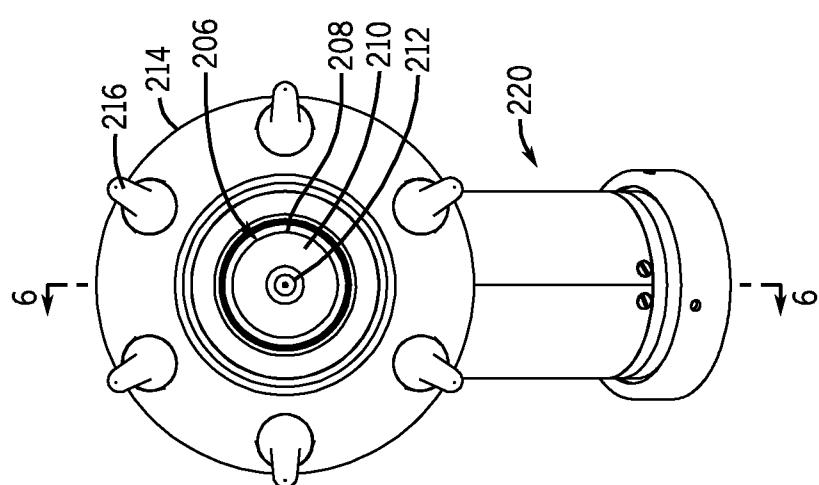


FIG. 4

5 / 9

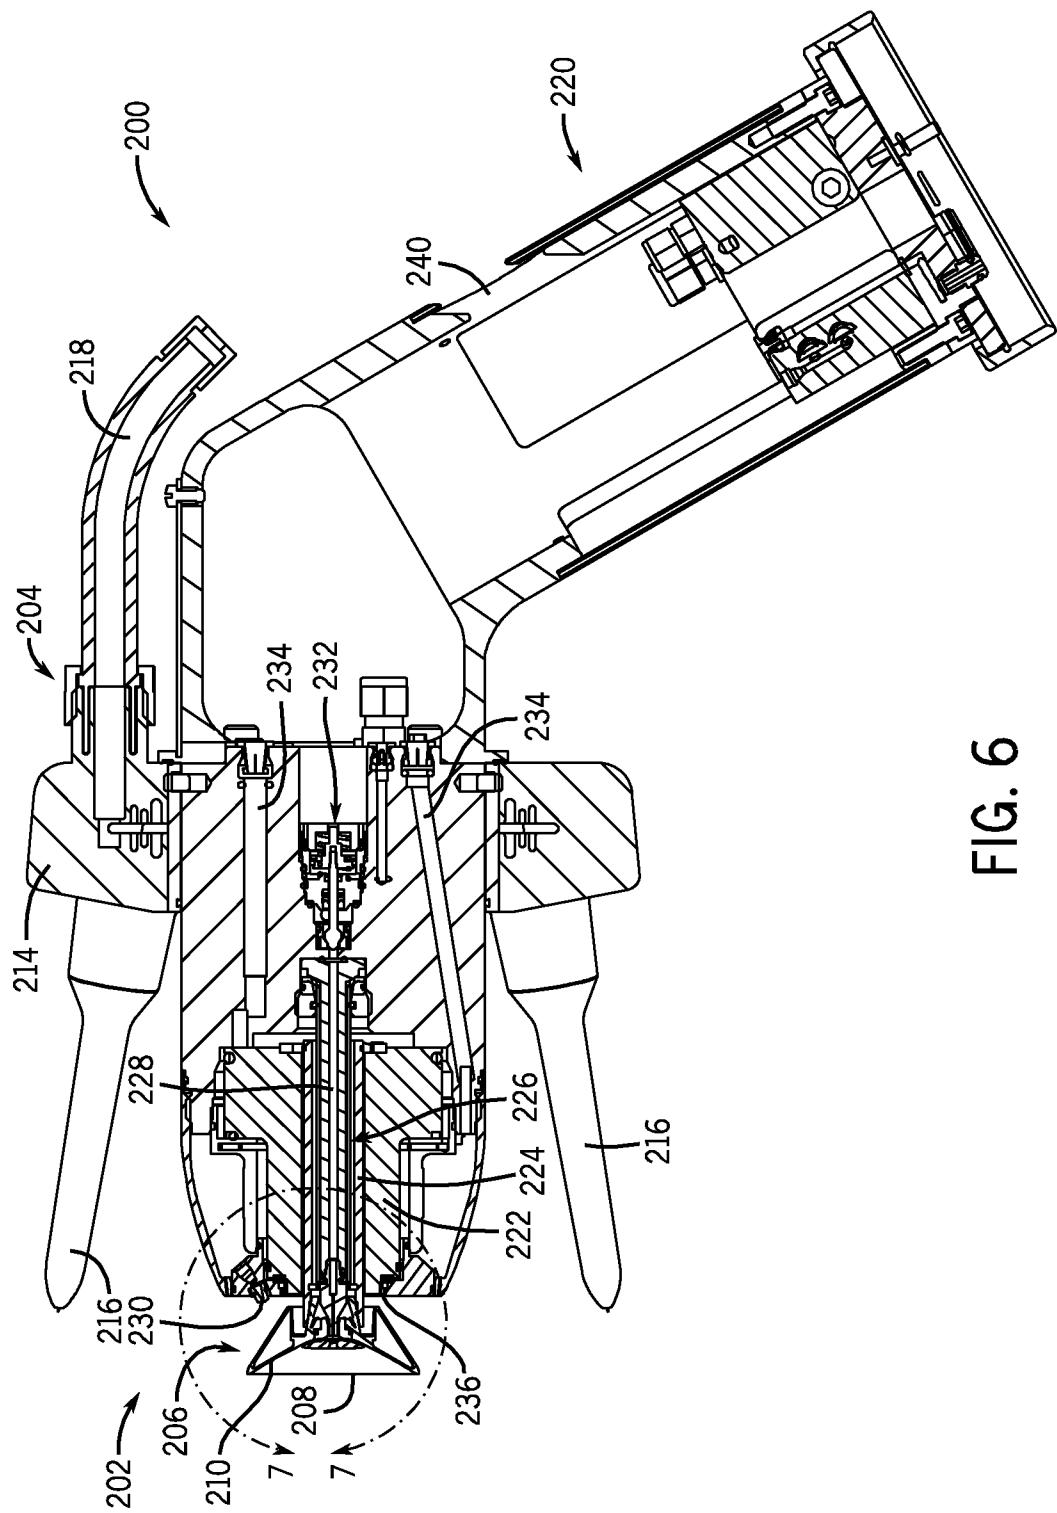


FIG. 6

6 / 9

FIG. 7


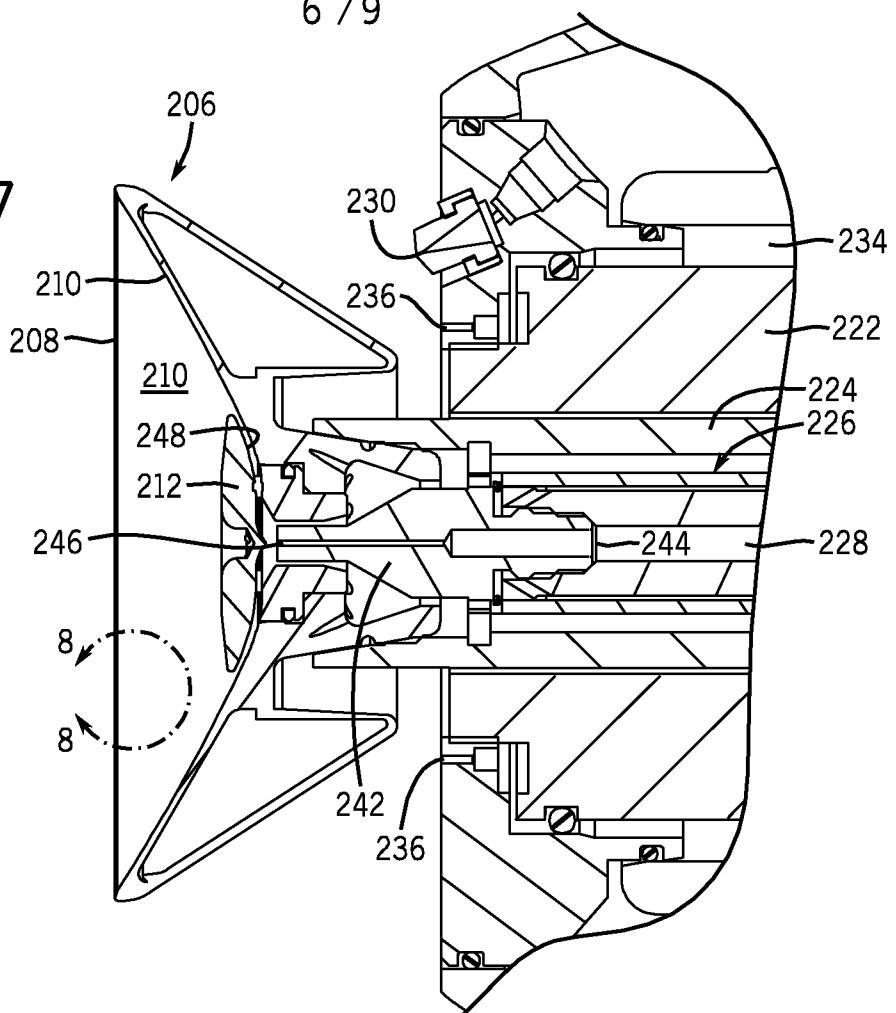


FIG. 8

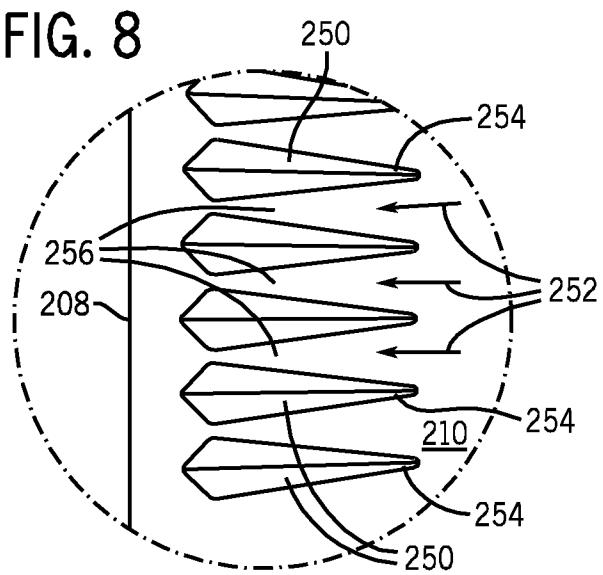

7 / 9

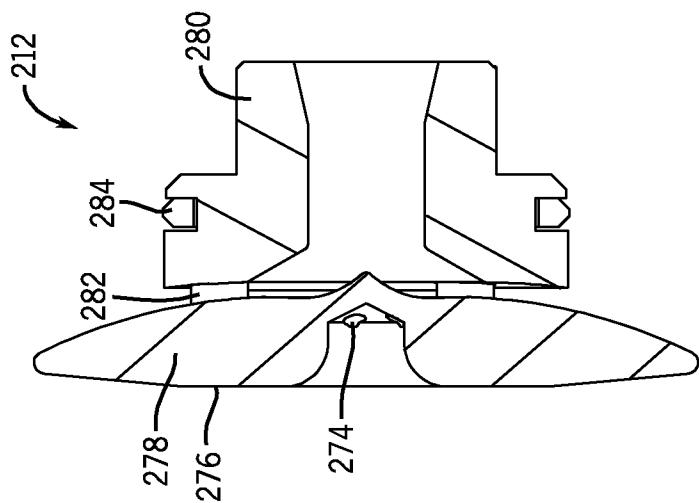


FIG. 10

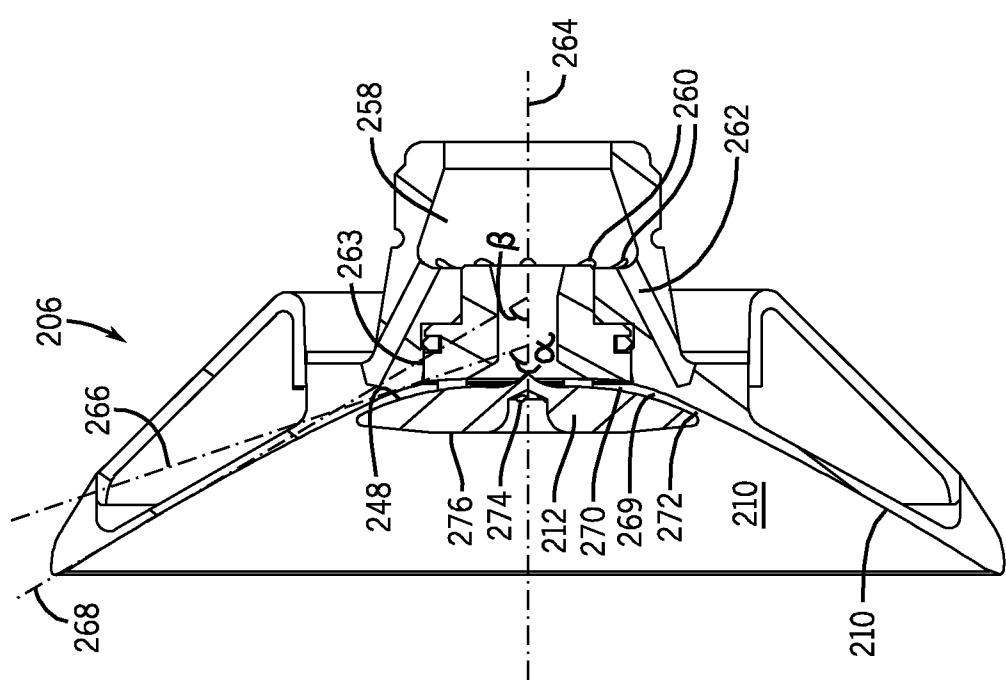


FIG. 9

8 / 9

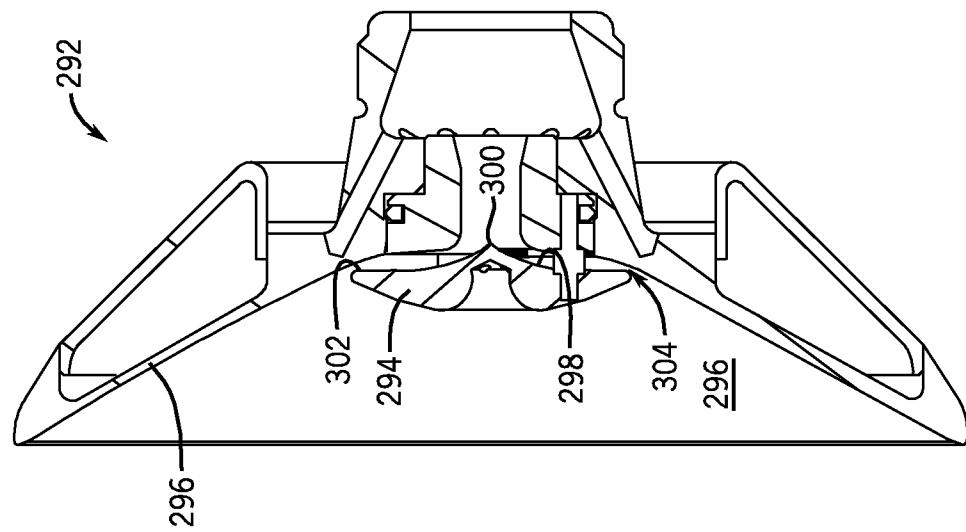


FIG. 12

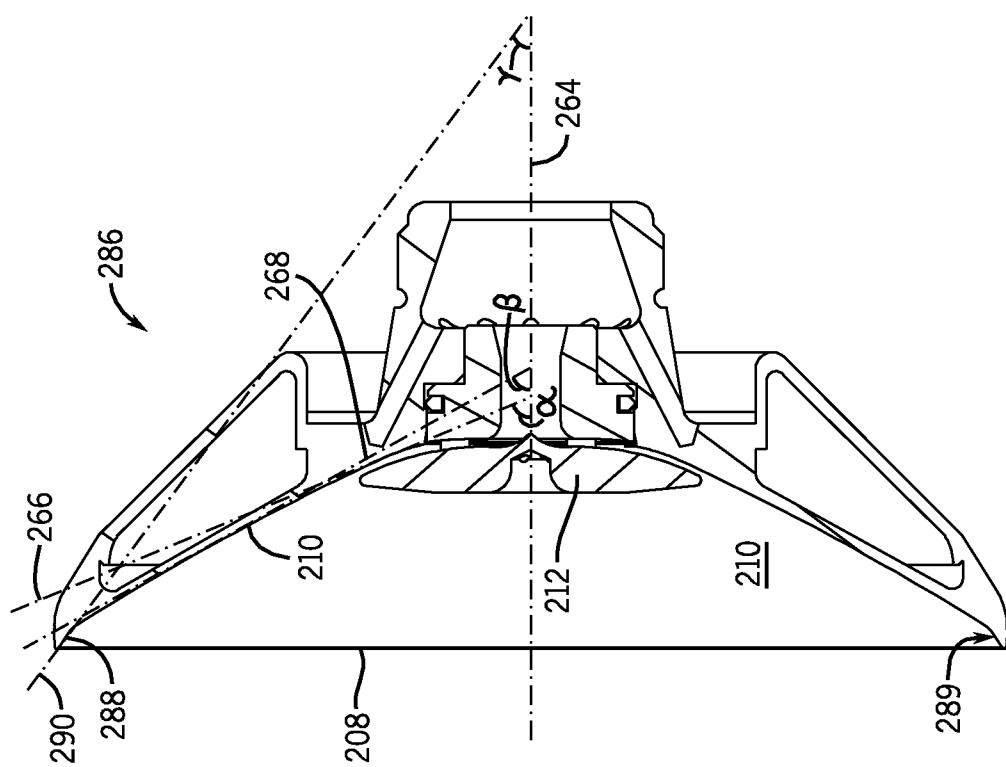


FIG. 11

9 / 9

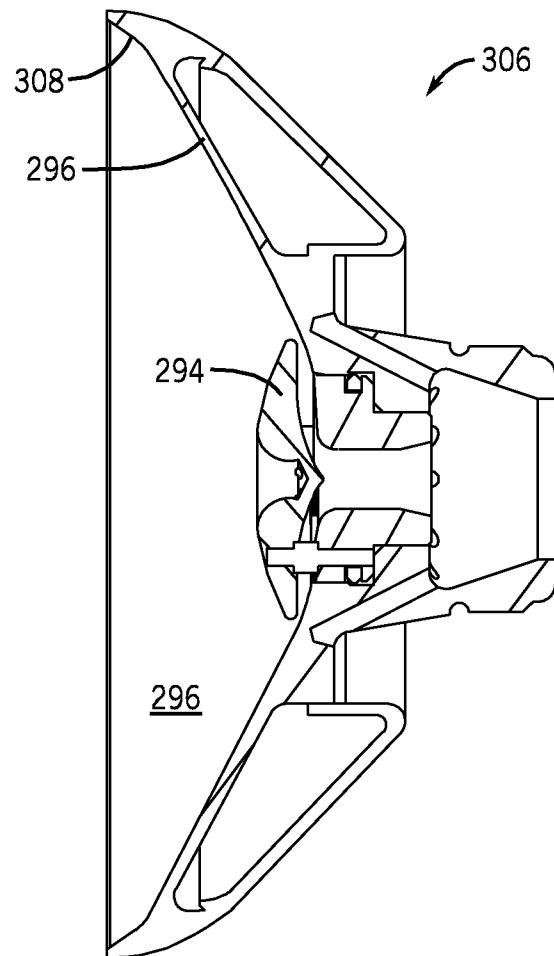


FIG. 13

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2008/064953

A. CLASSIFICATION OF SUBJECT MATTER

INV. B05B5/04

ADD. B05B7/08 B05B12/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 57 045358 A (RANSBURG JAPAN LTD) 15 March 1982 (1982-03-15) the whole document	1-12
X	EP 1 250 960 A (DUERR SYSTEMS GMBH [DE]) 23 October 2002 (2002-10-23) paragraph [0009]; figures	1-3, 9, 11, 12
X	EP 0 951 941 A (E I C GROUP ENGINEERING INNOVA [DE]) 27 October 1999 (1999-10-27) paragraph [0044]; figure 2	1, 10
X	EP 1 134 026 A (ILLINOIS TOOL WORKS [US]) 19 September 2001 (2001-09-19) the whole document	1
		-/-

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

4 September 2008

Date of mailing of the international search report

16/09/2008

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl
Fax: (+31-70) 340-3016

Authorized officer

Barré, Vincent

INTERNATIONAL SEARCH REPORTInternational application No
PCT/US2008/064953**C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 2000 000496 A (ASAHI SUNAC CORP) 7 January 2000 (2000-01-07) the whole document -----	1
A	US 6 076 751 A (AUSTIN RONALD M [US] ET AL) 20 June 2000 (2000-06-20) the whole document -----	8,10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2008/064953

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
JP 57045358	A 15-03-1982	NONE		
EP 1250960	A 23-10-2002	DE 10118741 A1		24-10-2002
EP 0951941	A 27-10-1999	DE 29807059 U1		02-07-1998
EP 1134026	A 19-09-2001	AT 380598 T CA 2340273 A1 CN 1313148 A ES 2296678 T3 JP 2001276673 A KR 20010091926 A TW 487601 B US 6322011 B1		15-12-2007 14-09-2001 19-09-2001 01-05-2008 09-10-2001 23-10-2001 21-05-2002 27-11-2001
JP 2000000496	A 07-01-2000	NONE		
US 6076751	A 20-06-2000	US 6230993 B1		15-05-2001