




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : G08B 5/22		A1	(11) International Publication Number: WO 93/24909
			(43) International Publication Date: 9 December 1993 (09.12.93)
(21) International Application Number: PCT/US93/04360 (22) International Filing Date: 6 May 1993 (06.05.93) (30) Priority data: 07/891,363 29 May 1992 (29.05.92) US (71) Applicant: MOTOROLA, INC. [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US). (72) Inventors: SCHWENDEMAN, Robert, John ; 590 SE 10 Avenue, Pompano Beach, FL 33060 (US). PETREYE, David, Royce ; 9065 Rodeo Drive, Lake Worth, FL 33467 (US). (74) Agents: KOCH, William, E. et al.; Motorola, Inc., Intellectual Property Dept./PPM, 1500 N.W. 22nd Avenue, Boynton Beach, FL 33426-8292 (US).		(81) Designated States: CA, JP, KR, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report.	

(54) Title: DATA COMMUNICATION RECEIVER HAVING VARIABLE LENGTH MESSAGE CARRY-ON

(57) Abstract

A data communication receiver (106) is assigned for receiving message signals within one or more message transmission frames (Fig. 3) transmitted in a predetermined sequence. The message signals include address (1604) and message (1608) information, and information (1710) designating one or more additional message transmission frames to which the data communication receiver (106) is responsive for receiving the message signals.

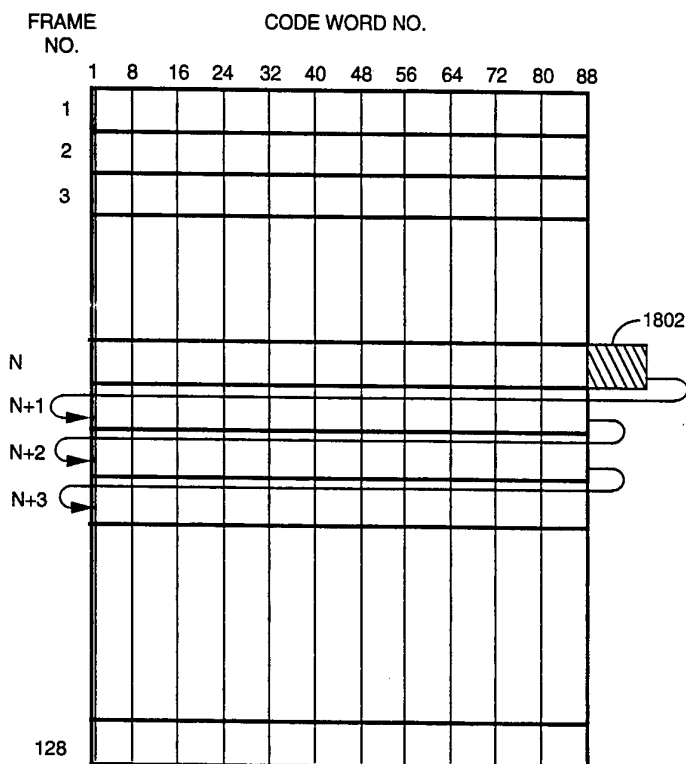

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NL	Netherlands
BE	Belgium	GN	Guinea	NO	Norway
BF	Burkina Faso	GR	Greece	NZ	New Zealand
BG	Bulgaria	HU	Hungary	PL	Poland
BJ	Benin	IE	Ireland	PT	Portugal
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SK	Slovak Republic
CI	Côte d'Ivoire	LJ	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	MC	Monaco	TG	Togo
DE	Germany	MG	Madagascar	UA	Ukraine
DK	Denmark	ML	Mali	US	United States of America
ES	Spain	MN	Mongolia	VN	Viet Nam
FI	Finland				

**DATA COMMUNICATION RECEIVER
HAVING VARIABLE LENGTH
MESSAGE CARRY-ON**

5

CROSS REFERENCE TO RELATED COPENDING APPLICATION

A related, copending application is Patent Application Attorney's Docket No. CM00501U, filed concurrently
10 herewith, by Kuznicki et al., and assigned to the assignee hereof, entitled "Data Communication Terminal Providing Variable Length Message Carry-On" and Patent Application Attorney's Docket No. PT00548U, filed concurrently
herewith, by Kuznicki et al., and assigned to the assignee
15 hereof, entitled "Paging System Using Message Fragmentation to Redistribute Traffic".

BACKGROUND OF THE INVENTION

20 **FIELD OF THE INVENTION:**

The present invention relates generally to the field of data communication receivers, and more particularly to a data communication receiver having variable length message carry-on.

25

DESCRIPTION OF THE PRIOR ART:

There are many data communications systems in operation today which provide message distribution to data communication receivers, such as pagers. Many of these
30 system utilize signaling protocols which utilize time slots, or transmission frames, to which the pagers are assigned, thereby providing a battery saving function during the normal course of message transmission. A paging terminal was provided in such systems to encode the
35 received messages for transmission to the intended pagers during the assigned transmission frames. In signaling protocols such as the POCSAG signaling protocol, each time slot, or transmission frame, allowed for the transmission

of only two code words, either both address code words, an address and a message code word, or two message code words. Since the transmission of even a simple telephone number required as a minimum two message code words, numeric
5 message transmissions required on the average one and one-half frames, which periodically resulted in the inability to transmit address code words during the assigned transmission frames, because the transmission frame was filled by message code words associated with address code
10 words transmitted in the previous transmission frame.

The above problem was alleviated in some signaling protocols by increasing the number of code words which could be transmitted in any transmission frame. However, when the number of transmittable code words is selected for
15 the transmission frames, such transmission frames often have to be filled with idle code words when an insufficient number of messages have been received for transmission during any particular transmission frame. Such signaling protocols were also limited in the number of data
20 communication receivers, or pagers, which could be assigned, or operated on any given channel, before the channel reached its maximum capacity. By increasing the transmission speed, additional pagers could be added to the system, however at the expense of a significant amount of
25 unused channel capacity, until the system again filled up. There is a need to be able to provide a flexible system which enables reconfiguring the amount of information which can be transmitted on the channel within the available transmission frames in order to maximize message throughput
30 on the channel.

SUMMARY OF THE INVENTION

In accordance with one aspect of the present invention,
35 A data communication receiver is assigned for receiving message signals within one or more message transmission frames transmitted in a predetermined sequence. The message signals include address and message information, and

information designating one or more additional message transmission frames to which the data communication receiver is responseive for receiving the message signals. The data communication receiver comprises a receiver for receiving the message signals, a decoder, coupled to the receiver, for decoding the address and designating information received during the assigned transmission frames, and a memory, for storing the message information received which is intended for the data communication receiver during the assigned transmission frames. The decoder is further responsive to the designating information, for decoding address information received during the one or more additional transmission frames designated by the designating information, and the memory further stores the message information received which is intended for the data communication receiver during the one or more additional transmission frames. A display is used to display the stored message information.

In a second aspect of the present invention a data communication receiver is assigned for receiving message signals within one or more message transmission frames transmitted in a predetermined sequence. The message signals including address and message information, and information designating one or more additional message transmission frames to which the data communication receiver is responseive for receiving the message signals. The data communication receiver comprises a receiver for receiving the message signals, a battery saving circuit for controlling the supply of power to the receiver during the assigned transmission frames, and for enabling the same to receive the message signals, a decoder coupled to said receiver for decoding the address and designating information received during the assigned transmission frames, and a memory for storing the message information received which is intended for the data communication receiver during the assigned transmission frames. The battery saving circuit is further responsive to the designating information for controlling the supply of power to the receiver during the one or more additional transmission frames designated by the designating

information, and the decoder is further responsive to the designating information, for decoding address information received during the one or more additional transmission frames designated by the designating information. The memory
5 further stores the message information received which is intended for the data communication receiver during the one or more additional transmission frames. A display displays the stored message information.

In a third aspect of the present invention a pager is
10 assigned for receiving message signals within one or more message transmission frames transmitted in a predetermined sequence. The message signals including address information, and information designating one or more additional message transmission frames to which the pager is responseive for
15 receiving the message signals. The pager comprises a receiver for receiving the message signals, a decoder coupled to the receiver for decoding the address and designating information received during the assigned transmission frames; and alerting circuit responsive to the address and
20 designationg information decoded, for generating a sensible alert signal when the address information decoded is intended for the pager during the assigned transmission frames. The decoder is further responsive to the designating information, for decoding address information received during the one or
25 more additional transmission frames designated by the designating information. The alerting circuit further generating a sensible alert signal when the address information decoded is intended for the pager during the one or more additional transmission frames.

30

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an electrical block diagram of a data transmission system in accordance with the preferred
35 embodiment of the present invention.

FIG. 2 is an electrical block diagram of a terminal for processing and transmitting message information in

accordance with the preferred embodiment of the present invention.

FIGS. 3-5 are timing diagrams illustrating the transmission format of the signaling protocol utilized in accordance with the preferred embodiment of the present invention.

FIGS. 6 and 7 are timing diagrams illustrating the synchronization signals utilized in accordance with the preferred embodiment of the present invention.

FIG. 8 is an electrical block diagram of a data communication receiver in accordance with the preferred embodiment of the present invention.

FIG. 9 is an electrical block diagram of a threshold level extraction circuit utilized in the data communication receiver of FIG. 8.

FIG. 10 is an electrical block diagram of a 4-level decoder utilized in the data communication receiver of FIG. 8.

FIG. 11 is an electrical block diagram of a symbol synchronizer utilized in the data communication receiver of FIG. 8.

FIG. 12 is an electrical block diagram of a 4-level to binary converter utilized in the data communication receiver of FIG. 8.

FIG. 13 is an electrical block diagram of a synchronization correlator utilized in the data communication receiver of FIG. 8.

FIG. 14 is an electrical block diagram of a phase timing generator utilized in the data communication receiver of FIG. 8.

FIG. 15 is a flow chart illustrating the synchronization correlation sequence in accordance with the preferred embodiment of the present invention.

FIG. 16 is a timing diagram illustrating the organization of the transmission frame utilized in accordance with the preferred embodiment of the present invention.

FIG. 17 is a timing diagram illustrating the construction of a control word utilized in accordance with the preferred embodiment of the present invention.

FIG. 18 is a memory map illustrating message carry-on queueing in accordance with the preferred embodiment of the present invention.

FIG. 19 is an electrical block diagram of a frame formatter utilized in the terminal of FIG. 2.

FIGS. 20-22 is an electrical block diagram illustrating the operation of the data concentrator / distributor in accordance with the preferred embodiment of the present invention.

FIG. 23 is a flow chart illustrating the operation of the frame formatter of FIG. 17.

FIG. 24 is a flow chart illustrating data speed selection in accordance with the preferred embodiment of the present invention.

FIGS. 25-27 are timing diagrams illustrating transmission phase and bit interleaving of the message transmissions in accordance with the preferred embodiment of the present invention.

FIGS. 28-30 are timing diagrams illustrating the data communication receiver message bit sampling in accordance with the preferred embodiment of the present invention.

FIGS. 31 and 32 are flow charts illustrating the messages processing capability of the data communication receiver in accordance with the preferred embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 1 is an electrical block diagram of a data transmission system 100, such as a paging system, in accordance with the preferred embodiment of the present invention. In such a data transmission system 100, messages originating either from a phone, as in a system providing numeric data transmission, or from a message entry device, such as an alphanumeric data terminal, are routed through

the public switched telephone network (PSTN) to a paging terminal 102 which processes the numeric or alphanumeric message information for transmission by one or more transmitters 104 provided within the system. When multiple transmitters are utilized, the transmitters 104 preferably simulcast transmit the message information to data communication receivers 106. Processing of the numeric and alphanumeric information by the paging terminal 102, and the protocol utilized for the transmission of the messages is described below.

FIG. 2 is an electrical block diagram of the paging terminal 102 utilized for processing and controlling the transmission of the message information in accordance with the preferred embodiment of the present invention. Short messages, such as tone-only and numeric messages which can be readily entered using a Touch-Tone telephone are coupled to the paging terminal 102 through a telephone interface 202 in a manner well known in the art. Longer messages, such as alphanumeric messages which require the use of a data entry device are coupled to the paging terminal 102 through a modem 206 using any of a number of well known modem transmission protocols. When a call to place a message is received, a controller 204 handles the processing of the message. The controller 204 is preferably a microcomputer, such as an MC68000 or equivalent, which is manufactured by Motorola Inc., and which runs various pre-programmed routines for controlling such terminal operations as voice prompts to direct the caller to enter the message, or the handshaking protocol to enable reception of messages from a data entry device. When a call is received, the controller 204 references information stored in the subscriber database 208 to determine how the message being received is to be processed. The subscriber data base 208 includes, but is not limited to such information as addresses assigned to the data communication receiver, message type associated with the address, and information related to the status of the data communication receiver, such as active or inactive

for failure to pay the bill. A data entry terminal 240 is provided which couples to the controller 204, and which is used for such purposes as entry, updating and deleting of information stored in the subscriber data base 208, for
5 monitoring system performance, and for obtaining such information as billing information.

The subscriber database 208 also includes such information as to what transmission frame and to what transmission phase the data communication receiver is
10 assigned, as will be described in further detail below. The received message is stored in an active page file 210 which stores the messages in queues according to the transmission phase assigned to the data communication receiver. In the preferred embodiment of the present
15 invention, four phase queues are provided in the active page file 210. The active page file 210 is preferably a dual port, first in first out random access memory, although it will be appreciated that other random access memory devices, such as hard disk drives, can be utilized
20 as well. Periodically the message information stored in each of the phase queues is recovered from the active page file 210 under control of controller 204 using timing information such as provided by a real time clock 214, or other suitable timing source. The recovered message
25 information from each phase queue is sorted by frame number and is then organized by address, message information, and any other information required for transmission, and then batched into frames based upon message size by frame batching controller 212. The batched frame information for
30 each phase queue is coupled to frame message buffers 216 which temporarily store the batched frame information until a time for further processing and transmission. Frames are batched in numeric sequence, so that while a current frame is being transmitted, the next frame to be transmitted is
35 in the frame message buffer 216, and the next frame thereafter is being retrieved and batched. At the appropriate time, the batched frame information stored in the frame message buffer 216 is transferred to the frame

encoder 218, again maintaining the phase queue relationship. The frame encoder 218 encodes the address and message information into address and message code words required for transmission, as will be described below. The encoded address and message code words are ordered into blocks and then coupled to a block interleaver 220 which interleaves preferably eight code words at a time for transmission in a manner well known in the art. The interleaved code words from each block interleaver 220 are then serially transferred to a phase multiplexer 221, which multiplexes the message information on a bit by bit basis into a serial data stream by transmission phase. The controller 204 next enables a frame sync generator 222 which generates the synchronization code which is transmitted at the start of each frame transmission. The synchronization code is multiplexed with address and message information under the control of controller 204 by serial data splicer 224, and generates therefrom a message stream which is properly formatted for transmission. The message stream is next coupled to a transmitter controller 226, which under the control of controller 204 transmits the message stream over a distribution channel 228. The distribution channel 228 may be any of a number of well known distribution channel types, such as wire line, an RF or microwave distribution channel, or a satellite distribution link. The distributed message stream is transferred to one or more transmitter stations 104, depending upon the size of the communication system. The message stream is first transferred into a dual port buffer 230 which temporarily stores the message stream prior to transmission. At an appropriate time determined by timing and control circuit 232, the message stream is recovered from the dual port buffer 230 and coupled to the input of preferably a 4-level FSK modulator 234. The modulated message stream is then coupled to the transmitter 236 for transmission via antenna 238.

FIGS. 3, 4 and 5 are timing diagrams illustrating the transmission format of the signaling protocol utilized in

accordance with the preferred embodiment of the present invention. As shown in FIG. 3, the signaling protocol enables message transmission to data communication receivers, such as pagers, assigned to one or more of 128 frames which are labeled frame 0 through frame 127. It then will be appreciated that the actual number of frames provided within the signaling protocol can be greater or less than described above. The greater the number of frames utilized, the greater the battery life that may be provided to the data communication receivers operating within the system. The fewer the number of frames utilized, the more often messages can be queued and delivered to the data communication receivers assigned to any particular frame, thereby reducing the latency, or time required to deliver messages.

As shown in FIG. 4, the frames comprise a synchronization code (sync) followed preferably by eleven blocks of message information which are labeled block 0 through block 10. As shown in FIG. 5, each block of message information comprises preferably eight address, control or data code words which are labeled word 0 through word 7 for each phase. Consequently, each phase in a frame allows the transmission of up to eighty-eight address, control and data code words. The address, control and data code words are preferably 31,21 BCH code words with an added thirty-second even parity bit which provides an extra bit of distance to the code word set. It will be appreciated that other code words, such as a 23,12 Golay code word could be utilized as well. Unlike the well known POCSAG signaling protocol which provides address and data code words which utilize the first code word bit to define the code word type, as either address or data, no such distinction is provided for the address and data code words in the signaling protocol utilized with the preferred embodiment of the present invention. Rather, address and data code words are defined by their position within the individual frames.

FIGS. 6 and 7 are timing diagrams illustrating the synchronization code utilized in accordance with the preferred embodiment of the present invention. In particular, as shown in FIG. 6, the synchronization code comprises preferably three parts, a first synchronization code (sync 1), a frame information code word (frame info) and a second synchronization code (sync 2). As shown in FIG. 7, the first synchronization code comprises first and third portions, labeled bit sync 1 and BS1, which are alternating 1,0 bit patterns which provides bit synchronization, and second and fourth portions, labeled "A" and its complement "A bar", which provide frame synchronization. The second and fourth portions are preferably single 32,21 BCH code words which are predefined to provide high code word correlation reliability, and which are also used to indicate the data bit rate at which addresses and messages are transmitted. The table below defines the data bit rates which are used in conjunction with the signaling protocol.

20

<u>Bit Rate</u>	<u>"A" Value</u>
1600 bps	A1 and A1 bar
3200 bps	A2 and A2 bar
6400 bps	A3 and A3 bar
Not defined	A4 and A4 bar

25

As shown in the table above, three data bit rates are predefined for address and message transmission, although it will be appreciated that more or less data bit rates can be predefined as well, depending upon the system requirements. A fourth "A" value is also predefined for future use.

30

The frame information code word is preferably a single 32,21 BCH code word which includes within the data portion a predetermined number of bits reserved to identify the frame number, such as 7 bits encoded to define frame number 0 to frame number 127.

35

The structure of the second synchronization code is preferably similar to that of the first synchronization code described above. However, unlike the first synchronization code which is preferably transmitted at a fixed data symbol rate, such as 1600 bps (bits per second), the second synchronization code is transmitted at the data symbol rate at which the address and messages are to be transmitted in any given frame. Consequently, the second synchronization code allows the data communication receiver to obtain "fine" bit and frame synchronization at the frame transmission data bit rate.

In summary the signaling protocol utilized with the preferred embodiment of the present invention comprises 128 frames which include a predetermined synchronization code followed by eleven data blocks which comprise eight address, control or message code words per phase. The synchronization code enables identification of the data transmission rate, and insures synchronization by the data communication receiver with the data code words transmitted at the various transmission rates.

FIG. 8 is an electrical block diagram of the data communication receiver 106 in accordance with the preferred embodiment of the present invention. The heart of the data communication receiver 106 is a controller 816, which is preferably implemented using an MC68HC05HC11 microcomputer, such as manufactured by Motorola, Inc. The microcomputer controller, hereinafter call the controller 816, receives and processes inputs from a number of peripheral circuits, as shown in FIG. 8, and controls the operation and interaction of the peripheral circuits using software subroutines. The use of a microcomputer controller for processing and control functions is well known to one of ordinary skill in the art.

The data communication receiver 106 is capable of receiving address, control and message information, hereafter called "data" which is modulated using preferably 2-level and 4-level frequency modulation techniques. The transmitted data is intercepted by an antenna 802 which

couples to the input of a receiver section 804. Receiver section 804 processes the received data in a manner well known in the art, providing at the output an analog 4-level recovered data signal, hereafter called a recovered data signal. The recovered data signal is coupled to one input of a threshold level extraction circuit 808, and to an input of a 4-level decoder 810. The threshold level extraction circuit 808 is best understood by referring to FIG. 9, and as shown comprises two clocked level detector circuits 902, 904 which have as inputs the recovered data signal. Level detector 902 detects the peak signal amplitude value and provides a high peak threshold signal which is proportional to the detected peak signal amplitude value, while level detector 904 detects the valley signal amplitude value and provides a valley threshold signal which is proportional to the detected valley signal amplitude value of the recovered data signal. The level detector 902, 904 signal outputs are coupled to terminals of resistors 906, 912, respectively. The opposite resistor terminals 906, 912 provide the high threshold output signal (Hi), and the low threshold output signal (Lo), respectively. The opposite resistor terminals 906, 912 are also coupled to terminals of resistors 908, 910, respectively. The opposite resistor 908, 910 terminals are coupled together to form a resistive divider which provides an average threshold output signal (Avg) which is proportional to the average value of the recovered data signal. Resistors 906, 912 have resistor values preferably of 1R, while resistors 908, 910 have resistor values preferably of 2R, realizing threshold output signal values of 17%, 50% and 83%, and which are utilized to enable decoding the 4-level data signals as will be described below.

When power is initially applied to the receiver portion, as when the data communication receiver is first turned on, a clock rate selector 914 is preset through a control input (center sample) to select a 128X clock, i.e. a clock having a frequency equivalent to 128 times the

slowest data bit rate, which as described above is 1600 bps. The 128X clock is generated by 128X clock generator 844, as shown in FIG. 8, which is preferably a crystal controlled oscillator operating at 204.8 KHz (kilohertz).

5 The output of the 128X clock generator 844 couples to an input of frequency divider 846 which divides the output frequency by two to generate a 64X clock at 102.4 KHz. Returning to FIG. 9, the 128X clock allows the level detectors 902, 904 to asynchronously detect in a very short
10 period of time the peak and valley signal amplitude values, and to therefore generate the low (Lo), average (Avg) and high (Hi) threshold output signal values required for modulation decoding. After symbol synchronization is achieved with the synchronization signal, as will be
15 described below, the controller 816 generates a second control signal (Center Sample) to enable selection of a 1X symbol clock which is generated by symbol synchronizer 812 as shown in FIG. 8.

Returning to FIG. 8, the 4-level decoder 810 operation
20 is best understood by referring to FIG. 10. As shown, the 4-level decoder 810 comprises three voltage comparators 1010, 1020, 1030 and a symbol decoder 1040. The recovered data signal couples to an input of the three comparators 1010, 1020, 1030. The high threshold output signal (Hi)
25 couples to the second input of comparator 1010, the average threshold output signal (Avg) couples to the second input of comparator 1020, and the low threshold output signal (Lo) couples to the second input of comparator 1030. The outputs of the three comparators 1010, 1020, 1030 couple to
30 inputs of symbol decoder 1040. The symbol decoder 1040 decodes the inputs according to the table provided below.

	Threshold			Output	
	Hi	Avg	Lo	MSB	LSB
35	$RC_{in} <$	$RC_{in} <$	$RC_{in} <$	0	0
	$RC_{in} <$	$RC_{in} <$	$RC_{in} >$	0	1
	$RC_{in} <$	$RC_{in} >$	$RC_{in} >$	1	1
	$RC_{in} >$	$RC_{in} >$	$RC_{in} >$	1	0

As shown in the table above, when the recovered data signal (RC_{in}) is less than all three threshold values, the symbol generated is 00 (MSB = 0, LSB = 0). Thereafter, as
5 each of the three threshold values is exceeded, a different symbol is generated, as shown in the table above.

The MSB output from the 4-level decoder 810 is coupled to an input of the symbol synchronizer 812 and provides a recovered data input generated by detecting the zero
10 crossings in the 4-level recovered data signal. The positive level of the recovered data input represents the two positive deviation excursions of the analog 4-level recovered data signal above the average threshold output signal, and the negative level represents the two negative
15 deviation excursions of the analog 4-level recovered data signal below the average threshold output signal.

The operation of the symbol synchronizer 812 is best understood by referring to FIG. 11. The 64X clock at 102.4 KHz which is generated by frequency divider 846, is coupled
20 to an input of a 32X rate selector 1120. The 32X rate selector 1120 is preferably a divider which provides selective division by 1 or 2 to generate a sample clock which is thirty-two times the symbol transmission rate. A control signal (1600/3200) is coupled to a second input of
25 the 32X rate selector 1120, and is used to select the sample clock rate for symbol transmission rates of 1600 and 3200 symbols per second. The selected sample clock is coupled to an input of 32X data oversampler 1110 which samples the recovered data signal (MSB) at thirty-two
30 samples per symbol. The symbol samples are coupled to an input of a data edge detector 1130 which generates an output pulse when a symbol edge is detected. The sample clock is also coupled to an input of a divide-by-16/32 circuit 1140 which is utilized to generate 1X and 2X symbol
35 clocks synchronized to the recovered data signal. The divided-by-16/32 circuit 1140 is preferably an up/down counter. When the data edge detector 1130 detects a symbol edge, a pulse is generated which is gated by AND gate 1150

with the current count of divide-by-16/32 circuit 1140. Concurrently, a pulse is generated by the data edge detector 1130 which is also coupled to an input of the divide-by-16/32 circuit 1140. When the pulse coupled to
5 the input of AND gate 1150 arrives before the generation of a count of thirty-two by the divide-by-16/32 circuit 1140, the output generated by AND gate 1150 causes the count of divide-by-16/32 circuit 1140 to be advanced by one count in response to the pulse which is coupled to the input of
10 divide-by-16/32 circuit 1140 from the data edge detector 1130, and when the pulse coupled to the input of AND gate 1150 arrives after the generation of a count of thirty-two by the divide-by-16/32 circuit 1140, the output generated by AND gate 1150 causes the count of divide-by-16/32
15 circuit 1140 to be retarded by one count in response to the pulse which is coupled to the input of divide-by-16/32 circuit 1140 from the data edge detector 1130, thereby enabling the synchronization of the 1X and 2X symbol clocks with the recovered data signal. The symbol clock rates
20 generated are best understood from the table below.

	Input Clock	Control Input	Rate Selector	Rate Selector	2X Symbol Clock	1X Symbol Clock
	(Relative)	(SPS)	Divide Ratio	Output	(BPS)	(BPS)
5	64X	1600	by 2	32X	3200	1600
	64X	3200	by 1	64X	6400	3200

10 As shown in the table above, the 1X and 2X symbol clocks are generated 1600, 3200 and 6400 bits per second and are synchronized with the recovered data signal.

The 4-level binary converter 814 is best understood by referring to FIG. 12. The 1X symbol clock is coupled to a first clock input of a clock rate selector 1210. A 2X symbol clock also couples to a second clock input of the clock rate selector 1210. The symbol output signals (MSB, LSB) are coupled to inputs of an input data selector 1230. A selector signal (2L/4L) is coupled to a selector input of the clock rate selector 1210 and the selector input of the input data selector 1230, and provides control of the conversion of the symbol output signals as either 2-level FSK data, or 4-level FSK data. When the 2-level FSK data conversion (2L) is selected, only the MSB output is selected which is coupled to the input of a parallel to serial converter 1220. The 1X clock input is selected by clock rate selector 1210 which results in a single bit binary data stream to be generated at the output of the parallel to serial converter 1220. When the 4-level FSK data conversion (4L) is selected, both the LSB and MSB outputs are selected which are coupled to the inputs of the parallel to serial converter 1220. The 2X clock input is selected by clock rate selector 1210 which results in a serial two bit binary data stream to be generated at 2X the symbol rate, which is provided at the output of the parallel to serial converter 1220.

Returning to FIG. 8, the serial binary data stream generated by the 4-level to binary converter 814 is coupled

to inputs of a synchronization word correlator 818 and a demultiplexer 820. The synchronization word correlator is best understood with reference to FIG. 13. Predetermined "A" word synchronization patterns are recovered by the controller 816 from a code memory 822 and are coupled to an "A" word correlator 1310. When the synchronization pattern received matches one of the predetermined "A" word synchronization patterns within an acceptable margin of error, an "A" or "A-bar" output is generated and is coupled to controller 816. The particular "A" or "A-bar" word synchronization pattern correlated provides frame synchronization to the start of the frame ID word, and also defines the data bit rate of the message to follow, as was previously described.

The serial binary data stream is also coupled to an input of the frame word decoder 1320 which decodes the frame word and provides an indication of the frame number currently being received by the controller 816. During sync acquisition, such as following initial receiver turn-on, power is supplied to the receiver portion by battery saver circuit 848, shown in FIG. 8, which enabled the reception of the "A" synchronization word, as described above, and which continues to be supplied to enable processing of the remainder of the synchronization code. The controller 816 compares the frame number currently being received with a list of assigned frame numbers stored in code memory 822. Should the currently received frame number differ from an assigned frame numbers, the controller 816 generates a battery saving signal which is coupled to an input of battery saver circuit 848, suspending the supply of power to the receiver portion. The supply of power will be suspended until the next frame assigned to the receiver, at which time a battery saver signal is generated by the controller 816 which is coupled to the battery saving circuit 848 to enable the supply of power to the receiver portion to enable reception of the assigned frame.

Returning to the operation of the synchronization correlator shown in FIG. 13, a predetermined "C" word synchronization pattern is recovered by the controller 816 from a code memory 822 and is coupled to a "C" word correlator 1330. When the synchronization pattern received matches the predetermined "C" word synchronization pattern with an acceptable margin of error, a "C" or "C-bar" output is generated which is coupled to controller 816. The particular "C" or "C-bar" synchronization word correlated provides "fine" frame synchronization to the start of the data portion of the frame.

Returning to FIG. 8, the start of the actual data portion is established by the controller 816 generating a block start signal (Blk Start) which is coupled to inputs of a word de-interleaver 824 and a data recovery timing circuit 826. The data recovery timing circuit 826 is best understood by referring to FIG. 14. A control signal (2L / 4L) is coupled to an input of clock rate selector 1410 which selects either 1X or 2X symbol clock inputs. The selected symbol clock is coupled to the input of a phase generator 1430 which is preferably a clocked ring counter which is clocked to generate four phase output signals ($\emptyset 1$ - $\emptyset 4$). A block start signal is also coupled to an input of the phase generator 1430, and is used to hold the ring counter in a predetermined phase until the actual decoding of the message information is to begin. When the block start signal releases the phase generator 1430, the phase generator 1430 begins generating clocked phase signals which are synchronized with the incoming message symbols.

Referring back to FIG. 8, the clocked phase signal outputs are coupled to inputs of a phase selector 828. During operation, the controller 816 recovers from the code memory 822, the transmission phase number to which the data communication receiver is assigned. The phase number is transferred to the phase select output ($\emptyset$ Select) of the controller 816 and is coupled to an input of phase selector 828. A phase clock, corresponding to the transmission phase assigned, is provided at the output of the phase

selector 828 and is coupled to clock inputs of the demultiplexer 820, block de-interleaver 824, and address and data decoders 830 and 832, respectively. The demultiplexer 820 is used to select the binary bits
5 associated with the assigned transmission phase which are then coupled to the input of block de-interleaver 824, and clocked into the de-interleaver array on each corresponding phase clock. The de-interleaver array is an 8x32 bit array which de-interleaves eight interleaved address, control or
10 message code words, corresponding to one transmission block. The de-interleaved address code words are coupled to the input of address correlator 830. The controller 816 recovers the address patterns assigned to the data communication receiver, and couples the patterns to a
15 second input of the address correlator. When any of the de-interleaved address code words matches any of the address patterns assigned to the data communication receiver within an acceptable margin of error, the message information associated with the address is then decoded by
20 the data decoder 832 and stored in a message memory 850 in a manner well known to one of ordinary skill in the art. Following the storage of the message information, a sensible alert signal is generated by the controller 816. The sensible alert signal is preferably an audible alert
25 signal, although it will be appreciated that other sensible alert signals, such as tactile alert signals, and visual alert signals can be generated as well. The audible alert signal is coupled by the controller 816 to an alert driver 834 which is used to drive an audible alerting device, such
30 as a speaker or a transducer 836. The user can override the alert signal generation through the use of user input controls 838 in a manner well known in the art.

Following the detection of an address associated with the data communication receiver, the message information is
35 coupled to the input of data decoder 832 which decodes the encoded message information into preferably a BCD or ASCII format suitable for storage and subsequent display. The stored message information can be recalled by the user

using the user input controls 838 whereupon the controller 816 recovers the message information from memory, and provides the message information to a display driver 840 for presentation on a display 842, such as an LCD display.

5 FIG. 15 is a flow chart describing the operation of the data communication receiver in accordance with the preferred embodiment of the present invention. At step 1502, when the data communication receiver is turned on, the controller operation is initialized, at step 1504.

10 Power is periodically applied to the receiver portion to enable receiving information present on the assigned RF channel. When data is not detected on the channel in a predetermined time period, battery saver operation is resumed, at step 1508. When data is detected on the

15 channel, at step 1506, the synchronization word correlator begins searching for bit synchronization at step 1510. When bit synchronization is obtained, at step 1510, the "A" word correlation begins at step 1512. When the non-complemented "A" word is detected, at step 1514, the

20 message transmission rate is identified as described above, at step 1516, and because frame synchronization is obtained, the time (T1) to the start of the frame identification code word is identified, at step 1518. When the non-complemented "A" word is not detected, at step

25 1514, indicating the non-complemented "A" word may have been corrupted by a burst error during transmission, a determination is made whether the complemented "A" bar" is detected, at step 1520. When the "A bar" word is not detected at step 1512, indicating that the "A-bar" word may

30 also have been corrupted by a burst error during transmission, battery saver operation is again resumed, at step 1508. When the "A-bar" word is detected, at step 1520, the message transmission rate is identified as described above, at step 1522, and because frame

35 synchronization is obtained, the time (T2) to the start of the frame identification code word is identified, at step 1524. At the appropriate time, decoding of the frame identification word occurs, at step 1526. When the frame

ID detected is not one assigned to the data communication receiver, at step 1528, battery saving is resumed, at step 1508, and remains so until the next assigned frame is to be received. When the decoded frame ID corresponds to an assigned frame ID, at step 1528, the message reception rate is set, at step 1530. An attempt to bit synchronize at the message transmission rate is next made at step 1532. When bit synchronization is obtained, at step 1533, the "C" word correlation begins at step 1534. When the non-complemented "C" word is detected, at step 1536, frame synchronization is obtained, and the time (T3) to the start of the message information is identified, at step 1538.

When the non-complemented "C" word is not detected, at step 1536, indicating the non-complemented "C" word may have been corrupted by a burst error during transmission, a determination is made whether the complement "C bar" is detected, at step 1540. When the "C bar" word is not detected at step 1540, indicating that the "C-bar" word may also have been corrupted by a burst error during transmission, battery saver operation is again resumed, at step 1508. When the "C-bar" word is detected, at step 1540, frame synchronization is obtained, and the time (T4) to the start of the message information is identified, at step 1542. At the appropriate time, message decoding can begin at step 1544.

In summary, by providing multiple synchronization code words which are spaced in time, the reliability of synchronizing with synchronization information which is subject to burst error corruption is greatly enhanced. The use of a predetermined synchronization code word as the first synchronization code word, and a second predetermined synchronization code word which is the complement of the first predetermined synchronization code word, allows accurate frame synchronization on either the first or the second predetermined synchronization code word. By encoding the synchronization code words, additional information, such as the transmission data rate can be provided, thereby enabling the transmission of message

information at several data bit rates. By using a second coded synchronization word pair, "fine" frame synchronization at the actual message transmission rate can be achieved, and again due to spacing in time of the synchronization code words, the reliability of synchronizing at a different data bit rate with synchronization information which is subject to burst error corruption is greatly enhanced, thereby improving the reliability of the data communication receiver to receive and present messages to the receiver user.

FIG. 16 is a timing diagram illustrating the organization of the transmission frame utilized in accordance with the preferred embodiment of the present invention. As previously described for FIG. 4 and shown again in FIG. 16, the transmission frame comprises a synchronization code word 1600 followed by eleven data blocks labeled Block 0 - Block 10. Address, control and message code words are distributed within the eleven data blocks in a predetermined order. The first code word, located in Block 0, is always a block information code word 1602 and includes such information as the beginning locations of an address field 1604 and a vector field 1606, leaving eighty-seven code words available for the transmission of address, vector and data code words. By knowing the beginning location of the address field 1604 and the vector field 1606, the controller is able to calculate how many address code words must be decoded per frame in order to determine when a message is present within the frame. Consequently, the address field 1604 includes one or more address code words corresponding to messages located within a data field 1608. Only address code words specifying numeric and alphanumeric messages have corresponding messages located within the data field 1608. Tone only messages, because no message portion is attached, would not have a corresponding message located within the data field 1608. For those address code words which do have corresponding messages, the vector field 1606 includes control words, or vectors, which define the

starting and ending locations of messages located within the data field 1608, and there is a one to one correspondence between the address code words located within the address field 1604 and the vectors located within the vector field 1606.

FIG. 17 is a timing diagram illustrating the block information control word 1602 utilized in accordance with the preferred embodiment of the present invention. Two bits define a carry-on flag 1710 and represent the number of carry-on frames which are provided for message transmission. The number of transmission frames into which carry-on is extended is defined by the carry-on flag 1710 as follows:

<u>Carry-on Flag</u>	<u>Frame Number</u>
00	Current Frame Only
01	Thru Frame N + 1
10	Thru Frame N + 2
11	Thru Frame N + 3

20

The function of the carry-on flag transmitted within the block information word will be described in the description to follow.

FIG. 18 is a memory map illustrating message carry-on in accordance with the preferred embodiment of the present invention. Normally the paging terminal restricts messages which are received over the public switched telephone network (PSTN) to a single transmission frame, which for purposes of example is labeled frame N in FIG. 18. Frame N represents the current transmission frame being processed for message transmission by the controller. As described above, the message data is encoded into eighty-eight code words for transmission during the current transmission frame, of which at least one code word is reserved for the block information code word. It will be appreciated, however, that for any given period of time, the number of messages received by the terminal for transmission, and the length of the messages, can result in a number of code

words representing messages received for transmission to exceed the transmission frame queue capacity as illustrated by an amount represented for purposes of example by excess messages 1802 which extend beyond the transmission frame boundary. Excess messages are defined herein as a complete message with corresponding address, not as a continuation of a single message. When the number of messages received exceeds the frame transmission queue capacity, message carry-on into subsequent transmission frames and message transmission rate changes can be used to increase the number of messages delivered, as will be described below. With message carry-on, the excess messages 1802, are transmitted in one or more of the three subsequent transmission frames, which for purposes of example are labeled N+1, N+2 and N+3. The selection of which transmission frame is utilized is based on determining which of the three subsequent transmission frames has, in one instance, excess transmission frame queue capacity, and in another instance, is one of displacing messages in subsequent transmission frames to allow current messages to be transmitted with the shortest time queue possible, as will be described below.

FIG. 19 is an electrical block diagram of the frame formatter 212 utilized in the controller of FIG. 2. As described above, messages which are received are stored in the active page file 210. The active page file 210 is preferably a dual-port, first-in, first out random access memory which is further delineated by message transmission phase, and which stores the messages in the order in which the messages were received according to the message transmission phase assigned to the data communication receiver. It will be appreciated that other memory types, such as hard disk drives can be utilized as well for implementing the active page file 210.

Periodically, such as once each transmission frame interval, a controller 1902 having outputs 1904 sequentially accesses the messages stored in the message storage areas representing the message transmission phases

of the active page file 210. The recovered messages are coupled to inputs of a frame decoder 1906 which identifies those messages which are to be transmitted during the current transmission frame, and those messages which will
5 be transmitted during one or more subsequent transmission frames, which as described above are the three subsequent transmission frames. When a message is detected within any of the message transmission phases and which are to be transmitted during the current transmission frame, or
10 during one of the three subsequent transmission frames, the frame decoder 1906 generates a message detection signal which is coupled to the controller 1902. The controller 1902 then analyzes the corresponding message to determine the number of code words which will be required for message
15 transmission. Depending on the transmission frame assigned to the recovered messages, the controller 1902 couples calculated message code word counts to a group of frame counters 1908 which maintain a total count of the message code word requirements for the current frame (N), and the
20 three subsequent frames (N+1, N+2 and N+3). The message for the current transmission frame is also stored in a current transmission frame buffer 1910, while messages for the three subsequent transmission frames are returned in the order in which the messages were received to the active
25 page file 210, thereby maintaining message queue order. When the code word count maintained by the frame counter 1908 for the current frame (N) exceeds a predetermined transmission frame queue capacity, which as described above equals eight-seven code words, the excess messages which
30 are detected as the active page file 210 is read out are stored in a carry-on buffer 1912. The excess messages stored in carry-on buffer 1912 will be transmitted in one or more of the three subsequent transmission frames, as will be described below.

35 After all messages for the current transmission frame have been recovered, the messages stored in the current frame buffer 1910 are coupled to inputs of a data concentrator 1914 which processes the messages stored in

the four message storage areas corresponding to transmission phase depending upon the message transmission speed. The concentrated messages are then coupled to inputs of a data distributor 1916 which then distributes
5 the concentrated messages to the frame message buffer 216, again according to the transmission speed. Thereafter, message processing for transmission is as described for FIG. 2.

FIGS. 20-22 are electrical block diagrams illustrating
10 the operation of the data concentrator/distributor in accordance with the preferred embodiment of the present invention. The data concentrator 1914 is preferably a programmable four line to one, two or four line de-multiplexer, the operation of which is controlled by the
15 controller 1902. The data distributor 1916 is preferably a programmable one, two or four line to four line multiplexer, the operation of which is also controlled by the controller 1902. The operations of both the data concentrator 1914 and the data distributor 1916 are readily
20 implemented as software routines using a microcomputer.

When the message data is to be transmitted at 1600 bits per second (bps), the total number of messages stored within the four transmission phase regions of the current frame buffer is typically eighty-seven or less code words
25 without message carry-on, and typically less than 1.5X to 2X times eighty-seven code words with message carry-on. However, a speed change to the next transmission speed is preferable when the current frame transmission queue exceeds two times eighty-seven code words with message
30 carry-on. As shown in FIG. 20, the contents of the four transmission phases are combined to a single serial output using the data concentrator 1914, and then redistributed to two of the four frame message buffer transmission phases (1 and 3). The second two frame message buffer transmission
35 phases (2 and 4) are coupled to a logic zero by the data distributor 1916 which is then loaded into the frame message buffer. The frame message buffer contents is further processed for transmission as described in FIG. 2

above, and applied to the input of the 4-level FSK modulator at the transmitter, which, because of the logic zero input provided to frame message buffer transmission phases 2 and 4, results in 2-level FSK modulation of the message to be generated at 1600 bps, which also corresponds to a symbol rate of 1600 symbols per second.

When the message data is to be transmitted at 3200 bits per second (bps), the total number of messages stored within the four transmission phase regions of the current frame buffer described above, is typically twice eighty-seven or less code words without message carry-on and typical less than three to four times eighty-seven code words with message carry-on. However, again a speed change to the next transmission speed is preferable when the current frame transmission queue exceeds four times eighty-seven code words with message carry-on. As shown in FIG. 21, the contents of the four transmission phases (1 and 2, and 3 and 4) are combined to two serial outputs (2 and 3) using the data concentrator 1914, and then redistributed to the four frame message buffer transmission phases (1 and 3, and 2 and 4 respectively) by data distributor 1916. The frame message buffer contents is further processed for transmission as described in FIG. 2 above, and applied to the input of the 4-level FSK modulator at the transmitter, which results in 4-level FSK modulation to be generated at 3200 bps, which also corresponds to a symbol rate of 1600 symbols per second.

When the message data is to be transmitted at 6400 bits per second (bps), the total number of messages stored within the four transmission phase regions of the current frame buffer described above, is typically four times eighty-seven or less code words without message carry-on and typically less than six to eight times eighty-seven code words with message carry-on, although message carry-on to sixteen times eighty-seven code words is possible by forcing a carry-on in all three subsequent transmission frames. As shown in FIG. 22, the contents of the four transmission phases are coupled directly through the data

concentrator 1914 and the data distributor 1916 to the frame message buffer. The frame message buffer contents is further processed for transmission as described in FIG. 2 above, and applied to the input of the 4-level FSK

5 modulator at the transmitter, which results in 4-level FSK modulation to be generated at 6400 bps which corresponds to a symbol rate of 3200 symbols per second.

In summary, the frame formatter is utilized to sort the messages stored within the active page file, shown in
10 FIG. 2, preparing the messages for transmission. By monitoring the number of code words for which transmission is required in the current transmission frame, and the three subsequent transmission frames, the frame formatter determines when message carry-on is desirable, and which of
15 the three subsequent transmission frames will be used to provide message carry-on. The frame formatter also formats the message data to enable transmission at three selected transmission speeds using preferably a 4-level FSK modulator, thereby providing increased message processing
20 capacity using message carry-on and speed changes to be described below, as the number of messages being received by the system increases.

FIG. 23 is a flow chart illustrating the operation of the frame formatter of FIG. 19. At the beginning of each
25 transmission frame processing cycle, the controller within the frame formatter initializes the frame counters to counts of eighty-seven, at step 2302. During the message transmission, the actual number of code words transmitted is eighty-eight which includes at least one block
30 information word followed by the eighty-seven message code words comprising address, control and message information. When the controller determines that it is time to transmit, at step 2304, the contents of the active page file is recovered, at step 2306. As the messages are recovered,
35 the frame information bundled with the corresponding messages is decoded, at step 2308. When the frame information does not belong to the current transmission frame being processed, at step 2310, the controller checks

whether the frame information belongs to one of the three subsequent transmission frames, at step 2312. When the frame information indicates the messages do not belong to the three subsequent transmission frames, recovery of the messages from the active page file continues, at step 2306. When the frame information indicates the messages belong to the three subsequent transmission frames, at step 2312, the message type and length are identified, at step 2314. The number of code words required for transmission is next calculated, at step 2316, for each message type, using the table shown below.

<u>Message Type</u>	<u>Code Words Required for Transmission</u>
Tone-only	1 address code word (cw)
15 Numeric (7 digit)	2 address/vector cw plus 1.4 data cw
Numeric (10 digit)	2 address/vector cw plus 2 data cw
Alphanumeric	2 address/vector cw plus 1 data cw/3 characters

The table above is based on 21 data bits being available for message transmission in the modified 32,21 BCH code word with numeric characters requiring four data bits and alphanumeric characters requiring seven data bits for message transmission. The frame queue capacity remaining $FC(M)$, where M is 1 - 3) for the three subsequent transmission frames is next calculated by decrementing the frame counters by the number of code words required per message, at step 2218 following the code word requirement calculation for each message identified to belong to one of the three subsequent transmission frames. When the transmission frame queue capacity is equal to zero ($FC(M) = 0$), at step 2320, the corresponding subsequent transmission frame queue is full, and is not generally suitable in message carry-on, except as will be described below.

When the frame information belongs to the current transmission frame, at step 2310, the message type and length are identified, at step 2324. The number of code words required for message transmission is next calculated,

at step 2326, for each message type using the table described above. The transmission frame queue capacity remaining $FC(0)$ for the current transmission frame is next calculated, at step 2328 following the code word
5 requirement calculation for each message. When the current transmission frame queue capacity is not equal to zero ($FC(0) > 0$), at step 2330, and the contents of the active page file memory has been fully recovered, the controller sets the message carry-on flag transmitted in the block
10 information code word to "00", at step 2332, indicating that no message carry-on is required for the current transmission frame. After the block information control word is updated by the controller, the current transmission frame buffer contents is then transferred to the frame
15 message buffer for processing as described in FIG. 2 above.

When the current transmission frame queue is full, at step 2330, any further message requirements are stored in the carry-on buffer, at step 2336. When the contents of the active page file memory has been fully recovered, the
20 absolute value of the contents of the current frame counter is determined, which indicates the actual number of code words which are required to be placed into one or more subsequent transmission frames using message carry-on when the code word count is negative. In one embodiment of the
25 present invention, the number of code words which correspond to complete messages including address, control and message information, and which is to be moved from the current transmission frame is then compared to the number of available code word positions within the subsequent
30 three frames, at step 2338. When a sufficient number of code word positions are available in the first, second or third subsequent transmission frame or a combination thereof to accommodate the number of messages to be moved from the current transmission frame, the controller sets
35 the carry-on flag in the block information code word, to "01", "10" or "11" respectively, thereby identifying whether the carry-on information is located within the

first, second or third subsequent frame or combination thereof, at step 2342.

When the number of code words required to be carried-on exceeds the number of excess code words available in the three subsequent transmission frames, at step 2338, the carry-on messages are preferably placed at the head of the transmission frame queue for the third subsequent transmission frame, and the carry-on flag is set by the controller to "11", at step 2344, indicating the carry-on information is located in at least the third subsequent transmission frame, at step 2346. It will be appreciated, that by placing the current transmission frame excess code words at the head of the frame transmission queue for the third subsequent transmission frame, the requirement for carry-on within the third subsequent transmission frame is generally insured when messages requirements for that transmission frame are evaluated as the current transmission frame. In the alternative, the excess messages can be transmitted in part in any excess code word positions available in the subsequent three transmission frames, leaving the balance for the next transmission frame cycle, or can replace the messages in any one of the three subsequent transmission frames, such as by "bumping" the messages in the first subsequent transmission frame and then using message carry-on for each of the subsequent transmission frames until a transmission frame becomes available to absorb the excess message count without the requirement for a message carry-on.

FIG. 24 is a flow chart illustrating data speed selection in accordance with the preferred embodiment of the present invention. At step 2402, the transmission speed is initialized, for purposes of example, to 1600 bits per second (bps), although it will be appreciated that the actual transmission speed could be initialized to 3200 or 6400 bit per second (bps) as well. At the next transmission queue time, at step 2404, the current transmission frame queue capacity is evaluated as described above, at step 2406. When the current transmission frame

queue capacity is, for example, less than two times eighty-seven code words, at step 2406, the messages from each transmission phase are concentrated, at step 2408, and redistributed to transmission phases 1 and 3, at step 2410, as described for FIG. 20 above, and transferred to the frame message buffer, at step 2412, resulting in 2-level FSK modulation being generated at a data rate of 1600 symbols per second when the messages are transmitted.

When the current transmission frame queue is, for example, greater than two times eighty-seven code words and less than four times eighty-seven code words, at step 2414, and message carry-on is not invoked, the message code words are concentrated by transmission phase, at step 2416, and then redistributed by transmission phase, at step 2418, as described for FIG. 21 above, and transferred to the frame message buffer, at step 2412, resulting in 4-level FSK modulation being generated at a data rate of 3200 bits per second which corresponds to 1600 symbols per second when the messages are transmitted.

When the current transmission frame queue is, for example, greater than four times eighty-seven code words and less than eight times eighty-seven code words, at step 2420, and message carry-on is not invoked, the message code words are concentrated by transmission phase, at step 2424, and then redistributed by transmission phase, at step 2426, as described for FIG. 22 above, and transferred to the frame message buffer, at step 2312, resulting in 4-level FSK modulation being generated at a data rate of 6400 bits per second which corresponds to 3200 symbols per second when the messages are transmitted.

When the current transmission frame queue is, for example, greater than eight times eighty-seven code words, at step 2420, message carry-on is reviewed, at step 2422, in an attempt to transmit all messages in the transmission frame queue during the current transmission frame cycle.

While message carry-on considerations are not considered while speed change decisions were described in FIG. 24, it is clear that when messages can be delivered in

most transmission frames, at a given transmission speed, message carry-on can be used effectively to balance those transmission frames which have a greater number of messages to be transmitted than can be effectively handled within the transmission frame at an increased transmission speed. When frame transmission queue requirements increase generally throughout the active page file due to an increased number of messages being received for all transmission frames, the use of transmission speed changes are effective in increasing the level of traffic that can be handled on the channel. By balancing the use of message carry-on and speed changing, a true variable speed signaling format is provided which allows flexible system growth beginning at a relatively low message transmission speed and progressing to a higher message transmission speed. While an increased number of data communication receivers can be added, and while message transmission speed is increased by transmitting multiple messages essentially in parallel, as described as above, the actual decoding speed requirement for the data communication receivers remains constant for the transmission protocol as described the message speed increases.

FIGS. 25-27 are timing diagrams illustrating transmission phase and bit interleaving of the message transmissions in accordance with the preferred embodiment of the present invention. As described in FIGS. 4 and 8, each transmission block comprises eight thirty-two bit code words, which are encoded in the signaling protocol of the preferred embodiment of the present invention as either address, control or data code words, and which are then interleaved using methods which are well known to one of ordinary skill in the art using the frame message interleaver. Since the messages are stored in transmission phases, as described above, the messages within each transmission phase are independently encoded and interleaved. Depending upon the message transmission rate, the transmission frame data stored for any given transmission phase can be related to transmission frame

data stored in other transmission phases, or can be totally independent of the transmission frame data stored in the other transmission phases, as described in FIGS. 20-22.

When the transmission frame data is finally processed for transmission, the transmission frame data for each transmission phase is multiplexed together by a phase multiplexer, further interleaving the interleaved transmission frame data.

Returning to FIG. 25, when the transmission frame data 2502 is transmitted at an effective rate of 1600 bits per second, the message bit information 2504, 2506, 2508 appear on the transmission channel as 2-level FSK modulation having a bit period 2512 equivalent to 1600 bit per second data interleaved in a conventional manner, bit zero of message 1 (BOM1) 2504 followed by bit zero of message 2 (BOM2) 2506, and so on. The transmission frame data is derived from the four transmission phases 2510 and is interpreted by the data communication receiver as being a single data bit transmitted at 1600 bits per second.

Returning to FIG. 26, when the transmission frame data 2602, 2604 is transmitted at an effective rate of 3200 bits per second, the message bit information 2606, 2608, 2610, 2612, 2614 and 2616 appear on the transmission channel as 4-level FSK modulation having a bit period 2620 equivalent to 3200 bit per second data interleaved in a non-conventional manner, bit zero of message 1 (BOM1) 2606 directed to a first group of data communication receivers, followed by bit zero of message 1 (BOM1) 2612 directed to a second group of data communication receivers, and so on. The transmission frame data is still derived from the four transmission phases 2618, but is interpreted by the groups of data communication receivers as being two unrelated data streams, each transmitted at 1600 bits per second.

Returning to FIG. 27, when the transmission frame data 2702, 2704, 2706 and 2708 is transmitted at an effective rate of 6400 bits per second, the message bit information 2710, 2712, 2714, 2716, 2718 and 2720 appear on the transmission channel as 4-level FSK modulation having a bit

period 2722 equivalent to 6400 bit per second data interleaved in a non-conventional manner, bit zero of message 1 (BOM1) 2710 directed to a first group of data communication receivers, followed by bit zero of message 1 (BOM1) 2716 directed to a second group of data communication receivers, followed by bit zero of message 1 (BOM1) 2718 directed to a third group of data communication receivers, followed by bit zero of message 1 (BOM1) 2720 directed to a fourth group of data communication receivers, and so on. The transmission frame data is still derived from the four transmission phases 2722, but is interpreted by the four groups of data communication receivers as being four unrelated data streams, each transmitted at 1600 bits per second.

In summary, messages are transmitted between the terminal and the transmitter over a distribution channel at a constant effective data bit rate of 6400 bits per second. However, depending on how the messages are formatted within the four transmission phases, and which synchronization code word is transmitted, as described above, the transmitted messages are interpreted by the data communication receivers as messages transmitted to one, two or four groups of data communication receivers at a constant effective transmission rate of 1600 bits per second.

FIGS. 28-30 are timing diagrams illustrating the data communication receiver message bit sampling in accordance with the preferred embodiment of the present invention. As described above, the synchronization code word transmitted indicates the relative transmission rate as 1600 bits per second, 3200 bits per second, or 6400 bits per second. Each of the data communication receivers is assigned to one of four transmission phases initially, Ø1, Ø2, Ø3, and Ø4. When the synchronization code word received indicates message transmission at 1600 bits per second is to follow, the phase selector 828 of FIG. 8 is addressed to select all four phase outputs, resulting in a phase clock which is provided to the demultiplexer 820, block de-interleaver

822, and address 830 and data 832 correlators which is generated at 1600 bits per second. This results, as shown in FIG. 28 with 1600 bit per second message bits which are sampled by all data communication receivers irregardless of
5 transmission phase to which the data communication receivers are assigned, and sampling is provided within the center of the 1600 bit per second data bit.

When the synchronization code word received indicates message transmission at 3200 bits per second is to follow,
10 the phase selector 828 of FIG. 8 is addressed to select two of four phase outputs, resulting in a phase clock which is provided to the demultiplexer 820, block de-interleaver 822, and address 830 and data 832 correlators which is generated at 1600 bits per second during transmission
15 phases Ø1 and Ø2, or transmission phases Ø3 and Ø4. This results, as shown in FIG. 29 with 3200 bit per second message bits which are sampled by two groups of data communication receivers (group 1 - Ø1 and Ø2, group 2 - Ø3 and Ø4) sampling within the center of a 3200 bit per second
20 data bit, thereby effectively doubling the amount of information transmitted on the transmission channel.

When the synchronization code word received indicates message transmission at 6400 bits per second is to follow, the phase selector 828 of FIG. 8 is addressed to select one
25 of four phase outputs, resulting in a phase clock which is provided to the demultiplexer 820, block de-interleaver 822, and address 830 and data 832 correlators which is generated at 1600 bits per second during transmission phases Ø1, Ø2, Ø3 and Ø4. This results, as shown in FIG.
30 30 with 6400 bit per second message bits which are sampled by four groups of data communication receivers (group 1/Ø1, group 2/Ø2, group 3/Ø3 and group 4/Ø4) sampling within the center of a 6400 bit per second data bit, thereby effectively quadrupling the amount of information
35 transmitted on the transmission channel.

The sampling of the received data is controlled by the controller 816, shown in FIG. 8, and generates one sampling pulse at 1600 bit per second bit rates, two sampling pulses

at 3200 bit per second bit rates, and four sampling pulses at 6400 bit per second bit rates, the sampling pulses centered within the data bit at each transmission bit rate. Selection of which data bit is recovered at the three
5 transmission bit rates is controlled by the phase clock generated by the phase selector, and is based on which transmission phase each data communication receiver is initially assigned to receive as described above.

FIGS. 31 and 32 are flow charts illustrating the
10 message processing capability of the data communication receiver in accordance with the preferred embodiment of the present invention. When the data communication receiver is turned on, the microcomputer controller is initialized, at step 3102. Power is then supplied to the receiver to
15 enable receiving information which may be transmitted on the assigned radio frequency channel. When bit and frame synchronization are not obtained within a predetermined period of time, at step 3104, power is suspended to the receiver, and the receiver remains in a battery saving
20 mode, at step 3106, until a predetermined time period has elapsed, such as when the next assigned frame transmission is expected. When bit and frame synchronization are obtained as described in FIG. 15, at step 3104, the message transmission speed is identified, at step 3108, to enable
25 decoding the received messages. After the block information code word has been separated from the address information by de-interleaving transmission Block 1, the block information code word is decoded, at step 3110. The status of the carry-on flag is then checked, and when the
30 carry-on flag value is "00", indicating no message carry-on is established by the terminal, the current transmission frame address fields is decoded, at step 3114. When the carry-on flag value is not "00", at step 3112, but rather is determined to be "01", at step 3116, indicating a
35 message carry-on is established by the terminal which extends into the first subsequent transmission frame, the current transmission frame and next subsequent transmission frame addresses are decoded, at step 3118. When the carry-

on flag value is not "01", at step 3116, but rather is determined to be "10", at step 3120, indicating a message carry-on is established by the terminal which extends into the first or second subsequent transmission frame or a
5 combination thereof, the current transmission frame and next two subsequent transmission frame address fields are decoded, at step 3122. When the carry-on flag value is not "10", at step 3120, but rather is determined to be "11", at step 3124, indicating a message carry-on is established by
10 the terminal which extends into the first, second, or third subsequent transmission frame, the current transmission frame and next three subsequent transmission frame address fields are decoded, at step 3126.

When the address fields are decoded, at steps 3114,
15 3118, 3122 or 3126 do not include an address is assigned to the data communication receiver, as determined at step 3202 of FIG. 32, power is suspended to the receiver, and battery saving is performed until the next assigned transmission frame. When the address fields are decoded, at steps 3114,
20 3118, 3122 or 3126 include an address is assigned to the data communication receiver, as determined at step 3202 of FIG. 32, the message information corresponding to the address is decoded, at step 3204, in the transmission frame in which the address is detected, which is either the
25 current transmission frame or one of the three subsequent transmission frames, depending on the value of the carry-on flag transmitted. The decoded message is then stored in memory, at step 3206, and the user is alerted of the received message, at step 3208. Power is then suspended to
30 the receiver, until the next assigned transmission frame is expected, at step 3106 of FIG. 31.

In summary, a data communication receiver has been described above which is responsive to a message carry-on flag transmitted within the block information code word to
35 determine the length of time the data communication receiver should remain on to detect any messages which may be directed to the data communication receiver. In particular, the message carry-on flag indicates that

messages are being transmitted in the assigned transmission frame, or in one or more of three subsequent transmission frames. A data communication receiver which has been directed to search for addresses in one or more of the
5 three subsequent transmission frames, thereafter ignores any message carry-on flag which is transmitted in the block information code words of the subsequent transmission frames, but remains looking for addresses within the transmission frames indicated by the message carry-on flag
10 decoded in the assigned transmission frame. This allows message carry-on to be selectively applied to all transmission frames, and as described above, message carry-on can only be detected by a data communication receiver operating in an assigned transmission frame.

15 We claim:

Claims

1. A data communication receiver assigned for receiving message signals within one or more message
5 transmission frames transmitted in a predetermined sequence, the message signals including address and message information, and information designating one or more additional message transmission frames to which the data communication receiver is responsive for receiving
10 the message signals, the data communication receiver comprising:
a receiver for receiving the message signals;
means, coupled to said receiver, for decoding the address and designating information received during the
15 assigned transmission frames;
means, responsive to the address and designation information decoded, for storing the message information received which is intended for the data communication receiver during the assigned transmission frames,
20 said decoding means being further responsive to the designating information, for decoding address information received during the one or more additional transmission frames designated by the designating information,
25 said memory means further storing the message information received which is intended for the data communication receiver during the one or more additional transmission frames; and
means for displaying the stored message
30 information.
2. The data communication receiver according to claim 1, wherein the designating information designates one or more additional consecutive transmission frames
35 transmitted subsequent to the assigned transmission frame.

3. The data communication receiver according to claim 2, wherein the designating information designates up to three additional consecutive transmission frames.
- 5 4. The data communication receiver according to claim 1, wherein only the address information is decoded during the one or more additional transmission frames designated by the designating information.
- 10 5. The data communication receiver according to claim 1, wherein when the designating information designates the one or more additional transmission frames, the address information identifying the data communication receiver and the associated message information can be
15 transmitted in any of the designated transmission frames.
6. The data communication receiver according to claim 1, wherein the designating information is included
20 within a code word which also includes information identifying the position of the address information within the assigned transmission frame.

7. A data communication receiver assigned for receiving message signals within one or more message transmission frames transmitted in a predetermined sequence, the message signals including address and message information, and information designating one or more additional message transmission frames to which the data communication receiver is responsive for receiving the message signals, the data communication receiver comprising:
- 10 a receiver for receiving the message signals;
battery saving means for controlling the supply of power to said receiver during the assigned transmission frames, and for enabling the same to receive the message signals;
- 15 means, coupled to said receiver, for decoding the address and designating information received during the assigned transmission frames;
means, responsive to the address and designation information decoded, for storing the message information received which is intended for the data communication receiver during the assigned transmission frames,
- 20 said battery saving means being further responsive to the designating information for controlling the supply of power to said receiver during the one or more additional transmission frames designated by the designating information,
- 25 said decoding means being further responsive to the designating information, for decoding address information received during the one or more additional transmission frames designated by the designating information,
- 30 said memory means further storing the message information received which is intended for the data communication receiver during the one or more additional transmission frames; and
- 35 means for displaying the stored message information.

8. The data communication receiver according to claim
7, wherein the designating information designates one or
more additional consecutive transmission frames
transmitted subsequent to the assigned transmission
5 frame.

9. The data communication receiver according to claim
8, wherein the designating information designates up to
three additional consecutive transmission frames.

10

10. The data communication receiver according to claim
7, wherein only the address information is decoded
during the one or more additional transmission frames
designated by the designating information.

15

11. The data communication receiver according to claim
7, wherein when the designating information designates
the one or more additional transmission frames, the
address information identifying the data communication
20 receiver and the associated message information can be
transmitted in any of the designated transmission
frames.

12. The data communication receiver according to claim
25 7, wherein the designating information is included
within a code word which also includes information
identifying the position of the address information
within the assigned transmission frame.

13. A pager assigned for receiving message signals within one or more message transmission frames transmitted in a predetermined sequence, the message signals including address information, and information designating one or more additional message transmission frames to which the pager is responsive for receiving the message signals, the pager comprising:
- a receiver for receiving the message signals;
 - means, coupled to said receiver, for decoding the address and designating information received during the assigned transmission frames; and
 - alerting means, responsive to the address and designating information decoded, for generating a sensible alert signal when the address information decoded is intended for the pager during the assigned transmission frames,
 - said decoding means being further responsive to the designating information, for decoding address information received during the one or more additional transmission frames designated by the designating information,
 - said alerting means further generating a sensible alert signal when the address information decoded is intended for the pager during the one or more additional transmission frames.
14. The pager according to claim 13, wherein the designating information designates one or more additional consecutive transmission frames transmitted subsequent to the assigned transmission frame.
15. The pager according to claim 14, wherein the designating information designates up to three additional consecutive transmission frames.

16. The pager according to claim 13, wherein only the address information is decoded during the one or more additional transmission frames designated by the designating information.

5

17. The pager according to claim 13, wherein when the designating information designates the one or more additional transmission frames, the address information identifying the pager can be transmitted in any of the
10 designated transmission frames.

18. The pager according to claim 13, wherein the designating information is included within a code word which also includes information identifying the position
15 of the address information within the assigned transmission frame.

1/18



FIG. 1







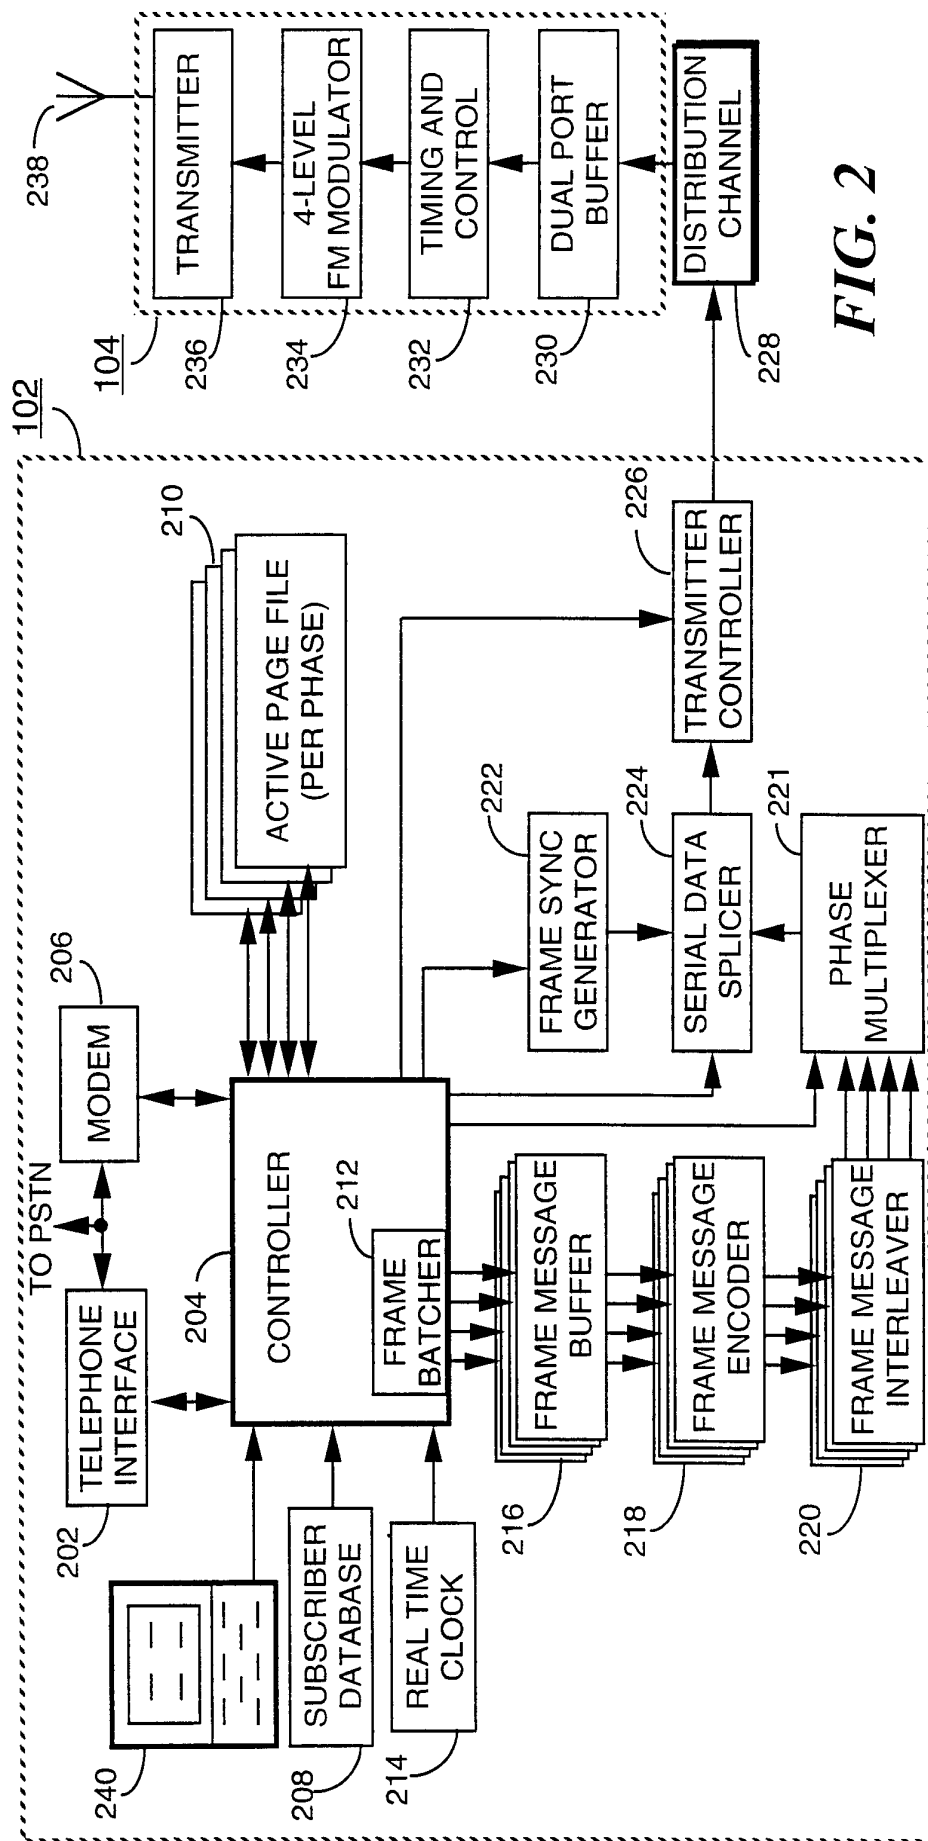




FIG. 2

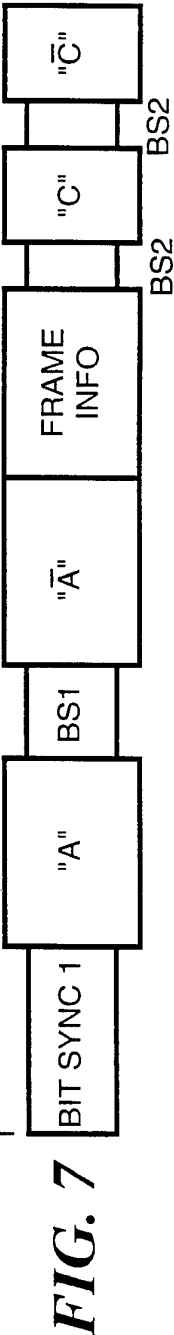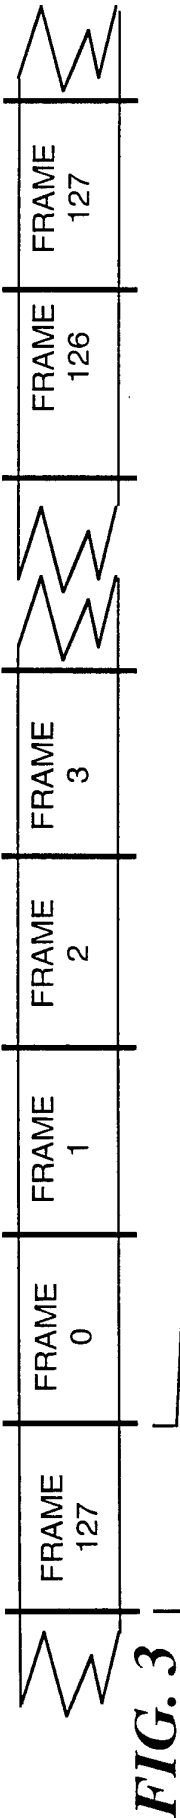



3/18

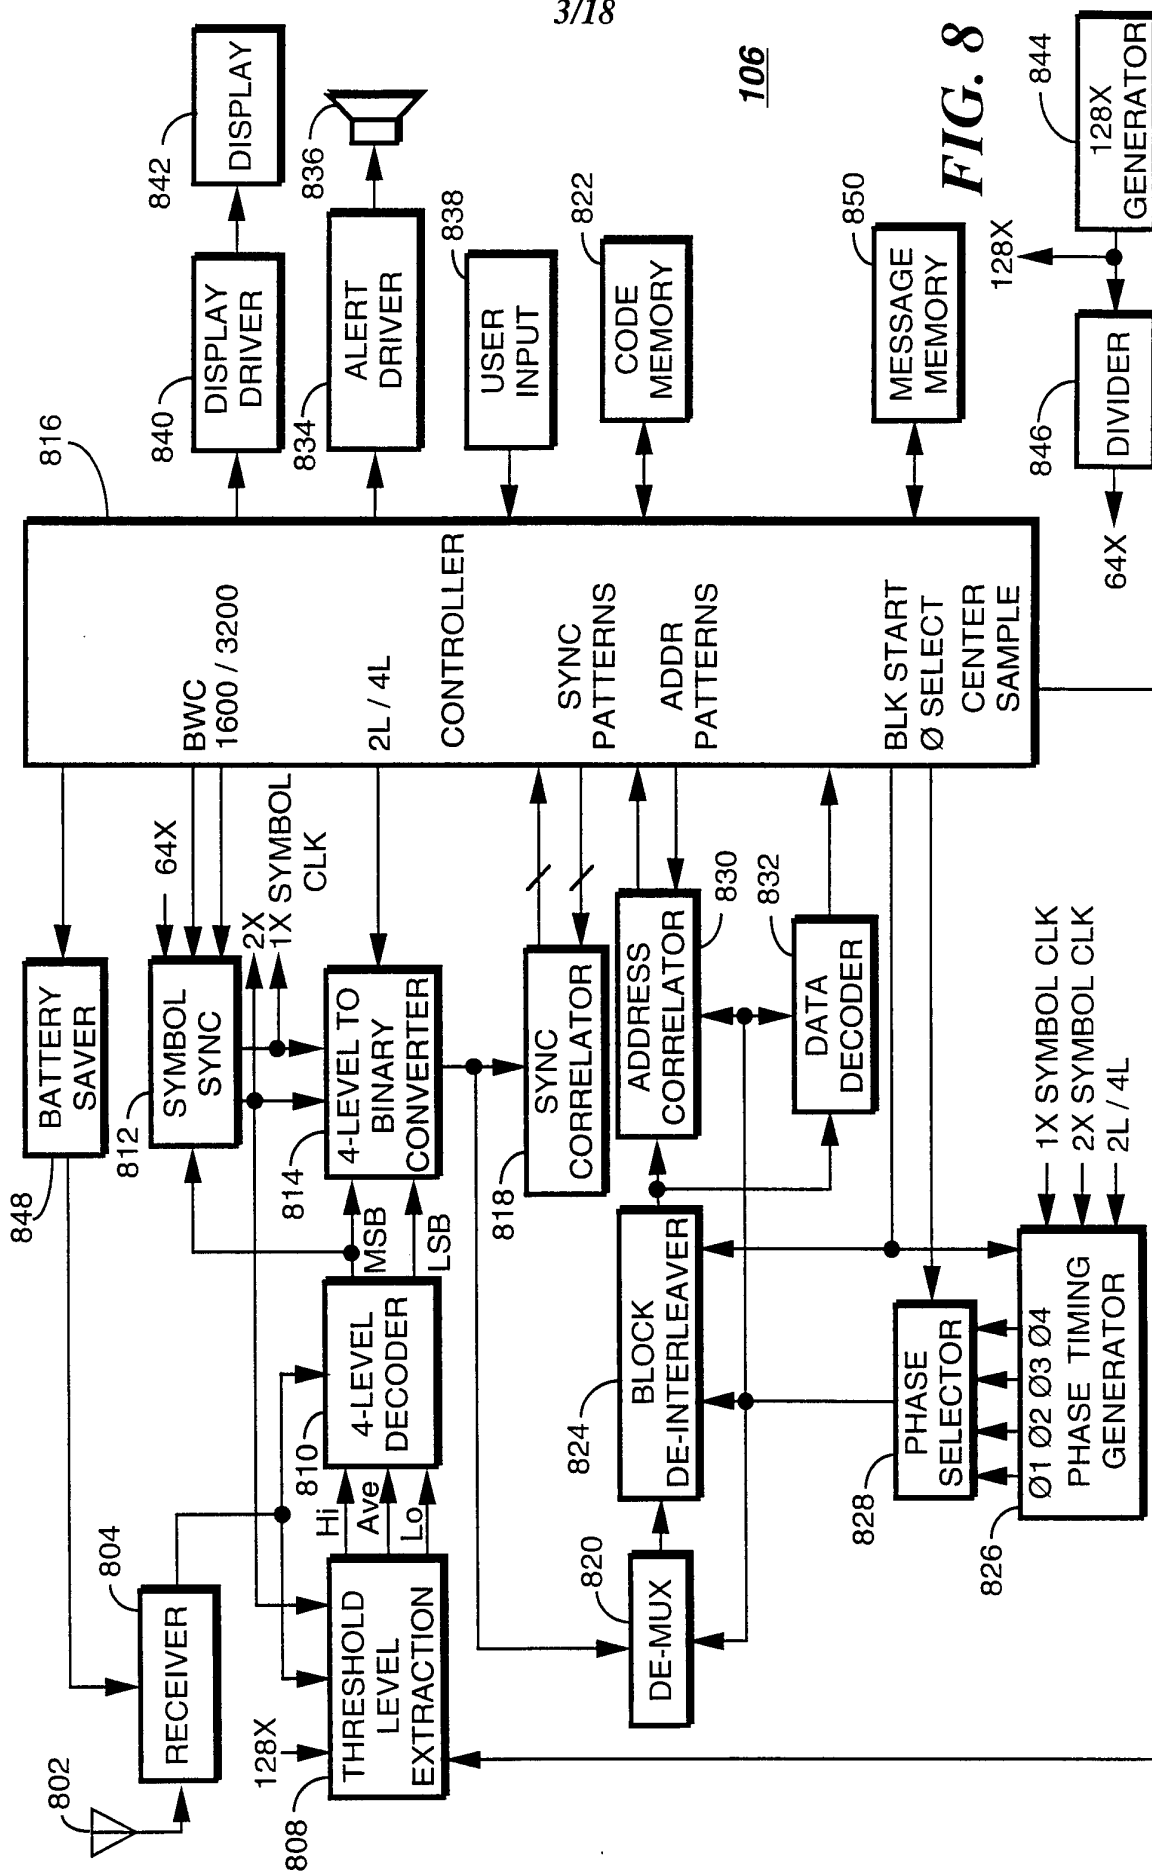

4/18

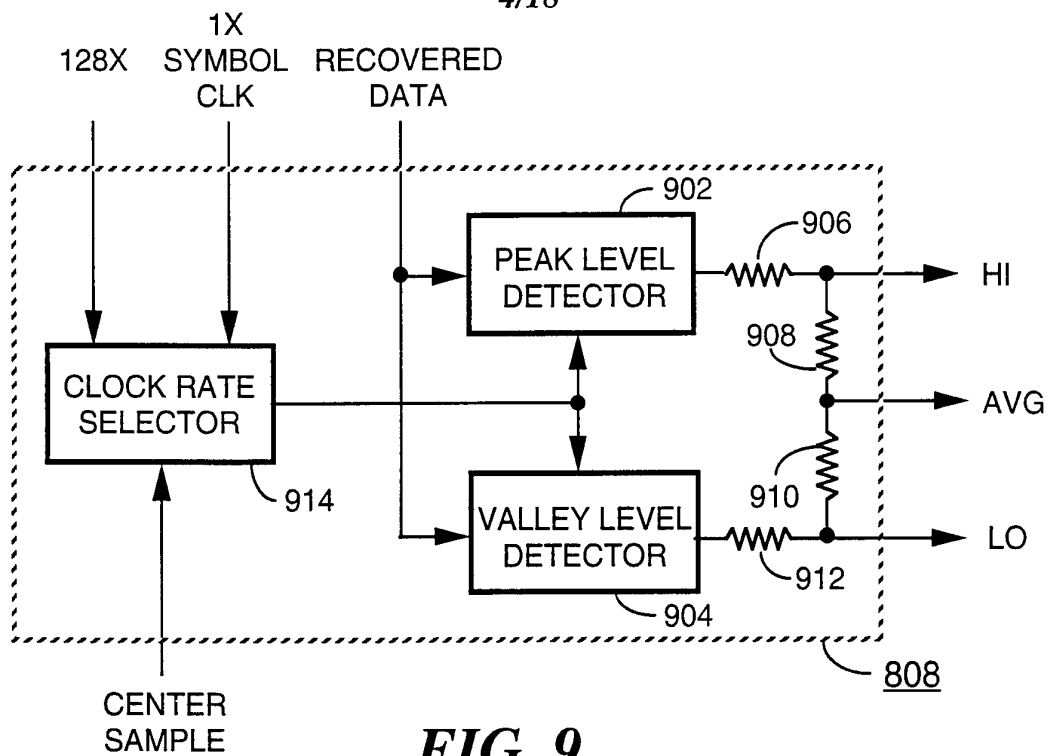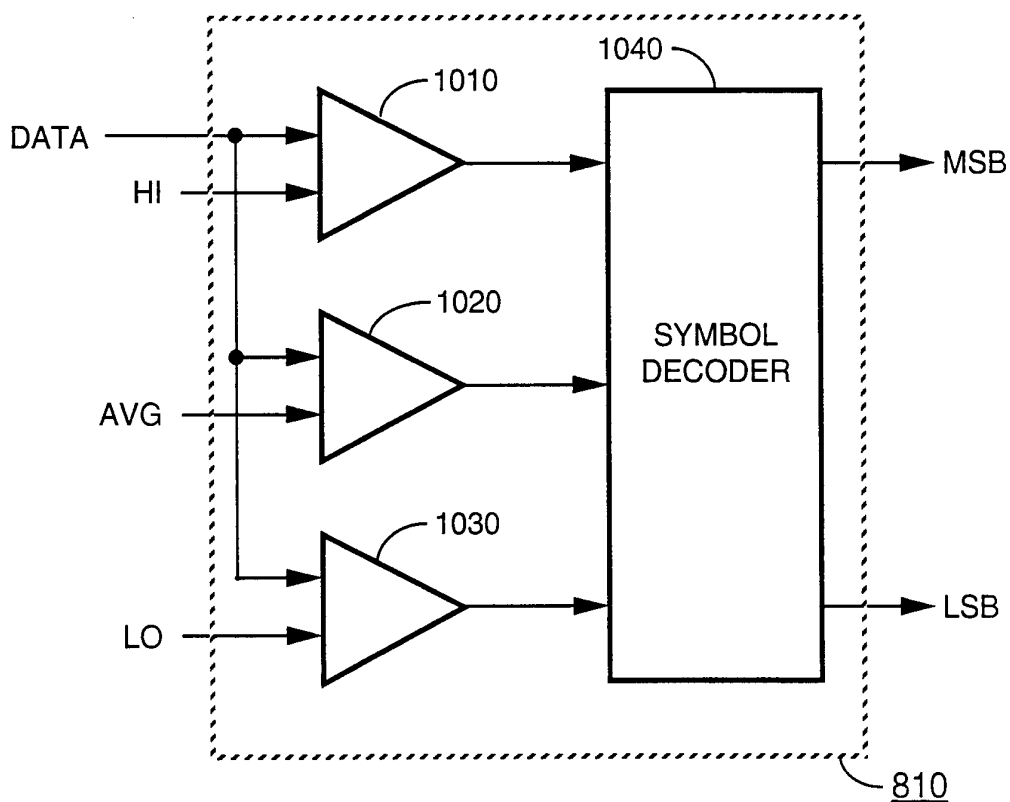**FIG. 9****FIG. 10**

5/18

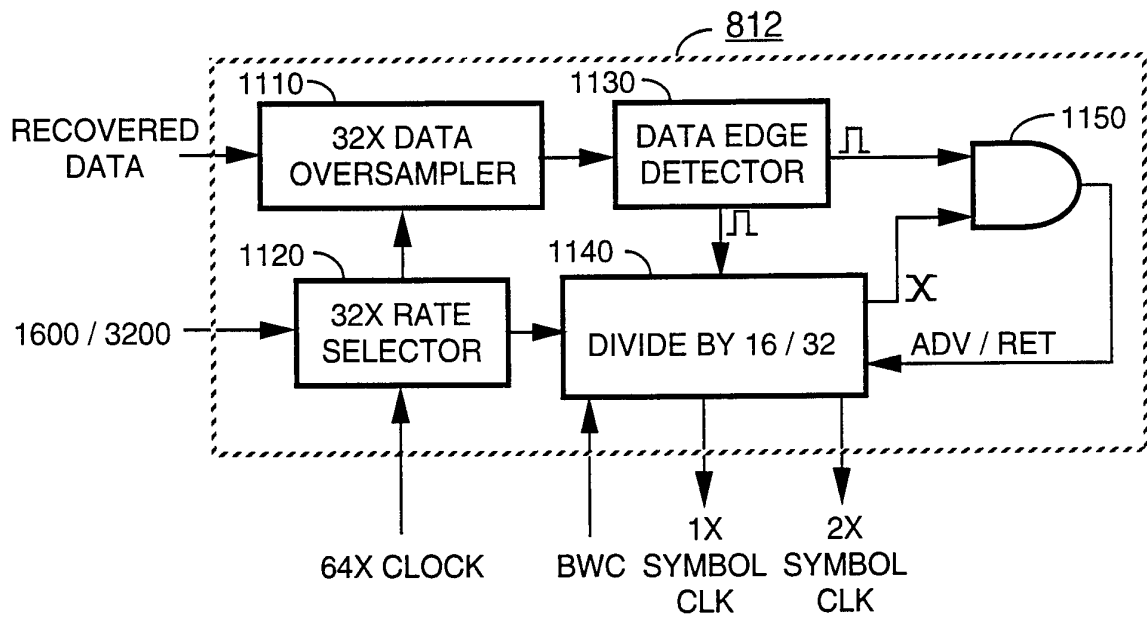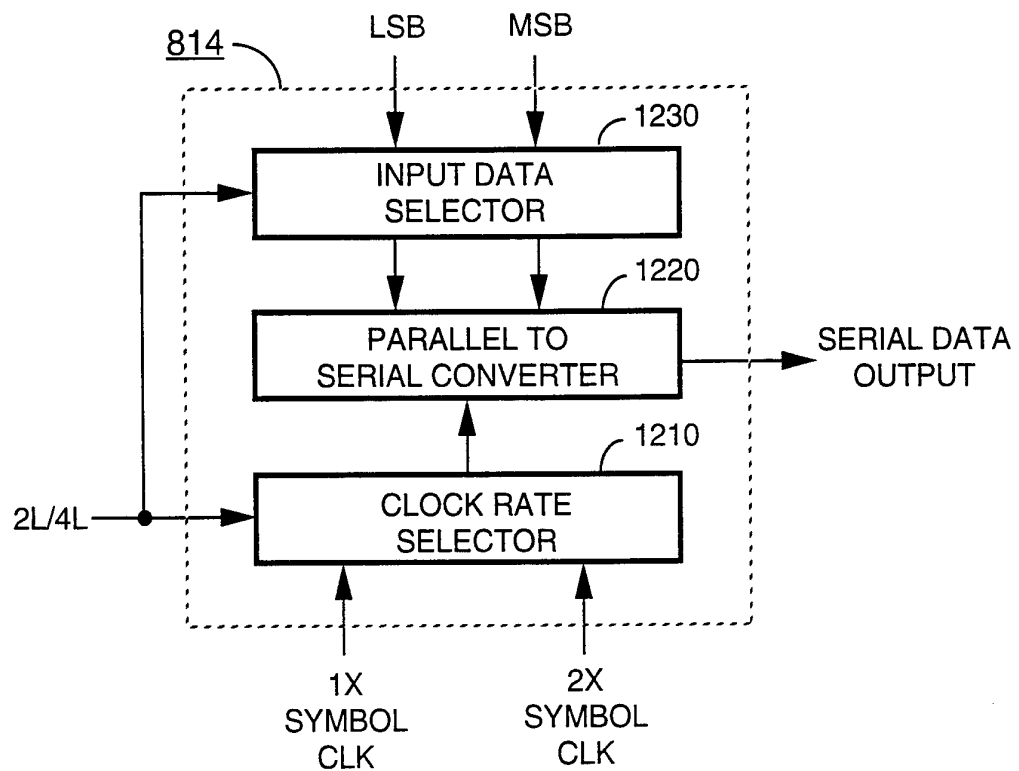**FIG. 11****FIG. 12**

6/18

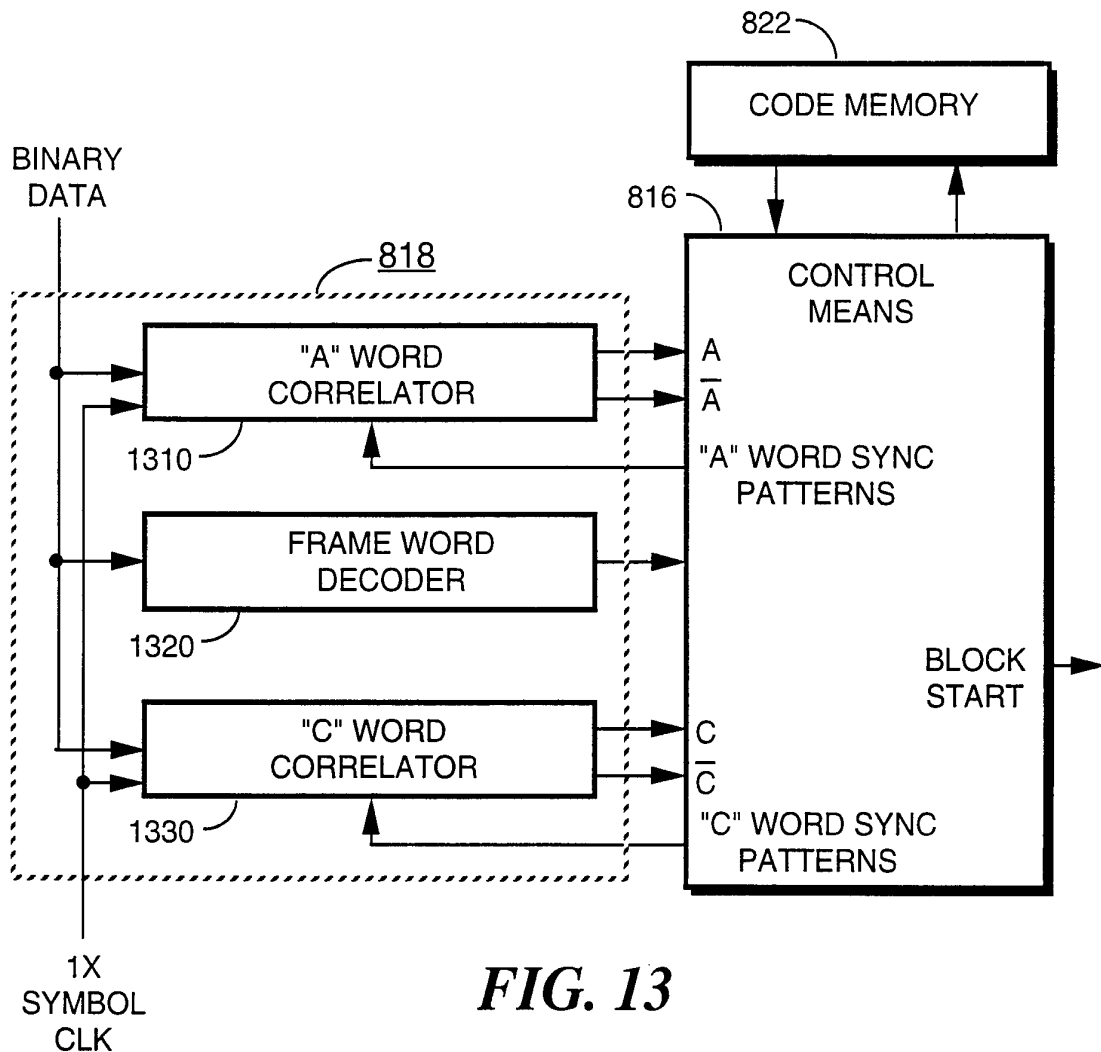


FIG. 13

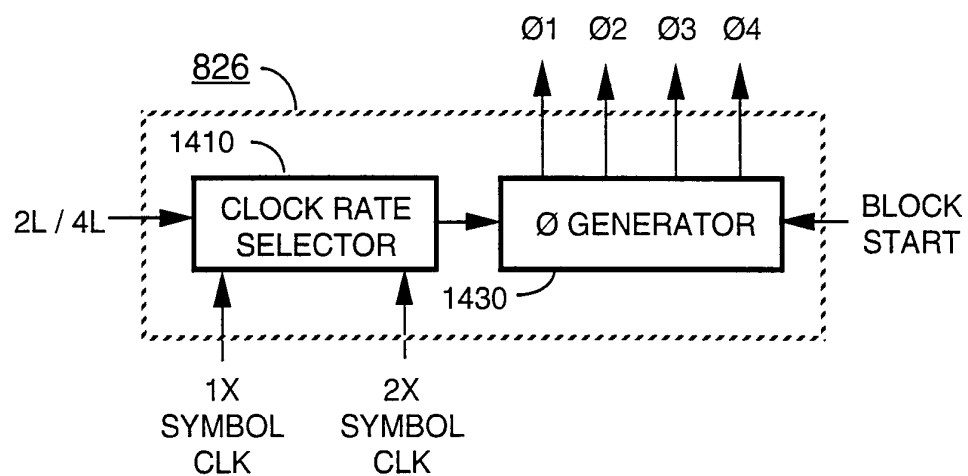


FIG. 14

7/18

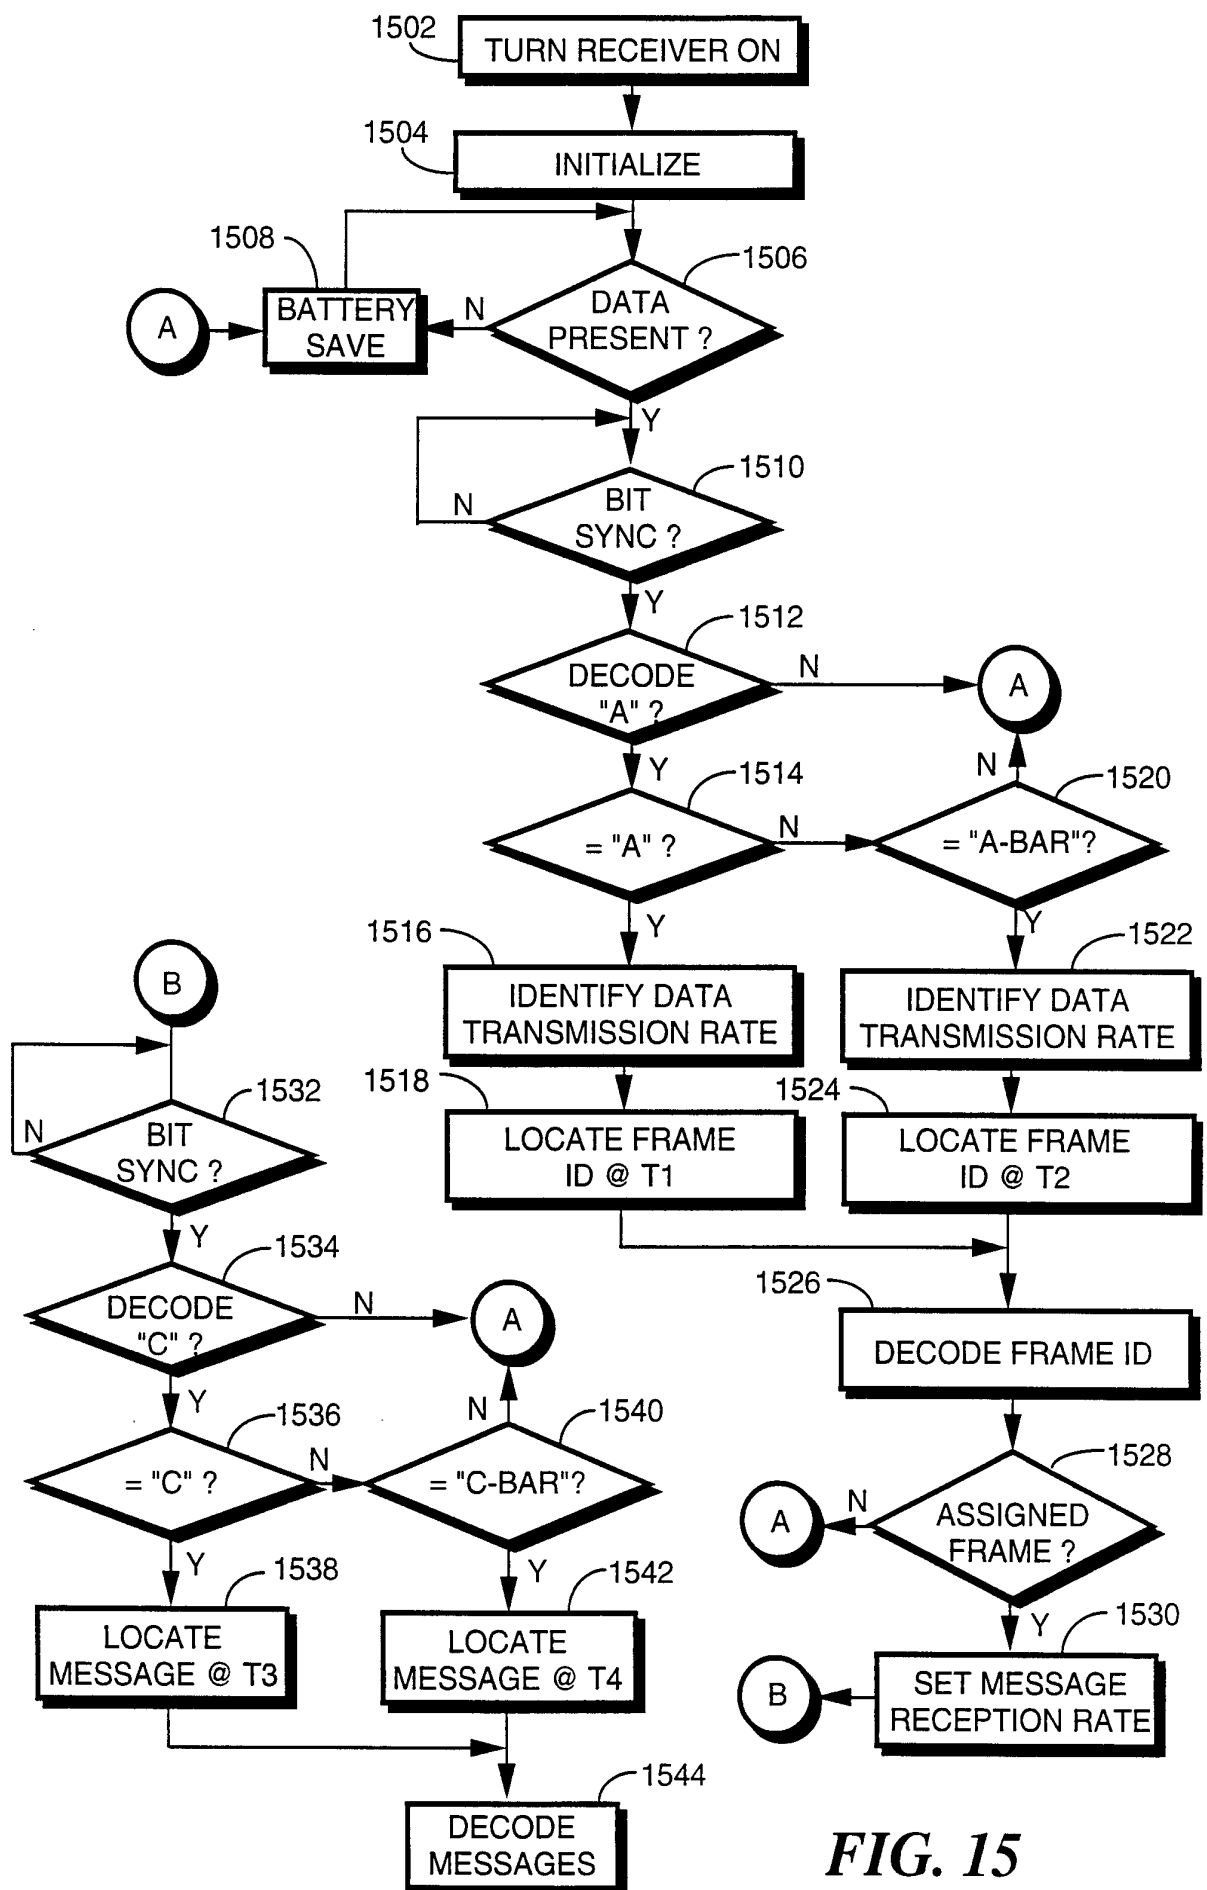


FIG. 15

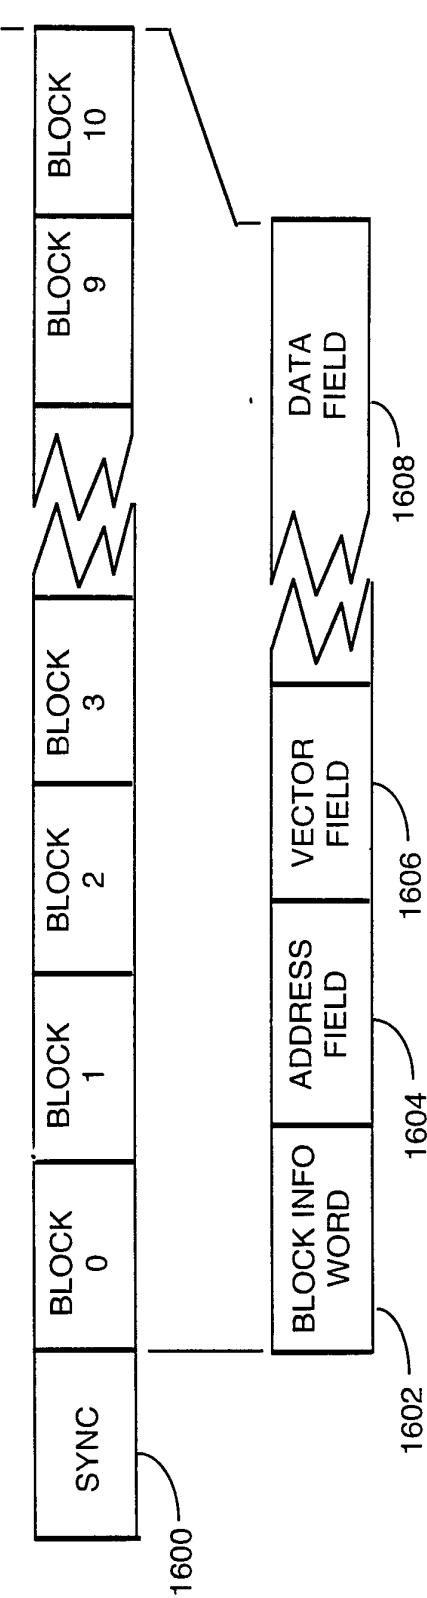


FIG. 16






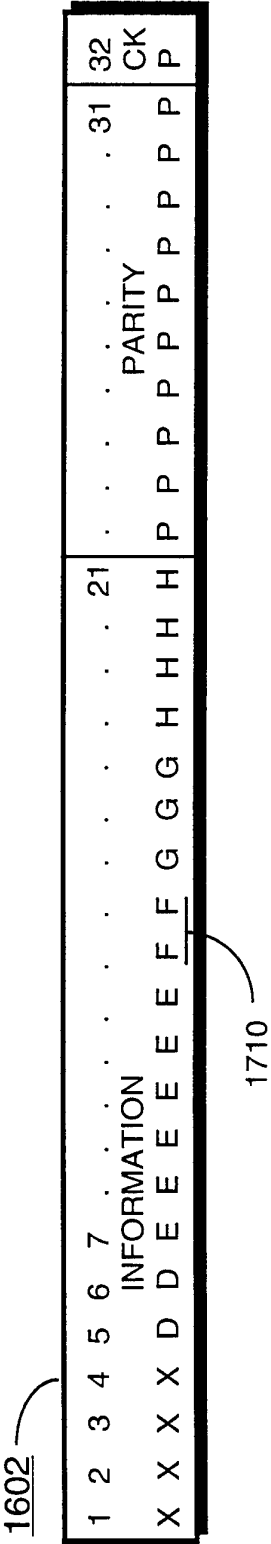


FIG. 17


10/18

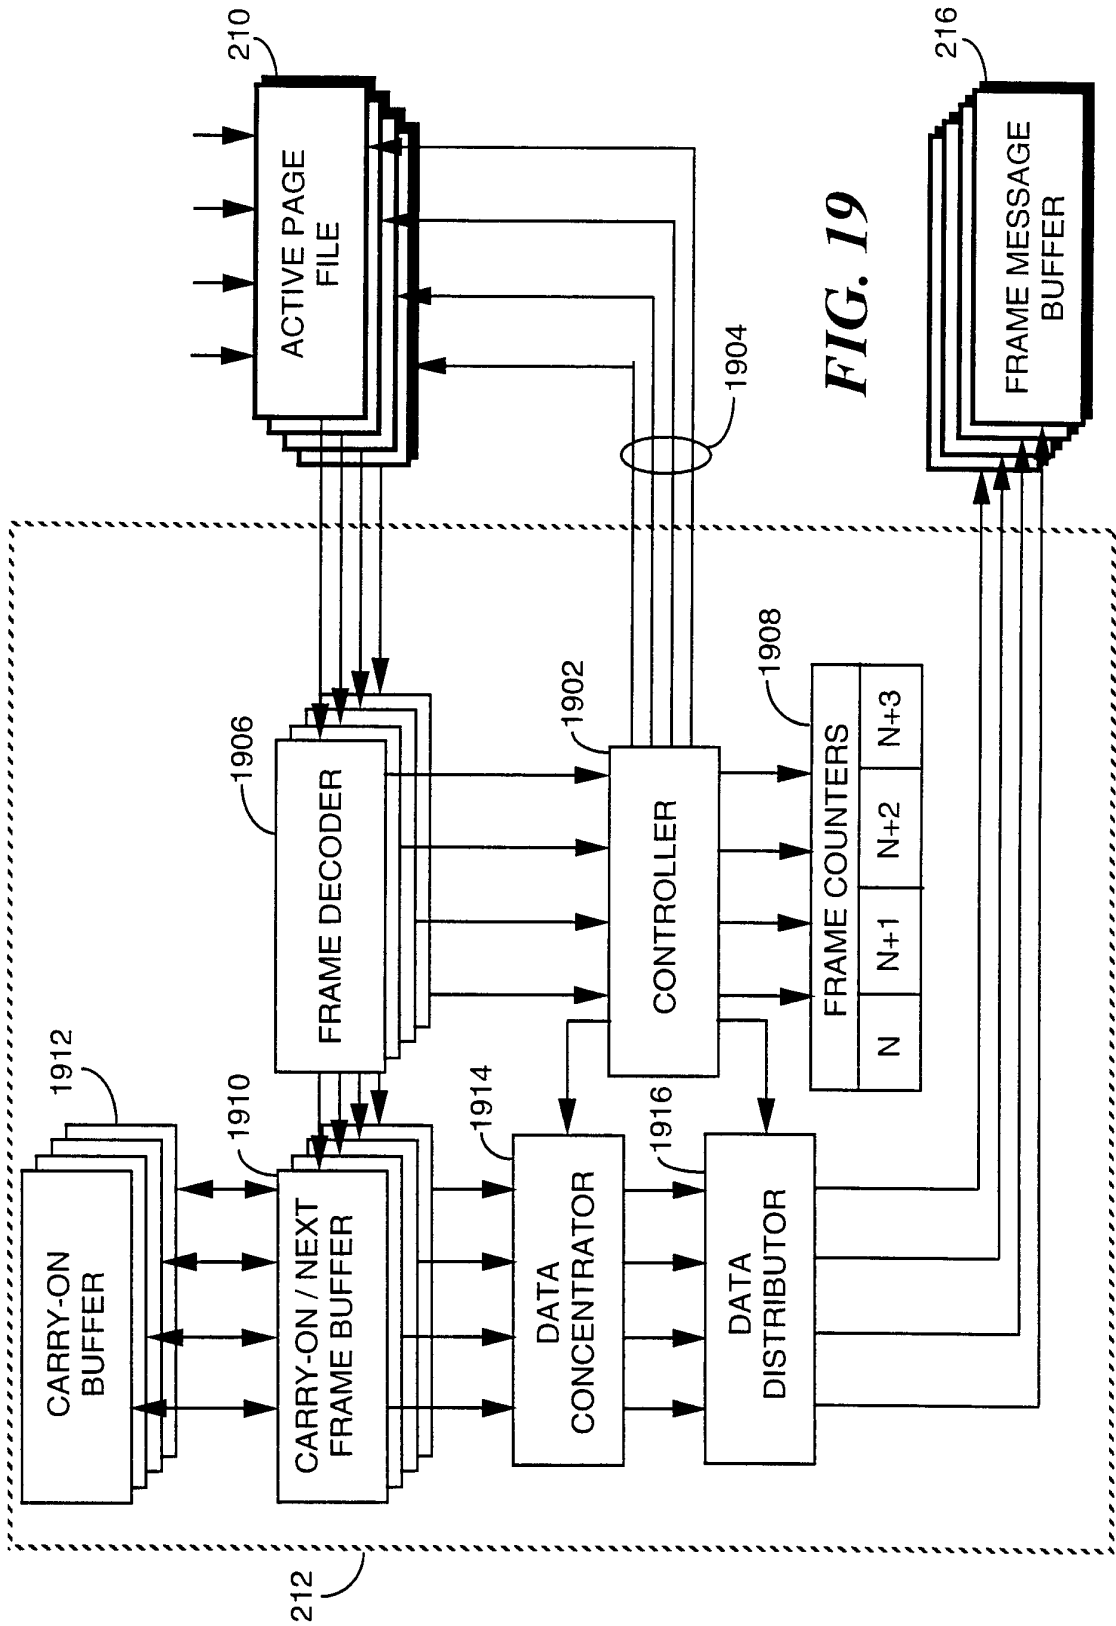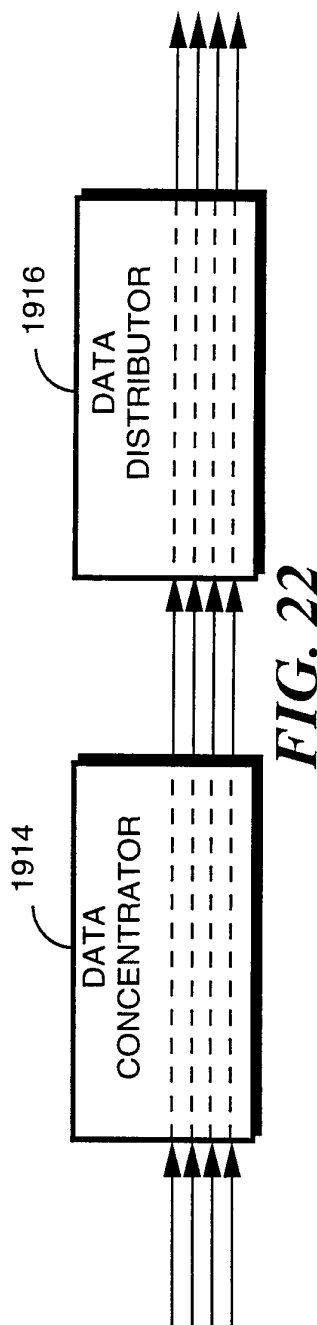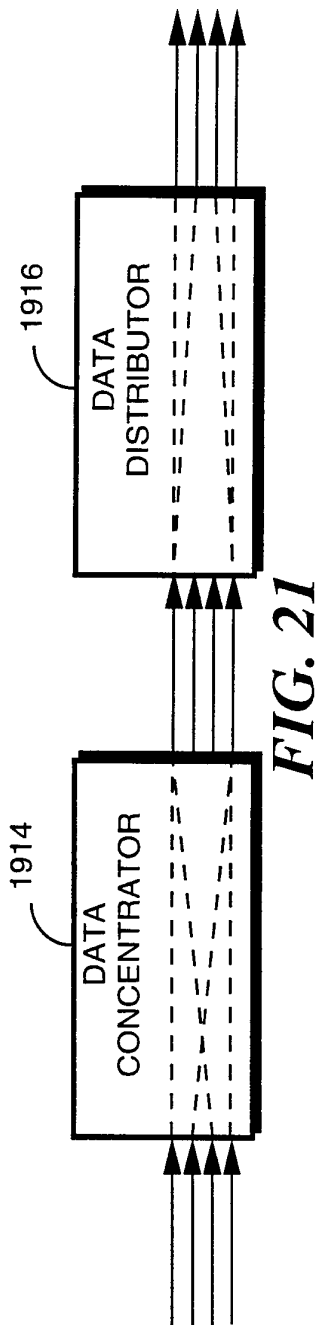

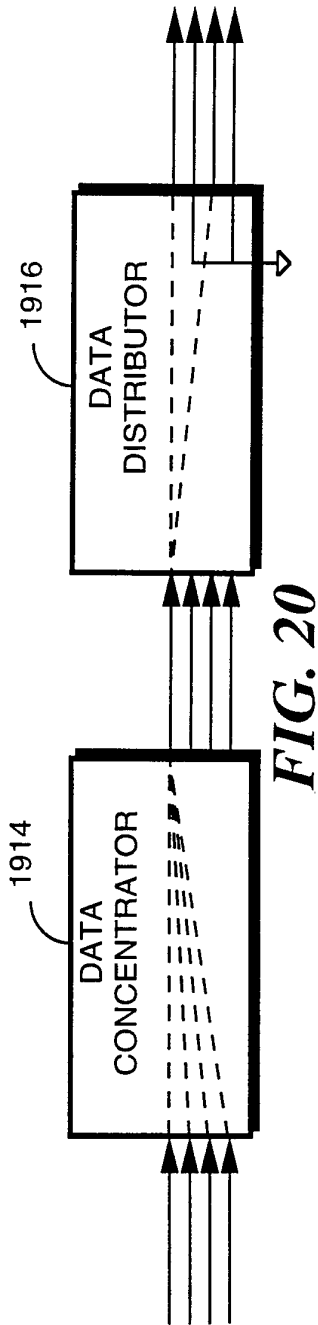

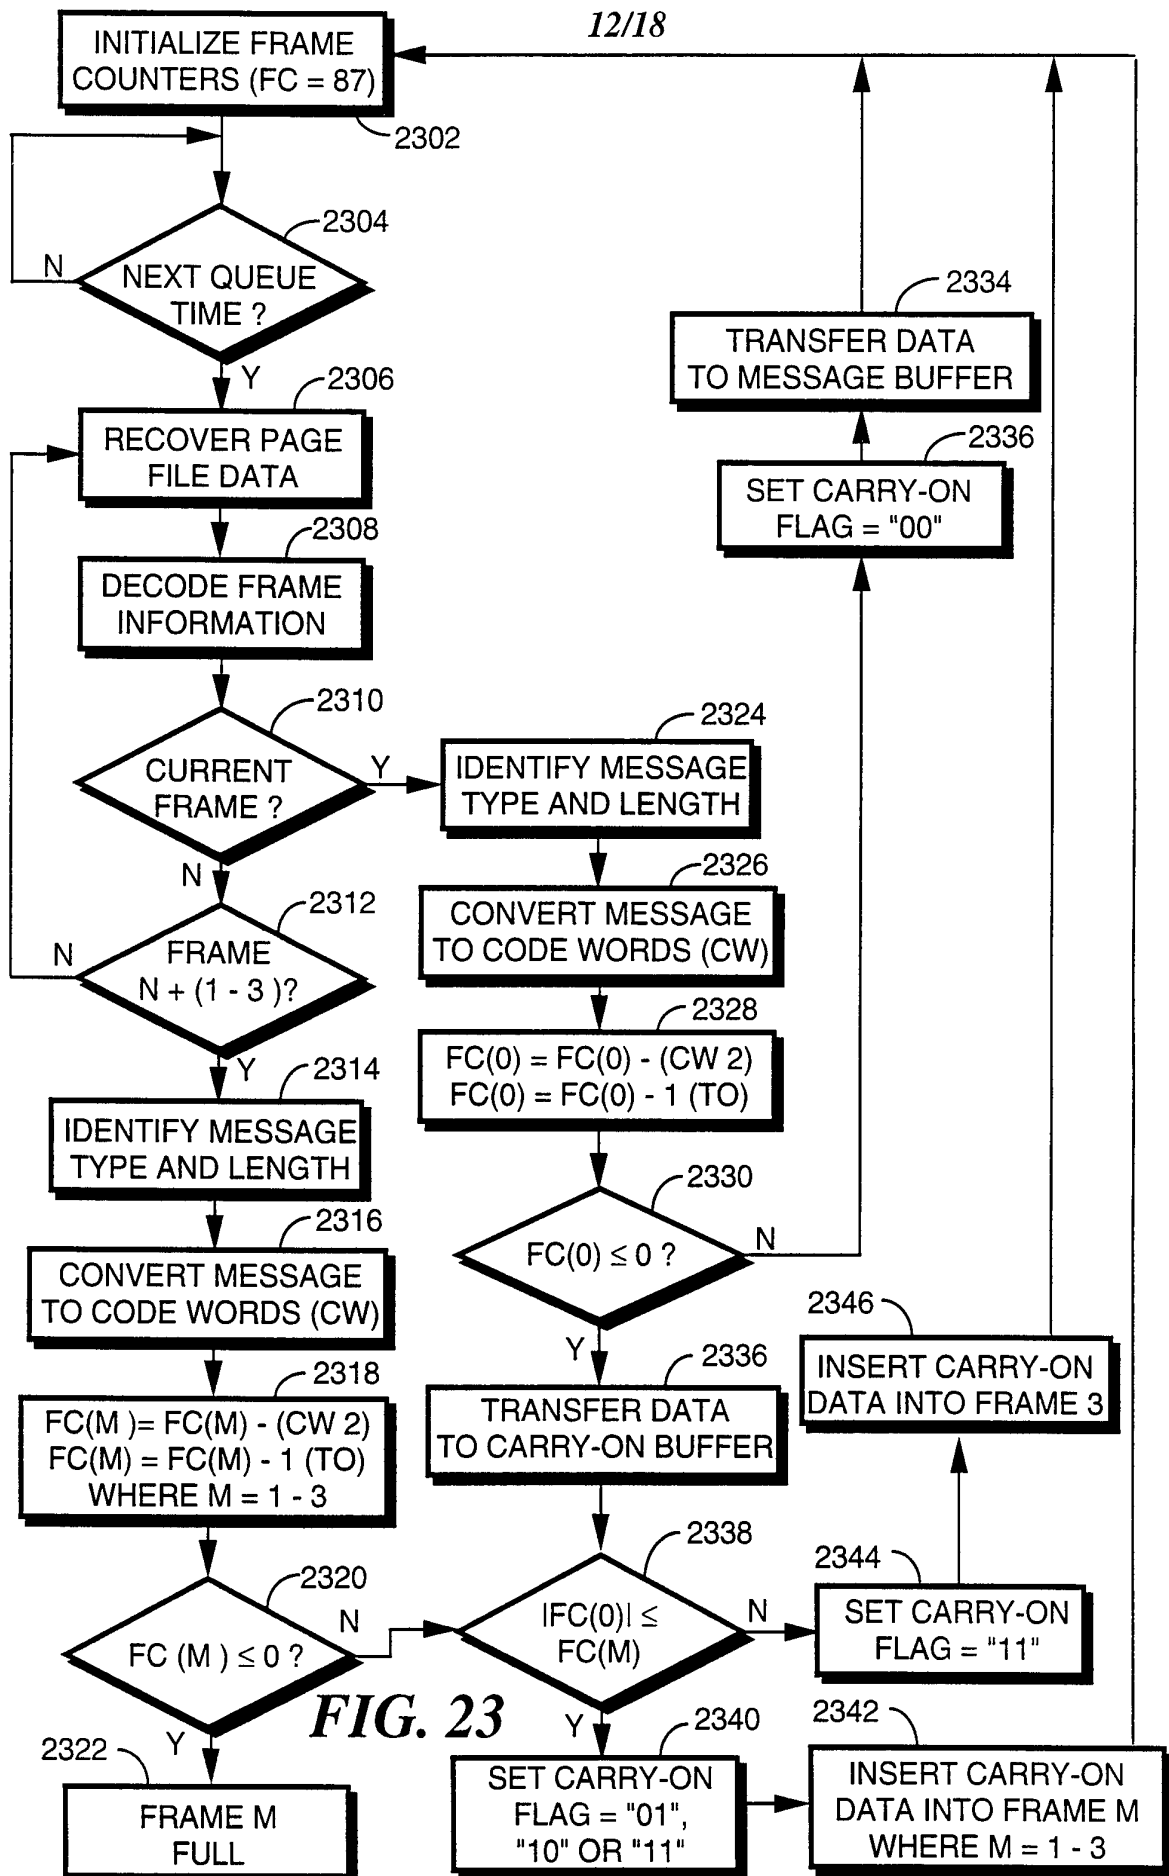

13/18

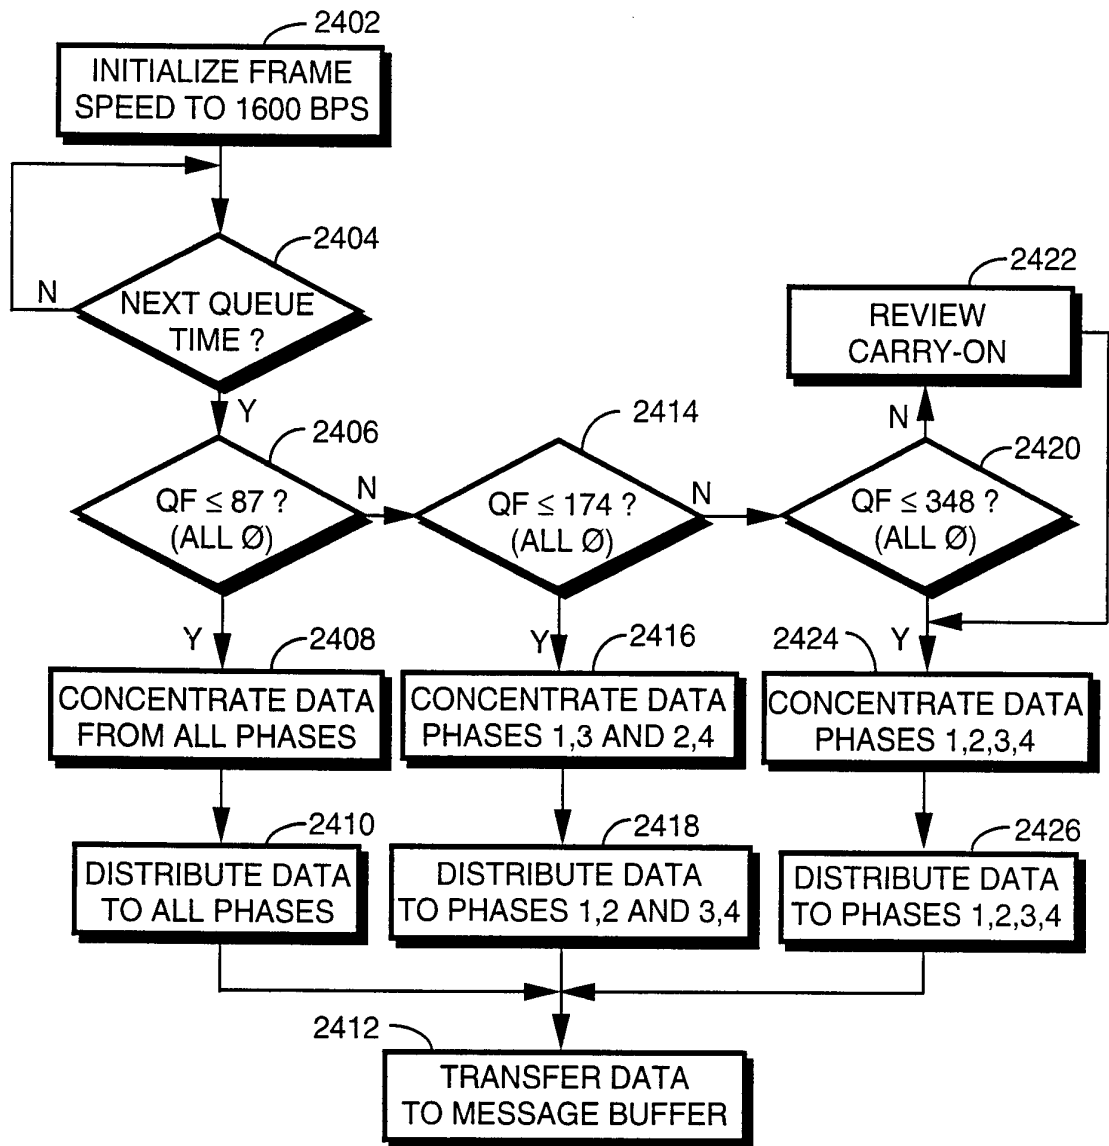**FIG. 24**

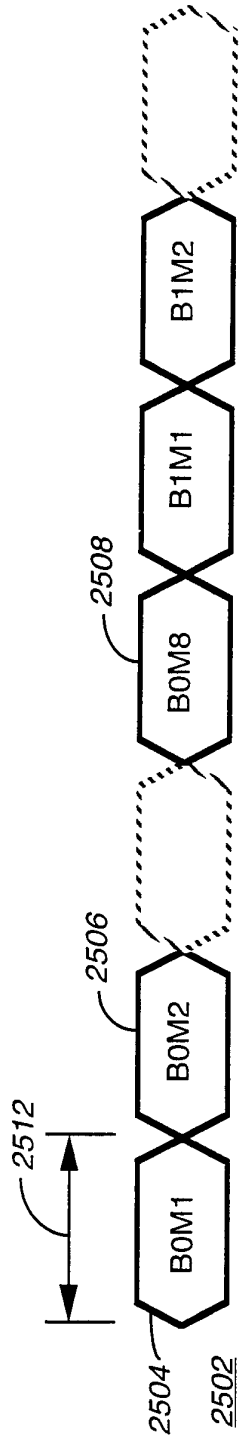


FIG. 25




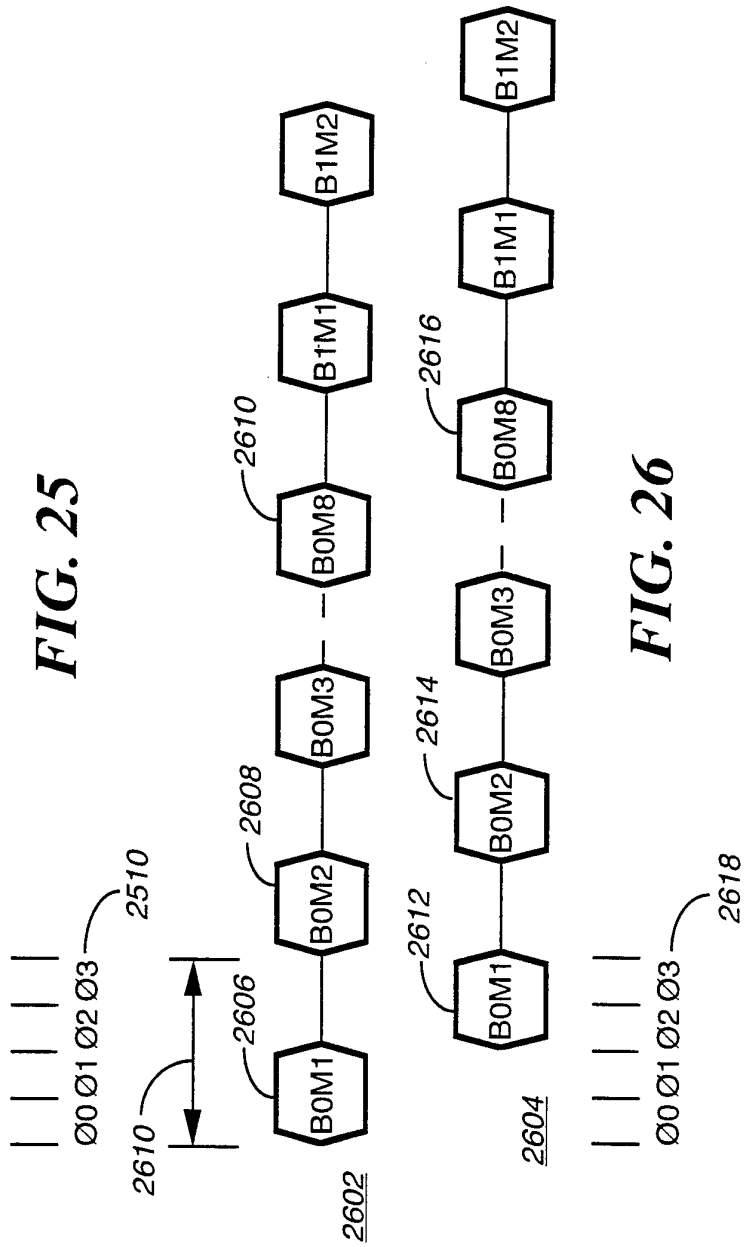


FIG. 26

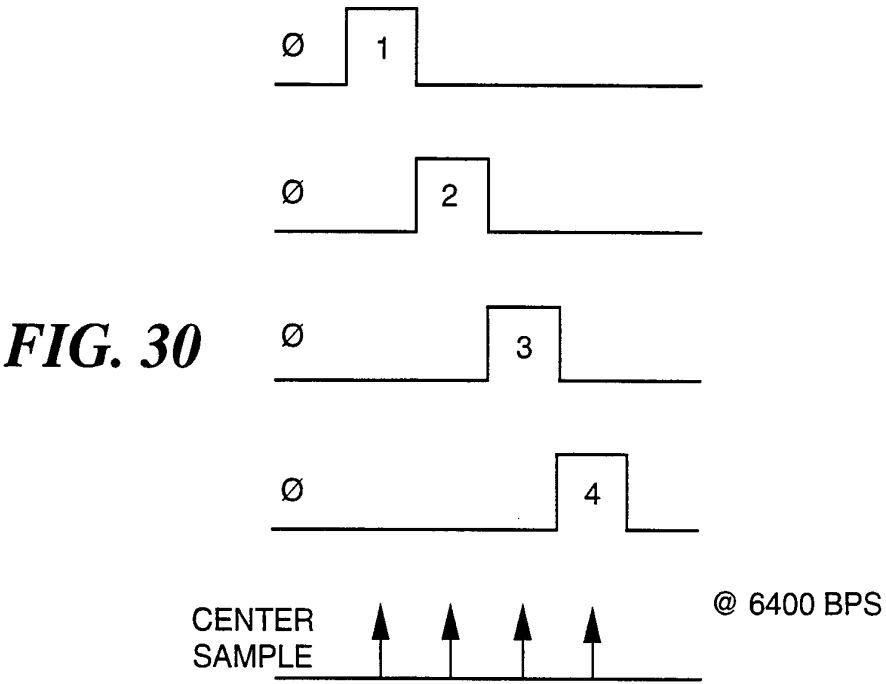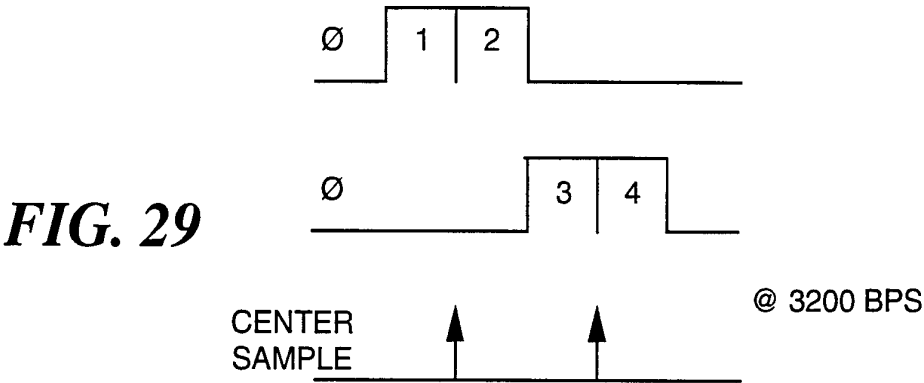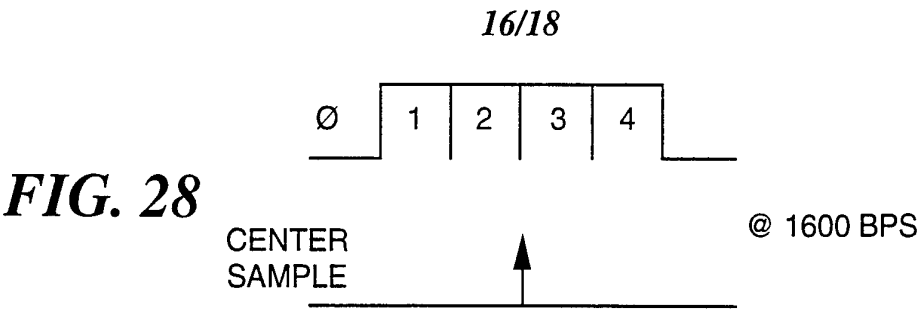

17/18

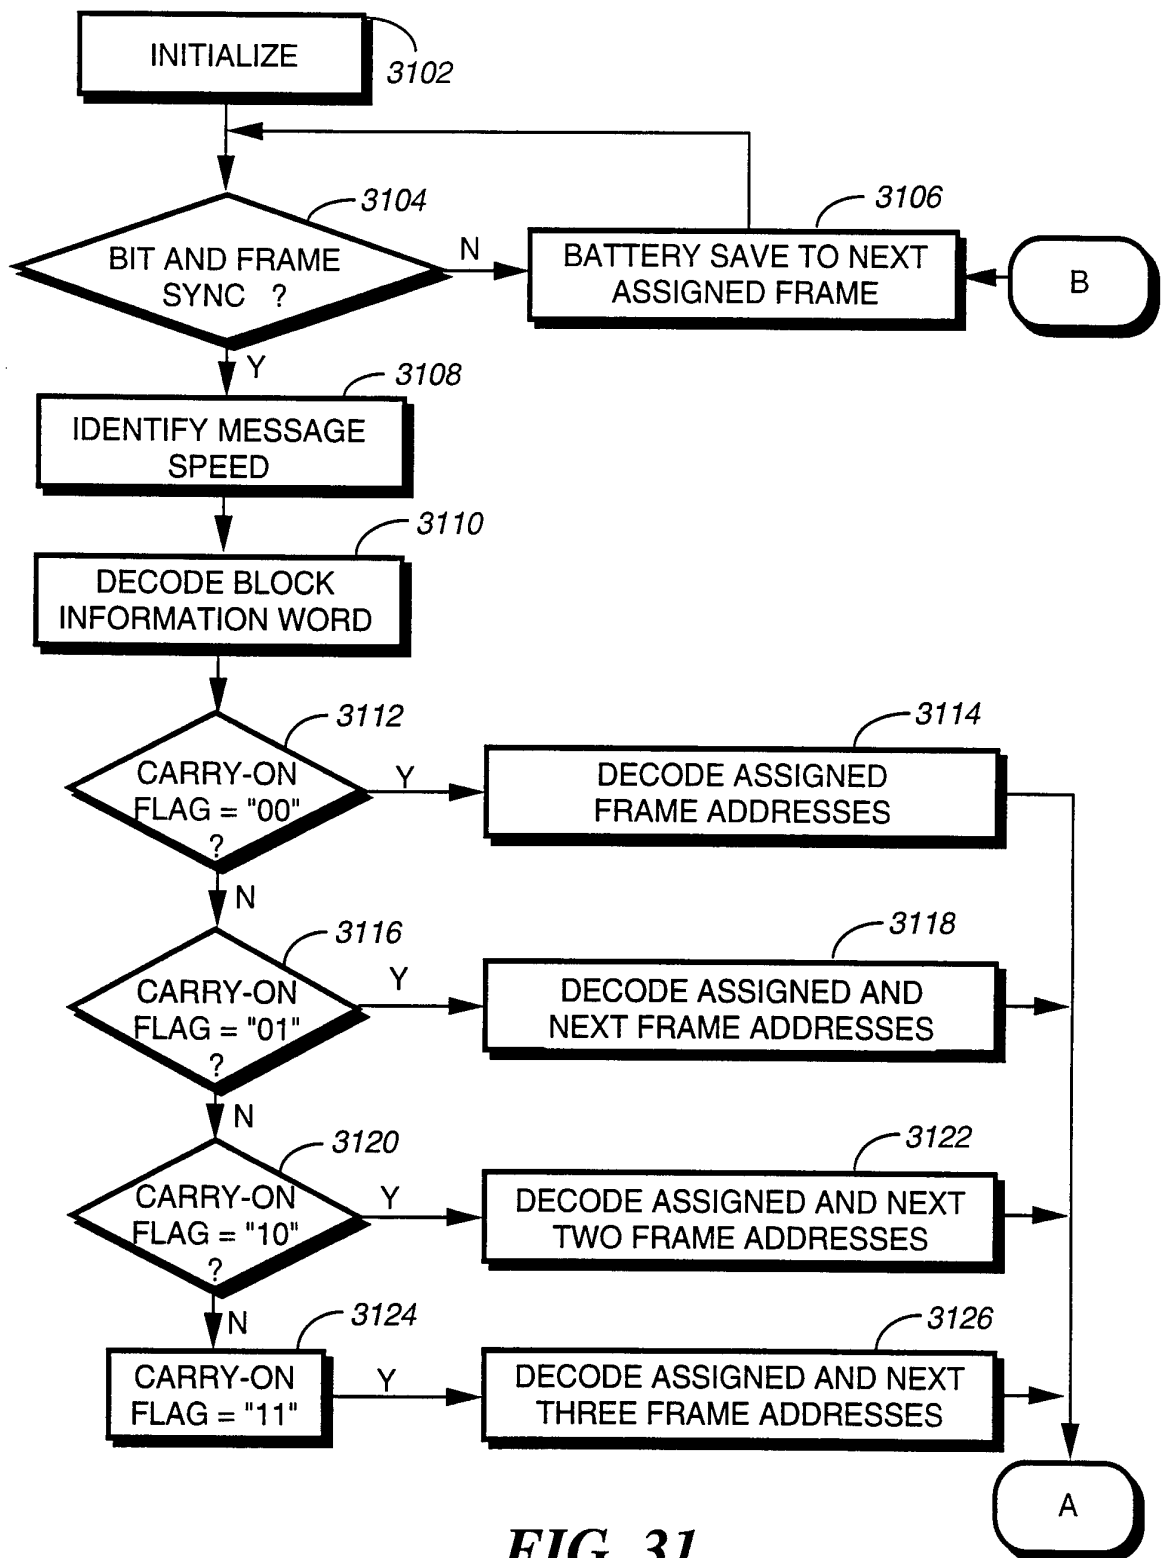
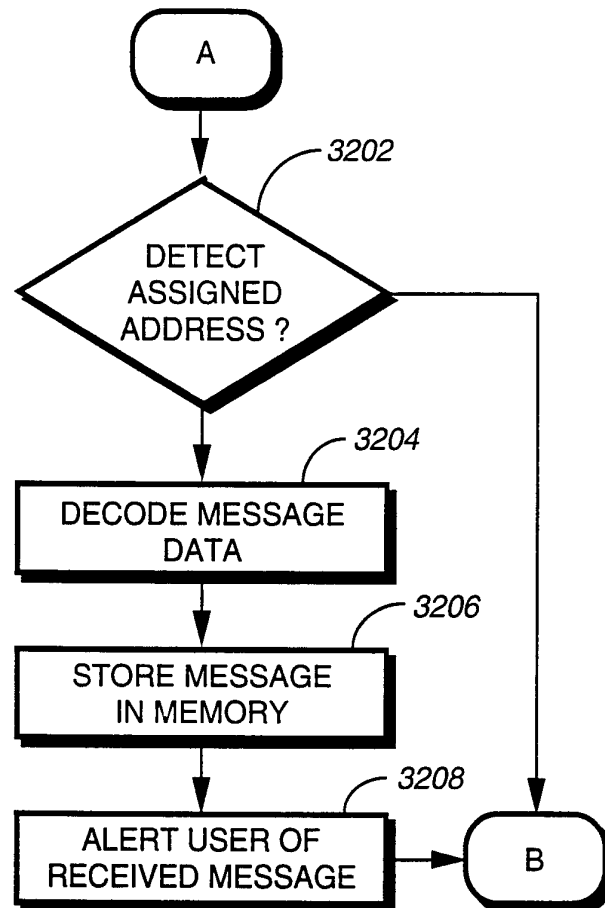


FIG. 31

18/18

**FIG.32**

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US93/04360

A. CLASSIFICATION OF SUBJECT MATTER

IPC(5) : G08B 5/22

US CL : 340/825.44; 455/38.1, 38.3; 370/94.1

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 340/825.44, 825.45, 311.1; 455/38.1, 38.2, 38.3, 38.4; 370/94.1; 379/63

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US, A, 4,383,257 (GIALLANZA ET AL.) 10 May 1983, column 2 lines 7-18, column 4 lines 11-27.	1-18
Y	US, A, 4,713,808 (GASKILL ET AL) 15 December 1987, column 23 line 10 - column 25 line 18.	1-18

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A document defining the general state of the art which is not considered to be part of particular relevance	*X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E earlier document published on or after the international filing date	*Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G document member of the same patent family
*O document referring to an oral disclosure, use, exhibition or other means	
*P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

23 JULY 1993

Date of mailing of the international search report

27 AUG 1993

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. NOT APPLICABLE

Authorized officer

MICHAEL HORABIK

Telephone No. (703) 305-4812