



(11) **EP 3 827 910 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
27.03.2024 Bulletin 2024/13

(51) International Patent Classification (IPC):
B21C 37/06 ^(2006.01) **B21C 37/08** ^(2006.01)
B21D 5/12 ^(2006.01)

(21) Application number: **19841989.7**

(52) Cooperative Patent Classification (CPC):
B21C 37/154; B21C 37/08; B21C 37/087;
B21C 37/09

(22) Date of filing: **26.04.2019**

(86) International application number:
PCT/JP2019/018006

(87) International publication number:
WO 2020/021809 (30.01.2020 Gazette 2020/05)

(54) **MOLDING DEVICE FOR MULTI-WOUND TUBE AND MOLDING METHOD FOR MULTI-WOUND TUBE**

FORMVORRICHTUNG FÜR MEHRFACH GEWICKELTES ROHR UND FORMVERFAHREN FÜR MEHRFACH GEWICKELTES ROHR

DISPOSITIF DE MOULAGE D'UN TUBE À PLUSIEURS ENROULEMENTS ET PROCÉDÉ DE MOULAGE D'UN TUBE À PLUSIEURS ENROULEMENTS

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

(30) Priority: **26.07.2018 JP 2018140612**

(43) Date of publication of application:
02.06.2021 Bulletin 2021/22

(73) Proprietor: **Sanoh Industrial Co., Ltd.**
Tokyo 150-0013 (JP)

(72) Inventors:
• **KOBAYASHI, Eiju**
Koga-shi, Ibaraki 306-0041 (JP)
• **TAKAYASU, Hiroyuki**
Koga-shi, Ibaraki 306-0041 (JP)
• **NEGISHI, Jun**
Koga-shi, Ibaraki 306-0041 (JP)
• **TSURUMI, Masatoshi**
Koga-shi, Ibaraki 306-0041 (JP)

- **IIMURA, Hiroyuki**
Koga-shi, Ibaraki 306-0041 (JP)
- **YAMASHITA, Yusuke**
Koga-shi, Ibaraki 306-0041 (JP)
- **TSUDA, Michihiro**
Koga-shi, Ibaraki 306-0041 (JP)
- **NIMURA, Yosuke**
Koga-shi, Ibaraki 306-0041 (JP)
- **TERUNUMA, Naoyuki**
Koga-shi, Ibaraki 306-0041 (JP)

(74) Representative: **dompatent von Kreisler Selting**
Werner -
Partnerschaft von Patent- und Rechtsanwälten
mbB
Deichmannhaus am Dom
Bahnhofsvorplatz 1
50667 Köln (DE)

(56) References cited:
DE-C1- 4 106 178 GB-A- 2 297 935
JP-A- H11 342 418 JP-A- 2015 139 811
US-A- 5 484 974

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

TECHNICAL FIELD

[0001] The present disclosure relates to a multiple-winding pipe forming device and a multiple-winding pipe forming method.

BACKGROUND ART

[0002] Heretofore, a forming device has been known (for example, see Japanese Patent Application Laid-Open (JP-A) No. H11-342418) that uses plural pairs of forming rollers to wind a belt-shaped metal sheet into a roll shape and form a multiple-winding pipe.

[0003] In the forming device according to JP-A No. H11-342418, of the plural pairs of forming rollers, a pair of the forming rollers is disposed at the downstream side of a feeding direction of the metal sheet. A mandrel is disposed at the inner side of the metal sheet wound in the roll shape. Superposed portions of the metal sheet wound in the roll shape are compressed between this pair of forming rollers and a working portion of the mandrel, and superposed surfaces of the superposed portions are tightly contacted with one another.

[0004] Document US 5 484 974 A discloses a multiple-winding pipe forming device and method, and forms the basis for the preamble of claim 1.

[0005] Document DE 41 06 178 C1 also discloses a multiple-winding pipe forming device and method, wherein a taper portion of a mandrel that decreases in diameter from upstream to downstream in the feeding direction is disposed, in use, at a position at which the metal sheet wound in the roll shape is sandwiched by a pair of forming rollers.

SUMMARY OF INVENTION

TECHNICAL PROBLEM

[0006] In JP-A No. H11-342418, a shape of the working portion of the mandrel is a hump shape that protrudes to diametric direction outer sides. The superposed portions of the metal sheet wound in the roll shape are compressed between a maximum outer diameter portion of the working portion and the pair of forming rollers. However, thickness of the metal sheet may be inconsistent, in which case pressure forces applied by the working portion of the mandrel and the forming rollers to the superposed portions of the metal sheet wound in the roll shape may be inconsistent. When the pressure forces are inconsistent in this manner, tight contact between the superposed surfaces of the metal sheet wound in the roll shape may decline. When tight contact between the superposed surfaces declines, in a heating process after the forming process, voids (gaps) may be formed between the superposed surfaces of the metal sheet wound in the roll shape.

[0007] In consideration of the circumstances described above, an object of the present disclosure is to provide a multiple-winding pipe forming device and a multiple-winding pipe forming method that make pressure forces on superposed portions of a metal sheet wound in a roll shape more uniform even when thickness of the metal sheet is inconsistent.

SOLUTION TO PROBLEM

[0008] A multiple-winding pipe forming device according to one aspect of the present disclosure is a multiple-winding pipe forming device for forming a wound pipe, according to claim 1.

[0009] A multiple-winding pipe forming method according to claim 3 uses the multiple-winding pipe forming device according to the one aspect and includes: curling the metal sheet and winding the metal sheet into the roll shape; and compressing superposed portions of the metal sheet wound in the roll shape between the taper portion of the working portion and the pair of forming rollers that is disposed at the downstream side in the feeding direction of the metal sheet.

ADVANTAGEOUS EFFECTS OF INVENTION

[0010] As described above, according to the present disclosure, a multiple-winding pipe forming device and a multiple-winding pipe forming method may be provided that make pressure forces on superposed portions of a metal sheet wound in a roll shape more uniform even when thickness of the metal sheet is inconsistent.

BRIEF DESCRIPTION OF DRAWINGS

[0011]

Fig. 1 is a schematic structural diagram of a multiple-winding pipe forming device according to an exemplary embodiment of the present disclosure.

Fig. 2 is a sectional diagram, cut along an axial direction of a mandrel, of a pair of forming rollers disposed furthest downstream in a feeding direction of a metal sheet in the multiple-winding pipe forming device of Fig. 1.

Fig. 3 is a schematic structural diagram depicting operation for winding the metal sheet into a roll shape in the multiple-winding pipe forming device of Fig. 1. Fig. 4 is a sectional diagram, cut along the axial direction of the mandrel, of the pair of forming rollers disposed furthest downstream in the feeding direction of the metal sheet in the multiple-winding pipe forming device of Fig. 3.

Fig. 5 is a sectional diagram showing a state in which, from the sectional diagram shown in Fig. 4, a working portion of the mandrel is shifted downstream in the feeding direction of the metal sheet due to an increase in thickness of the metal sheet.

Fig. 6 is a sectional diagram showing a state in which, from the sectional diagram shown in Fig. 4, the working portion of the mandrel is shifted upstream in the feeding direction of the metal sheet due to a decrease in thickness of the metal sheet.

Fig. 7 is a sectional diagram cut along line 7X-7X in Fig. 4.

Fig. 8 is a sectional diagram cut along a direction orthogonal to an axial direction of a multiple-winding pipe fabricated by a multiple-winding pipe forming method according to the exemplary embodiment of the present disclosure.

Fig. 9 is a magnified sectional diagram of a metal sheet to be used in the multiple-winding pipe forming method according to the exemplary embodiment of the present disclosure.

Fig. 10 is a sectional diagram (a sectional diagram corresponding to Fig. 2) showing a variant example of the mandrel shown in Fig. 2.

Fig. 11 is a sectional diagram (a sectional diagram corresponding to Fig. 4) showing the variant example of the mandrel shown in Fig. 10.

DETAILED DESCRIPTION

[0012] Below, a multiple-winding pipe forming device and multiple-winding pipe forming method according to an exemplary embodiment relating to the present disclosure are described with reference to the drawings. An arrow M that is shown where appropriate in the drawings is a feeding direction of a metal sheet 52.

[0013] First, a multiple-winding pipe 50 that is fabricated using a multiple-winding pipe forming device (below referred to where appropriate as "the forming device") 20 is described. Then, the forming device 20 is described, after which a forming method using the forming device 20 is described.

[0014] Fig. 8 shows the multiple-winding pipe 50 according to the present exemplary embodiment. The multiple-winding pipe 50 is formed by the metal sheet 52 being wound in a roll shape and superposed surfaces of superposed portions of the metal sheet 52 being joined together. The multiple-winding pipe 50 according to the present exemplary embodiment is a two-winding pipe. The multiple-winding pipe 50 is used as, for example, a piping component of a vehicle (for example, brake piping).

[0015] As shown in Fig. 9, the metal sheet 52 that forms the multiple-winding pipe 50 is formed by coating a core member 54 with a coating member 56. The core member 54 is formed of a metal material, and the coating member 56 is formed of a metal material with a lower melting point than the core member 54. The metal sheet 52 is machined into a belt shape; a length direction of the metal sheet 52 matches an axial direction (a direction along an axis) of the multiple-winding pipe 50 after the multiple-winding pipe 50 is formed. A clad steel sheet and a coated steel sheet can be mentioned as examples of the metal

sheet 52. Iron, aluminium or the like may be employed as the metal material forming the core member 54. Copper, an aluminium alloy or the like that is used as a common brazing material may be employed as the metal material forming the coating member 56. In the present exemplary embodiment, two faces of the core member 54 are coated with the coating member 56, but structures are possible in which only one face of the core member 54 is coated with the coating member 56. In the present exemplary embodiment, after the metal sheet 52 is wound into the roll shape, superposed surfaces of superposed portions of the metal sheet 52 are joined by brazing to form the multiple-winding pipe 50.

[0016] Now, the forming device 20 according to the present exemplary embodiment is described.

= Forming Device =

[0017] As shown in Fig. 1 to Fig. 4, the forming device 20 is an apparatus that curls the metal sheet 52 and winds the metal sheet 52 into a roll shape, forming a roll in a pipe shape with a predetermined inner diameter (roll forming).

[0018] The forming device 20 is provided with plural pairs of forming rollers 22 and a mandrel 24 that is fabricated of metal. The pairs of forming rollers 22 are arranged along the feeding direction of the metal sheet 52 (below shortened where appropriate to "the feeding direction"). The mandrel 24 is arranged along the feeding direction.

- Roll forming -

[0019] As shown in Fig. 1 and Fig. 3, the plural pairs of the forming rollers 22 are disposed as plural pairs spaced apart along the feeding direction, with each pair of the forming rollers 22 opposing one another so as to sandwich the metal sheet 52, which is an object of forming. The metal sheet 52 is curled and wound into the roll shape by these forming rollers 22.

[0020] Plural pairs of assisting rollers 23 that assist in the curling of the metal sheet 52 are disposed between adjacent pairs of the forming rollers 22 along the feeding direction.

[0021] Of the plural pairs of forming rollers 22, a pair of forming rollers 22A is disposed furthest upstream in the feeding direction. The metal sheet 52 is wound on a drum 58. The forming rollers 22A function as feeding rollers that sandwich the metal sheet 52 from two sheet face sides thereof and feed the metal sheet 52 wound on the drum 58 out in the feeding direction.

[0022] Of the plural pairs of forming rollers 22, a pair of forming rollers 22B is disposed furthest downstream in the feeding direction. The forming rollers 22B function as pressure rollers that compress superposed portions of the metal sheet 52 wound in the roll shape between the forming rollers 22B and a taper portion 28A of the mandrel 24, which is described below, and put super-

posed surfaces 52A and 52B of the metal sheet 52 into contact without gaps. A circumferential trench 25 is formed in each of the pair of forming rollers 22B. The metal sheet 52 wound in the roll shape is inserted into each circumferential trench 25. The circumferential trench 25 is formed continuously in the circumferential direction over the whole circumference of the forming roller 22B.

[0023] Of the plural pairs of forming rollers 22, plural pairs of forming rollers 22C are disposed between the pair of forming rollers 22A and the pair of forming rollers 22B. The forming rollers 22C function as curl-forming rollers that, from an upstream side toward a downstream side in the feeding direction, progressively curl the metal sheet 52 to wind the metal sheet 52 into the roll shape.

- Mandrel -

[0024] As shown in Fig. 1 and Fig. 3, the mandrel 24 includes a shaft 26 and a working portion 28.

[0025] The shaft 26 extends along the feeding direction. More specifically, the shaft 26 extends from a space between the pair of forming rollers 22A and one pair of the forming rollers 22C to just before a nipping portion N of the pair of forming rollers 22B. According to this structure, a region of the shaft 26 (a region at the downstream side thereof in the feeding direction) is disposed inside the metal sheet 52 wound in the roll shape. The shaft 26 is formed of a metal material (for example, iron). The meaning of the term "nipping portion N" as used herein is intended to include a position at which the metal sheet 52 wound in the roll shape is sandwiched by the pair of forming rollers 22B disposed furthest downstream in the feeding direction.

[0026] One end 26A of the shaft 26 is disposed at the upstream side thereof in the feeding direction. A disc-shaped spool portion 27 is formed at the one end 26A side of the shaft 26 and protrudes to diametric direction outer sides from the shaft 26. The spool portion 27 is employed such that the shaft 26 is retained by a retention portion 32 of a moving apparatus 30, which is described below.

[0027] Another end 26B of the shaft 26 is disposed at the downstream side thereof in the feeding direction, which is an opposite side of the shaft 26 from a side thereof at which the one end 26A is disposed. The working portion 28 is provided at the another end 26B side of the shaft 26 (in the present exemplary embodiment, at the another end 26B). The working portion 28 includes the taper portion 28A, which increases in diameter from upstream to downstream in the feeding direction. The working portion 28 is formed of a metal material (for example, iron) and is joined to the another end 26B of the shaft 26 by welding.

[0028] A position of the mandrel 24 along the feeding direction is controlled by the moving apparatus 30, which is described below, such that the taper portion 28A of the working portion 28 is disposed at the nipping portion N

of the pair of forming rollers 22B.

[0029] As shown in Fig. 1 and Fig. 3, the forming device 20 is further provided with the moving apparatus 30 that moves the mandrel 24 along the feeding direction.

[0030] The moving apparatus 30 includes the retention portion 32, a drive source 34, a sensor 36 and a control section 38.

[0031] The retention portion 32 is coupled to a housing 31 that retains the one end 26A side of the shaft 26 and is structured to be movable by sliding along the feeding direction. The retention portion 32 supports the one end 26A side of the shaft 26 and moves together with the housing 31 along the feeding direction. An engaging portion, which is not shown in the drawings, is provided at the retention portion 32. The engaging portion engages with the spool portion 27 of the shaft 26. Thus, the mandrel 24 moves with movement of the retention portion 32.

[0032] The drive source 34 is coupled to the housing 31 via a ball-and-screw mechanism (not shown in the drawings) for sliding the housing 31. The drive source 34 supplies driving force to move both the housing 31 and the retention portion 32 along the feeding direction. The drive source 34 that is employed may be, for example, an electric motor (a servo motor). The drive source 34 is controlled by the control section 38.

[0033] The sensor 36 is disposed in the housing. The sensor 36 detects tension acting on the shaft 26, via the retention portion 32. Information detected by the sensor 36 is sent to the control section 38.

[0034] The control section 38 controls output power (driving force) of the drive source 34, in accordance with information relating to the tension detected by the sensor 36, so as to adjust the position of the retention portion 32 in the feeding direction. Thus, the control section 38 may adjust a position of the taper portion 28A of the working portion 28 in the feeding direction.

= Forming Method =

[0035] Now, the multiple-winding pipe forming method using the forming device 20 according to the present exemplary embodiment is described.

[0036] Before formation of a multiple-winding pipe begins, a size (wall thickness, internal diameter and so forth) of the multiple-winding pipe to be formed is entered into a memory section, which is not shown in the drawings, of the control section 38 through an operation section, which is not shown in the drawings. On the basis of this size information, the control section 38 controls the drive source 34 and disposes the taper portion 28A of the working portion 28 at an optimum position of the nipping portion N of the pair of forming rollers 22B (an optimum position in the feeding direction). This optimum position is specified in advance on the basis of the size information by calculation or the like. More specifically, the control section 38 controls the drive source 34 such that a distance L2 between each forming roller 22B and the taper portion 28A (see Fig. 2) is the same as a thickness T of

a peripheral wall portion of the multiple-winding pipe 50, which is entered in the size information. Thus, the taper portion 28A is disposed at the optimum position of the nipping portion N of the pair of forming rollers 22B.

[0037] Distances between the pair of forming rollers 22A, the pair of forming rollers 22B, the plural pairs of forming rollers 22C and the plural pairs of assisting rollers 23 are also altered on the basis of the entered information. For example, a distance L1 along a center line CL between floor surfaces of the circumferential trenches 25 of the pair of forming rollers 22B is altered.

[0038] Then, the metal sheet 52 is pulled out from the drum 58, and a leading end portion of the metal sheet 52 is disposed between and nipped by the pair of forming rollers 22A. The pair of forming rollers 22A turn in synchrony and feed out the nipped metal sheet 52 from upstream to downstream in the feeding direction. The metal sheet 52 fed out from the pair of forming rollers 22A is curled by the plural pairs of forming rollers 22C and the plural pairs of assisting rollers 23 and is wound into the roll shape. The metal sheet 52 is wound into the roll shape so as to encircle the shaft 26 of the mandrel 24. When the metal sheet 52 is passing through the plural pairs of forming rollers 22C, the metal sheet 52 is wound into the roll shape in a state in which gaps are formed between superposed portions of the metal sheet 52.

[0039] Then, at the nipping portion N of the pair of forming rollers 22B, the superposed portions of the metal sheet 52 wound in the roll shape are compressed by the pair of forming rollers 22B and the taper portion 28A of the working portion 28. More specifically, in the forming device 20 as shown in Fig. 4, a roll inner side portion of the metal sheet 52 wound in the roll shape increases in diameter while riding over the taper portion 28A of the working portion 28. As shown in Fig. 7, in a state in which the superposed surfaces 52A and 52B of the superposed portions of the metal sheet 52 wound in the roll shape touch without gaps (that is, a tightly contacted state), the superposed portions of the metal sheet 52 wound in the roll shape are compressed from inside and outside the roll by the pair of forming rollers 22B and the taper portion 28A of the working portion 28. After the superposed portions are compressed but before the superposed portions are joined, as shown in Fig. 4 and Fig. 5, the diameter of the metal sheet 52 wound in the roll shape increases after the compression while passing beyond a maximum diameter portion of the taper portion 28A.

[0040] When there is inconsistency in the thickness of the metal sheet 52 and, as illustrated in Fig. 5, the thickness T of the metal sheet 52 is greater than a standard sheet thickness (in the present exemplary embodiment, half of the entered wall thickness), frictional forces that are produced when the roll inner side portion of the metal sheet 52 wound in the roll shape rides over the taper portion 28A of the working portion 28 increase. Thus, a tension F acting on the shaft 26 of which the one end 26A side is retained increases. When the tension F acting on the shaft 26 is greater, axial direction elongation (re-

silient elongation) of the shaft 26 fabricated of metal is greater, and the position of the taper portion 28A shifts downstream in the feeding direction relative to when the thickness of the metal sheet 52 is the standard sheet thickness (that is, relative to when the taper portion 28A is disposed at the optimum position of the nipping portion N mentioned above). When the position of the taper portion 28A shifts downstream in this manner, the distance L2 between each forming roller 22B and the taper portion 28A increases. As a result, an increase in pressure forces acting on the superposed portions of the metal sheet 52 wound in the roll shape between the pair of forming rollers 22B and the taper portion 28A is suppressed.

[0041] Alternatively, as illustrated in Fig. 6, when the thickness T of the metal sheet 52 is smaller than the standard sheet thickness, the frictional forces that are produced when the roll inner side portion of the metal sheet 52 wound in the roll shape rides over the taper portion 28A of the working portion 28 decrease. Thus, the tension F acting on the shaft 26 of which the one end 26A side is retained decreases. When the tension F acting on the shaft 26 is smaller, axial direction elongation (resilient elongation) of the shaft 26 fabricated of metal is smaller than when the thickness of the metal sheet 52 is the standard sheet thickness, and the position of the taper portion 28A shifts upstream in the feeding direction. When the position of the taper portion 28A shifts upstream in this manner, the distance L2 between each forming roller 22B and the taper portion 28A decreases. As a result, a decrease in the pressure forces acting on the superposed portions of the metal sheet 52 wound in the roll shape between the pair of forming rollers 22B and the taper portion 28A is suppressed.

[0042] In the forming device 20 as described above, even when the thickness T of the metal sheet 52 is inconsistent, pressure forces on the superposed portions of the metal sheet 52 wound in the roll shape may be made more uniform.

[0043] The meaning of the term "inconsistency in the thickness of the metal sheet" as used herein is intended to include inconsistencies in thickness caused by fabrication errors, inconsistencies in thickness when a metal sheet that is used is specified to change in thickness along the length direction thereof, and so forth.

[0044] In the present exemplary embodiment, the moving apparatus 30 is employed. The tension F acting on the shaft 26 is detected by the sensor 36, the drive source 34 is controlled by the control section 38 in accordance with the tension F detected by the sensor 36, and the position in the feeding direction of the retention portion 32 that supports the shaft 26 is adjusted. More specifically, when the taper portion 28A may not be disposed at the optimum position of the nipping portion N of the pair of forming rollers 22B by resilient elongation of the shaft 26 alone, the taper portion 28A is disposed at the optimum position of the nipping portion N of the forming rollers 22B by the moving apparatus 30, taking account of the resilient elongation of the shaft 26. Therefore, in

addition to the effects described above caused by resilient elongation of the shaft 26 fabricated of metal, pressure forces on the superposed portions of the metal sheet wound in the roll shape may be made even more uniform.

[0045] The metal sheet 52 wound in the roll shape passes through the pair of forming rollers 22B and is heated in a heating step of a subsequent process. As a result of this heating, the superposed portions of the metal sheet 52 wound in the roll shape are joined by brazing. Thus, the multiple-winding pipe 50 is fabricated. Because the multiple-winding pipe 50 that is fabricated in this manner has been heated in a state in which the superposed surfaces 52A and 52B of the superposed portions of the metal sheet 52 wound in the roll shape are touching without gaps (that is, the tightly contacted state), the formation of voids (gaps) between the superposed surfaces 52A and 52B is suppressed.

[0046] Now, operational effects of the multiple-winding pipe 20 according to the present exemplary embodiment are described.

[0047] In the forming device 20 as described above, pressure forces on the superposed portions of the metal sheet 52 wound in the roll shape may be made more uniform even when the thickness of the metal sheet 52 is inconsistent.

[0048] In the forming device 20, because the taper portion 28A is disposed at the optimum position of the nipping portion N of the pair of forming rollers 22B, one type of the mandrel 24 may be applied to metal sheets of plural sizes (sheet thicknesses). Therefore, a number of types of the mandrel 24 may be reduced. Hence, because the number of types of the mandrel 24 is reduced, the labor of setting a different mandrel in the forming device for each size of metal sheet may be reduced.

[0049] In the forming device 20, because the moving apparatus 30 is also provided, positions in the feeding direction of the pairs of forming rollers 22B and the taper portion 28A of the working portion 28 may be adjusted automatically prior to the forming of the metal sheet 52. Thus, the taper portion 28A may be disposed at the optimum position of the nipping portion N of the pair of forming rollers 22B.

[0050] In the forming device 20 as described above, the taper portion 28A is disposed by the moving apparatus 30 at the optimum position of the nipping portion N of the pair of forming rollers 22B taking account of resilient elongation of the shaft 26. Therefore, in addition to the effects described above caused by resilient elongation of the shaft 26 fabricated of metal, pressure forces on the superposed portions of the metal sheet 52 wound in the roll shape may be made even more uniform.

[0051] In the forming device 20 according to the exemplary embodiment described above, the working portion 28 of the mandrel 24 includes the taper portion 28A, but the present disclosure is not limited by this structure. For example, as with a mandrel 60 shown in Fig. 10 and Fig. 11, a working portion 62 may include a circular rod portion 62B that protrudes from an end of a taper portion 62A

and is equal in diameter to the end of the taper portion 62A. The circular rod portion 62B protrudes to an opposite side of the working portion 62 from a side thereof at which the shaft 26 is disposed. In this structure, compared to, for example, a structure in which the circular rod portion 62B is not provided and a terminal end of a taper portion has sharp angles, pressure forces acting on the end of the taper portion 62A are dispersed and abrasion of the mandrel 24 associated with the working of the metal sheet 52 is suppressed.

[0052] In the exemplary embodiment described above, the forming device 20 includes the moving apparatus 30, but the present disclosure is not limited by this structure. The forming device 20 need not include the moving apparatus 30, in which case the taper portion 28A is disposed at the optimum position of the nipping portion N only by the effects of resilient elongation of the shaft 26.

[0053] In the exemplary embodiment described above, the taper portion 28A of the working portion 28 is disposed at the nipping portion N of the pair of forming rollers 22B that are disposed furthest downstream in the feeding direction, but the present disclosure is not limited by this structure. For example, structures are possible in which the taper portion 28A of the working portion 28 is disposed at a nipping portion N of a pair of the forming rollers 22C that is disposed at the downstream side in the feeding direction and is the first pair upstream from the pair of forming rollers 22B (i.e., the pair of forming rollers 22C that is second furthest downstream). In this structure, the metal sheet 52 wound in the roll shape may be compressed at the pair of forming rollers 22C that is second furthest downstream, and fine adjustments of pipe diameter may be implemented at the pair of forming rollers 22B that is furthest downstream.

[0054] In the foregoing, an exemplary embodiment of the present disclosure has been illustrated and the exemplary embodiment has been described. However, this embodiment is an example; numerous modifications may be embodied within a scope not departing from the scope of the appended claims.

Claims

1. A multiple-winding pipe forming device (20) for forming a wound pipe, the multiple-winding pipe forming device comprising:

a plurality of pairs of forming rollers (22) arranged along a feeding direction of a metal sheet (52) that is an object of forming, each pair of forming rollers (22) opposing one another so as to sandwich, in use, the metal sheet (52), and the plurality of pairs of forming rollers (22) being configured to curl the metal sheet (52) and to wind the metal sheet (22) into a roll shape; and a mandrel (24) fabricated of metal, the mandrel (24) including:

a shaft (26) that extends in the feeding direction and is disposed, in use, inside the metal sheet (52) wound in the roll shape, one end (26A) side of the shaft (26) being retained, which one end side is disposed upstream in the feeding direction, and a working portion (28, 62) provided at an opposite end (26B) side of the shaft (26) from a side thereof at which the one end (26A) side is disposed, the working portion (28, 62) including a taper portion (28A, 62A) that increases in diameter from upstream to downstream in the feeding direction, wherein the taper portion (28A, 62A) of the working portion (28, 62) is disposed, in use, at a position at which the metal sheet (52) wound in the roll shape is sandwiched by, of the plurality of pairs of forming rollers (22), a pair of the forming rollers (22B) that is disposed at a downstream side in the feeding direction,

characterized in that

the multiple-winding pipe forming device further comprises a moving apparatus (30) that moves the mandrel (24) along the feeding direction, the moving apparatus (30) including:

a retention portion (32) that retains the one end side of the shaft (26) and is movable to an upstream side and the downstream side in the feeding direction,
a drive source (34) that moves the retention portion,
a sensor (36) that, via the retention portion (32), detects tension acting on the shaft (26),
a control section (38) that, in accordance with a tension detected by the sensor (36), controls the drive source (34) and adjusts a position of the retention portion (32) along the feeding direction;

a position of the mandrel (24) along the feeding direction is controlled by the moving apparatus (30) such that the taper portion (28A, 62A) of the working portion (28) is disposed at the nipping portion (N) of the pair of forming rollers (22B).

2. The multiple-winding pipe forming device (20) according to claim 1, wherein the working portion (62) includes a circular rod portion (62B) protruding from an end of the taper portion (62) to an opposite side of the taper portion (62A) from a side thereof at which the shaft (26) is disposed, the circular rod portion (62B) being equal in diameter to the end of the taper portion (62A).

3. A multiple-winding pipe forming method using the multiple-winding pipe forming device (20) according to any one of claims 1 to 2, the multiple-winding pipe forming method comprising:

curling the metal sheet (52) and winding the metal sheet (52) into the roll shape; and compressing superposed portions of the metal sheet (52) wound in the roll shape between the taper portion (28A, 62A) of the working portion (28, 62) and the pair of forming rollers (22) that is disposed at the downstream side in the feeding direction of the metal sheet (52).

Patentansprüche

1. Formvorrichtung für ein mehrfach gewickeltes Rohr (20) zum Formen eines gewickelten Rohrs, wobei die Formvorrichtung für ein mehrfach gewickeltes Rohr aufweist:

eine Vielzahl von Paaren von Formrollen (22), die entlang einer Zuführrichtung eines Metallblechs (52) angeordnet sind, das ein Formobjekt ist, wobei jedes Paar von Formrollen (22) einander gegenüberliegt, so dass das Metallblech (52) bei der Verwendung eingeklemmt wird, und wobei die Vielzahl von Paaren von Formrollen (22) dazu ausgebildet sind, das Metallblech (52) einzurollen und das Metallblech (22) in eine Rollenform zu wickeln; und einen Dorn (24), der aus Metall hergestellt ist, wobei der Dorn (24) aufweist:

eine Welle (26), die sich in Zuführrichtung erstreckt und bei der Verwendung in dem Metallblech (52) angeordnet ist, das in Rollenform gewickelt ist, wobei eine Endseite (26A) der Welle (26) zurückgehalten wird, wobei diese Endseite stromaufwärts in Zuführrichtung angeordnet ist, und einen Arbeitsabschnitt (28, 62), der an einer entgegengesetzten Endseite (26B) der Welle (26) ausgehend von einer Seite davon angeordnet ist, an der die eine Endseite (26A) angeordnet ist, wobei der Arbeitsabschnitt (28, 62) einen Verjüngungsabschnitt (28A, 62A) aufweist, dessen Durchmesser von stromaufwärts nach stromabwärts in Zuführrichtung zunimmt, wobei der Verjüngungsabschnitt (28A, 62A) des Arbeitsabschnitts (28, 62) bei der Verwendung in einer Position angeordnet ist, in der das in Rollenform gewickelte Metallblech (52) von einem Paar von Formrollen (22B) der Vielzahl von Paaren von Formrollen (22), das an einer stromabwärts gele-

genen Seite in Zuführrichtung angeordnet ist, eingeklemmt wird,
dadurch gekennzeichnet, dass die Formvorrichtung für ein mehrfach gewickeltes Rohr ferner aufweist:

eine Bewegungsvorrichtung (30), die den Dorn (24) entlang der Zuführrichtung bewegt, wobei die Bewegungsvorrichtung (30) aufweist:

einen Rückhalteabschnitt (32), der die eine Endseite der Welle (26) zurückhält und zu einer stromaufwärts gelegenen Seite und der stromabwärts gelegenen Seite in Zuführrichtung bewegbar ist, eine Antriebsquelle (34), die den Rückhalteabschnitt bewegt, einen Sensor (36) der über den Rückhalteabschnitt (32) Spannung erkennt, die auf die Welle (26) wirkt, einen Steuerabschnitt (38), der entsprechend einer von dem Sensor (36) erkannten Spannung die Antriebsquelle (34) steuert und eine Position des Rückhalteabschnitts (32) entlang der Zuführrichtung einstellt; und

wobei eine Position des Dorns (24) entlang der Zuführrichtung von der Bewegungsvorrichtung (30) gesteuert wird, so dass der Verjüngungsabschnitt (28A, 62A) des Arbeitsabschnitts (28) an dem Klemmabschnitt (N) des Paares von Formrollen (22B) angeordnet ist.

2. Formvorrichtung für ein mehrfach gewickeltes Rohr (20) nach Anspruch 1, wobei der Arbeitsabschnitt (62) einen kreisförmigen Stangenabschnitt (62B) aufweist, der von einem Ende des Verjüngungsabschnitts (62) zu einer gegenüberliegenden Seite des Verjüngungsabschnitts (62A) ausgehend von einer Seite davon vorsteht, an der die Welle (26) angeordnet ist, wobei der kreisförmige Stangenabschnitt (62B) den gleichen Durchmesser wie das Ende des Verjüngungsabschnitts (62A) aufweist.
3. Formverfahren für ein mehrfach gewickeltes Rohr unter Verwendung der Formvorrichtung für ein mehrfach gewickeltes Rohr (20) nach einem der Ansprüche 1 bis 2, wobei das Formverfahren für ein mehrfach gewickeltes Rohr umfasst:

Einrollen des Metallblechs (52) und Wickeln des

Metallblechs (52) in die Rollenform; und Komprimieren der überlagerten Teile des in Rollenform gewickelten Metallblechs (52) zwischen dem Verjüngungsabschnitt (28A, 62A) des Arbeitsabschnitts (28, 62) und dem Paar von Formrollen (22), das an der stromabwärts gelegenen Seite in Zuführrichtung des Metallblechs (52) angeordnet ist.

Revendications

1. Dispositif de formage de tuyau à enroulements multiples (20) pour former un tuyau enroulé, le dispositif de formage de tuyau à enroulements multiples comprenant :

une pluralité de paires de rouleaux de formage (22) agencées le long d'une direction d'alimentation d'une feuille métallique (52) qui est un objet de formage, chaque paire de rouleaux de formage (22) s'opposant l'une à l'autre de manière à prendre en sandwich, en utilisation, la feuille métallique (52), et la pluralité de paires de rouleaux de formage (22) étant configurées pour rouler la feuille métallique (52) et pour enrouler la feuille métallique (22) en une forme de rouleau ; et

un mandrin (24) fabriqué en métal, le mandrin (24) comportant :

un arbre (26) qui s'étend dans la direction d'alimentation et est disposé, en utilisation, à l'intérieur de la feuille métallique (52) enroulée en forme de rouleau, un côté d'extrémité (26A) de l'arbre (26) étant retenu, lequel côté d'extrémité est disposé en amont dans la direction d'alimentation, et une portion de travail (28, 62) prévue à un côté d'extrémité opposée (26B) de l'arbre (26) par rapport à un côté de celui-ci où ledit côté d'extrémité (26A) est disposé, la portion de travail (28, 62) comprenant une portion évasée (28A, 62A) dont le diamètre augmente de l'amont vers l'aval dans la direction d'alimentation, dans lequel la portion évasée (28A, 62A) de la portion de travail (28, 62) est disposée, en utilisation, à une position à laquelle la feuille métallique (52) enroulée en forme de rouleau est prise en sandwich par, parmi la pluralité de paires de rouleaux de formage (22), une paire des rouleaux de formage (22B) qui est disposée à un côté aval dans la direction d'alimentation,

caractérisé en ce que

le dispositif de formage de tuyaux à enroulements multiples comprend, en outre, un

appareil de déplacement (30) qui déplace le mandrin (24) le long de la direction d'alimentation, l'appareil de déplacement (30) comprenant :

- une portion de rétention (32) qui retient ledit côté d'extrémité de l'arbre (26) et qui est mobile vers un côté amont et le côté aval dans la direction d'alimentation, 5 10

une source d'entraînement (34) qui déplace la portion de rétention, 15

un capteur (36) qui, via la portion de rétention (32), détecte une tension agissant sur l'arbre (26), 20

une section de commande (38) qui, conformément à une tension détectée par le capteur (36), commande la source d'entraînement (34) et ajuste une position de la portion de rétention (32) 25

le long de la direction d'alimentation ; et une position du mandrin (24) le long de la direction d'alimentation est commandée par l'appareil de déplacement (30) de telle sorte que la portion évasée (28A, 62A) de la portion de travail (28) est disposée au niveau de la portion de pincement (N) de la paire de rouleaux de formage (22B). 30
- 2. Dispositif de formage de tuyaux à enroulements multiples (20) selon la revendication 1, dans lequel la portion de travail (62) comporte une portion de tige circulaire (62B) faisant saillie à partir d'une extrémité de la portion évasée (62) vers un côté opposé de la portion évasée (62A) à partir d'un côté de celle-ci où l'arbre (26) est disposé, la portion de tige circulaire (62B) étant d'un diamètre égal à l'extrémité de la portion évasée (62A). 35 40
- 3. Procédé de formage de tuyaux à enroulements multiples utilisant le dispositif de formage de tuyaux à enroulement multiples (20) selon l'une quelconque des revendications 1 et 2, le procédé de formage de tuyaux à enroulements multiples comprenant : 45

le roulage de la feuille métallique (52) et l'enroulement de la feuille métallique (52) en une forme de rouleau ; et 50

la compression de portions superposées de la feuille métallique (52) enroulée en forme de rouleau entre la portion évasée (28A, 62A) de la portion de travail (28, 62) et la paire de rouleaux de formage (22) qui est disposée du côté aval dans la direction d'alimentation de la feuille métallique (52). 55


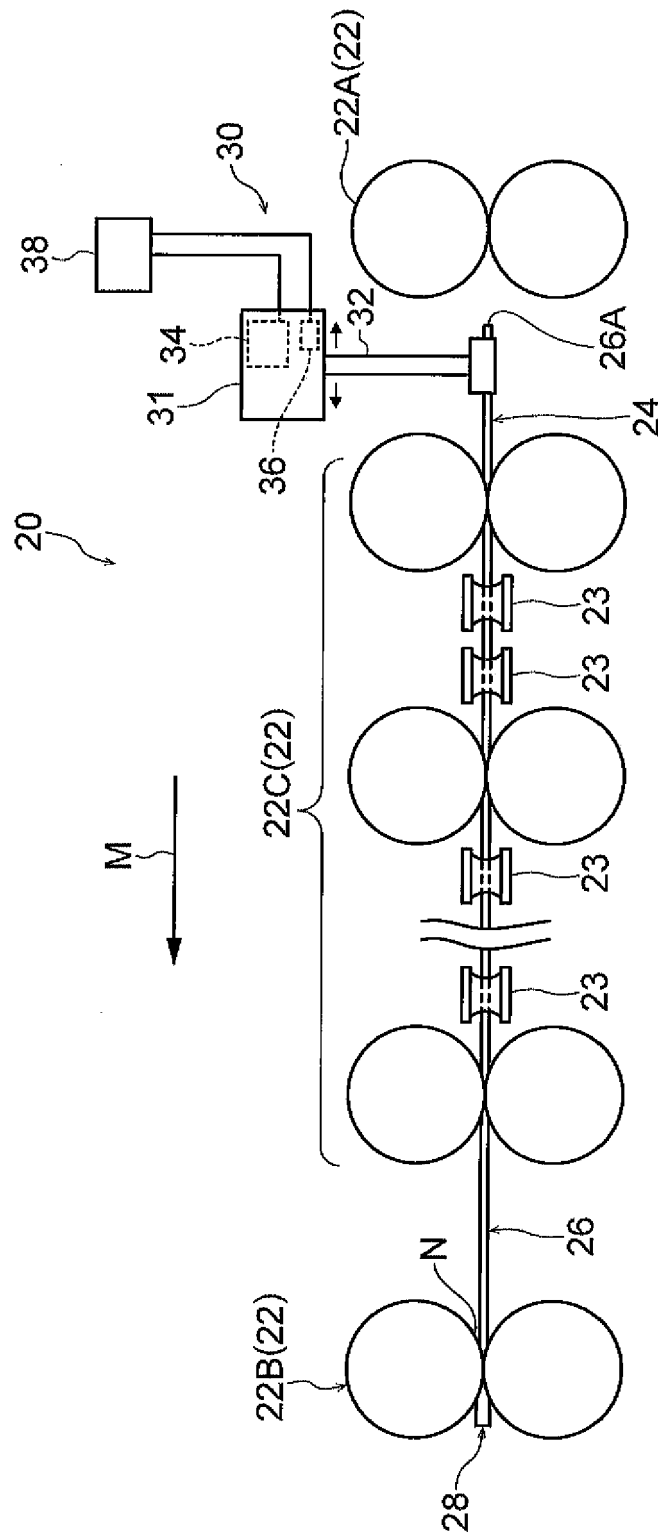


FIG.2

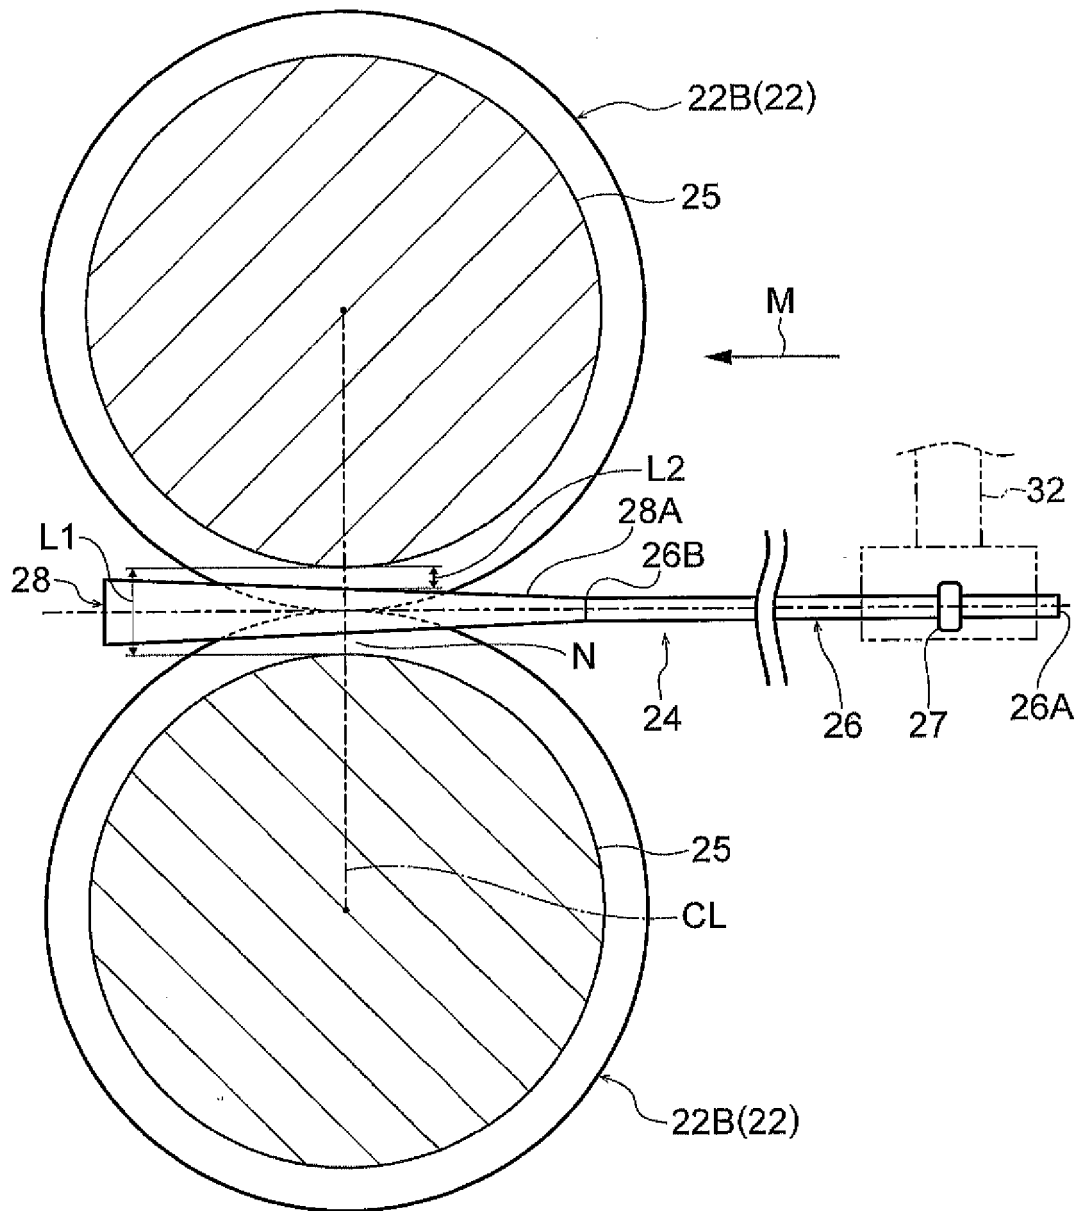

3.6.2

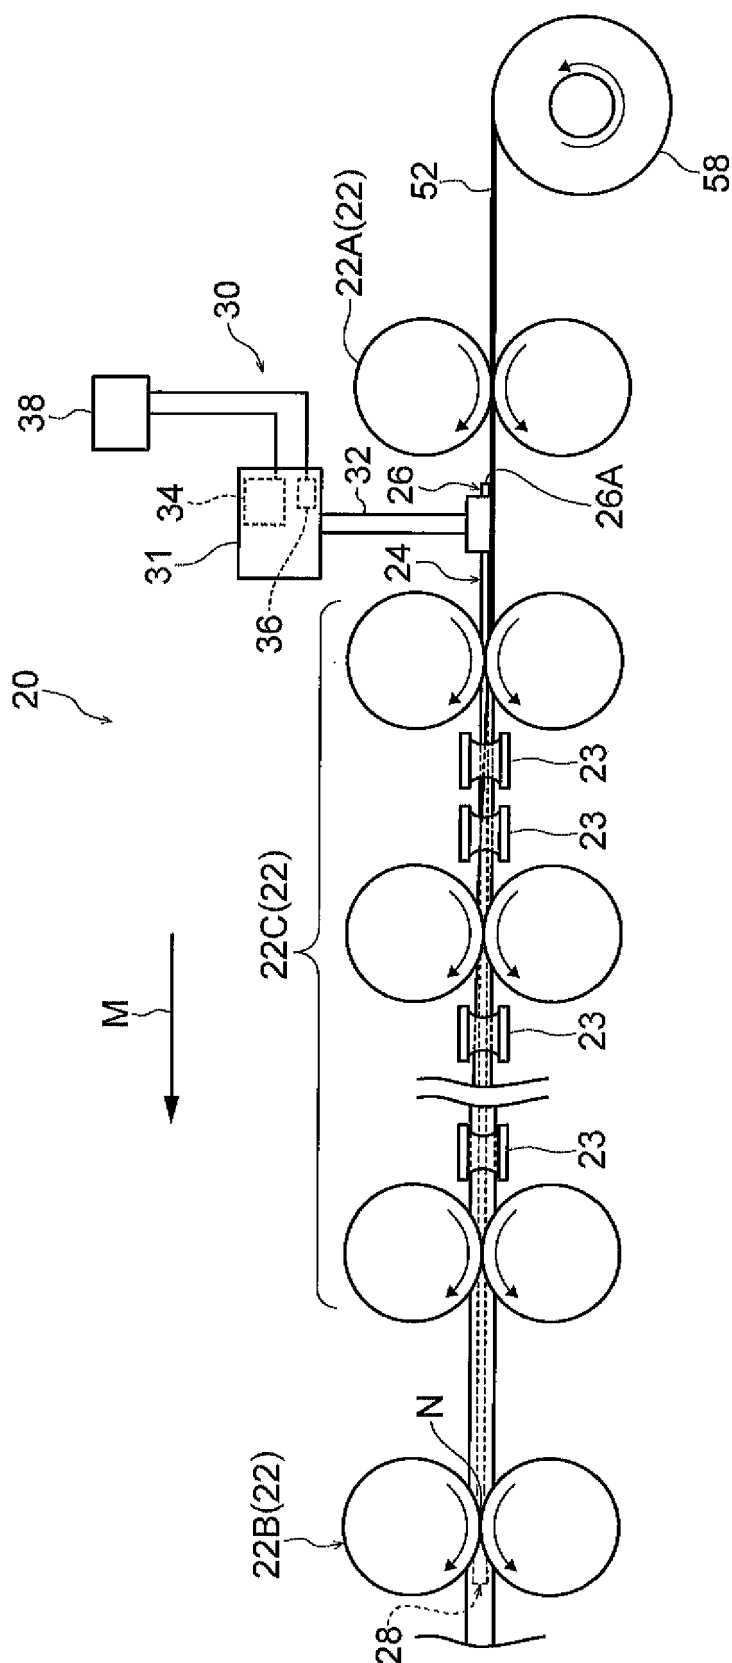


FIG.4

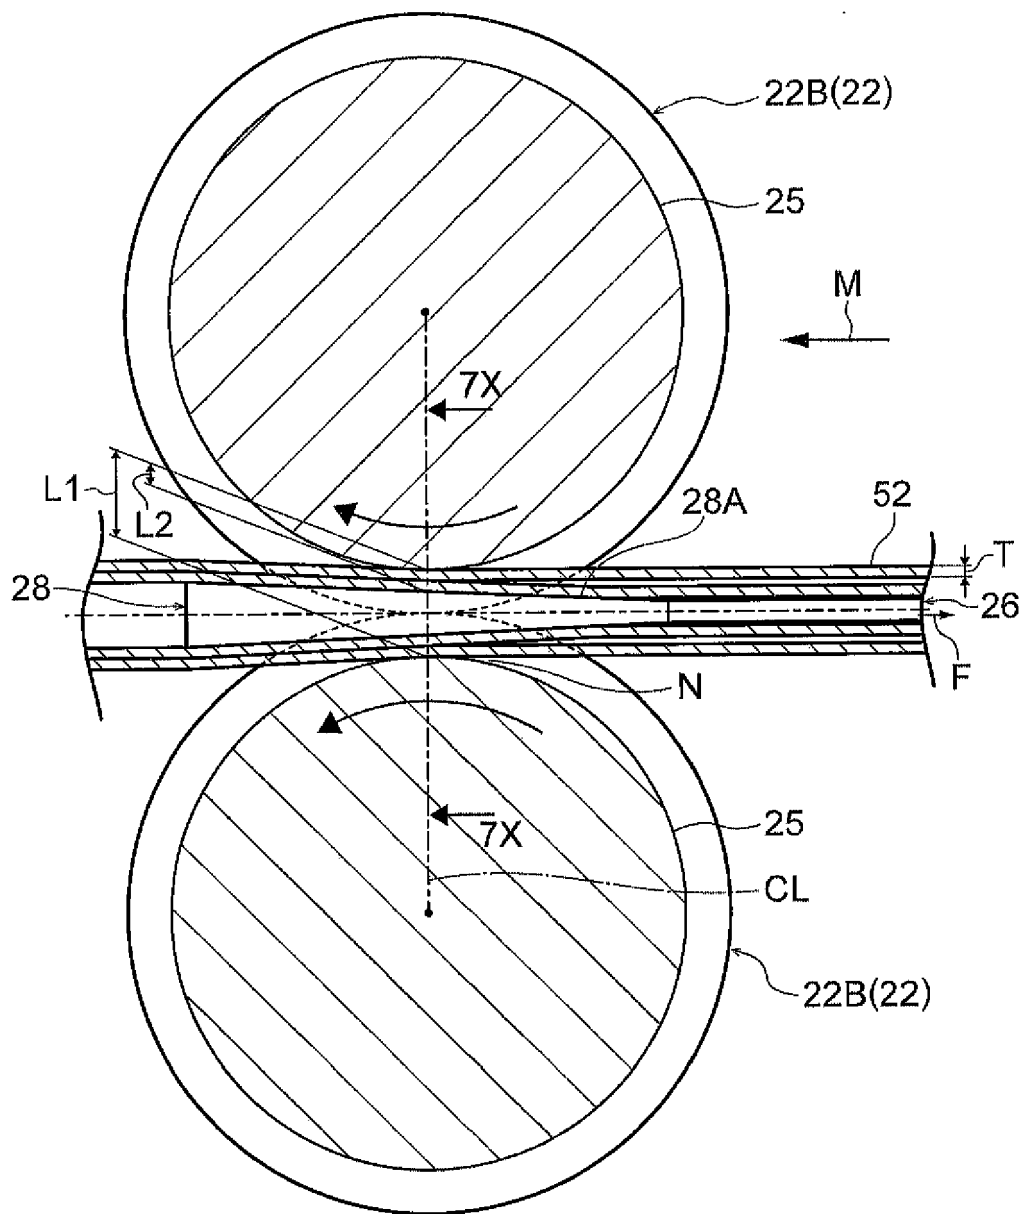


FIG.5

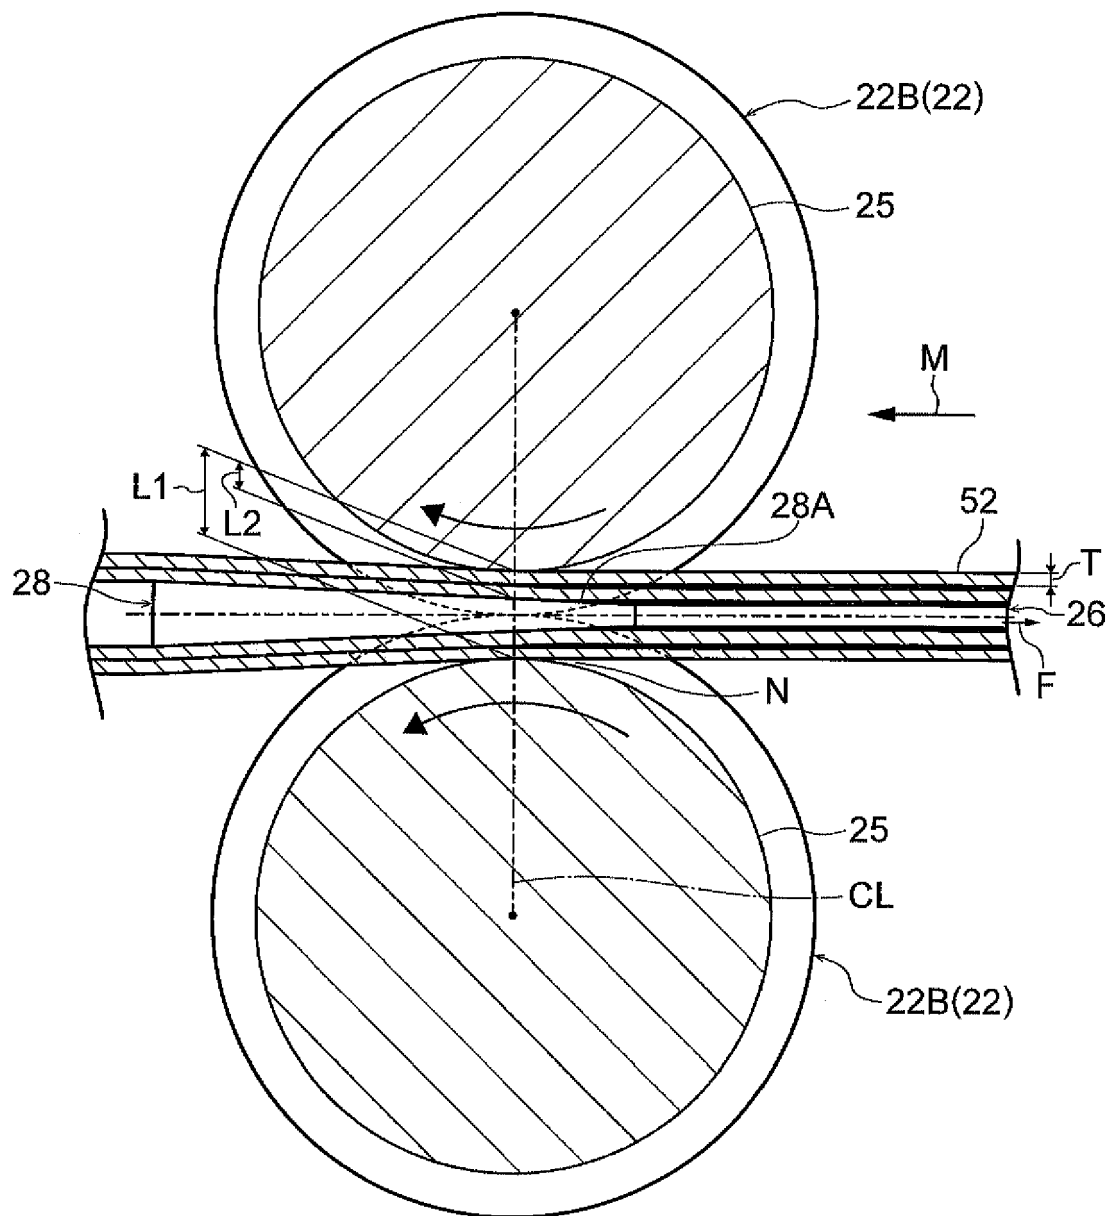


FIG.6

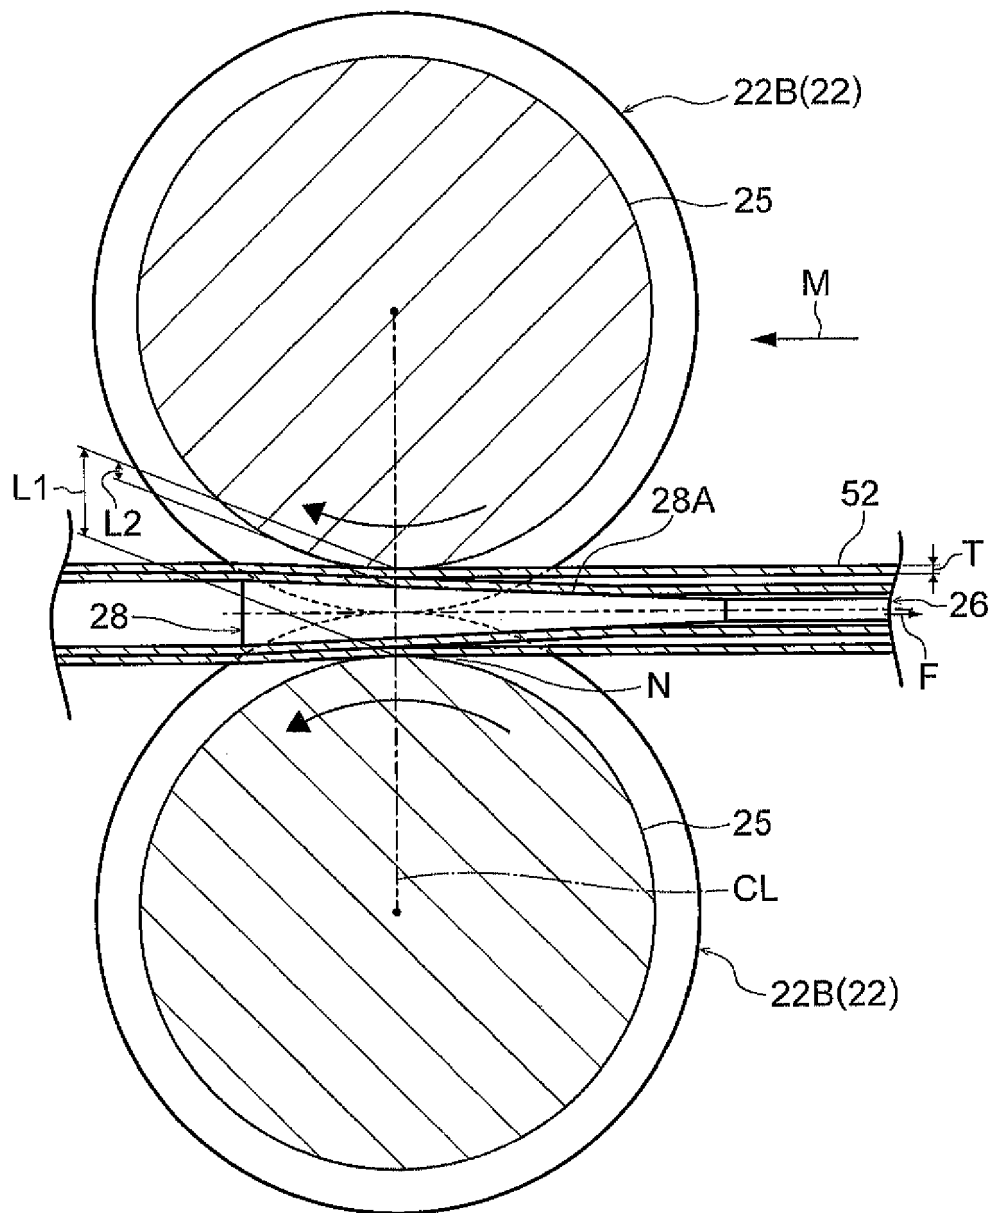


FIG.7

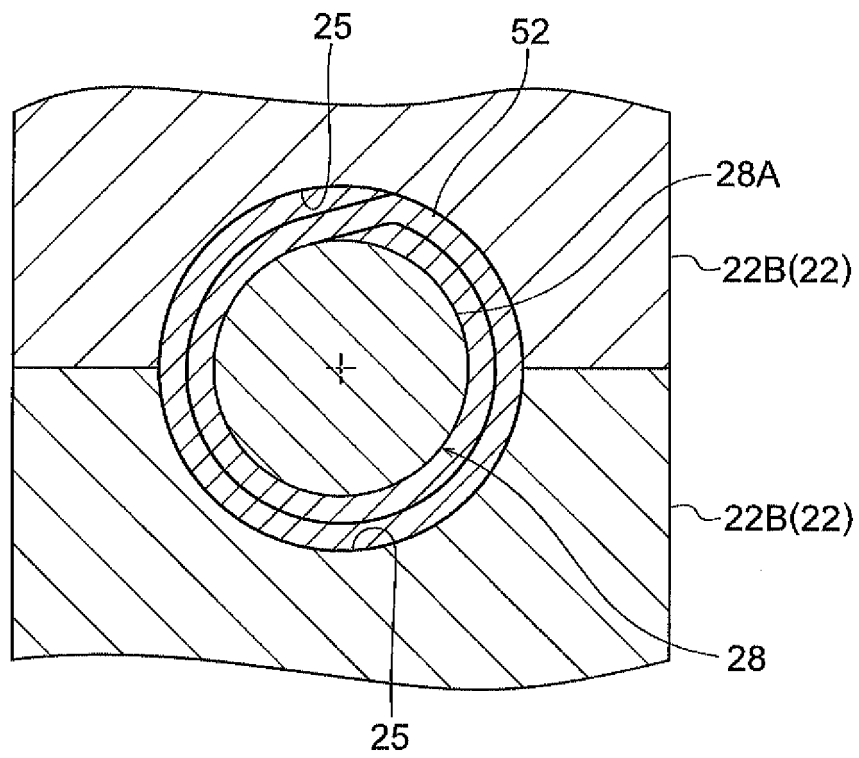


FIG.8

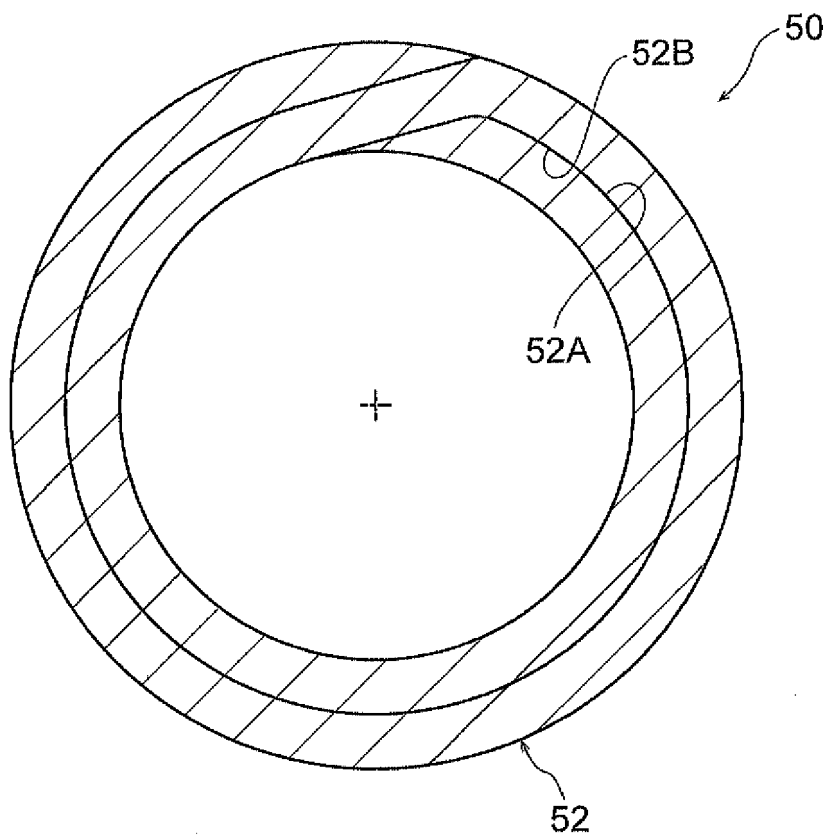


FIG.9

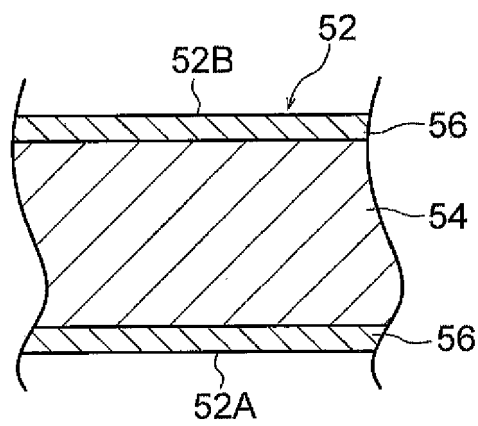


FIG.10


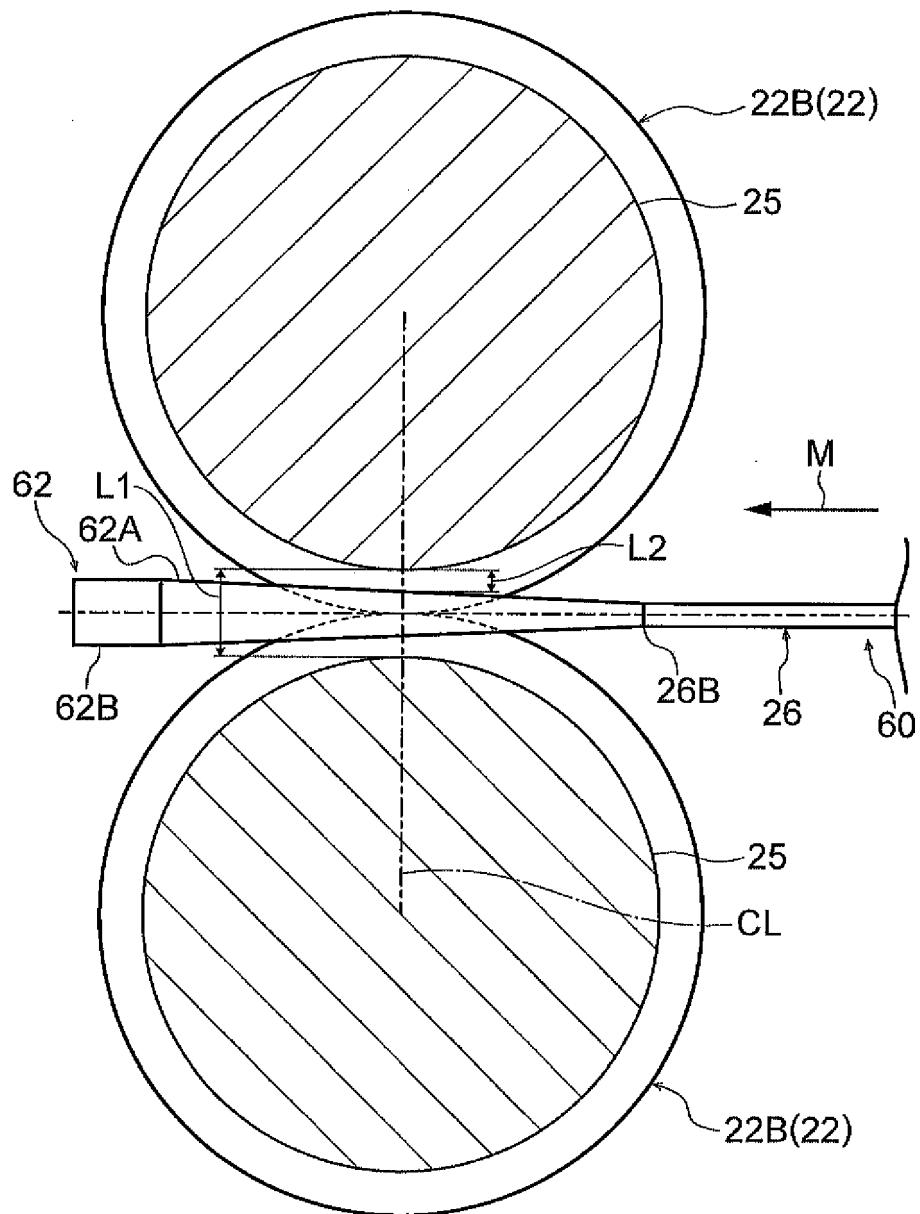


FIG.11

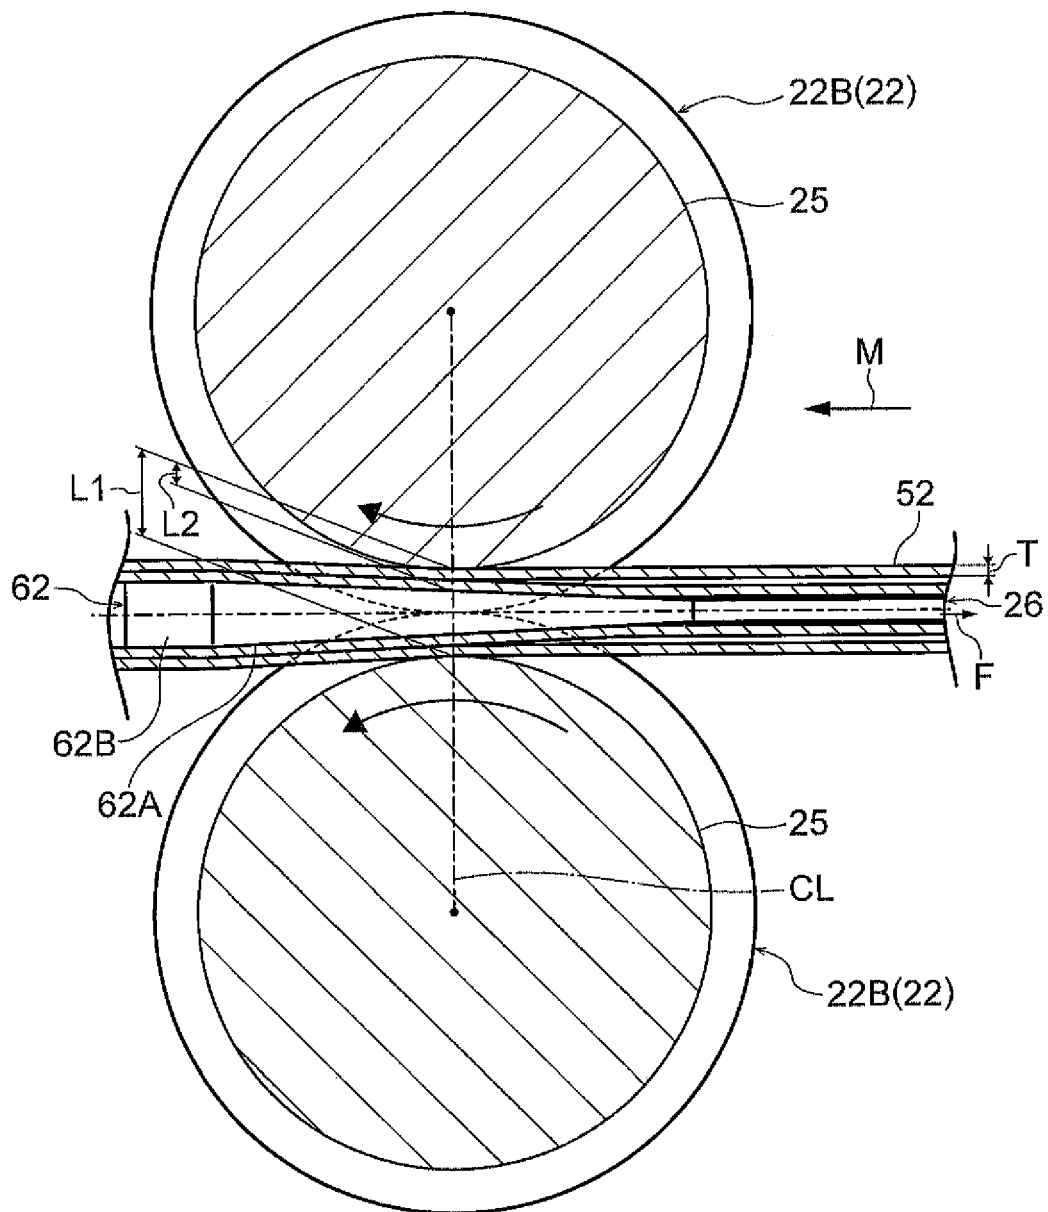

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP H11342418 A [0002] [0003] [0006]
- US 5484974 A [0004]
- DE 4106178 C1 [0005]