United States Patent [19]

Hewitt

[11] **3,926,541**

[45] **Dec. 16, 1975**

[54] **EXTRUDER WITH INTERACTING AUGER AND CARE MEANS**

[76] Inventor: **Frederick M. Hewitt,** 2913 N. Harrington, San Bernardino, Calif. 92402

[22] Filed: **Jan. 11, 1973**

[21] Appl. No.: **322,811**

Related U.S. Application Data

[63] Continuation-in-part of Ser. No. 50,491, June 29, 1970, abandoned.

[52] **U.S. Cl.** **425/64;** 425/95; 425/432; 425/456

[51] **Int. Cl.** **B28b 1/08**

[58] **Field of Search** 425/59, 62–65, 425/432, 456, 95; 249/79

[56] **References Cited**

UNITED STATES PATENTS

2,818,790	1/1958	Canfield et al.	425/62
2,937,429	5/1960	Livingston	425/59
3,137,220	6/1964	Smith	425/62
3,143,781	8/1964	Kalns	425/432
3,143,782	8/1964	Kalns	425/432
3,159,897	12/1964	Ellis et al.	425/432
3,181,222	5/1965	Palmer	425/111
3,224,064	12/1965	Hummel et al.	425/456
3,468,001	9/1969	Bodine, Jr.	425/63
3,608,012	9/1971	Jonell et al.	425/432

FOREIGN PATENTS OR APPLICATIONS


887,713	12/1971	Canada	425/64

Primary Examiner—Robert D. Baldwin
Assistant Examiner—John McQuade
Attorney, Agent, or Firm—Nilsson, Robbins, Bissell, Dalgarn & Berliner

[57] **ABSTRACT**

Apparatus for forming concrete articles in which augers convey "no-slump" concrete mix to a molding station with sufficient force to consolidate the mix. Friction is reduced at form surfaces of the molding station by high frequency vibration, greater than 22,000 vibrations per minute. Core-forming mandrels are disposed axially lateral of the line of flight of the augers. The concrete can be prestressed utilizing pretensioning or post-tensioning mechanisms and provision is made for transverse reinforcement of the concrete.

6 Claims, 23 Drawing Figures

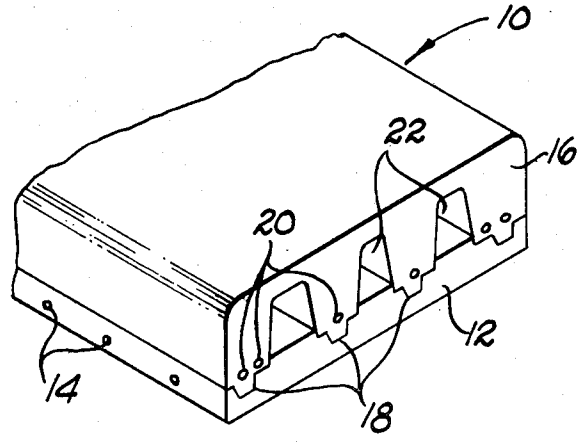

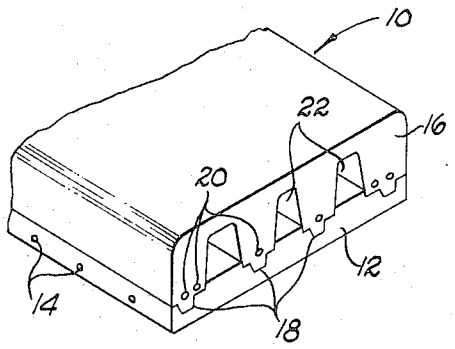


Fig. 1.

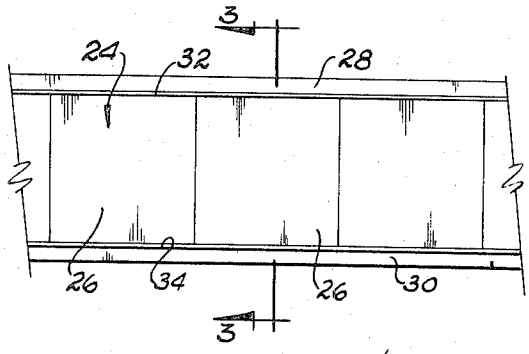


Fig. 2.

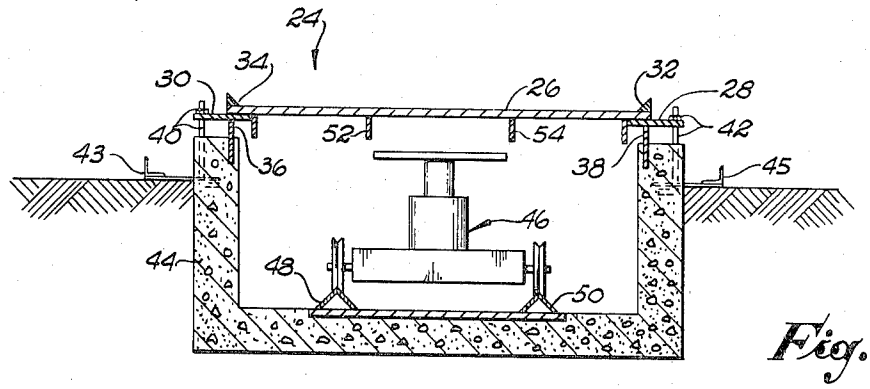
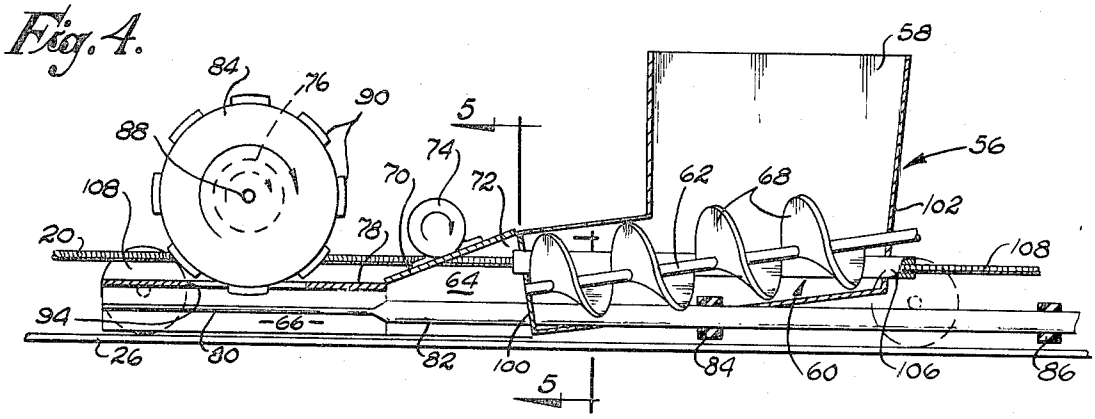


Fig. 3.

Fig. 4.



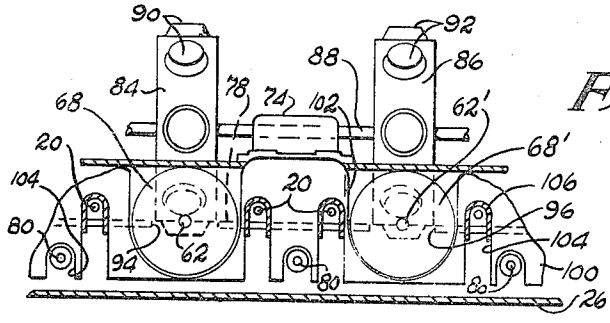


Fig. 5.

Fig. 6.

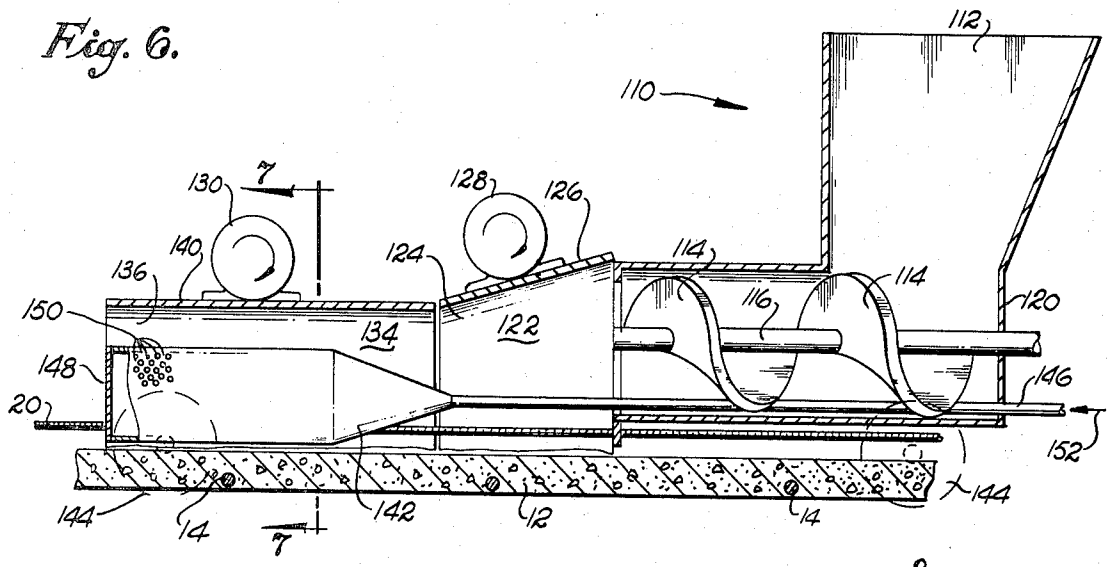


Fig. 7.

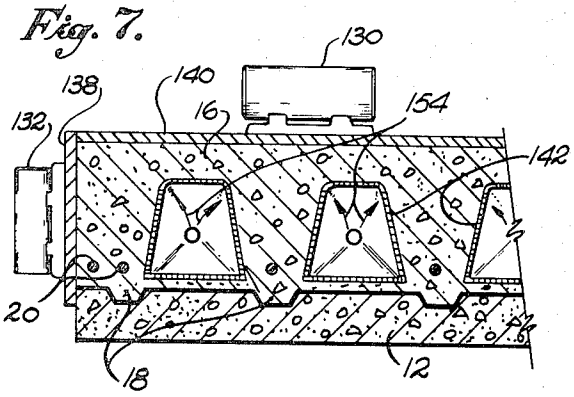
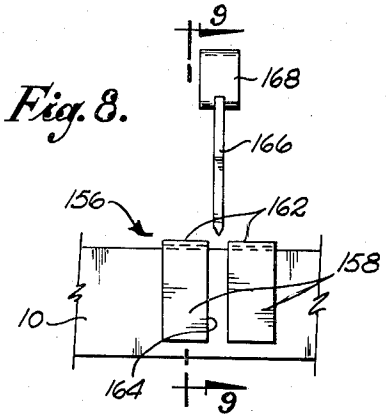


Fig. 8.



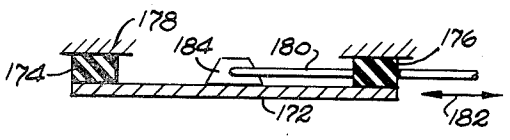


Fig. 10.

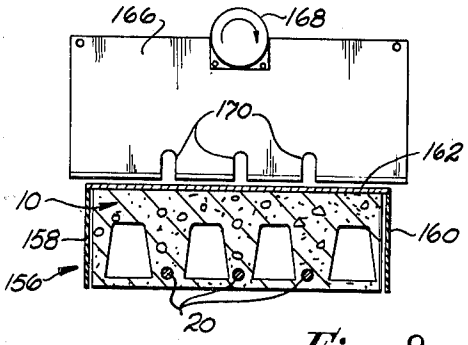


Fig. 9.

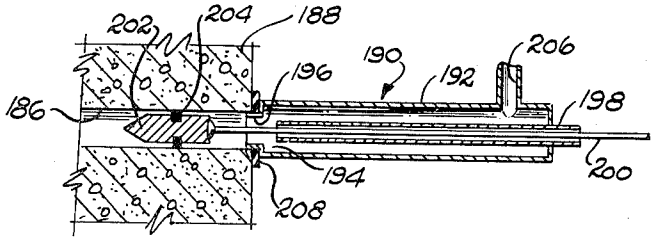


Fig. 11

Fig. 12.

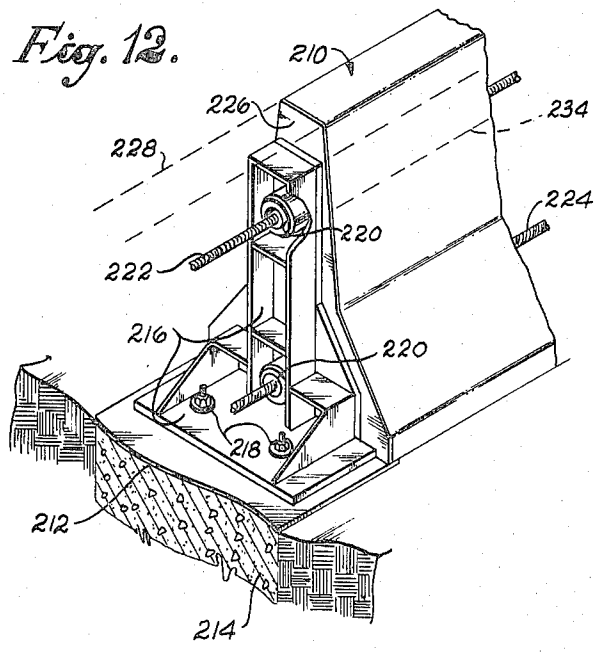


Fig. 16.

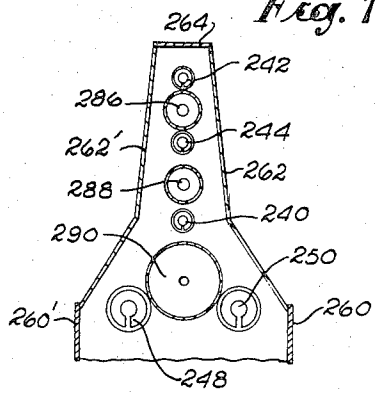


Fig. 14.


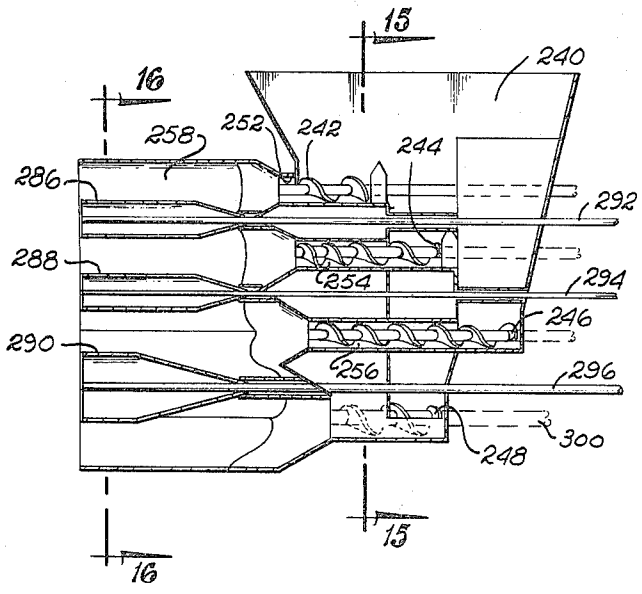


Fig. 15.

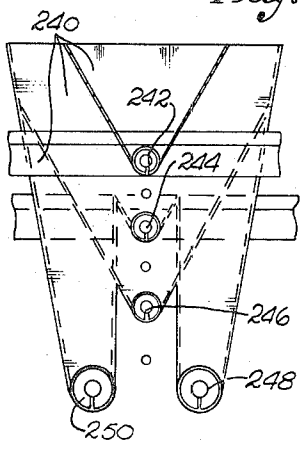

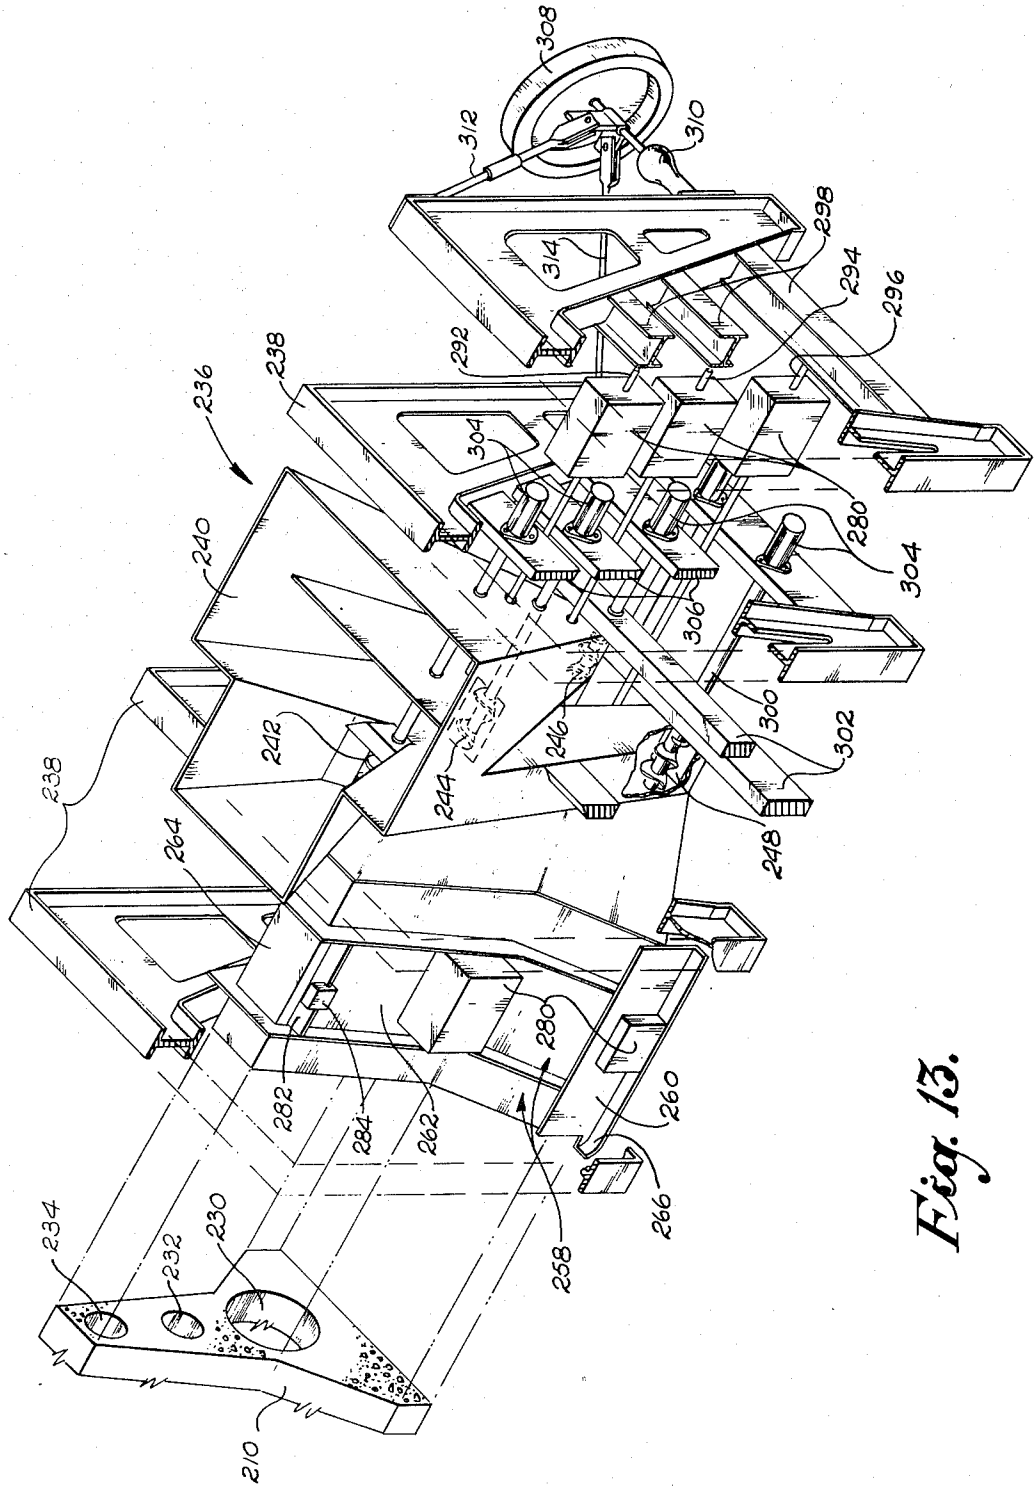

308
312
310
298
314
294
296
292
238
236
304
280
304
240
306
300
302
242
246
244
238
248
264
280
282
284
262
260
266
258
234
232
230
210

Fig. 13.

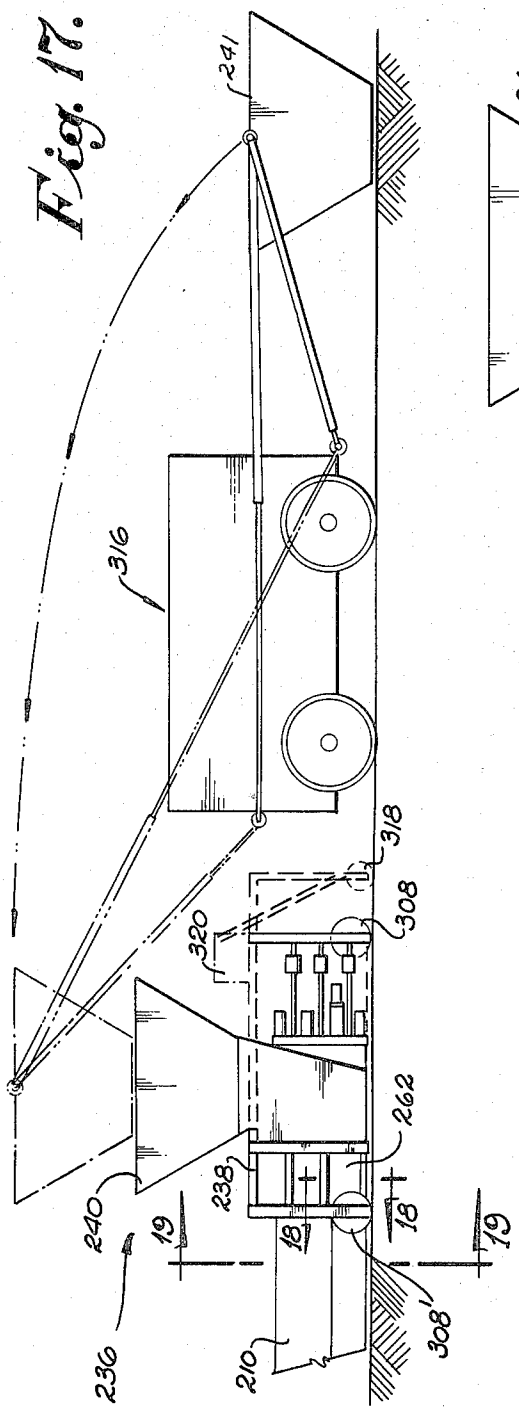


Fig. 17.

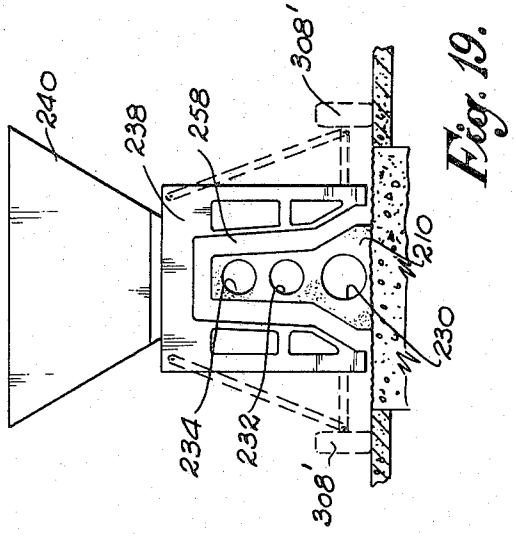


Fig. 19.

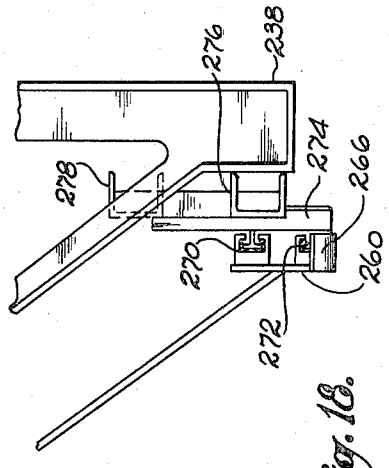


Fig. 18.

Fig. 20.

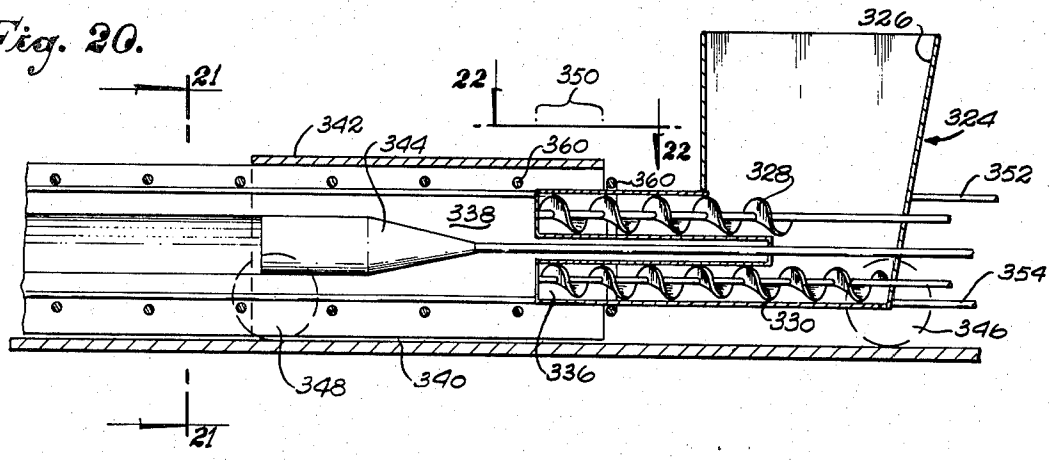
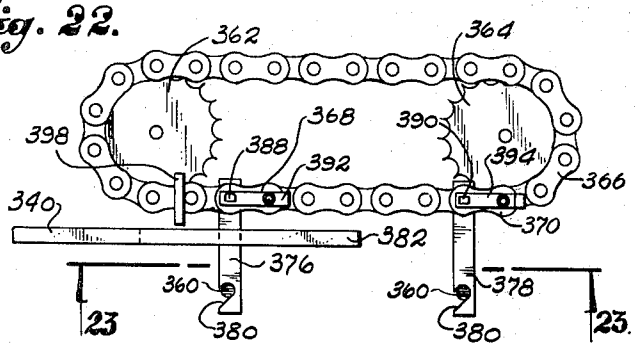


Fig. 22.



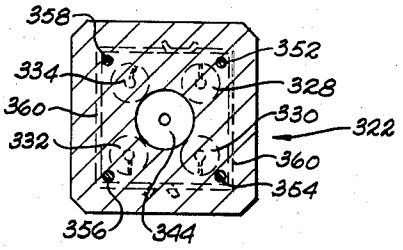


Fig. 21.

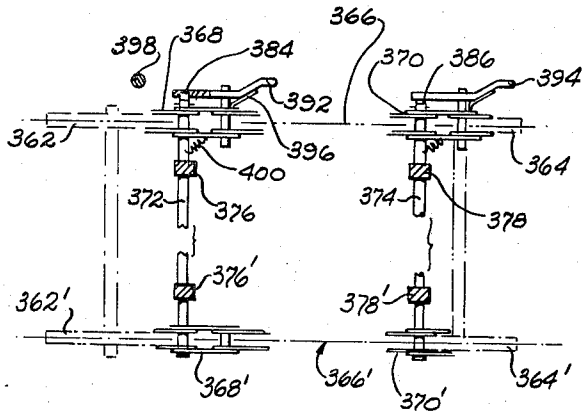


Fig. 23.

EXTRUDER WITH INTERACTING AUGER AND CARE MEANS

CROSS-REFERENCE TO RELATED APPLICATION

This application is a continuation-in-part of application Ser. No. 50,491, filed June 29, 1970, now abandoned, entitled METHOD AND APPARATUS FOR EXTRUDING CONCRETE.

FIELD OF THE INVENTION

The field of art to which the invention pertains includes the field of concrete extruding and molding apparatus.

BACKGROUND AND SUMMARY OF THE INVENTION

Various devices are used in slipforming concrete into beams, curbs, hollow core slabs, and the like, in which concrete is extruded on the "long line" principle. These devices are utilized to form a variety of articles from plain concrete, reinforced concrete and prestressed (both pre-tensioned and post-tensioned) concrete. In the production of long slabs, concrete is precast with hollow cores on long beds or pallets, usually without transverse reinforcement. If transverse reinforcement is necessary, when assembling floors or other slabs, to provide seismic "diaphragm" or for any other reason, then it is provided by either pouring a reinforced concrete topping over the slabs, when in place, or by welding or otherwise connecting projecting steel in the joints. Neither of these methods is very satisfactory and each is very expensive requiring large amounts of manual labor. It would be better to post-tension the slabs in place but the usual method of extrusion does not provide this ability.

Exemplary of modern extrusion techniques are the methods and apparatus described in U.S. Pat. Nos. 3,049,787, 3,159,897 and 3,284,687. These methods involve feeding concrete mix to one or more augers which force the mix into a molding section and out past a troweling section. The augers terminate in a mandrel which, by turning with the augers, shapes and forms hollow cores. The forming surfaces of the molding section are subjected to high amplitude vibration, at about 9–12,000 vibrations per minute, so as to compact and consolidate the concrete about the auger-driven mandrels. A disadvantage of such an "auger-mandrel" system is that the hollow cores are formed circular and must be located in the lines of flight of the augers.

The present invention provides slipforming, long-line extrusion apparatus which overcomes the foregoing deficiencies. The present invention utilizes the compacting force of rotating augers to consolidate "no-slump" concrete between form surfaces at a molding station and utilizes vibrations applied at the molding station. However, the vibrations are not utilized primarily to compress the cement mix, but rather to reduce friction at the form surfaces. Accordingly, whereas the prior art utilizes high amplitude, relatively low frequency vibrations, the present invention utilizes high frequency vibrations, in excess of 22,000 vibrations per minute, of relatively low amplitude. In another embodiment of the invention, friction is reduced by directing fluid, such as air or steam, under pressure between the form surfaces and the concrete mix. In contrast to prior methods, the present mode of operation enables the use of stationary mandrels which need not be located in the lines of flight of the augers and, in fact, are disposed axially lateral of such lines of flight. The result is that concrete articles can be formed with hollow cores of any desired configuration and placement.

Prestressed articles can be produced either for pre-tensioning or for post-tensioning. For post-tensioning, an elongate bar can be disposed in the extrusion path and the concrete mix consolidated thereabout so that as the bar is withdrawn, an elongate opening is defined through the extruded mix. The bar can be vibrated and, in this regard, consolidation of the concrete mix about the bar exerts a tensioning force which harmonically increases the vibrational frequency, thereby aiding in overcoming frictional forces. After the post-tensioning openings are formed, a pre-stressing strand can be threaded through the opening and tensioned. For this purpose, a novel air gun is provided which projects a leadwire through the opening.

For pre-tensioning, cables can be tensioned along the extrusion path and the concrete extruded thereabout. In this regard, prior sawing methods could not be used with prestressed "green" concrete since they require sawing through the prestressing strands in order to cut the article to a desired length. However, in accordance with the present invention, desired lengths of the article are obtained by introducing a plate into the extruded "green" mix transverse to the path of extrusion and vibrating the plate at a high frequency so as to reduce friction between the plate and the extruded mix. The vibrating plate is formed with cutouts for the prestressing cables so that the cables need not be cut at that point but can wait until the line has been completely formed and the concrete cured.

The present methods can be utilized to obtain transversely tensioned concrete articles. In this regard, a square slab of prestressed concrete can be extruded, the process stopped and the slab rotated so as to be positioned normal to the prior extrusion path. A second prestressed layer can then be deposited on the surface of the first slab to provide transverse reinforcement. Prior to extrusion of the second slab, a shear key is indented into the top surface of the first extruded slab, the second extrusion filling the indentations to securely and integrally form the article.

In still further embodiments, transverse reinforcement can be introduced into the concrete mix at the initial region of the molding station. In this regard, an overlap region can be formed between the auger flights and the form surfaces of the molding station, and U-shaped transverse ties (or other shapes where suitable) inserted at that point. Guide bars move the ties at extrusion speed through at least a consolidation region of the molding station.

The conveyors and molding station are movably mounted either with respect to a pallet or with respect to the ground so that as concrete is extruded, the apparatus moves in reaction therefrom. In the event that concrete is extruded directly on to a ground surface, such as when laying a median barrier strip on a highway, leveling mechanisms are utilized to maintain a uniform height and pitch.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an isometric view of a hollow core concrete slab capable of being transversely reinforced;

FIG. 2 is a schematic plan view of a line of pallets to carry slabs formed in accordance with this invention;

FIG. 3 is a schematic, cross-sectional view on line 3—3 of FIG. 2 in the direction of the arrows;

FIG. 4 is a schematic, longitudinal-sectional view of one type of extruder of this invention;

FIG. 5 is a cross-sectional view on line 5—5 of FIG. 4, in the direction of the arrows;

FIG. 6 is a schematic, longitudinal-sectional view of another type of extruder utilized herein;

FIG. 7 is a schematic, cross-sectional view on line 7—7 of FIG. 6 in the direction of the arrows;

FIG. 8 is a schematic, elevational view of end forming apparatus;

FIG. 9 is a cross-sectional view on line 9—9 of FIG. 8, in the direction of the arrows;

FIG. 10 is a schematic illustration of one form of vibration system;

FIG. 11 is a schematic, longitudinal-sectional view of post-tensioning apparatus of this invention;

FIG. 12 is an isometric view of the anchored end of a prestressed concrete median barrier constructed in accordance with the present invention;

FIG. 13 is an isometric, partially cut away, schematic view of apparatus for forming the barrier of FIG. 12;

FIG. 14 is a longitudinal-sectional view depicting the auger and core forming mandrels utilized in the apparatus of FIG. 13;

FIG. 15 is a cross-sectional view on line 15—15 of FIG. 14, in the direction of the arrows;

FIG. 16 is a cross-sectional view on line 16—16 of FIG. 14, in the direction of the arrows;

FIG. 17 is a diagrammatic longitudinal elevation of an extrusion train as utilized herein;

FIG. 18 is detail on line 18—18 of FIG. 17, in the direction of the arrows;

FIG. 19 is an elevational view on line 19—19 of FIG. 17, in the direction of the arrows;

FIG. 20 is a longitudinal-sectional view of another type of an extrusion apparatus utilized herein;

FIG. 21 is a cross-sectional view on line 21—21 of FIG. 20, in the direction of the arrows;

FIG. 22 is a schematic, partially cross-sectional, partially plan view on line 22—22 of FIG. 20, in the direction of the arrows; and

FIG. 23 is a schematic view on line 23—23 of FIG. 22, in the direction of the arrows.

DETAILED DESCRIPTION

As required, detailed illustrative embodiments of the invention are disclosed herein. However, it is to be understood that these embodiments merely exemplify the invention which may take many different forms that are radically different from the specific illustrative embodiments disclosed. Therefore, specific structural and functional details are not to be interpreted as limiting, but merely as a basis for the claims which define the scope of the invention. In accordance with the foregoing, three forms of extruded concrete articles are illustrated. One form exemplified by FIGS. 1–9 is directed to the production of flat slabs. The embodiment exemplified by FIGS. 12–19 is directed toward the production of a concrete median barrier. The embodiment exemplified by FIGS. 20–23 is directed to the production of elongate piles. In each case, the concrete article produced is formed with one or more hollow cores and can be prestressed. In addition to the foregoing, the embodiments illustrated by FIGS. 10 and 11 are particular devices useful in the practice of each of the embodiments herein.

Of central importance to the construction of each of the embodiments is the interoperative relationship of two principles: (1) compaction by means of augers or other such conveyor whereby to consolidate a free-standing or "no-slump" concrete mix within a molding station, and (2) reduction of friction by the application of high frequency vibration.

Referring now to the embodiment of FIGS. 1–9, including reference also to FIGS. 10 and 11, and particularly with respect to FIG. 1, there is illustrated a double-extruded slab 10 of prestressed, transversely reinforced, hollow-cored concrete. A first stage slab section 12 is formed with cable holes 14 in one direction and supports a second stage slab section 16, secured in shear keys 18. The second stage slab section 16 is formed with prestressing cables 20 disposed normal to the direction of the lower prestressing cable holes 14. Additionally, the second stage slab section 16 is formed with a plurality of hollow cores 22 of truncated isosceles triangle cross-section.

The first stage slab section 12 is extruded on a pallet 24 shown schematically in FIG. 2 and in cross-section in FIG. 3. The pallet 24 is formed in a long line (for example 400–600 feet) and is segmented into separate square sections 26, for example 4 feet × 4 feet. Rails 32 and 34 on opposite sides of the pallet may be used to provide fillets on the slab bottom edges if desired.

Referring to FIG. 3, pallet supports 28 and 30 are carried by plates 36 and 38 and controlled by leveling rods and nuts 40 and 42 on a concrete bed 44. Tracks 43 and 45 are formed on opposite sides of the bed 44. A mobile jack 46 runs on rails 48 and 50 beneath the pallet and can be raised against any pallet section 26, secured between flanges 52 and 54 dependent therefrom. When it is desired to raise a particular pallet section 26, the mobile jack 46 is run beneath the pallet 24 and raised whereupon it engages the under side of the pallet section 26 between the securing flanges 52 and 54. The jack 46 is designed to rotate 90° so that a particular slab section 12 formed thereon may be turned normal to the path of extrusion, as hereinafter detailed.

Referring to FIG. 4, there is disclosed one form of extruder 56 embodying the interoperative principles of the present invention. In general terms, the extruder 56 includes a feed section in the form of a hopper 58, a conveyor section 60, which includes a plurality of augers 62, a consolidation section 64 and a molding or extrusion die section 66. In this particular embodiment, two augers 62 and 62′ (FIG. 5) are utilized, but a greater number may be used, or only a single auger may be used.

Concrete mix (not shown) of the "self-standing" or "no-slump" type is introduced into the hopper 58 whereupon it falls into the auger flights 68. A motor (not shown) drives the auger 62 so that the flights 68 carry the concrete into the consolidation section 64. The consolidation section 64 is defined by a top wall 70 and side walls such as 72 which conically decrease the volume of the consolidation section 64 toward the molding section 66. The auger flights 68 force the concrete mix through the consolidation section 64 and into the molding section 66.

In accordance with the present invention, simultaneously with compaction of the concrete mix by means of the forceful drive of the augers 62 and 62′, vibration is applied to the surfaces of the consolidation and molding sections 64 and 66 which are in contact with

the concrete mix. Vibration assemblies for such purpose are schematically shown at **74** and **76** in FIG. **4.** Such vibrators can be pneumatically driven so as to rotate an eccentric in the direction shown, i.e., in the direction of extrusion. A vibration assembly should be located on each of the walls in contact with the consolidated mix, although representation thereof will be omitted from some of the Figures for clarity of illustration.

Importantly, the frequency of vibration is much higher than heretofore utilized. In prior devices, vibration was utilized for compaction purposes to directly aid in consolidating the concrete mix particles. In such cases, frequencies on the order of 7,000 to 12,000 vibrations per minute were utilized with high amplitudes. In the present invention, much higher frequencies are utilized and the amplitude can be quite low. In accordance herewith, high frequency vibration up to the ultrasonic range, in excess of 22,000 vibrations per minute, and up to 50,000 vibrations per minute, or higher, should be utilized. The high frequency vibrations serve a purpose which is quite different from the effect of vibrations of low frequency as utilized in prior devices, the present purpose being to reduce friction rather than to aid in compaction. While the very high frequences utilized herein provide less friction between the surfaces of concrete mix particles thereby enabling greater compaction, the major purposes is to reduce friction between the concrete mix and the form surfaces in contact with the mix, such as the walls of the consolidation and the molding sections **64** and **66.** To facilitate the transmittal of such vibration, the consolidation and molding section walls, such as **70** and **72,** are slidably secured to a supporting frame (not shown) so as to move forwardly and rearwardly in their planes.

In terms of exemplary dimensions, the first stage slab **12** is formed about **3** inches thick. A plurality of bars **80** about ½ inch in diameter, are disposed lengthwise through the molding section **66** and are formed with thicker portions **82** rearwardly thereof, which thicker portions are supported on rubber mounts **84** and **86.** Vibrators (not shown) are mounted on the bars **80** rearwardly of the mounts **84** and **86** whereby to vibrate the bars **80.** When concrete mix is consolidated about the bars **80,** it exerts tensioning forces thereon thus harmonically increasing the vibration frequency when there is most resistance to movement and therefore a greater need for high frequency vibration to reduce friction. By means of the bars **80,** post-tensioning holes are formed in the lower slab section **12** through which prestressing cables **14** can be threaded.

Referred to FIG. **5** in conjunction with FIG. **4,** a pair of imprint wheels **84** and **86** are journaled on a common axle **88** which is rotatably supported on the framework (not shown) of the device. The imprint wheels **84** and **86** are formed circumferentially with circular punches **90** and **92** which rotate into contact with the top surface of the first stage slab section **12** as it is being extruded, through openings **94** and **96** in the wall **78,** to thereby punch a plurality of shear keys **18,** referred to above, approximately ¾ inch deep and 3 inches in diameter. Vibration assemblies **76,** as indicated by the dashed lines in FIG. **4,** are secured within each imprint wheel **84** and **86.**

In this particular embodiment, pre-tensioned cable **20** is to be used for prestressing the second stage slab section **16.** Accordingly, provision must be made in the extruder **56** for clearance of these cables **20,** and the manner in which this is accomplished is illustrated in FIG. **5.** The forward end of the conveyor section is formed with a forward bulkhead **100** which has portions **102** cutaway in axial alignment and coincidence with the diameter of the auger flights **68** and **68'.** Notches **104** are formed upwardly from the bottom surface of the forward bulkhead **100** to admit the bars **80** and cables **20.** Additionally, aprons **106** are supported between the forward bulkhead **100** and a rear bulkhead **102** (FIG. **4**), protecting the cables **20** from lateral displacement as a result of the rotational movement of the auger flights **68.**

The frame (not shown) carrying the components of the extruder **56** is supported on front and rear wheels **108** which are positioned in tracks **43** and **45.** Referring back to FIG. **3,** after the first stage slab section **12** has been extruded to the extent of one pallet section **26,** it is cut utilizing a vibrating plate as will hereinafter be described, or by sawing as shown to the prior art so as to form a square slab section. The mobile jack **46** is positioned beneath the pallet **26,** is raised to engage the pallet, turned 90° and lowered so as to replace the first stage slab section **12** normal to the extrusion path. This positions the holes **14** so that post-tensioning strands can be threaded transversely through a slab assembly.

Referring now to FIG. **6,** after a series of first stage slab sections **12** have been turned 90°, the upper slab section **16** is extruded thereon. An extruder **110** is utilized which is similar in function to the extruder **56** of FIG. **4** but which is dimensioned so as to extrude a relatively thicker slab section **16,** up to **10** or **12** inches thick. The extruder **110** includes a hopper **112** through which "no-slump" concrete mix is introduced to the flights **114** of an auger **116** supported between a bulkhead **120** and a rearward bearing (not shown). The auger flights **114** carry the concrete mix into a consolidation section **122** defined by side walls **124** and a top wall **126,** each wall carrying a vibration assembly such as illustrated at **128, 130** and **132** (FIG. **7**) and are of the type previously described, i.e. generating high frequency vibrations. The consolidated concrete mix is then extruded into the molding section **134** defined by side walls **136** and **138** (FIG. **7**) and a top wall **140.** The molding section **134** contains core-forming mandrels **142** as will hereinafter be described in more detail.

The processes hereinabove described were referred to as extrusions, but they may be more accurately described as retrusions. Concrete mix is not expelled from the molding section **134,** but rather the molding section **134** and other components of the extruder **110** as carried on its framework (not shown) is moved rearwardly in reaction to the compaction and consolidation of the concrete mix particles, and for this purpose the framework is provided with a set of wheels as indicated in dashed lines at **144.** This manner of retrusion is well known as described in the aforenoted U.S. patents.

Referring to FIG. **7** in conjunction with FIG. **6,** the core formers **142** are shaped as desired and are formed rearwardly with hollow pipes **146.** High frequency vibrators can be placed internally of the core formers **142** or the pipe **146** can be vibrated along its longitudinal axis. However, in this particular embodiment, vibration of the core formers is accomplished with fluid pressure. The core formers **142** are formed with walls **148** (FIG. **6**) closing the front ends thereof and the side walls are formed with a large number of small apertures as partially indicated schematically at **150** in FIG. **6.** Fluid in the form of air or steam under pressure is

introduced through the pipe **146,** as indicated by the arrow **152** in FIG. **6** and by the arrows **154** in FIG. **7.** The purpose of the fluid under pressure is to "liquidize" the cement mix particles adjacent the surface of the core formers **142** whereby to reduce friction. In this regard, steam under pressure is more effective, but pressurized air is satisfactory with many operations.

Referring particularly to FIG. **7,** it will be seen that the concrete mix is consolidated about pre-tensioned cables **20** and is forced into the shear keys **18.** If necessary, the first stage slab section **12** can be sprayed with water, or with epoxy solution if it has cured too long, prior to extrusion thereon of the second stage slab section **16.**

The second stage slab section **16** can be extruded in long line fashion without regard to sectioning as required for the first stage slab sections **12,** and can be cut to any desired length. Referring to FIGS. **8** and **9,** there is illustrated one method for cutting desired lengths, and simultaneously providing smooth formed ends. As soon as possible after extrusion, while the concrete **10** is still "green" a guiding frame **156,** on a supporting carriage (not shown), is run into place. The frame **156** includes side walls **158** and **160** and a top wall **162** defining a slot **164** therethrough for guiding a cutting plate **166.** The cutting plate **166** carries a high frequency vibration assembly **168** which provides vibrations in the plane of the plate **166.** The plate **166** is formed with slots **170** extending from its bottom edge to accommodate the prestressing cables **20** and is inserted while vibrating into the "green" concrete slab. By such means, the slab is divided as desired, without cutting the cables **20.** The cables **20** can be severed after the concrete has cured. Although a single end-forming plate **166** has been illustrated, a plurality of plates can be utilized in place of the single plate.

Referring now to FIG. **10,** there is illustrated one manner of imparting vibration to a wall **172** as may be located on a consolidation or molding section of an extruder. The wall **172** in the present illustration is supported by rubber mounts **174** and **176** on a frame **178.** A rod **180** is connected to a vibration source so as to vibrate laterally with respect to the wall **172,** in the direction of the arrow **182,** and is connected by a mount **184** exteriorly to the wall **172.**

In place of pre-tensioned cable **20,** the second stage slab **16** can be formed with longitudinal openings therethrough in the manner depicated with respect to the extrusion of the first stage slab section **12.** In view of the relatively long uninterrupted length of the second stage slab section **16,** a method would be needed for threading a post-tensioning cable through such an opening. Apparatus to accomplish such threading is depicted in FIG. **11.** There is depicted an elongate opening **186** defined through a section of consolidated concrete **188.** The threading device is an air gun **190** which includes a housing **192** defining an air chamber **194** and formed with an air escape opening **196** at the forward end thereof. A cable support tube **198** extends within the housing **192** and a close fitting leadwire **200** is threaded through the support tube **198.** The forward end of the leadwire **200** is connected to a projectile **202** which is formed with a "Teflon" washer **204** close-fit in the opening **186.** An air pressure inlet **206** is formed into the housing. A rubber gasket **208** is disposed around the air escape opening **196** so that the air gun **190** can be placed firmly against the concrete material adjacent the opening **186.** In operation, the air gun is positioned with the air escape opening **196** in communication with the opening **186,** with the projectile **202** in the opening connected to the leadwire **200,** which, in turn, is threaded through the housing **192.** Air pressure is applied to the inlet **206** whereupon the projectile is forced through the opening **186** carrying the leadwire **200.**

Referring now to the embodiment depicted in FIGS. **12–19,** and more specifically to FIG. **12,** there is illustrated a concrete medial barrier **210** such as is utilized to separate lanes of traffic on roadways. The barrier **210** is extruded in place on the roadway, as will hereinafter be described. In FIG. **12,** only the end section of the barrier is shown wherein it is anchored in place on a neoprene pad **212** to a concrete bed **214** laid at the end section only. An anchorage plate **216** is secured to the concrete bed **214** by means of anchor bolts **218.** An upward extension of the anchor plate **216** is secured to the median barrier **210** by means of cable anchors **220** fixed to post-tensioning cables **222** and **224** so as to sandwich a bulkhead **226** against the end of the median barrier **210.** An anchorage cover, indicated by dashed lines at **228,** is removably secured to the bulkhead **226** and anchor plate **216** by means not shown. The anchorage cover is sufficiently strong to withstand vehicle impact and extends a short distance between anchored ends, eg., about 4 feet. Referring additionally to FIG. **13,** the median barrier **210** is formed with a plurality of cores **230, 232** and **234,** one on top of the other and the post-tensioning cables **222** and **224** are threaded through the end cores **230** and **234.** The center core **232** can be used as a utility duct if desired.

Referring to FIG. **13** in more detail, a median barrier extruder **236** is schematically illustrated. The components are supported on upright interconnected frame members indicated at **238** and include a hopper **240** which supplies concrete mix to five auger flights **242, 244, 246, 248** and **250** (FIG. **15**) spaced so that, in conjunction with a distributive shaping of the hopper **240,** concrete mix is substantially evenly distributed.

Referring additionally to FIGS. **14** and **15,** the manner of location of the auger flights **242, 244, 246, 248** and **250** is more clearly illustrated. It will be seen that when concrete is fed into the hopper **240** it is distributed by the auger flights through conduits such as at **252, 254** and **256,** to a combination consolidation and molding section, which can also be described as an extrusion die **258.** The extrusion die **258** is formed with bottom die members **260,** upper side walls **262** and a top wall **264.** Referring additionally to FIG. **18,** the bottom die member **260** is formed with a skid shoe **266** for riding laterally on the frame **238,** as guided by ball races **270** and **272,** thereby permitting lateral vibration. As shown in FIG. **18,** but omitted for clarity in FIG. **13,** the ball races are supported on a vertical member **274** which, in turn, is vertically slidable within ball races indicated at **276** and **278** attached to the frame **238.** This arrangement allows the vertical extent of the median barrier to be varied in accordance with grading conditions so that the top of the barrier is maintained substantially uniform. Vertical movement of the bottom die **260** is guided by hydraulic means as hereinafter described.

Considering FIG. **13** in more detail, a plurality of pneumatic vibrating assemblies, shown schematically at **280,** are positioned on the side walls **262** and the bottom die member **260** whereby to laterally vibrate these members with a high frequency as hereinbefore

described. In addition to the ball races **270** and **272** described hereinabove with respect to the bottom die member **260,** the side members **262** are carried on flanges **282** horizontally slidable within ball races such as at **284** affixed to the frame **238** (by means not shown). By such means, friction between the consolidated concrete mix and die walls is greatly reduced.

Referring additionally to FIGS. **14** and **16,** three core forming mandrels **286, 288** and **290** are supported on high tensile steel bars **292, 294** and **296** respectively which, in turn, are connected to anchor beams **298** (FIG. **13**) joisted between lateral frame members. Pneumatic vibrators **280** are connected to the bars **292, 294** and **296** to transmit high frequency vibration to the mandrels **286, 288** and **290.** The augers are supported on drive shafts, such as **300** which are carried on bearing supports **302** joisted between lateral frame members **238,** and driven by motors, indicated schematically at **304,** carried by joisted support members **306.** Carriage wheels (only one of which is shown at **308**) are pivotally mounted in ball joints **310** carried on the sides of the frame **238** and are connected by hydraulic leveling and steering arms **312** and **314** respectively.

Operation of the median barrier extruder **236** can be further explained with respect to FIGS. **17** and **19.** "Dry" concrete mix of the "no-slump" type is delivered by a transit mixer to a hopper **241** whereupon the concrete mix is fed via articulated arms of power unit **316** to hopper **240** and thence to the augers flights **242, 244, 246, 248** and **250** to the extrusion die **262** and extruded as a concrete median barrier **210** thereby propelling the extruder **236** rearwardly. Grade is "read" by an offset wheel **318** which automatically records vertical displacement. Realignment and level "instructions" are transmitted to the hydraulic system via a compressed air system indicated schematically at **320,** which records the rise, fall and change of direction of the guide wheel **318.** The rear carriage wheels **308** are smoothly adjusted to the new alignments while the front carriage wheels **308'** gradually follow, thereby assuring smooth transitions on the top surface of the barrier **210.** Leveling is also automatically accomplished by similar hydraulic and pneumatic feedback. Crossfall is accommodated by the bottom forms **260,** as previously described, moving vertically in relation to the remainder of the extrusion die **258.** The result is a continuous, accurately laid median barrier **210** automatically extruded in place.

Referring now to FIGS. **20–23,** and in particular to FIGS. **20** and **21,** there is illustrated still another embodiment whereby prestressed, transversely reinforced concrete piles **322** can be produced. The extruder **324** includes a hopper **326** in communication with four auger flights **328, 330, 332** and **334.** The auger flights extend through a conveyor section **336** which communicates with a combination consolidation and molding section, referred to hereinafter as an extrusion die section **338,** including side walls (shown in shadow) at **340** and a top wall **342.** A core-forming mandrel **344** is disposed axially central of the extrusion die **338,** the lines of auger flights being disposed axially lateral of the mandrel **344** in quadrature relationship thereabout. The extruder **324** is movably carried on wheels as indicated by the dashed lines **346** and **348** so as to be propelled rearwardly by the extrusion operation.

In this embodiment, the conveyor section **336** extends within the extrusion die section **338** so that there is an overlap region, indicated in FIG. **20** at **350.** Pretensioned cables **352, 354, 356** and **358** are disposed in the path of extrusion for longitudinal tensioning of the concrete pile **322.** The overlap region is provided for insertion of U-shaped steel ties **360** as transverse reinforcement. During the extrusion operation the U-shaped ties are inserted into the concrete mix at the overlap region **350.**

Referring to FIGS. **22** and **23,** a mechanism is illustrated whereby the reinforcement ties **360** are carried through the overlap region **350** into consolidation with the concrete mix. Opposed sets of sprocket wheels **362, 362'** and **364,** and **364'** are journaled across the overlap region and fitted with sprocket chains **366** and **366'.** Cylindrical rods **372** and **374** (only two are illustrated for clarity) are carried between appropriately spaced links such as **368** and **368'** and **370** and **370'.** Each rod **372** and **374** laterally carries finger bars **376, 376'** and **378, 378'** which are formed at their outward ends with slots **380** and **382** for engaging and guiding the tie bars **360.** The finger bars **376, 376'** and **378, 378'** are disposed through slots **382** in the side walls **340,** coextensive with the overlap region **350.** The sprocket wheels **362, 362'** and **364, 364'** are geared into one of the carriage wheels **346** or **348** whereby to move the fingers **376** and **378** through the slots **382,** i.e., through the overlap region **350,** at the extrusion speed so as to carry the tie bars **360** into consolidation with the concrete mix. At the end of the slots **382,** the finger bars **376, 376'** and **378, 378'** encounter the wall **340.** The rods **372** and **374** are rotatable within the links **368** and **370** but are formed with square top ends **384** and **386** which are rotatably fixed by insertion within a square opening **388, 390** (FIG. **22**) in a lock bar **392** and **394** carried by the linkages **368** and **370.** Each lock bar is pivotally carried at one end against a leaf spring **396** so as to release the finger support rod **372** when tripped. By way of example, as the finger bar **376** encounters the end of the slot **382,** the lock bar **392** encounters a trip lug shown schematically at **398** whereupon it is pivoted against its spring **396** to release the rod **372,** thereby enabling the finger bar **376** to clear the wall **340.** As the finger bar **376** clears the wall **340,** it is brought back to its extended position by means of a return spring **400.**

If desired, in place of the tie rods, **360,** one can insert fabric or mesh reinforcement through the overlap region, or can insert other reinforcement as desired. Various other additions, modifications and adaptations can be made. For example, imprint rollers such as depicted at **84** and **86** in FIGS. **4** and **5,** can be utilized in wider form to imprint any architecturally desired pattern on the exterior surface of the extruded slab. Still other modifications will be apparent from the foregoing description.

I claim:

1. Apparatus for forming concrete aricles, comprising:

a hopper, a conveyor section, a consolidation section and a molding station;

said molding station including form surfaces;

at least one auger for conveying concrete mix along said conveyor section, said auger having flights for extruding said mix through said consolidation section and into said molding station;

at least one mandrel formed by walls having external surfaces in the path of extrusion from said auger flights;

said auger being rotationally independent from said mandrel;

said auger and said mandrel being relatively disposed so that the longitudinal axis of said auger is lateral of the longitudinal axis of said mandrel;

said hopper including means for introducing concrete mix to said auger;

means for rotating said auger to convey said mix to the form surfaces of said molding station with sufficient force to consolidate said mix and extrude the consolidated mix relative to said form surface;

means for slideably securing said molding station form surfaces whereby to permit reciprocal movement along their planes; and

means for reciprocally vibrating said form surfaces along their planes at a frequency greater than 22,000 vibrations per minute, during the extrusion, to reduce friction between said form surfaces and said mix.

2. The apparatus according to claim **1** including an end forming plate, means for introducing said plate into the extruded mix transverse to the path of said extrusion, and means for vibrating said plate at high frequency whereby to reduce friction between said plate and said extruded mix for forming end portions of said extruded mix.

3. The apparatus according to claim **1** including means for directing fluid under pressure between the external surfaces of said mandrel walls and said mix to reduce friction therebetween.

4. The apparatus according to claim **1,** including means for vibrating said mandrel to reduce friction between said external surfaces of said mandrel walls and said mix.

5. The apparatus according to claim **4** in which said mandrel vibrating means vibrate said mandrel walls at a frequency greater than 22,000 vibrations per minute.

6. The apparatus according to claim **1** including means for movably mounting said apparatus for propulsion thereof in reaction to said extrusion, and means for leveling said form surfaces.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE

CERTIFICATE OF CORRECTION

PATENT NO. : 3,926,541

DATED : December 16, 1975

INVENTOR(S) : Frederick M. Hewitt

It is certified that error appears in the above-identified patent and that said Letters Patent are hereby corrected as shown below:

In the Title, change "CARE" to --CORE--.

Col. 1, line 3, change "care" to --core--.

Col. 5, line 52, change "referred" to --referring--.

Col. 6, line 19, change "shown" to --known--.

Signed and Sealed this

twenty-fifth Day of *May 1976*

[SEAL]

Attest:

RUTH C. MASON
Attesting Officer

C. MARSHALL DANN
Commissioner of Patents and Trademarks