




- (51) **International Patent Classification:**
H04B 10/155 (2006.01) *H04B 10/158* (2006.01)
- (21) **International Application Number:**
PCT/US2012/054755
- (22) **International Filing Date:**
12 September 2012 (12.09.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/535,548 16 September 2011 (16.09.2011) US
13/245,160 26 September 2011 (26.09.2011) US
- (71) **Applicant (for all designated States except US):** ALCA-
TEL LUCENT [FR/FR]; 3, avenue Octave Gréard, F-
75007 Paris (FR).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** LIU, Xiang [US/US];
6 Manor Drive, Marlboro, NJ 07746 (US). WINZER,
Peter, J. [AT/US]; 209 Cashel Drive, Aberdeen, NJ 07747
(US). CHRAPLYVY, Andrew [US/US]; 32 Somerset
Place, Matawan, NJ 07747 (US).
- (74) **Agent:** LA BRUNO, David, M.; Alcatel-Lucent USA Inc.,
Attention: Docket Administrator - Room 3B-212F, 600-
700 Mountain Avenue, Murray Hill, NJ 07974-0636 (US).
- (81) **Designated States (unless otherwise indicated, for every
kind of national protection available):** AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every
kind of regional protection available):** ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) **Title:** PERFORMANCE ENHANCEMENT THROUGH OPTICAL VARIANTS

FIG. 1

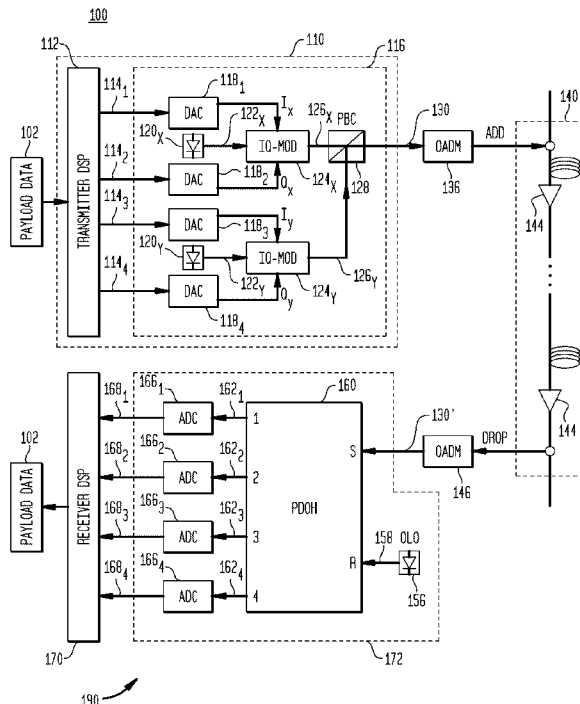

(57) **Abstract:** An optical transport system configured to transmit a set of two or more optical variants per bit-word, with the optical variants in the set being different from one another in one or more of the time of transmission, spatial localization, polarization of light, carrier wavelength, and subcarrier frequency. Differences between the optical variants may also be due to different respective constellation mapping. The optical variants of each set are detected and processed at the receiver in a manner that enables coherent summation of the corresponding electrical signals prior to constellation de-mapping. The coherent summation tends to average out the deleterious effects of linear and nonlinear noise/distortions imparted on the individual optical variants in the optical transport link because said noise/distortions are incoherent in nature. In various embodiments, a BER reduction enabled by the use of optical variants can be implemented in addition to or instead of that provided by FEC coding.

WO 2013/039968 A1



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, **Published:**
ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*

PERFORMANCE ENHANCEMENT THROUGH OPTICAL VARIANTSCROSS-REFERENCE TO RELATED APPLICATIONS

This application claims priority from U.S. Provisional Patent Application No. 61/535,548, filed on September 16, 2011, and entitled "PERFORMANCE
5 ENHANCEMENT THROUGH OPTICAL VARIANTS," which is incorporated
herein by reference in its entirety.

BACKGROUND10 Field

The invention(s) relate to optical communication equipment and, more specifically but not exclusively, to equipment for managing data transport through a noisy optical channel.

15 Description of the Related Art

This section introduces aspects that may help facilitate a better understanding of the invention(s). Accordingly, the statements of this section are to be read in this light and are not to be understood as admissions about what is in the prior art or what is not in the prior art.

20 Forward error correction (FEC) uses systematically generated redundant data to reduce the bit-error rate (BER) at the receiver. The cost of this reduction is a concomitant increase in the required forward-channel bandwidth, with the latter being dependent on the data rate of the FEC code. In general, an FEC code with a lower payload data rate is used for a noisier channel. When the channel conditions fluctuate
25 over time, the data rate and/or the FEC code can be adaptively changed to maintain an acceptable BER. However, one problem with FEC coding, as applied to optical transport systems, is that the coding-gain differences among various implementable FEC codes usually do not exceed a certain maximum value, as given by Shannon's information theory. Therefore, for certain optical channels, additional and/or
30 alternative performance-enhancement techniques may be needed to overcome these and other pertinent limitations of FEC coding.

SUMMARY

Problems in the prior art are addressed by various embodiments of an optical transport system configured to transmit a set of two or more optical variants per bit-word, with the optical variants in the set being different from one another in one or more of the time of transmission, spatial localization, polarization of light, carrier wavelength, and subcarrier frequency in orthogonal frequency-division multiplexed (OFDM) systems. The optical variants of each set are detected and processed at the receiver in a manner that enables coherent (or constructive) summation of the corresponding electrical signals prior to constellation de-mapping. The coherent summation tends to average out the deleterious effects of both linear and nonlinear noise/distortions imparted on the individual optical variants in the optical transport link because said noise/distortions are incoherent in nature. In various embodiments, a BER reduction enabled by the use of optical variants can be implemented in addition to or instead of that provided by FEC coding.

According to one embodiment, provided is an optical receiver comprising a front-end circuit configured to convert an optical input signal into a corresponding plurality of digital electrical signals; and a processor configured to process the plurality of digital electrical signals to generate a first set of values corresponding to a first bit-word; to sum the values of the first set to generate a summed value; and to map the summed value onto a constellation to determine the first bit-word. In response to the optical input signal having at least a first optical variant and a second optical variant, each carrying the first bit-word, the processor is configured to include into the first set at least one value that corresponds to the first optical variant and at least one value that corresponds to the second optical variant.

According to another embodiment, provided is an optical transmitter configured to generate an optical output signal in response to an input data stream in a manner that causes the optical output signal to have at least a first optical variant and a second optical variant, both corresponding to a first bit-word, wherein the first and second optical variants differ from one another in at least one of carrier wavelength, spatial localization, and constellation mapping.

If the first and second optical variants differ from one another in spatial localization, then the optical transmitter may have an optical coupler configured to

apply the first optical variant to a first core of a multi-core fiber; and to apply the second optical variant to a second core of the multi-core fiber.

If the first and second optical variants differ from one another in constellation mapping, then the optical transmitter may have a processor configured to subject an
5 input data stream to FEC coding to generate an FEC-coded data stream; and to convert the FEC-coded data stream into two or more parallel sequences of constellation symbols. For each bit-word of the FEC-coded data stream, said two or more parallel sequences of constellation symbols have at least two different constellation symbols, each corresponding to a different respective constellation-
10 mapping procedure. The optical transmitter is further configured to generate different optical variants corresponding to a bit-word based on the respective at least two different constellation symbols produced by different respective constellation-mapping procedures.

According to yet another embodiment, provided is an optical receiver
15 comprising a front-end circuit configured to receive an optical input signal from a multi-core fiber or a multimode fiber; to combine at least two different spatial components corresponding to a first bit-word carried by the optical input signal to generate a combined optical signal, said two different spatial components representing
20 respective optical signals received from respective different cores of the multi-core fiber or respective different modes of the multimode fiber; and to generate a plurality of digital electrical signals based on the combined optical signal. The optical receiver further comprises a processor configured to apply an inverse transfer function corresponding to said multi-core fiber or said multimode fiber to the plurality of
25 digital electrical signals to generate a complex value corresponding to the at least two different spatial components; and to map the complex value onto a constellation to determine the first bit-word. In one implementation, the processor includes a finite impulse response (FIR) filter circuit configured to apply said inverse transfer function to said plurality of digital electrical signals.

BRIEF DESCRIPTION OF THE DRAWINGS

Other aspects, features, and benefits of various embodiments of the invention will become more fully apparent, by way of example, from the following detailed description and the accompanying drawings, in which:

5 FIG. 1 shows a block diagram of an optical transport system according to one embodiment of the invention;

 FIG. 2 shows a flowchart of a signal-processing method that can be implemented in the transmitter of the optical transport system shown in FIG. 1 according to one embodiment of the invention;

10 FIG. 3 shows a flowchart of a signal-processing method that can be implemented in the receiver of the optical transport system shown in FIG. 1 according to one embodiment of the invention;

 FIG. 4 shows a block diagram of an optical transport system according to another embodiment of the invention;

15 FIG. 5 shows a block diagram of an optical transport system according to yet another embodiment of the invention; and

 FIG. 6 shows a block diagram of an optical receiver that can be used in the optical transport system of FIG. 5 according to one embodiment of the invention.

20 DETAILED DESCRIPTION

An optical transport link is typically configured to support multiple degrees of freedom, such as time, space, carrier frequency (wavelength), and polarization. Each of these degrees of freedom can be used for optical-signal multiplexing. Multiplexing techniques corresponding to these four different individual degrees of freedom are referred to in the literature as time-division multiplexing, space-division multiplexing, wavelength-division multiplexing, orthogonal frequency-division multiplexing, and polarization-division multiplexing.

25 In addition to or instead of using the various degrees of freedom supported by an optical transport link for multiplexed transmission of independent optical signals, various embodiments of the invention employ these degrees of freedom for the transmission of correlated optical signals, referred to as optical variants. In a representative embodiment, two optical variants are two optical signals that carry the

same piece of data, bit-word, or bit sequence, but differ from each other in at least one of their degrees of freedom, e.g., in one or more of the time of transmission, spatial localization, polarization of light, carrier wavelength, and subcarrier frequency.

For example, a first transmission of an optical symbol at time t_1 and a second
5 transmission of that same optical symbol at time $t_2 > t_1$ represent two different optical variants of the bit-word that the optical symbol encodes. As another example, a first transmission of an optical symbol using carrier wavelength λ_1 and a second (e.g., concurrent) transmission of that optical symbol using carrier wavelength λ_2 similarly represent two different optical variants of the bit-word that the optical symbol
10 encodes. As yet another example, a first transmission of an optical symbol via a first propagation path of a multipath fiber or fiber-optic cable (e.g., via a first core of a multi-core fiber or a first guided mode of a multimode fiber) and a second transmission of that optical symbol via a second propagation path of that multipath fiber or fiber-optic cable (e.g., via a second core of the multi-core fiber or a second
15 guided mode of the multimode fiber) represent two different optical variants of the bit-word that the optical symbol encodes. As yet another example, a first transmission of an optical symbol using a first (e.g., X) polarization and a second transmission of that optical symbol using a second (e.g., Y) polarization represent two different optical variants of the bit-word that the optical symbol encodes.

20 Note that, in each of these examples, the two corresponding optical variants are described as differing from one another in the parameters of just one degree of freedom. However, optical variants may differ from one another in the parameters of two or more degrees of freedom, such as: (i) time and space; (ii) time and wavelength; (iii) time and polarization; (iv) space and wavelength; (v) space and
25 polarization; (vi) wavelength and polarization; (vii) time, space, and wavelength; (viii) time, space, and polarization; (ix) time, wavelength, and polarization; (x) space, wavelength, and polarization; or (xi) time, space, wavelength, and polarization.

The concept of optical variants also applies to (i) optical symbol sequences that carry multiple bit-words and (ii) optical signals that carry the same bit-word
30 using different optical symbols. Other pertinent features of "optical variants" will become more fully apparent, by way of example, from the following more detailed description that is given below in reference to FIGs. 1-6.

Various embodiments rely on an inventive concept, according to which the receiver adds, in a phase-coherent manner, the electrical signals corresponding to multiple (e.g., $M > 1$) copies or variants of the same symbol stream prior to de-modulation and de-coding. Each of these M variants, possibly including scrambled and/or deterministically transformed copies of the symbols, is conveyed from the transmitter to the receiver on orthogonal transmission paths or dimensions, where each variant is altered by different realizations of signal impairments, such as noise and/or signal distortions, from linear and/or nonlinear effects.

FIG. 1 shows a block diagram of an optical transport system **100** according to one embodiment of the invention. System **100** has an optical transmitter **110** that is configured to transmit optical variants that differ from each other in time or polarization, or both. System **100** also has an optical receiver **190** that is configured to process the received optical variants to recover the corresponding original data in a manner that reduces the BER compared to the BER attainable without the use of optical variants. Transmitter **110** and receiver **190** are connected to one another via an optical transport link **140**.

Transmitter **110** receives an input stream **102** of payload data and applies it to a digital signal processor (DSP) **112**. Processor **112** processes input stream **102**, e.g., as further described below in reference to FIG. 2, to generate digital signals **114₁-114₄**. In each signaling interval (time slot), signals **114₁** and **114₂** carry digital values that represent the in-phase (I) component and quadrature-phase (Q) component, respectively, of a corresponding constellation symbol intended for transmission using X-polarized light. Signals **114₃** and **114₄** similarly carry digital values that represent the I and Q components, respectively, of the corresponding constellation symbol intended for transmission using Y-polarized light.

An electrical-to-optical (E/O) converter (also sometimes referred to as a front end) **116** of transmitter **110** transforms digital signals **114₁-114₄** into a modulated optical output signal **130**. More specifically, digital-to-analog converters (DACs) **118₁** and **118₂** transform digital signals **114₁** and **114₂** into an analog form to generate drive signals I_X and Q_X , respectively. Drive signals I_X and Q_X are then used, in a conventional manner, to drive an I-Q modulator **124_X**. Based on drive signals I_X and

Q_X , I-Q modulator **124_X** modulates an X-polarized beam **122_X** of light supplied by a laser source **120_X**, thereby generating a modulated optical signal **126_X**.

DACs **118₃** and **118₄** similarly transform digital signals **114₃** and **114₄** into an analog form to generate drive signals I_Y and Q_Y , respectively. Based on drive signals I_Y and Q_Y , an I-Q modulator **124_Y** modulates a Y-polarized beam **122_Y** of light supplied by a laser source **120_Y**, thereby generating a modulated optical signal **126_Y**. A polarization beam combiner **128** combines modulated optical signals **126_X** and **126_Y** to generate optical output signal **130**.

In a representative configuration, processor **112** generates digital signals **114₁**-**114₄** so that, for each bit-word to be transmitted to receiver **190**, optical output signal **130** contains a set of M optical variants carrying that bit-word, where M is an integer greater than one. Conceptually, this set can be viewed as comprising one or more overlapping and/or non-overlapping subsets. For example, there might be a subset consisting of two or more optical variants, in which the optical variants have the same polarization, but different temporal positions in signal **130**. Alternatively or in addition, there might be another subset consisting of two optical variants, in which the optical variants have the same temporal position (the same time slot) in signal **130**, but different polarizations. Furthermore, there might be yet another subset consisting of two optical variants, in which the optical variants have different temporal positions in signal **130** and different polarizations.

FIG. 2 shows a flowchart of a signal-processing method **200** that can be employed by processor **112** (FIG. 1) to transform input data stream **102** into digital signals **114₁**-**114₄** according to one embodiment of the invention.

At step **202** of method **200**, input data stream **102** is subjected to FEC coding, as known in the art, using an appropriate FEC code and data rate. As a result, input data stream **102** is transformed into a corresponding FEC-coded data stream.

At step **204**, the FEC-coded data stream generated at step **202** is converted into two parallel sequences of constellation symbols. This conversion can be accomplished, e.g., by performing the following sub-steps: (a) selecting a portion of the FEC-coded data stream; (b) partitioning the selected portion into bit-words; (c) converting each bit-word into a corresponding set P having M constellation symbols; (d) interspersing the constellation symbols of the different sets P in a prescribed

manner to generate two parallel constellation-symbol sequences S_X and S_Y ; and (e) repeating steps (a)-(d) for a next portion of the FEC-coded data stream.

Regarding sub-steps (a) and (b), the length of the selected portion depends on a desired size of an optical frame and is usually an integer multiple of the bit-word
 5 length. The bit-word length depends on the constellation used by transmitter 110. For example, if a QPSK (quadrature phase-shift keying) constellation is used, then each bit-word has a length of two bits. If an 8-QAM (quadrature amplitude modulation) constellation is used, then each bit-word has a length of three bits, etc.

Regarding sub-step (c), in one embodiment, all M constellation symbols of set
 10 P are the same and generated by direct mapping of the bit-word onto the operative constellation. In another embodiment, the M constellation symbols of set P may contain two or more different constellation symbols obtained through different variants of constellation mapping. These different variants of constellation mapping can be determined using a known transform. One representative example of such a
 15 transform is phase rotation.

As an example of the latter embodiment, let us consider a QPSK constellation, which has four constellation symbols (often represented by points on a complex plane), each encoding a two-bit bit-word. Then, the requisite M constellation symbols that are not all identical can be generated as follows.

20 First, a sequence B_1 having $2M$ bits is formed by concatenating M copies of the bit-word.

Second, a specified transformation is applied to sequence B_1 to generate another sequence B_2 , which also has $2M$ bits. In a representative embodiment, the transformation can be performed according to Eq. (1):

$$25 \quad B_2 = B_1 \text{ XOR } C \quad (1)$$

where C is a predetermined bit sequence having $2M$ bits. In a representative implementation, sequence C is a pseudo-random bit sequence. In other embodiments, other suitable logic functions and/or bit sequences can similarly be used.

Third, sequence B_2 is partitioned into M bit-words, each having two bits.

30 Finally, each of these M bit-words is converted into a corresponding constellation symbol by direct mapping of the bit-word onto the QPSK constellation.

These M constellation symbols are then used to form set P corresponding to the original bit-word.

Note that, in the QPSK constellation, all constellation symbols have the same amplitude, but different phases. In view of this property, the above-described exemplary processing can conceptually be viewed as a phase-scrambling operation, wherein sequence C (see Eq. (1)) serves as a phase-scrambling key. Provided that sequence C is known to receiver 190, the phase of the received signal in each time slot can be unscrambled in a relatively straightforward manner to approximate the signal that would have been received in the time slot without the phase-scrambling.

As another example, let us consider a generic 2^K -QAM constellation, which has 2^K constellation symbols (points), each encoding a K-bit bit-word, where K is an integer greater than one. Then, the requisite set P having M constellation symbols that are not all identical can be generated using the following two steps.

First, the bit-word is converted into a “kernel” constellation symbol A_0 , e.g., by direct mapping of the bit-word onto the operative constellation.

Second, constellation symbol A_0 is transformed into set P of M constellation symbols according to Eq. (2):

$$P = (T_1 A_0, T_2 A_0, \dots, T_M A_0) \quad (2)$$

where each T_j ($j=1, 2, \dots, M$) is a transform selected in a prescribed manner from a group, G, of linear topological transforms T. More specifically, as an algebraic structure, group G has the following property: when any element T of group G operates on a symbol of the operative constellation, the result is a symbol of that same constellation. This resulting symbol can be (i) the same as the initial symbol, i.e., the corresponding transform T is a unity transform, or (ii) different from the initial symbol, i.e., the corresponding transform T is a non-unity transform. A useful representation of group G for a complex-plane representation of the operative constellation is a set of discrete complex values, with the transform operation being implemented as a multiplication of the complex value representing the constellation point and the discrete complex value representing transform T. Some of the discrete complex values may have an absolute value of one and, as such, represent a pure rotation of the constellation points in the complex plane. Some other of the discrete complex values may be real and, as such, represent an amplitude-scaling operation,

not accompanied by a rotation. Yet some other of the discrete complex values may have a non-zero imaginary part and an absolute value that is different from one and, as such, represent a combination of an amplitude compression or expansion accompanied by a rotation in the complex plane. One skilled in the art will understand that the content of group G depends on the topology of the operative constellation.

Regarding sub-step (d), in one embodiment, constellation-symbol sequences S_X and S_Y can be generated according to Eqs. (3a)-(3b):

$$S_X = (p_{11}, p_{31}, \dots, p_{(N-1)1}, p_{12}, p_{32}, \dots, p_{(N-1)2}, \dots, p_{1M}, p_{3M}, \dots, p_{(N-1)M}) \quad (3a)$$

$$S_Y = (p_{21}, p_{41}, \dots, p_{N1}, p_{22}, p_{42}, \dots, p_{N2}, \dots, p_{2M}, p_{4M}, \dots, p_{NM}) \quad (3b)$$

where N is the number of bit-words in the portion selected at sub-step (a); and $P_j = (p_{j1}, p_{j2}, \dots, p_{jM})$ is the set P corresponding to the j-th bit-word, where $j=1, 2, \dots, N$. Note that, for illustration purposes and without limitation, Eqs. (3a)-(3b) assume an even N.

Inspection of Eqs. (3a)-(3b) reveals that constellation-symbol sequences S_X and S_Y defined by these equations are generated by (1) taking the first constellation symbol of each set P_j ($j=1, 2, \dots, N$) and placing these constellation symbols, one by one, in an alternating manner, into sequences S_X and S_Y ; (2) taking the second constellation symbol of each set P_j and placing these constellation symbols, one by one, in an analogous alternating manner, into sequences S_X and S_Y ; and so on until all M constellation symbols of each set P_j are placed into sequences S_X and S_Y . In alternative embodiments, other suitable symbol-interspersing schemes may similarly be used. It has been determined that symbol-interspersing schemes in which two constellation symbols corresponding to the same bit-word are separated from one another by one or more constellation symbols corresponding to one or more other bit-words may have certain advantages.

In one embodiment, the applied transforms can vary from bit-word to bit-word. As an example, T_j may be time-dependent and selected in a prescribed manner as indicated in the following table:

$t=t1$	$t=t2$	$t=t3$	$t=t4$
$T_1=1$	$T_1=1$	$T_1=1$	$T_1=1$
$T_2=1$	$T_2=i$	$T_2=-1$	$T_2=-i$

11

$T_3=1$	$T_3=-1$	$T_3=1$	$T_3=-1$
---------	----------	---------	----------

Note that, in the table, i denotes the imaginary unit.

At step **206**, pilot symbols and/or pilot-symbol sequences may be added to each of sequences S_X and S_Y . One purpose of the added pilot symbols and/or pilot-symbol sequences is to form an optical frame having a well-defined structure. This structure can be used at receiver **190** to distinguish the optical symbols corresponding to the payload data from the pilot symbols/sequences. The pilot symbols/sequences can then be used to perform one or more of (i) time synchronization, (ii) frequency estimation and compensation, and (iii) channel estimation and compensation. An enabling description of possible frame structures and suitable pilot symbols/sequences can be found, e.g., in commonly owned U.S. Patent Application Serial No. 12/964,929 (filed on 12-10-2010), which is incorporated herein by reference in its entirety.

At step **208**, the two constellation-symbol sequences of the optical frame generated at step **206** are used to generate digital signals **114₁-114₄** (FIG. 1). More specifically, the constellation-symbol sequence having sequence S_X and the pilot symbols added to it at step **206** is used to generate digital signals **114₁-114₂**. The constellation-symbol sequence having sequence S_Y and the pilot symbols added to it at step **206** is similarly used to generate digital signals **114₃-114₄**. Appropriate oversampling and/or pulse-shaping techniques may be employed during step **208**, as known in the art.

Referring back to FIG. 1, system **100** has an optical add-drop multiplexer (OADM) configured to add signal **130**, as known in the art, to other optical signals that are being transported via optical transport link **140**. Link **140** is illustratively shown as being an amplified link having a plurality of optical amplifiers **144** configured to amplify the optical signals that are being transported through the link, e.g., to counteract signal attenuation. Note that an optical link that does not have optical amplifiers can alternatively be used as well. After propagating the intended length of link **140**, signal **130** is dropped from the link via another optical add-drop multiplexer, OADM **146**, and directed to receiver **190** for processing. Note that the optical signal applied to receiver **190** by OADM **146** is labeled **130'**, which signifies

the fact that, while in transit between transmitter **110** and receiver **190**, signal **130** may accumulate noise and other signal distortions due to various linear effects and nonlinear effects in the optical fiber. One type of a fiber nonlinear effect is intra-channel four-wave mixing (IFWM), which is a function of the phases and amplitudes of the corresponding optical symbols.

Receiver **190** has a front-end circuit **172** comprising an optical-to-electrical (O/E) converter **160**, four analog-to-digital converters (ADCs) **166₁-166₄**, and an optical local oscillator (OLO) **156**. O/E converter **160** has (i) two input ports labeled S and R and (ii) four output ports labeled 1 through 4. Input port S receives optical signal **130'**. Input port R receives an optical reference signal **158** generated by optical local oscillator **156**. Reference signal **158** has substantially the same optical-carrier frequency (wavelength) as signal **130'**. Reference signal **158** can be generated, e.g., using a tunable laser controlled by a wavelength-control loop (not explicitly shown in FIG. 1) that forces an output wavelength of the tunable laser to closely track the carrier wavelength of signal **130'**.

O/E converter **160** operates to mix input signal **130'** and reference signal **158** to generate eight mixed optical signals (not explicitly shown in FIG. 1). O/E converter **160** then converts the eight mixed optical signals into four electrical signals **162₁-162₄** that are indicative of complex values corresponding to the two orthogonal-polarization components of signal **130'**. For example, electrical signals **162₁** and **162₂** may be an analog in-phase signal and an analog quadrature-phase signal, respectively, corresponding to the X-polarization component of signal **130'**. Electrical signals **162₃** and **162₄** may similarly be an analog in-phase signal and an analog quadrature-phase signal, respectively, corresponding to the Y-polarization component of signal **130'**.

In one embodiment, O/E converter **160** is a polarization-diverse 90-degree optical hybrid (PDOH) with four balanced photo-detectors coupled to its eight output ports. Various suitable PDOHs are commercially available, e.g., from Optoplex Corporation of Fremont, California, and CeLight, Inc., of Silver Spring, Maryland. Additional information on various O/E converters that can be used to implement O/E converter **160** in various embodiments of system **100** are disclosed, e.g., in U.S. Patent Application Publication Nos. 2010/0158521 and 2011/0038631, and

International Patent Application No. PCT/US09/37746 (filed on 03-20-2009), all of which are incorporated herein by reference in their entirety.

Each of electrical signals **162₁-162₄** generated by O/E converter **160** is converted into digital form in a corresponding one of ADCs **166₁-166₄**. Optionally, each of electrical signals **162₁-162₄** may be amplified in a corresponding amplifier (not explicitly shown) prior to the resulting signal being converted into digital form. Digital signals **168₁-168₄** produced by ADCs **166₁-166₄** are processed by a digital signal processor (DSP) **170**, e.g., as further described below in reference to FIG. 3, to recover the data of the original input stream **102** applied to transmitter **110**.

FIG. 3 shows a flowchart of a signal-processing method **300** that can be employed by processor **170** (FIG. 1) to recover data stream **102** from digital signals **168₁-168₄** according to one embodiment of the invention.

At step **302** of method **300**, digital signals **168₁-168₄** are processed to perform one or more of (i) time synchronization, (ii) frequency estimation and compensation, and (iii) channel estimation and compensation, e.g., as described in the above-cited U.S. Patent Application Serial No. 12/964,929.

In a representative implementation, the time-synchronization procedure of step **302** relies on certain properties of pilot-symbol sequences to determine the start of each optical frame. The known structure of the optical frame can then be used to identify time slots that have digital samples and/or digital-signal portions corresponding to the optical symbols carrying the payload data.

The frequency-estimation/compensation procedure of step **302** performs electronic estimation and compensation of a mismatch between the carrier-frequency of input signal **130'** and the frequency of reference signal **158** (see FIG. 1). After the frequency offset is determined, frequency-mismatch can be compensated, e.g., by applying to each digital sample a phase shift equal to the frequency offset multiplied by 2π and the time elapsed between the start of the frame and the temporal position of the digital sample.

The channel-estimation/compensation procedure of step **302** performs electronic estimation and compensation of the phase and amplitude distortions imposed by optical transport link **140**. The channel estimation relies on digital samples corresponding to pilot symbols to determine the channel-response function,

H , of optical transport link **140**. The inverse channel-response function H^{-1} is then applied to the digital samples corresponding to payload data to perform channel compensation.

At step **304**, the corrected signal samples corresponding to the payload data are sorted into sets Z , with each set Z having corrected signal samples corresponding to the optical variants carrying the same bit-word. For example, let us assume, for illustration purposes and without limitation, that the digitization speed of ADCs **166** is such that each of digital signals **168₁-168₄** has a single signal sample per time slot. Then, each set Z of corrected signal samples consists of M complex values z_m (where $m=1, 2, \dots, M$), as expressed by Eq. (4):

$$Z=(z_1, z_2, \dots, z_M) \quad (4)$$

Depending on the polarization of the corresponding optical variant, the real and imaginary parts of each complex value z_m may correspond to (i) the signal samples provided by digital signals **168₁** and **168₂**, respectively, or (ii) the signal samples provided by digital signals **168₃** and **168₄**, respectively.

At step **306**, each set Z of corrected signal samples generated at step **304** is conditioned for coherent summation. In one embodiment, the processor is configured to perform a phase-estimation and phase compensation operation for each element of set Z in the conditioning process. Known pilot symbols or pilots can be used to assist the phase-estimation and phase-compensation operations. In another embodiment, processor **170** is configured to obtain the phase difference between different elements of set Z . The absolute phases of the received samples may not be needed if differential encoding/de-coding is employed in the system.

Step **306** includes additional operations if set P of the original constellation symbols corresponding to set Z has different constellation symbols. For example, if Eq. (2) was used to generate set P at transmitter **110**, then the conditioning processing of step **306** may be performed based on Eq. (5):

$$Z'=(T_1^{-1}z_1, T_2^{-1}z_2, \dots, T_M^{-1}z_M) \quad (5)$$

where Z' is the conditioned set; and T_m^{-1} is the inverse of transform T_m (also see Eq. (2)). For the complex-value representation of transform T_m , inverse transform T_m^{-1} is a complex value that satisfies the condition of $T_m^{-1}T_m = 1$.

Inspection of Eq. (5) reveals that each element $z_m' = T_m^{-1} z_m$ of conditioned set Z' is obtained by applying an inverse of transform T_m , with the latter being the transform that was used at transmitter **110** for the generation of the corresponding optical variant. Note that, similar to set Z (see Eq. (4)), conditioned set Z' has M complex values (i.e., values z_m' , where $m=1, 2, \dots, M$). In the absence of noise and distortions imposed by link **140**, all values z_m' would have been the same, with their common value being the complex value representing constellation point A_0 (see Eq. (2)). However, the noise and distortions imposed by link **140** cause values z_m' to differ from one another. When plotted on a complex plane as points, values z_m' typically form a scatter pattern around the complex value representing constellation point A_0 , with the magnitude of the scatter being dependent on the level of noise and the severity of distortions imposed by link **140**.

At step **308**, for each conditioned set Z' , the constituent values z_m' are summed up to generate a summed value, σ . The summation serves to (i) coherently add the components of values z_m' that represent the original constellation point, e.g., constellation point A_0 (Eq. (2)), and (ii) reduce the relative magnitude of noise/distortions in σ compared to that in individual values z_m' . The reduction occurs because the noise/distortions are incoherent and, as such, tend to average out upon summation.

At step **310**, each summed value σ is mapped onto the operative constellation, in a conventional manner, and decoded to determine the corresponding bit-word. Step **310** may optionally include a sub-step of phase estimation and compensation that corrects or compensates for slowly changing phase shifts between input signal **130'** and reference signal **158** (FIG. 1) and is performed prior to the constellation de-mapping and decoding. Various methods that can be used for this purpose are disclosed, e.g., in U.S. Patent Application Publication Nos. 2008/0152361 and 2008/0075472 and U.S. Patent No. 7,688,918, all of which are incorporated herein by reference in their entirety.

At step **312**, the bit-words generated at step **310** are arranged in the appropriate order to form the corresponding data stream. The order in which the various bit-words are placed in the data stream corresponds to the order that was used

at steps **204(a)**-**204(b)** to partition the original FEC-coded stream into bit-words (see the description of step **204**, FIG. 2).

At step **314**, the data stream generated at step **312** is processed to perform error correction using data redundancies that were introduced at step **202** (FIG. 2).

5 The resulting error-corrected data stream has the payload data of data stream **102**. Many FEC methods suitable for implementing step **314** are known in the art. Several representative examples of such methods are disclosed, e.g., in U.S. Patent Nos. 7,734,191, 7,574,146, 7,424,651, 7,212,741, and 6,683,855, all of which are incorporated herein by reference in their entirety.

10 FIG. 4 shows a block diagram of an optical transport system **400** according to another embodiment of the invention. System **400** has an optical transmitter **410** that is configured to transmit optical variants that differ from each other in one or more of time, space, polarization, carrier wavelength, and subcarrier frequency in orthogonal frequency-division multiplexed (OFDM) systems. System **400** also has an optical
15 receiver **490** that is configured to process the received optical variants to recover the corresponding original data in a manner that reduces the BER compared to the BER attainable without the use of optical variants. Transmitter **410** and receiver **490** are connected to one another via an optical transport link **440**.

Transmitter **410** has a front-end circuit **416** having L electrical-to-optical
20 (E/O) converters **116₁-116_L** (also see FIG. 1), each configured to use a different respective carrier wavelength selected from a specified set of wavelengths λ_1 - λ_L . Transmitter **410** further has a wavelength multiplexer (MUX) **420** configured to combine optical output signals **418₁-418_L** generated by E/O converters **116₁-116_L**,
respectively, and apply a resulting WDM signal **430** to an OADM **436** for adding it to
25 the signals that are being transported through link **440**.

Each of E/O converters **116₁-116_L** generates its respective optical output signal **418** based on a corresponding set **414** of digital signals supplied by a DSP **412**. Each signal set **414** has four digital signals that are analogous to digital signals **114₁-114₄** (FIG. 1). Signal sets **414₁-414_L** are generated by DSP **412** based on an input
30 data stream **402**. In one embodiment, the corresponding processing implemented in DSP **412** is generally analogous to method **200** (FIG. 2). However, one modification to that method is that the number of parallel sequences of constellation symbols is

Comment [FN1]: change Fig to say 418subL instead of 418sub3

now $2L$. Accordingly, sub-step **204(d)** is carried out to distribute the various constellation symbols corresponding to the same bit-word over more than two sequences, e.g., over up to L sequences S_X and up to L sequences S_Y corresponding to different E/O converters **116** (also see Eq. (3)). Steps **206** and **208** are also

5 appropriately modified to accommodate this change.

After propagating through link **440**, signal **430** is dropped from the link (as signal **430'**) via another optical add-drop multiplexer, OADM **446**, and directed to receiver **490** for processing. Receiver **490** has a front-end circuit **472** comprising a wavelength de-multiplexer (DEMUX) **450** and L front-end circuits **172₁-172_L** (also

10 see FIG. 1). Wavelength de-multiplexer (DEMUX) **450** is configured to de-multiplex signal **430'** into its constituent WDM components **452₁-452_L**, each having a corresponding one of carrier wavelengths λ_1 - λ_L . Each of front-end circuits **172₁-172_L** then processes the corresponding one of signals **452₁-452_L**, as described above in reference to FIG. 1, to generate a corresponding one of sets **468₁-468_L** of digital

15 signals, with each set consisting of four digital signals analogous to digital signals **168₁-168₄**, respectively (see FIG. 1).

Signal sets **468₁-468_L** generated by front-end circuit **472** are processed by a DSP **470** to recover the data of original input stream **402** applied to transmitter **410**. In one embodiment, the processing implemented in DSP **470** is generally analogous to

20 method **300** (FIG. 2). However, one modification to that method is that the corrected signal samples for forming each set Z (see step **304** in FIG. 3) are now collected from a larger number of digital signals provided by sets **468₁-468_L**. Steps **306** and **312** are also appropriately modified to accommodate this change and reflect the above-described change to method **200** implemented at transmitter **410**.

FIG. 5 shows a block diagram of an optical transport system **500** according to yet another embodiment of the invention. System **500** has an optical transmitter **510** that can be configured to transmit optical variants that differ from each other in one or more of time, polarization, and space (as represented by a plurality of different propagation paths). System **500** also has an optical receiver **590** that is configured to

30 process the received optical variants to recover the corresponding original data in a manner that reduces the BER compared to the BER attainable without the use of optical variants. Transmitter **510** and receiver **590** are connected to one another via

an optical transport link comprising a multi-core fiber **540**, different cores of which provide the plurality of propagation paths.

Transmitter **510** has an electrical-to-optical (E/O) converter **516** that is analogous to E/O converter **116** (FIG. 1). Transmitter **510** further has an optical splitter **520** and an optical coupler **526**. Optical splitter **520** is configured to split an optical output signal **518** generated by E/O converter **516** into J (attenuated) signal copies **522₁-522_J**, where J is the number of cores in multi-core fiber **540**. Optical coupler **526** is configured to couple each of signals **522₁-522_J** into a corresponding core of multi-core fiber **540**.

E/O converter **516** is configured to generate optical output signal **518** based on a set **514** of four digital signals supplied by a DSP **512**. The four signals of set **514** may be analogous to digital signals **114₁-114₄**, respectively (see FIG. 1). Signal set **514** is generated by DSP **512** based on an input data stream **502**.

In one configuration, the processing implemented in DSP **512** is generally analogous to method **200** (FIG. 2). Note, however, that optical splitter **520** and optical coupler **526** operate to increase the number of optical variants per bit-word by a factor of J. Thus, if signal **518** has n_1 optical variants per bit-word, then an output signal **530** generated in this configuration by transmitter **510** contains $n_2 (= J \times n_1)$ optical variants per bit-word.

In an alternative configuration, method **200** is not invoked, and DSP **512** configures E/O converter **516** to operate in a conventional manner, e.g., by generating a single “optical variant” per bit-word. However, after optical splitter **520** and optical coupler **526** process said single “optical variant,” output signal **530** generated by transmitter **510** in this alternative configuration still contains more than one optical variant (e.g., J optical variants) per bit-word.

After propagating through multi-core fiber **540**, signal **530** is applied (as signal **530'**) to receiver **590** for processing. Receiver **590** has an optical coupler **546** and a front-end circuit **572** comprising J front-end circuits **172₁-172_J** (also see FIG. 1). Optical coupler **546** is configured to direct light from each core of multi-core fiber **540** to a corresponding one of front-end circuits **172₁-172_J**. Each of front-end circuits **172₁-172_J** then processes the signal received from optical coupler **546**, as described above in reference to FIG. 1, to generate a corresponding one of sets **568₁-568_J**, each

having four digital signals analogous to digital signals **168₁-168₄**, respectively (see FIG. 1). In one embodiment, front-end circuits **172₁-172_J** in receiver **590** share a single common OLO **156** (see FIG. 1).

Signal sets **568₁-568_J** generated by front-end circuit **572** are processed by a DSP **570** to recover the data of original input stream **502** applied to transmitter **510**. In one embodiment, the processing implemented in DSP **570** is generally analogous to method **300** (FIG. 3). However, one modification to method **300** to adapt it to receiver **590** is that (i) a separate instance of step **302** is performed for each digital-signal set **568** and (ii) at step **304**, the corrected signal samples for each set **Z** are collected from the results of two or more of these separate instances of step **302**.

FIG. 6 shows a block diagram of an optical receiver **600** that can be used as optical receiver **590** (FIG. 5) according to one embodiment of the invention. Receiver **600** is shown as receiving optical signal **530'** (also see FIG. 5). As already indicated above, signal **530'** carries optical variants corresponding to different cores of multi-core fiber **540**. These optical variants are applied to an optical combiner **646** configured to combine them in the optical domain into a combined optical signal **648**. Combined optical signal **648** is then applied to front-end circuit **172** for detection. In this feature, receiver **600** differs from receiver **590** (FIG. 5), wherein each optical variant is detected separately using a corresponding one of front-end circuits **172₁-172_J**. Front-end circuit **172** of receiver **600** converts combined optical signal **648** into a corresponding set **668** of four digital signals, as already indicated above. Signal set **668** is then processed by a DSP **670** to recover the data of original input stream **502**, based on which optical signal **530** was generated in transmitter **510** (FIG. 5).

In one embodiment, the processing implemented in DSP **670** is generally analogous to method **300** (FIG. 3). However, one modification to method **300** to adapt it to receiver **600** is that step **302** now includes signal-equalization processing. More specifically, if $X(f)$ is the spectrum of optical signal **518** generated by transmitter **510** (see FIG. 5), then the spectrum $Y(f)$ of optical signal **648** can be approximated by Eq. (6):

$$Y(f) = X(f) \times [H_1(f) + H_2(f) + \dots + H_J(f)] \equiv X(f) \times H(f) \quad (6)$$

where $H_j(f)$ is the individual transmitter-to-receiver transfer function corresponding to the j -th core of multi-core fiber **540**, where $j=1, 2, \dots, J$. Typically, the overall

transmitter-to-receiver transfer function $H(f)$ will vary randomly over time. The signal-equalization processing implemented in DSP 670 serves to adaptively determine and track $H(f)$, without having to determine and track the individual transfer functions $H_i(f)$. DSP 670 can then calculate the inverse transfer function $H^{-1}(f)$ and apply it to the digital-signal samples at step 302 of method 300 to perform channel compensation. The result of this processing is substantially the same as that obtained by DSP 570 in receiver 590 by performing a separate instance of step 302 on digital-signal samples provided by each of signal sets 568_i-568_j. Note, however, that because $H(f)$ may have relatively deep frequency fades, the use of OFDM in the corresponding optical transport system may be particularly beneficial for this type of detection of optical variants. In one embodiment, the circuitry that implements Eq. (6) is based on a finite impulse response (FIR) filter.

While this invention has been described with reference to illustrative embodiments, this description is not intended to be construed in a limiting sense.

Although system 500 (FIG. 5) has been described in reference to multi-core fiber 540, it can be adapted for use with a multimode fiber, wherein different guided modes of the multimode fiber provide the spatial degrees of freedom for the generation and transmission of optical variants. Representative optical couplers that can be used in conjunction with the multimode fiber in such a system are disclosed, e.g., in U.S. Patent Application Publication Nos. 2010/0329670 and 2010/0329671 and U.S. Patent Application Serial Nos. 12/986,468, filed on 01-07-2011, and 12/827,284, filed on 06-30-2010, all of which are incorporated herein by reference in their entirety.

In one embodiment, different cores of multi-core fiber 540 can be configured to concurrently transmit optical variants corresponding to different bit-words. It may be beneficial, however, to configure multi-core fiber 540 so that, at any time, at least two of its cores transmit optical variants corresponding to the same bit-word.

Furthermore, system 500 can be modified in a relatively straightforward manner to use optical variants that differ from each other in one or more of time, polarization, carrier wavelength, and space. In one embodiment, such a modification can be accomplished, e.g., by (i) replacing E/O converter 516 by front-end circuit 416, (ii) replacing each of front-end circuits 172_i-172_j by a corresponding instance of

front-end circuit **472**, and (iii) appropriately reconfiguring DSPs **512** and **570** (see FIGs. 4 and 5).

In various alternative embodiments of methods **200** and **300**, the order of certain processing steps may be changed to differ from the order indicated in FIGs. 2 and 3, respectively.

In one embodiment, step **202** of method **200** and step **314** of method **300** are optional and can be omitted.

Various modifications of the described embodiments, as well as other embodiments of the invention, which are apparent to persons skilled in the art to which the invention pertains are deemed to lie within the principle and scope of the invention as expressed in the following claims.

Unless explicitly stated otherwise, each numerical value and range should be interpreted as being approximate as if the word "about" or "approximately" preceded the value of the value or range.

It will be further understood that various changes in the details, materials, and arrangements of the parts which have been described and illustrated in order to explain the nature of this invention may be made by those skilled in the art without departing from the scope of the invention as expressed in the following claims.

The use of figure numbers and/or figure reference labels in the claims is intended to identify one or more possible embodiments of the claimed subject matter in order to facilitate the interpretation of the claims. Such use is not to be construed as necessarily limiting the scope of those claims to the embodiments shown in the corresponding figures.

Although the elements in the following method claims, if any, are recited in a particular sequence with corresponding labeling, unless the claim recitations otherwise imply a particular sequence for implementing some or all of those elements, those elements are not necessarily intended to be limited to being implemented in that particular sequence.

Reference herein to "one embodiment" or "an embodiment" means that a particular feature, structure, or characteristic described in connection with the embodiment can be included in at least one embodiment of the invention. The appearances of the phrase "in one embodiment" in various places in the specification

are not necessarily all referring to the same embodiment, nor are separate or alternative embodiments necessarily mutually exclusive of other embodiments. The same applies to the term "implementation."

Also for purposes of this description, the terms "couple," "coupling,"
5 "coupled," "connect," "connecting," or "connected" refer to any manner known in the art or later developed in which energy is allowed to be transferred between two or more elements, and the interposition of one or more additional elements is contemplated, although not required. Conversely, the terms "directly coupled," "directly connected," etc., imply the absence of such additional elements.

10 The present inventions may be embodied in other specific apparatus and/or methods. The described embodiments are to be considered in all respects as only illustrative and not restrictive. In particular, the scope of the invention is indicated by the appended claims rather than by the description and figures herein. All changes that come within the meaning and range of equivalency of the claims are to be
15 embraced within their scope.

A person of ordinary skill in the art would readily recognize that steps of various above-described methods can be performed by programmed computers. Herein, some embodiments are intended to cover program storage devices, e.g., digital data storage media, which are machine or computer readable and encode
20 machine-executable or computer-executable programs of instructions where said instructions perform some or all of the steps of methods described herein. The program storage devices may be, e.g., digital memories, magnetic storage media such as a magnetic disks or tapes, hard drives, or optically readable digital data storage media. The embodiments are also intended to cover computers programmed to
25 perform said steps of methods described herein.

The description and drawings merely illustrate the principles of the invention. It will thus be appreciated that those of ordinary skill in the art will be able to devise various arrangements that, although not explicitly described or shown herein, embody the principles of the invention and are included within its spirit and scope.
30 Furthermore, all examples recited herein are principally intended expressly to be only for pedagogical purposes to aid the reader in understanding the principles of the invention and the concepts contributed by the inventor(s) to furthering the art, and are

to be construed as being without limitation to such specifically recited examples and conditions. Moreover, all statements herein reciting principles, aspects, and embodiments of the invention, as well as specific examples thereof, are intended to encompass equivalents thereof.

5 The functions of the various elements shown in the figures, including any functional blocks labeled as “processors,” may be provided through the use of dedicated hardware as well as hardware capable of executing software in association with appropriate software. When provided by a processor, the functions may be provided by a single dedicated processor, by a single shared processor, or by a
10 plurality of individual processors, some of which may be shared. Moreover, explicit use of the term “processor” or “controller” should not be construed to refer exclusively to hardware capable of executing software, and may implicitly include, without limitation, digital signal processor (DSP) hardware, network processor, application specific integrated circuit (ASIC), field programmable gate array (FPGA),
15 read only memory (ROM) for storing software, random access memory (RAM), and non volatile storage. Other hardware, conventional and/or custom, may also be included. Similarly, any switches shown in the figures are conceptual only. Their function may be carried out through the operation of program logic, through dedicated logic, through the interaction of program control and dedicated logic, or even
20 manually, the particular technique being selectable by the implementer as more specifically understood from the context.

 It should be appreciated by those of ordinary skill in the art that any block diagrams herein represent conceptual views of illustrative circuitry embodying the principles of the invention. Similarly, it will be appreciated that any flowcharts, flow
25 diagrams, state transition diagrams, pseudo code, and the like represent various processes which may be substantially represented in computer readable medium and so executed by a computer or processor, whether or not such computer or processor is explicitly shown.

CLAIMS

What is claimed is:

1. An apparatus comprising an optical receiver that comprises:
a front-end circuit configured to convert an optical input signal into a
5 corresponding plurality of digital electrical signals; and
a processor configured to:
process the plurality of digital electrical signals to generate a first set of values
corresponding to a first bit-word;
sum the values of the first set to generate a summed value; and
10 map the summed value onto a constellation to determine the first bit-word;
and
wherein, in response to the optical input signal having at least a first optical
variant and a second optical variant, each carrying the first bit-word, the processor is
configured to include into the first set at least one value that corresponds to the first
15 optical variant and at least one value that corresponds to the second optical variant.
2. The apparatus of claim 1, wherein the first optical variant and the second
optical variant differ from one another in one or more of time of arrival at the optical
receiver, spatial localization, polarization of light, carrier wavelength, and subcarrier
20 frequency.
3. The apparatus of claim 1, wherein:
the first optical variant and the second optical variant carry different constellation
symbols; and
25 the processor is configured to generate the first set of values by applying different
respective transforms to the digital electrical signals corresponding to the first optical
variant and to the second optical variant.
4. The apparatus of claim 1, wherein the first optical variant and the second
30 optical variant differ from one another in polarization of light, wherein:

the front-end circuit comprises a polarization-diverse optical hybrid configured to generate a first set of electrical signals corresponding to the first optical variant and a second set of electrical signals corresponding to the second optical variant; and

the plurality of digital electrical signals includes at least one digital signal
5 corresponding to said first set of electrical signals and at least one digital signal corresponding to said second set of electrical signals.

5. The apparatus of claim 1, wherein the first optical variant and the second optical variant differ from one another in carrier wavelength, wherein:

10 the front-end circuit comprises a wavelength de-multiplexer configured to de-multiplex the optical input signal into:

a first optical signal having a first carrier wavelength, said first carrier wavelength being a carrier wavelength of the first optical variant; and

15 a second optical signal having a second carrier wavelength, said second carrier wavelength being a carrier wavelength of the second optical variant; and

the plurality of digital electrical signals includes at least one digital signal corresponding to the first optical signal and at least one digital signal corresponding to the second optical signal.

20 6. The apparatus of claim 1, wherein the first optical variant and the second optical variant differ from one another in spatial localization.

7. The apparatus of claim 6, wherein:

25 the front-end circuit comprises an optical coupler configured to receive the optical input signal from a multi-core fiber and generate:

a first optical signal corresponding a first core of the multi-core fiber, said first core being a core carrying the first optical variant; and

a second optical signal corresponding a second core of the multi-core fiber, said second core being a core carrying the second optical variant; and

30 the plurality of digital electrical signals includes at least one digital signal corresponding to the first optical signal and at least one digital signal corresponding to the second optical signal.

8. The apparatus of claim 6, wherein:

the front-end circuit comprises an optical coupler configured to receive the optical input signal from a multimode fiber and generate:

5 a first optical signal corresponding a first guided mode of the multimode fiber, said first guided mode being a mode carrying the first optical variant; and

a second optical signal corresponding a second guided mode of the multimode fiber, said second guided mode being a mode carrying the second optical variant; and

10 the plurality of digital electrical signals includes at least one digital signal corresponding to the first optical signal and at least one digital signal corresponding to the second optical signal.

9. The apparatus of claim 1, wherein the processor is further configured to:

15 sort digital-signal samples corresponding to the digital electrical signals into a plurality of sets Z, each set Z having digital-signal samples corresponding to a respective one bit-word; and

condition each set Z to generate a corresponding set of values adapted for coherent summation;

sum the values of each conditioned set to generate a respective summed value;

20 map each summed value onto the constellation to determine the respective one bit-word;

arrange said determined bit-words in a specified order to generate a data stream; and

perform FEC-based error correction on said data stream.

25

10. An apparatus, comprising an optical transmitter configured to generate an optical output signal in response to an input data stream in a manner that causes the optical output signal to have at least a first optical variant and a second optical variant, both corresponding to a first bit-word, wherein the first and second optical variants differ from one another in at least one of carrier wavelength, spatial localization, and constellation mapping.

30

1/6

FIG. 1

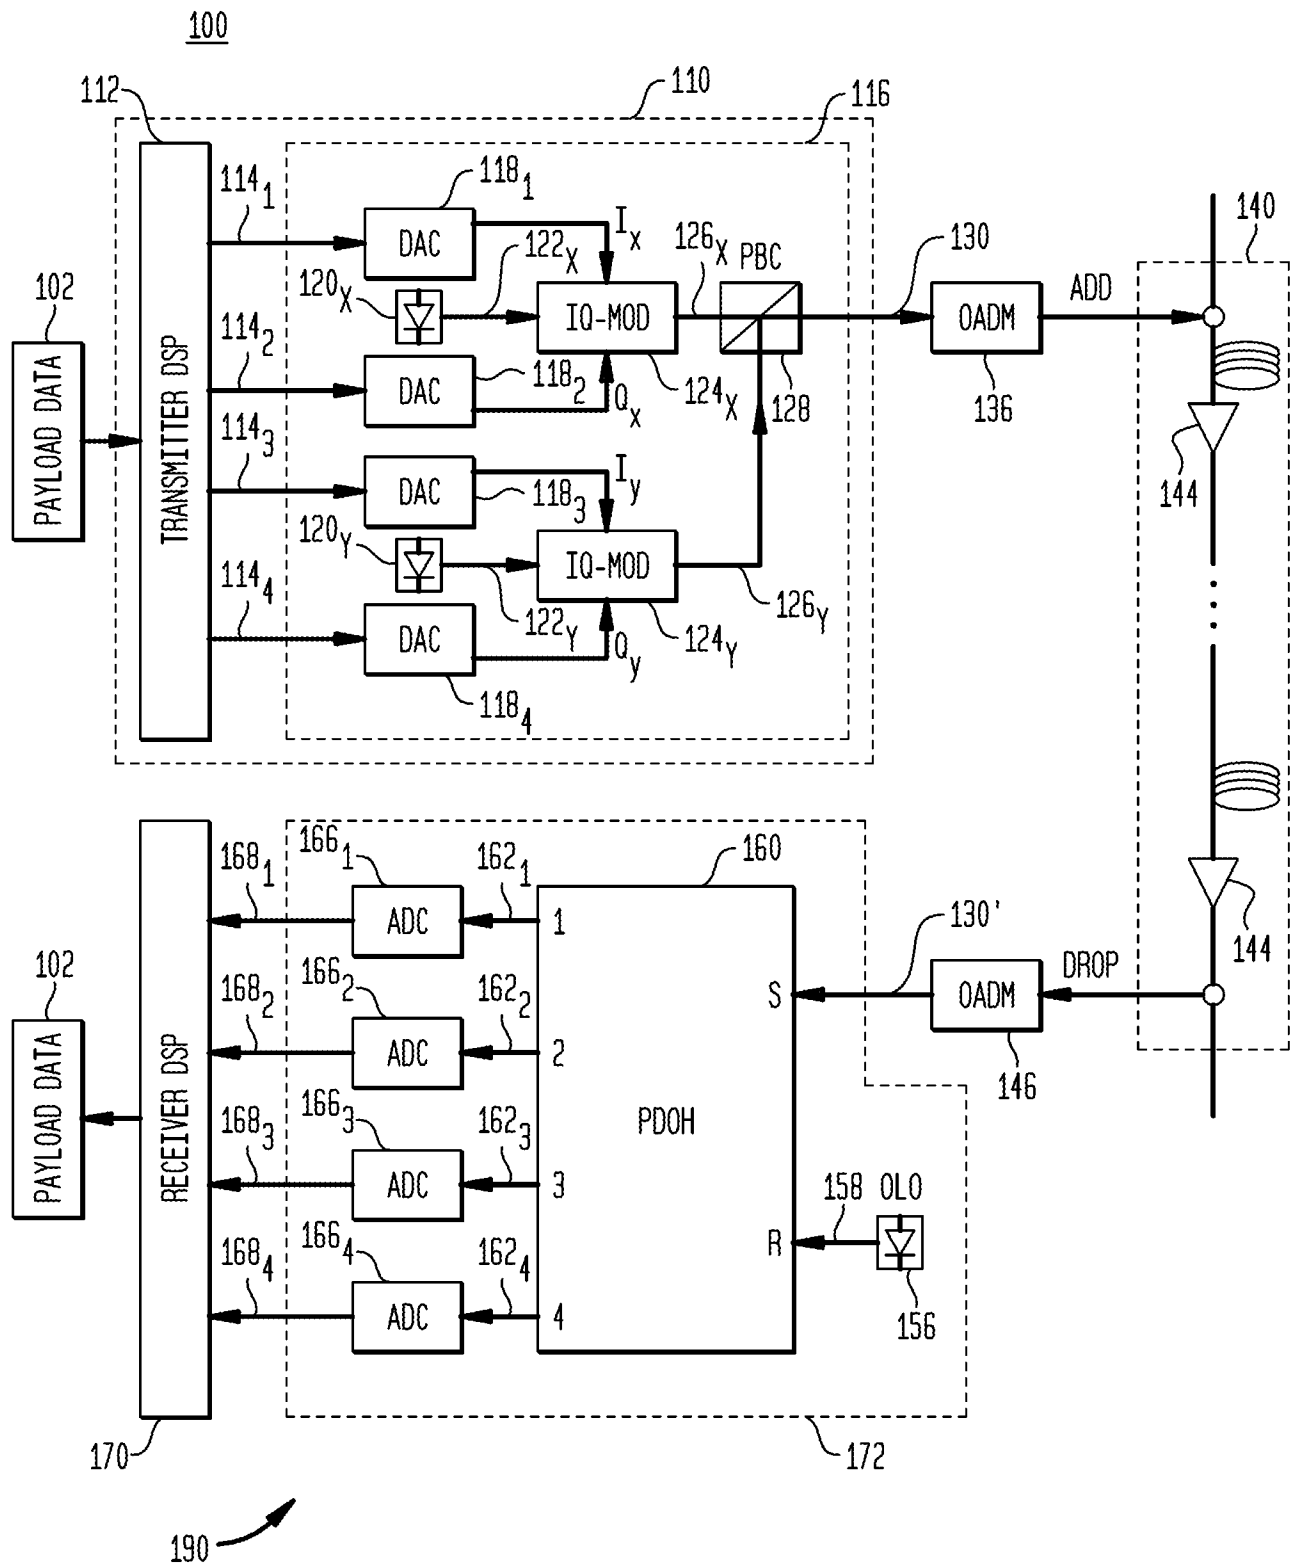
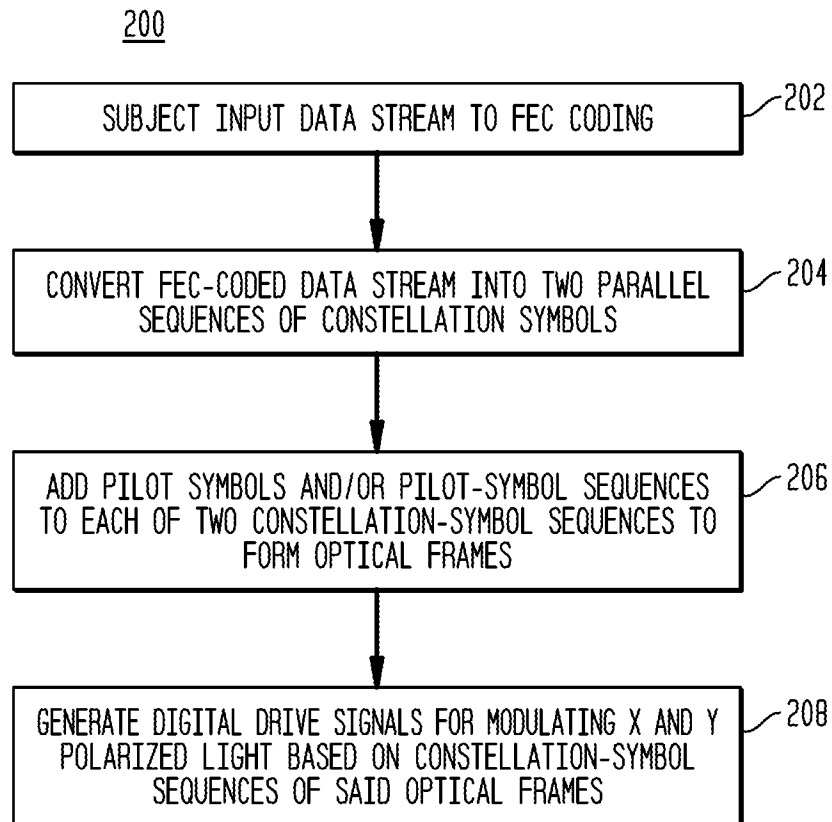
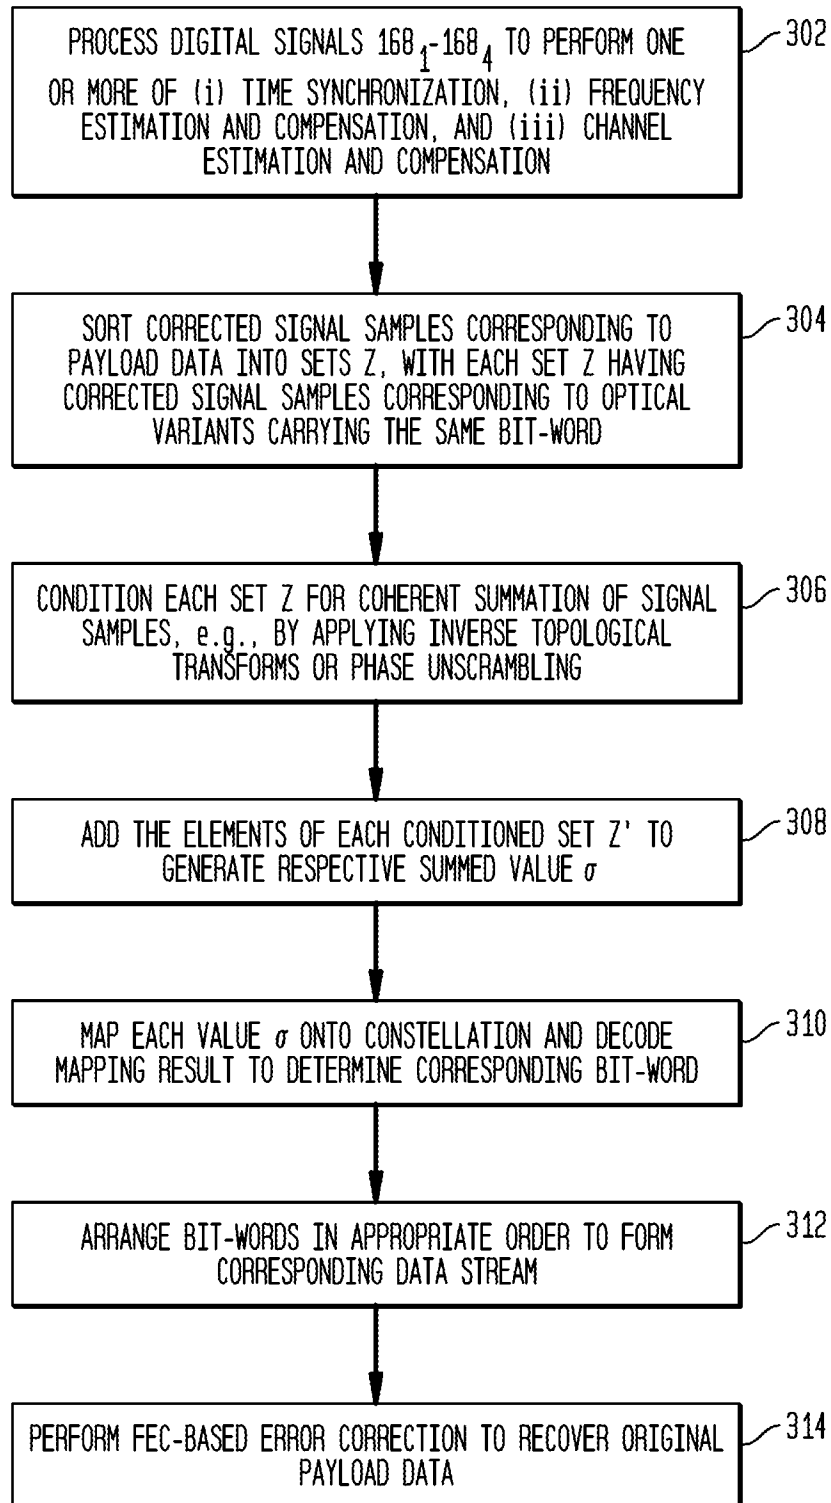


FIG. 2

3/6

FIG. 3

300

4/6

FIG. 4

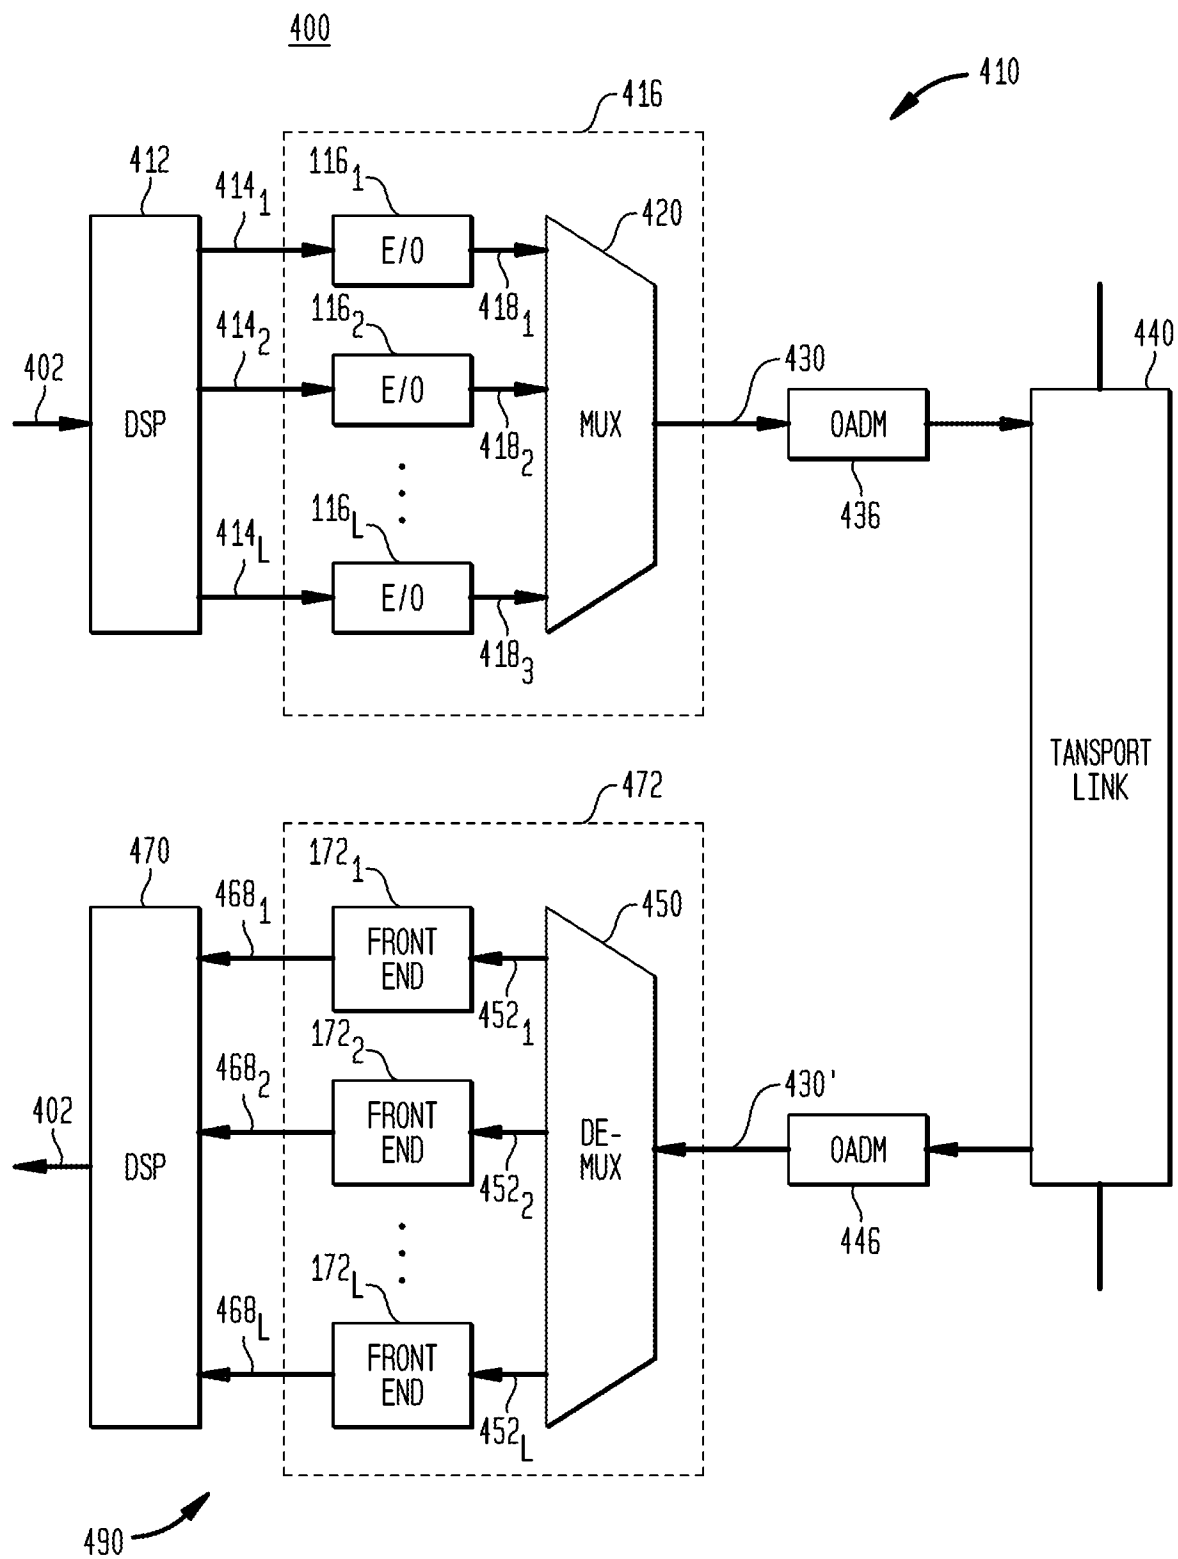


FIG. 5

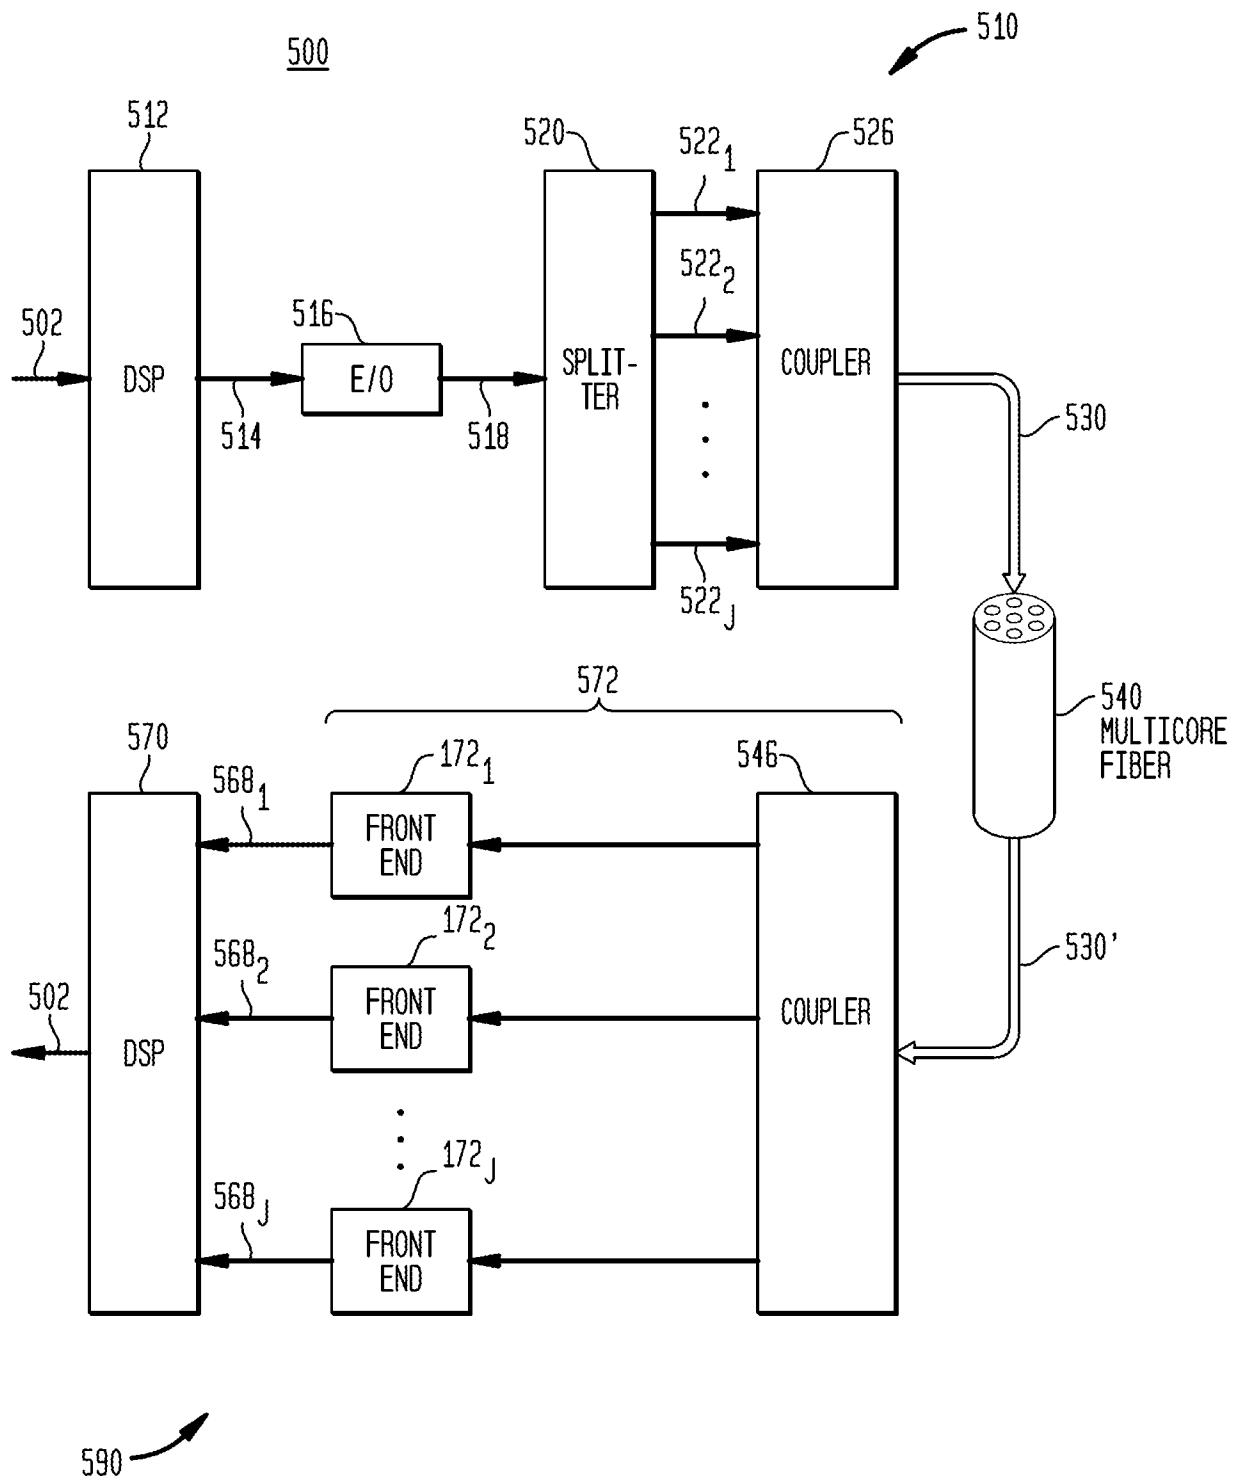
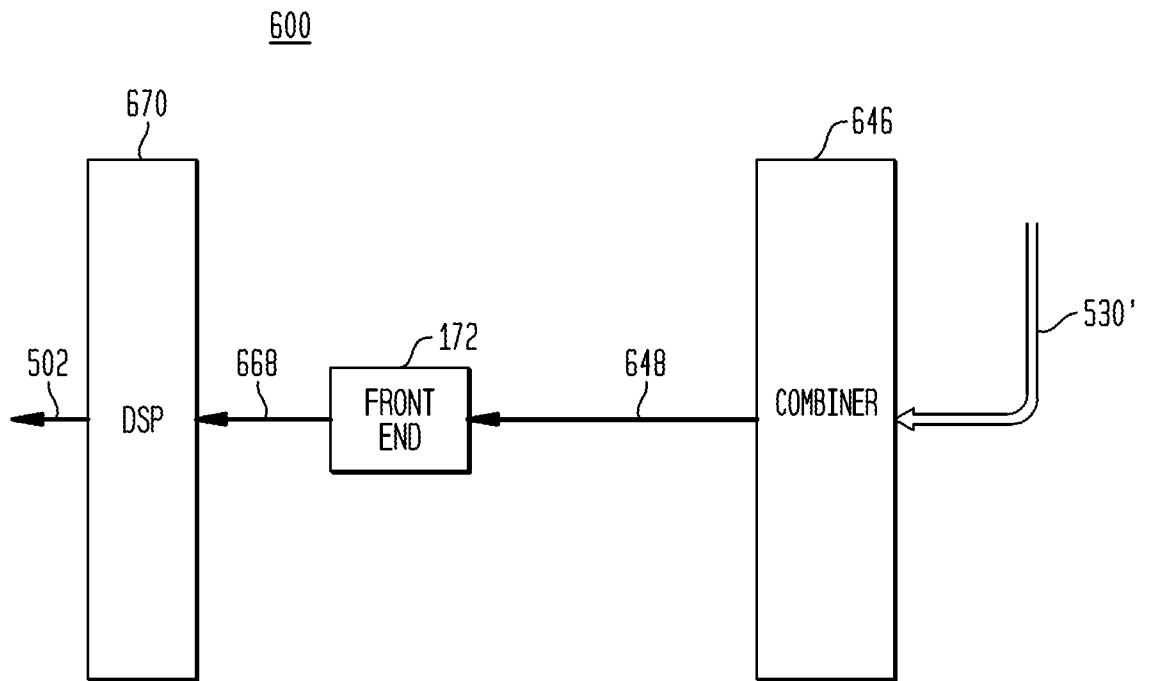


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/054755

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04B10/155 H04B10/158
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04B H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, INSPEC, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 263 465 B1 (GEHLOT NARAYAN L [US]) 17 July 2001 (2001-07-17) figures 1B,1C,3A column 4, line 10 - column 4, line 51 column 4, line 61 - column 5, line 42 -----	1-3,5-10
X	PAN Z ET AL: "Intrabit polarization diversity modulation for the mitigation of PMD effects", IEEE PHOTONICS TECHNOLOGY LETTERS, IEEE SERVICE CENTER, PISCATAWAY, NJ, US, vol. 14, no. 10, 1 October 2002 (2002-10-01), pages 1466-1468, XP011432458, ISSN: 1041-1135, DOI: 10.1109/LPT.2002.802393 the whole document ----- -/--	1-4,9,10



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

16 November 2012

Date of mailing of the international search report

23/11/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Petitit, Nicolas

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/054755

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 191 726 A1 (TELLABS DENMARK AS [DK]) 27 March 2002 (2002-03-27) paragraph [0017] paragraph [0019] paragraphs [0025] - [0027] figure 3	1-10
X	----- US 2008/279564 A1 (HAN YAN [US] ET AL) 13 November 2008 (2008-11-13) figures 1,2,3,4,5 paragraphs [0013] - [0018] paragraphs [0026] - [0028] -----	1-10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2012/054755

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6263465	B1	17-07-2001	NONE
EP 1191726	A1	27-03-2002	NONE
US 2008279564	A1	13-11-2008	NONE