



(11) EP 1 453 314 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
08.02.2012 Bulletin 2012/06(51) Int Cl.:
H04N 5/93 (2006.01) H04N 5/85 (2006.01)

(21) Application number: 02783793.9

(86) International application number:
PCT/JP2002/012791

(22) Date of filing: 05.12.2002

(87) International publication number:
WO 2003/049434 (12.06.2003 Gazette 2003/24)

(54) **INFORMATION RECORDING APPARATUS AND METHOD, INFORMATION REPRODUCING APPARATUS AND METHOD, INFORMATION RECORDING PROGRAM, INFORMATION REPRODUCING PROGRAM, RECORDING MEDIUM, AND INFORMATION RECORDING MEDIUM**
 INFORMATIONSAUZEICHNUNGSVORRICHTUNG UND -VERFAHREN,
 INFORMATIONSWIEDERGABEVORRICHTUNG UND -VERFAHREN,
 INFORMATIONSAUZEICHNUNGSPROGRAMM, INFORMATIONSWIEDERGABEPROGRAMM,
 AUFZEICHNUNGSMEDIUM UND INFORMATIONSAUZEICHNUNGSMEDIUM
 APPAREIL D'ENREGISTREMENT D'INFORMATIONS ET PROCEDE ASSOCIE, APPAREIL DE REPRODUCTION D'INFORMATIONS ET PROCEDE ASSOCIE PROGRAMME D'ENREGISTREMENT D'INFORMATIONS, PROGRAMME DE REPRODUCTION D'INFORMATIONS, SUPPORT D'ENREGISTREMENT ET SUPPORT D'ENREGISTREMENT D'INFORMATIONS

(84) Designated Contracting States:
DE FR GB

- KODA, Takeshi,
c/o Pioneer Corporation
Kawasaki-shi
Kanagawa 212-0031 (JP)
- TAKAKUWA, Nobuyuki,
c/o Pioneer Corporation
Kawasaki-shi,
Kanagawa 212-0031 (JP)
- FUKUDA, Yasuko
Tachikawa-shi,
Tokyo 190-0011 (JP)

(30) Priority: 07.12.2001 JP 2001374947

(74) Representative: Grünecker, Kinkeldey,
Stockmair & Schwanhäusser
Anwaltssozietät
Leopoldstrasse 4
80802 München (DE)(43) Date of publication of application:
01.09.2004 Bulletin 2004/36(56) References cited:

EP-A- 1 052 644	WO-A-00/51346
JP-A- 11 205 719	JP-A- 2000 013 720
JP-A- 2000 253 364	US-A- 6 072 934

(60) Divisional application:
10003587.2 / 2 197 206
10003589.8 / 2 197 207(73) Proprietor: Pioneer Corporation
Kanagawa 212-0031 (JP)(72) Inventors:

- KANEGAE, Tohru
Tokorozawa-shi,
Saitama 359-0041 (JP)
- NAKAHARA, Masanori
Kiyose-shi
Tokyo 204-0023 (JP)
- SAWABE, Takao,
c/o,
Pioneer Corporation
Kawasaki-shi,
Kanagawa 212-0031 (JP)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**Technical Field**

[0001] The present invention relates to an apparatus for and a method of recording information, an apparatus for and a method of reproducing information, a recording medium, and an information recording medium and, more particularly, to an apparatus for and a method of recording information which are intended, in order that information recorded in a recording medium may be reproduction-controlled, to record this information, an apparatus for and a method of reproducing information which are intended to reproduce the information that has been recorded while performing reproduction control with respect to it, and a recording medium having recorded therein the information recording program, or information reproducing program, or information for performing the reproduction control.

Background Art

[0002] In recent years, information recording/reproducing apparatuses which enable moving picture image information to be recorded into a large capacity of recording medium such as a DVD (Digital Versatile Disc), etc. and at the same time enable such moving picture image information to be reproduced have been being generalized.

[0003] And, in each of those information recording/reproducing apparatuses, it is constructed in the way in which, as described, for example, in Japanese Patent Application Laid-Open No. 2000-35375, for making easy the search, etc. of the respective moving picture image information that has been recorded, a representative picture image (the "thumb-nail picture image") symbolically representing the content of the respective moving picture image information is recorded in the recording medium separately from that moving picture image information; and, when reproducing the respective moving picture image information, the corresponding representative picture image is displayed in advance of the time when performing that reproduction to thereby enable a searching of the moving picture image information, etc. to be reproduced.

[0004] On the other hand, in the above-described information recording/reproducing apparatus, in a case where reproducing a recording medium having recorded therein specified moving picture image information, etc. (hereinafter referred to, simply, as "the specified moving picture image information, etc.") the presentation of which to a person whose age is below 18 for example is prohibited, in many cases a function to limit the execution of the reproduction processing of the specified moving picture image information, etc. is added to the information recording/reproducing apparatus as the function of this apparatus itself.

[0005] However, in the construction of the above-de-

scribed conventional information recording/reproducing apparatus, although, indeed, executing the reproduction processing of the specified moving picture image information, etc. itself can be limited, up to the reproduction of the above-described representative picture image corresponding to that specified moving picture image information, etc. is not limited. As a result, there was the problem that it is impossible to hide the content of the specified moving picture image information.

[0006] Further, regarding the moving picture image information, etc. containing therein very personal information, as well, similarly, although executing the reproduction processing of that information, etc. itself can be limited, there was the problem that it is impossible to limit up to the reproduction of the representative picture image corresponding to the content of that information, etc.

[0007] Document WO 00/51346 A describes an information recording apparatus for recording an optical recording medium which is capable of recording position information of recording in the form of sector numbers or track numbers on the optical medium. Recording position information is employed as current replay address, and target address, when replay of a certain recorded data portion is requested upon search.

Disclosure of Invention

[0008] Thereupon, the present invention has been made in view of the above-described points in problem and has an object to provide an apparatus for and a method of recording information which, in a state where, as a result of the fact that a representative picture image is inadvertently presented to the user, the content of the moving picture image information, etc. can be prevented from being inadvertently recognized by the user, can record the respective information into a relevant recording medium, an apparatus for and a method of reproducing information which can reproduce that respective information that has been recorded while performing reproduction limitation with respect thereto, and a recording medium having recorded therein the information recording program, information reproducing program, or information for use for the performance of the control of that reproduction.

[0009] This is achieved by the features of the independent claims. Further features and advantages of the present invention are set forth in dependent claims. According to a first aspect of the invention, since, by limiting the presentation of the content information according to the presentation control information including the reproduction list that has been recorded, it is possible to control the presentation of the content information according to the content of the reproduction information, it is possible to prevent the content of the reproduction information from being inadvertently recognized by the user due to the inadvertent presentation of the content information with respect to the user.

[0010] Moreover, one preferred embodiment of the

first aspect is characterized in that the content information is an information which is presented in advance of starting the reproduction processing of the reproduction information based on the reproduction list.

[0011] According to the embodiment, since the content information is presented in advance of the time when starting the reproduction processing of the reproduction information based on the reproduction list, and since, therefore, the presentation of the content information, according to the presentation control information that has been recorded, is limited, it is possible to control the presentation of the content information in advance of the reproduction processing of the reproduction information.

[0012] Further, one preferred embodiment of the first aspect is characterized in that the presentation control information is an information which indicates further whether the reproduction of the reproduction information based on the reproduction list is limited.

[0013] According to the embodiment, since the presentation control information has a meaning which concerns whether limiting the reproduction processing, base on the reproduction list, itself of the reproduction information, and since, therefore, the reproduction processing of the reproduction information itself as well as the presentation of the content information is limited according to the presentation control information, it is possible to prevent the content of the reproduction information from being inadvertently recognized by the user.

[0014] Further, one preferred embodiment of the first aspect is characterized in that the content information includes at least one of a representative picture image information that corresponds to a representative picture image that represents an image contained in the reproduction information, a title information that corresponds to a title representing the reproduction information, a gist information indicating the gist of the reproduction information, and a time/date information indicating a time/date regarding the reproduction information, wherein the reproduction information is reproduced based on the reproduction list.

[0015] According to the embodiment, since the content information contains therein at least one of the representative picture image, title information, gist information, and time/date information, it is possible to prevent that representative picture image, etc. from being inadvertently presented with respect to the user.

[0016] According to a second aspect of the invention, since detecting the presentation control information including in the reproduction list that has been recorded and limiting, according to the limitation content indicated by that presentation control information, either the reproduction processing or the presentation of the content information, it is possible to control the presentation of the content information according to the content of the reproduction information and it is possible to prevent the content of the reproduction information from being inadvertently recognized by the user due to the inadvertent presentation of the content information with respect to

the user.

[0017] According to a third aspect of the invention, since, by limiting the presentation of the content information according to the presentation control information including the reproduction list that has been recorded, it is possible to control the presentation of the content information according to the content of the reproduction information, it is possible to prevent the content of the reproduction information from being inadvertently recognized by the user due to the inadvertent presentation of the content information with respect to the user.

[0018] According to a fourth aspect of the invention, since detecting the presentation control information including the reproduction list that has been recorded and limiting, according to the limitation content indicated by that presentation control information, either the reproduction processing or the presentation of the content information, it is possible to control the presentation of the content information according to the content of the reproduction information and it is possible to prevent the content of the reproduction information from being inadvertently recognized by the user due to the inadvertent presentation of the content information with respect to the user.

[0019] According to a fifth aspect of the invention, the recording computer reads out the recording control program and functions to limit the presentation of the content information according to the presentation control information including in the reproduction list that has been recorded, it is possible to control the presentation of the content information according to the content of the reproduction information, it is possible to prevent the content of the reproduction information from being inadvertently recognized by the user due to the inadvertent presentation of the content information with respect to the user.

[0020] According to a sixth aspect of the invention, the reproducing computer reads out the reproduction control program and functions to detect the presentation control information including the reproduction list that has been recorded and limit, according to the limitation content indicated by that presentation control information, either the reproduction processing or the presentation of the content information, it is possible to control the presentation of the content information according to the content of the reproduction information and it is possible to prevent the content of the reproduction information from being inadvertently recognized by the user due to the inadvertent presentation of the content information with respect to the user.

[0021] According to a seventh aspect of the invention, the computer reads out the program from the information recording medium and it functions to limit the presentation of the content information according to the presentation control information including the reproduction list that has been recorded, it is possible to control the presentation of the content information according to the content of the reproduction information, it is possible to pre-

vent the content of the reproduction information from being inadvertently recognized by the user due to the inadvertent presentation of the content information with respect to the user.

[0022] According to an eighth aspect of the invention, the computer reads out the program from the information recording medium and it functions to detect the presentation control information including the reproduction list from the recording medium and to limit the presentation of the content information based on the detected presentation control information, it is possible to control the presentation of the content information according to the content of the reproduction information and it is possible to prevent the content of the reproduction information from being inadvertently recognized by the user due to the inadvertent presentation of the content information with respect to the user.

[0023] According to a ninth aspect of the invention, since, by reading out the presentation control information including in the reproduction list being recorded in the reproduction list recording region and thereby limiting the presentation of the content information according to the presentation control information, it is possible to control the presentation of the content information according to the content of the reproduction information, it is thereby possible to prevent the content of the reproduction information from being inadvertently recognized by the user due to the inadvertent presentation of the content information with respect to the user.

[0024] Moreover, one preferred embodiment of the ninth aspect is characterized in that the content information is an information which is presented in advance of starting the reproduction processing of the reproduction information based on the reproduction list.

[0025] According to the embodiment, since the content information is presented in advance of the time when starting the reproduction processing of the reproduction information based on the reproduction list, and since, therefore, the presentation of the content information is limited, it is possible to control the presentation of the content information in advance of the reproduction processing of the reproduction information.

[0026] Further, one preferred embodiment of the ninth aspect is characterized in that the presentation control information is an information which indicates further whether the reproduction of the reproduction information based on the reproduction list is limited.

[0027] According to the embodiment, since the presentation control information further has a meaning concerns whether limiting the reproduction processing, based on the reproduction list, itself of the reproduction information, by reading out the presentation control information recorded in the presentation control information recording region and thereby limiting not only the presentation of the content information but also the reproduction processing of the reproduction information itself according to the presentation control information it is possible to prevent the content of the reproduction in-

formation from being inadvertently recognized by the user.

[0028] Further, one preferred embodiment of the ninth aspect is characterized in that the content information includes at least one of a representative picture image information that corresponds to a representative picture image that represents an image contained in the reproduction information, a title information that corresponds to a title representing the reproduction information, a gist information indicating the gist of the reproduction information, and a time/date information indicating a time/date regarding the reproduction information, wherein the reproduction information is reproduced based on the reproduction list.

[0029] According to the embodiment, since the content information contains therein at least one of the representative picture image, title information, gist information, and time/date information, it is possible to prevent that representative picture image, etc. from being inadvertently presented to the user.

Brief Description of Drawings

[0030]

Figure 1 is a view illustrating a recording format according to a first embodiment of the present invention;
 Figure 2 is a block diagram illustrating a schematic construction of an information recording/reproducing apparatus according to the first embodiment of the present invention;
 Figure 3 is a block diagram illustrating the detailed construction of a menu screen producing circuit according to the first embodiment of the present invention;
 Figure 4 is a flow chart illustrating the recording process according to the first embodiment of the present invention;
 Figure 5 is a flow chart illustrating the editing process according to the first embodiment of the present invention;
 Figure 6 is a flow chart illustrating the reproduction list display process according to the first embodiment of the present invention;
 Figure 7 shows three examples of display of the menu screen according to the first embodiment of the present invention, in which Figure 7A is a view illustrating examples of display (I) of the menu screen according to the first embodiment of the present invention, Figure 7B is a view illustrating examples of display (II) of the menu screen according to the first embodiment of the present invention, Figure 7C is a view illustrating examples of display (III) of the menu screen according to the first embodiment of the present invention;
 Figure 8 is a flow chart (II) illustrating the reproduction list display process according to the first embod-

iment of the present invention;

Figure 9 shows three examples of display of the menu screen according to the first embodiment of the present invention, in which Figure 9A is a view illustrating examples of display (IV) of the menu screen according to the first embodiment of the present invention, Figure 9B is a view illustrating examples of display (V) of the menu screen according to the first embodiment of the present invention, Figure 9C is a view illustrating examples of display (VI) of the menu screen according to the first embodiment of the present invention;

Figure 10 is a flow chart illustrating the reproduction list selection process according to the first embodiment of the present invention;

Figure 11 is a flow chart illustrating the reproduction process according to the first embodiment of the present invention;

Figure 12 is a view illustrating a recording format according to a second embodiment of the present invention;

Figure 13 is a flow chart illustrating the recording process according to the second embodiment of the present invention;

Figure 14 is a flow chart illustrating the editing process according to the second embodiment of the present invention;

Figure 15 is a flow chart illustrating the reproduction list selection process according to the second embodiment of the present invention;

Figure 16 is a view illustrating a recording format according to a third embodiment of the present invention;

Figure 17 is a flow chart illustrating the recording process according to the third embodiment of the present invention;

Figure 18 is a flow chart illustrating the editing process according to the third embodiment of the present invention;

Figure 19 is a flow chart illustrating the reproduction list display process according to the third embodiment of the present invention;

Figure 20 is a flow chart (II) illustrating the reproduction list display process according to the third embodiment of the present invention;

Figure 21 is a flow chart illustrating the reproduction list selection process according to the third embodiment of the present invention;

Figure 22 is a flow chart illustrating the reproduction process according to the third embodiment of the present invention;

Figure 23 is a view illustrating a recording format according to a fourth embodiment of the present invention;

Figure 24 is a flow chart illustrating the recording process according to the fourth embodiment of the present invention; and

Figure 25 is a flow chart illustrating the editing proc-

ess according to the fourth embodiment of the present invention.

Best Mode for Carrying Out the Invention

5

[0031] Next, a preferred embodiment of the present invention will now be explained with reference to the drawings.

10

[0032] It is to be noted that the embodiments explained below are the ones in which the present invention has been applied to an information recording/reproducing apparatus wherein information can be recorded and reproduced with respect to a disc-like recording medium (concretely, for example, a DVD enabling rewrite of information with respect thereto a plurality of times, etc. and each of these media is hereinafter referred to simply as "the optical disc") enabling optical recording/reproduction of information with respect thereto a plurality of times.

15

20 (I) First embodiment

[0033] First, a first embodiment of the present invention will be explained using Figures 1 to 11.

25

(A) Embodiment of the recording format

[0034] Initially, before concretely explaining the construction of an information recording/reproducing apparatus according to the first embodiment, using Figure 1,

30

an explanation will be given of the recording format that is used when recording information with respect to the optical disc by the use of that information recording/reproducing apparatus according to the first embodiment. Incidentally, Figure 1 is a diagram illustrating a recording format (physical format) of the respective information according to the first embodiment.

35

[0035] As illustrated in Figure 1, after information has been recorded, with the information recording/reproducing apparatus, with respect to an optical disc 1 according

40

to the first embodiment, there are formed on the optical disc 1 sequentially from its inner-peripheral side the following three areas. The first area is a lead-in area LI in which there is recorded starting information that is to be read when starting reproduction processing of the information recorded (more specifically, starting information containing therein, for example, the radiation intensity of a light beam for reproduction processing, etc.), the second area is a data area DA in which there are recorded that information to be reproduced, reproduction control information for controlling the way of reproducing that information, etc., and the third area is a lead-out area LO in which there is recorded ending information that is to be read out when ending the reproduction processing of the information recorded.

45

[0036] Next, within the data area DA, there are recorded general information GM, menu control information MC, a for-use-as-menu static image data group MD, mark control information KC, a for-use-as-mark static im-

50

55

[0037] Finally, the data area DA is divided into a plurality of sectors, and each sector is recorded with information.

age data group KD, a reproduction (play) list information group PLS, an attribute information group CIS, a real information group DS, and etceteras information ET that is to be recorded into within the data area DA, in the way in which they have their own divisional regions.

[0037] Of those divisional regions, as the general information GM, there are recorded user interface information UI which is information that is displayed to the user when reproducing the information recorded within the data area DA (namely, information having the user interface function), number of reproduction lists information NPL which is information that indicates the total number of reproduction lists recorded within the data area DA in the way described later, a code number PIN according to the present invention which is used when having had display-prohibited a representative picture image representative-ly indicating the contents of its corresponding reproduction list, etc., and etceteras information ETG which is other information falling under the category of the general information. Incidentally, regarding this code number PIN, in case of the first embodiment, the code numbers PIN associated with all information recorded in the optical disc 1 are recorded in the interior of the general information GM region.

[0038] Next, the menu control information MC is control information which is used when showing, as a menu, to the user the representative picture image representative of picture image information, etc. reproduced according to its corresponding reproduction list stored within the reproduction list group PLS region before reproducing it.

[0039] Further, as the for-use-as-menu static image data group MD, the static image data corresponding to the representative picture image that is menu-displayed according to the menu control information MG is recorded in units of a reproduction list. In connection with this, each item of static image data has added thereto an identification information identifiable from one another and, when actually reproducing the information according to the content of the reproduction list, that static image data that exists every reproduction list is extracted by using that identification information as a clue.

[0040] Next, the mark control information KC is control information which, in order to, for example, cause entry of the code number, is used, for example, when a mark (e.g., an implication icon IC as later described) for entry of that code number is shown to the user together with the menu.

[0041] Further, as the for-use-as-mark static image data group KD, there is recorded static image data corresponding to the marks that are shown according to the mark control information KC. At this time, as in the case of the representative picture image, each static image data has added thereto an identification information identifiable from one another and, when a necessary mark is shown, a corresponding necessary static image data is extracted using that identification information as a clue.

[0042] Also, as the reproduction (play) list information group PLS there is recorded a plurality of pieces as illus-

trated in Figure 1 the reproduction list PL that is used to control the manner of reproducing that is executed when reproducing real information as later described (specifically the manner of reproducing such as the sequential order of reproducing the respective real information, which portion of the respective real information is to be reproduced, the reproduction speed of the respective real information itself, etc.).

[0043] In connection with this, the reproduction lists of two kinds are recorded. Namely, as the first kind, there are recorded real reproduction lists RPL1, RPL2, ..., each of that is in 1:1 correspondence with the corresponding respective real information as later described and the number of that is the same as that of those real information items, and that are used to reproduce one item of real information in completely the same manner as that which was executed when that item of real information was recorded in the optical disc 1. Next, as the second kind, there are recorded virtual reproduction lists VPL that are used to reproduce, as in the case of connecting part of one item of real information and part of another and consecutively reproducing them, part of each of a plurality of real information items in the manner in which those parts are virtually combined together using their corresponding real reproduction (play) lists RPL and in the manner in which those parts go over the divisions each made between each two of the items of real information. At this time, the number of those virtual reproduction lists VPL is set in the way to have no relevancy to the number of the real information items.

[0044] Further, within each of the reproduction lists (either the real reproduction lists RPL or the virtual reproduction lists VPL), as illustrated in Figure 1, there are included the following. A reproduction limit flag PCF that indicates whether limiting the reproduction of the real information indicated by that reproduction list PL (more specifically whether prohibiting the reproduction of that information with respect to a person other than those who are specified), a reproduction list display limit flag PHF that indicates whether limiting the presentation with respect to the user of the representative picture image for use as menu, itself, corresponding to the real information reproduced according to that reproduction list PL, for-use-as-menu representative picture image information SN which is identification information indicating the representative picture image for use as menu that corresponds to the reproduction list PL, name information NM that indicates the name of the real information reproduced according to that reproduction list PL, gist information GL which is text information indicating the gist of the real information, and etceteras information ETP which is other information falling under the category of the reproduction list PL.

[0045] Here, as the etceteras information ETP, specifically, there are included information indicating the sequential order of reproduction, address information that indicates the recording position on the optical disc 1 at which there is recorded a portion of the real information

that is to be reproduced, information that indicates the reproduction speed of that real information, information that indicates the date on which the reproduction list PL itself was produced, information that indicates the attribute information as later described which should be referred to when reproducing, etc.

[0046] Also, as the content of the reproduction control flag PCF, specifically, it is set to "1" when the content of the real information D that is to be reproduced according to the reproduction list PL in which is contained that reproduction control flag PCF is the content with respect to which reproduction control should be performed such as the one in which the reproduction with respect to a person other than those who are specified should be prohibited, and that is set to "0" when that content is the one which should not be reproduction-controlled.

[0047] Further, as the content of the reproduction list display prohibition flag PHF, specifically, it is set to "1" when the display of the reproduction list PL in which is contained the reproduction list display prohibition flag PHF, itself, should be prohibited on the menu screen as later described, namely, the display of the representative picture image corresponding to the reproduction list PL should be prohibited on the menu screen, and that is set to "0" when the display of the representative picture image is not prohibited.

[0048] Next, as the attribute information group CIS, there are recorded attribute information items corresponding to the respective real information items, which are attribute information items C11, C12, C13, ..., C1n indicating the attributes (kinds) of those respective real information items, by the number that is the same as that of the real information items. At this time, as the attributes, specifically, there are, for example, a genre's name under which the content of the corresponding real information falls, recording date on which that real information was recorded, and information indicating whether that real information is text information, image information, or voice information. And, these information items are recorded as the attribute information.

[0049] Finally, as the real information group DS, one or multiple real information items D1, D2, D3, ..., Dn are recorded as the information that is to be actually reproduced, together with identification information identifiable from one another. At this time, as this real information, for example, a single piece of film, a single piece of music, etc. is respectively recorded as one item of real information D.

(B) Embodiments of the construction and operation of the information recording/reproducing apparatus

[0050] Next, the construction and operation of the information recording/reproducing apparatus according to the first embodiment which records/reproduces the real information D with the use of the recording format illustrated in Figure 1 will be explained using Figures 2 to 10.

[0051] First of all, the construction and the entire op-

eration of the information recording/reproducing apparatus will be explained using Figure 2. Incidentally, Figure 2 is a block diagram illustrating the outline construction of the information recording/reproducing apparatus.

[0052] As illustrated in Figure 2, the information recording/reproducing apparatus S according to the first embodiment comprises a pickup 2 serving as a detecting device, an A/D (Analog/Digital) converter 3, an MPEG (Moving Picture Coding Expert Group) encoder 4, multiplexers 5 and 10, a recording encoder 6, a recording circuit 7, a reproducing circuit 8, a reproducing decoder 9, an MPEG decoder 11, a menu screen producing circuit 12, a D/A converter 13, a static image encoder 14, a buffer 15, a spindle motor 16, a CPU 17 serving as a reproduction information recording device, a control information recording device, a limiting device, and a prohibiting device, a servo circuit 18, a display part 19, an operation part 20, and a switch 22.

[0053] Further, as illustrated in Figure 3, the menu screen producing circuit 12 comprises a capture part 23, a scale reduction changing part 24, a memory 25, a GUI (Graphical Users Interface) screen producing part 26, and a synthesizing part 27.

[0054] Next, the schematic operation of each of the respective constituent members will be explained using Figures 1 to 3.

[0055] Initially, an explanation will be given of a case where information to be recorded from the outside (concretely this information to be recorded includes both image information and voice information.) is recorded onto the optical disc 1.

[0056] When an information signal Sin corresponding to the information to be recorded is input from the outside and, along therewith, a recording button not illustrated is operated in the operation part 20, first, the A/D converter 3 digitizes that information signal Sin to produce a digital signal Sd and outputs to the MPEG encoder 4.

[0057] And, the MPEG encoder 4, according to a control signal S7 that is output from the CPU 17, performs compression of the digital signal Sd that is input on in accordance with the MPEG 2 method, to thereby produce a compression signal Se and outputs it to the multiplexers 5 and 10.

[0058] And, the multiplexer 5, according to a control signal S5 that is output from the CPU 17, performs, when necessary, switching between the compression signal Se that is input on and a buffer signal Sbo as later described to thereby produce a changeover recording signal Smr and outputs it to the recording encoder 6.

[0059] And, the encoder 6, according to a control signal S3 that is output from the CPU 17, executes with respect to the changeover recording signal Smr that is input on processing for converting the format of the changeover recording signal Smr into the recording format illustrated in Figure 1, the formatting process, to thereby produce a recording encoded signal Sre and outputs to the recording circuit 7.

[0060] At this time, as the formatting process, specifi-

cally, first, according to the control signal S_3 , when necessary, the changeover recording signal Smr that is input is output to the CPU 17 as is. And, the CPU 17, according to the changeover recording signal Smr , produces the above-described general information GM, menu control information MC, for-use-as-menu static image data group MD, mark control information KC, for-use-as-mark static image data group KD, reproduction (play) list information group PLS including the respective reproduction lists PL, attribute information group CIS, real information group DS, and etceteras information ET and outputs these to the recording encoder 6 as the control signal S_3 . And, as a result of this, the recording encoder 6 produces the recording encoded signal Sre in accordance with the recording format illustrated in Figure 1. Incidentally, the information for production of the above-described virtual reproduction lists VPL, namely, identification information indicating respective parts of the relevant real information D that should fall under the virtual reproduction list VPL, information indicating the sequential order of reproducing those respective parts, etc. are input from the operation part 20 during the formatting process.

[0061] Next, the recording circuit 7, according to a control signal S_2 that is output from the CPU 17, converts the recording encoded signal Sre into a recording signal Sr for use for recording and outputs the resulting signal to the pickup 2. At this time, in the recording circuit 7, the "Write Strategy" processing, etc. are executed with respect to the recording encoded signal Sre so as to form in the optical disc 1 the pits the configuration of which accurately corresponds to the information that is to be recorded.

[0062] Thereafter, the pickup 2, according to the recording signal Sr that is output from the recording circuit 7, drives a light source not illustrated, such as a semiconductor laser, within this pickup 2 to thereby produce a light beam B such as laser light and radiate it onto the information recording surface of the optical disc 1 and thereby form the pits corresponding to the recording signal and thereby record this recording signal Sr on the optical disc 1. At this time, the optical disc 1 is rotated in a prescribed number of rotations by a spindle motor 16 that is driven according to a spindle control signal Ssm as later described. Incidentally, on the optical disc 1, for example, pits corresponding to the recording signal Sr are formed in accordance with the phase change method, whereby this recording signal Sr is recorded.

[0063] On the other hand, the above-described compression signal Se that is output to the multiplexer 10 passes through this multiplexer 10 and is output as a reproduction changeover signal Smp to the MPEG decoder 11.

[0064] And, the MPEG decoder 11, according to a control signal S_9 that is output from the CPU 17, executes expansion processing with respect to the reproduction changeover signal Smp that is input on (at the time of recording information the compression signal Se itself) in accordance with the MPEG 2 method, and outputs the

resulting signal to the menu screen producing circuit 12, static image encoder 14, and one input terminal of the switch 22, as a decoded signal Sdc .

[0065] Next, the static image encoder 14, according to a control signal S_{11} that is output from the CPU 17, encodes, as a static image, the image that has been selected, for being made a representative picture image within the menu screen through the execution of a process as later described, from the image information contained in the decoded signal Sdc that is input on. And the static image encoder 14 outputs the resulting signal to the buffer 15 as a static image encoded signal Sse .

[0066] As a result of this, the buffer 15, according to a control signal S_8 that is output from the CPU 17, temporarily stores the static image encoded signal Sse and reads it out and outputs to the multiplexer 5 as the buffer signal Sbo .

[0067] On the other hand, at the time of information recording, the switch 22 is changed over to the decoded signal Sdc side according to a control signal S_{13} that is output from the CPU 17.

[0068] And, the decoded signal Sdc is output from the switch 22 to the D/A converter 13 as a changeover signal Sch .

[0069] Next, the D/A converter 13 makes the changeover signal Sch analog to produce an output signal $Sout$ corresponding to the information signal Sin and thereby to output it to a later described monitor outside, speaker, not illustrated, outside, etc.

[0070] At this time, when recognizing that the recording button not illustrated in the operation part 20 has been operated according to a command signal Sc from that operation part 20, the CPU 17 produces the above-described respective control signals $S_2, S_3, S_5, S_7, S_8, S_{11}$, and S_{13} and outputs these signals to the above-described respective constituent members to thereby control the above-described respective operations for recording.

[0071] Through the performance of the above-explained series of operations at the time of information recording, the image or voice, which corresponds to the recording signal Sr that is presently being recorded, can be recorded while monitoring it on a real-time basis. It is to be noted that at this time information recording the menu screen producing circuit 12 is left out of operation.

[0072] Next, the operation that is performed when reproducing the information that is recorded on the optical disc 1 will be explained.

[0073] At the time of information reproduction, first, when in the operation part 20 a reproduction button therein that is not illustrated is operated, the pickup 2 radiates a reproduction light beam B onto the optical disc 1 that is rotating and produces, according to that reflected light, a detection signal Sp corresponding to the pit formed in the optical disc 1, and outputs it to the reproducing circuit 8.

[0074] Next, the reproducing circuit 8, according to a control signal S_1 that is output from the CPU 17, amplifies

the detection signal Sp that has been output, with a prescribed amplification factor, and performs reshaping of that waveform to thereby produce a reproduction signal Spp and outputs it to the reproducing decoder 9.

[0075] And, the reproducing decoder 9, according to a control signal S₄ that is output from the CPU 17, executes unformatting process, which corresponds to the formatting process in the recording encoder 6, with respect to the reproduction signal Spp that is input on, to thereby produce a reproduction decoded signal Spd and outputs it to the multiplexer 10.

[0076] Next, the multiplexer 10, according to a control signal S₆ that is output from the CPU 17, causes the reproduction decoded signal Spd that is input on to pass there through and outputs it to the MPEG decoder 11 as the reproduction changeover signal Smp.

[0077] And, the MPEG decoder 11, according to a control signal S₉ that is output from the CPU 17, executes the above-described expansion processing with respect to the reproduction changeover signal Smp that is input on, to thereby produce the decoded signal Sdc. Then, it outputs the decoded signal Sdc to the menu screen producing circuit 12 and one input terminal of the switch 22.

[0078] As a result of this, the menu screen producing circuit 12, according to a control signal S₁₂ that is output from the CPU 17, using an image that is designated from within the decoded signal Sdc that is input on by that control signal S₁₂, produces a menu screen (including therein the above-described representative picture image) for selecting which reproduction list PL the real information D should be reproduced in accordance with when reproducing information. And, it outputs the resulting signal to the other input terminal of the switch 22 as a menu signal Smy.

[0079] And, the switch 22, according to a control signal S₁₃ that is output from the CPU 17, performs switching between the menu signal Smy that is input on and the decoded signal Sdc and outputs to the D/A converter 13 as the changeover signal Sch.

[0080] As a result of this, the D/A converter 13 makes analog the changeover signal Sch and produces an output signal containing therein either one of the information signal Sin and the menu screen signal corresponding to the menu signal Smy and outputs it to a later described monitor outside, speaker, not illustrated, outside, etc.

[0081] At this time, the CPU 17, when recognizing according to a command signal Sc from the operation part 20 that a reproduction button not illustrated in that operation part 20 has been operated, produces the above-described control signals S₁, S₄, S₆, S₉, S₁₂, and S₁₃ and outputs them to the above-described relevant constituent members to thereby control the above-described respective operations for reproduction.

[0082] In parallel with those respective information recording or information reproducing operations, the CPU 17 produces a control signal Ss for performing servo control of the spindle motor 16 and pickup 2 and outputs it to the servo circuit 18. The servo circuit 18, according

to the control signal Ss, produces a spindle control signal Ssm for controlling the rotation of the spindle motor 16 and outputs it to the spindle motor 16. On the other hand, the servo circuit 18 produces, according to that control

5 signal Ss, a pickup control signal Ssp for performing the "tracking servo control" and "focus servo control" in the pickup 2 and outputs it to the pickup 2. And, according to that pickup control signal Ssp, the pickup 2 performs recording of the recording signal Sr or detection of the

10 detection signal Sp while performing tracking servo control and focus servo control with respect to the light beam B.

[0083] Incidentally, the information that is needed in order for the user to control the above-described operation of the information recording/reproducing apparatus S is displayed on the display part 19 according to a display signal Sdp from the CPU 17.

[0084] Next, the operation of the respective constituent member within the menu screen producing circuit 12 when reproducing information will be explained using Figure 3.

[0085] As illustrated in Figure 3, the capture part 23 within the menu screen producing circuit 12, according to a control signal S₁₄ contained in the above-described control signal S₁₂ that is output from the CPU 17, temporarily stores therein that signal of the decoded signal Sdc input on which corresponds to the above-described representative picture image used for constructing the menu screen, and outputs it to the scale reduction changing part 24 as a capture signal Scp.

[0086] And, the scale reduction changing part 24 changes the image contained in the capture signal Scp into a reduced scale that is necessary for constructing the menu screen, and outputs the resulting signal to the

35 memory 25 as a scale reduction signal Sex.

[0087] Thereafter, the memory 25, after temporarily storing therein the scale reduction signal Sex, outputs it to the synthesizing part 27.

[0088] On the other hand, the GUI screen producing part 26, according to a control signal S₁₅ contained in the above-described control signal S₁₂, produces an image (the "an icon", etc.) , other than the image contained in the scale reduction signal Sex, that is necessary for constructing the menu screen, and outputs that signal to the synthesized part 27 as an image signal Sg.

[0089] And, the synthesizing part 27, according to a control signal S₁₆ contained in the above-described control signal S₁₂, produces a menu screen signal by using the scale reduction signal Sex, image signal Sg, and decoded signal Sdc and outputs it to the switch 22 as the above-described menu signal Smy.

[0090] Next, the concrete operation that is performed when recording the real information D, etc. onto the optical disc 1 through the operation of the information recording/reproducing apparatus S having the above-described construction and in accordance with the recording format illustrated in Figure 1 will be explained using Figure 4. Incidentally, Figure 4 is a flow chart illustrating

the recording process of the real information D according to the first embodiment which is executed, mainly, according to and from the CPU 17.

[0091] In this recording process, initially, it is confirmed whether, in the operation part 20, the start of the recording process has been instructed by a recording button not illustrated (step S1). When the start of the recording process is not instructed (step S1: NO), then, in the operation part 20, it is confirmed whether in the operation part 20 an ending button not illustrated (concretely the power source "off" button, etc.) that indicates the termination of the recording process has been operated (step S13). And, when the ending button is operated (step S13: YES), the recording process according to the first embodiment is terminated as is while, on the other hand, when the ending button is not operated either (step S13: NO), the flow returns to the step S1 and the CPU 17 waits as is.

[0092] On the other hand, when the start of the recording operation has been instructed (step S1: YES), next, recording onto the optical disc 1 of the real information that is input on as the above-described information signal Sin is performed (step S2). And, it is confirmed whether recording of all real information D has been terminated (step S3) and, when not terminated (step S3: NO), the recording process goes on being executed as is (step S2). When having been terminated (step S3: YES), next, the attribute information CI corresponding to the respective real information D that has been recorded is produced and, together therewith, corresponding reproduction list PL is also similarly produced. Then, the attribute information CI and reproduction list PL that have been produced are recorded onto the optical disc 1 in accordance with the recording format illustrated in Figure 1 (step S4).

[0093] Next, it is confirmed according to the content of the operation in the operation part 20 whether the content of the real information D that is reproduced according to the produced reproduction list PL is the one with respect to which there should be performed reproduction control such as, for example, prohibiting the reproduction with respect to a person other than specified users (step S5). When that content is not the one with respect to which no reproduction control should be performed (step S5: NO), the recording process according to the first embodiment is terminated as is. When, on the other hand, that content is the one with respect to which reproduction control should be performed (step S5: YES), it is confirmed (step S6), by searching the general information GM region, whether the code number PIN is already recorded within the general information GM of the optical disc 1 having had recorded therein the real information D and reproduction list PL (steps S2 and S4). And, when the code number PIN is not recorded (step S6: NO), a display indicating that a code number PIN should newly be entered is made on the display not illustrated, etc. to thereby prompt the user to do entry processing. When a new code number PIN has been entered correspondingly thereto (step S7), this entered code number PIN is re-

corded in the region illustrated in Figure 1 within the general information GM (step S8), then the flow proceeds to the succeeding step S9.

[0094] On the other hand, when in the determination 5 made in the step S6 the code number PIN is already recorded (step S6: YES), next, it is confirmed (step S9), according to the operated content of the operation part 20, whether the display of the produced (step S4) reproduction list PL itself should be prohibited on the menu screen, namely whether the display of the representative picture image corresponding to that reproduction list PL should be prohibited on the menu screen. When the display of that representative picture image should not be prohibited (step S9: NO), according to the determination 10 of the step S5 the content of the reproduction control flag PCF that should be included under the corresponding reproduction list PL is set to "1", and, simultaneously, the content of the reproduction list display prohibition flag PHF that should similarly be included under that list PL 15 is set to "0" (step S12).

[0095] On the other hand, when the display of that representative picture image is the one which should be prohibited (step S9: YES), according to the determination made in the step S5 the content of the reproduction control flag PCF that should be included under the corresponding reproduction list PL is set to "1". Simultaneously, the content of the reproduction list display prohibition flag PHF that should similarly be included thereunder is set to "1" (step S10).

[0096] And, at the point in time when setting the content of the reproduction control flag PCF and the content of the reproduction list display flag PHF has respectively finished being performed (steps S10 and S12), the content of the corresponding reproduction list PL that was 30 recorded (step S4) is rewritten (step S11), thereby the series of processing operations for the recording process are terminated.

[0097] Next, the concrete operation of the editing process for editing the real information D, etc. that is executed 40 in accordance with the recording format illustrated in Figure 1 through the operation of the information recording/reproducing apparatus S having the above-described construction will be explained using Figure 5. Incidentally, Figure 5 is a flow chart illustrating the editing process for the real information D according to the first embodiment that is executed, mainly, according to and from the CPU 17. Also, this editing process, concretely, includes processing for producing a new virtual reproduction list VPL, processing for adding/recording new real information D, processing for changing the content of an existing virtual reproduction list VPL, processing for deleting part 45 of existing real information D from the optical disc 1, etc.

[0098] In this editing process, initially, while they are being subjected to control processing such as prohibiting 50 their display through the execution of the processes as later described in detail, the representative picture image corresponding to the respective reproduction list PL recorded on the optical disc 1 is displayed on the display 55

not illustrated (step S40), and, further, by selecting a desired one from among the representative picture images that are being displayed, there is selected a reproduction list PL that is to be edited (step S41).

[0099] When the reproduction list PL is selected, next, whether the real information D corresponding to the selected reproduction list PL is the one with respect to which the above-described reproduction control should be performed is determined by confirming the content of the reproduction control flag PCF within the selected reproduction list (step S42). And, when that real information D is not the one which should be reproduction-controlled (step S42: NO), the flow proceeds to a step S46 as later described as is. On the other hand, when that reproduction list PL is the one which should be reproduction-controlled (step S42: YES), next, whether the representative picture image corresponding to the reproduction list PL has its display prohibited on the menu screen is determined by confirming the content of the reproduction list display prohibition flag PHF within the selected reproduction list PL (step S43). And, for releasing that display prohibition, the display indicating that the code number PIN, which must have been recorded in the optical disc 1, should be entered is made, for example, on the display not illustrated, etc., to thereby prompt the execution of that entry processing. When correspondingly thereto a new code number PIN has been entered (step S44), collation is made between this entered code number PIN and the code number PIN that is kept recorded in the general information GM region, thereby confirmation is made of whether those code numbers coincide with each other (step S45). As a result of this, when the both do not coincide with each other (step S45: NO), determination is made of that the user who should not view that representative picture image is presently executing the editing process, the flow then returning to the step S41 as is, and the CPU 17 makes the user select a different reproduction list PL. On the other hand, when the entered code number PIN and the code number PIN kept recorded coincide with each other (step S45: YES), next, the desired editing process is executed (step S46) while that selected reproduction list PL is being displayed.

[0100] Next, whether the operation to the effect that the editing process has finished being executed has been performed in the operation part 20 is confirmed (step S47). When having not finished (step S47: NO), the editing process goes on being executed as is. When, on the other hand, having already finished (step S47: YES), whether the content of the real information D that is to be reproduced according to the post-edit reproduction list PL is the one with respect to which reproduction control should be performed is determined according to the content of the operation in the operation part 20 (step S48). When that content is not the one with respect to which reproduction control should be performed (step S48: NO), the reproduction control flag PCF in the newly produced reproduction list PL is set to "0" and simultaneously the reproduction list display prohibition flag PHF is set to

"0" (step S49), and the flow proceeds to the processing of a step S56 as later described.

[0101] On the other hand, when the content of the real information D that is to be reproduced according to the post-edit reproduction list PL is the one which should be reproduction-controlled (step S48: YES), next, whether the code number PIN is already recorded within the general information GM region of the optical disc 1 in which the post-edit reproduction list PL was recorded (step S46) is confirmed by searching that general information GM region (step S50). And, when the code number PIN is not recorded (step S50: NO), the display indicating that the code number PIN should be newly entered is made, for example, on the display not illustrated, etc., to thereby prompt the execution of that entry processing. When correspondingly thereto a new code number PIN has been entered (step S51), this entered code number PIN is recorded into the zone illustrated in Figure 1 within the general information GM region (step S52), and the flow proceeds to the succeeding step S53.

[0102] On the other hand, when in the determination of the step S50 the code number PIN is already recorded (step S50: YES), next, whether the display of the representative picture image corresponding to the produced (step S46) reproduction list PL is the one which should be prohibited in the relevant menu screen is confirmed (step S53) according to the content of the operation in the operation part 20. And when that display of the representative picture image is not the one which should be prohibited (step S53: NO), the content of the reproduction control flag PCF that should be included under the corresponding reproduction (play) list PL is set to "1" according to the determination in the step S48 and, simultaneously, the content of the reproduction list display prohibition flag PHF that should similarly be included thereunder is set to "0" (step S55).

[0103] On the other hand, when the display of that representative image is the one which should be prohibited (step S53: YES), the content of the reproduction control flag PCF that should be included under the corresponding reproduction (play) list PL is set to "1" according to the determination in the step S48 and, simultaneously, the content of the reproduction list display prohibition flag PHF that should similarly be included thereunder is set to "1" (step S54).

[0104] And, at the point in time when setting the content of the reproduction control flag PCF and the content of the reproduction list display flag PHF has respectively finished being performed (steps 49 and 55), the content of the corresponding reproduction list PL that was recorded (step S46) is rewritten (step S56), thereby the series of processing operations for the editing process are terminated.

[0105] Next, the detail of the display process (step S40) for the representative image corresponding to the reproduction list PL in the above-described editing process will be explained using Figures 6 and 7. Incidentally, Figure 6 is a flow chart illustrating the display process for

a reproduction list according to the first embodiment, and Figure 7 is a view illustrating an example of display of a reproduction list according to the first embodiment.

[0106] As illustrated in Figure 6, in the display process for the representative picture image in the step S40, first, the optical disc 1 is inserted (step S15) into an insertion opening not illustrated for this optical disc 1 in the information recording/reproducing apparatus S, and all reproduction lists PL recorded in the thus-inserted optical disc 1 are detected (step S16).

[0107] And, regarding the respective reproduction list PL detected, whether their corresponding representative picture image is set to be display-prohibited on the menu screen is determined by confirming the content of the reproduction list display prohibition flag PHF in the respective reproduction list PL (step S17).

[0108] And, when that representative picture image is not display-prohibited (step S17: NO), the corresponding representative picture image is displayed, as indicated by the symbol SI, within the menu screen M illustrated in, for example, Figure 7A and, in addition, according to the necessity, the reproduction list information such as the name, production date, etc. of the reproduction list PL itself is displayed by searching the interior of this reproduction list PL (step S19), then the flow proceeds to a step S20.

[0109] On the other hand, when in the determination of the step S17 the corresponding representative picture image is display-prohibited (step S17: YES), the corresponding representative picture image is displayed, for example, in such a manner as to make an illustration of it within the menu screen of Figure 7A as a for-non-display image SSI, so that the content of that representative picture image cannot be recognized. And, in addition, the above-described reproduction list information is not displayed (step S18).

[0110] And, whether display processing has finished being executed up to the representative picture image corresponding to a final reproduction list PL is confirmed (step S20). When that has not finished being executed (step S20: NO), the flow returns to the step S16, thereby the above-described steps of processing operations are repeated again. On the other hand, when that has already finished being executed (step S20: NO) up to the display of the representative picture image corresponding to the final reproduction list PL, the flow proceeds to step S41 as is.

[0111] Incidentally, in the display process illustrated in Figure 6, regarding the representative picture image the display of that is prohibited, in place of that representative picture image, measure has been taken of displaying the for-non-display image SSI illustrated in Figure 7A. However, other than this, regarding the reproduction list PL the corresponding representative picture image to which is display-prohibited, measure may also be taken of making no display of any images at the corresponding position as illustrated in Figure 8 (see Figure 9A) and of only displaying the representative picture image SI the display

of which is permitted (step S19). At this time, as illustrated in Figure 9A, at a part of the interior of the menu screen M, an implication icon IC that implies the existence of the representative picture image (reproduction list PL) the display of which is prohibited may be displayed together with the representative picture image SI the display of which is permitted.

[0112] Next, the detail of the selection processing (step S41) of the reproduction list PL in the above-described editing process will be explained using Figure 10. Incidentally, Figure 10 is a flow chart illustrating the selection process of the reproduction list according to the first embodiment.

[0113] As illustrated in Figure 10, in the selection process of the reproduction list PL that is executed in the above-described step S41, first, when the menu screen M illustrated in Figure 7 is displayed by the execution of the above-described step S40, next, the processing for selecting the reproduction list PL in that menu screen M is executed in the operation part 20 (step S25), next, it is determined whether that reproduction list PL that has been selected is the one the corresponding representative picture image of that is display-prohibited (step S26).

[0114] And, in a case where the reproduction list PL the representative picture image SI of that is not display-prohibited has been selected (step S26: NO), the flow proceeds to the step S42 as is. On the other hand, in a case where the reproduction list PL the representative picture image SI of that is display-prohibited has been selected (step S26: YES), then, for releasing the prohibition of that display, as illustrated in Figure 7B, a field PT for entry that indicates that the code number PIN which must have been recorded in the optical disc 1 is to be entered is displayed on the menu screen M to thereby prompt the execution of the entry processing. When correspondingly thereto that code number PIN has been entered (step S27), collation is made between that entered code number PIN and the code number PIN recorded in the general information GM region, and it is confirmed whether those code numbers coincide with each other (step S28). As a result of this, when the both do not coincide (step S28: NO), it is determined that the user who should not view that representative picture image is presently executing the edit process. Thereby, the

flow returns to the step S25 to thereby cause the user to select a different reproduction list PL. On the other hand, when the input code number PIN and the recorded code number PIN have coincided with each other (step S28: YES), then as illustrated in Figure 7C a corresponding representative picture image SI is newly displayed within the menu screen M. And, in addition, the reproduction list information such as the name, production date, etc. of the reproduction list PL itself is displayed, according to the necessity, by searching the interior of that reproduction list PL (step S29). Then, the flow proceeds to the above-described step S42.

[0115] Incidentally, in the above-described selection process of the reproduction list PL, in a case where re-

garding the representative picture image SI that is determined as being display-prohibited as illustrated in Figure 8 no display whatsoever is made (step S40), as illustrated in Figure 9A the implication icon is left displayed. And, when in this state that implication icon IC has been selected (step S25), for releasing that prohibition of the display the CPU 17 prompts, as illustrated in Figure 9B, the execution of the entry processing for the code number PIN by displaying the entry field PT on the menu screen M. When correspondingly to this that code number PIN is entered (step S27) and it has coincided with the code number PIN recorded within the general information GM (step S28: YES), as illustrated in Figure 9C the corresponding representative picture image SI is newly displayed within the menu screen M and, in addition, the implication icon IC is deleted from within the menu screen. And, in addition, according to the necessity, the reproduction list information such as the name, production date, etc. of the reproduction list PL itself is displayed by searching the interior of that reproduction list (step S29). Then, the flow proceeds to the step S42.

[0116] Finally, the concrete operation of the reproduction process for reproducing the real information D, etc. from the optical disc 1, which is executed in accordance with the recording format illustrated in Figure 1 by the information recording/reproducing apparatus S having the above-described construction will be explained using Figure 11. Incidentally, Figure 11 is a flow chart illustrating the reproduction process for the real information D according to the first embodiment which is executed mainly according to and from the CPU 17. As illustrated in Figure 11, as the reproduction process, first, the display processing for reproduction list PL (step S60) and the selection processing therefor (step S61) which are the same as those executed in the editing process illustrated in Figure 5 are executed.

[0117] And, when the display processing and selection processing for the reproduction list PL having the contents that are to be reproduced has finished being executed, next, whether the content of the real information D that is reproduced according to the selected reproduction list PL is the one with respect to which reproduction control should be performed is determined (step S62) by confirming the content of the reproduction control flag PCF within that selected reproduction list PL. When that content is not the one with respect to which reproduction control should be performed (step S62: NO), according to the content of this selected reproduction list PL the corresponding real information D is reproduced, as is, from the optical disc 1 (step S66). Further, whether reproduction up to final real information D that is to be reproduced has finished being performed is confirmed (step S67).

[0118] And, when reproduction processing up to the final reproduction list PL has not finished being executed yet (step S67: NO), the flow returns to the preceding step S60 so as to select the next reproduction list PL including therein the real information D to be reproduced. On the

other hand, when reproduction processing has already finished being executed up to the final reproduction list PL to be reproduced (step S67: YES), the reproduction process according to the first embodiment is ended as is.

5 [0119] On the other hand, when in the determination of the step S62 the content of the selected reproduction list PL is the one with respect to which reproduction control should be performed (step S62: YES), next, it is determined whether the selected reproduction list PL is the one PL the corresponding representative picture image of which is display-prohibited (step S63).

[0120] And, when that reproduction list PL is the one PL the representative picture image of which is not determined as being display-prohibited (step S63: NO), the

15 flow proceeds to the step S66 as is. On the other hand, when that reproduction list PL is the one the representative picture image of which is determined as being display-prohibited (step S63: YES), next, for releasing that prohibition of the display, as illustrated in Figure 7B for example, the field PT for entry that indicates that the code number PIN which must have been recorded in the optical disc 1 is to be entered is displayed on the menu screen M to thereby prompt the execution of the entry processing. When correspondingly thereto that code number PIN

20 has been entered (step S64), collation is made between that entered code number PIN and the code number PIN recorded in the general information GM region, and it is confirmed whether those code numbers coincide with each other (step S65). As a result of this, when the both

25 do not coincide (step S65: NO), it is determined that the user who should not view that representative picture image is presently executing the edit process. Thereby, the flow returns to the step S60 to thereby cause the user to select a different reproduction list PL. On the other hand,

30 when the input code number PIN and the recorded code number PIN have coincided with each other (step S65: YES), then for reproducing the real information D corresponding to the content of the reproduction list PL the flow proceeds to the above-described steps S66 and S67, thereby the CPU 17 terminates the reproduction process according to the first embodiment.

[0121] As has been explained above, according to the operation of the information recording/reproducing apparatus of the first embodiment, by limiting (prohibiting) the display of the representative picture image according to the reproduction list display prohibition flag PHF that is recorded, it is possible to control the display of the representative picture image according to the content of the reproduction list PL. Therefore, it is possible to prevent the content of the real information D corresponding to the reproduction list PL from being inadvertently recognized by the user as a result of the inadvertent presentation of the representative picture image to the user.

[0122] Also, since the representative picture image is displayed before starting the reproduction process for the real information D corresponding to the reproduction list PL, by limiting the display of the representative picture image according to the reproduction list display prohibi-

tion flag PHF that is recorded it is possible to control the display of the representative picture image that precedes the reproduction process for the real information D corresponding to the reproduction list PL.

(II) Second embodiment

[0123] Next, a second embodiment that is another embodiment according to the present invention will be explained using Figures 12 to 15.

[0124] Although in the above-described first embodiment the code number PIN has been recorded, within the general information GM, as the code number that is common to every item of the real information D and every piece of the reproduction lists PL, in the second embodiment that will be explained below a specific code number is set every reproduction list PL.

[0125] Incidentally, in Figures 12 to 15 that will be explained below, the same members as those in the corresponding figures used in the first embodiment are denoted by the same member numerals and the explanation of the detail thereof will be omitted.

[0126] Also, since the construction of the information recording/reproducing apparatus according to the second embodiment is the same as that of the information recording/reproducing apparatus S according to the first embodiment illustrated in Figure 2, the explanation of the detail will be omitted.

(A) Embodiment of the recording format

[0127] Initially, before concretely explaining the construction, etc. of the information recording/reproducing apparatus according to the second embodiment, the recording format used when recording information with respect to the optical disc 1 by the information recording/reproducing apparatus according to the second embodiment will be explained using Figure 12. Incidentally, Figure 12 is a view illustrating the recording format (physical format) of the respective information according to the second embodiment.

[0128] As stated above, since in the recording format of the second embodiment a specific code number is set correspondingly to each reproduction list PL, that code number is recorded not within the general information GM but within the respective reproduction list PL.

[0129] Namely, as illustrated in Figure 12, in the recording format according to the second embodiment, the general information GM is constructed of only the user interface information UI, reproduction lists number information NPL, and etceteras information ETG that are the same as those illustrated in Figure 1. On the other hand, the respective reproduction list PL region has recorded therein a code number PPN different every reproduction list PL in addition to the reproduction control flag PCF, reproduction list display prohibition flag PHF, for-use-as-menu representative picture image information SN, name information NM, gist information GL, and etcetera

information ETP that are the same as those illustrated in Figure 1.

[0130] Incidentally, the other construction of the recording format of the second embodiment is the same as the corresponding that of the recording format of the first embodiment illustrated in Figure 1 and therefore the explanation of the detail thereof will be omitted.

(B) Embodiment of the construction and operation of the information recording/reproducing apparatus

[0131] Next, the operation of the information recording/reproducing apparatus according to a second embodiment of the present invention will be explained using Figure 13 to 15.

[0132] First, the recording process for the real information D according to the second embodiment will be explained using FIG. 13.

[0133] Incidentally, Figure 13 is a flow chart illustrating this recording process. Also, in Figure 13, the same processing operations as those in the recording process in the first embodiment illustrated in Figure 4 are denoted by the same step numbers, and the explanation of the detail of that will be omitted.

[0134] In the recording process of the second embodiment, first, the processing operations in the steps S1, S2, S3, S4, S5, S7, and S9 are executed, thereby the recording processing of necessary real information D and the production/recording processing of necessary reproduction list PL and attribute information CI are executed.

[0135] At this time, the operations of processing (steps S6 and S8) regarding the code number PIN within the general information GM such as those executed in the case of the first embodiment are not executed. Also, it results that the code number that is entered in the step S7 is the code number PPN that corresponds to only the reproduction list PL that has become an object with respect to which that code number should at that time be entered.

[0136] And, when, in the determination of the step S9, the display of the representative picture image is determined as being not the one which should be prohibited (step S9: NO), the content of the reproduction control flag PCF that should be included under the corresponding reproduction list PL is set to "1" according to the determination in the step S5, the content of the reproduction list display prohibition flag PHF that should similarly be included thereunder is set to "0", and, in addition, the above-described code number PPN (that is already entered in the step S7) that corresponds to only the reproduction list PL is set (step S31).

[0137] On the other hand, when the display of the representative picture image is the one which should be prohibited (step S9: YES), the content of the reproduction control flag PCF that should be included under the corresponding reproduction list PL is set to "1" according to the determination in the step S5, the content of the reproduction list display prohibition flag PHF that should similarly be included thereunder is set to "1", and, in ad-

dition, the above-described code number PPN that corresponds to only the reproduction list PL is set (step S30). [0137] And, at the point in time when the content of the reproduction control flag PCF, the content of the reproduction list display prohibition flag PHF, and the code number have respectively finished being set (steps S30 and S31), there is rewritten (step S11) the content of the corresponding reproduction list PL that was theretofore recorded (step S4), thereby the series of operations for the recording process is terminated.

[0138] Next, the editing process for the real information D, etc. according to the second embodiment will be explained using Figure 14. Incidentally, this editing process includes processing for producing a new virtual reproduction list VPL, processing for adding/recording new real information D, processing for changing the content of an existing virtual reproduction list VPL, processing for deleting part of existing real information D from the optical disc 1, etc.

[0139] Also, Figure 14 is a flow chart illustrating this editing process. Here, in Figure 14, regarding the processing operations that are the same as those executed in the editing process of the first embodiment illustrated in Figure 5, they are denoted by the same step numbers and the explanation of the detail of those is omitted.

[0140] In the editing process of the second embodiment, first, the processing operations in the steps S40 to S48 illustrated in Figure 5 are executed, thereby necessary editing processing operations with respect to the desired reproduction list PL are executed.

[0141] And, when, in the determination in the step S48, the content of the real information D that is to be reproduced according to the post-edit reproduction list PL is not the one with respect to which reproduction control should be performed (step S48: NO), the reproduction control flag PCF in the newly produced reproduction list PL is set to "0" and simultaneously the reproduction list display prohibition flag PHF is set to "0" (step S49), and, further, setting of the corresponding code number PPN is not performed (step S35). Then, the flow proceeds to the processing of a step S56 as later described.

[0142] On the other hand, when the content of the real information D that is to be reproduced according to the post-edit reproduction list PL is the one which should be reproduction-controlled (step S48: YES), next, the display indicating that the code number PPN corresponding to only the post-edit reproduction list PL should be entered is made, for example, on the display not illustrated, etc., to thereby prompt the execution of that entry processing. When correspondingly thereto a new code number PPN has been entered (step S51), next, whether the display of the representative picture image corresponding to the produced (step S46) reproduction list PL is the one which should be prohibited in the relevant menu screen is confirmed (step S53) according to the content of the operation in the operation part 20. And when that display of the representative picture image is not the one

which should be prohibited (step S53: NO), the content of the reproduction control flag PCF that should be included under the corresponding reproduction (play) list PL is set to "1" according to the determination in the step

5 S48 and, simultaneously, the content of the reproduction list display prohibition flag PHF that should similarly be included thereunder is set to "0" and, further, the code number PPN corresponding to only the reproduction list PL alone is set (step S37).

10 [0143] On the other hand, when the display of that representative image is the one which should be prohibited (step S53: YES), the content of the reproduction control flag PCF that should be included under the corresponding reproduction (play) list PL is set to "1" according to

15 the determination in the step S48 and, simultaneously, the content of the reproduction list display prohibition flag PHF that should similarly be included thereunder is set to "1", and, further, the code number PPN corresponding to only the reproduction list PL alone is set (step S36).

20 [0144] And, at the point in time when setting the content of the reproduction control flag PCF and the content of the reproduction list display prohibition flag PHF and the code number PPN has respectively finished being performed (steps S35, S36 and S37) the content of the cor-

25 responding reproduction list PL that was recorded (step S46) is rewritten (step S56), thereby the series of processing operations for the editing process are terminated.

[0145] Next, the detail of the selection processing (step 30 S41) of the reproduction list PL in the above-described editing process according to the second embodiment will be explained using Figure 15. Incidentally, Figure 15 is a flow chart illustrating the selection process of the reproduction list according to the second embodiment.

35 [0146] As illustrated in Figure 15, in the selection process of the reproduction list PL that is executed in the above-described step S41, first, when the menu screen M illustrated in Figure 7 is displayed by the execution of the above-described step S40, next, it is confirmed (step 40 S70) whether the operation for displaying the representative picture image SI that is determined (displayed) as being non-displayed on that menu screen M (Figure 7A or 9A) has been performed in the operation part 20.

[0147] And, when that operation has not been done 45 yet (step S70 : NO), the selection of the reproduction list PL is performed using the representative picture image that is now being displayed (step S77), then the flow proceeds to step S42 of Figure 14.

[0148] On the other hand, when the operation for displaying the representative picture image that is determined as being non-displayed has been operated (step 50 S70: YES), next, for releasing the prohibition of that display, as illustrated in Figure 7B or Figure 9B, a field PT for entry that indicates that the code number PPN which must have been recorded every reproduction list PL is to be entered is displayed on the menu screen M to thereby prompt the execution of the entry processing. When the code number PIN corresponding to that has been

entered (step S71), collation is made between that entered code number PPN and the code number PPN recorded in the corresponding reproduction list PL, and it is confirmed whether those code numbers coincide with each other (step S73). As a result of this, when the both do not coincide (step S73: NO), it is determined that the user who should not view that representative picture image is now executing the editing process. And, the flow proceeds to step S75 as is. On the other hand, when the input code number PPN and the recorded code number PPN have coincided with each other (step S73: YES), then as illustrated in Figure 7C or Figure 9C a corresponding representative picture image SI is newly displayed within the menu screen M. In addition, the reproduction list information such as the name, production date, etc. of the reproduction list, itself, PL is displayed, according to the necessity, by searching the interior of that reproduction list PL (step S74).

[0149] And, it is confirmed, regarding all representative picture images SI that are now being displayed in the menu screen M, whether the processing operations in the steps S72 to S74 have been executed (step S75). When the processing about all the representative picture images has not finished being executed (step S75: NO), the flow again returns to step S72, thereby the above-described steps of processing about the remaining representative picture images SI are repeated. On the other hand, when the processing about all the representative picture images SI has finished being executed (step S75: YES), next, it is confirmed whether another code number PPN is to be entered (step S76).

[0150] As a result of this, when another code number PPN is entered (step S76: YES), regarding that entered new code number PPN the processing operations in the steps S71 to S75 are repeated.

[0151] On the other hand, when no other code number PPN is input (step S76: NO), the selection processing of the reproduction list PL is executed using the representative picture image SI that is now being displayed in the menu screen M, as is, (step S77), thereafter the flow proceeds to the above-described step S42 of Figure 14.

[0152] Incidentally, since the display process of the reproduction list PL and the reproduction process of the real information D, based on the use of the reproduction list PL, in the information recording/reproducing apparatus of the second embodiment are the same as those in the case illustrated in Figures 6 to 9 and Figure 11 in the first embodiment, the explanation of that detail is omitted.

[0153] With the above-explained information recording/reproducing apparatus of the second embodiment as well, the effect the same as that attainable in the case of the first embodiment is brought about.

(III) Third embodiment

[0154] Next, a third embodiment that is another embodiment of the present invention will be explained using Figures 16 to 22.

[0155] Although in the above-described first and second embodiments an explanation has been given of the case where the reproduction control flag PCF and reproduction list display prohibition flag PHF are disposed in

5 the respectively separate zones, the third and fourth embodiments that will be explained below are each the embodiment in the case where only the reproduction control flag PCF is used in the way of being used concurrently as each of those two flags.

10 [0156] Incidentally, in the Figures 16 to 22 that will be explained below, the same members in their corresponding figures that were used in the explanation about the first embodiment are denoted by the same member numerals with their detailed explanation being omitted.

15 [0157] Also, since the construction of the information recording/reproducing apparatus according to the third embodiment is the same as that of the information recording/reproducing apparatus S according to the first embodiment illustrated in Figure 2, the explanation of 20 that detail is omitted.

(A) Embodiment of the recording format

[0158] Initially, before concretely explaining the construction, etc. of the information recording/reproducing apparatus according to the third embodiment, the recording format that is used when recording information with respect to the optical disc 1 by the information recording/reproducing apparatus according to the third embodiment

30 will be explained using Figure 16. Incidentally, Figure 16 is a view illustrating the recording format (physical format) of the respective information according to the third embodiment.

[0159] As described above, in the recording format of 35 the third embodiment, the reproduction control flag PCF is also made to have the meaning as that of the reproduction list display prohibition flag PHF, and therefore in the recording format in the third embodiment the reproduction list display prohibition flag PHF does not exist.

[0160] Namely, as illustrated in Figure 16, in the recording format in the third embodiment, as the respective reproduction list PL, in addition to the for-use-as-menu representative picture image SN, name information NM, gist information GL, and etceteras information ETP, a 40 reproduction control flag PCF' having the meaning as that of the reproduction list display prohibition flag PHF, as well, is recorded.

[0161] At this time, as the contents of the reproduction control flag PCF', in more detail, when the content of the 45 real information D that is to be reproduced according to the reproduction list PL included under the reproduction control flag PCF' is the one which should be reproduction-controlled, the reproduction control flag PCF' is set to "1" by simultaneously making a determination of that the display of the reproduction list, itself, PL under which the reproduction control flag PCF' is included should also be prohibited in the menu screen M, while, when that real information D is not the one which should be reproduc-

50

55

tion-controlled, the reproduction control flag PCF' is set to "0" by simultaneously making a determination of that the display of the reproduction list, itself, PL should not be prohibited in the menu screen M.

[0162] Incidentally, since the other construction of the recording format according to the third embodiment is the same as that of the recording format of the first embodiment, the explanation of that detail is omitted.

(B) Embodiment of the construction and operation of the information recording/reproducing apparatus

[0163] Next, the operation of the information recording/reproducing apparatus according to the third embodiment will be explained using Figures 17 to 22.

[0164] First of all, the recording process of the real information D, etc. according to the third embodiment will be explained using Figure 17.

[0165] Incidentally, Figure 17 is a flow chart illustrating the recording process. Also, in Figure 17, the same operations of processing as those in the recording process of the first embodiment illustrated in Figure 4 are denoted by the same step numerals with their detailed explanation being omitted.

[0166] In the recording process of the third embodiment, first, the processing operations in the steps S1 to S8 illustrated in Figure 4 are executed, whereby, recording processing of necessary real information S, production/recording processing of necessary reproduction list PL and attribute information CI, and recording processing of the code number PIN that is common to the optical disc 1 as a whole are executed. At this time, the processing regarding the reproduction list display prohibition flag PHF, such as that (step S9) executed in the first embodiment, is not executed.

[0167] And, when in the determination of the step S6 the code number PIN is already recorded (step S6 : YES), next, for limiting the reproduction processing of the real information D based on the use of the produced (step S4) reproduction list PL the content of the corresponding reproduction limit flag PCF is set to "1" (step S80) and, further, the content of the corresponding reproduction list PL that was already recorded (step S4) at that point in time is rewritten (step S11). Then, the series of recording processing operations are terminated.

[0168] Next, the concrete operation of the editing process for the real information D, etc. which is executed in accordance with the recording format illustrated in Figure 16 through the operation of the above-constructed information recording/reproducing apparatus will be explained using Figure 18. Incidentally, Figure 18 is a flow chart illustrating the editing process for the real information D according to the third embodiment that is executed mainly according to and from the CPU 17. The same steps of processing as those executed in the editing process according to the first embodiment illustrated in Figure 5 are denoted by the same step numbers and the explanation of their detail is omitted.

[0169] In the editing process, initially, while it is having executed with respect thereto control processing such as prohibition of the display through the execution of the processing operations as later described in detail, the representative picture image corresponding to the respective reproduction list PL recorded in the optical disc 1 is displayed on the display not illustrated (step S40) and, by selecting the desired one from among those representative picture image that are displayed, selection of

5 the reproduction list PL that is to be edited is made (step S41).

[0170] When the reproduction list PL is selected, then, next, the same processing operations as those in the steps S46 to S48 and steps S50 to S52 illustrated in 10 Figure 5 are executed.

[0171] At this time, when, in the determination of the step S48, the content of the real information D that is to be reproduced according to the post-edit reproduction list PL is not the one with respect to which reproduction 15 control should be performed (step S48: NO), only the processing alone of setting the reproduction control flag PCF in that newly produced reproduction list PL to "0" is executed (step S85), then the flow proceeds to the processing in the step S56 illustrated in Figure 5.

[0172] Also, when, in the determination of the step S50, the code number PIN is already recorded (step S50: YES), next, only the processing, alone, of setting the content of the reproduction control flag PCF', which should be included under the corresponding reproduction list PL, 20 to "1" is executed according to the determination in the step S48 (step S86).

[0173] And, the content of the corresponding reproduction list PL that was already recorded (step S56) at the point in time when setting of the content of the reproduction control flag PCF' has finished being done (steps 25 S85 and S86) is rewritten (step S56), thereafter the series of editing processing operations are terminated.

[0174] Next, the detail of the display process (step S40) for the representative picture image corresponding 30 to the reproduction list PL in the above-described editing process will be explained using Figure 19.

[0175] Incidentally, Figure 19 is a flow chart illustrating the display process for the reproduction list according to the third embodiment and the same operations of 35 processing as those executed in the display process according to the first embodiment illustrated in Figure 6 are denoted by the same step numbers and the explanation of their detail is omitted.

[0176] As illustrated in Figure 19, in the display process 40 for the representative picture image in the step S40, first, the same steps of processing operations as those in the steps S15 and S16 illustrated in Figure 6 are executed.

[0177] And, whether, regarding each of the real information D corresponding to the respective reproduction list PL that has been detected in step S16, the reproduction processing of that real information D is limited is determined by confirming the content of the reproduction control flag PCF' in that respective reproduction list PL 45

(step S81).

[0178] And, when the corresponding real information D is the one with respect to which reproduction limitation is not done (step S81: NO), the same steps of processing as those in the steps S19 and S20 illustrated in Figure 6 are executed, then the flow proceeds to the step S41 of Figure 18.

[0179] On the other hand, when that corresponding real information D is the one with respect to which reproduction limitation should be performed (step S81: YES), the same operations of processing as those in the steps S18 and S20 illustrated in Figure 6 are executed, then the flow proceeds to the step S41 of Figure 18.

[0180] Incidentally, although, in the display process illustrated in Figure 19, regarding the representative picture image the display of which is prohibited measure has been taken of displaying, in place of that image, the for-non-display image SSI illustrated in Figure 7A, other than this the following measure may also be taken. Namely, as illustrated in Figure 20, regarding the reproduction list PL the corresponding representative picture image to which is display-prohibited, any image is not displayed at all at that corresponding position (see Figure 8A) and only the representative picture image the display of which is permitted is displayed (step S19).

[0181] Next, the detail of the selection processing (step S41) for the reproduction list PL in the above-described editing process will be explained using Figure 21. Incidentally, Figure 21 is a flow chart illustrating the selection process for the reproduction list according to the third embodiment and the same operations of processing as those executed in the selection process according to the first embodiment illustrated in Figure 10 are denoted by the same step numbers and the explanation of their detail is omitted.

[0182] As illustrated in Figure 21, in the selection processing for reproduction list PL in the step S41, first, when the menu screen M illustrated in Figure 7 is displayed through the execution of the step 40 processing, next, the processing of selecting the reproduction list PL the representative picture image of which is displayed in the menu screen M is executed in the operation part 20 (step S25). Next, regarding the real information D corresponding to the thus-selected reproduction list PL, whether the reproduction processing of that is limited is determined (step S82) by confirming the content of the reproduction control flag PCF' in the reproduction list PL.

[0183] And, in a case where that reproduction list PL is the one with respect to which reproduction processing is not limited (step S82: NO), the flow proceeds to the step S42 as is, whereas, in a case where that reproduction list PL is the one with respect to which reproduction processing is limited (step S82: YES), next, the same operations of processing as those executed in the steps S27 to S29 illustrated in Figure 10 are executed, then the flow proceeds to the step S42.

[0184] Finally, the concrete operation of the reproduction process for the real information D, etc. which is ex-

ecuted from the optical disc 1 in accordance with the recording format illustrated in Figure 16 through the operation of the above-constructed information recording/reproducing apparatus will be explained using Figure 22.

5 Incidentally, Figure 22 is a flow chart illustrating the reproduction process for the real information D according to the third embodiment that is executed mainly according to and from the CPU 17. The same operations of processing as those executed in the reproduction process according to the first embodiment illustrated in Figure 11 are denoted by the same step numbers and the explanation of their detail is omitted.

10 [0185] As illustrated in Figure 22, as the reproduction process, first, the display process (step S60) for reproduction list PL and the selection process (step S61) therefor that are the same as those in the editing process illustrated in Figure 18 are executed.

15 [0186] Here, in a case where, as in the third embodiment, a setting is made of that when the reproduction list 20 PL is the one which should be reproduction-limited the corresponding representative picture image is simultaneously not displayed either, there can occur no state where in that step S61 the code number PIN is entered and, on the other hand, the reproduction limitation is still 25 made although that representative picture image is not displayed, and, therefore, after selecting that reproduction list PL (step S61), the reproduction processing of the corresponding real information D from the optical disc 1 is immediately executed (step S66).

30 [0187] And, further, whether reproduction up to the final real information D that is to be reproduced has finished being performed is confirmed (step S67).

[0188] And, when reproduction process up to the final reproduction list PL has not finished being performed 35 (step S67: NO), the flow returns to the step S60 so as to select the reproduction list PL that includes the real information D that is to be reproduced next. On the other hand, when reproduction process up to the final reproduction list PL that is to be reproduced has already finished being performed (step 67: YES), the CPU 17 terminates the reproduction process according to the first embodiment as is.

[0189] As described above, according to the operation 40 of the information recording/reproducing apparatus according to the third embodiment, since the reproduction control flag PCF' has two ways of meaning one of which represents whether prohibiting the display of the representative picture image and the other of which represents whether limiting the reproduction processing, itself, of the 45 real information D corresponding to the reproduction list PL, in addition to the effect resulting from the operation of the information recording/reproducing apparatus S according to the first embodiment the effect of enabling preventing the content of the real information D corresponding 50 to the reproduction list PL from being inadvertently recognized by the user is also brought about by limiting the display of the representative picture image, and also 55 limiting the reproduction processing of the real informa-

tion D corresponding to the reproduction list PL, according to that reproduction control flag PCF'.

(IV) Fourth embodiment

[0190] Finally, a fourth embodiment which is another embodiment of the present invention will be explained using Figures 23 to 25.

[0191] Although in the above-described third embodiment the code number PIN is recorded within the general information GM as being common to all the real information D, or reproduction lists PL, that are recorded in the optical disc 1, in the fourth embodiment explained below a specific code number is set every reproduction list PL. Further, the reproduction control flag PCF' according to the fourth embodiment also has two ways of meaning the same as those in the case of the third embodiment.

[0192] Incidentally, in Figures 23 to 25 explained below, the same members as those in the corresponding figures that were used in the explanation in connection with the first or third embodiment are denoted by the same reference symbols, and the explanation of their detail is omitted.

[0193] Also, since the construction of the information recording/reproducing apparatus according to the fourth embodiment is the same as that of the information recording/reproducing apparatus S according to the first embodiment illustrated in Figure 2, the explanation of that detail is omitted.

(A) Embodiment of the recording format

[0194] Initially, before concretely explaining the construction, etc. of the information recording/reproducing apparatus according to the fourth embodiment, the recording format that is used when recording information with respect to the optical disc 1 by using the information recording/reproducing apparatus according to the fourth embodiment will be explained using Figure 23. Incidentally, Figure 23 is a view illustrating the recording format (physical format) for the respective information according to the fourth embodiment.

[0195] Since, as described above, in the recording format of the fourth embodiment, a specific code number is recorded in corresponding relationship to each of the respective reproduction lists, that code number is recorded not within the general information GM region but within the respective reproduction list PL region.

[0196] Namely, as illustrated in Figure 23, in the recording format according to the fourth embodiment, the general information GM is constructed of only the user interface information UI, reproduction lists number information NPL, and etceteras information ETG, alone, which are the same as those illustrated in Figure 16. On the other hand, the respective reproduction list PL has recorded therein a code number PPN different for each reproduction list PL in addition to the reproduction control flag PCF', for-use-as-menu representative picture image

SN, name information NM, gist information GL, and etceteras information ETP which are the same as those illustrated in Figure 16.

[0197] Incidentally, since the other construction of the recording format in the fourth embodiment is the same as that of the recording format in the third embodiment illustrated in Figure 16, the explanation of that detail is omitted.

10 (B) Embodiment of the construction and operation of the information recording/reproducing apparatus

[0198] Next, the operation of the information recording/reproducing apparatus according to the fourth embodiment will be explained using Figures 24 and 25.

[0199] First, the recording process for the real information D, etc. according to the fourth embodiment will be explained using Figure 24.

[0200] Incidentally, Figure 24 is a flow chart illustrating that recording process, and the same operations of processing as those in the recording process according to the third embodiment illustrated in Figure 17 are denoted by the same step numbers and the explanation of those details is omitted.

[0201] In the recording process of the fourth embodiment, first, the processing operations in the steps S1, S2, S3, S4, S5, and S7 are executed, thereby the recording processing of necessary real information D and the production/recording processing of necessary reproduction list PL and attribute information CI are executed. At this time, the processing operations (steps S6 and S8) regarding the code number PIN within the general information GM such as those executed in the case of the third embodiment are not executed. Also, it results that

35 the code number that is entered in the step S7 is the code number PPN that corresponds to only the reproduction list PL, alone, that has become an object with respect to which that code number should at that time be entered.

[0202] And, when the entry of the code number PPN has finished being done, the content of the reproduction control flag PCF' that should be included under the corresponding reproduction list PL is set to "1" according to the determination in the step S5, and, in addition, the above-described code number PPN (that is already entered in the step S7) that corresponds to only the reproduction list PL alone is set (step S90).

[0203] And, at the point in time when the content of the reproduction control flag PCF', and the code number PPN, have respectively finished being set (step S90), 50 there is rewritten (step S11) the content of the corresponding reproduction list PL that was theretofore recorded (step S4), thereby the series of recording processing operations are terminated.

[0204] Next, the editing process for the real information D, etc. according to the fourth embodiment will be explained using Figure 25. Incidentally, this editing process includes processing for producing a new virtual reproduction list VPL, processing for adding/recording new re-

al information D, processing for changing the content of an existing virtual reproduction list VPL, processing for deleting part of existing real information D from the optical disc 1, etc.

[0205] Also, Figure 25 is a flow chart illustrating this editing process. Regarding the processing operations that are the same as those executed in the editing process of the third embodiment illustrated in Figure 18, they are denoted by the same step numbers and the explanation of the detail of those is omitted.

[0206] In the editing process of the fourth embodiment, first, the processing operations in the steps S40 and S41 and S46 to S48 illustrated in Figure 18 are executed, thereby necessary editing processing operations with respect to the desired reproduction list PL are executed.

[0207] And, when, in the determination in the step S48, the content of the real information D that is to be reproduced according to the post-edit reproduction list PL is not the one with respect to which reproduction control should be performed (step S48: NO), the reproduction control flag PCF in the newly produced reproduction list PL is set to "0" and, further, setting of the corresponding code number PPN is not performed (step S91). Then, the flow proceeds to the processing of the step S56 as later described.

[0208] On the other hand, when the content of the real information D that is to be reproduced according to the post-edit reproduction list PL is not the one which should be reproduction-controlled (step S48: YES), next, the display indicating that the code number PPN corresponding to only the post-edit reproduction list PL should be entered is made, for example, on the display not illustrated, etc., to thereby prompt the execution of that entry processing. When correspondingly thereto a new code number PPN has been entered (step S51), next, the content of the reproduction control flag PCF that should be included under the reproduction (play) list PL that was produced (step S46) is set to "1" according to the determination in the step S48 and, simultaneously, the code number PPN corresponding to only the reproduction list PL alone is set (step S92).

[0209] And, at the point in time when setting the content of the reproduction control flag PCF and the code number PPN has respectively finished being performed (steps S91 and S92), the content of the corresponding reproduction list PL that was theretofore recorded (step S46) is rewritten (step S56), thereby the series of editing processing operations are terminated.

[0210] Incidentally, since the display process for reproduction list PL, selection process therefor, and reproduction process for the real information D based on the use of the reproduction list PL, which are executed in the information recording/reproducing apparatus according to the fourth embodiment, are the same as those in the case of the third embodiment illustrated in Figures 19 to 22, the explanation of those details is omitted.

[0211] With the above-explained information recording/reproducing apparatus of the fourth embodiment, as

well, the same effect as that attainable in the case of the third embodiment can be brought about.

[0212] Incidentally, although in each of the above-described respective embodiments not only the representative picture image SI but also the name, production time and date, etc. of the reproduction list, itself, PL have been illustrated as the things indicating the reproduction list PL that is displayed on the menu screen M, other than this there may be also included as such things letter information indicating the gist of the content of the real information D that is reproduced according to the reproduction list PL.

[0213] Further, although in each of the above-described respective embodiments an explanation has been given of the case where the data area DA exists only one piece within the optical disc 1, other than this it is also possible to construct in the way in which a plurality of different data areas are provided and, for each data area, the real information D is recorded separately and independently from that in another. And, in this case, in the first and third embodiment, for each data area, it is also possible to construct in the way in which, regarding only the real information D, etc., alone, within that data area, a common code number PIN is set.

[0214] Further, by keeping stored in an information recording medium such as a flexible disc the programs corresponding to the above-described respective flow charts, or keeping them distributed via the network such as the Internet, and reading them out and executing them by a general microcomputer this general microcomputer, can also be made to function as the CPU 17 according to the respective embodiment of the present invention.

35 Claims

1. An information recording apparatus for recording an optical recording medium (1; 1'; 1"), comprising:

40 reproduction information recording means (2, 3, 4, 5, 6, 7) that records reproduction information into a reproduction information recording region; and
 45 reproduction list recording means (2, 3, 4, 5, 6, 7) that records a reproduction list, in a reproduction list recording region, for controlling a manner of reproduction that is executed when reproducing the reproduction information; and
 50 content information recording means (2, 3, 4, 5, 6, 7) that records content information generated differently from the reproduction information

characterized in that

the reproduction list includes presentation control information that indicates whether or not a presentation of content information indicating a content of the reproduction information is limited, and
 the content information comprises at least a repre-

sentative picture image that represents a content of the reproduction information; and name information that indicates a name of the reproduction information.

2. An information recording apparatus according to claim 1, wherein the content information is information which is presented in advance of starting a reproduction processing of the reproduction information based on the reproduction list.

3. An information recording apparatus according to claim 1, wherein the presentation control information is information which indicates further whether or not a reproduction of the reproduction information based on the reproduction list is limited.

4. An information recording apparatus according to claim 1, wherein the content information further includes at least one of gist information indicating a gist of the reproduction information, and a time/date information indicating a time/date regarding the reproduction information.

5. An information recording apparatus according to claim 4, wherein the content information is used for a menu display.

6. An information reproducing apparatus for reproducing an optical recording medium (1; 1'; 1''), wherein the information reproducing apparatus comprises:

detection means (17, 18) that detects a reproduction list from the optical recording medium (1; 1'; 1'') and wherein said reproduction list is recorded in a reproduction list recording region, of said optical recording medium, said reproduction list recording region being distinct from a reproduction information recording region in which a reproduction information is recorded, said reproduction list being for controlling a manner of reproduction that is executed when reproducing the reproduction information; and

characterized in that

said reproduction list includes presentation control information which indicates whether or not a presentation of content information indicating a content of the reproduction information is limited; limiting means (17) limit a presentation of content information based on the presentation control information included in said detected reproduction list; and content information presenting means (19) presents content information generated differently from the re-

5 production information, said content information comprises at least a representative picture image that represents a content of the reproduction information; and name information that indicates a name of the reproduction information.

7. An information reproducing apparatus according to claim 6, wherein the content information presenting means (19) presents content information as a menu in advance of reproducing the reproduction information.

8. An information reproducing apparatus according to claim 6, wherein the content information, the presentation of which is limited by the presentation control information, includes gist information indicating the gist of the reproduction information, and time/date information indicating a time/date regarding the reproduction information.

9. An information recording method for recording an optical recording medium (1; 1'; 1'') comprising the steps of:

recording (S4) reproduction information in a reproduction information recording region; and recording (S4) a reproduction list, in a reproduction list recording region, for controlling a manner of reproduction that is executed when reproducing the reproduction information; and recording (S2) content information generated differently from the reproduction information

35 **characterized in that**

the reproduction list includes presentation control information that indicates whether or not a presentation of content information indicating a content of the reproduction information is limited, and the content information comprises: at least a representative picture image that represents a content of the reproduction information; and name information that indicates a name of the reproduction information.

40

45

50

55

10. An information recording method according to claim 9, wherein the content information is information which is presented in advance of starting a reproduction processing of the reproduction information based on the reproduction list.

11. An information recording method according to claim 9, wherein the presentation control information is information which indicates further whether or not a reproduction of the reproduction information based on the reproduction list is limited.

12. An information recording method according to claim

9, wherein the content information further includes at least one of gist information indicating the gist of the reproduction information, and time/date information indicating a time/date regarding the reproduction information.

13. An information recording method according to claim 9, wherein the content information is used for a menu display.

14. An information reproducing method for reproducing an optical recording medium (1; 1'; 1''), wherein the information reproducing method comprises the steps of:

detecting (S16) a reproduction list from the recording medium (1; 1'; 1'') and wherein said reproduction list is recorded in a reproduction list recording region of said optical recording medium (1; 1'; 1''), said reproduction list recording region being distinct from a reproduction information recording region in which a reproduction information is recorded,
using said reproduction list for controlling (S18; S19; S20) a manner of reproduction that is executed when reproducing the reproduction information; and

characterised in that

said reproduction list includes presentation control information which indicates whether or not a presentation of content information indicating a content of the reproduction information is limited; and
limiting (S63, S64, S65) a presentation of the content information based on the presentation control information included in the detected reproduction list; and presenting (S66) said content information generated differently from the reproduction information, said content information comprising at least a representative picture image that represents a content of the reproduction information, and name information that indicates a name of the reproduction information.

15. An information reproducing method according to claim 14, wherein the step (S66) of presenting the content information presents content information as a menu in advance of reproducing the reproduction information.

16. An information reproducing method according to claim 14, wherein the content information, the presentation of which is limited by the presentation control information, includes gist information indicating the gist of the reproduction information, and time/date information indicating a time/date regarding the reproduction information.

5 17. An information recording medium in which a processor implementable information recording program is recorded so as to be read by a processor (17) included in an information recording apparatus (S), when executed the program causes the processor (17) to execute all the steps of a method according to claim 9.

10 18. An information recording medium in which a processor implementable information reproducing program is recorded so as to be read by a processor (17) included in an information reproducing apparatus (S), when executed the information reproducing program causes the processor (17) to execute all the steps of a method according to claim 14.

15 19. An optical recording medium comprising:

a reproduction information recording region in which a reproduction information is recorded; and
a reproduction list recording region in which a reproduction list for controlling a manner of reproduction that is executed when reproducing the reproduction information is recorded

characterized in that

the reproduction list includes presentation control information that indicates whether or not a presentation of content information indicating a content of the reproduction information is limited, wherein the content information is recorded differently from the reproduction information, and wherein the content information comprises: at least a representative picture image that represents a content of the reproduction information; and name information that indicates a name of the reproduction information.

20 20. An optical recording medium according to claim 19, wherein
the content information is information which is presented in advance of starting the reproduction processing of the reproduction information based on the reproduction list.

25 21. An optical recording medium according to claim 19, wherein
the presentation control information is information which indicates further whether or not a reproduction of the reproduction information based on the reproduction list is limited.

30 22. An optical recording medium according to claim 19, wherein
the content information includes at least one of a representative picture image information that corresponds to a representative picture image that repre-

sents an image contained in the reproduction information reproduced on the basis of the reproduction list, title information that corresponds to a title representing the reproduction information, a gist information indicating the gist of the reproduction information, and a time/date information indicating a time/date regarding the reproduction information.

Patentansprüche

1. Informationsaufzeichnungsvorrichtung zum Beschreiben eines optischen Aufzeichnungsmediums (1; 1'; 1''), umfassend:

eine Wiedergabeinformations-Aufzeichnungseinrichtung (2, 3, 4, 5, 6, 7), die Wiedergabeinformation in einen Wiedergabeinformations-Aufzeichnungsbereich schreibt; und
 eine Wiedergabelisten-Aufzeichnungseinrichtung (2, 3, 4, 5, 6, 7), die in einem Wiedergabelisten-Aufzeichnungsbereich eine Wiedergabeliste aufzeichnet, zum Steuern einer Art und Weise der Wiedergabe, die ausgeführt wird, wenn die Wiedergabeinformation wiedergegeben wird, und
 eine Inhaltsinformations-Aufzeichnungseinrichtung (2, 3, 4, 5, 6, 7), die verschieden von der Wiedergabeinformation erzeugte Inhaltsinformation aufzeichnet,

dadurch gekennzeichnet, dass

die Wiedergabeliste Präsentations-Steuerungsinformation enthält, die angibt, ob eine Präsentation von Inhaltsinformation, die einen Inhalt der Wiedergabeinformation anzeigt, beschränkt ist, und die Inhaltsinformation wenigstens eine repräsentative Abbildung umfasst, die einen Inhalt der Wiedergabeinformation darstellt; und Namensinformation, die einen Namen der Wiedergabeinformation anzeigt.

2. Informationsaufzeichnungsvorrichtung nach Anspruch 1, wobei die Inhaltsinformation Information ist, die vor Beginn eines Wiedergabeprozessablaufs der Wiedergabeinformation basierend auf der Wiedergabeliste präsentiert wird.

3. Informationsaufzeichnungsvorrichtung nach Anspruch 1, wobei die Präsentations-Steuerungsinformation Information ist, die weiter anzeigt, ob eine Wiedergabe der Wiedergabeinformation basierend auf der Wiedergabeliste beschränkt ist.

4. Informationsaufzeichnungsvorrichtung nach Anspruch 1, wobei

die Inhaltsinformation weiter wenigstens entweder Kerninformation, die das Wesentliche der Wiedergabeinformation anzeigt, oder eine Zeit-/Datumsinformation, die eine Zeit/ein Datum bezüglich der Wiedergabeinformation anzeigt, enthält.

5. Informationsaufzeichnungsvorrichtung nach Anspruch 4, wobei die Inhaltsinformation für eine Menüanzeige verwendet wird.

6. Informationswiedergabevorrichtung zum Wiedergeben eines optischen Aufzeichnungsmediums, (1; 1'; 1''), wobei die Informationswiedergabevorrichtung umfasst:

eine Erfassungsvorrichtung (17, 18), die eine Wiedergabeliste von dem optischen Aufzeichnungsmedium (1; 1'; 1'') erfasst, und wobei die Wiedergabeliste in einem Wiedergabelisten-Aufzeichnungsbereich des optischen Aufzeichnungsmediums aufgezeichnet ist, wobei der Wiedergabelisten-Aufzeichnungsbereich verschieden ist von einem Wiedergabeinformations-Aufzeichnungsbereich, in dem eine Wiedergabeinformation aufgezeichnet ist, wobei die Wiedergabeliste zum Steuern einer Art und Weise der Wiedergabe vorgesehen ist, die ausgeführt wird, wenn die Wiedergabeinformation wiedergegeben wird; und

dadurch gekennzeichnet, dass

die Wiedergabeliste Präsentations-Steuerungsinformation enthält, die angibt, ob eine Präsentation von Inhaltsinformation, die einen Inhalt der Wiedergabeinformation anzeigt, beschränkt ist, eine Beschränkungseinrichtung (17) eine Präsentation der Inhaltsinformation basierend auf der in der erkannten Wiedergabeliste enthaltenen Präsentations-Steuerungsinformation beschränkt; und eine Inhaltsinformations-Präsentationseinrichtung (19) verschieden von der Wiedergabeinformation erzeugte Inhaltsinformation präsentiert, die Inhaltsinformation wenigstens eine repräsentative Abbildung umfasst, die einen Inhalt der Wiedergabeinformation darstellt; und Namensinformation, die einen Namen der Wiedergabeinformation anzeigt.

7. Informationswiedergabevorrichtung nach Anspruch 6, wobei die Wiedergabeinformations-Präsentationseinrichtung (19) vor der Wiedergabe der Wiedergabeinformation Inhaltsinformation als ein Menü präsentiert.

8. Informationswiedergabevorrichtung nach Anspruch 6, wobei die Inhaltsinformation, deren Präsentation durch die Präsentations-Steuerungsinformation beschränkt ist, Kerninformation, die das Wesentliche

der Wiedergabeinformation anzeigt und Zeit-/Datumsinformation, die eine Zeit/ein Datum bezüglich der Wiedergabeinformation anzeigt, enthält.

9. Informationsaufzeichnungsverfahren zum Beschreiben eines optischen Aufzeichnungsmediums (1; 1'; 1''), umfassend die Schritte:

Aufzeichnen (S4) von Wiedergabeinformation in einen Wiedergabeinformations-Aufzeichnungsbereich; und

Aufzeichnen (S4) einer Wiedergabeliste in einem Wiedergabelisten-Aufzeichnungsbereich, zum Steuern einer Art und Weise der Wiedergabe, die ausgeführt wird, wenn die Wiedergabeinformation wiedergegeben wird; und

Aufzeichnen (S2) von verschieden von der Wiedergabeinformation erzeugter Inhaltsinformation,

5 10 15 20

dadurch gekennzeichnet, dass

die Wiedergabeliste Präsentations-Steuerungsinformation enthält, die angibt, ob eine Präsentation von Inhaltsinformation, die einen Inhalt der Wiedergabeinformation anzeigt, beschränkt ist, und

die Inhaltsinformation wenigstens eine repräsentative Abbildung umfasst, die einen Inhalt der Wiedergabeinformation darstellt; und Namensinformation, die einen Namen der Wiedergabeinformation anzeigt.

25 30

10. Informationsaufzeichnungsverfahren nach Anspruch 9, wobei die Inhaltsinformation Information ist, die vor Beginn eines Wiedergabeprozessablaufs der Wiedergabeinformation basierend auf der Wiedergabeliste präsentiert wird.

35

11. Informationsaufzeichnungsverfahren nach Anspruch 9, wobei die Präsentations-Steuerungsinformation Information ist, die weiter anzeigt, ob eine Wiedergabe der Wiedergabeinformation basierend auf der Wiedergabeliste beschränkt ist.

40

12. Informationsaufzeichnungsverfahren nach Anspruch 9, wobei die Inhaltsinformation weiter wenigstens entweder Kerninformation, die das Wesentliche der Wiedergabeinformation anzeigt, oder eine Zeit-/Datumsinformation, die eine Zeit/ein Datum bezüglich der Wiedergabeinformation anzeigt, enthält

45 50

13. Informationsaufzeichnungsverfahren nach Anspruch 9, wobei die Inhaltsinformation für eine Menüanzeige verwendet wird.

14. Informationswiedergabeverfahren zum Wiedergeben eines optischen Aufzeichnungsmediums (1; 1'; 1''), wobei das Informationsaufzeichnungsverfahren die Schritte umfasst:

55

Erfassen (S16) einer Wiedergabeliste von dem Aufzeichnungsmedium (1; 1'; 1'') und wobei die Wiedergabeliste in einem Wiedergabelisten-Aufzeichnungsbereich des optischen Aufzeichnungsmediums (1; 1'; 1'') aufgezeichnet ist, wobei der Wiedergabelisten-Aufzeichnungsbereich verschieden ist von einem Wiedergabeinformationen-Aufzeichnungsbereich, in dem eine Wiedergabeinformation aufgezeichnet ist, Benutzen der Wiedergabeliste zum Steuern (S18; S19; S20) einer Art und Weise von Wiedergabe, die ausgeführt wird, wenn die Wiedergabeinformation wiedergegeben wird; und

60

dadurch gekennzeichnet, dass

die Wiedergabeliste Präsentations-Steuerungsinformation enthält, die angibt, ob eine Präsentation von Inhaltsinformation, die einen Inhalt der Wiedergabeinformation anzeigt, beschränkt ist, und

Beschränken (S63, S64, S65) einer Präsentation der Inhaltsinformation basierend auf der in der erfassten Wiedergabeliste enthaltenen Präsentations-Steuerungsinformation; und

Präsentieren (S66) der von der Wiedergabeinformation verschiedenen erzeugten Inhaltsinformation, die Inhaltsinformation wenigstens eine repräsentative Abbildung umfasst, die einen Inhalt der Wiedergabeinformation darstellt; und Namensinformation, die einen Namen der Wiedergabeinformation anzeigt.

65

15. Informationswiedergabeverfahren nach Anspruch 14, wobei der Schritt (S66) des Präsentierens der Inhaltsinformation Inhaltsinformation als ein Menü vor der Wiedergabe der Wiedergabeinformation präsentiert.

16. Informationswiedergabeverfahren nach Anspruch 14, wobei die Inhaltsinformation, deren Präsentation durch die Präsentations-Steuerungsinformation beschränkt ist, Kerninformation, die das Wesentliche der Wiedergabeinformation anzeigt und Zeit-/Datumsinformation, die eine Zeit/ein Datum bezüglich der Wiedergabeinformation anzeigt, enthält.

17. Informationsaufzeichnungsmedium, auf dem ein prozessorimplementierbares Informationsaufzeichnungsprogramm aufgezeichnet ist, um von einem in einer Informationsaufzeichnungsvorrichtung (S) enthaltenen Prozessor (17) gelesen zu werden, wobei das Programm den Prozessor (17) veranlasst, alle Schritte eines Verfahrens nach Anspruch 9 auszuführen, wenn es ausgeführt wird.

18. Informationsaufzeichnungsmedium, auf dem ein prozessorimplementierbares Wiedergabeprogramm aufgezeichnet ist, um von einem in einer Informationswiedergabevorrichtung (S) enthaltenen

Prozessor (17) gelesen zu werden, wobei das Programm den Prozessor (17) veranlasst, alle Schritte eines Verfahrens nach Anspruch 14 auszuführen, wenn es ausgeführt wird.

19. Optisches Aufzeichnungsmedium, umfassend:

einen Wiedergabeinformations-Aufzeichnungsbereich, in dem eine Wiedergabeinformation aufgezeichnet ist; und
 einen Wiedergabelisten-Aufzeichnungsbereich, in dem eine Wiedergabeliste zum Steuern einer Art und Weise der Wiedergabe, die ausgeführt wird, wenn die Wiedergabeinformation wiedergegeben wird, aufgezeichnet ist,
dadurch gekennzeichnet, dass
 die Wiedergabeliste Präsentations-Steuerinformation enthält, die angibt, ob eine Präsentation von Inhaltsinformation, die einen Inhalt der Wiedergabeinformation anzeigt, beschränkt ist,
 wobei die Inhaltsinformation verschieden von der Wiedergabeinformation aufgezeichnet ist, und
 wobei die Inhaltsinformation wenigstens eine repräsentative Abbildung umfasst, die einen Inhalt der Wiedergabeinformation darstellt; und Namensinformation, die einen Namen der Wiedergabeinformation anzeigt.

20. Optisches Aufzeichnungsmedium nach Anspruch 19, wobei
 die Inhaltsinformation Information ist, die vor Beginn eines Wiedergabeprozessablaufs der Wiedergabeinformation basierend auf der Wiedergabeliste präsentiert wird.

21. Optisches Aufzeichnungsmedium nach Anspruch 19, wobei
 die Präsentations-Steuerungsinformation Information ist, die weiter anzeigt, ob eine Wiedergabe der Wiedergabeinformation basierend auf der Wiedergabeliste beschränkt ist.

22. Optisches Aufzeichnungsmedium nach Anspruch 19, wobei
 die Inhaltsinformation wenigstens entweder eine repräsentative Abbildungsinformation, die einer repräsentativen Abbildung entspricht, die ein in der basierend auf der Wiedergabeliste wiedergegebenen Wiedergabeinformation enthaltendes Bild repräsentiert, oder Titelinformation, die einem Titel entspricht, der die Wiedergabeinformation repräsentiert, oder eine Kerninformation, die das Wesentliche der Wiedergabeinformation anzeigt, oder eine Zeit-/Datumsinformation, die eine Zeit/ein Datum bezüglich der Wiedergabeinformation anzeigt, enthält.

Revendications

1. Appareil d'enregistrement d'informations pour enregistrer un support d'enregistrement optique (1 ; 1' ; 1''), comprenant :

des moyens d'enregistrement d'informations de reproduction (2, 3, 4, 5, 6, 7) qui enregistrent des informations de reproduction dans une région d'enregistrement d'informations de reproduction ; et
 des moyens d'enregistrement de liste de reproduction (2, 3, 4, 5, 6, 7) qui enregistrent une liste de reproduction, dans une région d'enregistrement de liste de reproduction, pour commander une manière d'exécuter la reproduction lors de la reproduction des informations de reproduction ; et
 des moyens d'enregistrement d'informations de contenu (2, 3, 4, 5, 6, 7) qui enregistrent les informations de contenu générées différemment des informations de reproduction,

caractérisé en ce que

la liste de reproduction comprend des informations de commande de présentation qui indiquent si, oui ou non, une présentation d'informations de contenu indiquant un contenu des informations de reproduction est limitée, et

les informations de contenu comprennent au moins une image représentative qui représente un contenu des informations de reproduction ; et des informations de nom qui indiquent un nom des informations de reproduction.

2. Appareil d'enregistrement d'informations selon la revendication 1, dans lequel

les informations de contenu sont des informations qui sont présentées avant de débuter un traitement de reproduction des informations de reproduction sur la base de la liste de reproduction.

3. Appareil d'enregistrement d'informations selon la revendication 1, dans lequel

les informations de commande de présentation sont des informations qui indiquent en outre si, oui ou non, une reproduction des informations de reproduction sur la base de la liste de reproduction est limitée.

4. Appareil d'enregistrement d'informations selon la revendication 1, dans lequel

les informations de contenu comprennent en outre au moins l'une d'informations essentielles indiquant l'essentiel des informations de reproduction, et d'informations d'heure/date indiquant une heure/date concernant les informations de reproduction.

5. Appareil d'enregistrement d'informations selon la re-

vendication 4, dans lequel les informations de contenu sont utilisées pour un affichage de menu.

6. Appareil de reproduction d'informations pour reproduire un support d'enregistrement optique (1 ; 1' ; 1''), dans lequel l'appareil de reproduction d'informations comprend :

des moyens de détection (17, 18) qui détectent une liste de reproduction sur le support d'enregistrement optique (1 ; 1' ; 1''), et dans lequel ladite liste de reproduction est enregistrée dans une région d'enregistrement de liste de reproduction, dudit support d'enregistrement optique, ladite région d'enregistrement de liste de reproduction étant distincte d'une région d'enregistrement d'informations de reproduction dans laquelle des informations de reproduction sont enregistrées, ladite liste de reproduction servant à commander une manière d'exécuter la reproduction lors de la reproduction des informations de reproduction ; et

caractérisé en ce que

ladite liste de reproduction comprend des informations de commande de présentation qui indiquent si, oui ou non, une présentation d'informations de contenu indiquant un contenu des informations de reproduction est limitée ; des moyens de limitation (17) limitent une présentation d'informations de contenu sur la base des informations de commande de présentation incluses dans ladite liste de reproduction détectée ; et des moyens de présentation d'informations de contenu (19) présentent les informations de contenu générées différemment des informations de reproduction, lesdites informations de contenu comprennent au moins une image représentative qui représente un contenu des informations de reproduction ; et des informations de nom qui indiquent un nom des informations de reproduction.

7. Appareil de reproduction d'informations selon la revendication 6, dans lequel les moyens de présentation d'informations de contenu (19) présentent les informations de contenu en tant que menu avant la reproduction des informations de reproduction.

8. Appareil de reproduction d'informations selon la revendication 6, dans lequel les informations de contenu, dont la présentation est limitée par les informations de commande de présentation, comprennent des informations essentielles indiquant l'essentiel des informations de reproduction, et des informations d'heure/date indiquant une heure/date concernant les informations de reproduction.

9. Procédé d'enregistrement d'informations pour enregistrer un support d'enregistrement optique (1 ; 1' ; 1'') comprenant les étapes consistant à :

enregistrer (S4) des informations de reproduction dans une région d'enregistrement d'informations de reproduction ; et enregistrer (S4) une liste de reproduction, dans une région d'enregistrement de liste de reproduction, pour commander une manière d'exécuter la reproduction lors de la reproduction des informations de reproduction ; et enregistrer (S2) les informations de contenu générées différemment des informations de reproduction,

caractérisé en ce que

la liste de reproduction comprend des informations de commande de présentation qui indiquent si, oui ou non, une présentation d'informations de contenu indiquant un contenu des informations de reproduction est limitée, et

les informations de contenu comprennent au moins une image représentative qui représente un contenu des informations de reproduction ; et des informations de nom qui indiquent un nom des informations de reproduction.

10. Procédé d'enregistrement d'informations selon la revendication 9, dans lequel les informations de contenu sont des informations qui sont présentées avant de débuter un traitement de reproduction des informations de reproduction sur la base de la liste de reproduction.

11. Procédé d'enregistrement d'informations selon la revendication 9, dans lequel les informations de commande de présentation sont des informations qui indiquent si, oui ou non, une reproduction des informations de reproduction sur la base de la liste de reproduction est limitée.

12. Procédé d'enregistrement d'informations selon la revendication 9, dans lequel les informations de contenu comprennent en outre au moins l'une d'informations essentielles indiquant l'essentiel des informations de reproduction, et d'informations d'heure/date indiquant une heure/date concernant les informations de reproduction.

13. Procédé d'enregistrement d'informations selon la revendication 9, dans lequel les informations de contenu sont utilisées pour un affichage de menu.

14. Procédé de reproduction d'informations pour reproduire un support d'enregistrement optique (1 ; 1' ; 1''), dans lequel le procédé de reproduction d'informations comprend les étapes consistant à :

déetecter (S16) une liste de reproduction sur le support d'enregistrement (1 ; 1' ; 1''), et dans lequel ladite liste de reproduction est enregistrée dans une région d'enregistrement de liste de reproduction dudit support d'enregistrement optique (1 ; 1' ; 1''), ladite région d'enregistrement de liste de reproduction étant distincte d'une région d'enregistrement d'informations de reproduction dans laquelle des informations de reproduction sont enregistrées, 5

utiliser ladite liste de reproduction pour commander (S18 ; S19 ; S20) une manière d'exécuter la reproduction lors de la reproduction des informations de reproduction ; et 10

caractérisé en ce que
ladite liste de reproduction comprend des informations de commande de présentation qui indiquent si, oui ou non, une présentation d'informations de contenu indiquant un contenu des informations de reproduction est limitée ; et 15

limiter (S63, S64, S65) une présentation des informations de contenu sur la base des informations de commande de présentation incluses dans la liste de reproduction détectée ; et 20

présenter (S66) lesdites informations de contenu générées différemment des informations de reproduction, 25

lesdites informations de contenu comprenant au moins une image représentative qui représente un contenu des informations de reproduction ; et des informations de nom qui indiquent un nom des informations de reproduction. 30

15. Procédé de reproduction d'informations selon la revendication 14, dans lequel l'étape (S66) de présentation des informations de contenu présente les informations de contenu en tant que menu avant la reproduction des informations de reproduction. 35

16. Procédé de reproduction d'informations selon la revendication 14, dans lequel les informations de contenu, dont la présentation est limitée par les informations de commande de présentation, comprennent des informations essentielles indiquant l'essentiel des informations de reproduction, et des informations d'heure/date indiquant une heure/date concernant les informations de reproduction. 40

17. Support d'enregistrement d'informations sur lequel un programme d'enregistrement d'informations pouvant être mis en oeuvre par un processeur est enregistré de manière à être lu par un processeur (17) inclus dans un appareil d'enregistrement d'informations (S), lorsqu'il est exécuté, le programme amenant le processeur (17) à exécuter toutes les étapes d'un procédé selon la revendication 9. 45

18. Support d'enregistrement d'informations sur lequel un programme de reproduction d'informations pouvant être mis en oeuvre par un processeur est enregistré de manière à être lu par un processeur (17) inclus dans un appareil de reproduction d'informations (S), lorsqu'il est exécuté, le programme de reproduction d'informations amenant le processeur (17) à exécuter toutes les étapes d'un procédé selon la revendication 14. 50

19. Support d'enregistrement optique comprenant : une région d'enregistrement d'informations de reproduction dans laquelle des informations de reproduction sont enregistrées ; et une région d'enregistrement de liste de reproduction dans laquelle une liste de reproduction pour commander une manière d'exécuter la reproduction lors de la reproduction des informations de reproduction est enregistrée, 55

caractérisé en ce que
la liste de reproduction comprend des informations de commande de présentation qui indiquent si, oui ou non, une présentation d'informations de contenu indiquant un contenu des informations de reproduction est limitée, dans lequel les informations de contenu sont enregistrées différemment des informations de reproduction, et dans lequel les informations de contenu comprennent : au moins une image représentative qui représente un contenu des informations de reproduction ; et des informations de nom qui indiquent un nom des informations de reproduction. 60

20. Support d'enregistrement optique selon la revendication 19, dans lequel les informations de contenu sont des informations qui sont présentées avant de débuter le traitement de reproduction des informations de reproduction sur la base de la liste de reproduction. 65

21. Support d'enregistrement optique selon la revendication 19, dans lequel les informations de commande de présentation sont des informations qui indiquent si, oui ou non, une reproduction des informations de reproduction sur la base de la liste de reproduction est limitée. 70

22. Support d'enregistrement optique selon la revendication 19, dans lequel les informations de contenu comprennent au moins l'une d'informations d'image représentative qui correspondent à une image représentative qui représente une image contenue dans les informations de reproduction reproduites sur la base de la liste de reproduction, d'informations de titre qui correspon- 75

dent à un titre représentant les informations de reproduction, d'informations essentielles indiquant l'essentiel des informations de reproduction, et d'informations d'heure/date indiquant une heure/date concernant les informations de reproduction. 5

10

15

20

25

30

35

40

45

50

55

28

FIG. 1 1 : OPTICAL DISC

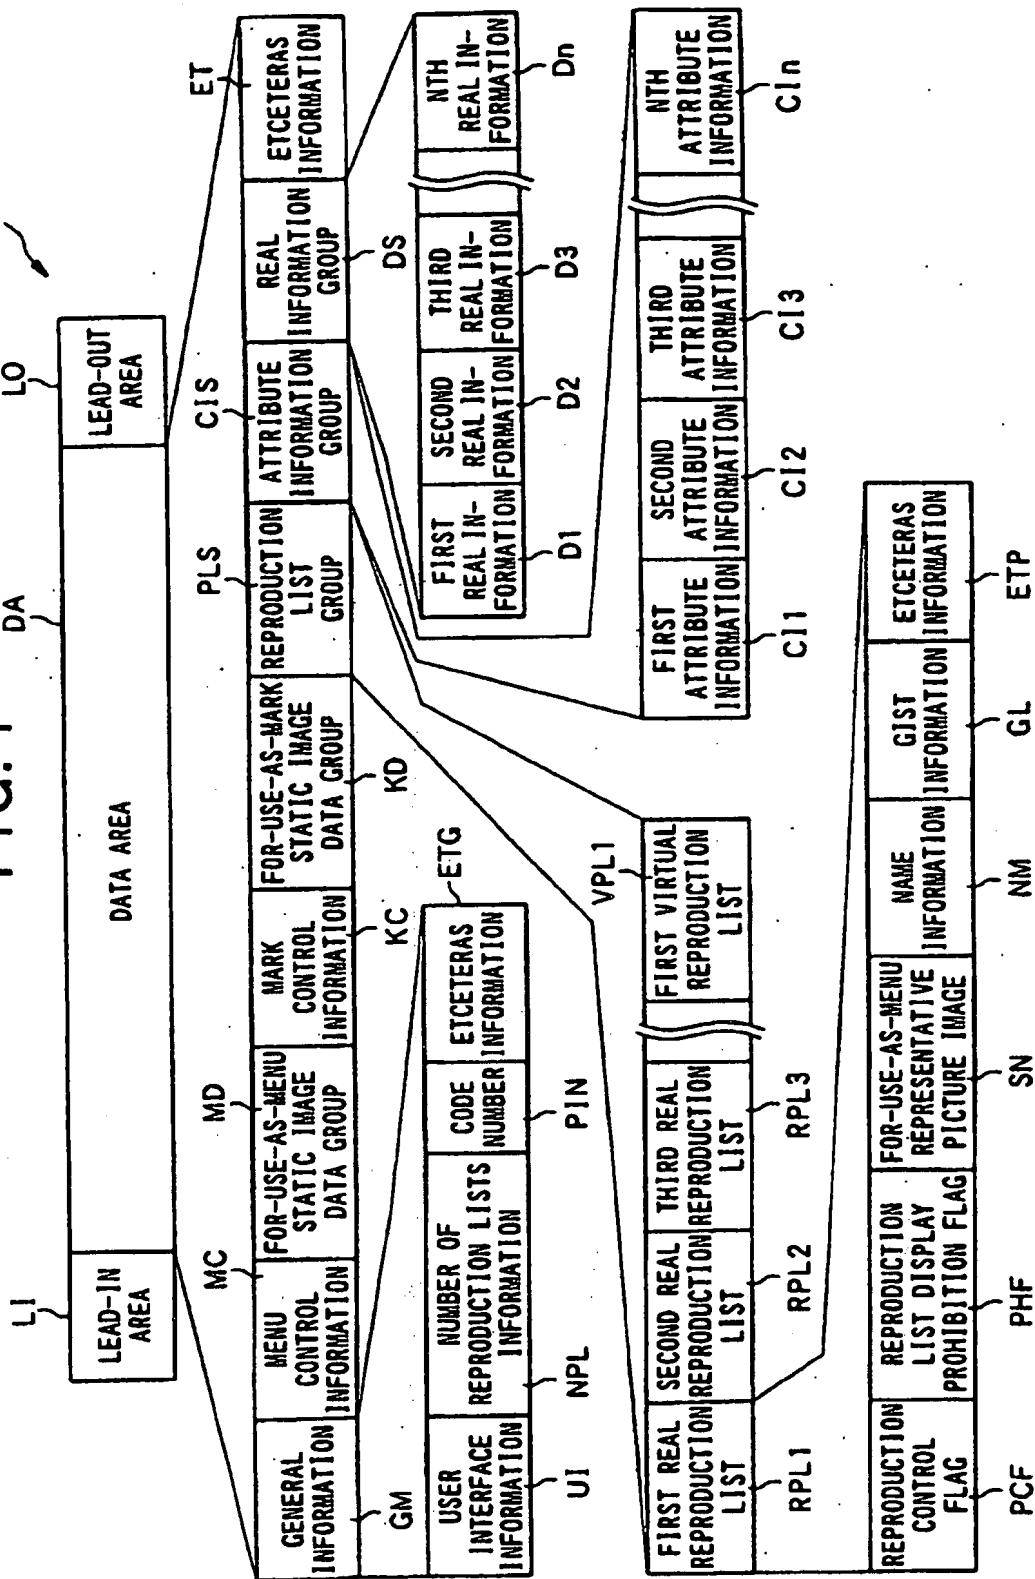


FIG. 2

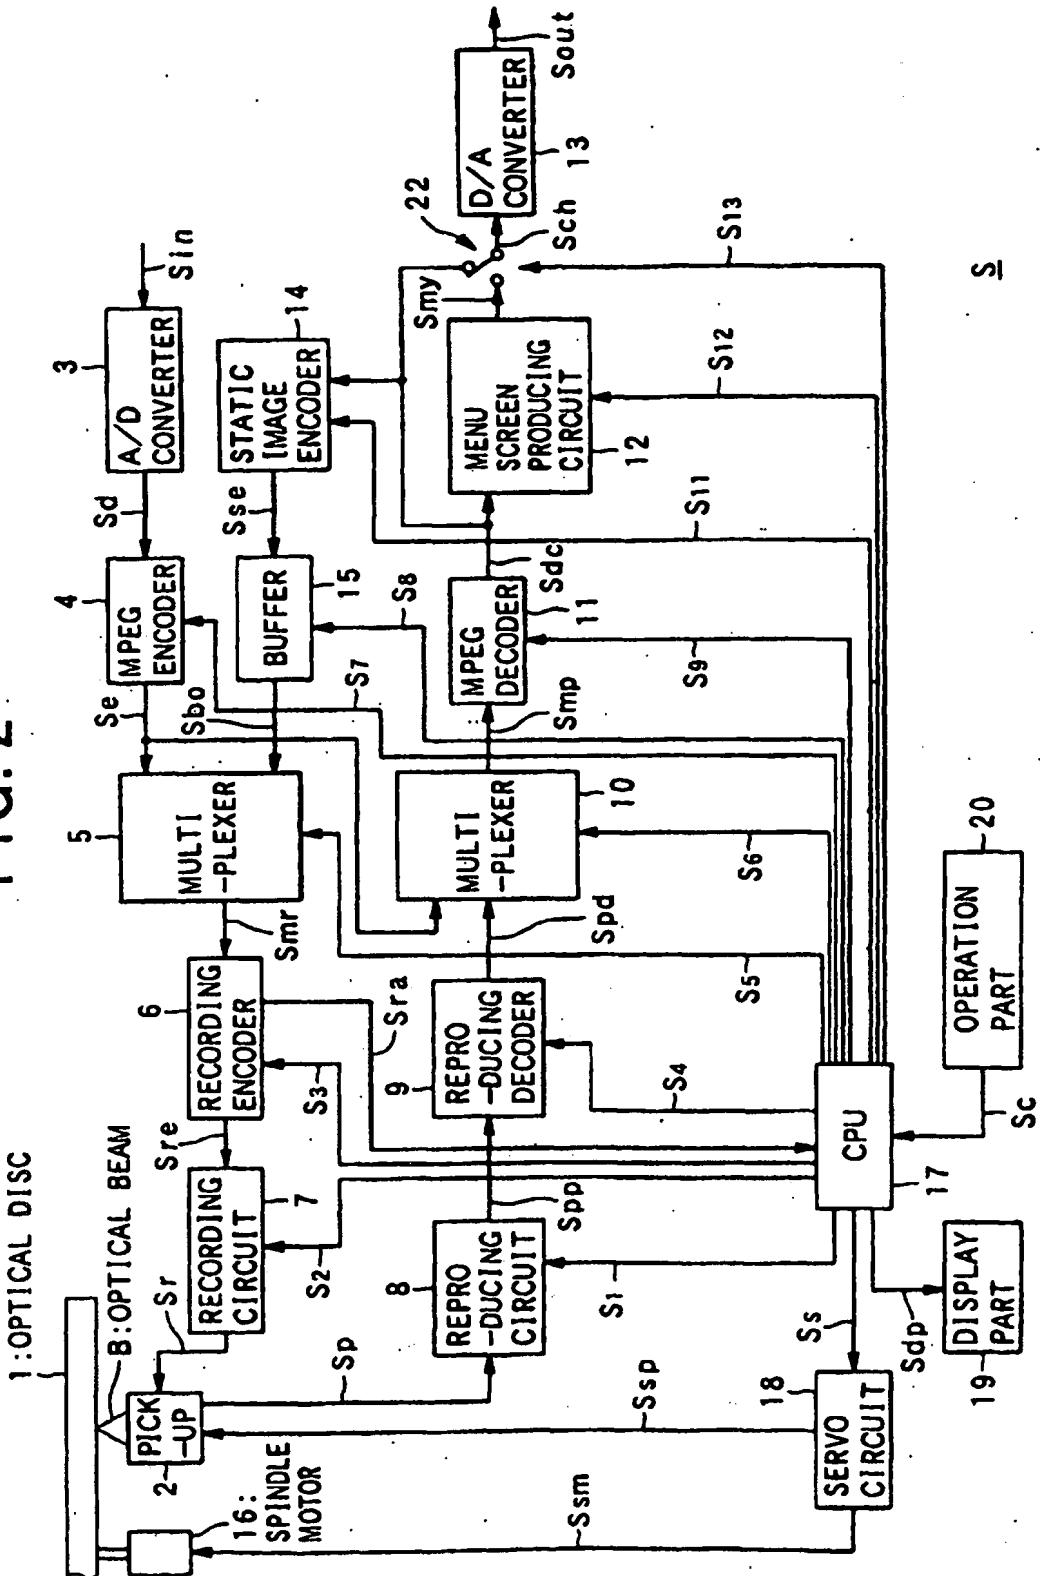


FIG. 3

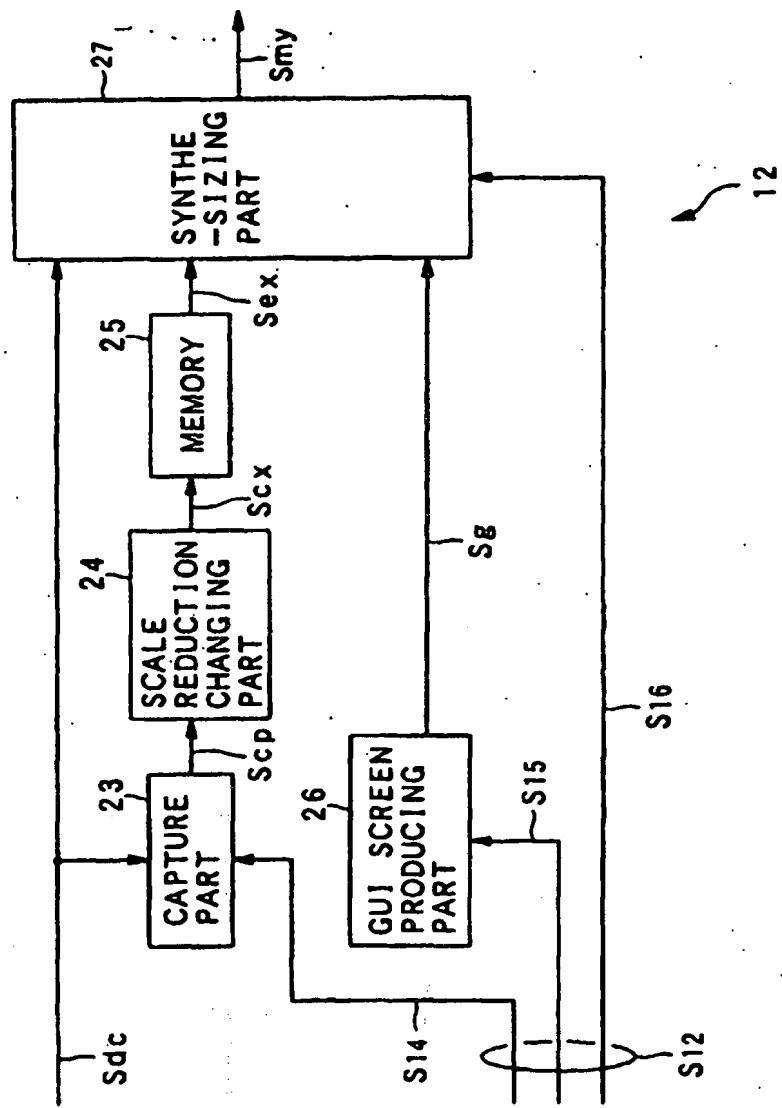


FIG. 4

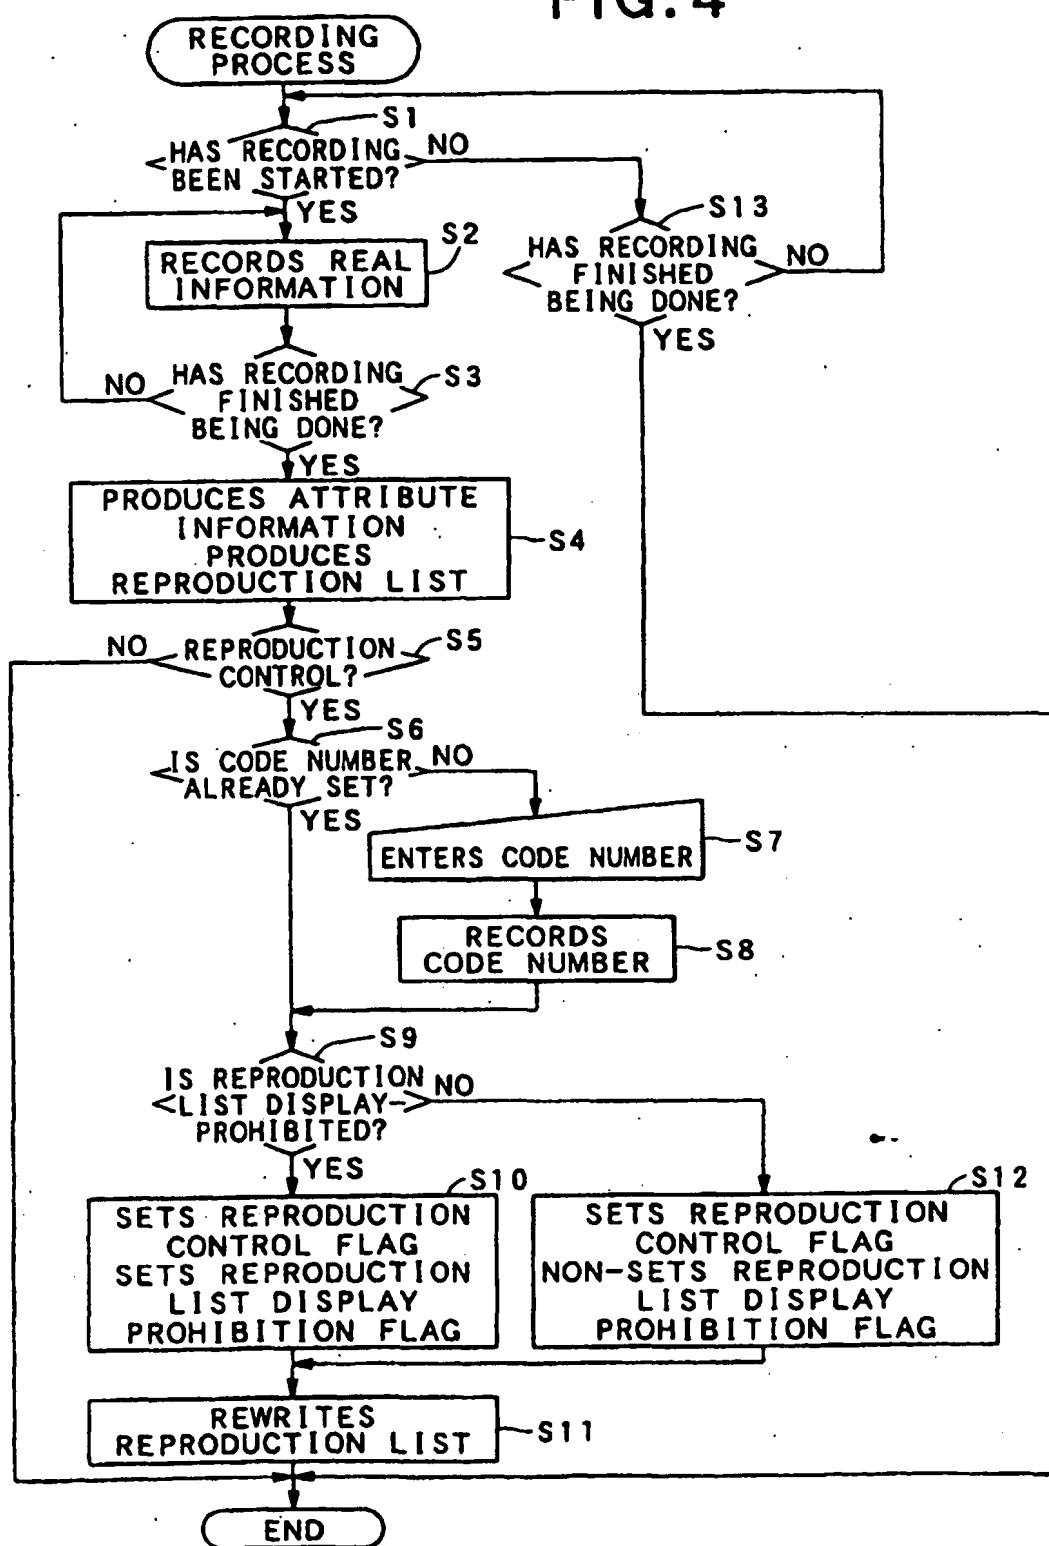


FIG. 5

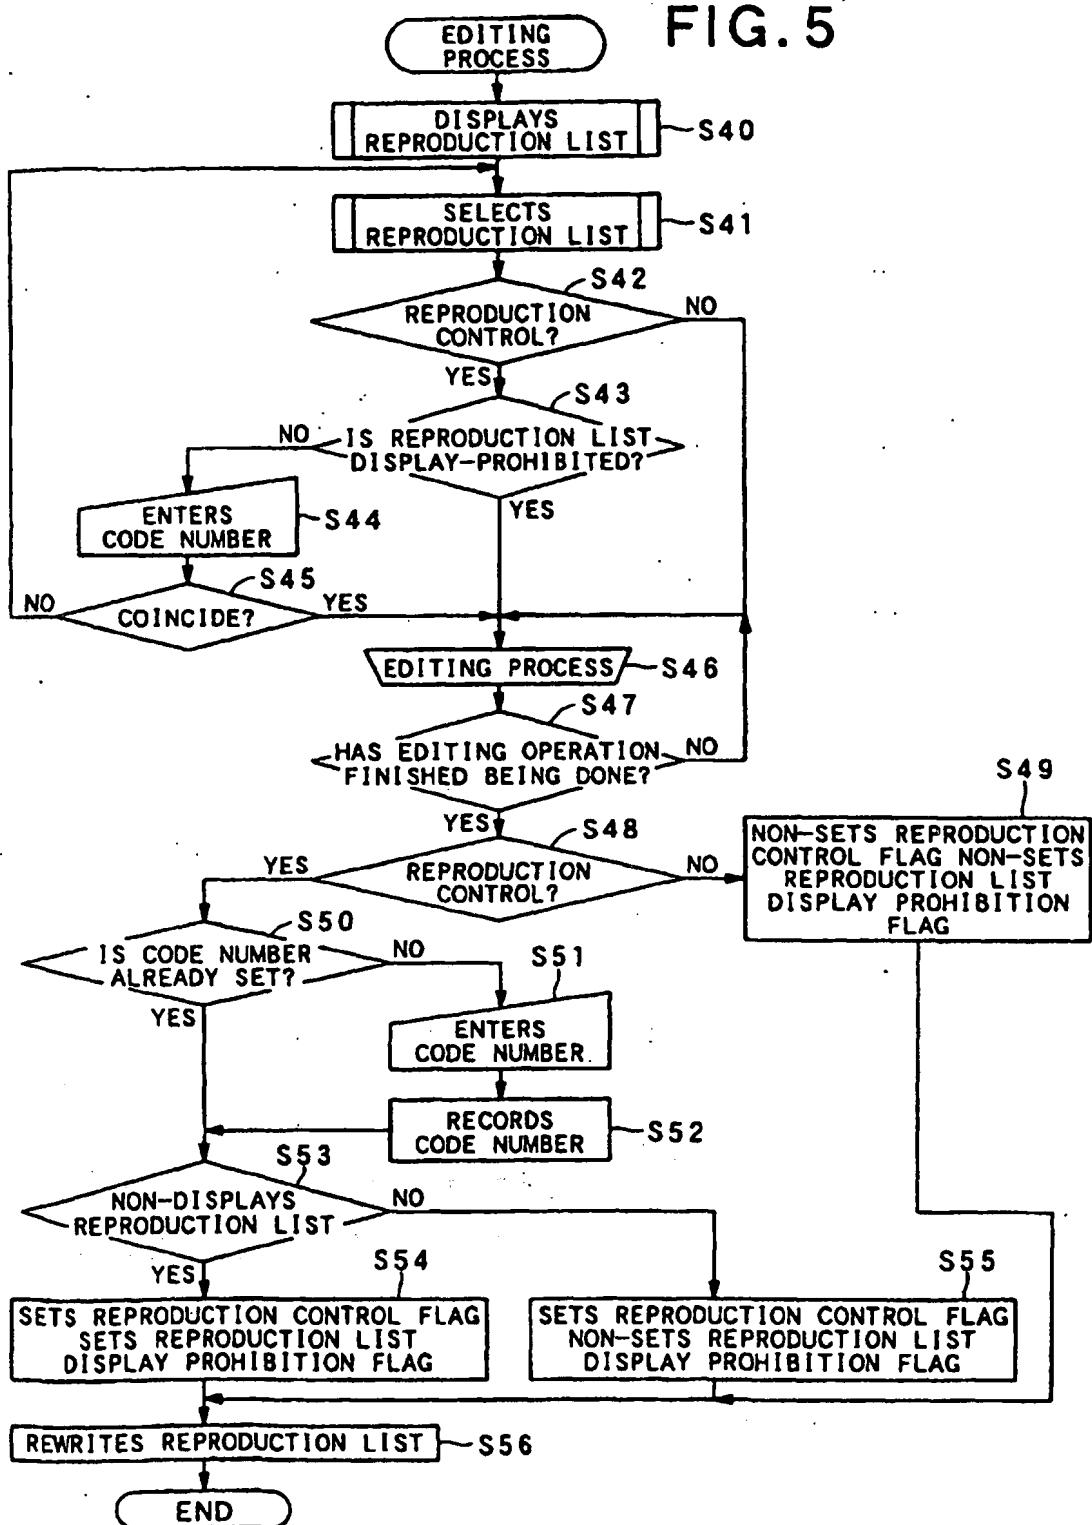


FIG. 6

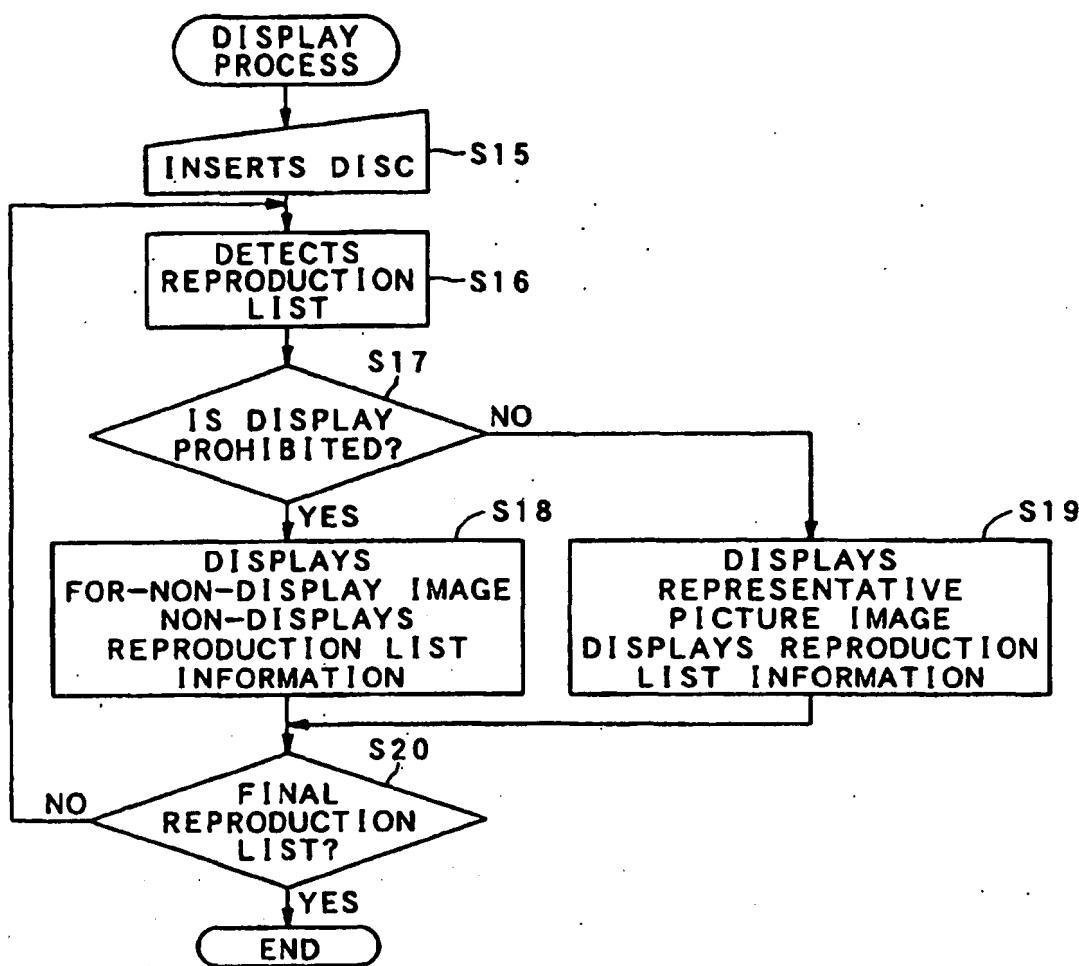


FIG. 7A

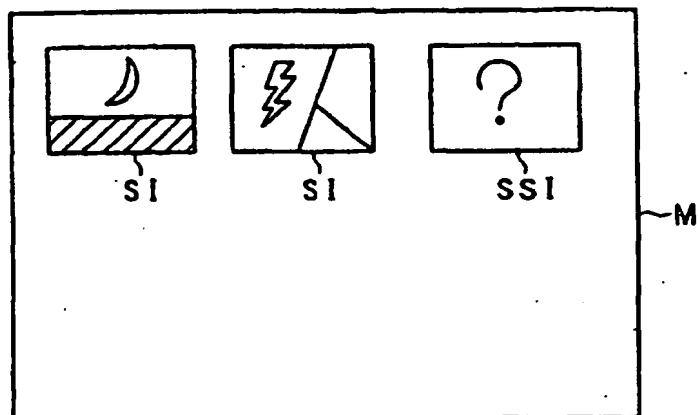


FIG. 7B

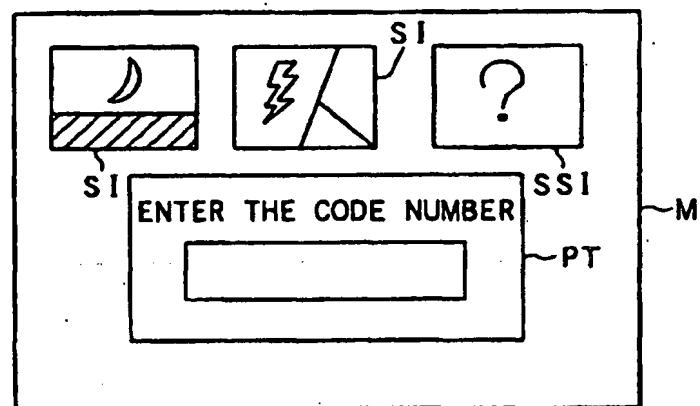


FIG. 7C

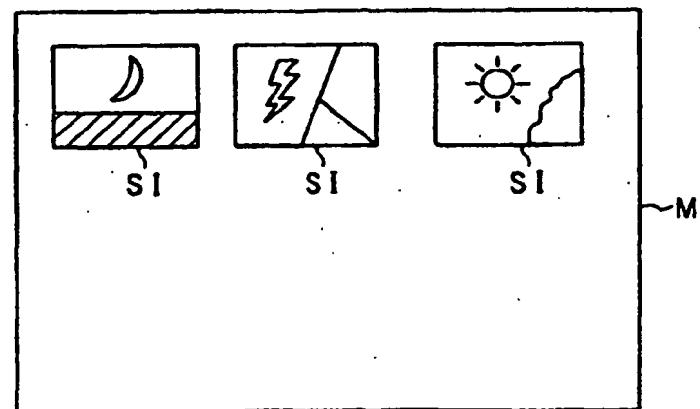


FIG. 8

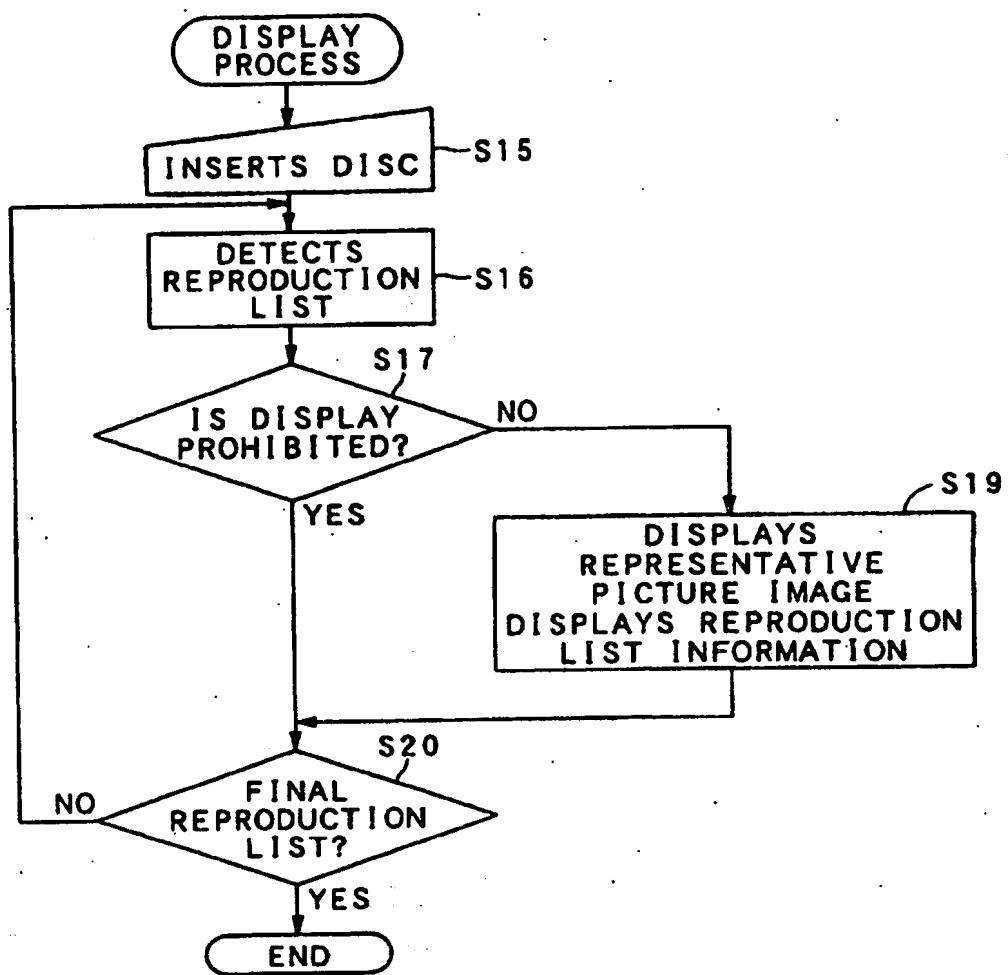


FIG. 9A

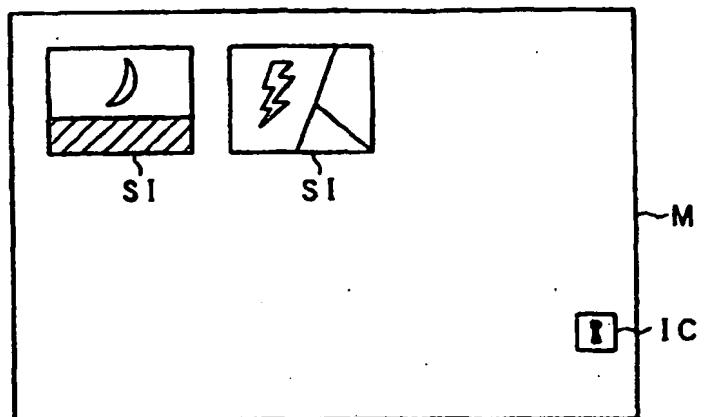


FIG. 9B

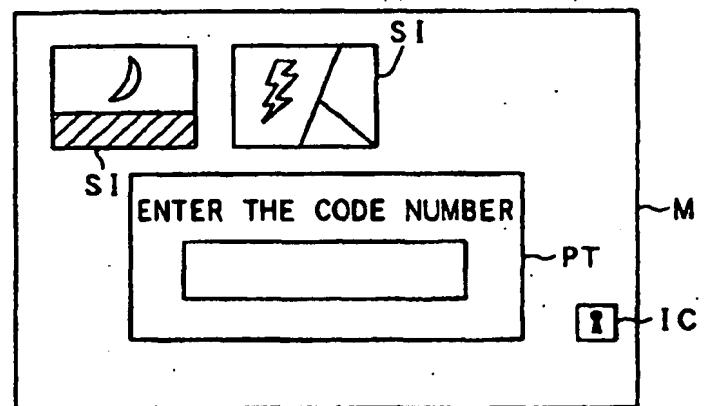


FIG. 9C

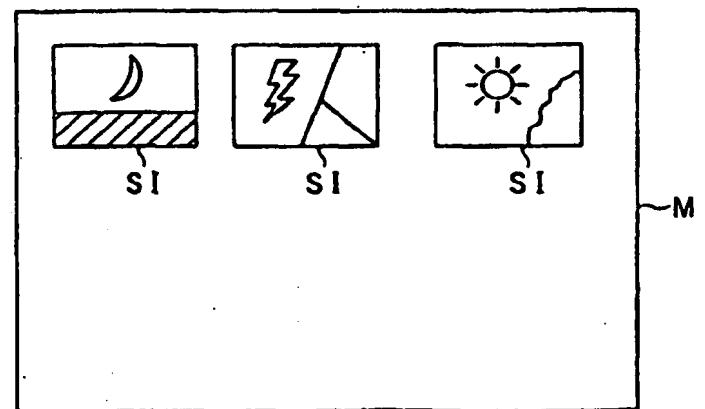


FIG.10

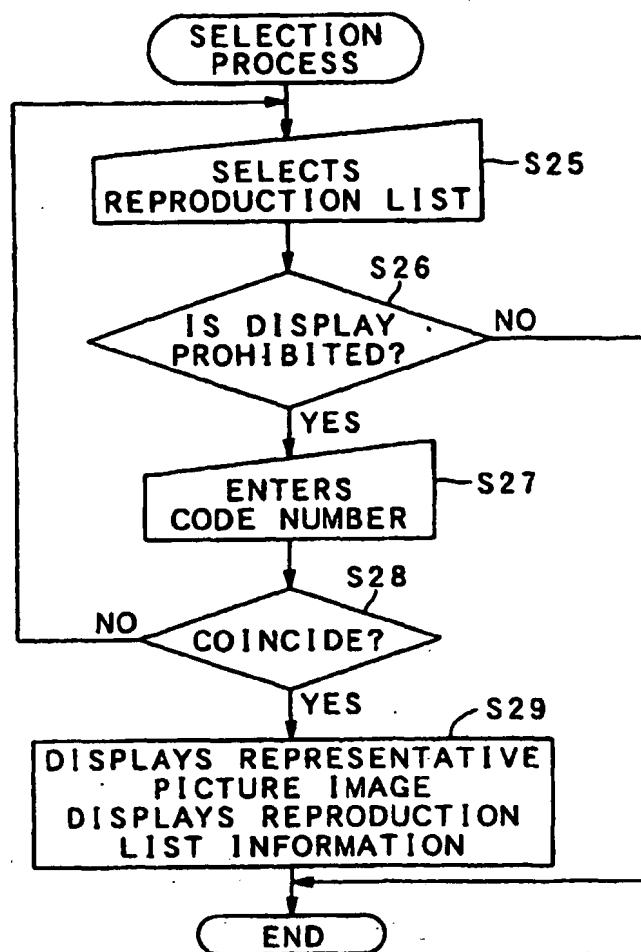


FIG. 11

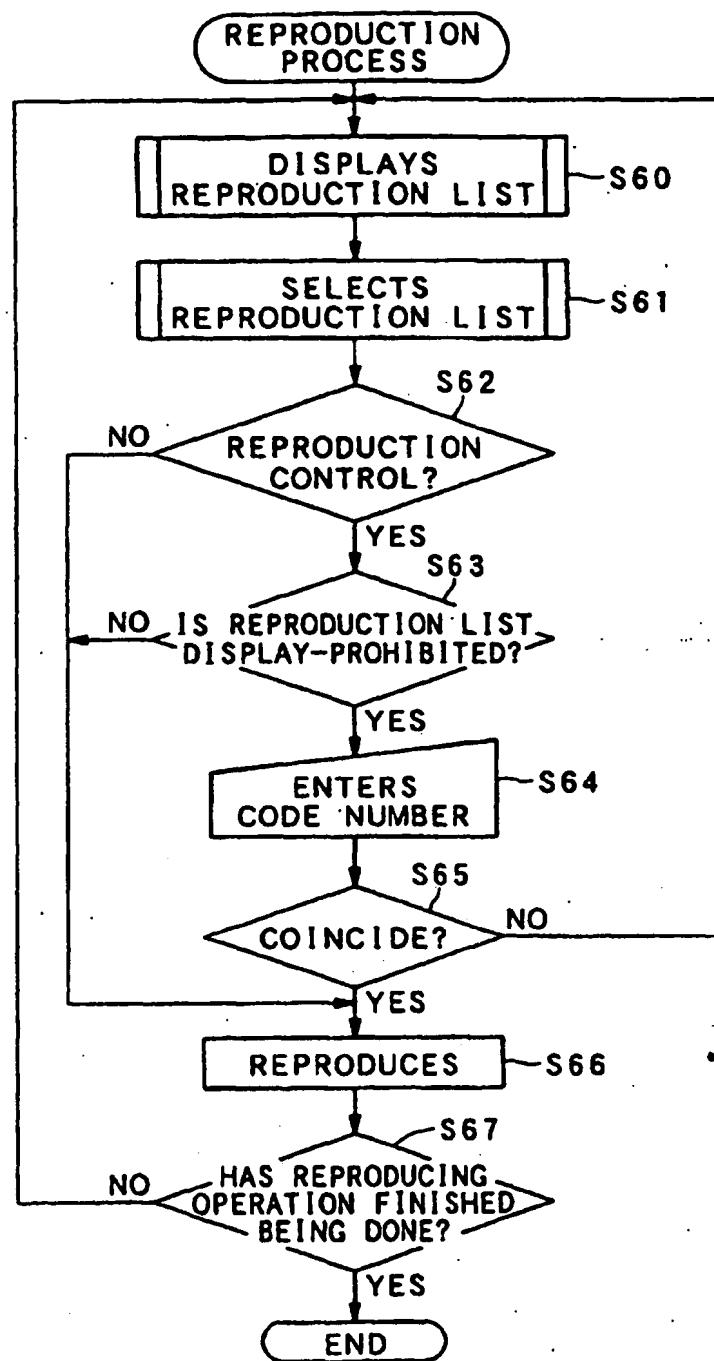


FIG. 12

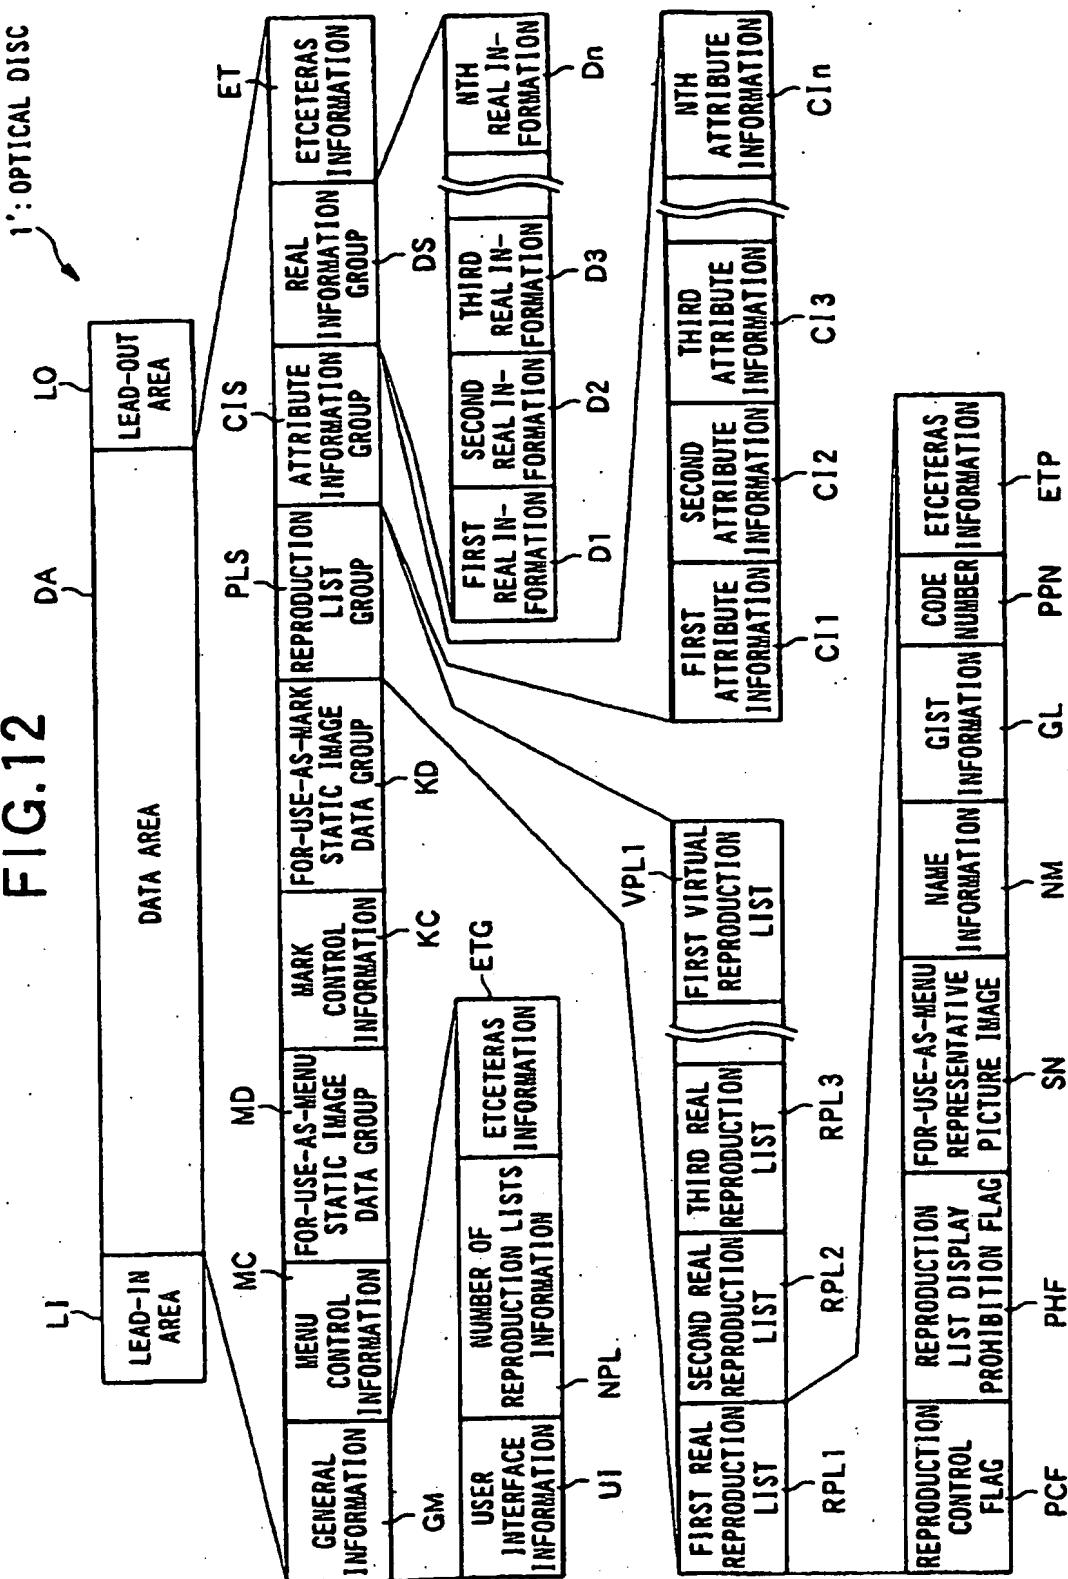


FIG. 13

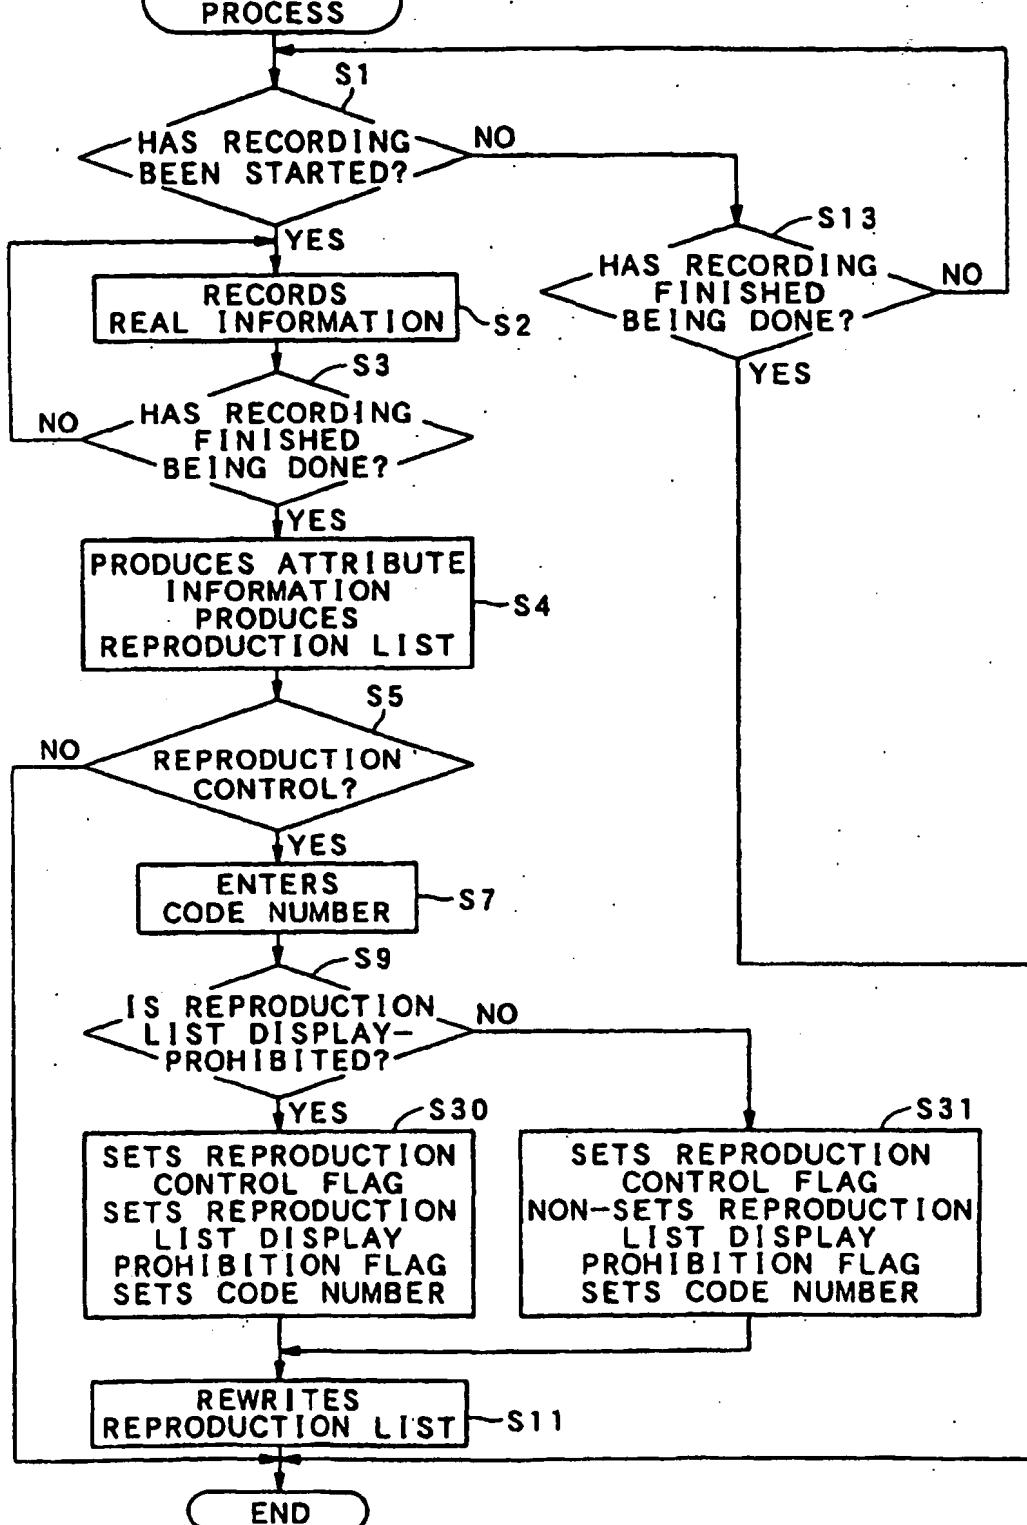


FIG. 14

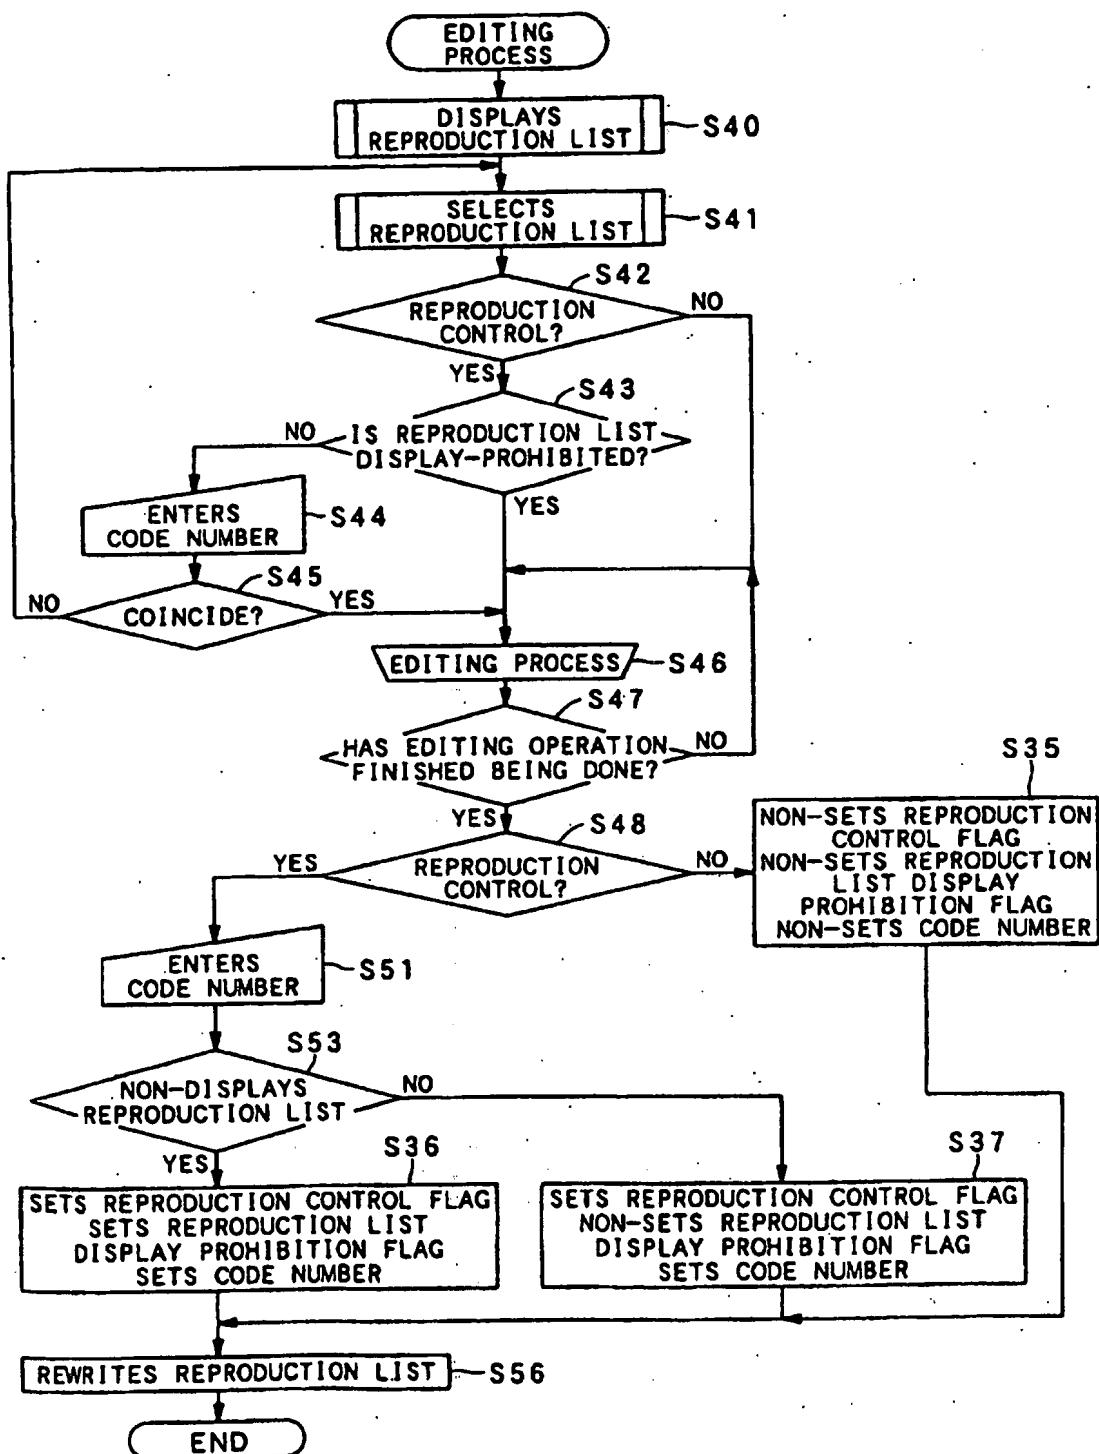


FIG. 15

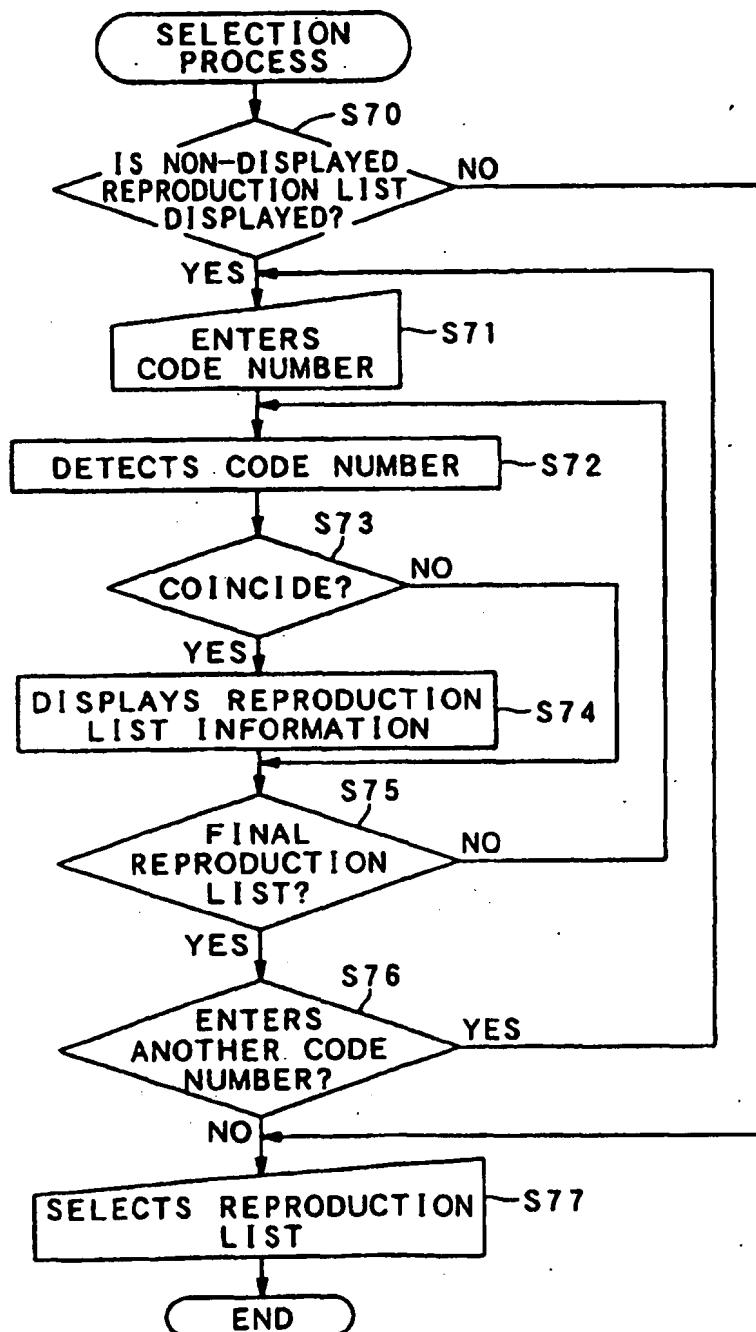


FIG. 16 1" : OPTICAL DISC

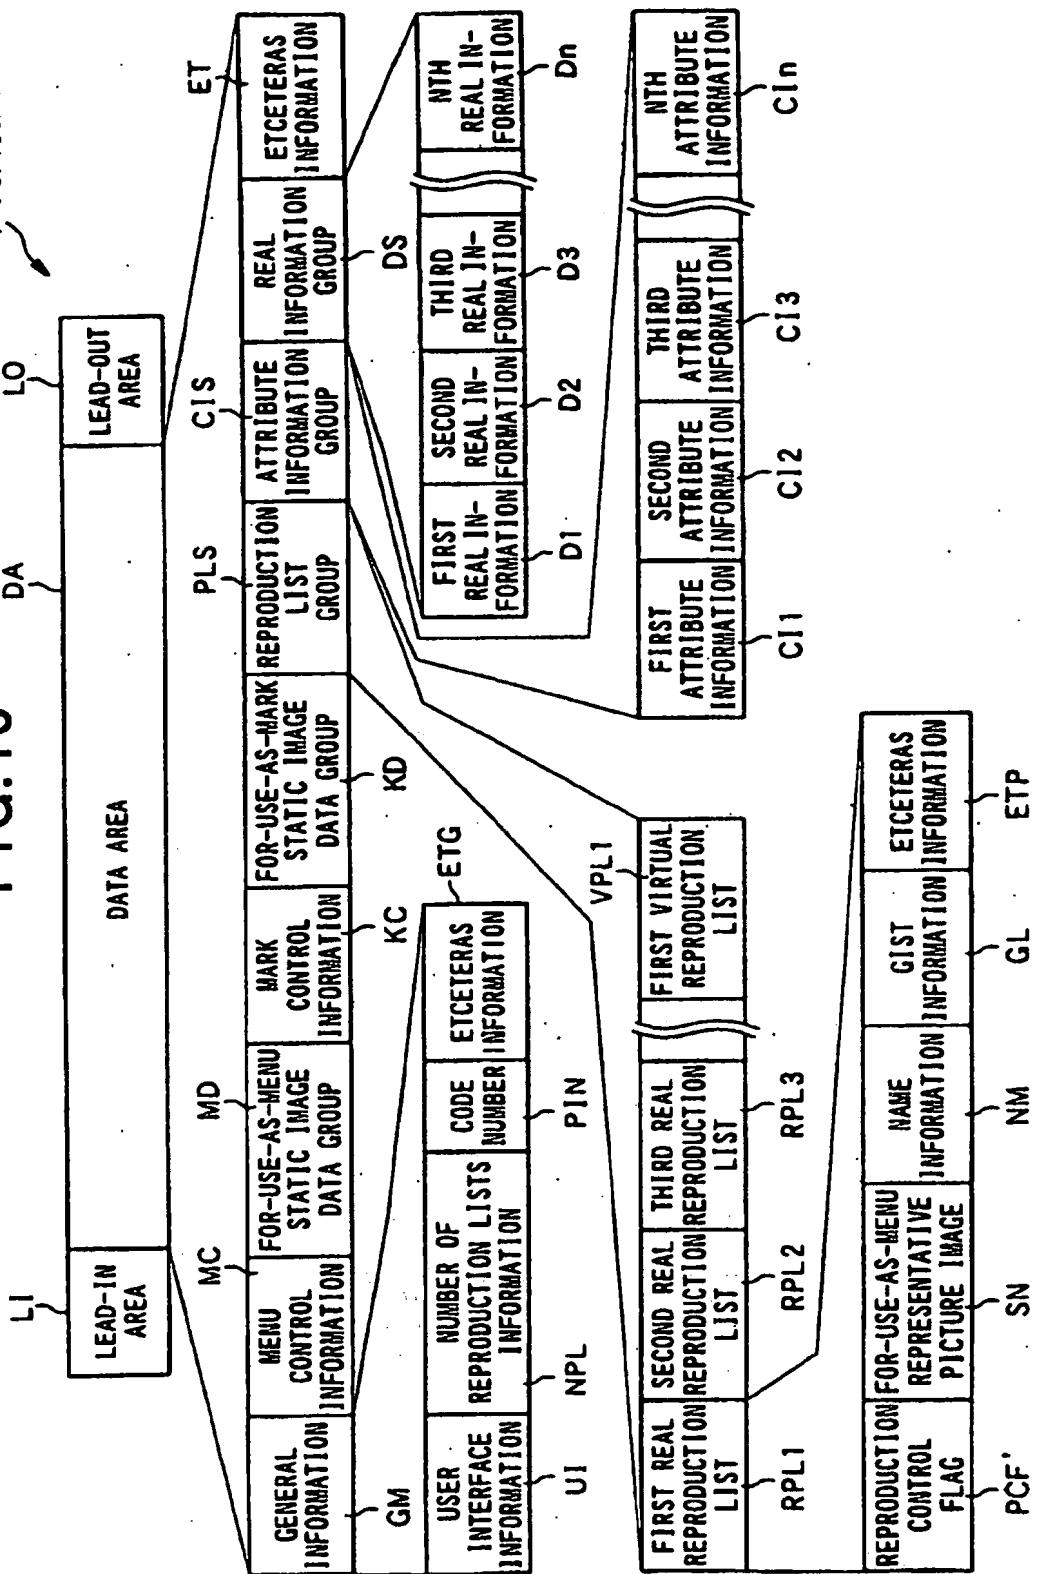


FIG. 17

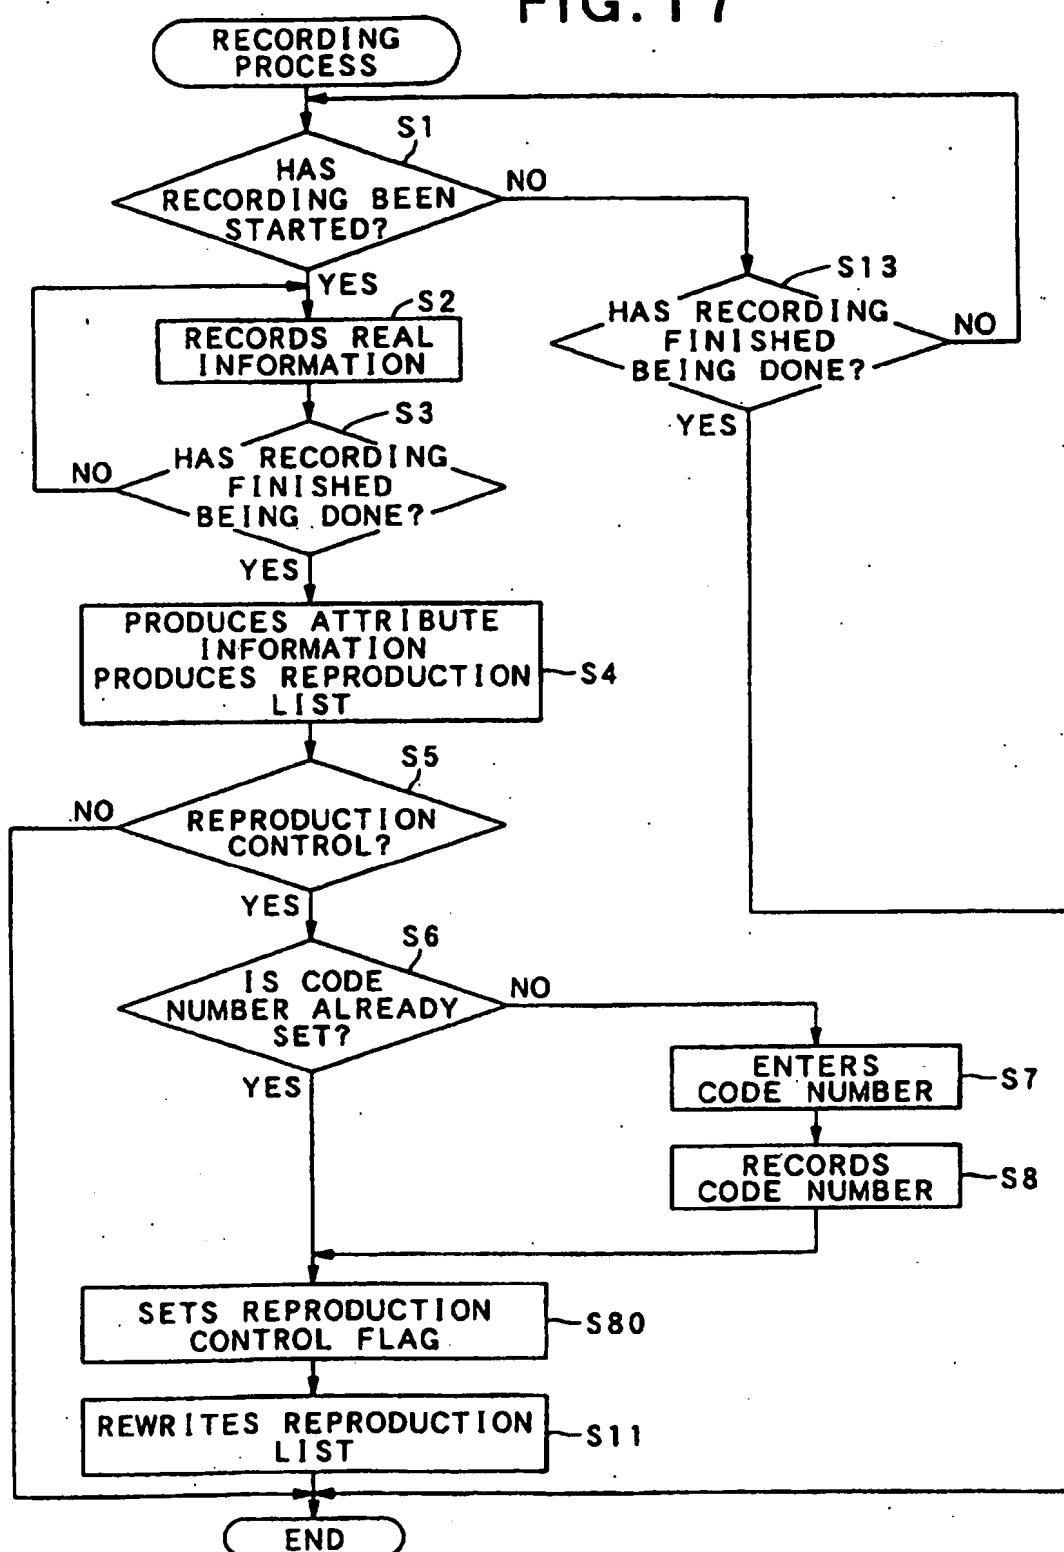


FIG. 18

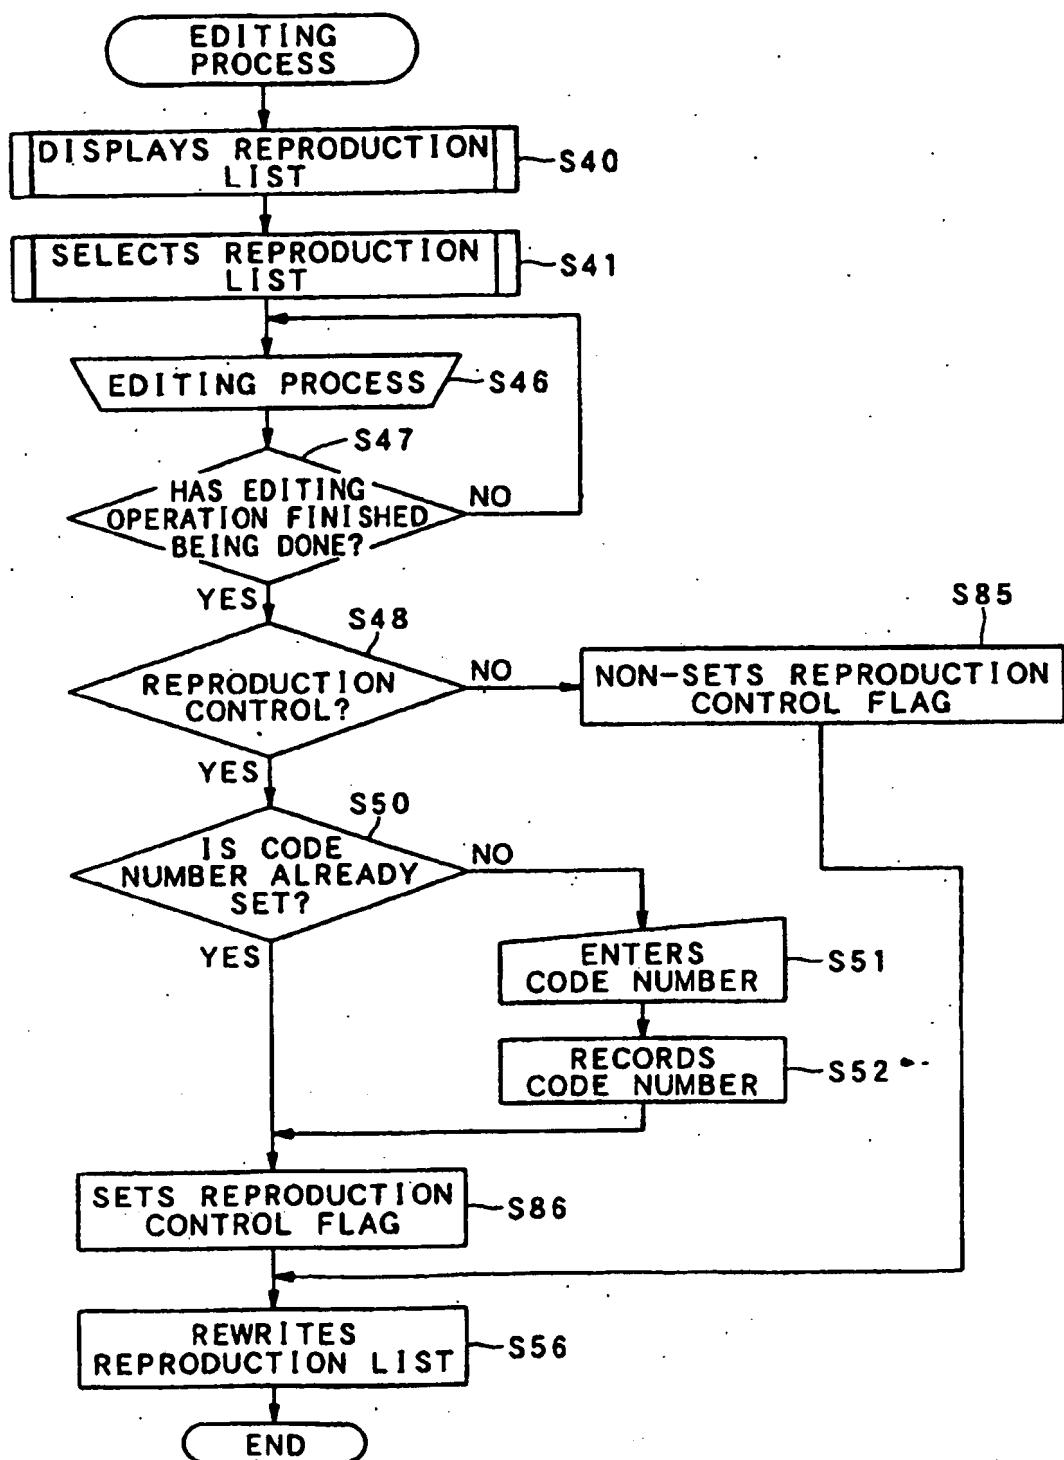


FIG. 19

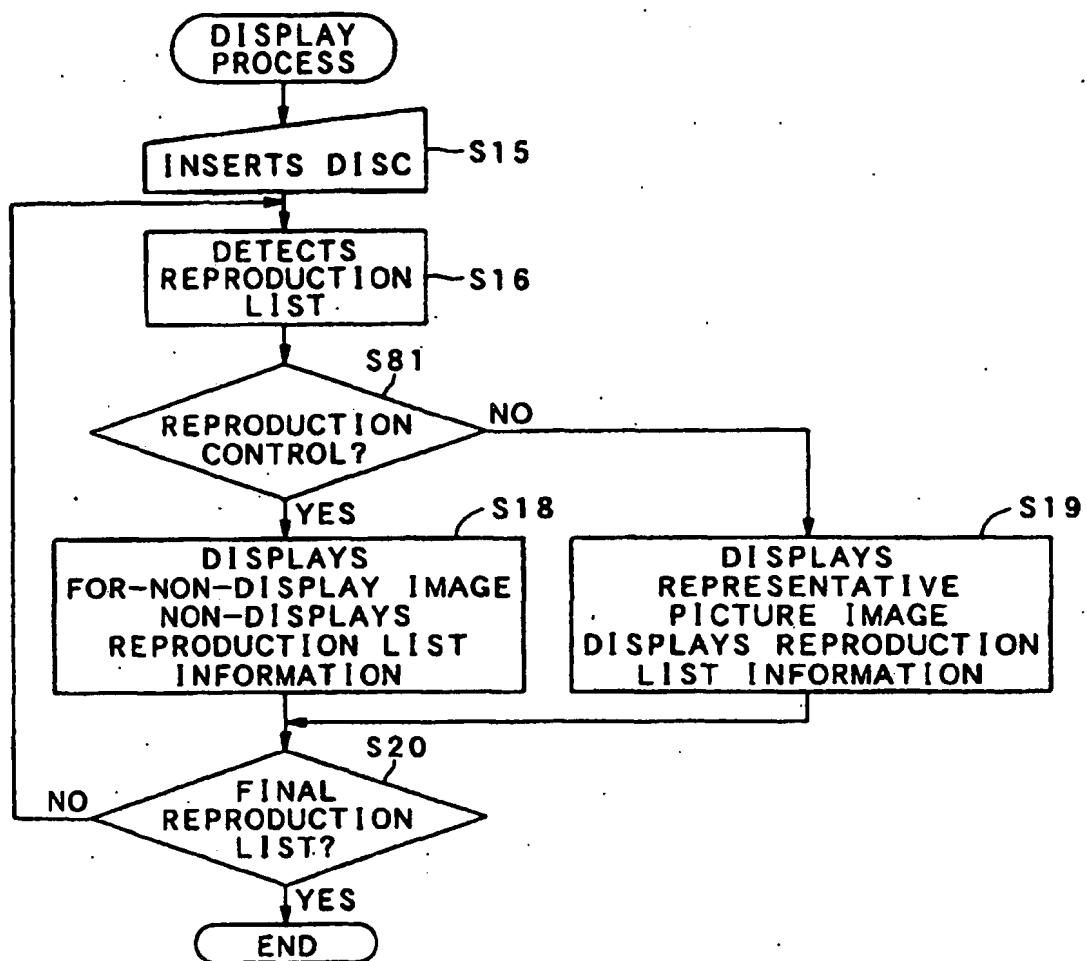


FIG. 20

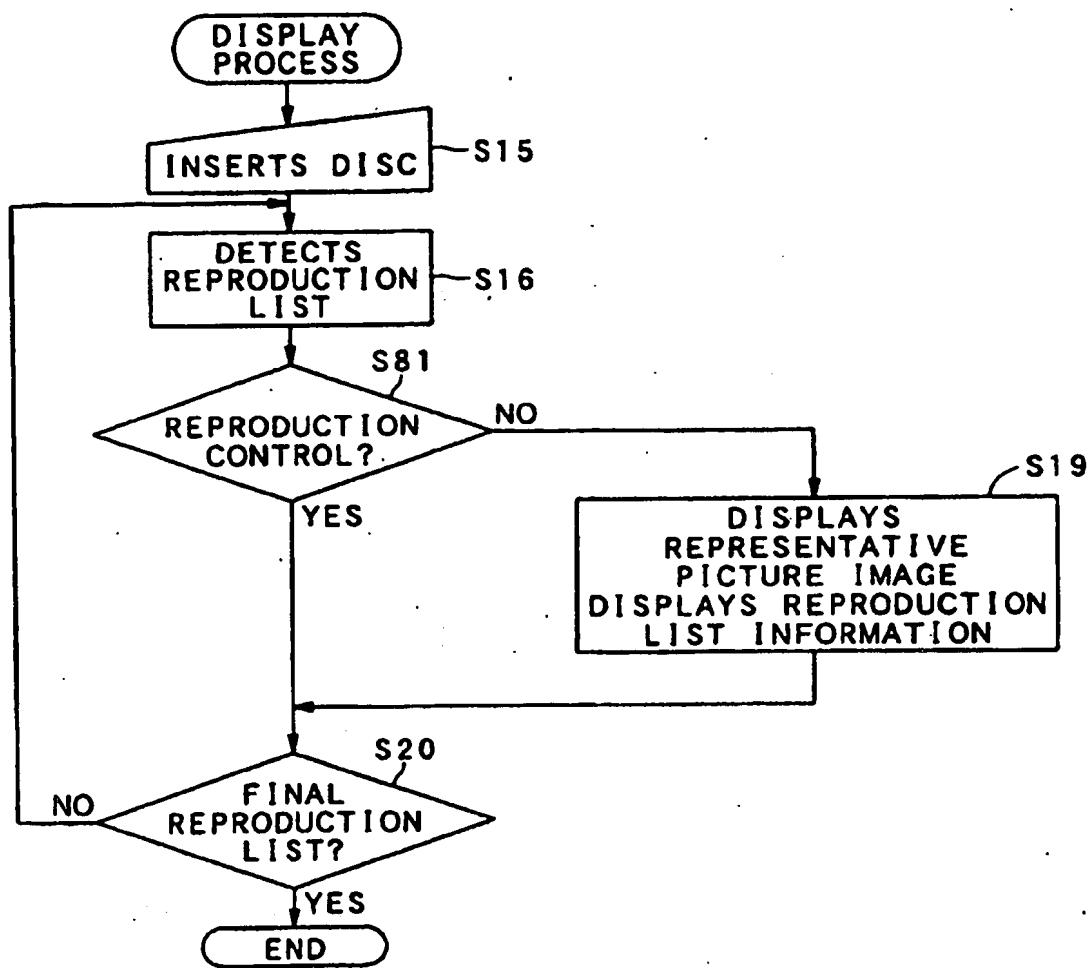


FIG. 21

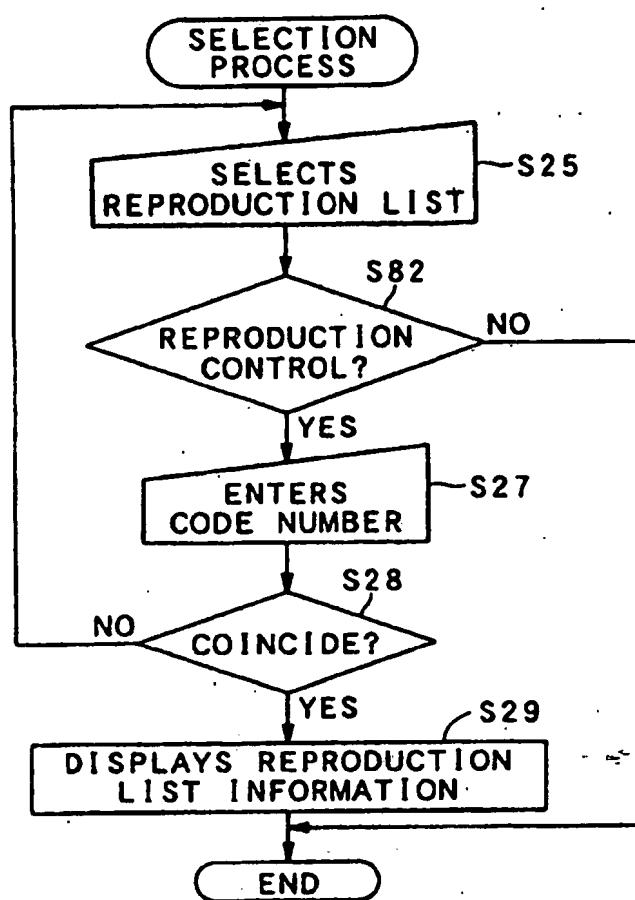


FIG. 22

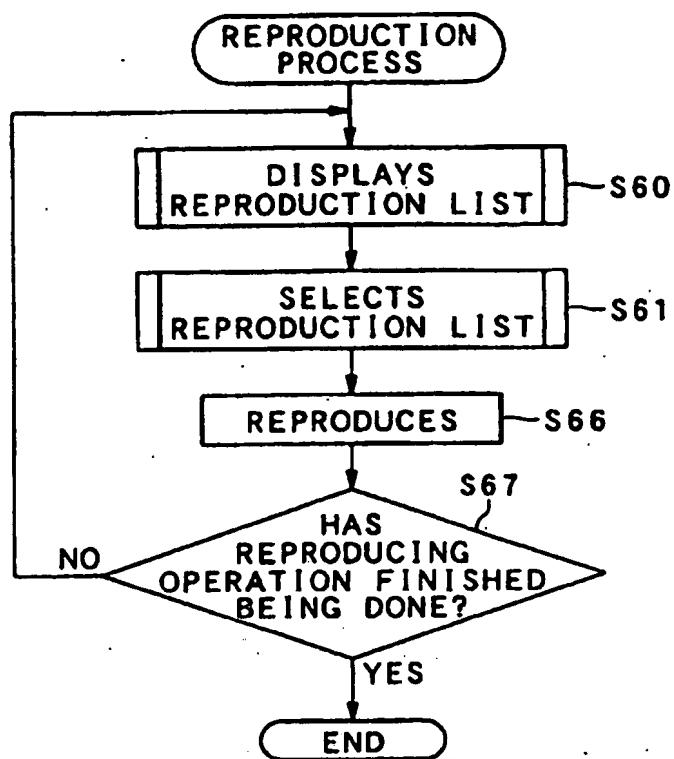


FIG. 23 1": OPTICAL DISC

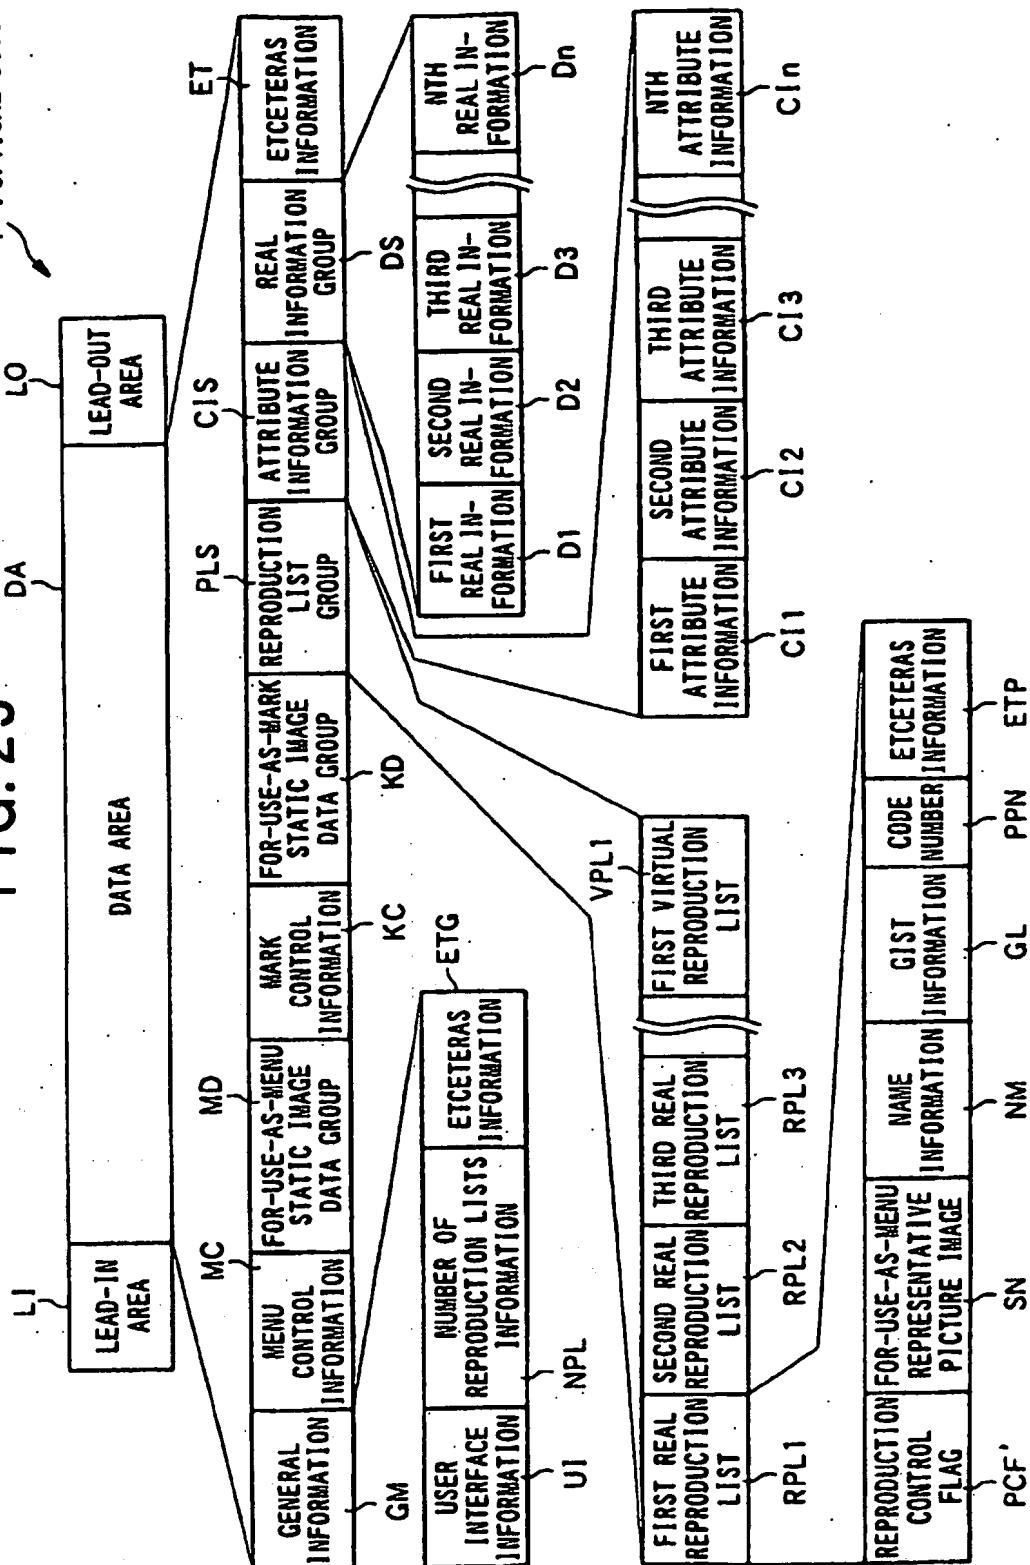


FIG. 24


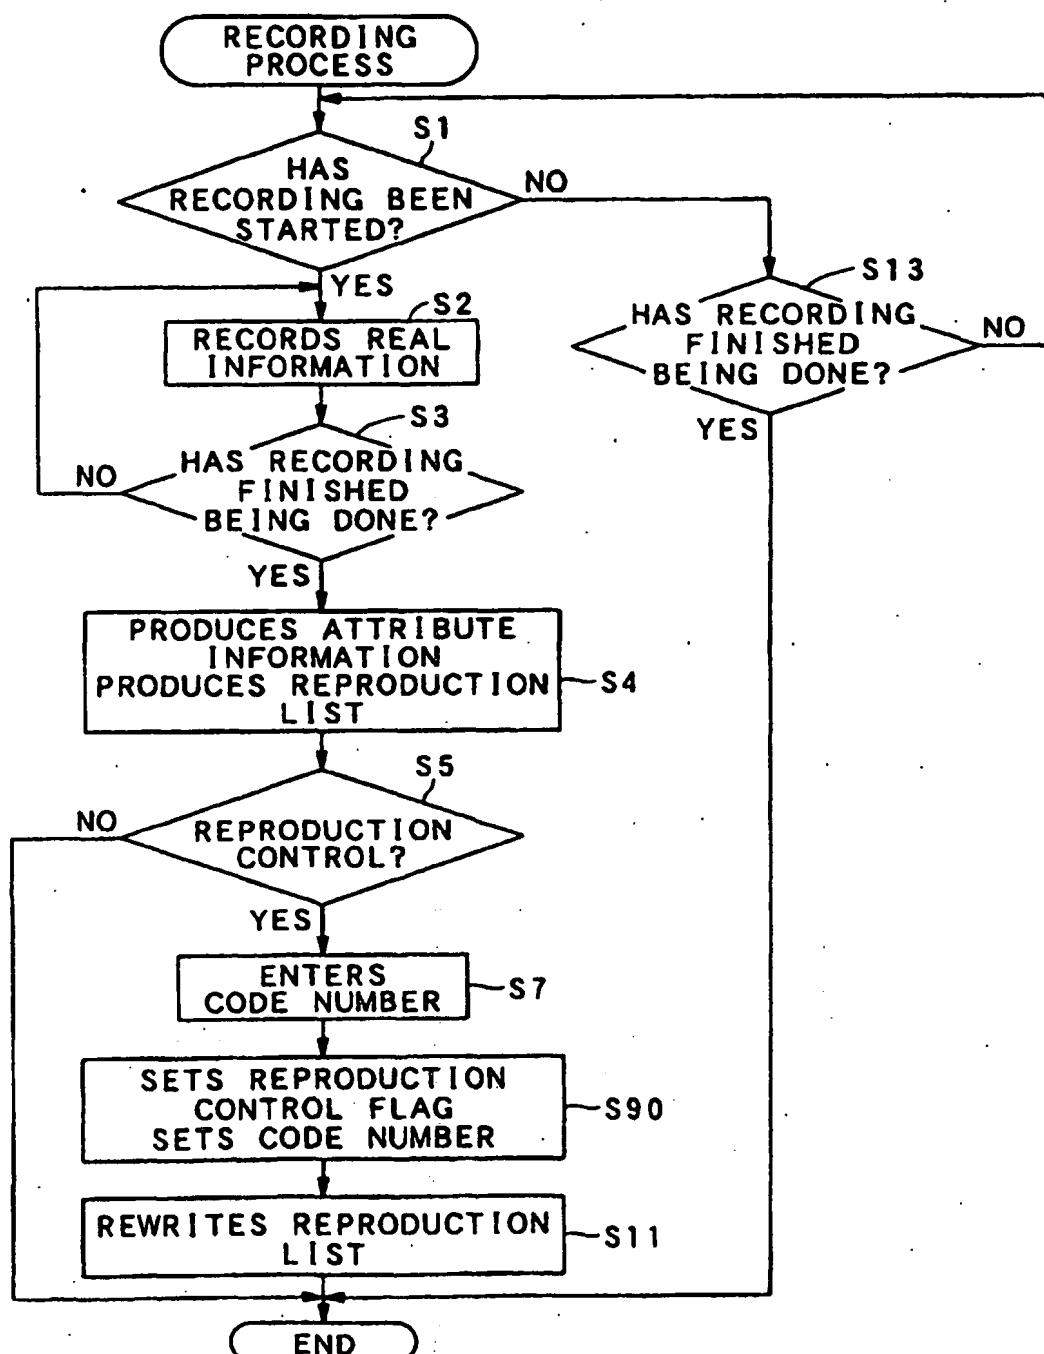


FIG. 25

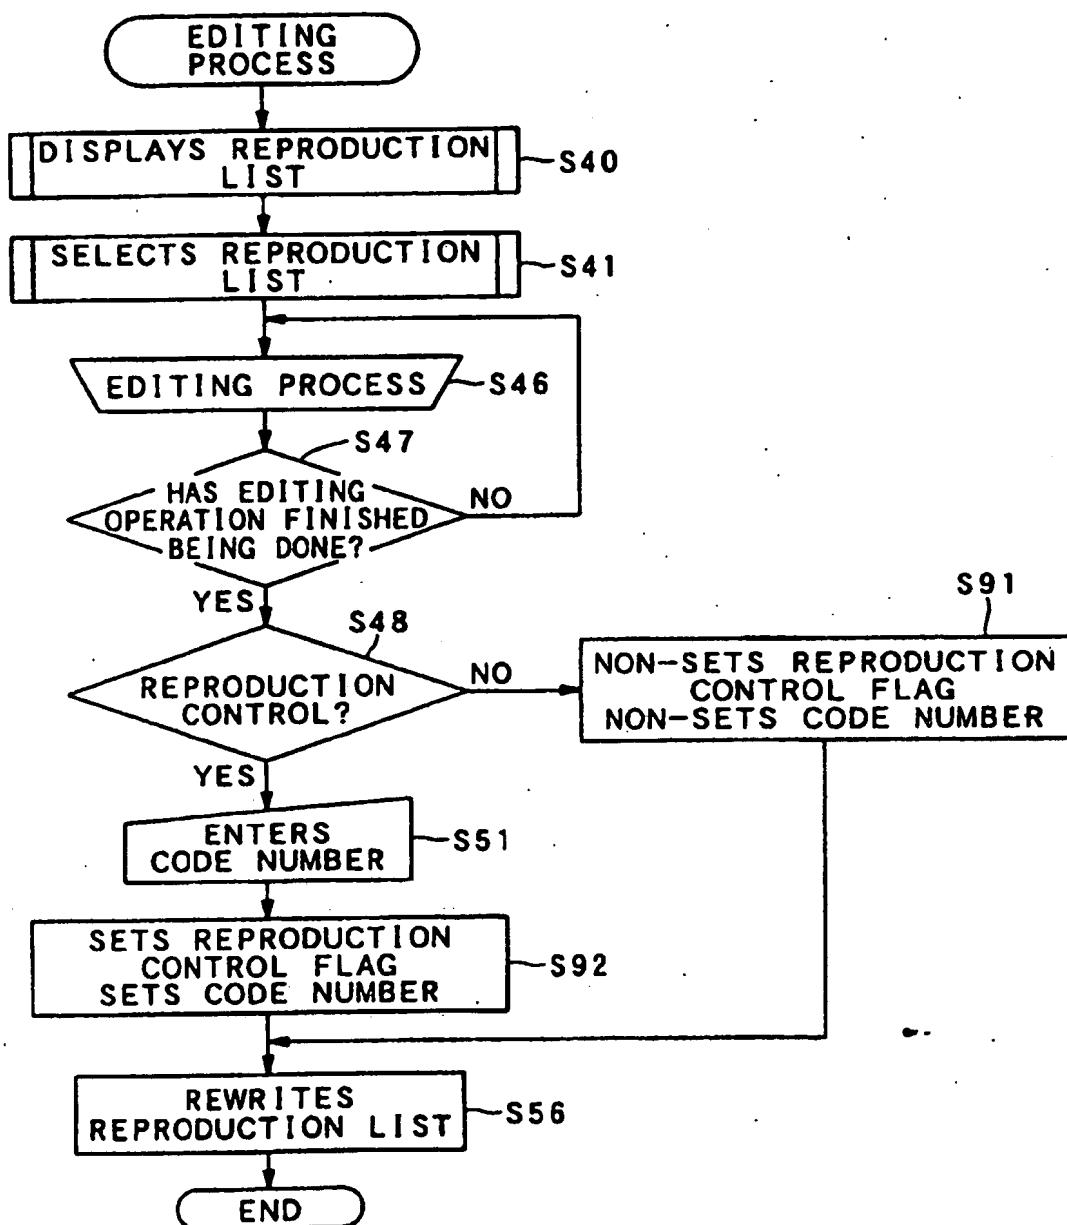

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2000035375 A [0003]
- WO 0051346 A [0007]