



Office de la Propriété

Intellectuelle  
du Canada

Un organisme  
d'Industrie Canada

Canadian  
Intellectual Property  
Office

An agency of  
Industry Canada

CA 2777065 C 2014/08/26

(11)(21) **2 777 065**

(12) **BREVET CANADIEN**  
**CANADIAN PATENT**

(13) **C**

(86) Date de dépôt PCT/PCT Filing Date: 2010/10/14  
(87) Date publication PCT/PCT Publication Date: 2011/04/21  
(45) Date de délivrance/Issue Date: 2014/08/26  
(85) Entrée phase nationale/National Entry: 2012/04/05  
(86) N° demande PCT/PCT Application No.: US 2010/052651  
(87) N° publication PCT/PCT Publication No.: 2011/047141  
(30) Priorité/Priority: 2009/10/14 (US12/579,370)


(51) Cl.Int./Int.Cl. *H01Q 1/24* (2006.01),  
*H03H 7/40* (2006.01), *H04B 1/18* (2006.01)

(72) Inventeurs/Inventors:  
ALI, SHIROOK, CA;  
WARDEN, JAMES PAUL, US;  
BAKR, MOHAMED, CA

(73) Propriétaires/Owners:  
BAKR, MOHAMED, CA;  
BLACKBERRY LIMITED, CA

(74) Agent: MOFFAT & CO.

(54) Titre : ETALONNAGE DYNAMIQUE EN TEMPS REEL POUR ADAPTATION D'ANTENNE DANS UN SYSTEME  
D'EMETTEUR RADIOFRÉQUENCE  
(54) Title: DYNAMIC REAL-TIME CALIBRATION FOR ANTENNA MATCHING IN A RADIO FREQUENCY  
TRANSMITTER SYSTEM

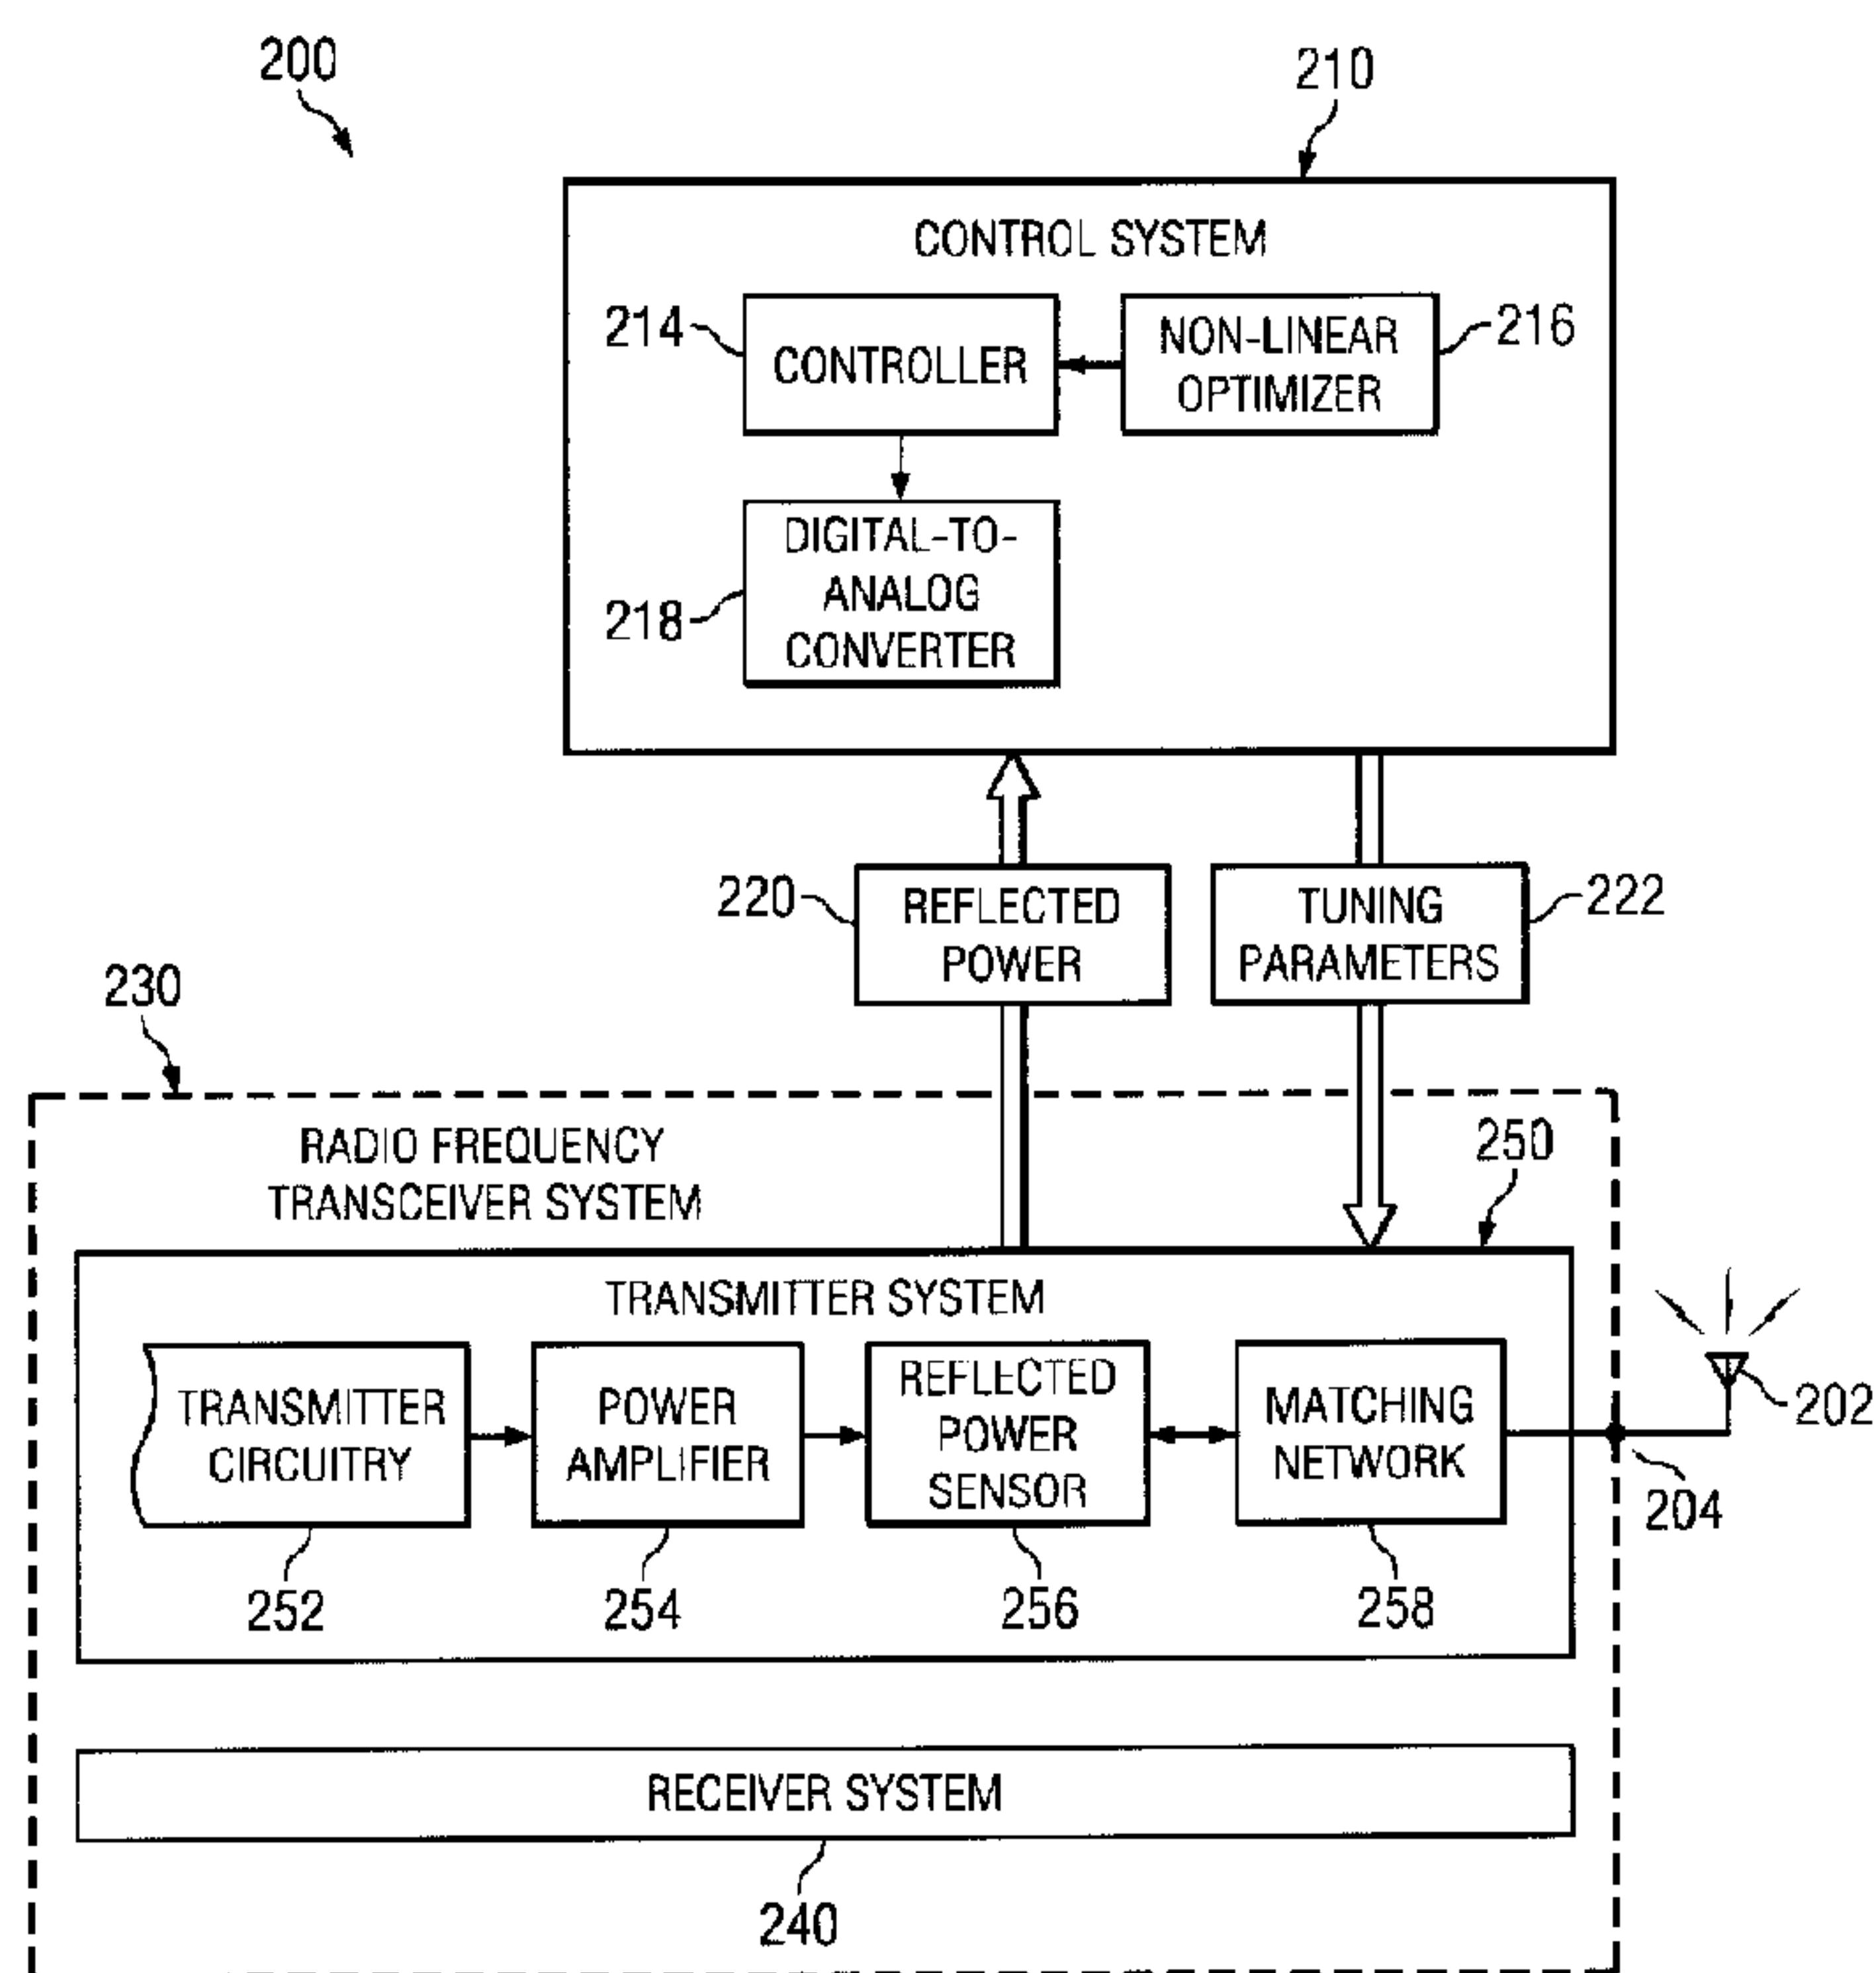

(57) Abrégé/Abstract:

Real-time calibration of a tunable matching network that matches the dynamic impedance of an antenna in a radio frequency transmitter system. The radio frequency transmitter system includes two non-linear equations that may be solved to determine the reflection coefficient of the antenna. The tunable matching network is repeatedly perturbed and the power reflected by the antenna is measured after each perturbation at the same node within the tunable matching network. The power values are used by an optimizer in converging to a solution that provides input impedance of the antenna. The elements of the matching circuit are adjusted to match the input impedance of the antenna.

## ABSTRACT

Real-time calibration of a tunable matching network that matches the dynamic impedance of an antenna in a radio frequency transmitter system. The radio frequency transmitter system includes two non-linear equations that may be solved to determine the reflection coefficient of the antenna. The tunable matching network is repeatedly perturbed and the power reflected by the antenna is measured after each perturbation at the same node within the tunable matching network. The power values are used by an optimizer in converging to a solution that provides input impedance of the antenna. The elements of the matching circuit are adjusted to match the input impedance of the antenna.

# DYNAMIC REAL-TIME CALIBRATION FOR ANTENNA MATCHING IN A RADIO FREQUENCY TRANSMITTER SYSTEM

## BACKGROUND

### 1. Technical Field

**[0001]** This disclosure relates to wireless communications systems and more specifically to the design and implementation of an adaptive wireless radio frequency transmitter system that dynamically matches, in real-time, the impedance of an antenna.

### 2. Description of the Related Art

**[0002]** The reliability and efficiency of wireless communication systems are often affected by the environment in which the communications occur. For example, objects in the near field environment, or within a close proximity of an antenna, such as, but not limited to, human objects, metal objects, and buildings may reduce the level of electromagnetic energy radiated by the antenna. These objects may include, for example, without limitation, a human or other such biological object, a metal object, an aircraft, a tree, a building, and other such objects or a combination of objects. The reduced radiation of electromagnetic energy results in a high percentage of power being reflected back to a radio frequency transmitter. The amount of power reflected is an indicator of the degree of impedance mismatch between the antenna and the radio frequency transmitter.

**[0003]** Transceiver circuits, and in particular, transmitter circuits, may increase the power transmitted by an antenna and decrease the reflected power by predicting the types of environment in which a wireless communication system may be used. The transmitter circuits may then be preset to specific values which will reduce the reflective power of the transmitter circuit within the predetermined environment.

## BRIEF DESCRIPTION OF THE DRAWINGS

[0004] For a better understanding of the disclosure and the various embodiments described herein, reference is now made to the following brief description, taken in connection with the accompanying drawings and detailed description, which show at least one exemplary embodiment.

[0005] **FIG. 1** illustrates a block diagram of a number of different environments in which illustrative embodiments of the disclosure may operate;

[0006] **FIG. 2** illustrates a top level block diagram of a communications system detailing the transmitter system in accordance with an illustrative embodiment of the disclosure;

[0007] **FIG. 3** illustrates a top level diagram of the input and outputs of the non-linear optimizer in accordance with an illustrative embodiment of the disclosure;

[0008] **FIG. 4** illustrates a detailed view of a tunable matching network according to an illustrative embodiment of the disclosure;

[0009] **FIG. 5** illustrates a top level flowchart according to an illustrative embodiment of the disclosure;

[0010] **FIG. 6** illustrates a flowchart that represents further detailed operations of the non-linear optimizer according to an illustrative embodiment of the disclosure;

[0011] **FIG. 7** illustrates a Smith chart that illustrates the convergence of the non-linear optimizer according to an illustrative embodiment of the disclosure;

[0012] **FIG. 8** illustrates a block diagram of an illustrative embodiment of a mobile device according to an illustrative embodiment of the disclosure;

[0013] **FIG. 9** illustrates a block diagram of an illustrative embodiment of a communication subsystem component of the mobile device of **FIG. 8**; and

[0014] **FIG. 10** illustrates a block diagram illustrating components of a host system in one illustrative configuration for use with the mobile device of **FIG. 8**.

## DETAILED DESCRIPTION

**[0015]** It should be understood at the outset that although an illustrative implementation of one or more embodiments are provided below, the description is not to be considered as limiting the scope of the embodiments described herein. The disclosure may be implemented using any number of techniques, whether currently known or in existence. The disclosure should in no way be limited to the illustrative implementations, drawings, and techniques illustrated and described herein, which may be modified within the scope of the appended claims along with a full scope of equivalence. It should be appreciated that for simplicity and clarity of illustration, where considered appropriate, the reference numerals may be repeated among the figures to indicate corresponding or analogous elements.

**[0016]** According to one illustrative embodiment, a wireless communications system comprises an antenna, a control system that calculates, in real-time, values of tuning elements to match an input impedance of the antenna to an output impedance of a transmitter system, and a matching network that is tunable by the control system through the calculated values of the tuning elements to match the input impedance of the antenna to the output impedance of the transmitter system.

**[0017]** In accordance with another embodiment of the disclosure, a network server comprising a computer recordable storage medium is provided. The computer recordable storage medium of the network server comprises executable program code that is executed by a process to perform actions including solving, with a non-linear optimizer, for an input impedance of an antenna by calculating a solution to two non-linear equations, and tuning a number of reactive elements of a matching network to values that match the input impedance.

**[0018]** In accordance with a further embodiment of the disclosure, a computer implemented method of matching the impedance of an antenna provides actions comprising solving for the input impedance of the antenna

with a non-linear optimizer by calculating a solution to two non-linear equations, and tuning a number of reactive elements of a matching network, with a controller, to values that match the input impedance of the antenna to an output impedance of a transmitter system.

**[0019]** The present disclosure provides a tunable matching network in a radio frequency transmitter system that reduces the reflective power of the transmitter and may be varied to match, in real-time, the impedance of an antenna that is changing dynamically in response to various environmental scenarios. “Dynamic” as used in this disclosure, means adaptive or continuous changes responsive to a particular event or situation. In this application, “dynamic” refers to continuous changes in reaction to the environment or surroundings. The exact environmental variables that affect the antenna operation are not known or predictable.

**[0020]** The tunable matching network includes reactive components or elements which may vary in value depending on the voltage applied. During operation of the wireless communication system, a control system calibrates the voltages in the tunable matching network to exactly match the impedance of the antenna and reduce or eliminate the power reflected back to the transmitter circuit. A reflected power value of zero would mean that the power transmitted from the transmitter network is at a maximum. As used within this disclosure, “real-time” refers to a continuous or on-going processing of information without delay during the operation of hardware, software, or hardware and software. For example, a device or other hardware, software, or hardware/software combination is not considered to be operating in real-time when it is turned off, in a low power mode, sleep mode, or a standby mode.

**[0021]** Turning now to **FIG. 1**, number of environmental scenarios **100** that may affect the power transmitted by an antenna is illustrated. Number of environmental scenarios **100** is not limited to the number of scenarios depicted. Further, as used in this disclosure, “a number of” refers to one or more items. Scenarios **110**, **120**, **130**, and **140** illustrate environmental factors that may cause an antenna of a transmission system to become

detuned. In one embodiment, the transmission system may be represented by a mobile device.

**[0022]** In scenario 110, antenna 112 of a mobile device may be detuned by the presence of body 114, or an inanimate object, such as building 116. There may be other objects in close proximity to the antenna that cause the antenna to detune. For example, in transmission mode, antenna 112 radiates electromagnetic power. However, a mismatch between antenna 112 and the transmitter within the transmitter system of a wireless communication system may cause a significant amount of power to be reflected back to the transmitter rather than radiated through the antenna. The presence of bodies, biological or inanimate, will also cause the input impedance of the antenna, such as antenna 112, to change.

**[0023]** Environmental scenario 120 provides an illustration of an environmental factor within the proximity of antenna 122. Environmental scenario 120, body 124, and body 126 represent objects that may affect a change in the impedance of antenna 122. A different configuration of an environment near an antenna, including antenna 122, may detune the antenna and cause the input impedance of the antenna to change. Environmental scenario 130 provides another illustration of environmental factors within a near field proximity of an antenna, such as antenna 132. The environmental factors may include, but are in no way limited to, biological objects, such as a body 134 in close contact with the antenna, or bodies 136, and inanimate objects, such as object 138.

**[0024]** Environmental scenario 140 includes body 144 and body 146 in close proximity to antenna 142 and may cause the detuning of antenna 142 alone or in conjunction with object 148. The number and types of objects depicted by environmental scenarios 110, 120, 130, and 140 that may be within close proximity or the near field of an antenna in a wireless communication system or device, such as antenna 112, 122, 132, and 142, is in no way limited to the number of configurations depicted. Real-time operating impedance calibration 150 operates to calibrate reactive elements of a matching network within the transmitter system in real-time so that the

power transmitted by the antenna remains at a maximum and the input impedance of the antenna is continually matched.

**[0025]** **FIG. 2** illustrates a top level diagram of wireless communications system **200** that details the transmitter system in accordance with an embodiment of the disclosure.

**[0026]** In one embodiment, wireless communications system **200** includes radio frequency transceiver system **230**, control system **210**, and antenna **202**. Radio frequency transceiver system **230** comprises receiver system **240** and transmitter system **250**. Antenna **202** is communicatively coupled to radio frequency transceiver system **230** through antenna feedpoint **204**. In a transmitting mode, antenna **202** radiates electromagnetic signals from transmitter system **250** through antenna feedpoint **204**.

**[0027]** Matching network **258** is tunable which means that matching network **258** may be adjusted, corrected and/or changed based on specific system requirements to match the impedance of power amplifier **254** with the impedance of antenna **202**. The adjustments, corrections, and/or changes may vary in number, scope, and degree. For example, in one illustrative embodiment, matching network **258** may be incrementally tuned a number of times by a specific value or values within a particular tuning period. The tuning value or values are typically greater than or equal to about positive or negative thirty percent of the original tuning value. In another illustrative embodiment, the tuning of matching network **258** may be iterative within a particular tuning period.

**[0028]** In transmitter system **250**, power amplifier **254** generates the power that transmits out of antenna **202** so that an electromagnetic signal may be sent to a base station antenna. Power amplifier **254** sends the power through matching network **258** to antenna **202**. Matching network **258** may be changed to match the impedance of antenna **202** with the impedance of power amplifier **254** and the rest of transmitter circuitry **252**. An exact match between the input impedance of antenna **202** and transmitter circuitry **252** results in a reduction of the amount of power being reflected by antenna **202**.

as may be measured by reflected power sensor 256 as compared to the amount of reflected power measured by reflected power sensor 256 when there is no match.

**[0029]** In one embodiment, reflected power 220 is sent by reflected power sensor 256 and measured by controller 214 in control system 210. Controller 214 uses reflected power 220 as a parameter in solving two non-linear equations for the real and imaginary values of an input impedance of the antenna. The non-linear equations are input into non-linear optimizer 216. The non-linear optimizer 216 iterates until an actual value of the input impedance of antenna 202 in a particular environmental scenario is obtained.

**[0030]** Digital-to-analog converter 218 converts the output obtained from the controller to analog voltage values designated as tuning parameters 222. Tuning parameters 222 may be used to vary the voltage across a number of reactive elements in matching network 258. The reactive elements of matching network 258 are adjusted by tuning parameters 222 to match the impedance of the antenna. The impedance match maximizes the power transmitted by antenna 202 by minimizing or eliminating the reflected power completely.

**[0031]** Turning now to **FIG. 3**, a top level representation 300 of the input and outputs of a non-linear optimizer in accordance with an illustrative embodiment of the disclosure is illustrated. In this depicted example, non-linear optimizer 310 is an example of one implementation for non-linear optimizer 216 in control system 210 of **FIG. 2**.

**[0032]** As illustrated, non-linear optimizer 310 requires two power values 312 that represent the reflected power measured by the transmitter system. Power values 312 are always measured at the same point or node within matching network 258. Non-linear optimizer 310 requires a reference reflected power value,  $P_R^{(0)}$ , which may be measured by a power sensor, such as reflected power sensor 256 of **FIG. 2**. The second power value,  $P_R^{(1)}$ , is determined by perturbing or varying the reactive elements of the matching circuit by a significant value. A perturbation represents an actual

mathematical change or variation in value. The mathematical variation may be a positive or negative real number or percentage.

**[0033]** In one illustrative embodiment, a significant value may be 30 percent of the normal value of a reactive element. For example, L represents the value of an inductor in the matching network. According to this embodiment,  $0.3*L$  would represent a 30 percent perturbation of the normal value of the inductor L. Perturbed reactive element values are then used to calculate new values for scattering matrix parameters. The power values are used by non-linear equation 1 **320** and non-linear equation 2 **330** in non-linear optimizer **310**. Non-linear equation one **320**, EQ. 1, and non-linear equation two **330**, EQ. 2, are represented, respectively, as:

$$\Gamma_{in} = S_{11} - \frac{S_{12}S_{21}\Gamma_A}{1-S_{22}\Gamma_A} \quad (\text{EQ. 1})$$

$$\Gamma_A = \frac{Z_A - Z_0}{Z_A + Z_0} \quad (\text{EQ. 2})$$

**[0034]** In non-linear equation one, the scattering parameters, or S-parameters,  $S_{11}$ ,  $S_{12}$ ,  $S_{21}$ , and  $S_{22}$ , are known values of the matching network.  $S_{11}$  represents the input reflection coefficient of a 50 ohm terminated output.  $S_{21}$  represents the forward transmission coefficient of a 50 ohm terminated output;  $S_{12}$  represents the reverse transmission coefficient of a 50 ohm terminated input; and  $S_{22}$  represents the output reflection coefficient of a 50 ohm terminated input.  $\Gamma_{in}$  is the reflection coefficient of the antenna as seen into the matching network and  $\Gamma_A$  is the reflection coefficient of the antenna.

**[0035]** In non-linear equation two,  $\Gamma_{in}$  is the reflection coefficient of the antenna as seen into the matching network.  $Z_A$  represents the input impedance of the antenna.  $Z_0$  represents the reference input impedance of the antenna from a previous transmission tuning period.

**[0036]** Non-linear optimizer **310** starts with an estimated complex value of the impedance of an antenna, such as antenna **202** of **FIG. 2**. The complex value of the impedance is comprised of real and imaginary numbers.

Starting with this initial estimated complex value, non-linear optimizer 310 performs a repeated or iterative processing that eventually reaches a solution or converges to a final value that represents the actual input impedance of the antenna. The solution or final value is a complex number,  $Z_A$ 340, comprising a real value and imaginary value that represents the value of the input impedance of the antenna.

[0037] FIG. 4 illustrates more detailed view 400 of a matching network according to one embodiment of the disclosure. In this depicted example, matching network 410 is an example of one implementation of matching network 252 in transmitter system 250 of FIG. 2.

[0038] As illustrated, matching network 410 includes a number of variable reactive elements, such as element<sub>1</sub> 412, element<sub>2</sub> 414, element<sub>3</sub> 416, element<sub>n-1</sub> 418, and element<sub>n</sub> 420. In these depicted examples, matching network 410 may include any number of variable reactive elements based on a particular embodiment as would be understood by one of ordinary skill in the art. The variable reactive elements may include capacitors, inductors, transformers, and other such reactive elements known to one skilled in the art.

[0039] The variable reactive elements of matching network 410 may be controlled individually or as one unit by analog or digital voltage values that tune the value of a particular variable reactive element within matching network 410 to correspond with an input impedance that may be calculated in real-time by a non-linear optimizer, such as non-linear optimizer 310 of FIG. 3. Antenna 402 couples to matching network 410 through antenna feedpoint 404. Matching network 410 is adapted by a control system (now shown) to match the changing impedance of antenna 402 with the impedance of reflected power sensor 436 in a portion of transmitter system 430 that also includes power amplifier 434 and transmitter circuitry 432. In one embodiment, a matching network is tuned to match the impedance of antenna 402 to the impedance of reflected power sensor 436 at 50 ohms.

**[0040]** In **FIG. 5**, diagram **500** illustrates a method of operation according to one embodiment of the disclosure. At block **510**, the transceiver system waits for a tuning clock or the next tuning period of a transmitter clock cycle. The tuning periods are sequential which means that a second transmitter tuning period follows a first transmitter tuning period. This may also be expressed as a next transmitter tuning period following a previous transmitter tuning period. The availability of a current transmitter tuning period initiates the process. At block **520**, the reference reflected power value,  $P_R^{(0)}$ , is input as a parameter to a non-linear equation. The reference reflected power value is used to determine scattering matrix parameters of the matching network. The elements of the matching network are perturbed to a significant percentage of normal value at block **530**. In some embodiments, this significant percentage is considered to be at least 30 percent.

**[0041]** Scattering matrix parameters of the matching network using the perturbed element value is determined and a reflected power value,  $P_R^{(1)}$ , based on the value of the perturbed elements and the scattering matrix parameters with the perturbed elements is measured at block **540**. The reference reflected power value,  $P_R^{(0)}$ , and the measured reflected power value,  $P_R^{(1)}$ , are input as known values into two non-linear equations that are solved through a non-linear optimizer to determine input impedance of the antenna. At block **550**, it is determined whether or not the optimizer has converged to an actual solution for the input impedance of the antenna. If no convergence has been reached, the transmitter system perturbs a matching network at block **530** and measures another reflected power value based on the perturbation of the matching network at block **540**. If a convergence is reached, the optimizer will eventually converge to a value that represents the actual value of the input impedance of the antenna at block **560**.

**[0042]** Turning now to **FIG. 6**, diagram **600** provides a more detailed flow according to an embodiment of the current disclosure. The procedures represented in block **640** may be performed by a non-linear optimizer, such as non-linear optimizer **216** in **FIG 2**. Procedures in block **670** may be performed

by a controller or a control system, such as controller **214** or control system **210** in **FIG 2**.

**[0043]** Diagram **600** represents only one embodiment of the current disclosure. Other alternative embodiments that feature block **640** and block **670** performing a greater or reduced number of operations may be realized as would be obvious to one skilled in the art. Turning first to the non-linear optimizer operations as disclosed in block **640**, the non-linear optimizer receives a reference reflected power value,  $P_R^{(0)}$ , and a measured reflected power value,  $P_R^{(1)}$ , as determined by the controller at block **610**. At block **620**, reflected power input into non-linear optimizer **640** is used as a parameter in two non-linear equations that are executed in the optimizer. At block **630** the real and imaginary values of the input impedance of the antenna,  $Z_A$  is determined by simultaneously solving the non-linear equations.

**[0044]** Based on the value of the input impedance,  $Z_A$ , the optimal parameter values for all elements of the transmitter matching circuit may be determined. The tunable reactive elements of the matching circuit may then be adapted to match the input impedance of the antenna to the input impedance of the transmitter system at block **660**.

In **FIG. 7**, Smith chart **700** illustrates a process of convergence that may be implemented by the non-linear optimizer according to one embodiment of the current disclosure. Smith chart **700** illustrates convergence of the non-linear optimizer to the actual input impedance value of the antenna within two iterations. In this specific embodiment, the initial complex value **710** input into the non-linear optimizer is  $56+j11$ . During a first iteration, the second complex value of  $67+j4$  is obtained at **720**. At **730**, the optimizer converges on the actual input impedance value of  $65+j5$ . In an illustrative embodiment, the actual impedance value may then be placed in an electronic look-up table to determine the configuration or values of the reactive elements of the matching circuit.

**[0045]** The non-linear optimizer converges fairly quickly at a quadratic convergence rate regardless of the initial value input into the non-linear

optimizer. In illustrative embodiments of the disclosure, more than two iterations may be needed in order to achieve a final convergence. However, the non-linear equations disclosed earlier may be considered as complex mathematical problems that will always converge at a quadratic rate within two to three iterations of a non-linear optimizer.

**[0046]** Referring next to **FIG. 8**, shown therein is a block diagram of an illustrative embodiment of mobile device **800** according to an embodiment of the disclosure. Mobile device **800** is operable for implementing aspects of the disclosure and may include, for example, without limitation, control system **210** and radio frequency transceiver system **230**, but the disclosure should not be limited to such implementations. Mobile device **800** includes a number of components, such as main processor **802** that controls the overall operation of mobile device **800**. Communication functions, including data and voice communications, are performed through communication subsystem **804**.

**[0047]** Communication subsystem **804** receives messages from and sends messages to wireless network **848**. In this exemplary embodiment of mobile device **800**, communication subsystem **804** is configured in accordance with the Global System for Mobile Communication (GSM) and General Packet Radio Services (GPRS) standards. The GSM/GPRS wireless network is used worldwide and it is expected that these standards will be superseded eventually by Enhanced Data GSM Environment (EDGE) and Universal Mobile Telecommunications Service (UMTS). New standards are still being defined, but it is believed that they will have similarities to the network behavior described herein, and it will also be understood by persons skilled in the art that the embodiments described herein are intended to use any other suitable standards that are developed in the future. The wireless link connecting communication subsystem **804** with wireless network **848** represents one or more different Radio Frequency (RF) channels, operating according to defined protocols specified for GSM/GPRS communications. With newer network protocols, these channels are capable of supporting both

circuit switched voice communications and packet switched data communications.

**[0048]** Although wireless network **848** associated with mobile device **800** is a GSM/GPRS wireless network in one exemplary implementation, other wireless networks may also be associated with mobile device **800** in variant implementations. The different types of wireless networks that may be employed include, for example, data-centric wireless networks, voice-centric wireless networks, and dual-mode networks that can support both voice and data communications over the same physical base stations. Combined dual-mode networks include, but are not limited to, Code Division Multiple Access (CDMA) or CDMA2000 networks, GSM/GPRS networks (as mentioned above), and future third-generation (3G) networks like EDGE and UMTS. Some other examples of data-centric networks include WiFi 802.11, Mobitex™ and DataTAC™ network communication systems. Examples of other voice-centric data networks include Personal Communication Systems (PCS) networks like GSM and Time Division Multiple Access (TDMA) systems.

**[0049]** Main processor **802** also interacts with additional subsystems, such as Random Access Memory (RAM) **806**, flash memory **808**, display **810**, auxiliary input/output (I/O) subsystem **812**, data port **814**, keyboard **816**, speaker **818**, microphone **820**, short-range communications subsystem **822** and other device subsystems **824**.

**[0050]** Some of the subsystems of mobile device **800** perform communication-related functions, whereas other subsystems may provide “resident” or on-device functions. By way of example, display **810** and keyboard **816** may be used for both communication-related functions, such as entering a text message for transmission over wireless network **848** and device-resident functions such as a calculator or task list.

**[0051]** Mobile device **800** can send and receive communication signals over wireless network **848** after required network registration or activation procedures have been completed. Network access is associated with a

subscriber or user of mobile device **800**. To identify a subscriber, mobile device **800** requires SIM/RUIM card **826** (i.e. Subscriber Identity Module or a Removable User Identity Module) to be inserted into SIM/RUIM interface **828** in order to communicate with a network. SIM/RUIM card **826** is one type of a conventional “smart card” that can be used to identify a subscriber of mobile device **800** and to personalize mobile device **800**, among other things. Without SIM/RUIM card **826**, mobile device **800** is not fully operational for communication with wireless network **848**. By inserting SIM/RUIM card **826** into SIM/RUIM interface **828**, a subscriber can access all subscribed services. Services may include: web browsing and messaging such as e-mail, voice mail, Short Message Service (SMS), and Multimedia Messaging Services (MMS). More advanced services may include: point of sale, field service and sales force automation. SIM/RUIM card **826** includes a processor and memory for storing information.

**[0052]** Once SIM/RUIM card **826** is inserted into SIM/RUIM interface **828**, it is coupled to main processor **802**. In order to identify the subscriber, SIM/RUIM card **826** can include some user parameters such as an International Mobile Subscriber Identity (IMSI). An advantage of using SIM/RUIM card **826** is that a subscriber is not necessarily bound by any single physical mobile device. SIM/RUIM card **826** may store additional subscriber information for a mobile device as well, including datebook (or calendar) information and recent call information. Alternatively, user identification information can also be programmed into flash memory **808**.

**[0053]** Mobile device **800** is a battery-powered device and includes battery interface **832** for receiving one or more battery **830**. In at least some embodiments, battery **830** can be a smart battery with an embedded microprocessor. Battery interface **832** is coupled to a regulator (not shown), which assists battery **830** in providing power V+ to mobile device **800**. Although current technology makes use of a battery, future technologies such as micro fuel cells may provide the power to mobile device **800**.

**[0054]** Mobile device **800** also includes operating system **834** and software components **836** to **846** which are described in more detail below.

Operating system **834** includes programs **836**, message application **838**, device state module **840**, PIM **842**, connect module **844**, and IT policy module **846** that are executed by main processor **802** and are typically stored in a persistent storage, such as flash memory **808**, which may alternatively be a read-only memory (ROM) or similar storage element (not shown). Those skilled in the art will appreciate that portions of operating system **834** and software components **836** to **846**, such as specific device applications, or parts thereof, may be temporarily loaded into a volatile store such as RAM **806**. Other software components can also be included, as is well known to those skilled in the art.

**[0055]** The subset of programs **836** that control basic device operations, including data and voice communication applications, will normally be installed on mobile device **800** during its manufacture. The processes disclosed herein may be implemented by a computer implemented process in which the different illustrated actions may take the form of program code embodied on a computer recordable storage medium or device for execution by a controller or processor unit, such as main processor **802**. The recordable storage medium or device may be, for example, a hard disk drive, a flash drive, a solid state disk drive, a floppy disk, a CD-ROM, DVD-ROM, or some other mechanical storage device.

**[0056]** Other software applications include message application **838** that can be any suitable software program that allows a user of mobile device **800** to send and receive electronic messages. Various alternatives exist for message application **838** as is well known to those skilled in the art. Messages that have been sent or received by the user are typically stored in flash memory **808** of mobile device **800** or some other suitable storage element in mobile device **800**. In at least some embodiments, some of the sent and received messages may be stored remotely from mobile device **800** such as in a data storage of an associated host system that communicates with mobile device **800**.

**[0057]** The software applications can further include device state module **840**, Personal Information Manager (PIM) **842**, and other suitable

modules (not shown). Device state module **840** provides persistence, i.e. device state module **840** ensures that important device data is stored in persistent memory, such as flash memory **808**, so that the data is not lost when mobile device **800** is turned off or loses power.

**[0058]** PIM **842** includes functionality for organizing and managing data items of interest to the user, such as, but not limited to, e-mail, contacts, calendar events, voice mails, appointments, and task items. A PIM application has the ability to send and receive data items via wireless network **848**. PIM data items may be seamlessly integrated, synchronized, and updated via wireless network **848** with the mobile device subscriber's corresponding data items stored and/or associated with a host computer system. This functionality creates a mirrored host computer on mobile device **800** with respect to such items. This can be particularly advantageous when the host computer system is the mobile device subscriber's office computer system.

**[0059]** Mobile device **800** also includes connect module **844**, and IT policy module **846**. Connect module **844** implements the communication protocols that are required for mobile device **800** to communicate with the wireless infrastructure and any host system, such as an enterprise system, that mobile device **800** is authorized to interface with. Examples of a wireless infrastructure and an enterprise system are given in **FIG. 9**, which are described in more detail below.

**[0060]** Connect module **844** includes a set of APIs that can be integrated with mobile device **800** to allow mobile device **800** to use any number of services associated with the enterprise system. Connect module **844** allows mobile device **800** to establish an end-to-end secure, authenticated communication pipe with the host system. A subset of applications for which access is provided by connect module **844** can be used to pass IT policy commands from the host system to mobile device **800**. This can be done in a wireless or wired manner. These instructions may be passed to IT policy module **846** to modify the configuration of mobile device **800**. Alternatively, in some cases, the IT policy update can also be done over a wired connection.

[0061] IT policy module **846** receives IT policy data that encodes the IT policy. IT policy module **846** ensures that the IT policy data is authenticated by mobile device **800**. The IT policy data may be stored in flash memory **808** in its native form. After the IT policy data is stored, a global notification can be sent by IT policy module **846** to all of the applications residing on mobile device **800**. Applications for which the IT policy may be applicable may respond by reading the IT policy data to look for IT policy rules that are applicable.

[0062] IT policy module **846** can include a parser (not shown), which can be used by the applications to read the IT policy rules. In some cases, another module or application can provide the parser. Grouped IT policy rules, described in more detail below, are retrieved as byte streams, which are sent (recursively, in a sense) into the parser to determine the values of each IT policy rule defined within the grouped IT policy rule. In at least some embodiments, IT policy module **846** can determine which applications are affected by the IT policy data and send a notification to only those applications. In either of these cases, for applications that aren't running at the time of the notification, the applications can call the parser or IT policy module **846** when they are executed to determine if there are any relevant IT policy rules in the newly received IT policy data.

[0063] All applications that support rules in the IT Policy are coded to know the type of data to expect. For example, the value that is set for the "WEP User Name" IT policy rule is known to be a string; therefore the value in the IT policy data that corresponds to this rule is interpreted as a string. As another example, the setting for the "Set Maximum Password Attempts" IT policy rule is known to be an integer, and therefore the value in the IT policy data that corresponds to this rule is interpreted as such.

[0064] After the IT policy rules have been applied to the applicable applications or configuration files, IT policy module **846** sends an acknowledgement back to the host system to indicate that the IT policy data was received and successfully applied.

[0065] Other types of software applications can also be installed on mobile device **800**. These software applications can be third party applications, which are added after the manufacture of the mobile device **800**. Examples of third party applications include games, calculators, utilities, and program code that is executable by a processor, such as main processor **802**, to implement various embodiments described in this disclosure.

[0066] The additional applications can be loaded onto mobile device **800** through at least one of wireless network **848**, auxiliary I/O subsystem **812**, data port **814**, short-range communications subsystem **822**, or any other suitable device subsystem **824**. This flexibility in application installation increases the functionality of mobile device **800** and may provide enhanced on-device functions, communication-related functions, or both. For example, secure communication applications may enable electronic commerce functions and other such financial transactions to be performed using mobile device **800**.

[0067] Data port **814** enables a subscriber to set preferences through an external device or software application and extends the capabilities of mobile device **800** by providing for information or software downloads to mobile device **800** other than through a wireless communication network. The alternate download path may, for example, be used to load an encryption key onto mobile device **800** through a direct and thus reliable and trusted connection to provide secure device communication.

[0068] Data port **814** can be any suitable port that enables data communication between mobile device **800** and another computing device. Data port **814** can be a serial or a parallel port. In some instances, data port **814** can be a USB port that includes data lines for data transfer and a supply line that can provide a charging current to charge battery **830** of mobile device **800**.

[0069] Short-range communications subsystem **822** provides for communication between mobile device **800** and different systems or devices, without the use of wireless network **848**. For example, short-range

communications subsystem **822** may include an infrared device and associated circuits and components for short-range communication. Examples of short-range communication standards include standards developed by the Infrared Data Association (IrDA), Bluetooth, and the 802.11 family of standards developed by IEEE.

**[0070]** In use, a received signal such as a text message, an e-mail message, or web page download will be processed by communication subsystem **804** and input to main processor **802**. Main processor **802** will then process the received signal for output to display **810** or alternatively to auxiliary I/O subsystem **812**. A subscriber may also compose data items, such as e-mail messages, for example, using keyboard **816** in conjunction with display **810** and possibly auxiliary I/O subsystem **812**. Auxiliary I/O subsystem **812** may include devices such as: a touch screen, mouse, track ball, infrared fingerprint detector, or a roller wheel with dynamic button pressing capability. Keyboard **816** is preferably an alphanumeric keyboard and/or telephone-type keypad. However, other types of keyboards may also be used. A composed item may be transmitted over wireless network **848** through communication subsystem **804**.

**[0071]** For voice communications, the overall operation of mobile device **800** is substantially similar, except that the received signals are output to speaker **818**, and signals for transmission are generated by microphone **820**. Alternative voice or audio I/O subsystems, such as a voice message recording subsystem, can also be implemented on mobile device **800**. Although voice or audio signal output is accomplished primarily through speaker **818**, display **810** can also be used to provide additional information such as the identity of a calling party, duration of a voice call, or other voice call related information.

**[0072]** Referring now to FIG. 9, illustrative block diagram **900** of communication subsystem **904** is shown. Communication subsystem **904** includes receiver **950**, transmitter **952**, as well as associated components such as one or more embedded or internal antenna elements **954** and **956**, Local Oscillators (LOs) **958**, and a processing module such as Digital Signal

Processor (DSP) 960. In an illustrative embodiment, receiver 950 and transmitter 952 may be part of a single transceiver unit, such as radio frequency transceiver system 230 illustrated in FIG. 2. The particular design of communication subsystem 904 is dependent upon wireless network 906 with which mobile device 800 in FIG. 8 is intended to operate. Other applicable communication devices include, but are in no way limited to, pagers, cellular phones, cellular smart-phones, wireless organizers, and handheld wireless communication devices. Thus, it should be understood that the design illustrated in FIG. 9 serves only as one example.

[0073] Signals received by antenna element 954 through wireless network 906 are input to receiver 950, which may perform such common receiver functions as signal amplification, frequency down conversion, filtering, channel selection, and analog-to-digital (A/D) conversion. A/D conversion of a received signal allows more complex communication functions such as demodulation and decoding to be performed in DSP 960. In a similar manner, signals 912 to be transmitted are processed, including modulation and encoding, by DSP 960. These DSP-processed signals 910 are input to transmitter 952 for digital-to-analog (D/A) conversion, frequency up conversion, filtering, amplification and transmission over wireless network 906 via antenna element 954. DSP 960 not only processes communication signals 910, but also provides for receiver control through control signals 914 and transmitter control through control signals 908. For example, the gains applied to communication signals in receiver 950 and transmitter 952 may be adaptively controlled through automatic gain control algorithms implemented in DSP 960.

[0074] The wireless link between mobile device 800 in FIG. 8 and wireless network 906 can contain one or more different channels, typically different RF channels, and associated protocols used between mobile device 800 in FIG. 8 and wireless network 848. An RF channel is a limited resource that must be conserved, typically due to limits in overall bandwidth and limited battery power of mobile device 800 in FIG. 8.

[0075] When mobile device **800** in **FIG. 8** is fully operational, transmitter **952** is typically keyed or turned on only when it is transmitting to wireless network **906** and is otherwise turned off to conserve resources. Similarly, receiver **950** is periodically turned off to conserve power until it is needed to receive signals or information (if at all) during designated time periods.

[0076] Referring now to **FIG. 10**, shown therein is block diagram **1000** illustrating components of an exemplary configuration of host system **1050** that mobile device **1002** can communicate with in conjunction with connect module **844** of mobile device **800** in **FIG. 8**. Host system **1050** will typically be a corporate enterprise or other local area network (LAN), but may also be a home office computer or some other private system, for example, in variant implementations. In another illustrative embodiment, host system **1050** may be a network server comprising a computer recordable storage medium, such as memory unit **1092**, described herein later, that stores instructions and other information. In the illustrative example of **FIG. 10**, host system **1050** is depicted as a local area network or LAN of an organization to which a user of mobile device **1002** belongs. Typically, a plurality of mobile devices can communicate wirelessly with host system **1050** through one or more nodes **1004** of wireless network **1006**.

[0077] Host system **1050** comprises a number of network components connected to each other by network **1060**. For instance, user computer **1062a** with accompanying cradle **1064** for the user's mobile device **1002** is situated on a LAN connection. Cradle **1064** for mobile device **1002** can be coupled to computer **1062a** by a serial or a Universal Serial Bus (USB) connection, for example. Other user computers **1062b-1062n** are also situated on network **1060**, and each may or may not be equipped with accompanying cradle **1064**. Cradle **1064** facilitates the loading of information (e.g. PIM data, private symmetric encryption keys to facilitate secure communications) from user computer **1062a** to mobile device **1002**, and may be particularly useful for bulk information updates often performed in initializing mobile device **1002** for

use. The information downloaded to mobile device **1002** may include certificates used in the exchange of messages.

**[0078]** It will be understood by persons skilled in the art that user computers **1062a-1062n** will typically also be connected to other peripheral devices, such as printers, etc., which are not explicitly shown in **FIG. 10**. Furthermore, only a subset of network components of host system **1050** are shown in **FIG. 10** for ease of exposition, and it will be understood by persons skilled in the art that host system **1050** will comprise additional components that are not explicitly shown in **FIG. 10** for this exemplary configuration. More generally, host system **1050** may represent a smaller part of a larger network (not shown) of the organization, and may comprise different components and/or be arranged in different topologies than that shown in the exemplary embodiment of **FIG. 10**.

**[0079]** To facilitate the operation of mobile device **1002** and the wireless communication of messages and message-related data between mobile device **1002** and components of host system **1050**, a number of wireless communication support components **1070** may be provided. In some implementations, wireless communication support components **1070** can include message management server **1072**, mobile data server **1074**, contact server **1076**, and device manager module **1078**. Device manager module **1078** includes IT Policy editor **1080** and IT user property editor **1082**, as well as other software components for allowing an IT administrator to configure mobile device **1002**. In an alternative embodiment, there may be one editor that provides the functionality of both IT policy editor **1080** and IT user property editor **1082**.

**[0080]** Support components **1070** also include data storage **1084** and IT policy server **1086**. IT policy server **1086** includes processor **1098**, network interface **1090** and memory unit **1092**. Processor **1098** controls the operation of IT policy server **1086** and executes functions related to the standardized IT policy as described below. Network interface **1090** allows IT policy server **1086** to communicate with the various components of host system **1050** and mobile device **1002**. Memory unit **1092** can store functions used in

implementing the IT policy as well as related data. Those skilled in the art know how to implement these various components. Other components may also be included as is well known to those skilled in the art. Further, in some implementations, data storage **1084** can be part of any one of the servers.

**[0081]** In this exemplary embodiment, mobile device **1002** communicates with host system **1050** through node **1004** of wireless network **1006** and public or private network **1008** such as a service provider network or the public Internet. Access to host system **1050** may be provided through one or more routers (not shown), and computing devices of host system **1050** may operate from behind firewall or proxy server **1066**. Firewall or proxy server **1066** provides a secure node and a wireless internet gateway for host system **1050**. Firewall or proxy server **1066** intelligently routes data to the correct destination server within host system **1050**.

**[0082]** In some implementations, host system **1050** can include a wireless VPN router (not shown) to facilitate data exchange between host system **1050** and mobile device **1002**. The wireless VPN router allows a VPN connection to be established directly through a specific wireless network to mobile device **1002**. The wireless VPN router can be used with the Internet Protocol (IP) Version 6 (IPV6) and IP-based wireless networks. This protocol can provide enough IP addresses so that each mobile device has a dedicated IP address, making it possible to push information to a mobile device at any time. An advantage of using a wireless VPN router is that it can be an off-the-shelf VPN component, and does not require a separate wireless gateway and separate wireless infrastructure. A VPN connection can preferably be a Transmission Control Protocol (TCP)/IP or User Datagram Protocol (UDP)/IP connection for delivering the messages directly to mobile device **1002** in this alternative implementation.

**[0083]** Message management server **1072** can be used to specifically provide support for the management of messages, such as e-mail messages, that are to be handled by mobile devices. Generally, while messages are still stored on message server **1068**, message management server **1072** can be used to control when, if, and how messages are sent to mobile device **1002**.

Message management server **1072** also facilitates the handling of messages composed on mobile device **1002**, which are sent to message server **1068** for subsequent delivery.

**[0084]** Message management server **1072** may also be adapted to provide other control functions, such as only pushing certain message information or pre-defined portions or blocks of a message stored on message server **1068** to mobile device **1002**. For example, in some cases, when a message is initially retrieved by mobile device **1002** from message server **1068**, message management server **1072** may push only the first part of a message to mobile device **1002**, with the part being of a pre-defined size. In the illustrative examples, the predefined size may be, for example, 2 Kilobytes (KB). The user can then request that more of the message be delivered in similar-sized blocks by message management server **1072** to mobile device **1002**, possibly up to a maximum pre-defined message size. Accordingly, message management server **1072** facilitates better control over the type of data and the amount of data that is communicated to mobile device **1002**, and can help to minimize potential waste of bandwidth or other resources.

**[0085]** Mobile data server **1074** encompasses any other server that stores information that is relevant to the corporation. Mobile data server **1074** may include, but is not limited to, databases, online data document repositories, customer relationship management (CRM) systems, or enterprise resource planning (ERP) applications.

**[0086]** Contact server **1076** can provide information for a list of contacts for the user in a similar fashion as the address book on mobile device **1002**. Accordingly, for a given contact, contact server **1076** can include the name, phone number, work address and e-mail address of the contact, among other information. Contact server **1076** can also provide a global address list that contains the contact information for all of the contacts associated with host system **1050**.

[0087] It will be understood by persons skilled in the art that message management server **1072**, mobile data server **1074**, contact server **1076**, device manager module **1078**, data storage **1084** and IT policy server **1086** do not need to be implemented on separate physical servers within host system **1050**. For example, some or all of the functions associated with message management server **1072** may be integrated with message server **1068**, or some other server in host system **1050**. Alternatively, host system **1050** may comprise multiple message management servers **1072**, particularly in variant implementations where a large number of mobile devices need to be supported.

[0088] Alternatively, in some embodiments, IT policy server **1086** can provide IT policy editor **1080**, IT user property editor **1082** and data storage **1084**. In some cases, IT policy server **1086** can also provide device manager module **1078**. Processor **1098** of IT policy server **1086** can be used to perform the various steps of a method for providing IT policy data that is customizable on a per-user basis. Processor **1098** can execute IT policy editor **1080** and IT user property editor **1082**. In some cases, the functionality of IT policy editor **1080** and IT user property editor **1082** can be provided by a single editor. In some cases, memory unit **1092** can provide data storage **1084**.

[0089] Device manager module **1078** provides an IT administrator with a graphical user interface with which the IT administrator interacts to configure various settings for the mobile devices. As mentioned, the IT administrator can use IT policy rules to define behaviors of certain applications on mobile device **1002** that are permitted such as phone, web browser or Instant Messenger use. The IT policy rules can also be used to set specific values for configuration settings that an organization requires on the mobile devices such as auto signature text, WLAN/VoIP/VPN configuration, security requirements (e.g. encryption algorithms, password rules, etc.), specifying themes or applications that are allowed to run on mobile device **1002**.

[0090] In this manner, one or more of the illustrative embodiments of the present disclosure maximizes the power transmitted and minimizes the power reflected from the matching network through adjusting or tuning the

values of the reactive elements in the matching network in real-time. Additionally, the battery life of the wireless device is improved since obtaining an optimum impedance match reduces the amount of operating power dissipated. Another advantage realizes signal transmission over a wide range of frequencies with reduced noise and distortion.

**[0091]** While several embodiments have been provided in the present disclosure, it should be understood that the disclosed systems and methods may be embodied in many other specific forms without departing from the spirit or scope of the present disclosure. The present examples are to be considered as illustrative and not restrictive, and the intention is not to be limited to the details given herein.

**[0092]** The embodiment or embodiments selected are chosen and described in order to best explain the principles of the embodiments, the practical application, and to enable others of ordinary skill in the art to understand the disclosure for various embodiments with various modifications as are suited to the particular use contemplated. For example, the various elements or components may be combined or integrated in another system or certain features may be omitted or not implemented.

**[0093]** Also, techniques, systems, and subsystems, described and illustrated in the various embodiments as discrete or separate, may be combined or integrated with other systems, modules, or techniques without departing from the scope of the present disclosure. Other items shown or discussed as coupled or directly coupled or communicating with each other may be indirectly coupled or communicated through some other interface, device or intermediate component whether electrically, mechanically, or otherwise.

What is claimed is:

1. A wireless communications system comprising:
  - an antenna;
  - 5 a control system that calculates, in real-time, values of tuning elements to match an input impedance of the antenna to an output impedance of a transmitter system, wherein the control system comprises:
    - a controller configured to execute code that calculates values of the input impedance; and
  - 10 a non-linear optimizer that calculates an actual value of the input impedance of the antenna by calculating a solution to two non-linear equations,
    - wherein a first non-linear equation includes a reflection coefficient of the antenna and scattering parameters of a matching network; and
  - 15 the matching network that is tunable by the control system through the calculated values of the tuning elements to match the input impedance of the antenna to the output impedance of the transmitter system.
2. The wireless communications system of claim 1, wherein the non-linear optimizer inputs a reference reflected power value and a first reflected power value to the first non-linear equation and to a second non-linear equation to determine the input impedance of the antenna.
3. The wireless communications system of claim 2, wherein the reference reflected power value and the first reflected power value are measured at a specific node of the matching network.
4. The wireless communications system of claim 2, wherein the first reflected power value is the power measured from the transmitter system after 30 a first perturbation of a number of reactive elements in the matching network.
5. The wireless communications system of claim 1, further comprising:

computer executable program code that inputs a reference reflected power value to the controller;

computer executable program code that perturbs a matching network of a transmitter system;

5 computer executable program code that, responsive to perturbing the matching network, determines a reflected power value; and

computer executable program code that determines a value of an input impedance of an antenna of the wireless system through convergence of a non-linear optimizer.

10 6. The wireless communications system of claim 1 including a network server comprising a computer recordable storage medium tangibly embodying computer executable program code, which when executed by the controller, performs actions of:

15 solving, with the non-linear optimizer, for the input impedance of the antenna by calculating the solution to the two non-linear equations.; and

tuning the number of reactive elements of the matching network to the values that match the input impedance.

20 7. The wireless communications system of claim 1, wherein the actions further comprise:

perturbing, with a controller, a number of reactive elements of the matching network, by a value that is a percentage of a current value; and

responsive to the perturbing, determining a first reflected power value.

25 8. The wireless communications system of claim 1, wherein the first non-linear equation is expressed as:

$$\Gamma_{in} = S_{11} - \frac{S_{12}S_{21}\Gamma_A}{1 - S_{22}\Gamma_A} ,$$

wherein  $\Gamma_{in}$  is the reflection coefficient of the antenna seen into the matching network,  $\Gamma_A$  is the reflection coefficient of the antenna;  $S_{11}$ ,  $S_{11}$  is the input reflection coefficient of a 50 ohm terminated output;  $S_{12}$ ,  $S_{21}$  is the

forward transmission coefficient of a 50 ohm terminated output;  $S_{12} S_{12}$  is the reverse transmission coefficient of a 50 ohm terminated input; and  $S_{22} S_{22}$ , is the output reflection coefficient of a 50 ohm terminated input.

5 9. A computer implemented method of matching the input impedance of an antenna, the computer implemented method comprising:

solving, with a non-linear optimizer, for the input impedance of the antenna by calculating a solution to two non-linear equations, wherein a first non-linear equation includes a reflection coefficient of the antenna and

10 scattering parameters, of a matching network; and

tuning, with a controller, a number of reactive elements of the matching network to values that match the input impedance of the antenna to an output impedance of a transmitter system.

15 10. The computer implemented method of claim 9, wherein the first non-linear equation is expressed as:

$$\Gamma_{in} = S_{11} - \frac{S_{12} S_{21} \Gamma_A}{1 - S_{22} \Gamma_A} ,$$

wherein  $\Gamma_{in}$   $\Gamma_{in}$  is the reflection coefficient of the antenna seen into the matching network,  $\Gamma_A$   $\Gamma_A$  is the reflection coefficient of the antenna;  $S_{11} S_{11}$  is the input reflection coefficient of a 50 ohm terminated output;  $S_{21} S_{21}$  is the forward transmission coefficient of a 50 ohm terminated output;  $S_{12} S_{12}$  is the reverse transmission coefficient of a 50 ohm terminated input; and  $S_{22} S_{22}$ , is the output reflection coefficient of a 50 ohm terminated input.

25 11. The computer implemented method of claim 9, wherein a second non-linear equation is expressed as:

$$\Gamma_A = \frac{Z_A - Z_0}{Z_A + Z_0} ,$$

wherein  $R_A$  is the reflection coefficient of the antenna;  $Z_A Z_A$  is the input impedance of the antenna; and  $Z_0 Z_0$  is the reference input impedance of the antenna.

- 5 12. The computer implemented method of claim 9, wherein the non-linear optimizer solves for the input impedance of the antenna at a quadratic rate of convergence.
- 10 13. The computer implemented method of claim 9, further comprising:
  - 10 perturbing, with the controller, a number of reactive elements of the matching network, by a value that is a percentage of a current value; and
  - responsive, to the perturbing, determining a first reflected power value.
- 15 14. The computer implemented method of claim 13, further comprising:
  - 15 converting, with a digital-to-analog converter, the input impedance to voltage values that tune the reactive elements of the matching network.
- 20 15. The computer implemented method of claim 13, wherein the non-linear optimizer inputs a reference reflected power and a first reflected power to determine the input impedance of the antenna.
- 25 16. A wireless communications system, comprising:
  - 25 a tunable matching network having an input and an output, the output of the tunable matching network connected via a low noise amplifier to an input of a power detector, an output of the power detector connected to a radio frequency receiver in a receiver system, the radio frequency receiver system having a fixed known load;
  - 30 an antenna connected at the antenna feedpoint to the input of the tunable matching network to input electromagnetic signals from the antenna to the radio frequency receiver;

a control system configured to use power levels detected by the power detector to calculate, in real-time, a complex value of an input impedance of the antenna at the antenna feedpoint by solving two non-linear equations and to tune the matching network to match its input impedance to the calculated value of the input impedance of the antenna.

1/8

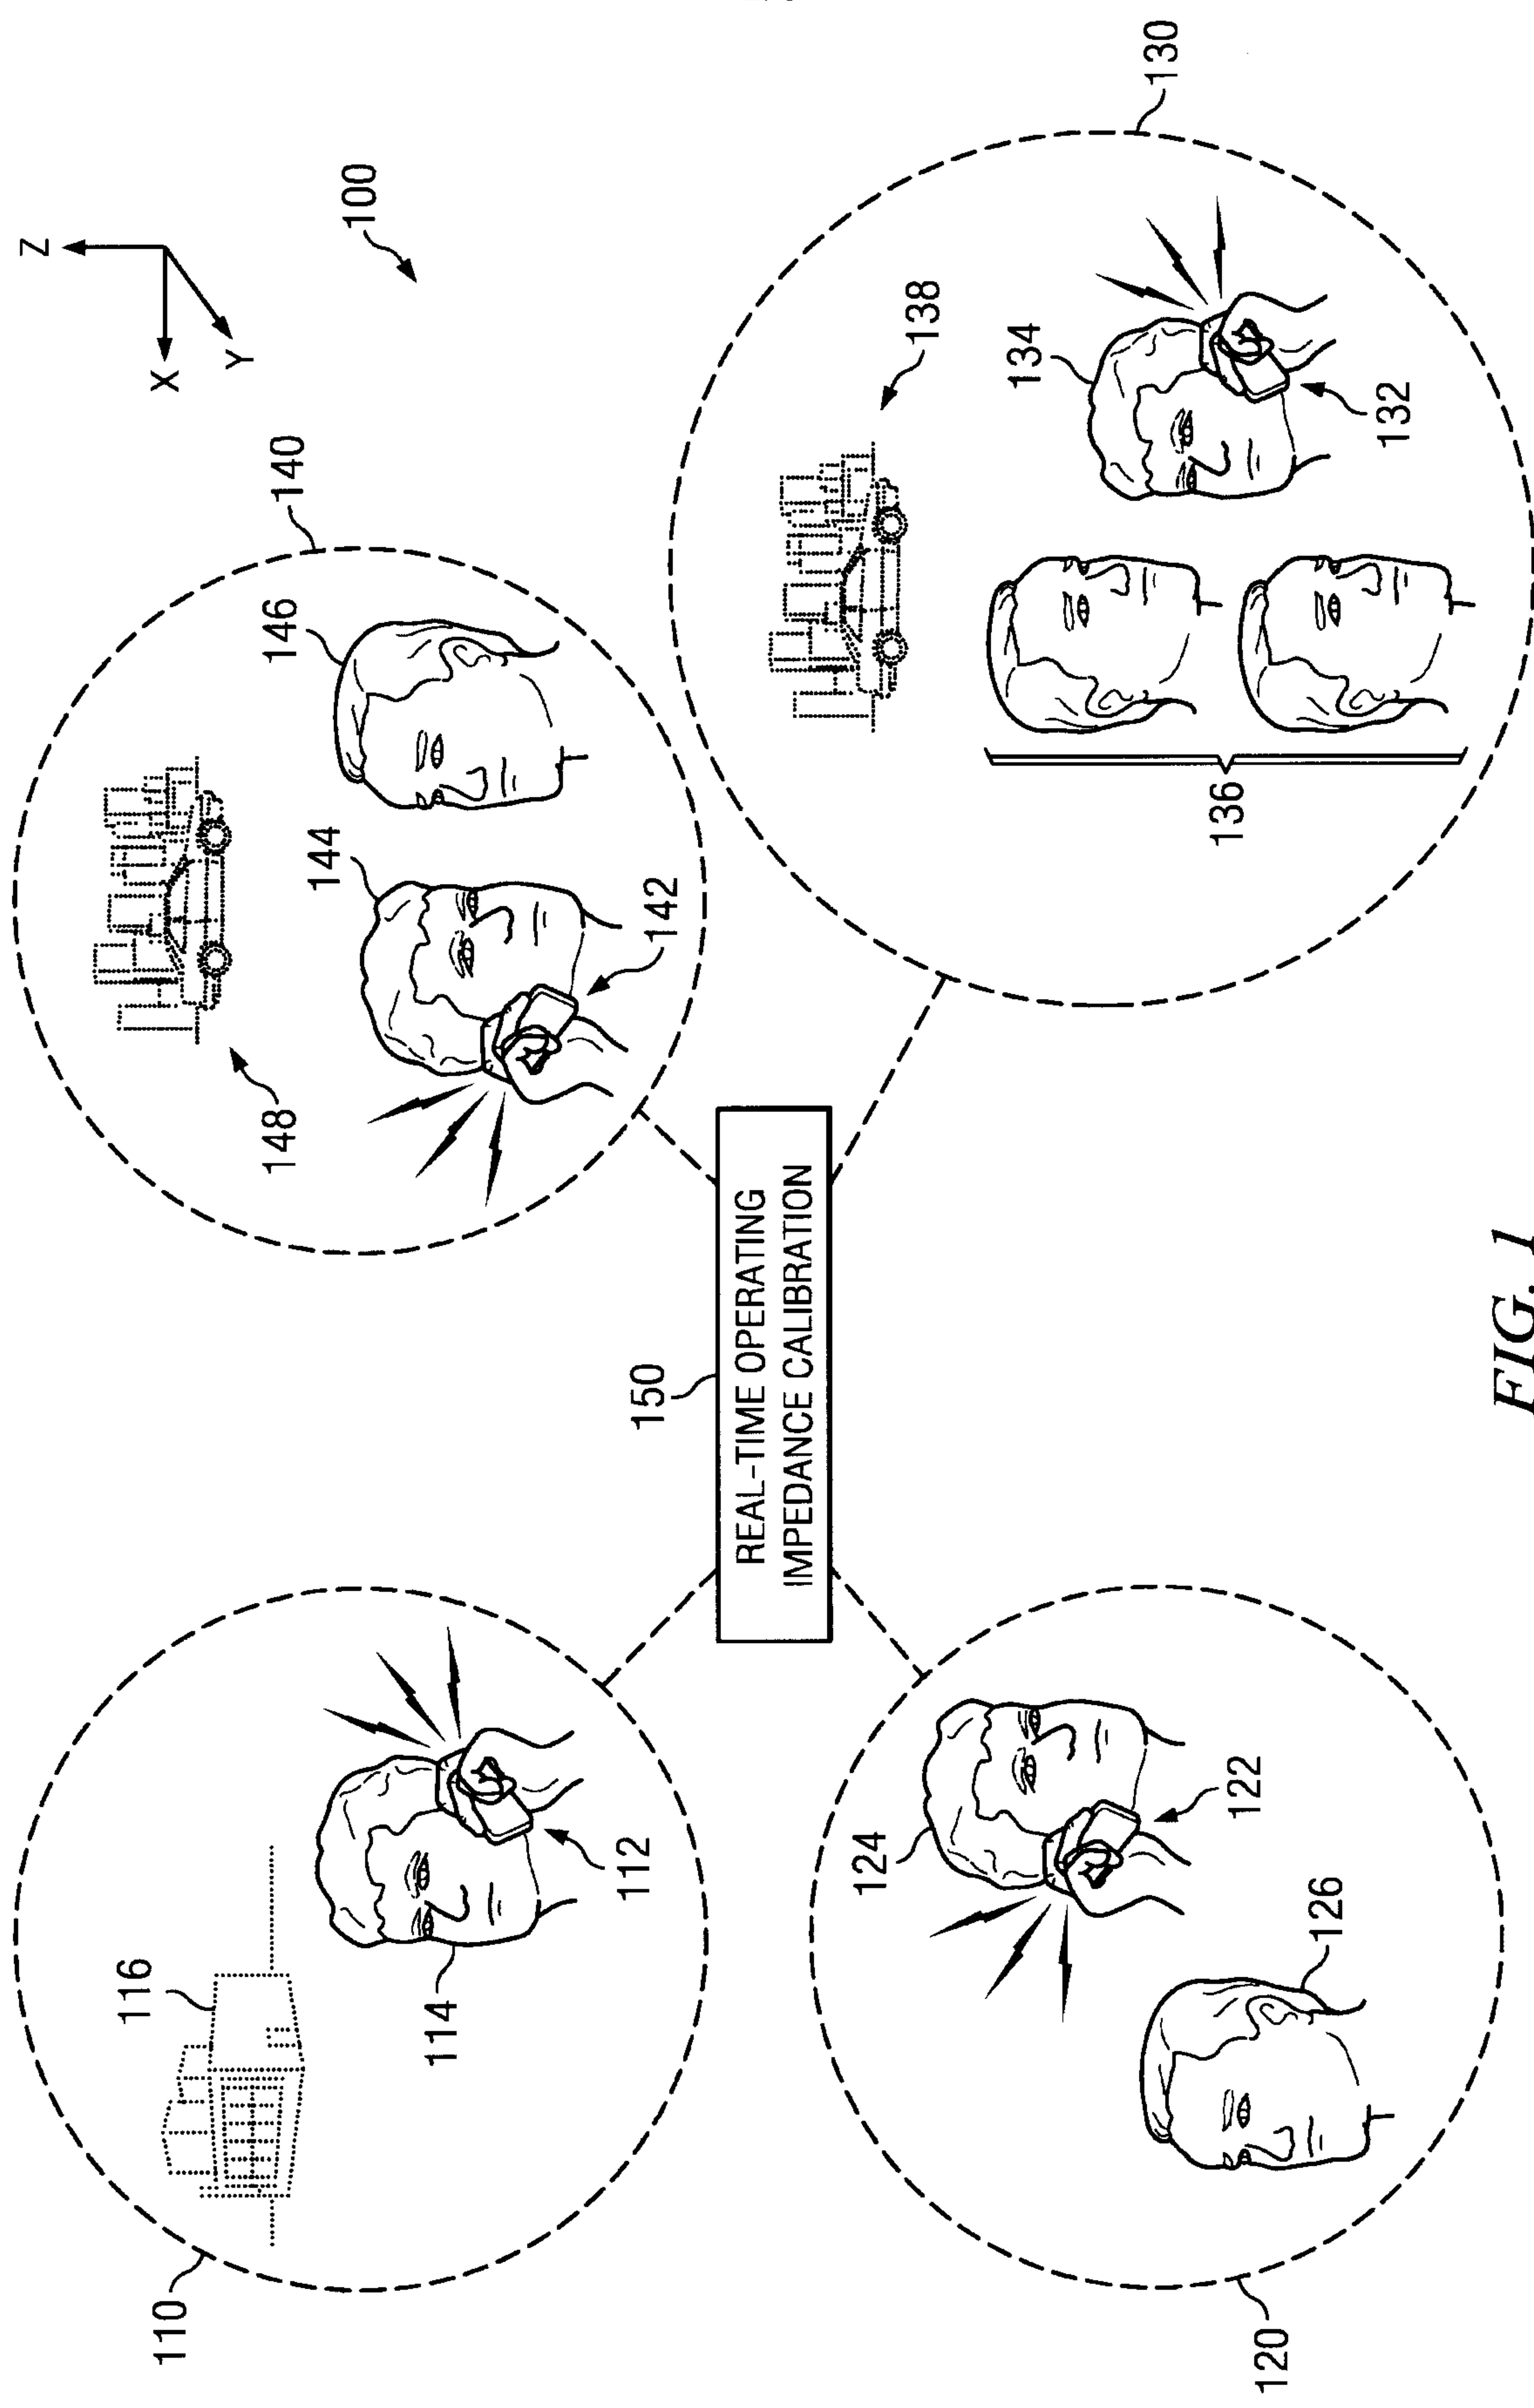


FIG. 1

2/8

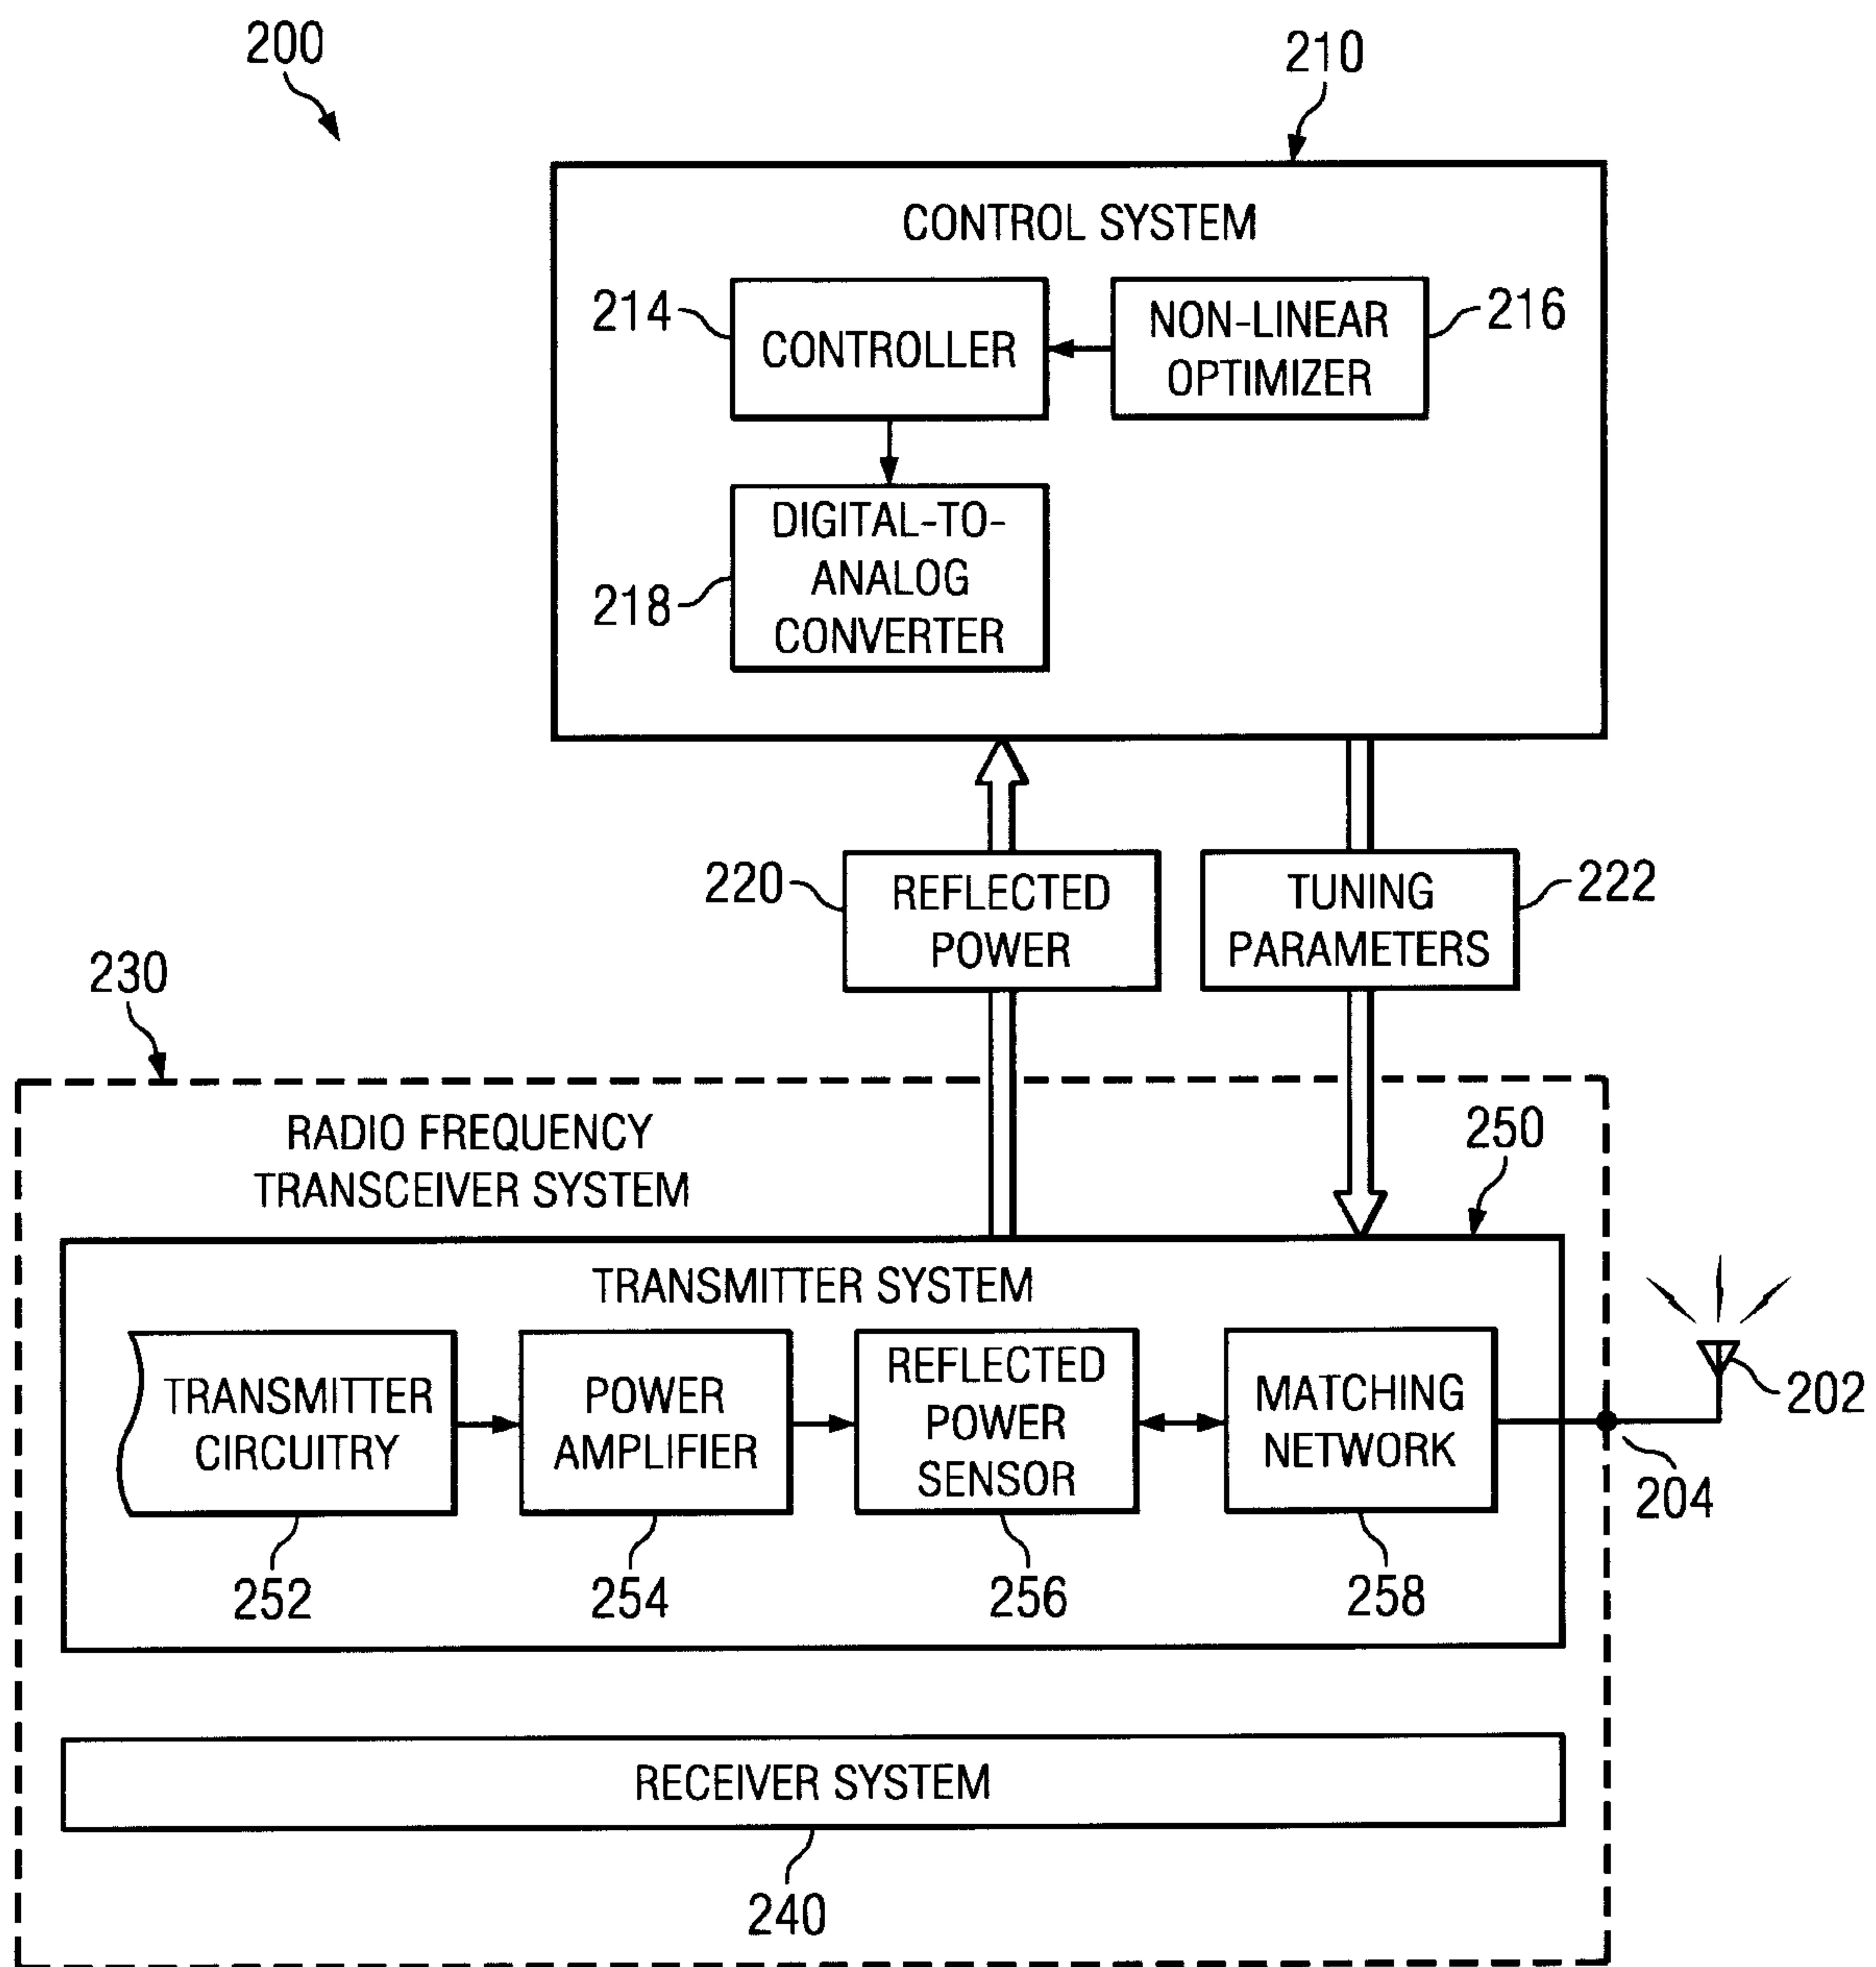


FIG. 2

3/8

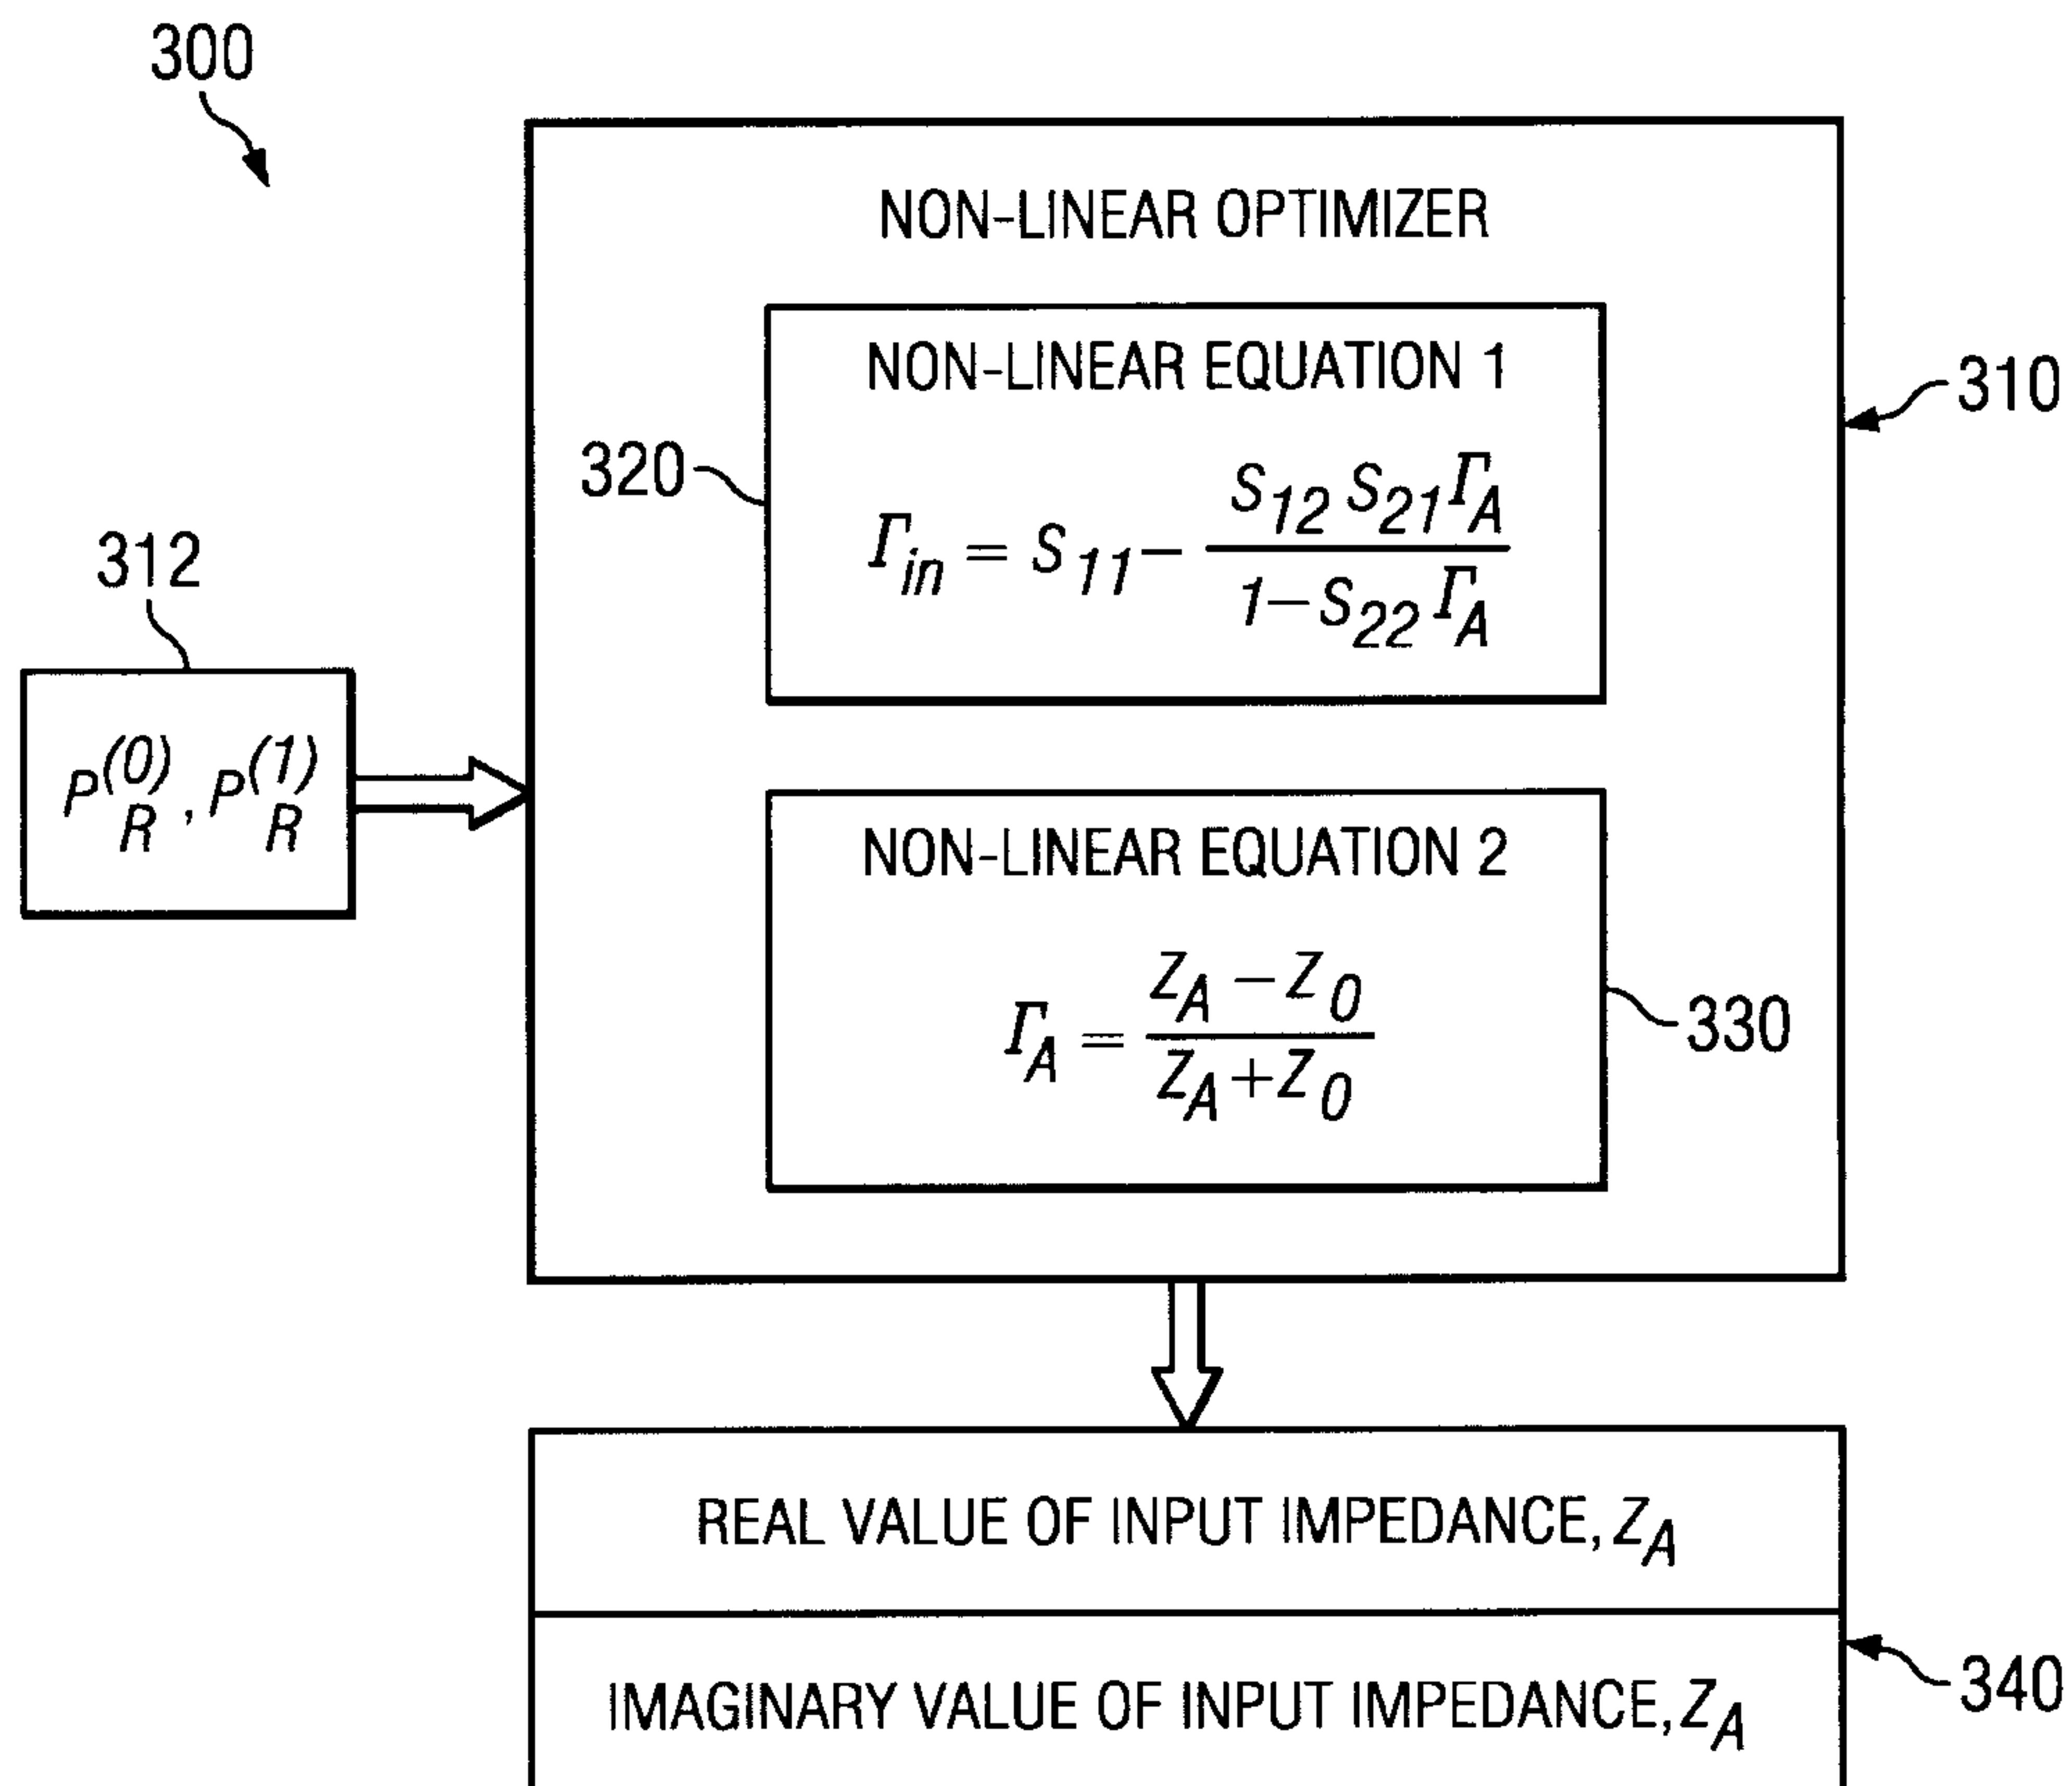


FIG. 3

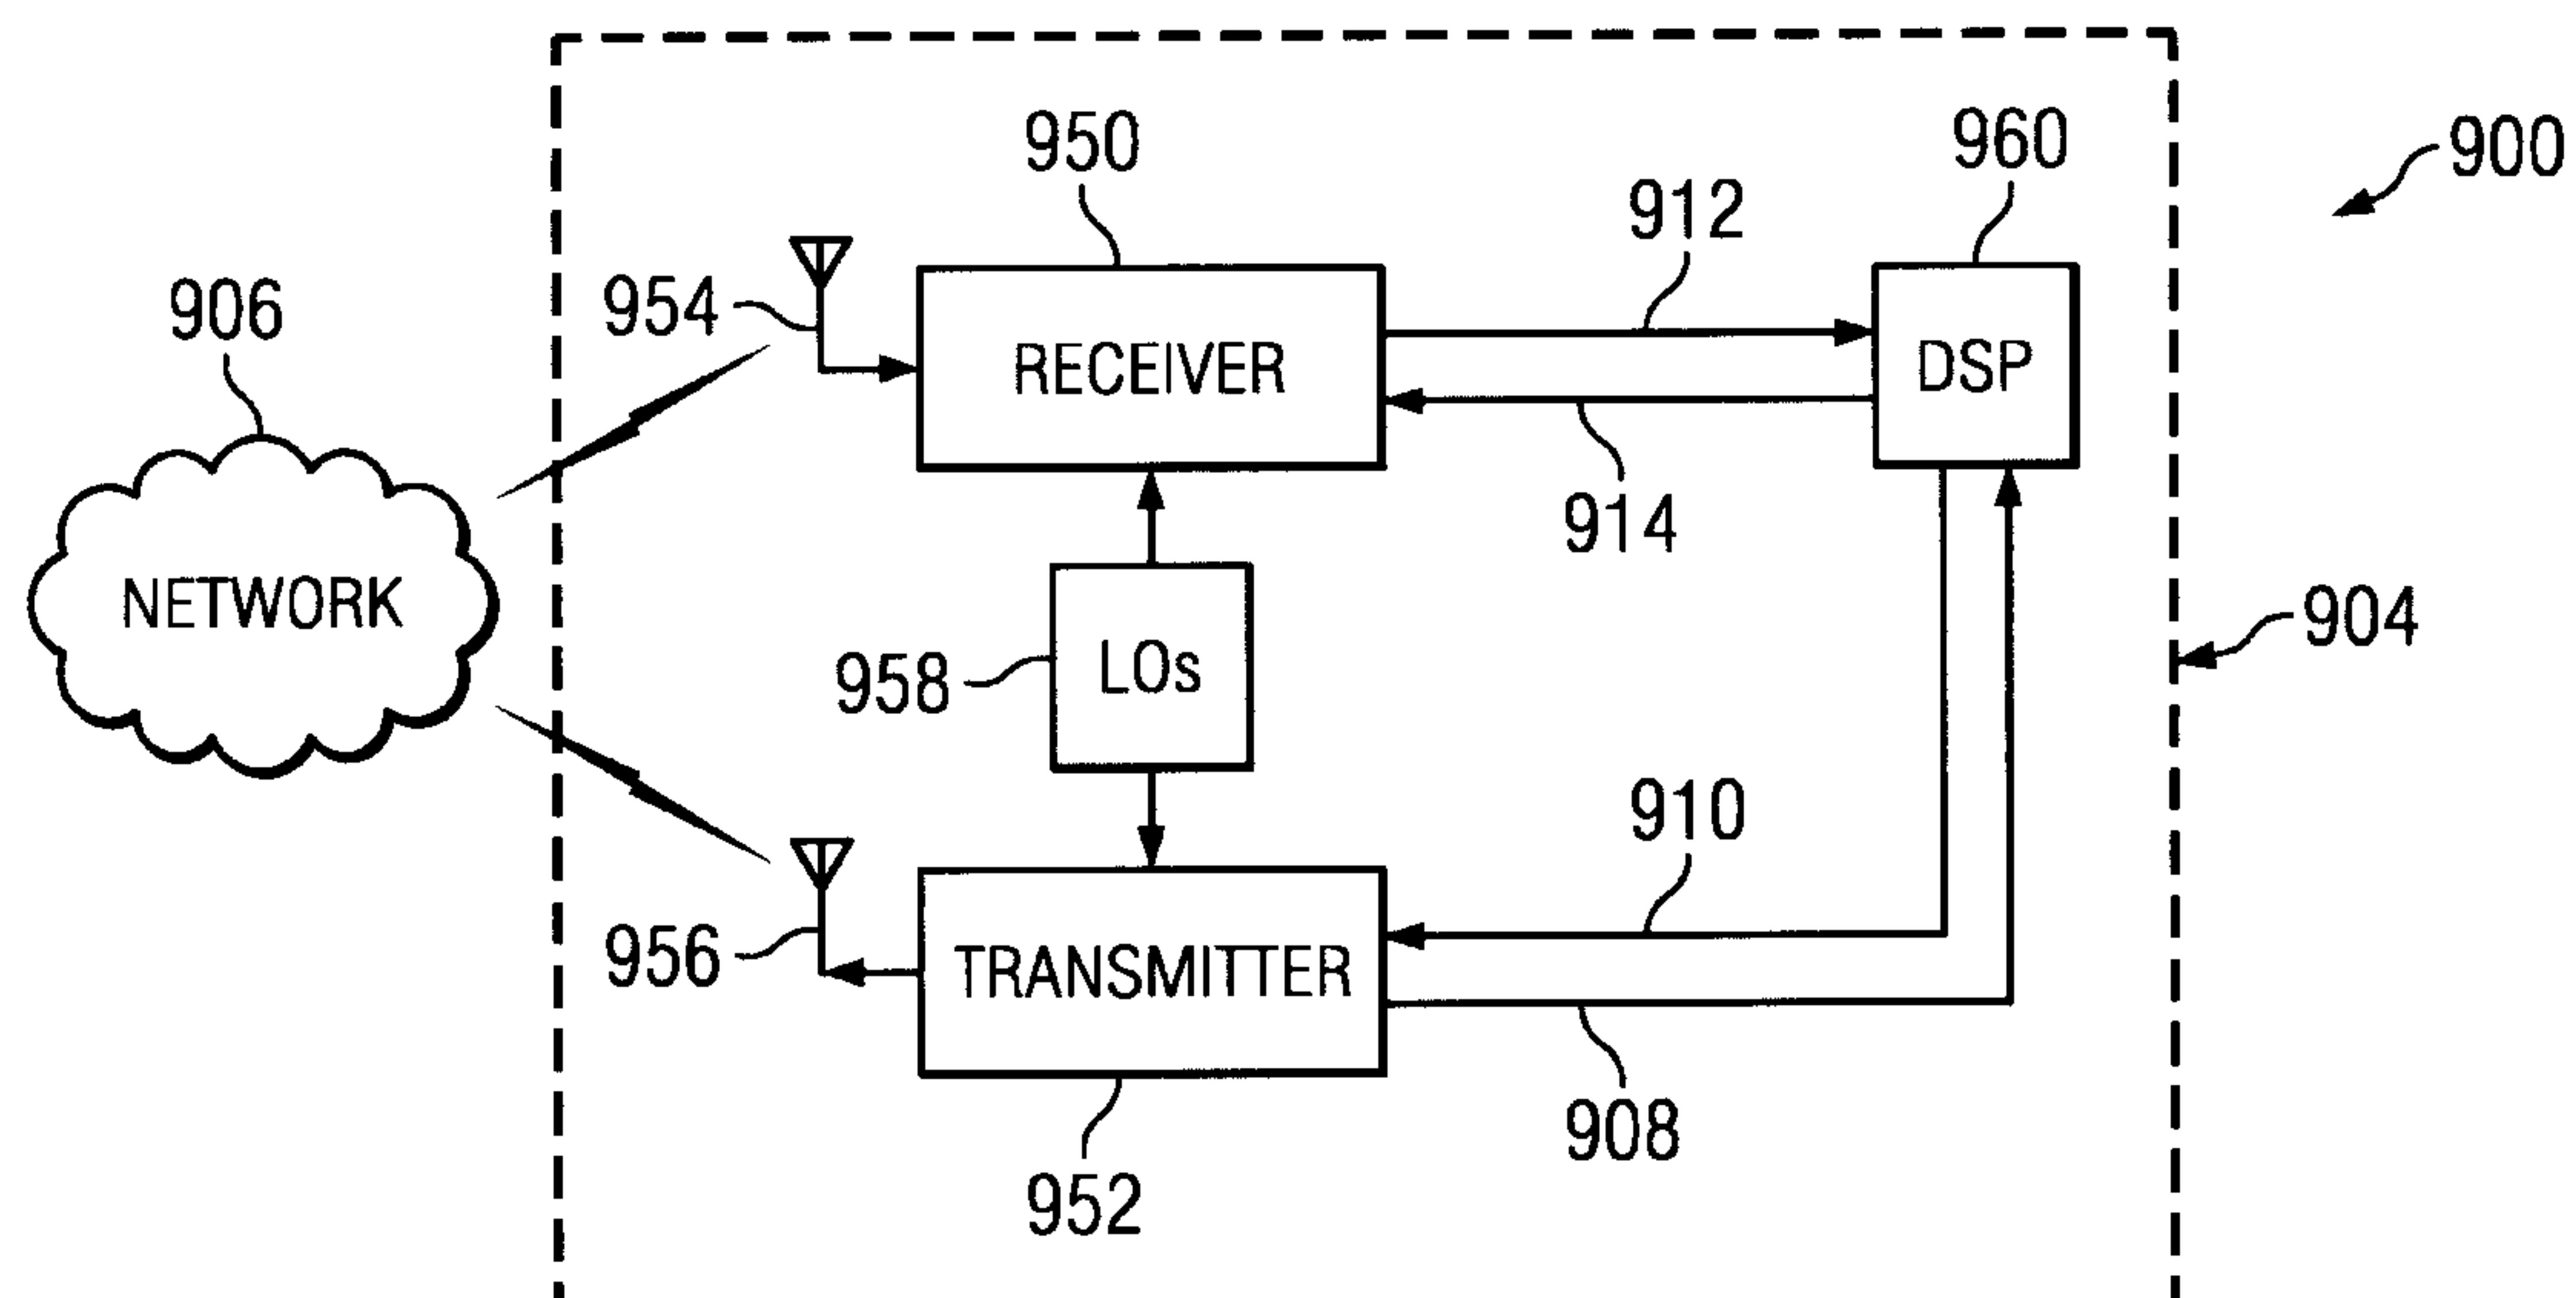


FIG. 9

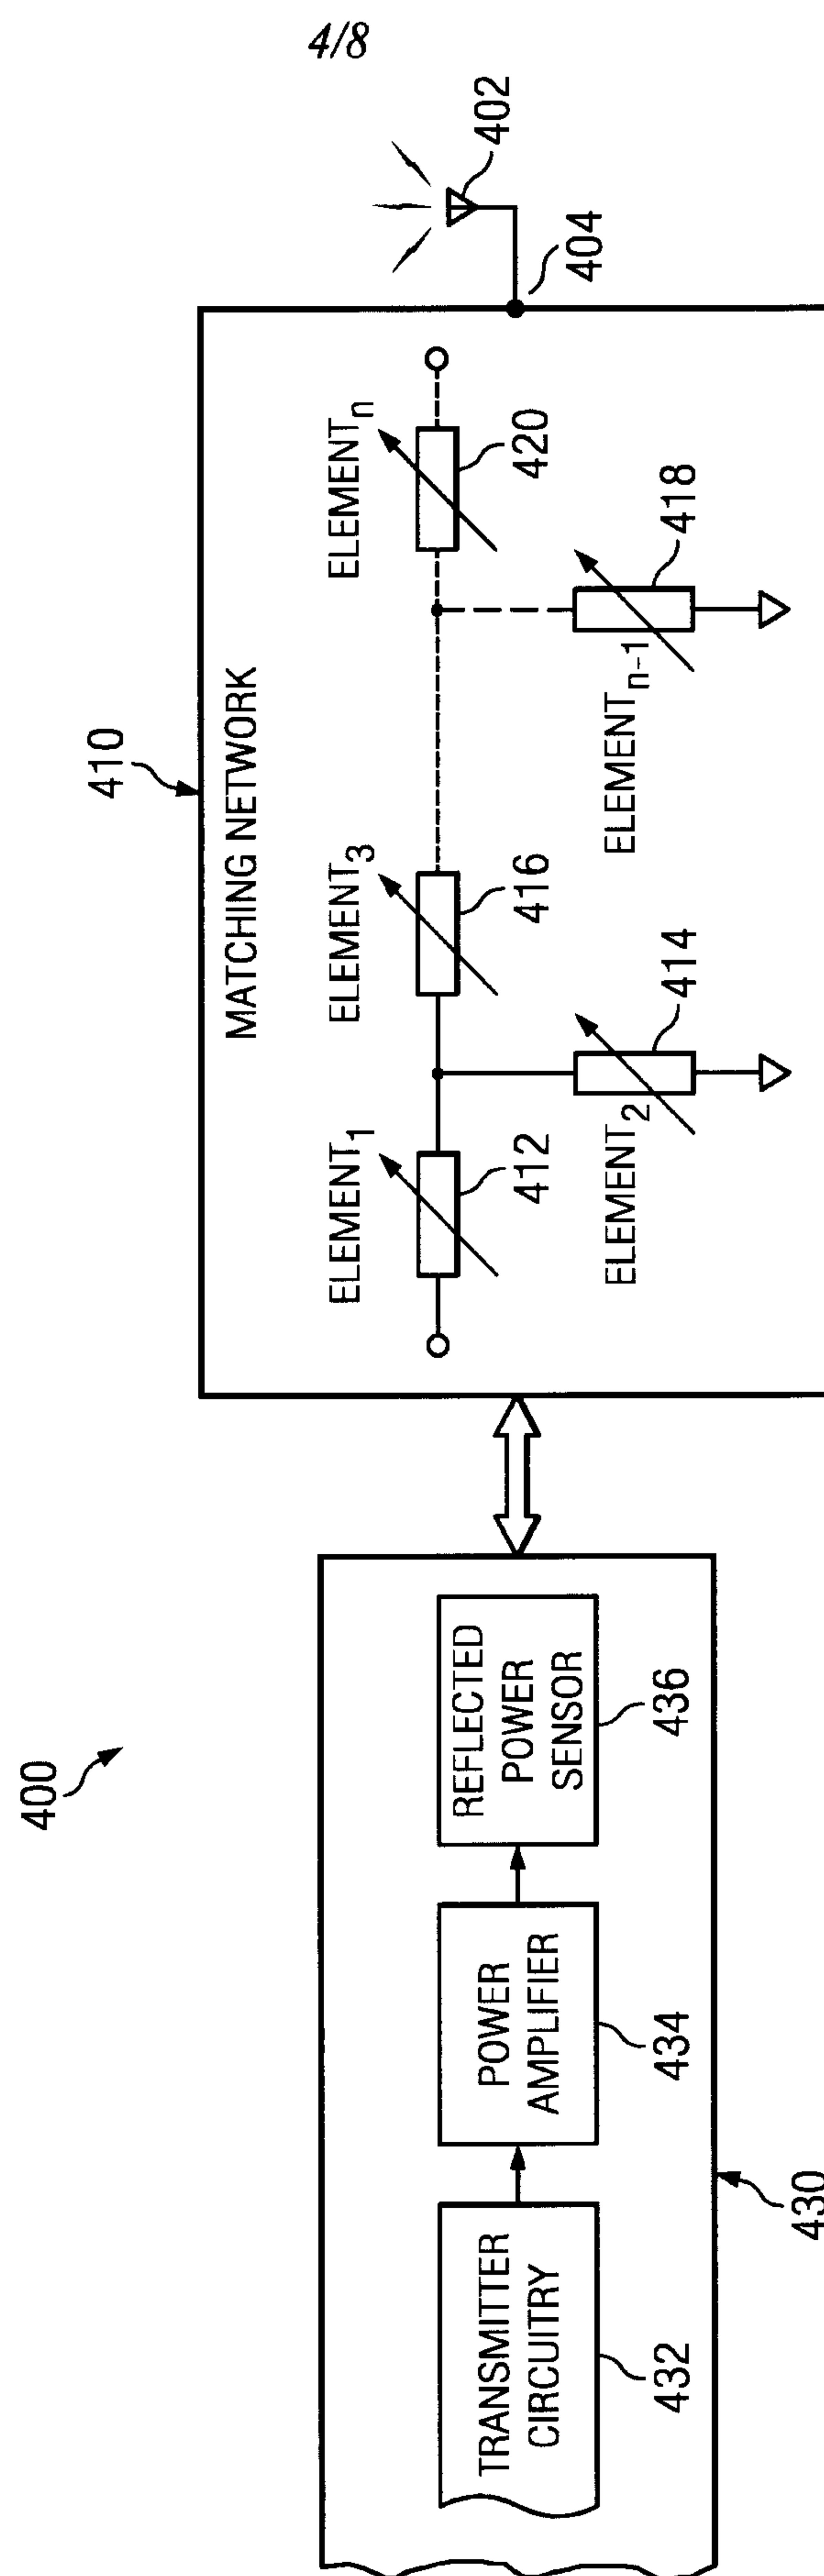


FIG. 4

5/8

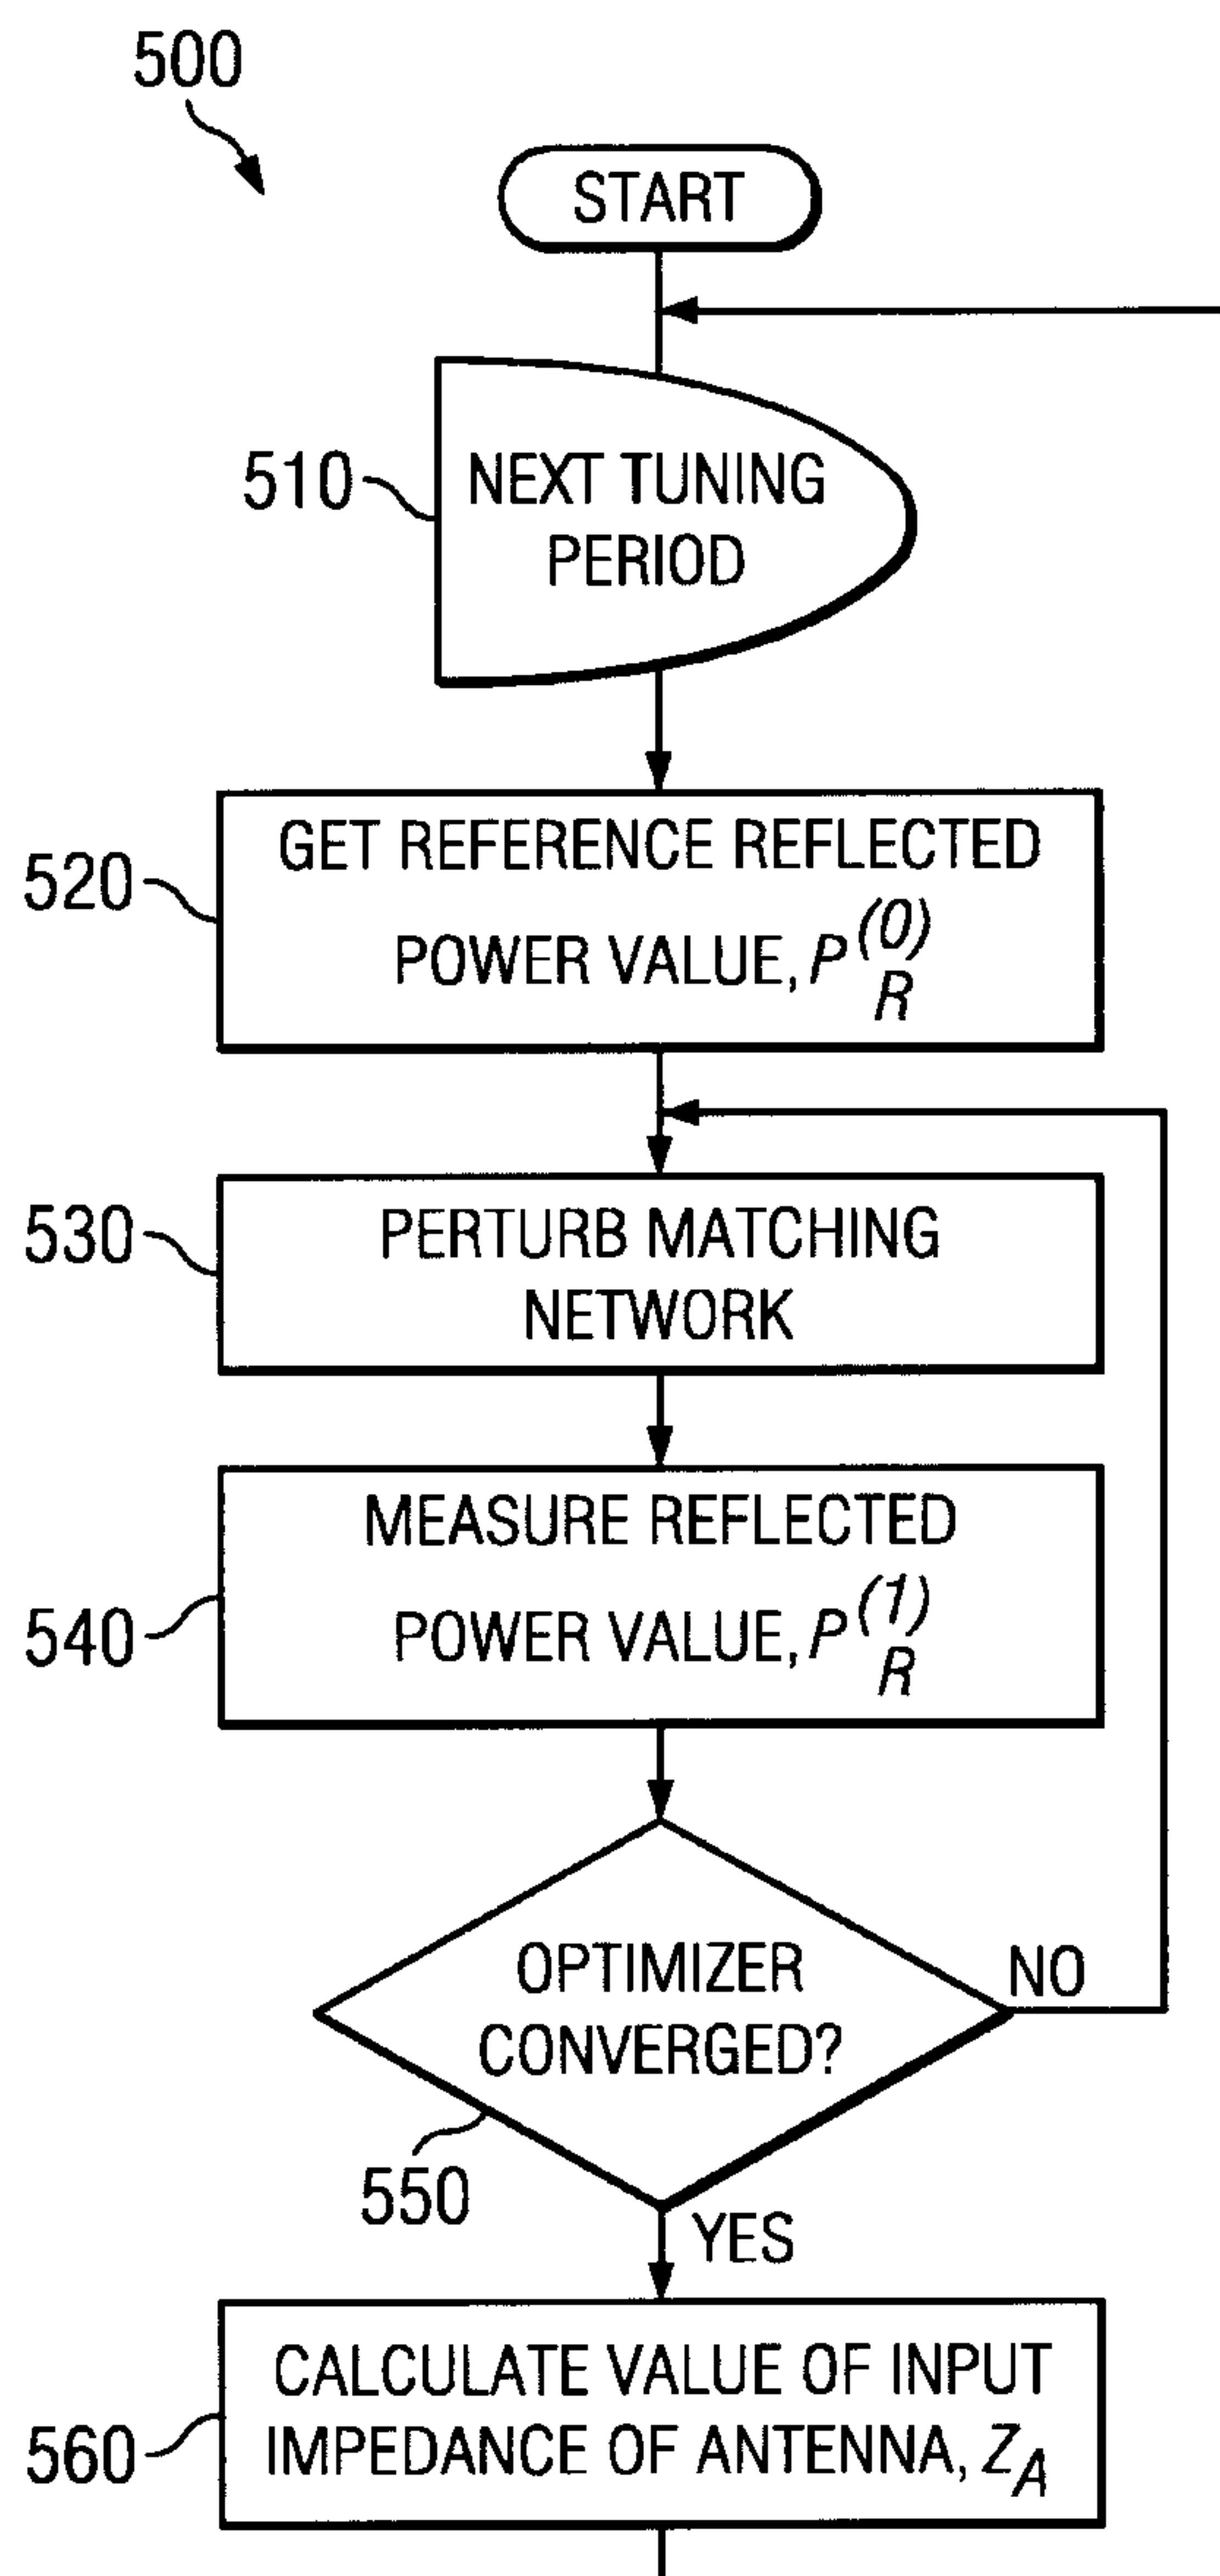


FIG. 5

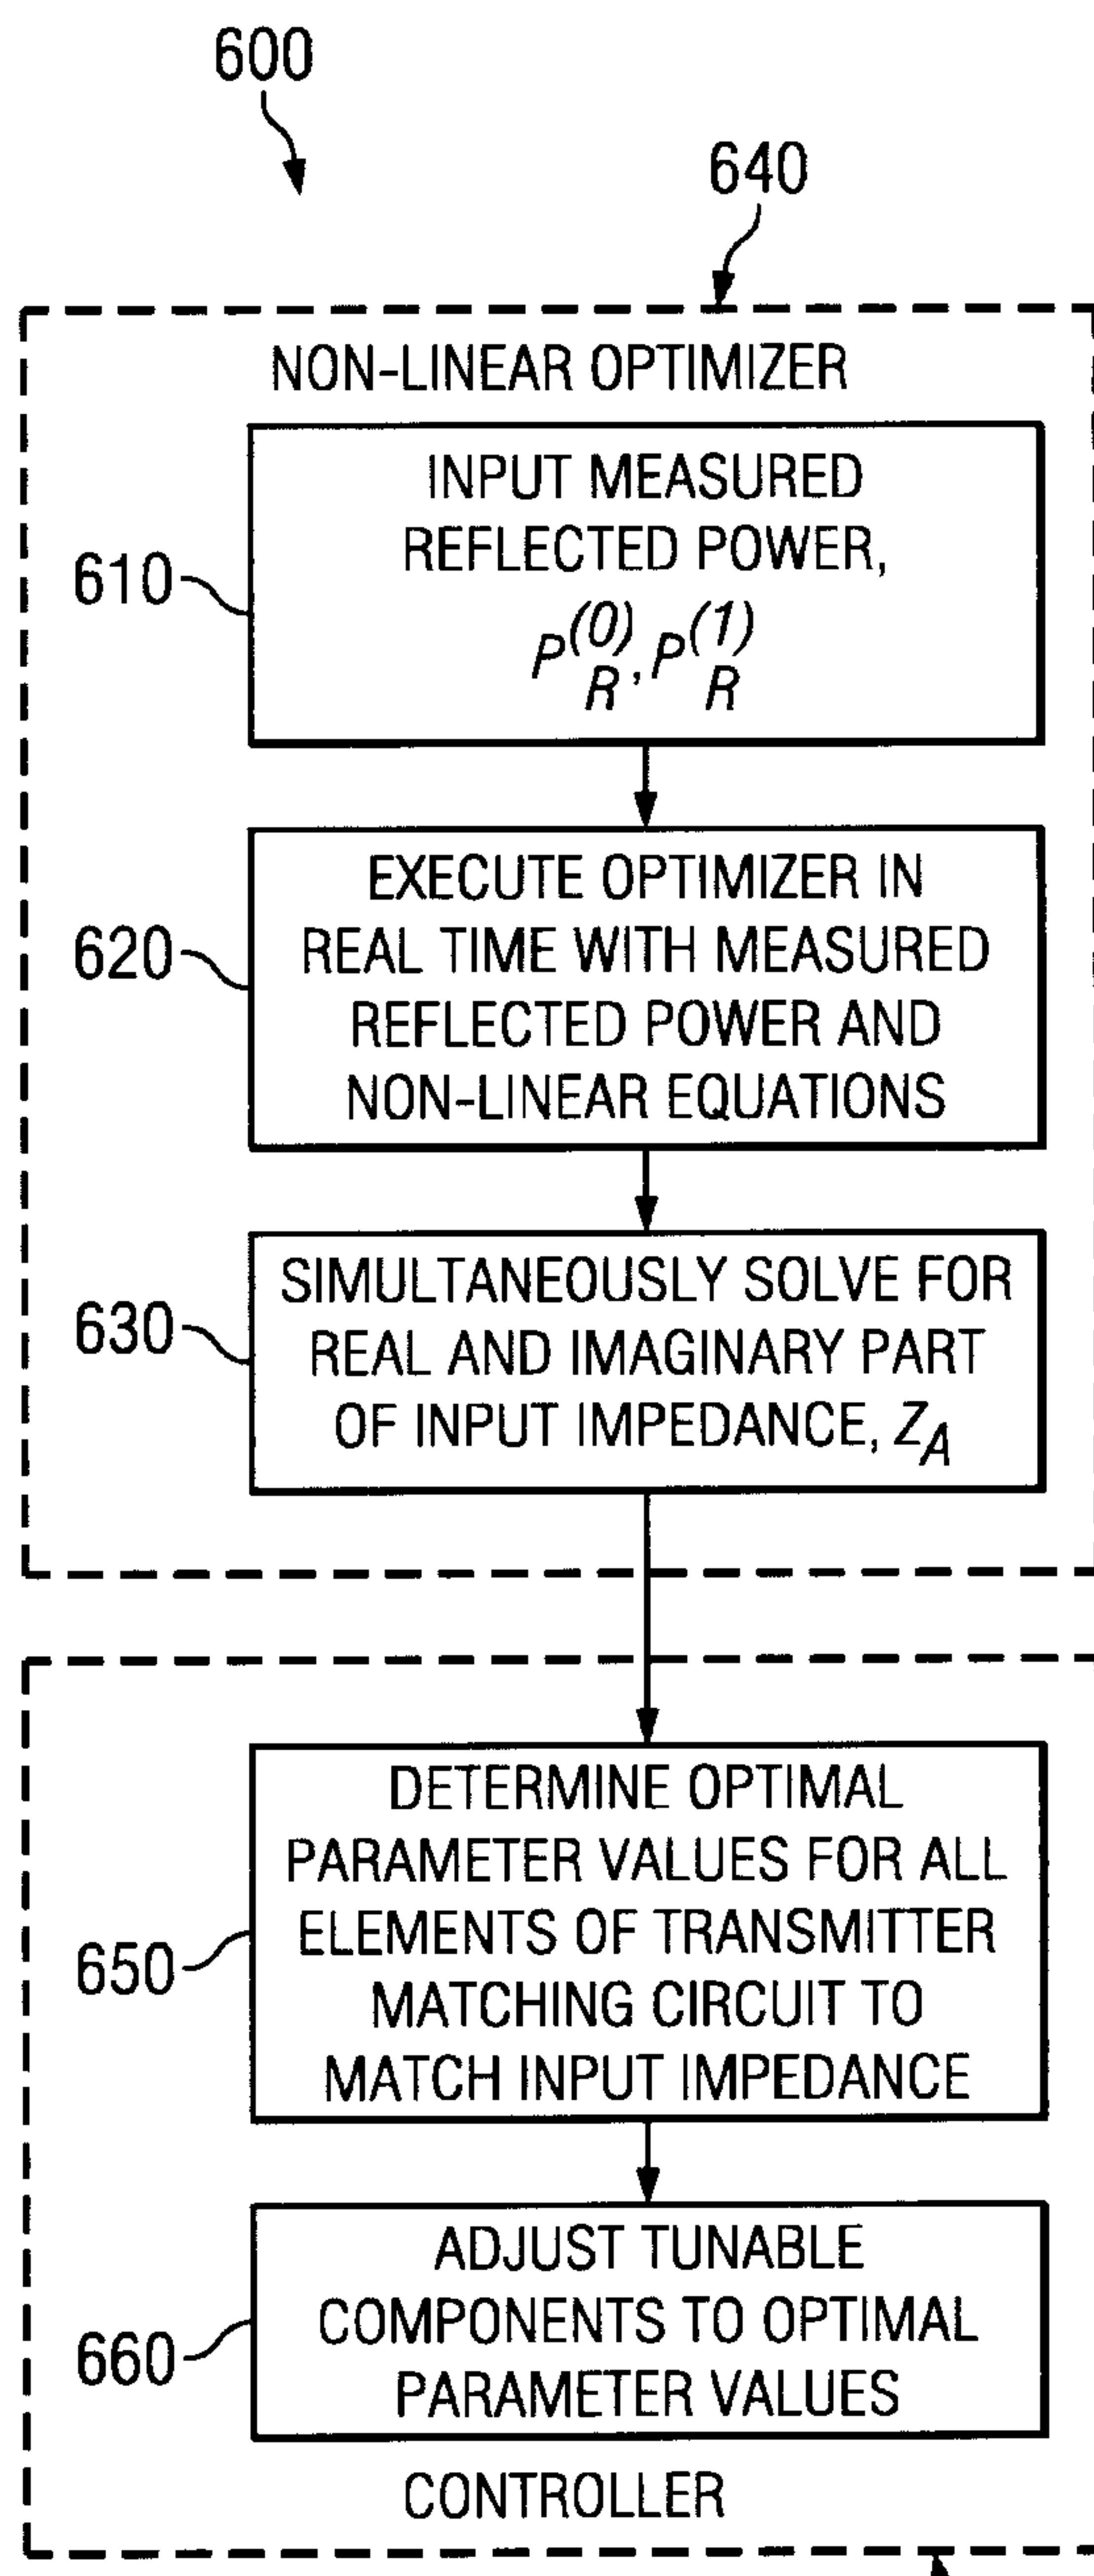


FIG. 6 670

6/8

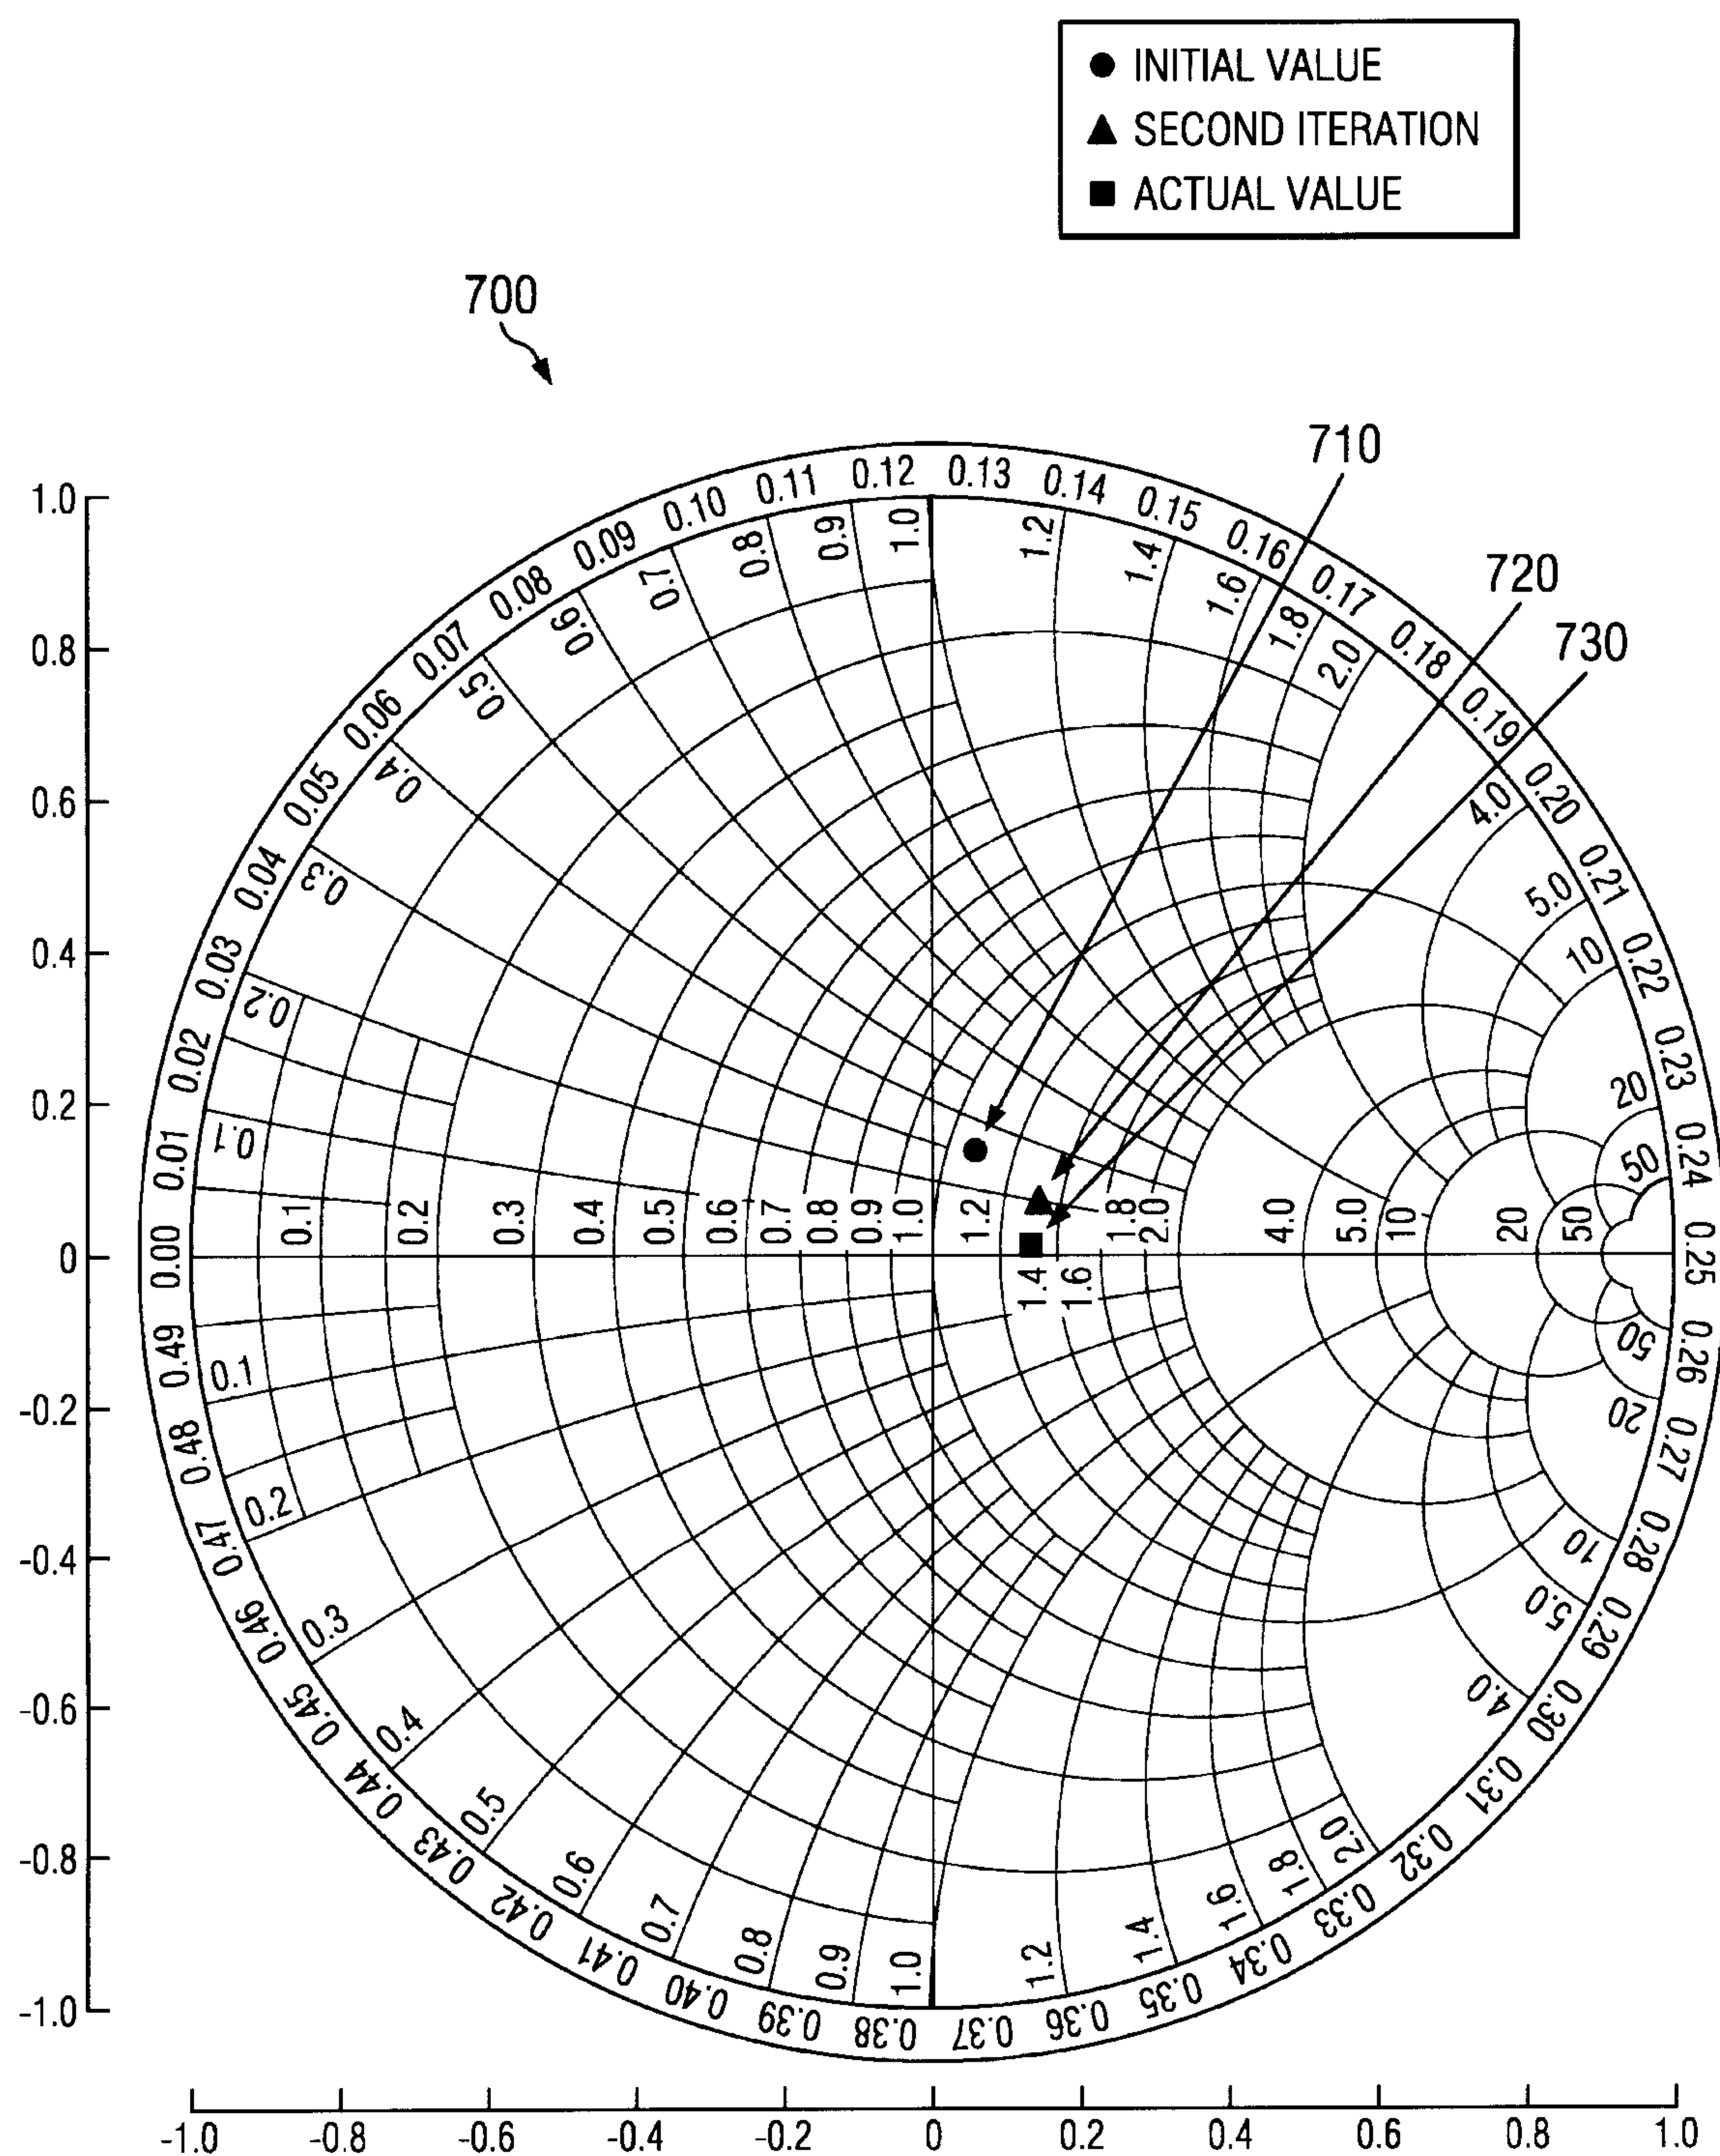


FIG. 7

7/8

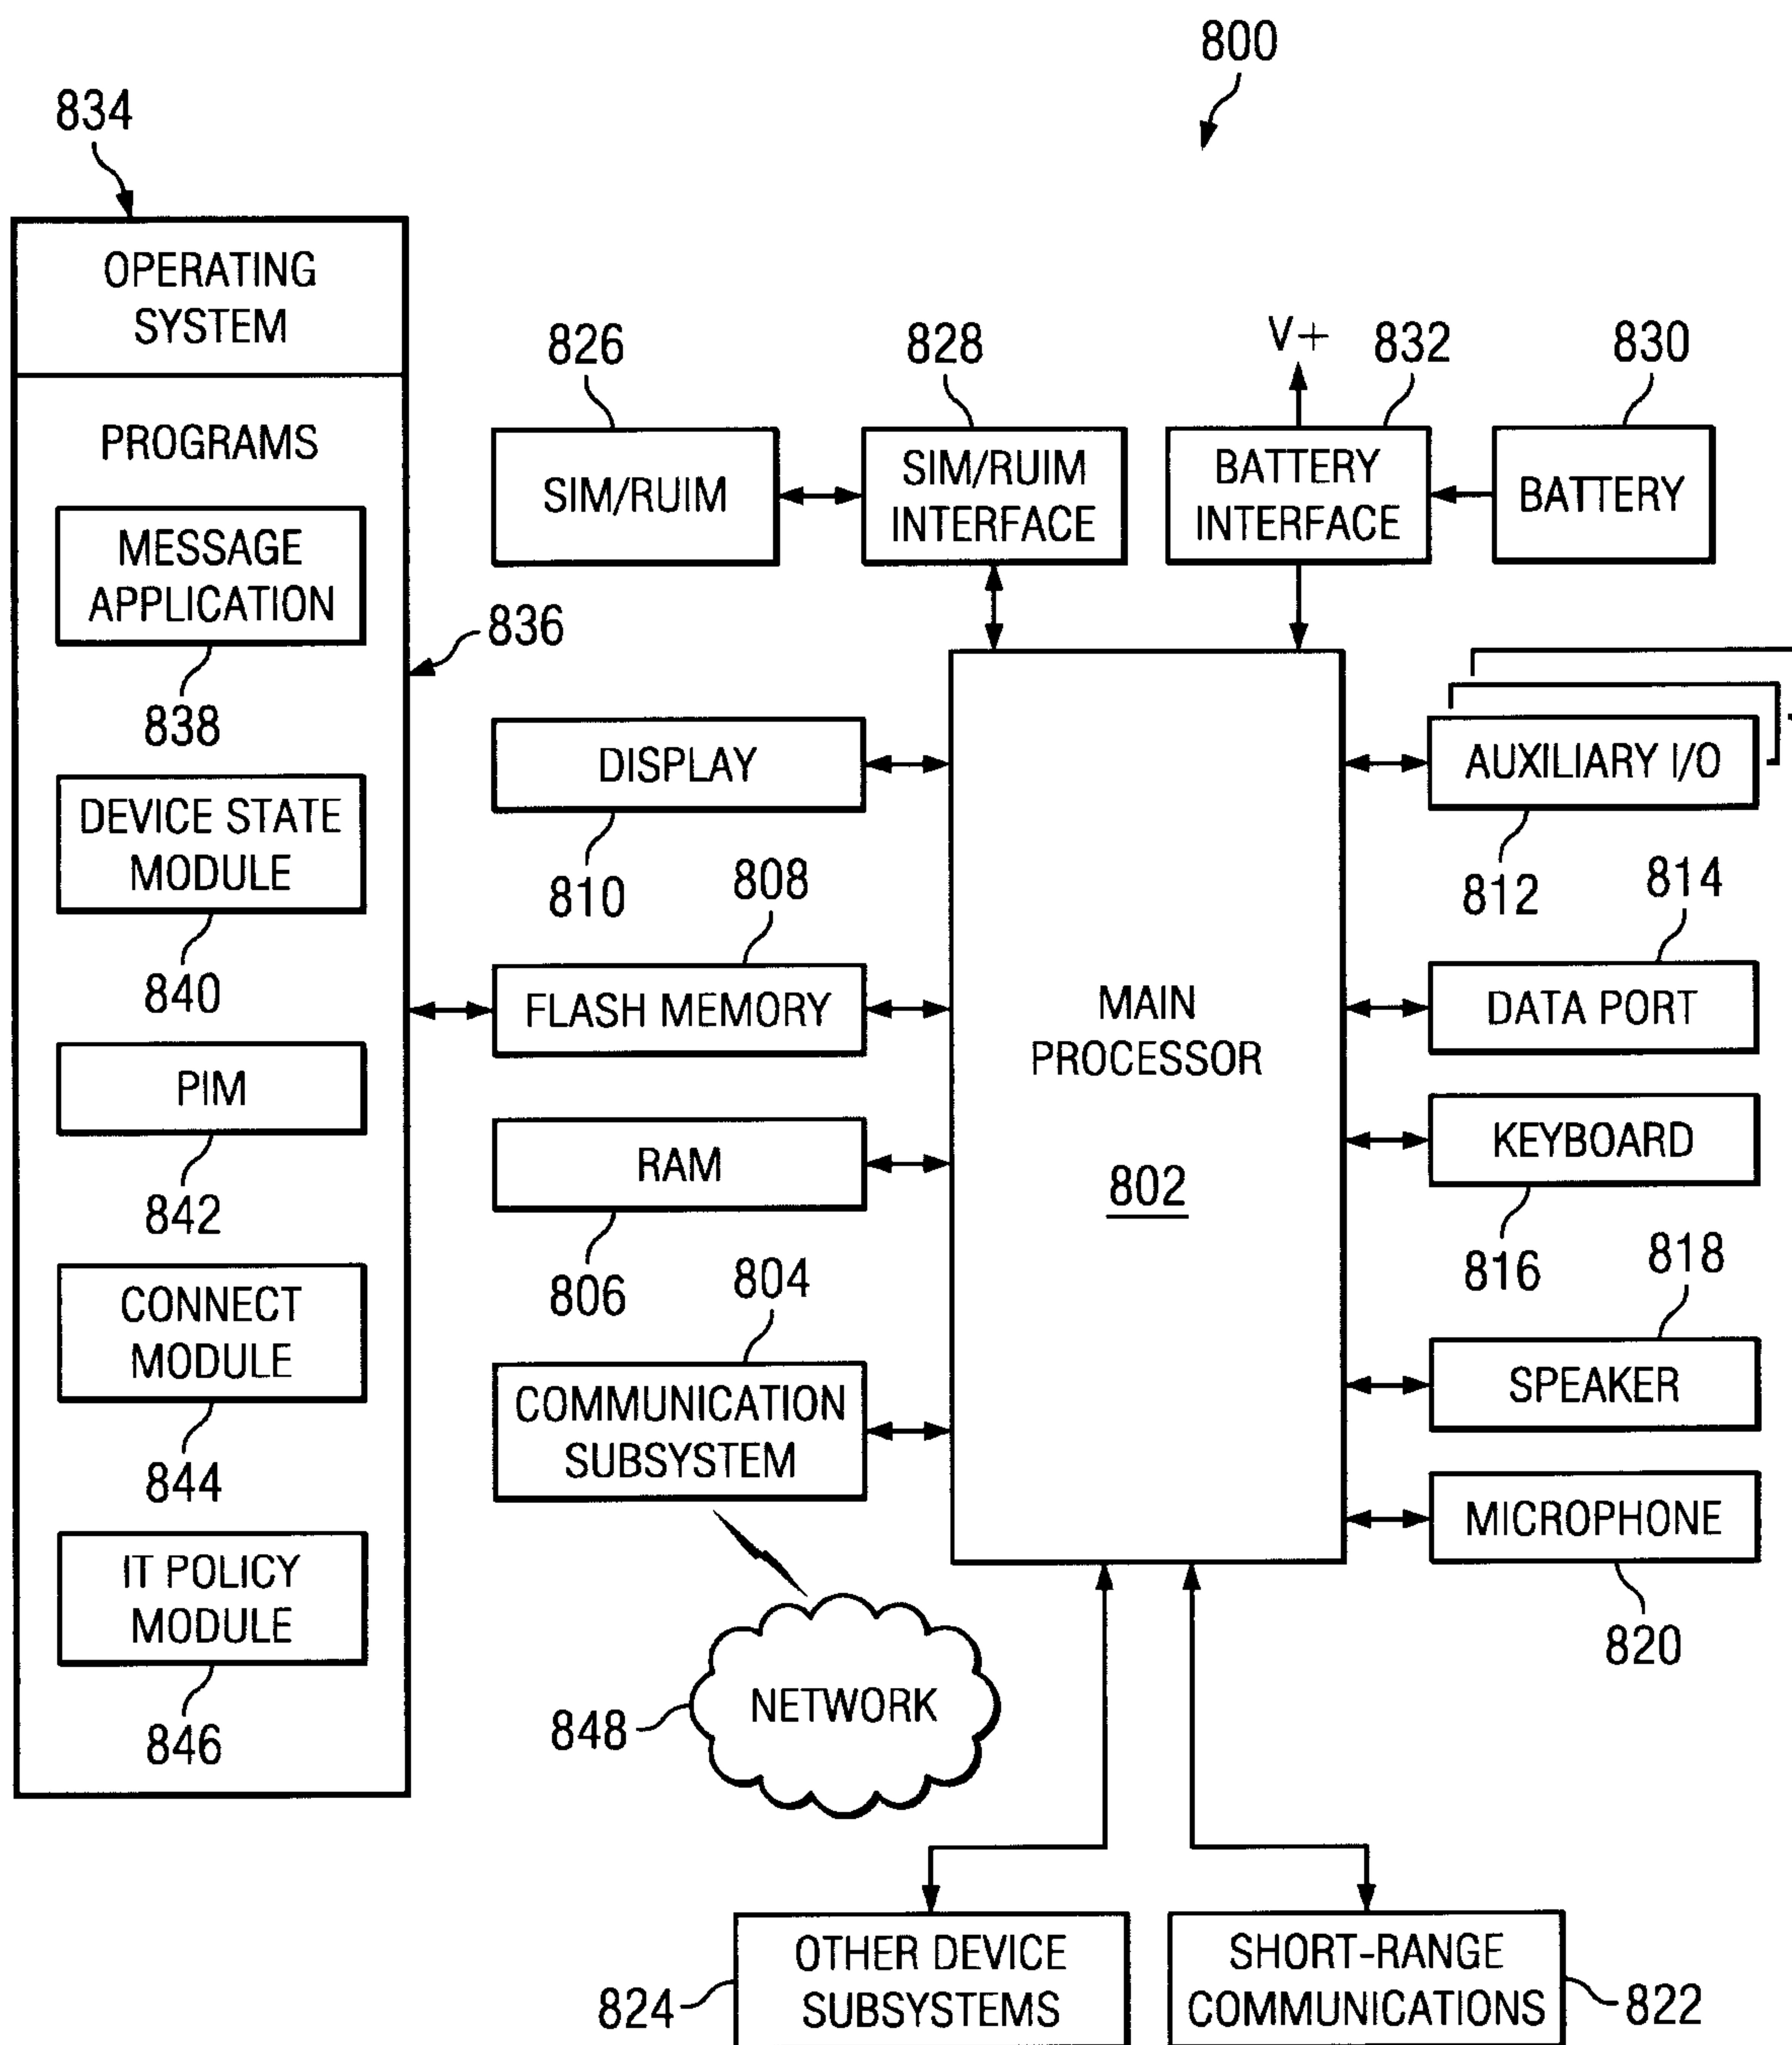


FIG. 8

8/8

