

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 November 2005 (10.11.2005)


PCT

(10) International Publication Number
WO 2005/107018 A1

- (51) International Patent Classification⁷: **H01R 12/20** (74) Agent: WEISS, Stephen, Z.; Molex Incorporated, 2222 Wellington Court, Lisle, IL 60532 (US).
- (21) International Application Number: PCT/US2005/009361 (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 22 March 2005 (22.03.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 10/825,846 16 April 2004 (16.04.2004) US
- (71) Applicant (for all designated States except US): **MOLEX INCORPORATED** [US/US]; 2222 Wellington Court, Lisle, IL 60532 (US).
- (71) Applicants and
- (72) Inventors: **BOGIEL, Stephen, B.** [US/US]; 4401 Middleton Place, Lisle, IL 60532 (US). **OWSLEY, Robert, A.** [US/US]; 1802 Burlington Avenue, Lisle, IL 60532 (US). **PATEL, Arvind** [US/US]; 4809 Princeton Circle, Naperville, IL 60565 (US).
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: BOARD MOUNTED SIDE-ENTRY ELECTRICAL CONNECTOR

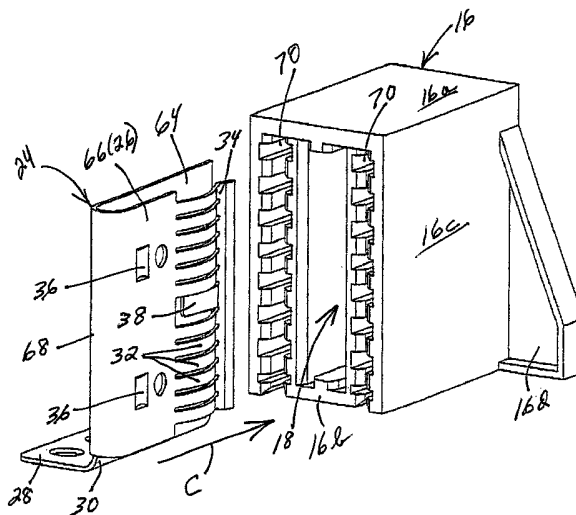

(57) Abstract: A side-entry, blade-receiving electrical connector (14) is provided for mounting on a printed circuit board. The connector includes a dielectric housing (16) having a bottom wall (16b) and a blade-receiving receptacle (18) at a side of the housing. At least one conductive terminal (24) is mounted on the housing and includes a contact section (26) exposed within the receptacle for electrically engaging a terminal blade of a complementary mating connecting device inserted into the side receptacle generally parallel to the printed circuit board. A mounting section (28) is exposed exteriorly of the housing below the bottom wall thereof for mounting the connector on the printed circuit board. A flex section (30) joins (30) the mounting section to the contact section and performs a dual function of (a) spacing the bottom wall of the housing above the printed circuit board and (b) providing a yielding flexibility between the connector and the board.



— with amended claims

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

BOARD MOUNTED SIDE-ENTRY ELECTRICAL CONNECTOR**Field of the Invention:**

This invention generally relates to the art of electrical connectors and, particularly, to a side-entry board mounted connector for use in various applications such as for receiving a terminal blade of a power connector.

5

Background of the Invention:

Various types of electrical connectors are designed for mounting on a printed circuit board. A typical board mounted connector includes some form of dielectric housing which mounts one or more conductive terminals. The terminals have terminating ends for connection to appropriate circuit traces on the board and contact ends on or in the housing for engagement with appropriate contacts or terminals of a complementary mating connector. The dielectric housing has a board-mounting end or face and a mating end or face which may have a receptacle, for instance, for receiving a mating end of the complementary mating connector.

10

One type of board mounted connector is a power (i.e., versus a signal) connector which couples power circuitry to and/or from power circuits on the printed circuit board. Such a power connector includes an elongated receptacle for receiving a flat blade terminal of a complementary mating power connector. In some instances, the receptacle is oriented in a direction generally perpendicular to the board for receiving a power terminal blade inserted into the receptacle generally perpendicularly toward the board. With such perpendicular connectors, there are minimal stresses on the connections to the board because the board, itself, absorbs most of the perpendicular forces.

15

20

However, some connectors of this type are "side-entry" connectors, in that the terminal blade is inserted into the connector's receptacle in a direction generally parallel to the board. With such side-entry connectors, considerable stresses, such as sheer stresses, occur at the board connections (which may be solder connections) and the connections often become damaged or broken, which results in defective power transmitting capabilities. It would be highly desirable to provide for some flexibility between the connector and the board to absorb some of the side forces generally parallel to the board, but this is not easily accomplished with many robust power connectors. The present invention is directed to solving these problems.

25

30

Summary of the Invention:

An object, therefore, of the invention is to provide a new and improved side-entry board mounted electrical connector.

Another object of the invention is to provide a new and improved connector of the character described which is a power-type connector which receives a terminal blade of a complementary mating connector.

In the exemplary embodiment of the invention, the connector includes a dielectric housing having a bottom wall and a blade-receiving receptacle at a side of the housing. At least one conductive terminal is mounted on the housing and includes a contact section exposed within the receptacle for electrically engaging a terminal blade of a complementary mating connecting device inserted into the side receptacle generally parallel to a printed circuit board. The terminal includes a mounting section exposed exteriorly of the housing below the bottom wall thereof for mounting the connector on the printed circuit board. A flex section of the terminal joins the mounting section to the contact section and performs a dual function of (a) spacing the bottom wall of the housing above the printed circuit board and (b) providing a yielding flexibility between the connector and the board.

According to one aspect of the invention, the conductive terminal is stamped and formed of sheet metal material. The mounting section of the terminal is a plate-like member for flush mounting on a surface of the printed circuit board. The flex section comprises a generally right-angled bend in the terminal between the plate-like mounting section and the contact section.

According to another aspect of the invention, the contact section of the conductive terminal is generally U-shaped in a cross-section generally parallel to the printed circuit board. The U-shape defines a pair of legs joined by a curved bight portion. One leg is connected to the mounting section of the terminal. The other leg forms a contact portion of the terminal which engages the terminal blade of the mating connecting device. The one leg of the U-shaped contact section is a plate-like member in abutment with the housing. The other leg forms a contact arm which is free to flex toward and away from the one leg. The contact arm has a plurality of flexible spring fingers for engaging the terminal blade of the mating connecting device. The contact arm has latch means for securing the terminal to the housing, the latch means being spaced inwardly from the flexible spring fingers.

Other features of the invention include the bottom wall of the housing being recessed in an area immediately above the mounting section of the conductive terminal to accommodate flexing of the housing relative to the subjacent circuit board. The blade-receiving receptacle is a through passage in the housing extending generally parallel to the printed circuit board for

receiving a terminal blade of a mating connecting device in either opposite direction of the through passage. The housing has at least one anti-overstress wing projecting outwardly therefrom above the printed circuit board to prevent over-flexing of the conductive terminal. As disclosed herein, a pair of the conductive terminals are provided at opposite sides of the blade-receiving receptacle for engaging opposite sides of the terminal blade of the mating connecting device therebetween.

Other objects, features and advantages of the invention will be apparent from the following detailed description taken in connection with the accompanying drawings.

10 **Brief Description of the Drawings:**

The features of this invention which are believed to be novel are set forth with particularity in the appended claims. The invention, together with its objects and the advantages thereof, may be best understood by reference to the following description taken in conjunction with the accompanying drawings, in which like reference numerals identify like elements in the figures and in which:

FIG. 1 is a top perspective view of a first embodiment of a side-entry board mounted blade-receiving electrical connector embodying the concepts of the invention;

FIG. 2 is a bottom perspective view of the connector, with one of the terminals removed;

FIG. 3 is a side elevational view of the connector, looking at the through receptacle thereof;

FIG. 4 is a sectioned perspective view looking generally in the direction of line 4-4 of FIG. 3;

FIG. 5 is a view similar to that of FIG. 4, but with the terminal removed from the housing;

FIG. 6 is a perspective view of the connector, showing a blade extending completely through the receptacle of the connector;

FIG. 7 is a view similar to that of FIG. 1, but of a second embodiment of the invention;

FIG. 8 is a perspective view of the connector in FIG. 7, looking at the opposite side thereof;

FIG. 9 is a view similar to that of FIG. 3, but of the second embodiment;

FIG. 10 is a perspective of the two terminals of the second embodiment;

FIG. 11 is a perspective view of the second embodiment, with one of the terminals removed from the housing; and

FIG. 12 is a sectioned perspective view along the through receptacle of the second embodiment, with the terminal removed.

Detailed Description of the Preferred Embodiments:

Referring to the drawings in greater detail, and first to FIGS. 1-3, a first embodiment of the invention is incorporated in a side-entry board mounted blade-receiving electrical connector, generally designated 14. The connector is designed for mounting on a printed circuit board and for receiving a flat terminal blade of a complementary mating connector or other connecting device (not shown). Blade receptacles and blade connectors are used extensively as power connectors to couple power (i.e., versus signals) to circuit traces on the circuit board. The features of the invention, such as using the terminals, themselves, to space the connector housing above the circuit board as described hereinafter, are equally applicable for use with other types of connectors or connector assemblies.

With that understanding, connector 14 includes a dielectric housing, generally designated 16, which is generally rectangular and box-shaped as seen in FIGS. 1 and 2. The housing may be a one-piece structure unitarily molded of dielectric plastic material or the like. The box-shaped housing includes a top wall 16a, a bottom wall 16b and a pair of side walls 16c which form a blade-receiving, through passage or side-entry receptacle, generally designated 18 and best seen in FIG. 3. With bottom wall 16b of the housing facing a printed circuit board to which the connector is mounted, the term "side-entry" means that the receptacle receives a blade terminal in a direction generally parallel to the circuit board as indicated by arrow "A" in FIG. 1. Details of the interior of the receptacle will be described hereinafter. As seen in all of FIGS. 1-3, housing 16 includes a pair of integral, anti-overstress wings 16d which extend outwardly from opposite side walls 16c. Arrows "B" in FIGS. 1 and 3 show that a bottom surface 20 of wings 16d are spaced above a top surface 22a (Fig. 3) of a printed circuit board 22 when connector 14 is mounted to the board.

Referring to FIGS. 4 and 5 in conjunction with FIGS. 1-3, side-entry connector 14 includes a pair of conductive terminals, generally designated 24, which are mounted in housing 16 at opposite sides of blade-receiving receptacle 18. Each terminal includes a contact arm or contact section 26 which, at least in part, is exposed within receptacle 18 for electrically engaging the terminal blade of the complementary mating connector. Each terminal includes a mounting section 28 which is exposed exteriorly at the bottom of housing 16 below bottom wall 16b for mounting the connector on top surface 22a of printed circuit board 22 as seen clearly in FIG. 3. A flex section 30 joins mounting section 28 to contact arm or section 26 of each

terminal 24. The flex section performs a dual function of spacing bottom wall 16b of the housing above the printed circuit board as seen in FIG. 3, and also providing a yielding flexibility or floating movement between the connector and the board.

More particularly, each terminal 24 may be stamped and formed of conductive sheet metal material. Mounting section 28 is a plate-like member for flush mounting on surface 22a of circuit board 22 as seen in FIG. 3, and the plate-like members of the two terminals may be soldered to power circuit traces on the board, as by soldering, with the plate-like members having apertures 28a to add "edges" to the mounting sections about which the solder material can flow. Each terminal is generally L-shaped, whereby flex section 30 forms a generally right-angled bend between mounting section 28 and contact section 26.

Contact arm or section 26 of each terminal 24 is a plate-like member which has a plurality of flexible, spring contact fingers 32 projecting into receptacle 18 as seen in FIG. 3, with the distal ends of the spring contact fingers joined by a cross bar 34 as seen in FIGS. 4 and 5. In essence, the spring contact fingers are stamped and formed out of the plane of the contact section so that they bow inwardly and present contact surfaces 32a as seen in FIG. 3 for engaging opposite sides of the terminal blade of the complementary mating connector. For purposes described below, contact section 26 of each terminal 24 has a pair of abutment bosses 36, along with a flexible latch tab 38.

Referring to FIGS. 4 and 5 particularly in conjunction with FIG. 3, terminals 24 are inserted into a pair of grooves or slots 40 in the insides of top and bottom walls 16a and 16b, respectively, of the housing. The top and bottom "ends" 26a and 26b, respectively, of contact section 26 (as seen in FIG. 5) are insertable into slots 40 in the top and bottom walls, respectively, of the housing in the direction of arrow "C" (Fig. 5). When fully inserted, a stop shoulder 42 at end 26a of the contact section abuts against a stop shoulder 44 of housing 16 within the respective slot 40. A step-shaped abutment stop 46 at bottom end 26b of the contact section abuts against a step-shaped abutment shoulder 48 of housing 16 within the bottom slot 40. It should be understood that FIGS. 4 and 5 are sections taken through the slot for the terminal which is not shown in the depictions.

When terminal 24 is fully inserted into its respective slot 40, flexible latch tab 38 snaps into latching engagement with a latch shoulder 50 formed in the inside of the adjacent side wall 52 (Fig. 3) of receptacle 18. Abutment bosses 36 engage the side walls to provide a tight fit of the terminals in the housing and to prevent any "rattling" of the terminals.

FIG. 6 shows a bare terminal blade 60 extending completely through the blade-receiving receptacle 18 of connector 14 to show that a terminal blade of a complementary mating

connector can be inserted into receptacle 18 in either opposite direction generally parallel to the circuit board. Of course, terminal blade 60 typically will project outwardly from the remainder of a mating connector.

When connector 14 is mounted to circuit board 22 by means of mounting sections 28 of terminals 24, bottom wall 16b of housing 16 is spaced above top surface 22a of circuit board 22 as shown by arrows "E" in FIG. 3. Flex sections 30 of terminals 24 provide a yielding flexibility between connector 14 and circuit board 22 to absorb significant stress-creating forces in a direction generally parallel to the circuit board. In addition, as indicated by arrows "B" in FIG. 3, the bottom surfaces 20 of anti-overstress wings 16d are spaced an additional distance from the top surface of the circuit board so that if the housing is tilted or otherwise forced too far in directions parallel to the circuit board, the outside bottom corners of the wings will abut against the top surface of the circuit board and prevent any further movement of the connector.

As best seen in FIGS. 2 and 6, bottom wall 16b of housing 16 is recessed, as at 62, immediately above mounting sections 28 of terminals 24 to facilitate spacing the housing from the mounting sections.

FIGS. 7-12 show a second embodiment of the invention which is similar to the first embodiment except that housing 16 is wider and has a differently configured receptacle 18 to accommodate differently configured terminals 24. Wherever possible, like reference numerals will be used and applied to the second embodiment in FIG. 7 corresponding to like components of the first embodiment of connector 14 shown in FIGS. 1-6. Where similarities exist, details already described above will not be repeated.

With that understanding, the connector of the second embodiment will be referenced as "14A", and reference will be made directly to FIG. 10 where it can be seen that a pair of terminals 24 again include apertured, plate-like mounting sections 28 for flush mounting connector 14A on top surface 22a (Fig. 9) of circuit board 22. Flex sections 30 again join contact sections, generally designated 26, to mounting sections 28 in a generally right-angled configuration, whereby the flex sections, again, perform a dual function of (a) spacing the bottom wall 16b of housing 16 from top surface 22a of circuit board 22, and (b) providing a yielding flexibility or floating movement between connector 14A and the circuit board.

Referring particularly to FIGS. 10-12, contact section 26 of each terminal 24 is generally U-shaped in a cross-section generally parallel to the circuit board. The U-shaped configuration defines a pair of legs 64 and 66 (26). As best seen in FIG. 10, leg 64 is a planar plate joined to mounting section 28 by flex section 30. Leg 64 is joined to leg 66 (26) by a curved bight portion 68 to form the U-shaped configuration. In comparing FIGS. 11 and 12 of the second

embodiment with FIG. 5 of the first embodiment, it can be seen that leg 66 (26) of the contact section of the terminal in the second embodiment is substantially identical to contact section 26 of the first embodiment. Therefore, like reference numerals will be applied to the like components of contact arm or section 26 in both embodiments, and the descriptions thereof will not be repeated.

Referring to FIGS. 8 and 9 of the second embodiment, housing 16 has a pair of interior grooves 70 which are spaced outwardly of the blade-receiving through receptacle 18. As clearly seen in FIG. 9, flexible contact fingers 32 of contact arms or sections 26 of the second embodiment are disposed at opposite sides of through receptacle 18 just as in the first embodiment.

However, when terminals 24 are mounted in housing 16 in the direction of arrows "C" (Figs. 11 and 12), plates 64 of the terminals are inserted into interior grooves 70 of housing 16 which are spaced outwardly of through receptacle 18. When fully inserted, latch tabs 38 snap into latching engagement behind latch shoulder 50 in the inside of the through receptacle, just as in the first embodiment.

Finally, a feature of the second embodiment of FIGS. 7-12 is that housing 16 is formed with a plurality of alternating ribs 72 and grooves 74 in the outside surfaces of interior grooves 70. Since connector 14A is a power connector like connector 14, grooves 74 perform a dual function of providing cooling channels to dissipate heat from the power terminals, and the grooves also reduce the thickness of side walls 16c of the housing to prevent warping during curing of the molded plastic housing.

It will be understood that the invention may be embodied in other specific forms without departing from the spirit or central characteristics thereof. The present examples and embodiments, therefore, are to be considered in all respects as illustrative and not restrictive, and the invention is not to be limited to the details given herein.

CLAIMS:

What is claimed is:

1. A side-entry board mounted blade-receiving electrical connector, comprising:

a dielectric housing having a bottom wall and a blade-receiving receptacle at a side of the housing; and

at least one conductive terminal mounted on the housing and including a contact section
5 exposed within the receptacle for electrically engaging a terminal blade of a complementary mating connecting device inserted into the receptacle generally parallel to a printed circuit board, a mounting section exposed exteriorly of the housing below the bottom wall thereof for mounting the connector on the printed circuit board, and a flex section joining the mounting section to the contact section and performing a dual function of (a) spacing the bottom wall of
10 the housing spaced above the printed circuit board and (b) providing a yielding flexibility between the connector and the board.

2. The electrical connector of claim 1 wherein the mounting section of said conductive terminal is a plate-like member for flush mounting on a surface of the printed circuit board.

3. The electrical connector of claim 1 wherein said conductive terminal is stamped and formed of sheet metal material.

4. The electrical connector of claim 3 wherein the flex section of said conductive terminal comprises a generally right-angled bend in the terminal between the mounting section and the contact section.

5. The electrical connector of claim 1 wherein the contact section of said conductive terminal is generally U-shaped in a cross-section generally parallel to the printed circuit board, to define a pair of legs joined by a bight portion, one leg being connected to the mounting section of the terminal, and the other leg forming a contact portion of the terminal
5 which engages the terminal blade of the mating connecting device.

6. The electrical connector of claim 5 wherein said one leg of the U-shaped contact section is a plate-like member in abutment with the housing, and the other leg of the U-shaped contact section forms a contact arm with portions free to flex toward and away from the one leg.

7. The electrical connector of claim 6 wherein said contact arm has a plurality of flexible spring fingers for engaging the terminal blade of the mating connecting device.

8. The electrical connector of claim 5, including latch means on said other leg for latching the conductive terminal to the housing.

9. The electrical connector of claim 1 wherein said blade-receiving receptacle is a through passage in the housing extending generally parallel to the printed circuit board for receiving a terminal blade of a mating connecting device in either opposite direction of the through passage.

10. The electrical connector of claim 1 wherein the bottom wall of said housing is recessed in an area immediately above the mounting section of the conductive terminal.

11. The electrical connector of claim 1 wherein said housing has at least one anti-overstress wing projecting outwardly therefrom above the printed circuit board to prevent overflexing of the conductive terminals.

12. The electrical connector of claim 1, including a pair of said conductive terminals at opposite sides of the blade-receiving receptacle.

13. The electrical connector of claim 1 wherein said contact section has a plurality of flexible spring fingers for engaging the terminal blade of the mating connecting device.

14. A side-entry board mounted blade-receiving electrical connector, comprising:
a dielectric housing having a bottom wall and a blade-receiving receptacle at a side of the housing; and

5 a pair of conductive terminals mounted on the housing at opposite sides of said blade-receiving receptacle, each terminal being stamped and formed of sheet metal material and including a contact section having a plurality of flexible spring fingers exposed within the receptacle for electrically engaging a terminal blade of a complementary mating connecting device inserted into the receptacle generally parallel to a printed circuit board, a plate-like mounting section exposed exteriorly of the housing below the bottom wall thereof for flush
10 mounting the connector on a surface of the printed circuit board, and a flex section formed as a right-angled bend in the conductive terminal between the plate-like mounting section and the contact section and performing a dual function of (a) spacing the bottom wall of the housing above the printed circuit board and (b) providing a yielding flexibility between the connector and the board.

15. The electrical connector of claim 14 wherein the contact section of said conductive terminal is generally U-shaped in a cross-section generally parallel to the printed circuit board, to define a pair of legs joined by a bight portion, one leg being connected to the mounting section of the terminal, and the other leg forming a contact portion of the terminal
5 which engages the terminal blade of the mating connecting device.

16. The electrical connector of claim 15 wherein said one leg of the U-shaped contact section is a plate-like member in abutment with the housing, and the other leg of the U-shaped contact section forms a contact arm with portions free to flex toward and away from the one leg.

17. The electrical connector of claim 14, including latch means on said other leg for latching the conductive terminal to the housing.

18. The electrical connector of claim 14 wherein said blade-receiving receptacle is a through passage in the housing extending generally parallel to the printed circuit board for receiving a terminal blade of a mating connecting device in either opposite direction of the through passage.

19. The electrical connector of claim 14 wherein the bottom wall of said housing is recessed in an area immediately above the mounting section of the conductive terminal.

20. The electrical connector of claim 14 wherein said housing has at least one anti-overstress wing projecting outwardly therefrom above the printed circuit board to prevent over-flexing of the conductive terminals.

21. A side-entry electrical connector for mounting on a subjacent support structure, comprising:

a dielectric housing having a bottom wall and a terminal-receiving receptacle at a side of the housing; and

5 at least one conductive terminal mounted on the housing and including a contact section exposed within the receptacle for electrically engaging a terminal of a complementary mating connecting device inserted into the side receptacle generally parallel to the subjacent structure, a mounting section exposed exteriorly of the housing below the bottom wall thereof for mounting the connector on the subjacent structure, and a flex section joining the mounting section to the
10 contact section and performing a dual function of (a) supporting the bottom wall of the housing spaced above the subjacent structure and (b) providing a yielding flexibility between the connector and the subjacent structure.

22. The electrical connector of claim 21 wherein the mounting section of the conductive terminal is a plate-like member.

23. The electrical connector of claim 21 wherein said conductive terminal is stamped and formed of sheet metal material.

24. The electrical connector of claim 23 wherein the flex section of said conductive terminal comprises a generally right-angled bend in the terminal between the mounting section and the contact section.

25. The electrical connector of claim 21 wherein the bottom wall of said housing is recessed in an area immediately above the mounting section of the conductive terminal.

26. The electrical connector of claim 21 wherein said housing has at least one anti-overstress wing projecting outwardly therefrom above the printed circuit board to prevent over-flexing of the conductive terminals.

27. The electrical connector of claim 21, including a pair of said conductive terminals at opposite sides of the blade-receiving receptacle.

AMENDED CLAIMS

[received by the International Bureau on 27 July 2005 (27.07.05);
original claims 1-27 replaced by new claims 1-27 (5 pages)]

1. A side-entry board mounted blade-receiving electrical connector (14, 14A), comprising:

a dielectric housing (16) having a bottom wall (16b) and a blade-receiving receptacle (18) at a side of the housing; and

at least one conductive terminal (24) mounted on the housing and including a contact section (26) exposed within the receptacle (18) for electrically engaging a terminal blade (60) of a complementary mating connecting device inserted into the receptacle generally parallel to a printed circuit board (22), a mounting section (28) exposed exteriorly of the housing below the bottom wall thereof for mounting the connector on the printed circuit board, and a flex section (30) joining the mounting section to the contact section and performing a dual function of (a) spacing the bottom wall (16b) of the housing (16) spaced above the printed circuit board (22) and (b) providing a yielding flexibility between the connector and the board.
2. The electrical connector of claim 1 wherein the mounting section (28) of said conductive terminal (24) is a plate-like member for flush mounting on a surface (22a) of the printed circuit board (22).
3. The electrical connector of claim 1 wherein said conductive terminal (24) is stamped and formed of sheet metal material.
4. The electrical connector of claim 3 wherein the flex section (30) of said conductive terminal (24) comprises a generally right-angled bend in the terminal between the mounting section (28) and the contact section (26).
5. The electrical connector of claim 1 wherein the contact section (26) of said conductive terminal is generally U-shaped in a cross-section generally parallel to the printed circuit board, to define a pair of legs (64,66) joined by a bight portion (68), one leg (64) being connected to the mounting section (28) of the terminal, and the other leg (66) forming a contact portion (26) of the terminal which engages the

terminal blade (60) of the mating connecting device.

6. The electrical connector of claim 5 wherein said one leg (64) of the U-shaped contact section is a plate-like member in abutment with the housing, and the other leg (66) of the U-shaped contact section forms a contact arm (26) with portions (32) free to flex toward and away from the one leg.

7. The electrical connector of claim 6 wherein said contact arm (26) has a plurality of flexible spring fingers (32) for engaging the terminal blade (60) of the mating connecting device.

8. The electrical connector of claim 5, including latch means (38) on said other leg (66) for latching the conductive terminal (24) to the housing (16).

9. The electrical connector of claim 1 wherein said blade-receiving receptacle is a through passage (18) in the housing (16) extending generally parallel to the printed circuit board (22) for receiving a terminal blade (60) of a mating connecting device in either opposite direction of the through passage.

10. The electrical connector of claim 1 wherein the bottom wall (16b) of said housing (16) is recessed in an area (62) immediately above the mounting section (28) of the conductive terminal (24).

11. The electrical connector of claim 1 wherein said housing (16) has at least one anti-overstress wing (16d) projecting outwardly therefrom above the printed circuit board (22) to prevent over-flexing of the conductive terminals.

12. The electrical connector of claim 1, including a pair of said conductive terminals (24) at opposite sides of the blade-receiving receptacle (18).

13. The electrical connector of claim 1 wherein said contact section (26) has a plurality of flexible spring fingers (32) for engaging the terminal blade (60) of the

mating connecting device.

14. A side-entry board mounted blade-receiving electrical connector (14,14A), comprising:

a dielectric housing (16) having a bottom wall (16b) and a blade-receiving receptacle (18) at a side of the housing; and

a pair of conductive terminals (24) mounted on the housing at opposite sides of said blade-receiving receptacle, each terminal being stamped and formed of sheet metal material and including a contact section (26) having a plurality of flexible spring fingers (32) exposed within the receptacle for electrically engaging a terminal blade (60) of a complementary mating connecting device inserted into the receptacle generally parallel to a printed circuit board (22), a plate-like mounting section (28) exposed exteriorly of the housing below the bottom wall thereof for flush mounting the connector on a surface (22a) of the printed circuit board, and a flex section (30) formed as a right-angled bend in the conductive terminal between the plate-like mounting section (28) and the contact section (26) and performing a dual function of (a) spacing the bottom wall (16b) of the housing (16) above the printed circuit board (22) and (b) providing a yielding flexibility between the connector and the board.

15. The electrical connector of claim 14 wherein the contact section (26) of said conductive terminal is generally V-shaped in a cross-section generally parallel to the printed circuit board, to define a pair of legs (64,66) joined by a bight portion (68), one leg (64) being connected to the mounting section (28) of the terminal, and the other leg (66) forming a contact portion (26) of the terminal which engages the terminal blade (60) of the mating connecting device.

16. The electrical connector of claim 15 wherein said one leg (64) of the Ushaped contact section is a plate-like member in abutment with the housing, and the other leg (66) of the U-shaped contact section forms a contact arm (26) with

portions (32) free to flex toward and away from the one leg.

17. The electrical connector of claim 14, including latch means (38) on said other leg (66) for latching the conductive terminal (24) to the housing (16).

18. The electrical connector of claim 14 wherein said blade-receiving receptacle is a through passage (18) in the housing (16) extending generally parallel to the printed circuit board (22) for receiving a terminal blade (60) of a mating connecting device in either opposite direction of the through passage.

19. The electrical connector of claim 14 wherein the bottom wall (16b) of said housing (16) is recessed in an area (62) immediately above the mounting section (28) of the conductive terminal (24).

20. The electrical connector of claim 14 wherein said housing (16) has at least one anti-overstress wing (16d) projecting outwardly therefrom above the printed circuit board (22) to prevent over-flexing of the conductive terminals.

21. A side-entry electrical connector (14,14A) for mounting on a subjacent support structure, comprising:

a dielectric housing (16) having a bottom wall (16b) and a terminal-receiving receptacle (18) at a side of the housing; and

at least one conductive terminal (24) mounted on the housing and including a contact section (26) exposed within the receptacle for electrically engaging a terminal (60) of a complementary mating connecting device inserted into the side receptacle generally parallel to the subjacent structure, a mounting section (28) exposed exteriorly of the housing below the bottom wall thereof for mounting the connector on the subjacent structure, and a flex section (30) joining the mounting section (28) to the contact section (26) and performing a dual function of (a) supporting the bottom wall of the housing (16) spaced above the subjacent structure

and (b) providing a yielding flexibility between the connector and the subjacent structure.

22. The electrical connector of claim 21 wherein the mounting section (28) of the conductive terminal (24) is a plate-like member.

23. The electrical connector of claim 21 wherein said conductive terminal (24) is stamped and formed of sheet metal material.

24. The electrical connector of claim 23 wherein the flex section (30) of said conductive terminal (24) comprises a generally right-angled bend in the terminal between the mounting section (28) and the contact section (26).

25. The electrical connector of claim 21 wherein the bottom wall (16b) of said housing (16) is recessed in an area (62) immediately above the mounting section (28) of the conductive terminal (24).

26. The electrical connector of claim 21 wherein said housing (16) has at least one anti-overstress wing (16d) projecting outwardly therefrom above the printed circuit board (22) to prevent over-flexing of the conductive terminals.

27. The electrical connector of claim 21, including a pair of said conductive terminals (24) at opposite sides of the blade-receiving receptacle (18).

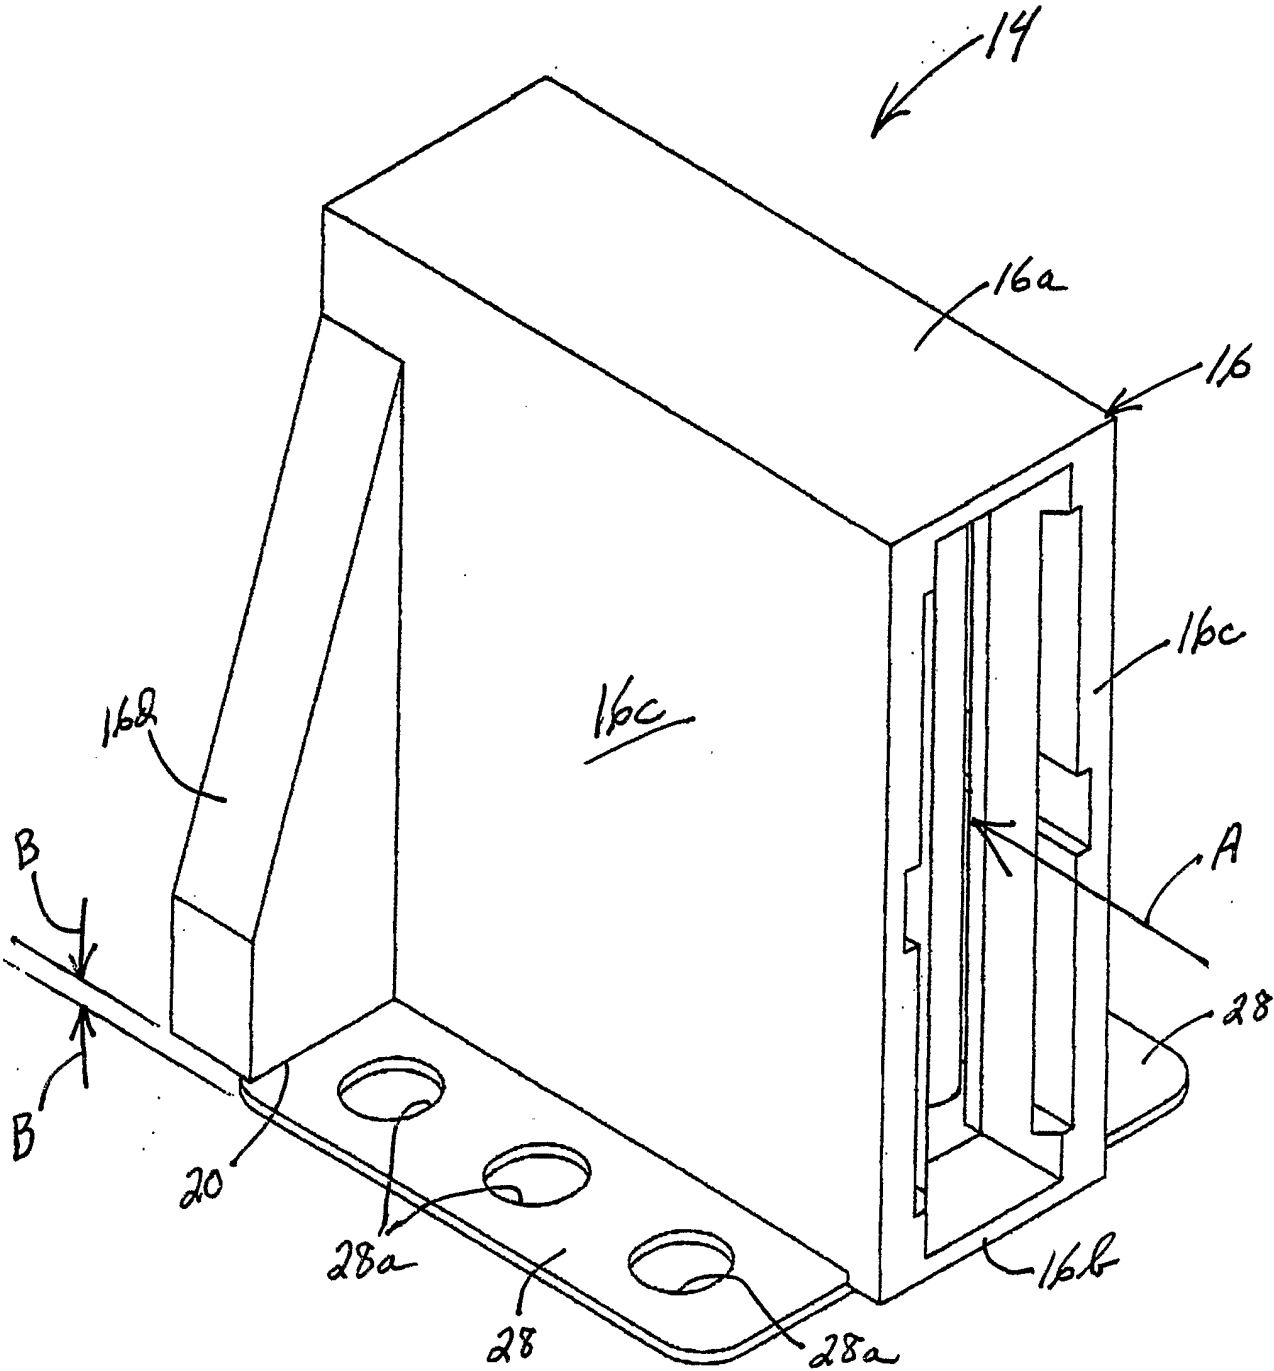


FIG. 1

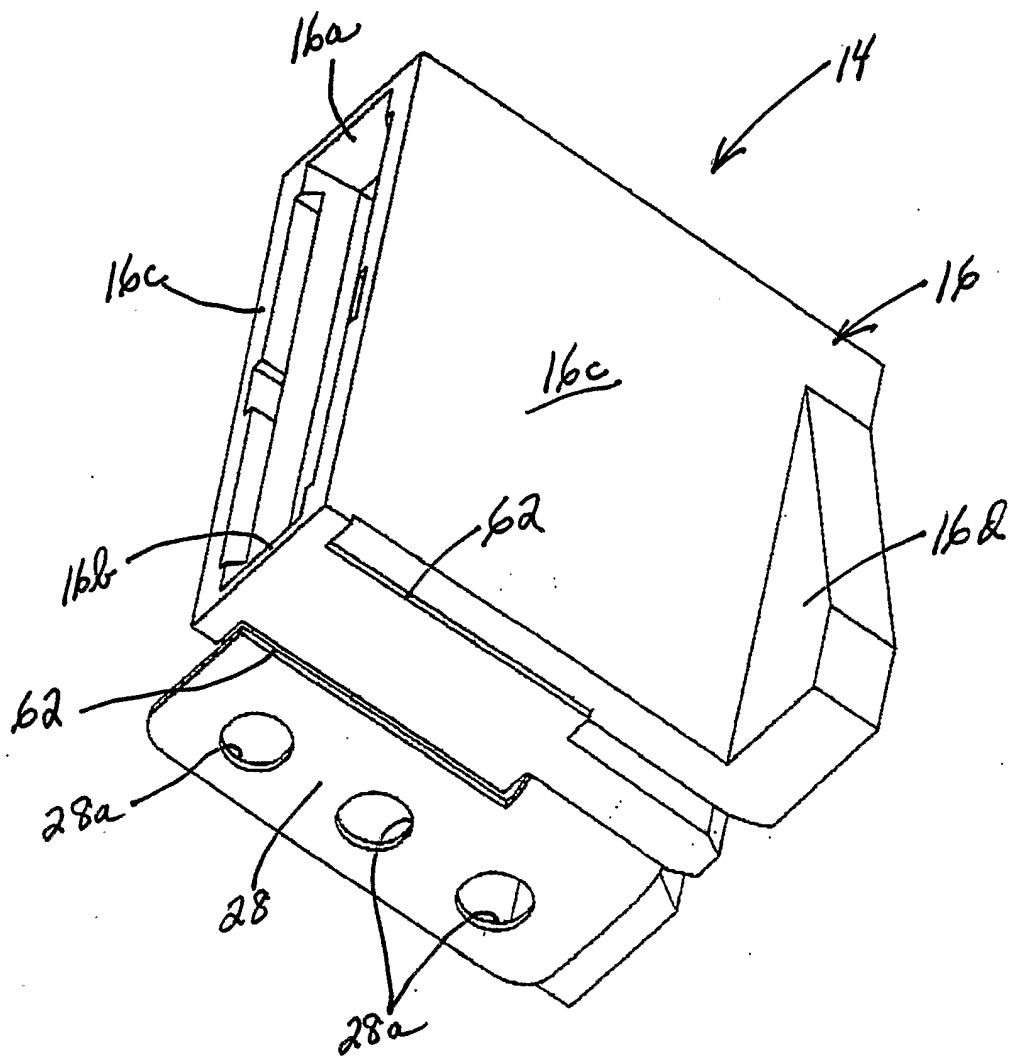
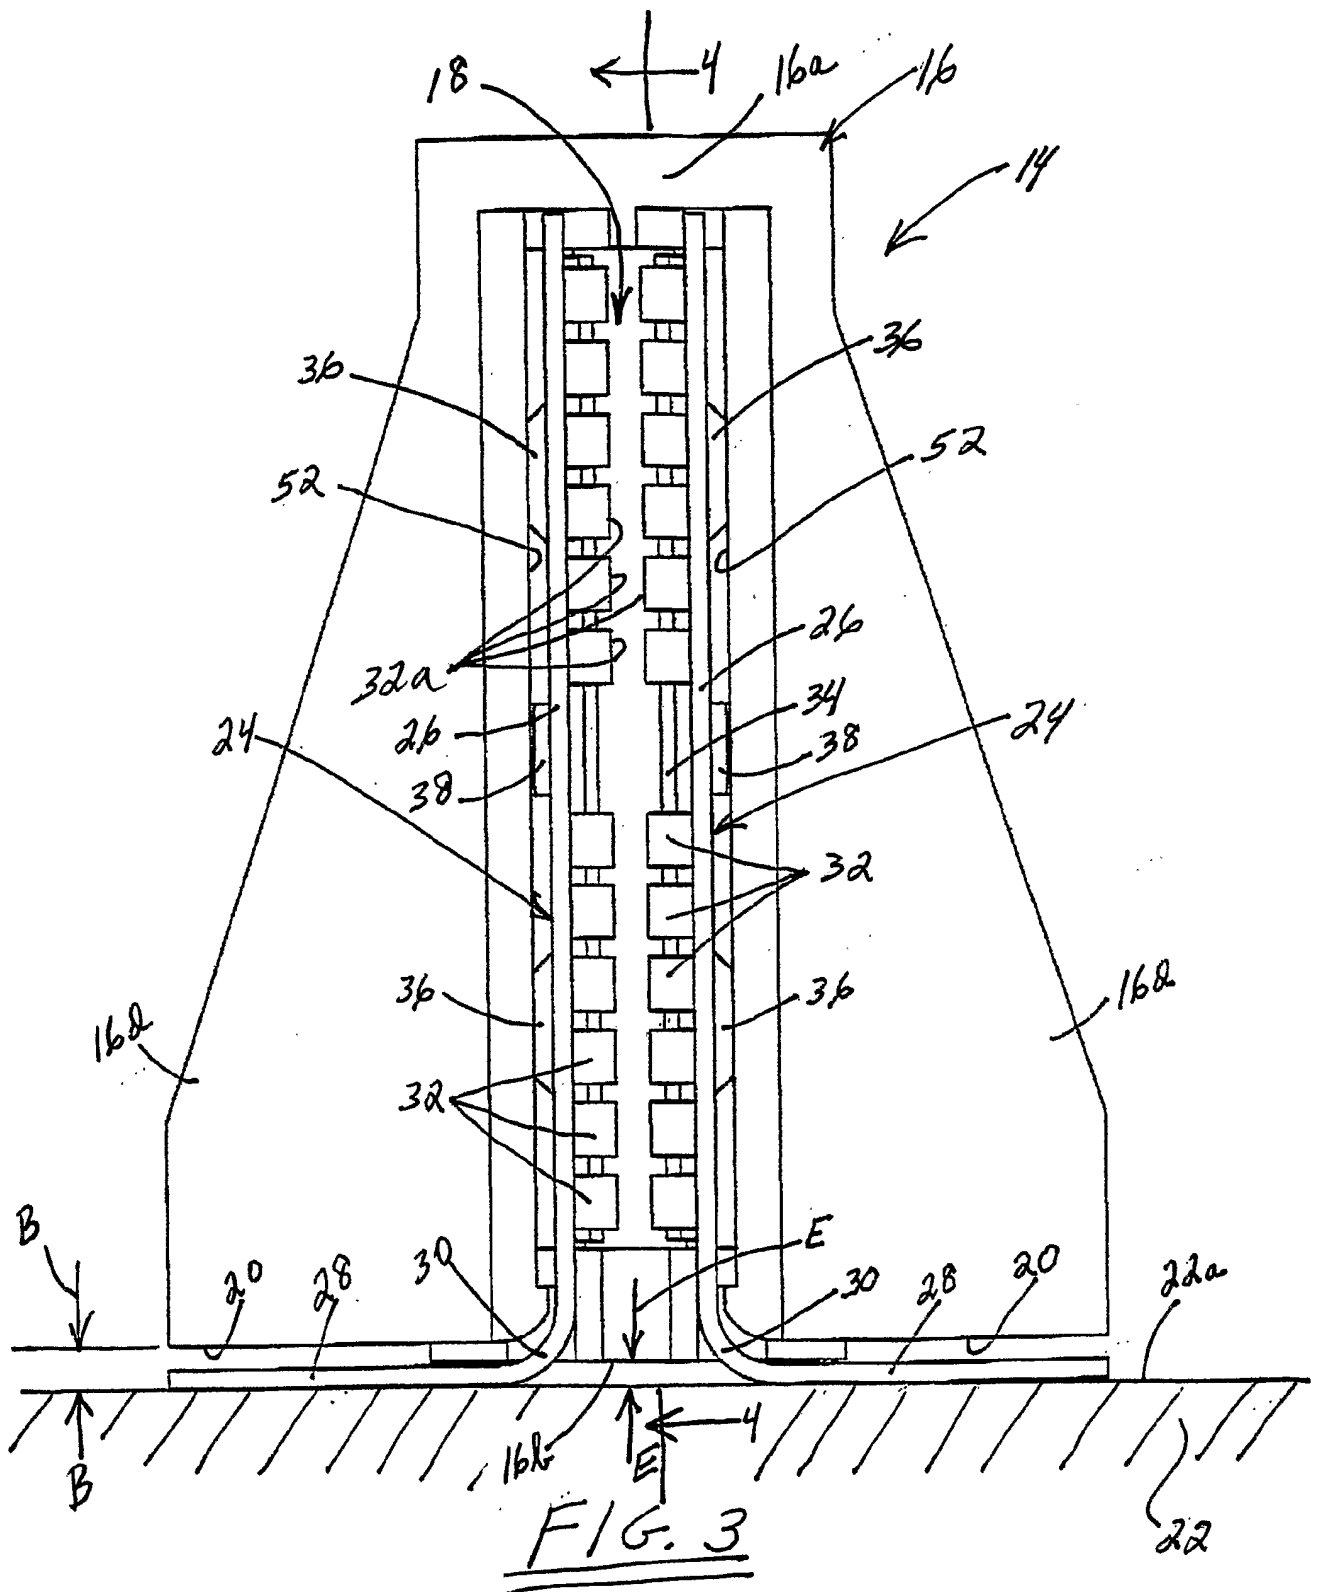


FIG. 2



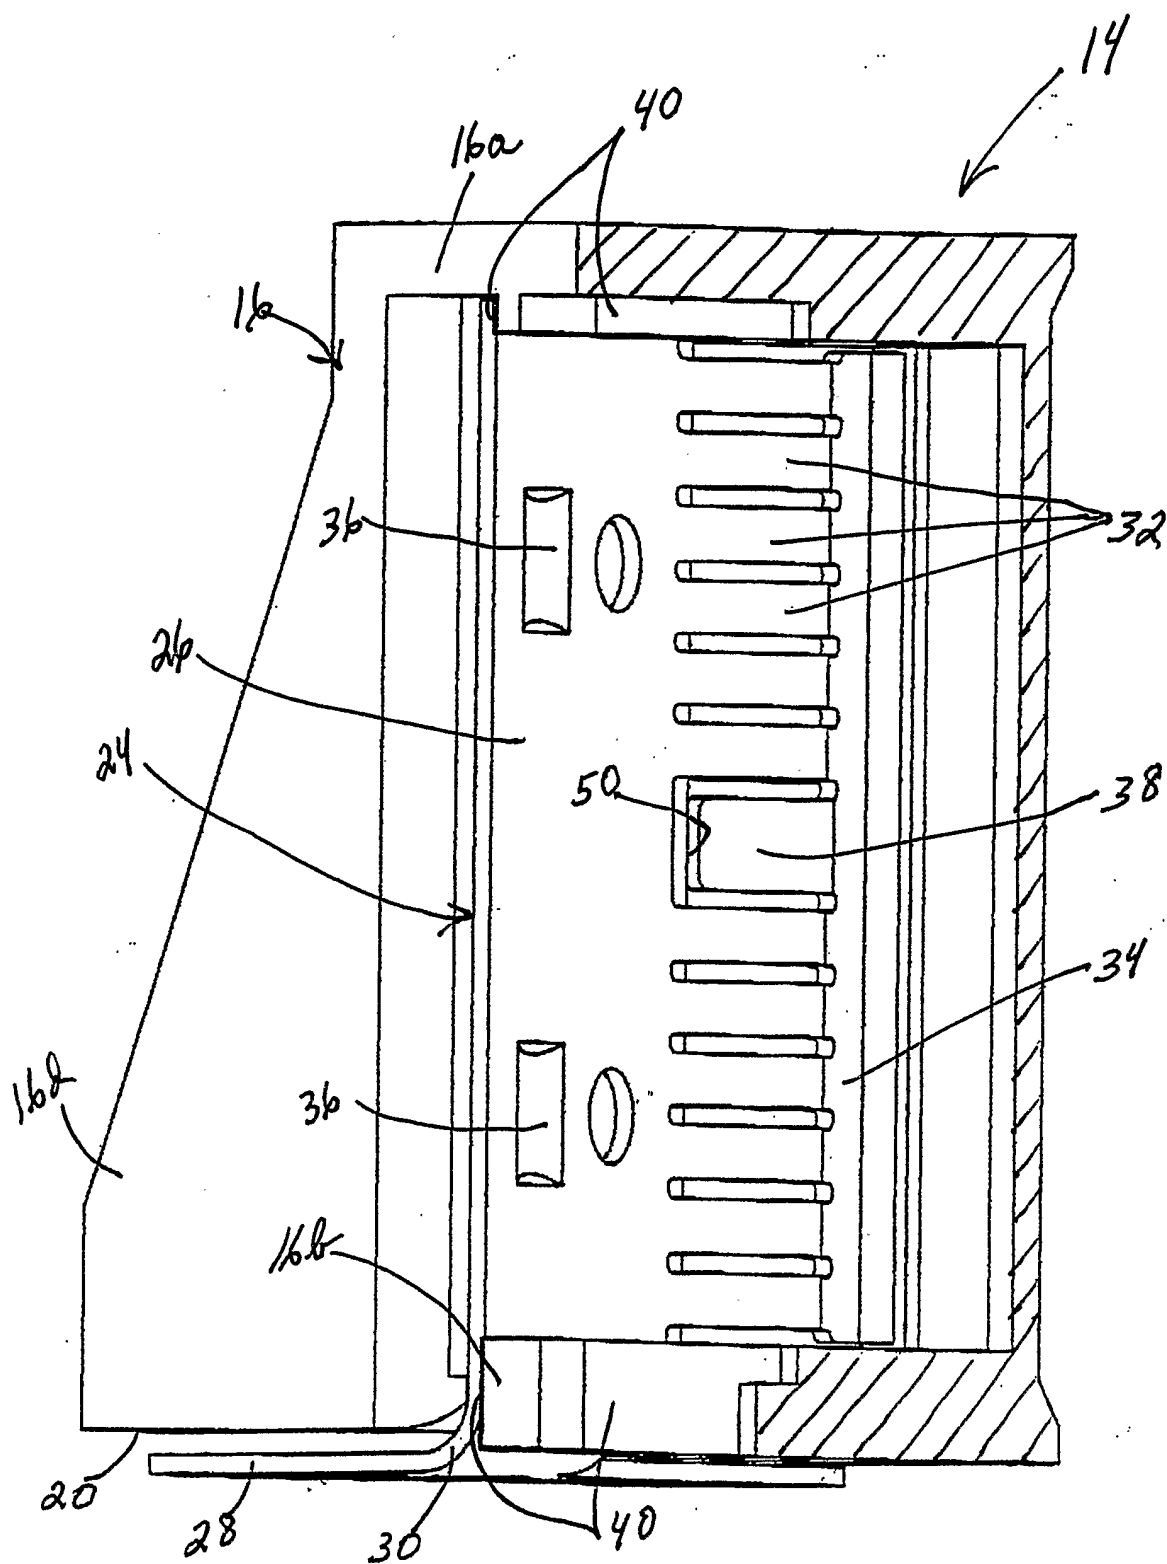


FIG. 4

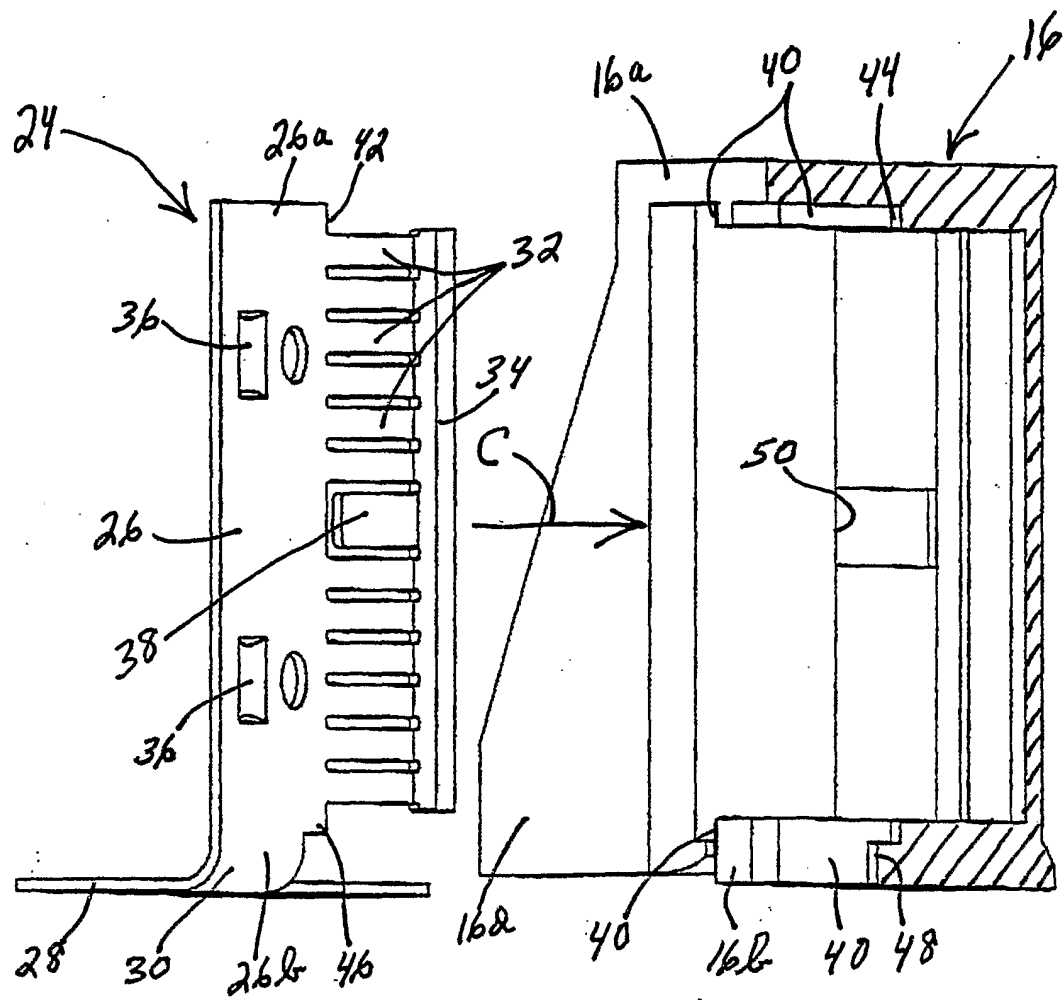


FIG. 5

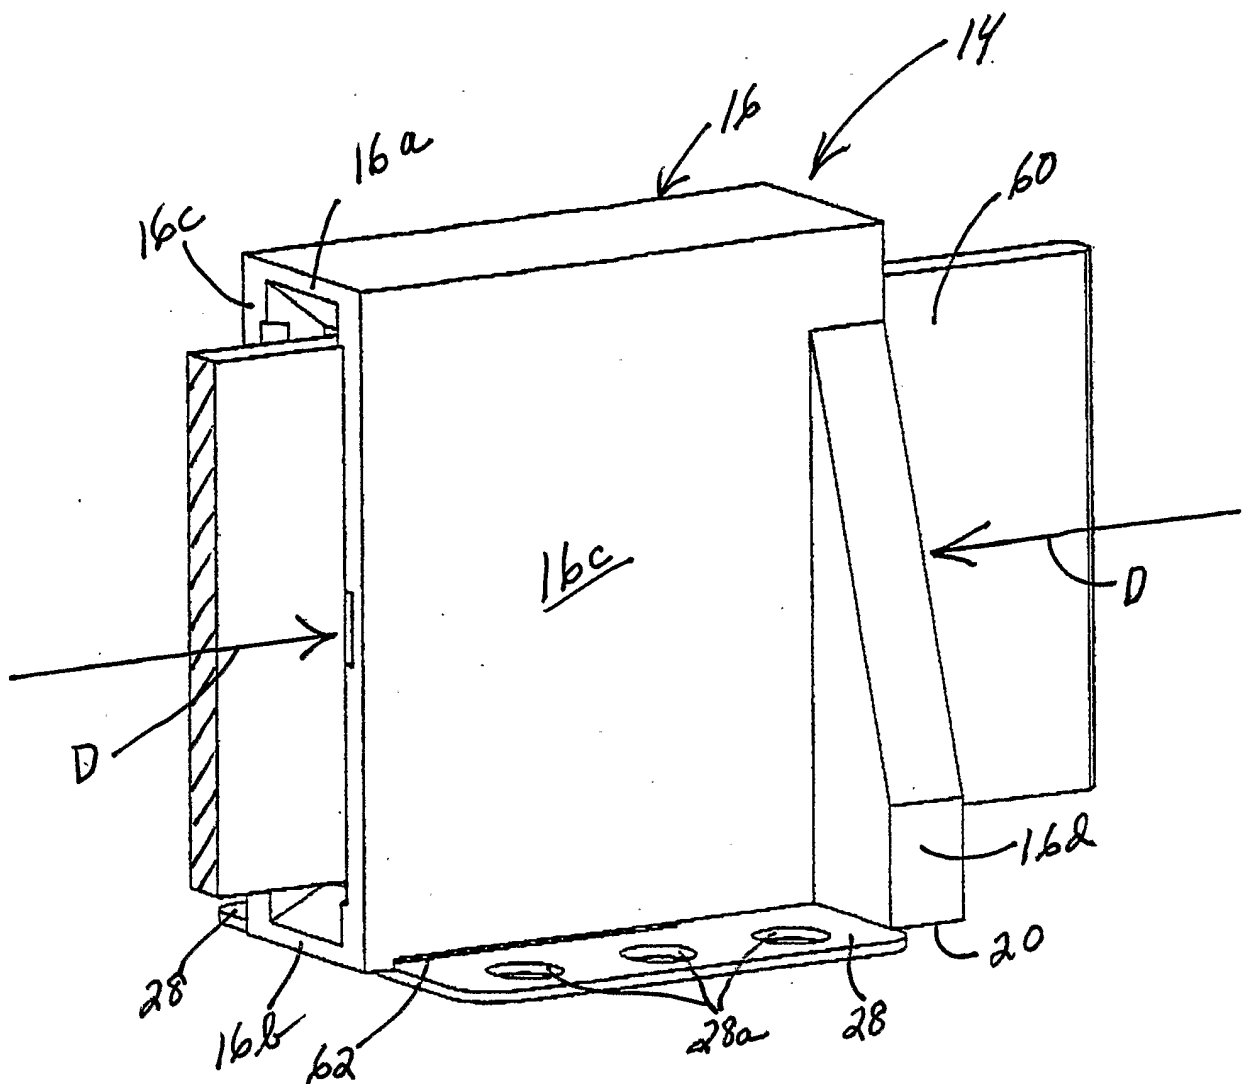


FIG. 6

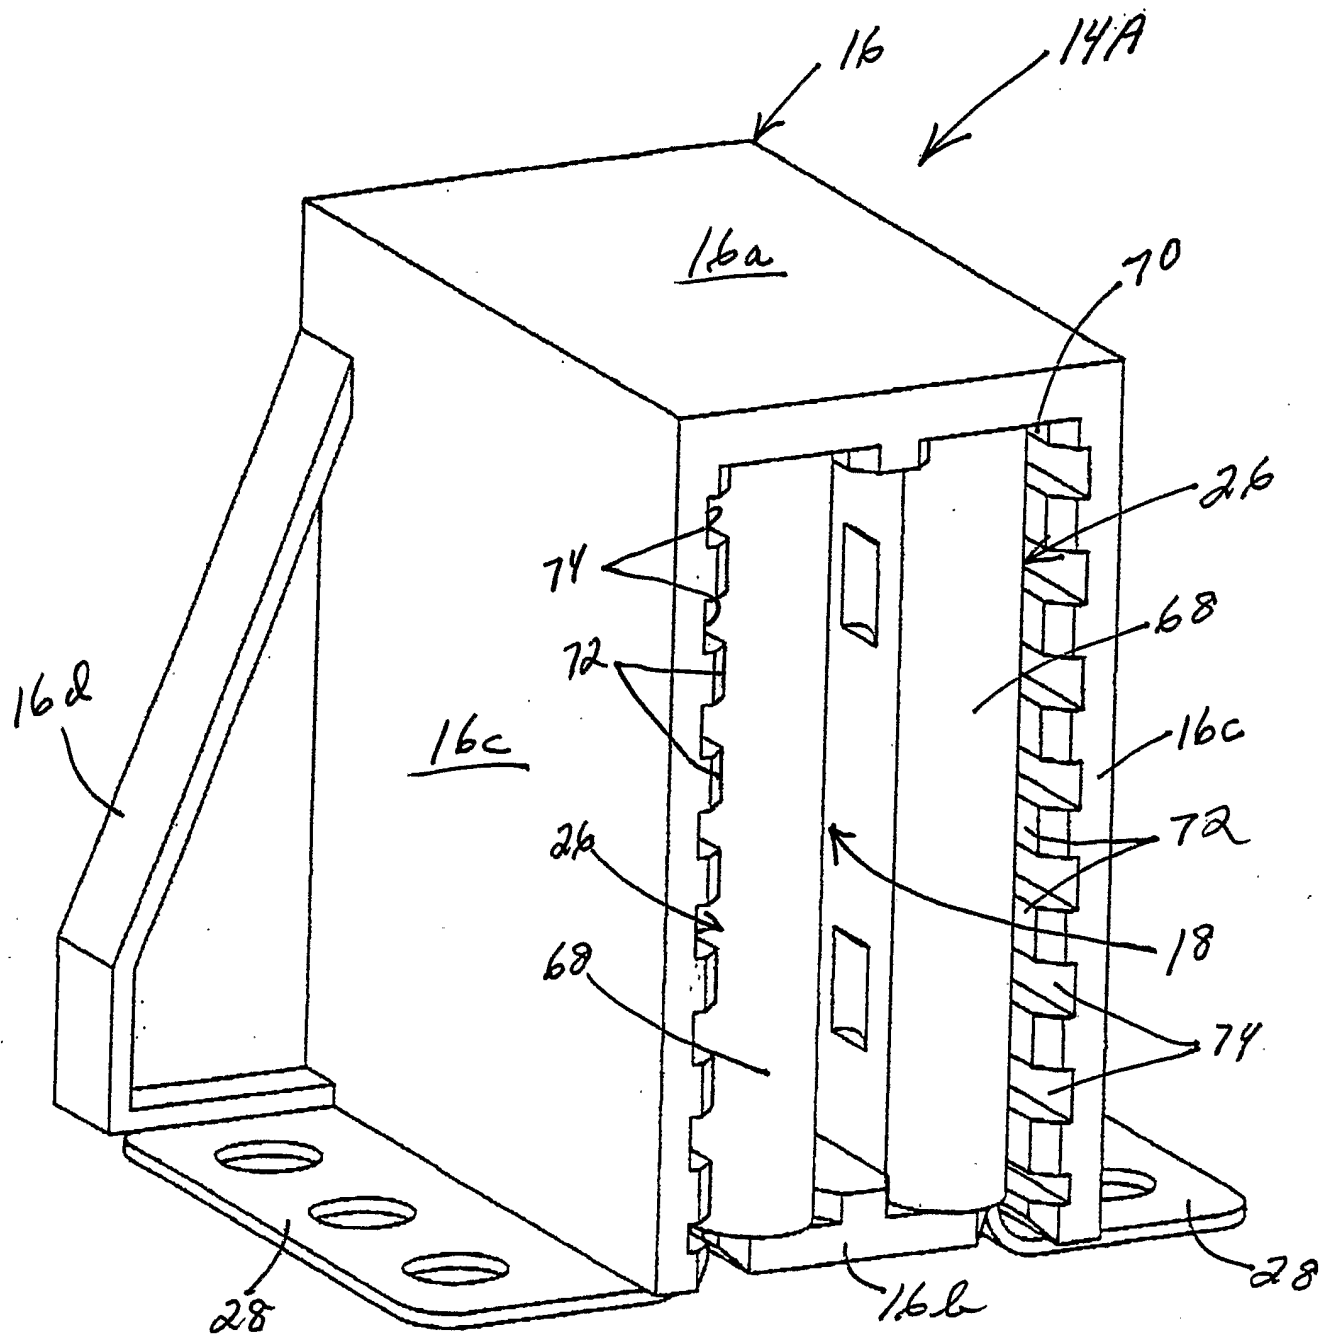


FIG. 7

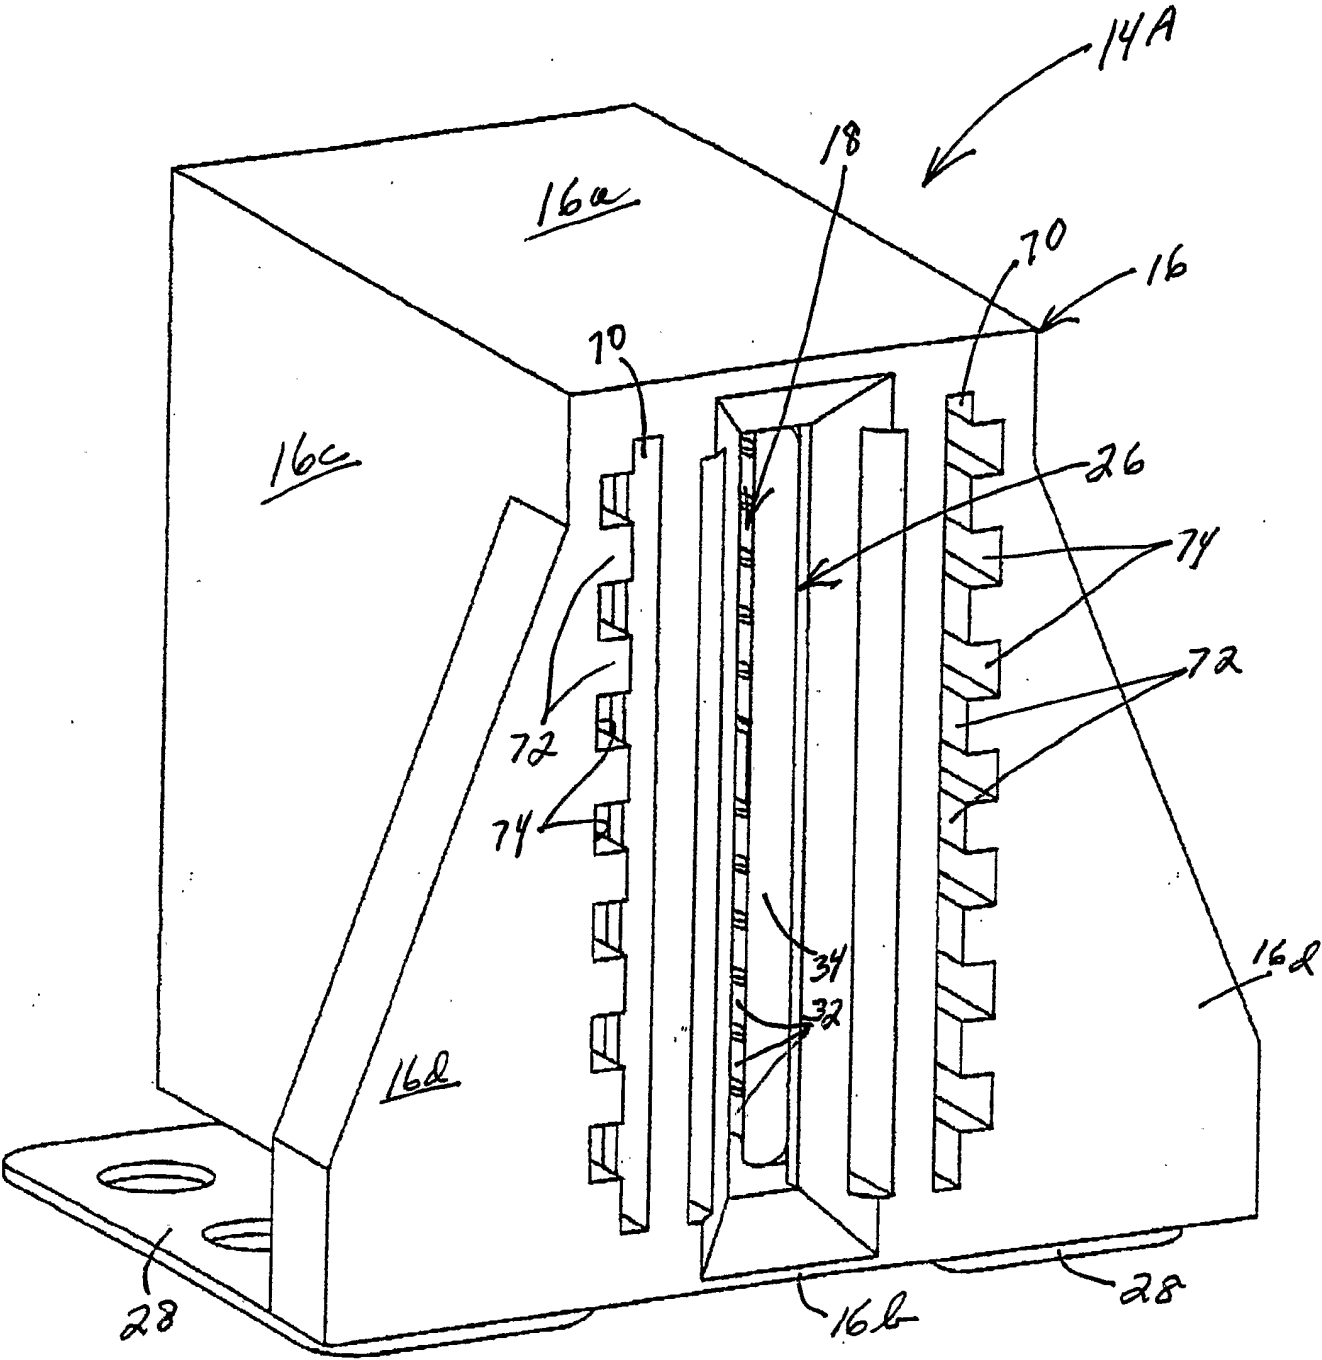


FIG. 8

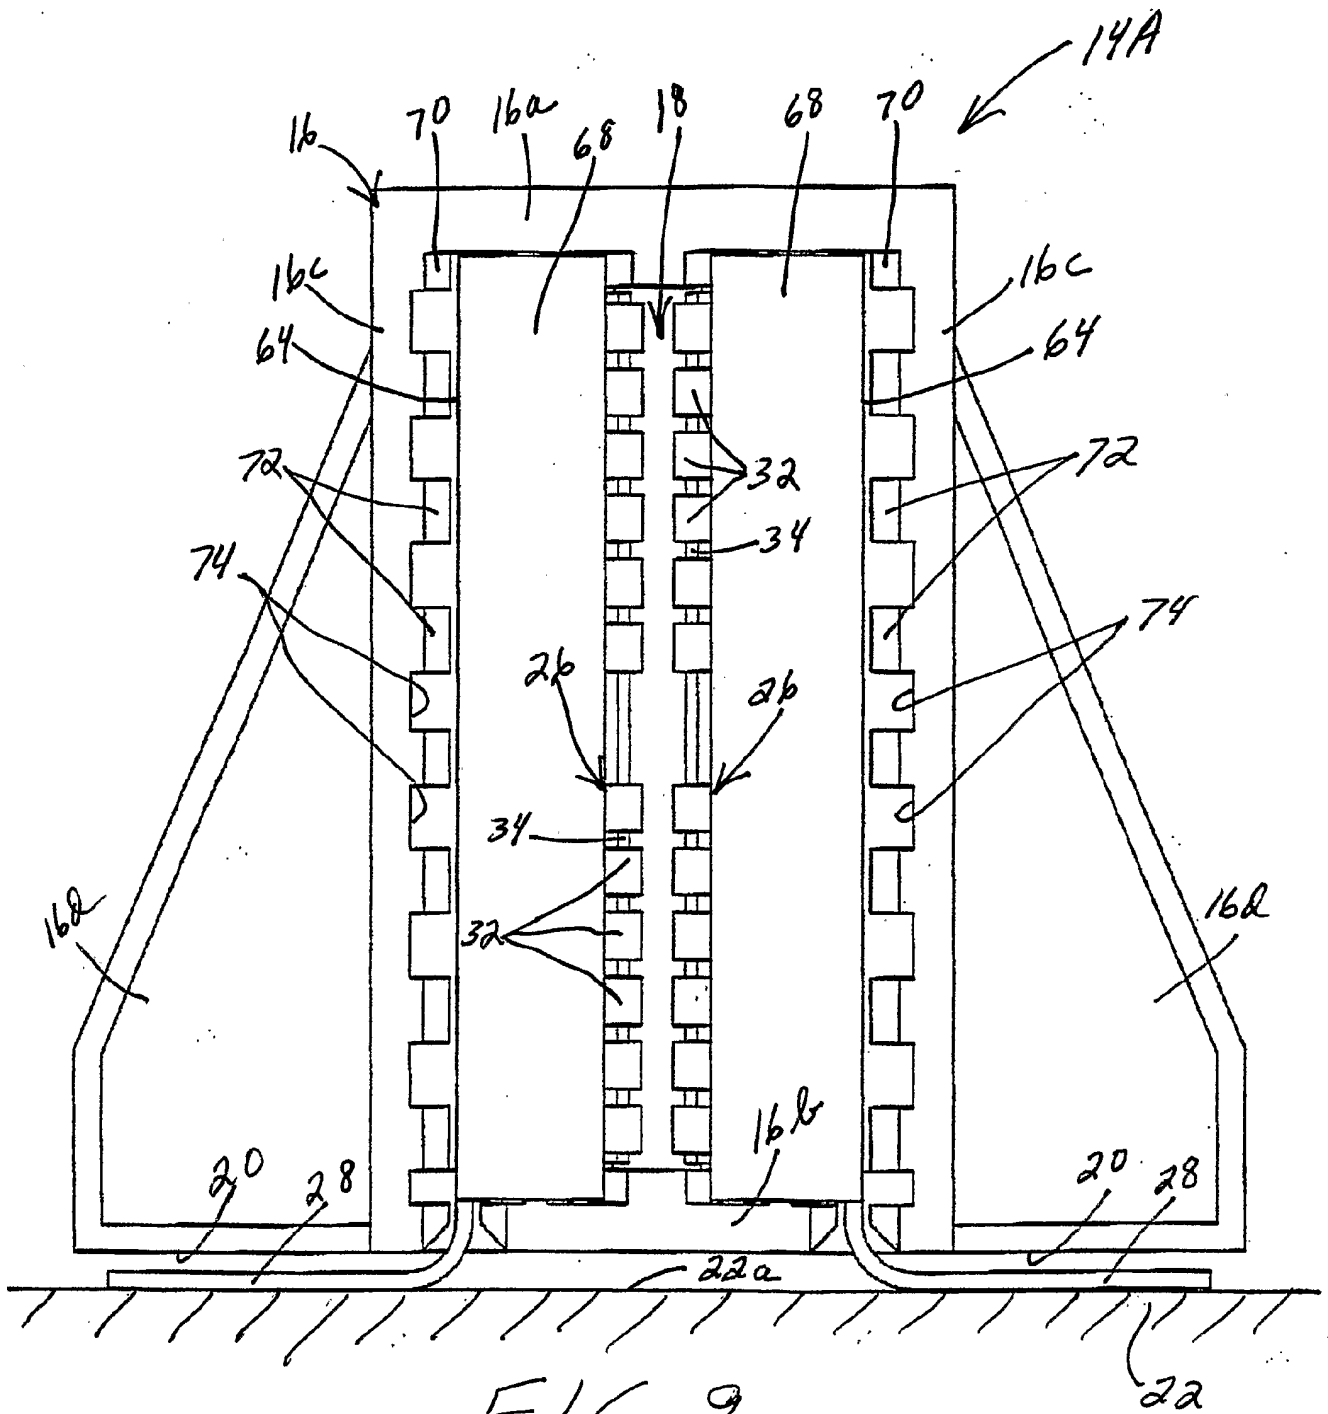


FIG. 9

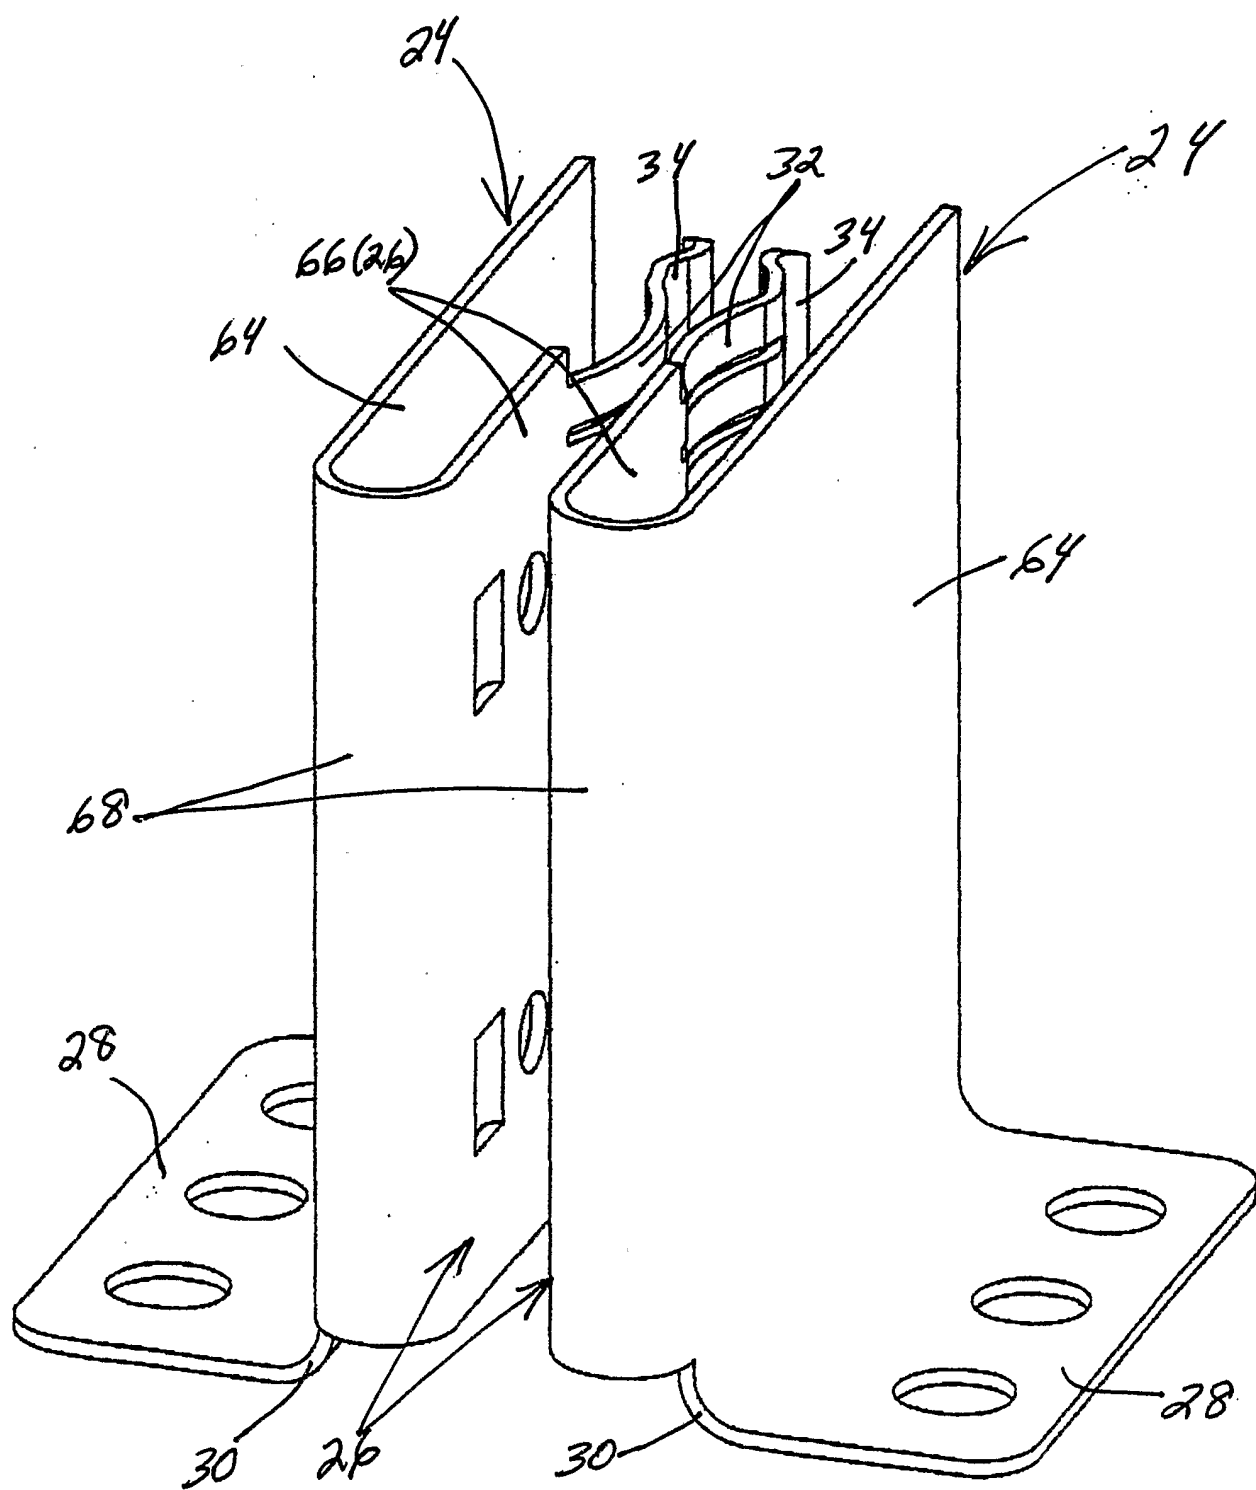


FIG. 10

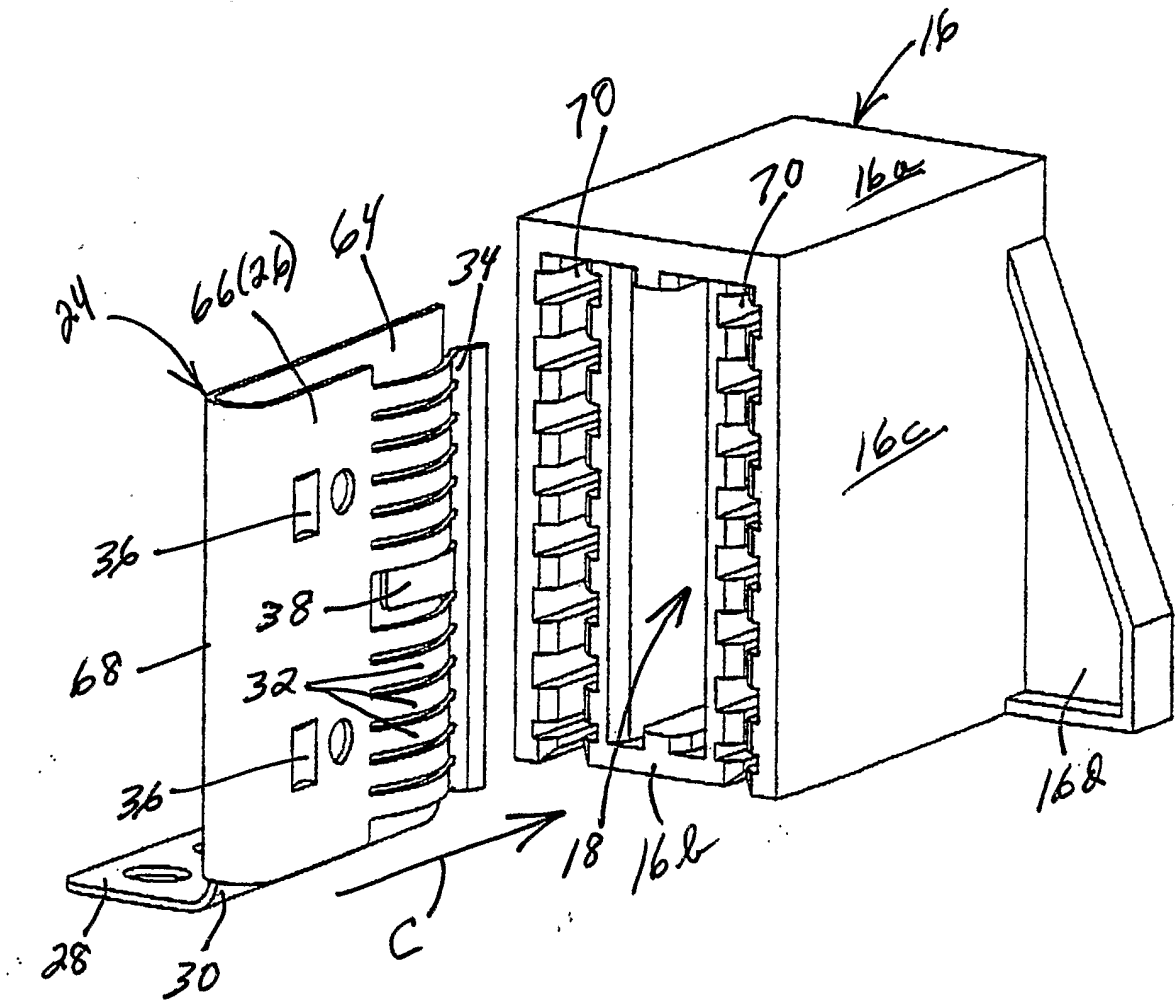


FIG. 11

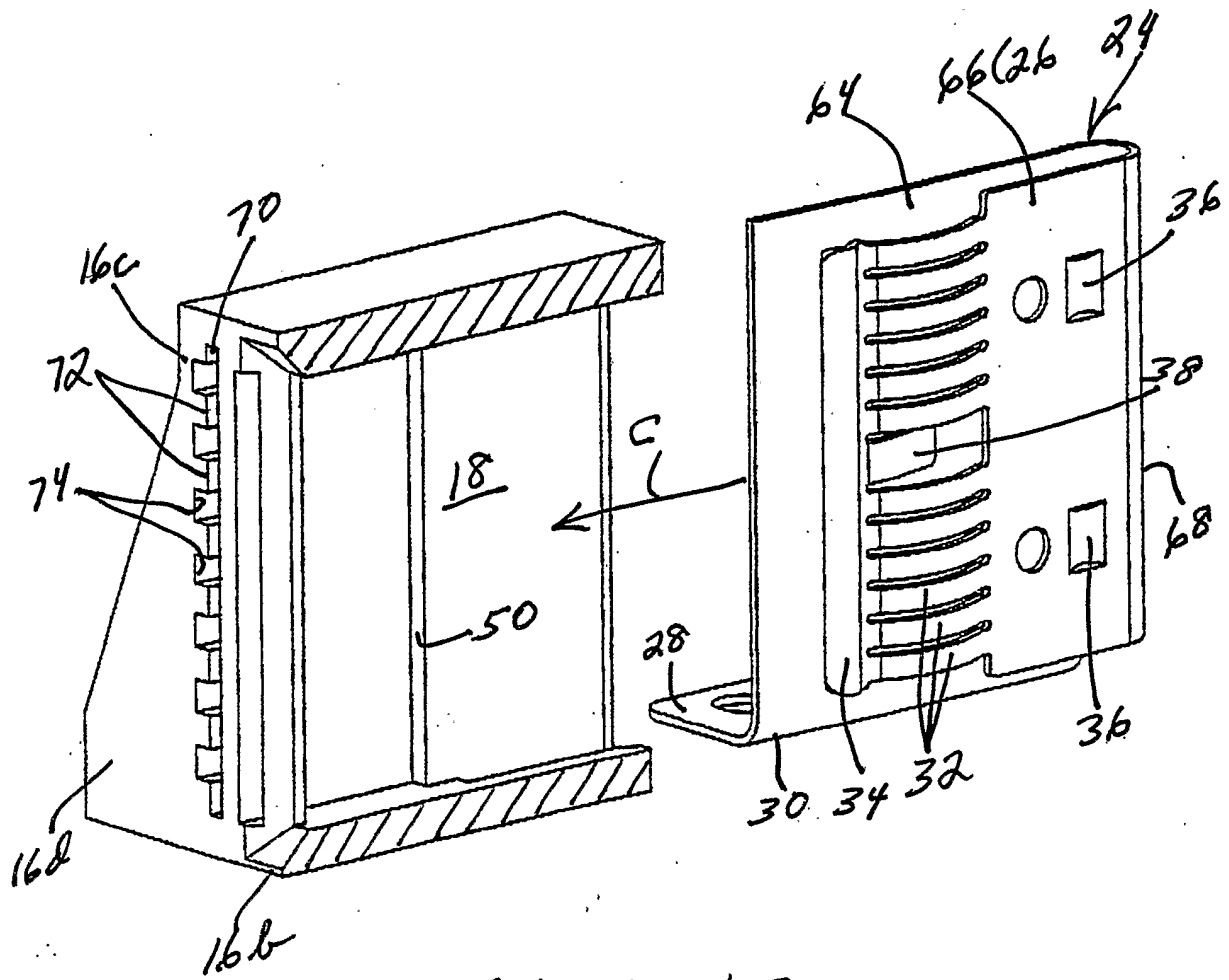


FIG. 12

INTERNATIONAL SEARCH REPORT

Application No
PCT/US2005/009361

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H01R12/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H01R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 394 818 B1 (SMALLEY, JR. JARED JOSEPH) 28 May 2002 (2002-05-28) figure 2	1,3,7, 12-14, 22,23,27
A	US 2002/193019 A1 (BLANCHFIELD MICHAEL ALLEN ET AL) 19 December 2002 (2002-12-19) figures 1,2	1,3,7,8, 12-14, 17,22, 23,27
A	US 2001/039154 A1 (PIERINI JOHN M ET AL) 8 November 2001 (2001-11-08) figures 17-26	1,3,7, 12-14, 22,23,27
	----- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

30 June 2005

Date of mailing of the international search report

14/07/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Garcia Congosto, M

INTERNATIONAL SEARCH REPORT

Application No
PCT/US2005/009361

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 915 979 A (SCHELL ET AL) 29 June 1999 (1999-06-29) column 3, line 60 - column 4, line 1 column 4, line 40 - line 53 column 5, line 30 - line 39 column 6, line 5 - line 26 figures 2,3	1,14,21
A	US 6 095 827 A (DUTKOWSKY ET AL) 1 August 2000 (2000-08-01) figures 12,13	1,14,21
A	US 5 618 187 A (GOTO ET AL) 8 April 1997 (1997-04-08) figure 1	2,22
A	US 5 431 576 A (MATTHEWS ET AL) 11 July 1995 (1995-07-11) figure 4	11,20,26
A	FR 2 766 630 A (PRONER COMATEL) 29 January 1999 (1999-01-29) figure 5	9,18

INTERNATIONAL SEARCH REPORT

on patent family members

Application No

PCT/US2005/009361

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6394818	B1	28-05-2002	CN 2508422 Y TW 499063 Y US 2002156848 A1	28-08-2002 11-08-2002 24-10-2002
US 2002193019	A1	19-12-2002	CN 1533624 A EP 1413012 A2 WO 02103847 A2	29-09-2004 28-04-2004 27-12-2002
US 2001039154	A1	08-11-2001	US 6299492 B1	09-10-2001
US 5915979	A	29-06-1999	EP 0865675 A1 JP 11514131 T WO 9715966 A1	23-09-1998 30-11-1999 01-05-1997
US 6095827	A	01-08-2000	EP 0865675 A1 JP 11514131 T	23-09-1998 30-11-1999
US 5618187	A	08-04-1997	CA 2161378 A1	18-05-1996
US 5431576	A	11-07-1995	AU 2950695 A WO 9602961 A1	16-02-1996 01-02-1996
FR 2766630	A	29-01-1999	FR 2766630 A1	29-01-1999