



(22) Date de dépôt/Filing Date: 2008/12/23

(41) Mise à la disp. pub./Open to Public Insp.: 2009/03/11

(30) Priorités/Priorities: 2008/04/04 (US61/042,511);
2008/11/07 (US12/266,828)

(51) Cl.Int./Int.Cl. *G11C 17/08* (2006.01),
H01L 21/77 (2006.01)


(71) Demandeur/Applicant:
SIDENSE CORP., CA

(72) Inventeur/Inventor:
KURJANOWICZ, WLODEK, CA

(74) Agent: BORDEN LADNER GERVAIS LLP

(54) Titre : DISPOSITIF ANTIFUSION BASSE TENSION

(54) Title: LOW VT ANTIFUSE DEVICE

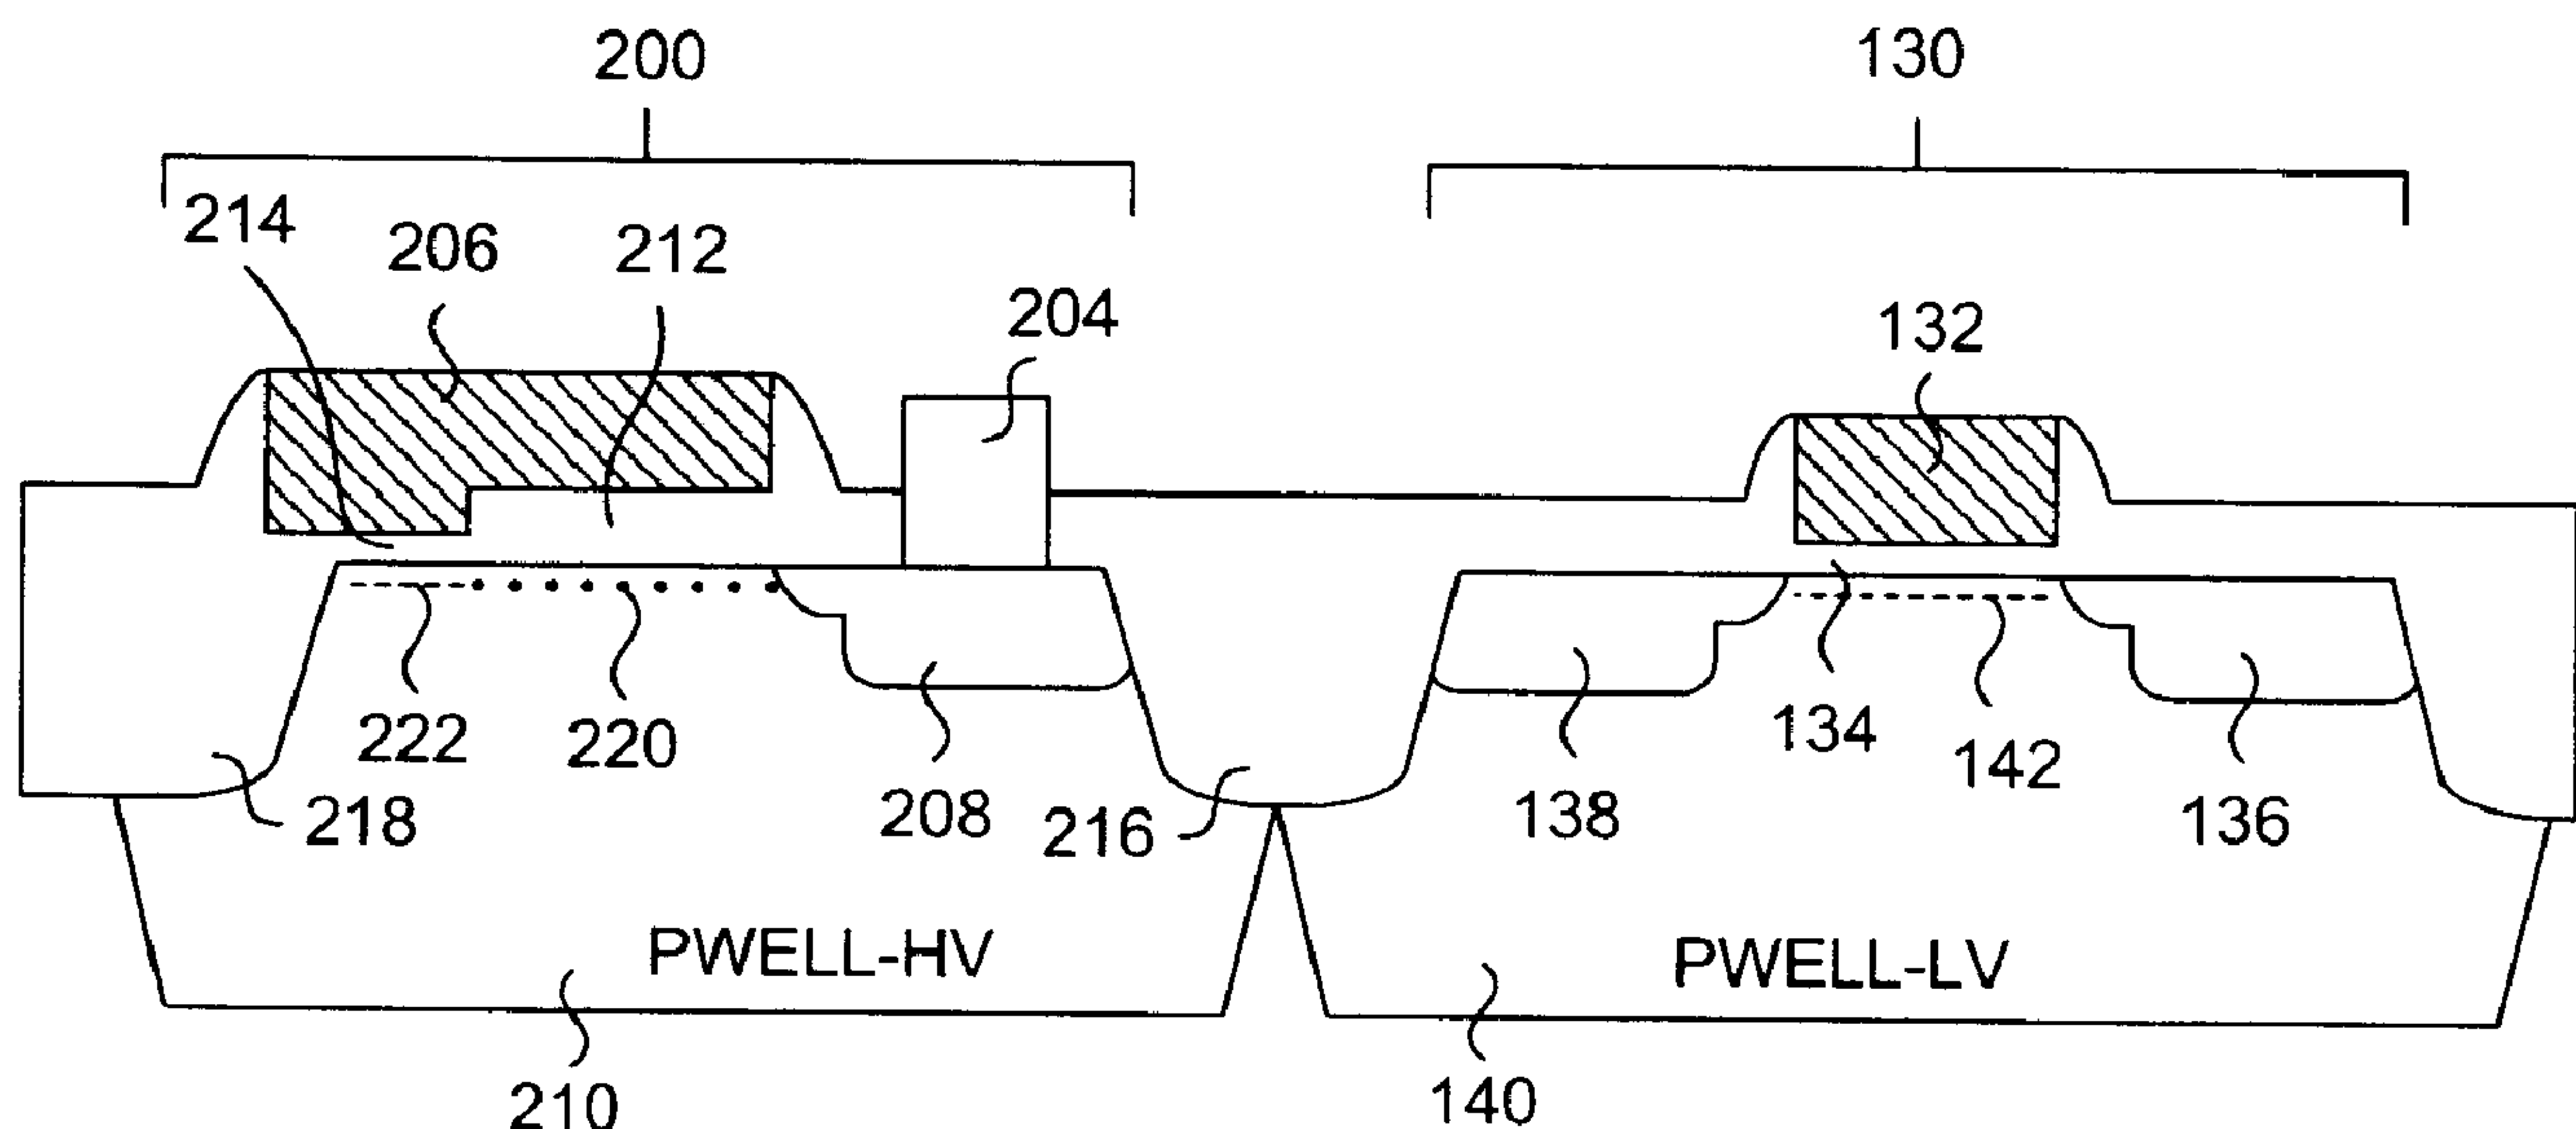

(57) **Abrégé/Abstract:**

A one time programmable memory cell having an anti-fuse device with a low threshold voltage independent of core circuit process manufacturing technology is presented. A two transistor memory cell having a pass transistor and an anti-fuse device, or a single transistor memory cell having a dual thickness gate oxide, are formed in a high voltage well that is formed for high voltage transistors. The threshold voltage of the anti-fuse device differs from the threshold voltages of any transistor in the core circuits of the memory device, but has a gate oxide thickness that is the same as a transistor in the core circuits. The pass transistor has a threshold voltage that differs from the threshold voltages of any transistor in the core circuits, and has a gate oxide thickness that differs from any transistor in the core circuits. The threshold voltage of the anti-fuse device is lowered by omitting some or all of the threshold adjustment implants that is used for high voltage transistors fabricated in the I/O circuits.

ABSTRACT

A one time programmable memory cell having an anti-fuse device with a low threshold voltage independent of core circuit process manufacturing technology is presented. A two transistor memory cell having a pass transistor and an anti-fuse device, or a single transistor memory cell having a dual thickness gate oxide, are formed in a high voltage well that is formed for high voltage transistors. The threshold voltage of the anti-fuse device differs from the threshold voltages of any transistor in the core circuits of the memory device, but has a gate oxide thickness that is the same as a transistor in the core circuits. The pass transistor has a threshold voltage that differs from the threshold voltages of any transistor in the core circuits, and has a gate oxide thickness that differs from any transistor in the core circuits. The threshold voltage of the anti-fuse device is lowered by omitting some or all of the threshold adjustment implants that is used for high voltage transistors fabricated in the I/O circuits.

LOW VT ANTIFUSE DEVICE**CROSS REFERENCE TO RELATED APPLICATIONS**

[0001] This application claims the benefit of priority of U.S. Provisional Patent Application No. 61/042,511 filed on April 4, 2008.

FIELD OF THE INVENTION

[0002] The present invention relates generally to non-volatile memory. More particularly, the present invention relates to anti-fuse devices.

BACKGROUND OF THE INVENTION

[0003] In the following description the term MOS is used to denote any FET or MIS transistor, half-transistor or capacitor structure. In order to simplify the description of the embodiments, references to gate oxides from this point forward should be understood to include dielectric materials, oxide, or a combination of oxide and dielectric materials.

[0004] Over the past 30 years, anti-fuse technology has attracted significant attention of many inventors, IC designers and manufacturers. An anti-fuse is a structure alterable to a conductive state, or in other words, an electronic device that changes state from not conducting to conducting. Equivalently, the binary states can be either one of high resistance and low resistance in response to electric stress, such as a programming voltage or current. Anti-fuse devices can be arranged into a memory array, thereby forming what is commonly known as a one-time-programmable (OTP) memory.

[0005] Current anti-fuse development is concentrated around 3-dimensional thin film structures and special inter-metal materials. Such anti-fuse technologies require additional processing steps not available in standard CMOS process, prohibiting anti-fuse applications in typical VLSI and ASIC designs, where programmability could help overcome problems with ever shrinking device life cycles and constantly rising chip development costs. Therefore there is an apparent need in the industry for a reliable anti-fuse structures utilizing standard CMOS process.

[0006] One type of anti-fuse memory cell manufacturable with a standard CMOS process is disclosed in U.S. Pat. No. 6,667,902 (Peng). Peng attempts to improve a classic planar DRAM-like anti-fuse array by introducing "row program lines" which connect to the capacitors and run parallel to the word lines. If decoded, the row program lines can minimize exposure of access transistors to a high programming voltage, which would otherwise occur through already programmed cells. Peng further improves his array in U.S. Pat. No. 6,671,040 by adding a variable voltage controlling programming current, which allegedly controls the degree of gate oxide breakdown, allowing for multilevel or analog storage applications.

[0007] Figure 1 is a circuit diagram of an anti-fuse memory cell disclosed in Peng, while Figures 2 and 3 show the planar and cross-sectional views respectively of the anti-fuse memory cell shown in Figure 1. The anti-fuse memory cell of Figure 1 includes a pass, or access transistor **10** for coupling a bitline BL to a bottom plate of anti-fuse device **12**. Anti-fuse device **12** is considered a gate dielectric breakdown based anti-fuse devices. A wordline WL is coupled to the gate of access transistor **10** to turn it on, and a cell plate voltage Vcp is coupled to the top plate of anti-fuse device **12** for programming anti-fuse device **12**.

[0008] It can be seen from Figures 2 and 3 that the layout of access transistor **10** and anti-fuse device **12** is very straight-forward and simple. The gate **14** of access transistor **10** and the top plate **16** of anti-fuse device **12** are constructed with the same layer of polysilicon, which extend across active area **18**. In the active area **18** underneath each polysilicon layer, is formed a thin gate oxide **20**, also known as a gate dielectric, for electrically isolating the polysilicon from the active area underneath. On either side of gate **14** are diffusion regions **22** and **24**, where diffusion region **24** is coupled to a bitline. Although not shown, those of skill in the art will understand that standard CMOS processing, such as sidewall spacer formation, lightly doped diffusions (LDD) and diffusion and gate silicidation, can be applied. While the classical single transistor and capacitor cell configuration is widely used, a transistor-only anti-fuse cell is further desirable due to the semiconductor array area savings that can be obtained for high-density applications. Such transistor-only anti-fuses should be reliable while simple to manufacture with a low cost CMOS process.

[0009] The gate dielectric breakdown based antifuse devices are gaining popularity as a preferred OTP or emulated multiple time programmable (MTP) non-volatile memory devices in the industry. Such antifuse devices used either in a memory array or as an

individual programmable cell consists of at least two regions. First is a high voltage breakdown region and second is a low voltage breakdown region (or anti-fuse region).

[0010] Figure 4 is a cross sectional diagram of an improved version of the anti-fuse memory cell shown in Figure 1. Just like the anti-fuse memory cell of Figure 1, Figure 4 shows a two-transistor anti-fuse memory cell **30**, which consists of an access transistor in series with an anti-fuse transistor. The access transistor includes a polysilicon gate **32** overlying a thick gate oxide **34**, which itself is formed over the channel **36**. On the left side of the channel **36** is a diffusion region **38** electrically connected to a bitline contact **40**. On the right side of the channel **36** is a common diffusion region **42** shared with the anti-fuse transistor. The anti-fuse transistor includes a polysilicon gate **44** overlying a thin gate oxide **46**, which itself is formed over the channel **48**. The thick gate oxide **34** can correspond to that used for high voltage transistors while the thin gate oxide **46** can correspond to that used for low voltage transistors. Polysilicon gates **32** and **44** can be independently controlled, or alternatively can be connected to each other. For example, polysilicon gate **32** can be coupled to a wordline while polysilicon gate **44** can be coupled to a controlled cell plate voltage (VCP). Both diffusion regions **38** and **42** can have LDD regions, which can be identically doped or differently doped, depending on the desired operating voltages to be used. Thick field oxide, or shallow trench isolation (STI) oxide **54** and **56** are formed for isolating the memory cell from other memory cells and/or core circuitry transistors. Commonly owned U.S. Patent Application No. 11/762,552 filed on June 13, 2007 describes alternate two-transistor anti-fuse memory cells which can be used in a non-volatile memory array. The thin gate oxide **46** is intended to breakdown in the presence of a large electrical field during a programming operation, thereby creating an electrically conductive connection between channel **48** and polysilicon gate **44**. This electrically conductive connection can be referred to as a conductive link or anti-fuse.

[0011] Such an anti-fuse device implemented in a standard CMOS process utilizes high voltage (HV) or input/output (I/O) transistors and low voltage (LV) or core transistors to implement the thick dielectric and thin dielectric regions respectively. The fabrication of HV and LV transistors includes the process steps such as well formation and threshold voltage (Vt) adjustment implants. Those skilled in the art will understand that HV transistors are typically used in the I/O circuits such as input and output buffers, or in the circuitry that requires lower leakage and/or higher operating voltage comparing to the core area, where

the LV transistors can be used. LV transistors on the other hand are typically used for core circuit transistors, or for circuitry that requires high speed switching performance for example. Accordingly, the electrical characteristics of HV and LV transistors are different since they are designed for specific applications. In the two-transistor anti-fuse memory cell **30**, it is desirable to minimize the V_t of the anti-fuse device consisting of polysilicon gate **44**.

Therefore it is formed using an LV transistor process. As shown in Figure 4 by example, the anti-fuse device consisting of polysilicon gate **44** is formed in a low voltage p-type well (PWELL-LV) **50** that has a dopant concentration, a V_t implant and gate oxide thickness specifically set for an LV transistor. The pass gate consisting of polysilicon gate **32** is formed in a high voltage p-type well (PWELL-HV) **52** that has a dopant concentration, a V_t implant and a gate oxide thickness specifically set for an HV transistor. Therefore the V_t of the anti-fuse device will be the same as the V_t of a core circuit transistor.

[0012] A driving factor for reducing cost of any memory is the memory array area. The two-transistor anti-fuse memory cell **30** of Figure 4 is a relatively large memory cell when compared to single transistor memory cells, such as flash memory cells for example. A single transistor anti-fuse memory cell is described in commonly owned U.S. Patent No. 7,402,855.

[0013] Figure 5 is a cross-sectional view of the single transistor anti-fuse memory cell disclosed in commonly owned U.S. Patent No. 7,402,855. Anti-fuse transistor **60** includes a variable thickness gate oxide **62** formed on the substrate channel region **64**, a polysilicon gate **66**, sidewall spacers **68**, a field oxide region **70** a diffusion region **72**, and an LDD region **74** in the diffusion region **72**. A bitline contact **76** is shown to be in electrical contact with diffusion region **72**. The variable thickness gate oxide **62** consists of a thick gate oxide and a thin gate oxide such that a portion of the channel length is covered by the thick gate oxide and the remaining portion of the channel length is covered by the thin gate oxide. From this point forward, the thin gate oxide portion corresponds to the anti-fuse device portion of the single transistor anti-fuse memory cell while the thick gate oxide portion corresponds to the access transistor portion of the single transistor anti-fuse memory cell. Generally, the thin gate oxide is a region where oxide breakdown can occur. The thick gate oxide edge meeting diffusion region **72** on the other hand, defines an access edge where gate oxide breakdown is prevented and current between the gate **66** and diffusion region **72** is to flow for a programmed anti-fuse transistor. While the distance that the thick oxide portion extends into the channel region depends on the mask grade, the thick oxide portion is preferably formed

to be at least as long as the minimum length of a high voltage transistor formed on the same chip.

[0014] In the presently shown example, the diffusion region **72** is connected to a bitline through a bitline contact **76**, or other line for sensing a current from the polysilicon gate **66**, and can be doped to accommodate programming voltages or currents. This diffusion region **72** is formed proximate to the thick oxide portion of the variable thickness gate oxide **62**. To further protect the edge of anti-fuse transistor **60** from high voltage damage, or current leakage, a resistor protection oxide (RPO), also known as a salicide protect oxide, can be introduced during the fabrication process to further space metal particles from the edge of sidewall spacer **68**. This RPO is preferably used during the salicidation process for preventing only a portion of diffusion region **72** and a portion of polysilicon gate **66** from being salicided. It is well known that salicided transistors are known to have higher leakage and therefore lower breakdown voltage. Thus having a non-salicided diffusion region **72** will reduce leakage. Diffusion region **72** can be doped for low voltage transistors or high voltage transistors or a combination of the two resulting in same or different diffusion profiles.

[0015] Once again, it is desirable to minimize the V_t of the anti-fuse device defined by the portion of the polysilicon gate **66** over the thin gate oxide portion of the variable thickness gate oxide **62**. Therefore it is formed using an LV transistor process. As shown in Figure 5 by example, the anti-fuse device consisting of polysilicon gate **66** over the thin gate oxide portion is formed in a low voltage p-type well PWELL-LV **78** that has a dopant concentration, a V_t implant and gate oxide thickness specifically set for an LV transistor. The pass gate consisting of polysilicon gate **66** over the thick gate oxide portion of the variable thickness gate oxide **62** is formed in a high voltage p-type well PWELL-HV **80** that has a dopant concentration, a V_t implant and a gate oxide thickness specifically set for an HV transistor. Therefore the V_t of the anti-fuse device will be the same as the V_t of a core circuit transistor.

[0016] Unfortunately, foundries for manufacturing semiconductor devices may have set types of LV transistor processes for manufacturing core circuits of the memory device, where the V_t control implant differs depending on the circuit application or function. Semiconductor memory devices generally have three circuit areas. First are the I/O circuits that are connected to pins of the package of the semiconductor memory device. Second are the core circuits, which includes any logic and control circuits for example. Third is the memory array, which includes memory cells. Compounding this problem is the fact that the

anti-fuse is typically designed on the basis of a particular LV transistor process, which means that the anti-fuse device has been qualified to operate properly if manufactured according to that particular LV transistor process. If the foundry does not have an LV transistor process suited for the design, then redesign of the anti-fuse device is required in order to qualify it for the available process. Such redesign incurs significant cost overhead, which is necessitated again when the foundry introduces a new generation of the process to accommodate a new manufacturing technology node. For example, an LV process for a 45nm technology node may be different than that of a 20nm technology node.

[0017] Another problem relevant to the anti-fuse transistor **60** of Figure 5 is mask alignment error associated with implantation of wells **78** and **80**. Because the thin gate oxide portion of the variable thickness gate oxide **66** is small, any mask alignment error becomes significant. This means that too much of well **78** can be formed under the thick gate oxide portion, or too little of well **78** can be formed under the thin gate oxide portion. In either case, defects affecting the proper operation of the single transistor anti-fuse memory cell are more likely to be formed.

[0018] Another important issue is reliability of the anti-fuse memory device, and more specifically the quality of the thin gate oxide. The thin gate oxide quality is affected by the condition of the underlying channel surface, the concentration and uniformity of dopants at the channel surface, and implantation damage, just to name a few factors. Generally, the more process steps that the anti-fuse device is subjected to, the higher the probability for producing a defective anti-fuse device. Since anti-fuse based memory devices are programmed after manufacture by end-users, it is difficult to test for the reliability of an anti-fuse device before programming. Therefore the quality of the thin gate oxide should be maximized, since an inadvertently programmed anti-fuse device or an unprogrammable anti-fuse device will likely cause failure in the system. In the automotive industry, such a failure can have catastrophic consequences.

[0019] Accordingly, it is difficult to manufacture a consistently low V_t anti-fuse device with current CMOS processes. Therefore, it is desirable to provide an anti-fuse based memory cell that has a minimal V_t while being simple and low cost to manufacture.

SUMMARY OF THE INVENTION

[0020] It is an object of the present invention to obviate or mitigate at least one disadvantage of previous anti-fuse memory devices.

[0021] In a first aspect, the present invention provides a memory device. The memory device includes a memory array including a plurality of anti-fuse memory cells and a core transistor. Each of the plurality of anti-fuse memory cells include an access transistor and an anti-fuse device. The access transistor has a thick gate oxide formed in a high voltage well, where the high voltage well is one of n-type and p-type. The anti-fuse device has a thin gate oxide formed in the high voltage well, where the thin gate oxide has a thickness less than the thick gate oxide. The core transistor has a gate oxide corresponding in thickness to the thin gate oxide, where the core transistor is formed in a low voltage well having a same type as the high voltage well. According to embodiments of the present aspect, there are input/output transistors formed in another well being substantially identical in type and doping profile to the high voltage well, the anti-fuse device has a lower threshold voltage than the core transistor, and the thick gate oxide includes an intermediate oxide and the thin gate oxide deposited over the intermediate oxide.

[0022] In another embodiment, the thin gate oxide is thermally grown on a substrate surface of the first well, and the thick gate oxide includes an intermediate oxide and thermally grown oxide between the intermediate oxide and the substrate surface. In a further embodiment, the access transistor includes a first diffusion region electrically connected to a bitline and a second diffusion region electrically connected to the anti-fuse device, where the access transistor has a threshold voltage greater than the core transistor and the anti-fuse device. In the present embodiment, the anti-fuse device has a variable thickness gate oxide having a thin portion corresponding to the thin gate oxide and a thick portion corresponding to the thick gate oxide, such that the variable thickness gate oxide is formed underneath a single polysilicon gate. Furthermore, channel regions under the thick portion of the variable thickness gate oxide and the access transistor thick gate oxide have substantially the same V_t implant. In yet another embodiment, the access transistor thick gate oxide corresponds to a thick portion of a variable thickness gate oxide, and the anti-fuse device thin gate oxide corresponds to a thin portion of the variable thickness gate oxide, such that the variable thickness gate oxide is formed underneath a single polysilicon gate. In this embodiment, the

anti-fuse transistor has a threshold voltage that is less than the access transistor and the core transistor.

[0023] In a second aspect, the present invention provides a method for fabricating a memory device. The method includes implanting first wells in a memory array circuit area, the first wells being one of n-type and p-type; implanting second wells in a core circuit area, the second wells being a same type as the first wells; forming a first oxide for access transistors in the first wells of the memory array circuit area; and simultaneously forming a second oxide for core transistors in the second wells of the core circuit area and for anti-fuse devices in the first wells of the memory array circuit area. In one embodiment, the first wells are high voltage wells and the second wells are low voltage wells. In another embodiment, the step of simultaneously forming includes increasing a thickness of the first oxide as the second oxide is being formed, the second oxide corresponding to a thin gate oxide of the anti-fuse devices. In this embodiment, increasing includes depositing the second oxide on a substrate surface and on the first oxide at the same time, the combination of the first oxide and the second oxide forming a thick gate oxide of the access transistors. Alternately, increasing includes thermally growing the second oxide on a substrate surface and underneath the first oxide at the same time, the combination of the first oxide and the second oxide forming a thick gate oxide of the access transistors.

[0024] In a further embodiment of the present aspect, the method further includes exposing the first wells to a high threshold voltage adjust implant for adjusting a threshold voltage of the access transistors and the anti-fuse devices. Alternately, the method further includes exposing the first wells to a high threshold voltage adjust implant for adjusting a threshold voltage of the access transistors and the anti-fuse devices while masking channel regions corresponding to the anti-fuse device for inhibiting implantation of the high threshold voltage adjust implant. Alternately, the method further includes exposing the second wells to a low threshold voltage adjust implant for adjusting a threshold voltage of the core transistors, while inhibiting exposure of the antifuse transistors to the low threshold voltage adjust implant.

[0025] According to another embodiment, the step of implanting the first wells includes simultaneously implanting the first wells in an input/output circuit area, and the step of forming a first oxide includes simultaneously forming the first oxide of input/output transistors in the first wells of the input/output circuit area. The step of increasing can include

depositing the second oxide on the first oxide of the input/output transistors, the combination of the first oxide and the second oxide forming a thick gate oxide of the input/output transistors. The step of exposing can include exposing the first wells to a high threshold voltage adjust implant for adjusting a threshold voltage of the access transistors, the anti-fuse devices and the input/output transistors. An additional step of exposing the second wells to a low threshold voltage adjust implant for adjusting a threshold voltage of the core transistors can be included.

[0026] In a third aspect, the present invention provides a memory device. The memory device includes anti-fuse memory cells, input/output transistors, and core transistors. The anti-fuse memory cells are in first wells of a memory array circuit area, the first wells being one of n-type and p-type. The input/output transistors are in the first wells of an input/output area. The core transistors are in second wells in a core circuit area, the second wells being a same type as the first wells, but having a different profile than the first wells. According to embodiments of the third aspect, each of the anti-fuse memory cells includes an access transistor and an anti-fuse device, and the access transistor and the input/output transistors have gate oxides with a first thickness. The anti-fuse device and the core transistors have gate oxides with a second thickness smaller than the first thickness. The access transistor and the input/output transistors have a first threshold voltage, the anti-fuse device has a second threshold voltage less than the first threshold voltage, and the core transistors have a third threshold voltage less than the first threshold voltage and different from the second threshold voltage.

[0027] Other aspects and features of the present invention will become apparent to those ordinarily skilled in the art upon review of the following description of specific embodiments of the invention in conjunction with the accompanying figures.

BRIEF DESCRIPTION OF THE DRAWINGS

[0028] Embodiments of the present invention will now be described, by way of example only, with reference to the attached Figures, wherein:

Fig. 1 is a circuit diagram of a DRAM-type anti-fuse cell;

Fig. 2 is a planar layout of the DRAM-type anti-fuse cell of Figure 1;

Fig. 3 is a cross-sectional view of the DRAM-type anti-fuse cell of Figure 2 along line A-A;

Fig. 4 is a cross-sectional view of a two-transistor anti-fuse memory cell;

Fig. 5 is a cross-sectional view of a single transistor anti-fuse memory cell;

Fig. 6A is a plan view of a two-transistor anti-fuse memory cell, according to an embodiment of the present invention;

Fig. 6B is a cross sectional view of the two-transistor anti-fuse memory cell of Figure 6A taken along line B-B;

Fig. 7A is a plan view of a single transistor anti-fuse memory cell, according to an embodiment of the present invention;

Fig. 7B is a cross sectional view of the single transistor anti-fuse memory cell of Figure 7A taken along line C-C;

Fig. 8A is a plan view of an alternate two-transistor anti-fuse memory cell, according to an embodiment of the present invention;

Fig. 8B is a cross sectional view of the two-transistor anti-fuse memory cell of Figure 8A taken along line D-D;

Figs. 9A to 9G illustrate CMOS process steps used to form the anti-fuse memory cell of Figure 6B, according to an embodiment of the present invention;

Figs. 10A to 10G illustrate CMOS process steps used to form the anti-fuse memory cell of Figure 7B, according to an embodiment of the present invention;

Fig. 11 is a flow chart summarizing the fabrication process for forming the anti-fuse memory cells of Figures 6B and 7B;

Fig. 12 is a plan view of a two-transistor anti-fuse memory array, according to an embodiment of the present invention;

Fig. 13 is a plan view of an alternate two-transistor anti-fuse memory array, according to an embodiment of the present invention; and,

Fig. 14 is a plan view of a single-transistor anti-fuse memory array, according to an embodiment of the present invention.

DETAILED DESCRIPTION

[0029] The embodiments of the present invention describe a one time programmable memory cell having an anti-fuse device with a low threshold voltage independent of core

circuit process manufacturing technology. A two transistor memory cell having a pass transistor and an anti-fuse device, or a single transistor split channel memory cell having a dual thickness gate oxide, are formed in a high voltage well that is used for forming high voltage transistors. The threshold voltage of the anti-fuse device differs from the threshold voltages of any transistor in the core circuits of the memory device, but has a gate oxide thickness that is the same as a transistor in the core circuits. The pass transistor has a threshold voltage that differs from the threshold voltages of any core circuit transistor, and has a gate oxide thickness that differs from any transistor in the core circuits.

[0030] In particular, the embodiments of the present invention achieve a low programmed anti-fuse device threshold voltage without any additional mask layer or CMOS process steps. Furthermore, mask layout is simplified and mask misalignment and mask-dependence of the gate oxide breakdown characteristics is minimized.

[0031] Figure 6A is a plan view of a two-transistor anti-fuse memory cell, according to an embodiment of the present invention. Anti-fuse memory cell **100** is typically formed in a memory array, and includes an access transistor and an anti-fuse transistor. The access transistor, also referred to as a pass transistor, includes active area **102**, bitline contact **104** and polysilicon gate **106**. The dashed outline **107** defines the areas in which a thick gate oxide is to be formed via a thick gate oxide definition mask during the fabrication process. More specifically, the area enclosed by the dashed outline **107** designates the regions where thick oxide is to be formed. The anti-fuse transistor includes active area **102** and polysilicon gate **108**. A first diffusion region **110** is formed in the active area **102** between polysilicon gates **106** and **108**, while a second diffusion region **112** is formed in the active area **102** on the other side of the polysilicon gate **106**. The bitline contact **104** makes electrical contact with second diffusion region **112**. Both the access transistor and the anti-fuse transistor are formed in a common well **114**. More specifically, the common well **114** is a high voltage well, such as high voltage p-type well that is used for I/O transistors. Underneath the polysilicon gate **106** and covering the channel area (not shown) is a thick gate oxide. Underneath the polysilicon gate **108** and covering the channel region (not shown) is a thin gate oxide where localized breakdown for forming an anti-fuse is intended.

[0032] Figure 6B is a cross-sectional view of anti-fuse memory cell **100** taken along line B-B. For comparison purposes, Figure 6B also shows a cross-sectional view of a core circuit transistor that would be formed in the same substrate as anti-fuse memory cell **100**.

Figure 6B clearly shows a thick gate oxide **116** underneath polysilicon gate **106**, and a thin gate oxide **118** underneath polysilicon gate **108**. The diffusion regions **110** and **112** have LDD regions extending under the sidewall spacers adjacent polysilicon gates **106** and **108**, and field oxide such as STI **120** and **122** are included for isolating anti-fuse memory cell **100** from other memory cells or core circuits, such as core circuit transistor **130**. Core circuit transistor **130** includes a polysilicon gate **132** formed over a thin gate oxide **134**, and diffusion regions **136** and **138**. The diffusion regions have LDD regions extending under the sidewall spacers adjacent to polysilicon gate **132**. This core circuit transistor **130** can be representative of all transistors used in the core circuits for operating the memory array, such as control logic or decoding logic for example, and is formed in well **140** that is different than well **114**. More specifically, since core circuit transistor **130** may be designed for high performance, well **140** will be a low voltage p-type well (PWELL-LV), which differs from the high voltage p-type well (PWELL-HV), **114**.

[0033] Several notable features of the anti-fuse memory cell **100** are now described. The thin gate oxide **118** of the anti-fuse device and the thin gate oxide **134** of the core circuit transistor **130** can be identical to each other, meaning that they are formed with substantially the same thickness. If multiple core device types exist in the same wafer (as in the case of triple gate oxide process) the antifuse thin gate oxide **118** would be identical to the gate oxide of one of the core transistor devices. Furthermore, the gate oxide thickness **116** is usually different than that of all core circuit transistors, and is typical the same as the gate oxide thickness of the I/O circuit transistors. This is achieved by growing both thin gate oxides **118** and **134** at the same time by using the same LV transistor process. Although the thin gates oxides **118** and **134** are the same, the threshold voltage of the anti-fuse device and the core circuit transistor **130** are different. Persons skilled in the art understand that the core circuit transistor **130** has an LV transistor Vt implant **142** in the channel **140** between the diffusion regions **136** and **138** to raise the Vt from the native Vt due to well **140**. However, the channel regions under the thick gate oxide **116** and thin gate oxide **118** are exposed to the same HV transistor Vt adjust implant step, thereby resulting in different Vt implants **126** and **128** due to the differing thicknesses of the gate oxides. The channel region underneath thick gate oxide **116** will have HV transistor Vt implant **126** that is used for adjusting the Vt of I/O transistors to a desired value, such as 0.6 volts for example. The channel region underneath thin gate oxide **118** will have Vt implant **128** that results in a Vt being a scaled

factor of the resulting V_t corresponding to the thick gate oxide **116**. Once again, this scaling factor is related to the difference in thickness between thick gate oxide **116** and the thin gate oxide **118**. Alternately, the channel region under the thin gate oxide **118** can be masked during the HV transistor V_t adjust implant step, thereby preventing any V_t adjust implantation into this region. Accordingly, the V_t under the thin gate oxide portion **118** will be the native V_t due to well **114**.

[0034] An advantage of using high voltage processes for manufacturing the anti-fuse memory cells is the fact that high voltage CMOS processes remain substantially constant with the introduction of each new low voltage CMOS process. Therefore, if the core circuits are fabricated with new advanced low voltage processes in order to attain improved performance, the anti-fuse memory cells will have characteristics that remain substantially constant from process generation to process generation. Therefore no redesign of the anti-fuse memory cells is required as the low voltage processes change.

[0035] The above example two-transistor anti-fuse memory cell **100** can have polysilicon gates **106** and **108** connected to each other and driven by a wordline, or they can be individually driven using separate wordline and V_{cp} lines in the same way as the two-transistor anti-fuse memory cell of Figures 1 and 2. In either case, such a memory cell may not be suited for high density applications where a minimal use of semiconductor area is required by minimizing the memory array footprint. In such applications, the single transistor anti-fuse memory cell of Figure 7A can be used.

[0036] Figure 7A is a plan view of a single-transistor anti-fuse memory cell, according to an embodiment of the present invention. Anti-fuse memory cell **200** is typically formed in a memory array, and includes the previously described variable thickness gate oxide of U.S. Patent No. 7,402,855. Anti-fuse memory cell **200** includes active area **202**, bitline contact **204**, polysilicon gate **206** and diffusion region **208** formed in the active area **202**. The bitline contact **204** makes electrical contact with diffusion region **208**. Anti-fuse memory cell **200** is formed in a common well **210**, which is a high voltage well such as the high voltage p-type well that is used for I/O transistors. Common well **210** can be the same as common well **114** of Figure 6B. Underneath the polysilicon gate **206** and covering the channel area (not shown) is a variable thickness gate oxide. The dashed outline **211** defines the areas in which a thick gate oxide is to be formed via a thick gate oxide definition mask during the fabrication process.

[0037] Figure 7B is a cross-sectional view of anti-fuse memory cell **200** taken along line C-C. For comparison purposes, Figure 7B also shows a cross-sectional view of the same core circuit transistor **130** shown in Figure 6B, that would be formed in the same substrate as anti-fuse memory cell **200**. Figure 7B clearly shows the variable thickness gate oxide underneath polysilicon gate **206**, which has a thick gate oxide portion **212** and a thin gate oxide portion **214**. The thick gate oxide portion **212** is defined using the thick gate oxide definition mask **211**. The diffusion region **208** has an LDD region extending under the sidewall spacer adjacent polysilicon gate **206**, and field oxide such as STI **216** and **218** are included for isolating anti-fuse memory cell **200** from other memory cells or core circuits, such as core circuit transistor **130**. Core circuit transistor **130** includes the same numbered elements previously described in Figure 6B. Once again, this core circuit transistor **130** can be representative of all transistors used in the core circuits for operating the memory array, such as control logic or decoding logic for example, and is formed in well **140** that is different than well **210**. In the present example, well **140** is a low voltage p-type well (PWELL-LV), which differs from the high voltage p-type well (PWELL-HV), **210**.

[0038] Several notable features of the anti-fuse memory cell **200** are now described. The thin gate oxide portion **214** of the variable thickness gate oxide and the thin gate oxide **134** of the core circuit transistor **130** are identical to each other, meaning that they are formed with substantially the same thickness. U.S. Patent No. 7,402,855 teaches that the thin gate oxide portion **214** is first formed at the same time that thin gate oxides for LV transistors are formed. Although the gates oxides **214** and **134** are the same, the threshold voltage of the anti-fuse device and the core circuit transistor **130** are different. As previously discussed, core circuit transistor **130** includes an LV transistor Vt implant **142** in the channel between the diffusion regions **136** and **138** to raise the Vt from the native Vt due to well **140**. The channel region between diffusion region **208** and STI **218** is exposed to the same HV transistor Vt adjust implant step, thereby resulting in different Vt implants **220** and **222** due to the differing thicknesses of the variable thickness gate oxide. The channel region underneath thick gate oxide portion **212** will have HV transistor Vt implant **220** that is used for adjusting the Vt of I/O transistors to a desired value, such as 0.6 volts for example. The channel region underneath thin gate oxide portion **214** will have Vt implant **222** that results in a Vt being a scaled factor of the resulting Vt corresponding to the thick gate oxide portion **212**. Once again, this scaling factor is related to the difference in thickness between thick gate oxide

portion **212** and the thin gate oxide portion **214**. Alternately, the channel region under the thin gate oxide portion **214** can be masked during the HV transistor Vt adjust implant step, thereby preventing any Vt adjust implantation into this region. Accordingly, the Vt under the thin gate oxide portion **214** will be similar to the native Vt determined by the well doping of well **210**, but partially modified by the HV transistor Vt implantation due to mask alignment error. The threshold voltage of the anti-fuse device will be lower than the threshold voltage of the core transistor having substantially the same thin gate oxide thickness.

[0039] An alternate embodiment of a two transistor anti-fuse memory cell is shown in Figure 8A. Figure 8A is a plan view of a two-transistor anti-fuse memory cell, according to an embodiment of the present invention. Anti-fuse memory cell **300** is typically formed in a memory array, and includes an access transistor and an anti-fuse transistor. The access transistor can be identical to the one shown in Figure 6A, and includes active area **302**, bitline contact **304** and polysilicon gate **306**. The anti-fuse transistor can have a variable thickness gate oxide identical to the one shown in Figure 7A, and includes active area **302** and polysilicon gate **308**. A first diffusion region **310** is formed in the active area **302** between polysilicon gates **306** and **308**, while a second diffusion region **312** is formed in the active area **302** on the other side of the polysilicon gate **306**. The bitline contact **304** makes electrical contact with second diffusion region **312**. Both the access transistor and the anti-fuse transistor are formed in a common well **314**. More specifically, the common well **314** is a high voltage well, such as high voltage p-type well that is used for I/O transistors. The dashed outline **315** defines the areas in which a thick gate oxide is to be formed via a thick gate oxide definition mask during the fabrication process. Underneath the polysilicon gate **306** and covering the channel area (not shown) is a thick gate oxide.

[0040] Figure 8B is a cross-sectional view of anti-fuse memory cell **300** taken along line D-D. For comparison purposes, Figure 8B also shows a cross-sectional view of the same core circuit transistor **130** shown in Figure 6B, that would be formed in the same substrate as anti-fuse memory cell **300**. Figure 8B clearly shows a thick gate oxide **316** underneath polysilicon gate **306**, and the variable thickness gate oxide having a thick gate oxide portion **318** and a thin gate oxide portion **320** underneath polysilicon gate **308**. The thick gate oxide **316** and the thick gate oxide portion **318** are both defined using the thick gate oxide definition mask **315**. The diffusion regions **310** and **312** have LDD regions extending under the sidewall spacers adjacent polysilicon gates **306** and **308**, and field oxide such as STI **322**

and **324** are included for isolating anti-fuse memory cell **300** from other memory cells or core circuits, such as core circuit transistor **130**. Core circuit transistor **130** includes the same numbered elements previously described in Figure 6B.

[0041] Several notable features of the anti-fuse memory cell **300** are now described. The thin gate oxide portion **320** of the variable thickness gate oxide and the thin gate oxide **134** of the core circuit transistor **130** are identical to each other, meaning that they are formed with substantially the same thickness. Although the gates oxides **320** and **134** are the same, the threshold voltage of the anti-fuse device and the core circuit transistor **130** are different. As previously discussed, core circuit transistor **130** includes an LV transistor Vt implant **142** in the channel **140** between the diffusion regions **136** and **138** to raise the Vt from the native Vt due to well **140**. The channel region between diffusion region **310** and STI **324** is exposed to the same HV transistor Vt adjust implant step, thereby resulting in different Vt implants **326** and **328** due to the differing thicknesses of the variable thickness gate oxide. The channel region underneath thick gate oxide portion **318** will have HV transistor Vt implant **326** that is used for adjusting the Vt of I/O transistors to a desired value, such as 0.6 volts for example. The channel region underneath thin gate oxide portion **320** will have a Vt implant **328** that results in a Vt being a scaled factor of the resulting Vt corresponding to the thick gate oxide portion **318**. Once again, this scaling factor is related to the difference in thickness between thick gate oxide portion **318** and the thin gate oxide portion **320**. Alternately, the channel region under the thin gate oxide portion **320** can be masked during the HV transistor Vt adjust implant step, thereby preventing any Vt adjust implantation into this region. Accordingly, the Vt under the thin gate oxide portion **320** will be the native Vt due to well **210**. The thick gate oxide **316** of the access transistor is thicker than the gate oxide of any transistor in the core circuits, but has an HV transistor Vt implant **330** substantially the same as an I/O transistor. Since the gate oxide thicknesses of portions **318** and **316** are substantially the same, then Vt implants **320** and **336** will be substantially the same. In the present embodiment, the channels under thick gate oxide **318** and thin gate oxide portion **320** are exposed to the same HV transistor Vt implantation step.

[0042] The previously shown anti-fuse memory cells are examples of possible shapes for the two-transistor and the single transistor anti-fuse memory cells. Other possible shapes for the anti-fuse memory cells can be used, as demonstrated in commonly owned U.S. Patent Publication No. 2007/0257331. U.S. Patent Publication No. 2007/0257331

teaches anti-fuse memory cell shapes that minimize the thin gate oxide area. Accordingly, the embodiments of the present invention can be applied to anti-fuse memory cells having the alternate shapes shown in U.S. Patent Publication No. 2007/0257331.

[0043] In all the anti-fuse memory cell embodiments shown in Figures 6B, 7B and 8B, all the transistors of the anti-fuse memory cell are formed in the same high voltage well, where the high voltage well can be the same as the one used for I/O transistors. Since the high voltage well is inherently designed to minimize leakage between adjacent devices separated by STI, the Vt implant of the anti-fuse device can be omitted. This results in a Vt that is lower than any core circuit transistor on the same semiconductor substrate. Alternately, the anti-fuse devices have channels exposed to the same high voltage Vt implant step that the thick gate oxide access transistor or thick gate oxide portion are exposed to. This results in a Vt for the anti-fuse device that differs from the Vt of any core circuit transistor, resulting in better controlled or relatively lower Vt, and/or lower silicon damage due to the ion implantation. The fabrication of the anti-fuse memory cells shown in Figures 6B, 7B and 8B uses existing CMOS process steps for fabricating the I/O transistors and the core circuit transistors without any additional masking steps, thereby minimizing the fabrication cost of the entire semiconductor device.

[0044] Figures 9A to 9G shows various steps in a CMOS process used to form the anti-fuse memory cell of Figure 6B, at the same time a core circuit transistor is formed. Only specific steps are shown in Figures 9A to 9G for illustrating the differences between the anti-fuse memory cell embodiment of the present invention and a core circuit transistor. Persons skilled in the art understand that other non-illustrated steps are executed for forming the structures of the transistors. In Figure 9A, the STI oxide **400** have been formed in the memory array area **402**, core circuit area **404** and the I/O circuit area (not shown). An implant mask **406** is formed over the core circuit area **404**, and the exposed substrate not covered by mask **406** is bombarded with p-type ions for forming a high voltage p-type well. It is noted that the high voltage p-type well for the I/O transistor structures are formed at the same time. Subsequently, an optional high voltage Vt adjust implant for the memory array area **402** and the I/O transistors is performed. It is noted that the high voltage Vt adjust implant may not be necessary if the desired Vt level is achieved directly using HV well ion implantation. Alternately, the area corresponding to the channel region of the anti-fuse transistor or device

can be masked after the p-type ions for forming a high voltage p-type well have been implanted, such that this region does not receive any high voltage Vt adjust implant.

[0045] In Figure 9B, the memory array area **402** with the PWELL-HV implant and high voltage Vt adjust implant **408** is covered by mask **410** so that the exposed substrate corresponding to core circuit area **404** not covered by mask **410** is bombarded with p-type ions for forming a low voltage p-type well. Subsequently, a low voltage Vt adjust implant for the core circuit area **404** is performed, which is shown in Figure 9C as low voltage Vt adjust implant **412**. The structures shown in Figure 9C result from several process steps. First a drive-in step is performed to diffuse implanted p-type ions within the substrate to form the HV p-type well **414** and the LV p-type well **416**. Second, an intermediate oxide **418** is grown over the substrate of both the memory array area **402** and the core circuit area **404**. Third, a thick gate oxide (OD2) definition mask **420** is deposited on the intermediate oxide **418** in selected regions of the memory array area **402** and the I/O circuit area (not shown) for defining thick gate oxides. The absence of mask **420** in the core circuit area means that no high voltage transistor is to be formed therein. In a following oxide etching step, any intermediate oxide **418** not covered by mask **420** is etched down to the substrate surface in preparation for thin gate oxide formation.

[0046] In Figure 9D, a thin oxide **422** is formed on the exposed substrate surface in the memory array area **402** and the core circuit area **404**. There are two different techniques which can be used for forming the thin oxide **422**. A first technique is the one shown in Figure 9D, where the thin oxide **422** is thermally grown on the exposed substrate surface. In this technique, the thin oxide **422** will also grow underneath the intermediate oxide **418**, which pushes the intermediate oxide **418** up and away from the substrate surface. The growth rate underneath the intermediate oxide **418** is lower than in areas where there is no intermediate oxide **418** covering the substrate surface. While it is not shown in Figure 9D, the intermediate oxide **418** is lifted above the substrate surface by thermally grown thin oxide. A second technique is deposition of the thin oxide **422** over the exposed substrate surface and the exposed surface of the intermediate oxide **418**. In either case, the resulting thick gate oxide will be a sum of the intermediate oxide plus thermally grown thin oxide from underneath the intermediate layer or thin oxide deposited on top of the intermediate layer.

[0047] Since the I/O transistors are intended to have thick gate oxides, the I/O transistor areas would already have the intermediate oxide **418**. Following the growth of the

thin oxide **422**, gate polysilicon **424** is deposited over the entire substrate, which includes the memory array area **402**, the core circuit area **404**, and any I/O transistor areas. As shown in Figure 9D, the gate polysilicon **424** is deposited over the thin oxide **422** and the thicker intermediate oxide **418**. In order to define the specific shape of the gate polysilicon **424**, a gate mask **426** is deposited over selected areas of the gate polysilicon **424**. Following deposition of the gate mask **426**, all the exposed gate polysilicon **424** not covered by gate mask **426** is etched away, leaving stacks of polysilicon gates over thin or thick (intermediate) oxides in the memory array area **402**, the core circuit area **404**, and the I/O circuit area.

[0048] Figure 9E shows three such stacks resulting from the gate polysilicon etch step, two being in the memory array area **402** and one being in the core circuit area **404**. In memory array area **402**, the stack consisting of gate polysilicon **424** over thin oxide **422** is the anti-fuse transistor device while gate polysilicon **424** over the thick (intermediate) oxide **418** is the access transistor. In core circuit area **404**, the stack consisting of gate polysilicon **424** over thin oxide **422** is a low voltage transistor used in a logic circuit, for example. In Figure 9E, a diffusion mask **428** is deposited over memory array area **402** and the I/O circuit area, thereby allowing for the formation of LDD regions (not shown) and sidewall spacers **430** adjacent to the gate polysilicon **424** of all the low voltage transistors in the core circuit area **404**. After formation of the sidewall spacers **430**, the exposed substrates are exposed to n-type diffusion implantation for forming source and drain diffusion regions for all the low voltage transistors in the core circuit area **404**. The resulting LDD regions **432** and diffusion regions **434** for the low voltage transistors in the core circuit area **404** are shown in Figure 9F, and have concentrations specifically designed for the low voltage transistors.

[0049] In Figure 9F the diffusion mask **428** has been removed, and the low voltage transistors in the core circuit area **404** are covered with another diffusion mask **436**. Now the transistors of the memory array area **402** are exposed to LDD implants, the formation of sidewall spacers **438**, and diffusion region implantation. Figure 9G shows the completed anti-fuse memory cell having LDD regions **440** and diffusion regions **442**, and the completed low voltage transistor in the core circuit area **404**. The resulting LDD regions **440** and diffusion regions **442** for the high voltage transistors in the memory array area **402** are shown in Figure 9F, and have concentrations specifically designed for the high voltage transistors. At this point, all the transistors of the device are subjected to n-type implant diffusion annealing to activate the implanted dopants and to heal any implant damage. It is noted that the anti-

fuse memory cell and low voltage transistor of Figure 9F are the same as the corresponding ones shown in Figure 6B. Fabrication of the anti-fuse memory cells and all other transistors is completed, and subsequent process steps would be executed for forming bitline contacts and depositing conductive tracks for interconnecting the transistor devices.

[0050] Figures 9A to 9G illustrate example steps in a CMOS fabrication process for forming a two-transistor anti-fuse memory cell and a low voltage core circuit transistor. The anti-fuse transistor and the low voltage core circuit transistor have thin gate oxides formed using the same gate oxide formation process, but have Vt implants and effective thresholds which differ. Because the entire high voltage p-well **414** is initially subjected to a common high voltage Vt implant, both the access transistor and the anti-fuse transistor have the same implant, but will have different effective Vt's. More specifically, the high voltage Vt implant is intended to ensure that the effective Vt of the access transistor having the thick gate oxide is at a specific value, such as 0.6V for example. Therefore the effective Vt of the anti-fuse transistor is less than 0.6V since its gate oxide is thinner. In an alternate embodiment, the channel under the thin oxide **422** of the anti-fuse transistor can be inhibited from receiving the high voltage Vt implant, thereby further reducing its effective Vt. The low voltage core circuit transistor is subjected to a low voltage Vt implant, which is intended to ensure that its effective Vt is at a specific value, such as 0.6V for example. In any case, the resulting effective Vt of the anti-fuse transistor will always be different than that of any low voltage core circuit transistor.

[0051] Figures 10A to 10G shows various steps in a CMOS process used to form the anti-fuse memory cell of Figure 7B, at the same time a core circuit transistor is formed. Only specific steps are shown in Figures 10A to 10G for illustrating the differences between the anti-fuse memory cell embodiment of the present invention and a core circuit transistor. Persons skilled in the art understand that other non-illustrated steps are executed for forming the structures of the transistors. In Figure 10A, the STI oxide **500** are formed in the memory array area **502**, core circuit area **504** and the I/O circuit area (not shown). An implant mask **506** is formed over the core circuit area **504**, and the exposed substrate not covered by mask **506** is bombarded with p-type ions for forming a high voltage p-type well. It is noted that the high voltage p-type well for the I/O transistor structures are formed at the same time. Subsequently, a high voltage Vt adjust implant for the memory array area **502** and the I/O transistors is performed. Alternately, the area corresponding to the channel region of the anti-

fuse device portion can be masked after the p-type ions for forming a high voltage p-type well have been implanted, such that this region does not receive any high voltage Vt adjust implant.

[0052] In Figure 10B, the memory array area **502** with the high voltage Vt adjust implant **508** is covered by mask **510** so that the exposed substrate corresponding to core circuit area **504** not covered by mask **510** is bombarded with p-type ions for forming a low voltage p-type well. Subsequently, a low voltage Vt adjust implant for the core circuit area **504** is performed, which is shown in Figure 10C as low voltage Vt adjust implant **512**. It should be noted at this time that there are different variations in the well formation and Vt adjust implantation process, of which the above described sequence is one example process. For example, the same well implant can be used for both low and high voltage transistors, but different Vt adjustment implants can be used. Alternately, two separate well implants can be used for the low and high voltage transistors, while the same Vt adjust implant is used for both wells. It may even be possible to omit certain Vt adjust implants. Maximum flexibility is obtained when both low and high voltage transistors have their own well implants and Vt adjust implants. This may be desired to obtain a high level of control over the well profiles and precision of the transistor threshold voltages. There may be situations where different high voltage transistors are available in a process, therefore each different type of high voltage transistor may have different well and Vt adjust implants. To improve cost efficiency, a Vt adjust implant can be done using existing masks, such as a P-well or diffusion (LDD) masks for example.

[0053] The structures shown in Figure 10C result from several process steps. First a drive-in step is performed to diffuse implanted p-type ions within the substrate to form the high voltage p-type well **514** and the low voltage p-type well **516**. Second, an intermediate oxide **518** is grown over the substrate of both the memory array area **502** and the core circuit area **504**. Third, a thick gate oxide (OD2) definition mask **520** is deposited on the intermediate oxide **518** in selected regions of the memory array area **502** and the I/O circuit area (not shown) for defining thick gate oxides. The absence of mask **520** in the core circuit area means that no high voltage transistor is to be formed therein. In a following oxide etching step, any intermediate oxide **518** not covered by mask **520** is etched down to the substrate surface in preparation for thin gate oxide formation.

[0054] In Figure 10D, a thin oxide **522** is grown on the exposed substrate surface in the memory array area **502** and the core circuit area **504**. Since the I/O transistors are intended to have thick gate oxides, the I/O transistor areas would already have the intermediate oxide **518**. Following the growth of the thin oxide **522**, gate polysilicon **524** is deposited over the entire substrate, which includes the memory array area **502**, the core circuit area **504**, and any I/O transistor areas. As shown in Figure 10D, the gate polysilicon **524** is deposited over the thin oxide **522** and the thicker intermediate oxide **518**. In order to define the specific shape of the gate polysilicon **524**, a gate mask **526** is deposited over selected areas of the gate polysilicon **524**. It is noted that the variable thickness gate oxide of the single transistor anti-fuse memory cell is now defined by the position of the gate mask **526** in the core circuit area **504**. More specifically, gate mask **526** in the core circuit area **504** covers both the thin oxide **522** and the thicker intermediate gate oxide **518**. Following deposition of the gate mask **526**, all the exposed gate polysilicon **524** not covered by gate mask **526** is etched away, leaving stacks of polysilicon gates over thin and thick (intermediate) oxides in the memory array area **502**, the core circuit area **504**, and the I/O circuit area.

[0055] Figure 10E shows two such stacks resulting from the gate polysilicon etch step, one being in the memory array area **502** and one being in the core circuit area **504**. In memory array area **502**, the stack consisting of gate polysilicon **524** over variable thickness oxides **518** and **522** is the anti-fuse transistor device. In core circuit area **504**, the stack consisting of gate polysilicon **524** over thin oxide **522** is a low voltage transistor used in a logic circuit, for example. In Figure 10E, a diffusion mask **528** is deposited over memory array area **502** and the I/O circuit area, thereby allowing for the formation of LDD regions (not shown) and sidewall spacers **530** adjacent to the gate polysilicon **524** of all the low voltage transistors in the core circuit area **504**. After formation of the sidewall spacers **530**, the exposed substrates are exposed to n-type diffusion implantation for forming source and drain diffusion regions for all the low voltage transistors in the core circuit area **504**. The resulting LDD regions **532** and diffusion regions **534** for the low voltage transistors in the core circuit area **504** are shown in Figure 10F, and have concentrations specifically designed for the low voltage transistors.

[0056] In Figure 10F the diffusion mask **528** has been removed, and the low voltage transistors in the core circuit area **504** are covered with another diffusion mask **536**. Now the

transistors of the memory array area **502** are exposed to LDD implants, the formation of sidewall spacers **538**, and diffusion region implantation. Figure 10G shows the completed anti-fuse memory cell having LDD region **540** and diffusion region **542**, and the completed low voltage transistor in the core circuit area **504**. The resulting LDD region **540** and diffusion region **542** for the high voltage transistors in the memory array area **502** are shown in Figure 10G, and have concentrations specifically designed for the high voltage transistors. At this point, all the transistors of the device are subjected to n-type implant diffusion annealing to activate the implanted dopants and to heal any implant damage. It is noted that the anti-fuse memory cell and low voltage transistor of Figure 10F are the same as the corresponding ones shown in Figure 7B. Fabrication of the anti-fuse memory cells and all other transistors is completed, and subsequent process steps would be executed for forming bitline contacts, and for depositing conductive tracks for interconnecting the transistor devices.

[0057] Figures 10A to 10G illustrate example steps in a CMOS fabrication process for forming a single transistor anti-fuse memory cell having a variable thickness gate oxide, and a low voltage core circuit transistor. The anti-fuse device of the single transistor anti-fuse memory cell and the low voltage core circuit transistor have thin gate oxides formed using the same gate oxide formation process, but have V_t implants and effective thresholds which differ. Because the entire high voltage p-well **514** is initially subjected to a common high voltage V_t implant, both the access transistor portion and the anti-fuse device portion of the single transistor anti-fuse memory cell have the same implant, but will have different effective V_t 's. More specifically, the high voltage V_t implant is intended to ensure that the effective V_t of the access transistor portion having the thick gate oxide is at a specific value, such as 0.6V for example. Therefore the effective V_t of the anti-fuse device is less than 0.6V since its gate oxide is thinner. In an alternate embodiment, the area under the thin oxide **522** of the variable thickness gate oxide can be inhibited from receiving the high voltage V_t implant, thereby further reducing its effective V_t . The low voltage core circuit transistor is subjected to a low voltage V_t implant, which is intended to ensure that its effective V_t is at a specific value, such as 0.6V for example. In any case, the resulting effective V_t of the anti-fuse device will always be different than that of any low voltage core circuit transistor.

[0058] The fabrication process for forming the anti-fuse memory cells of Figures 6B and 7B is summarized in the flow chart of Figure 11. Wells for the anti-fuse memory cells in the memory array area and the transistors in the I/O circuit area are formed in step **600**,

which corresponds to the fabrication steps shown in Figures 9A and 10A. A Vt adjust implant is introduced into these wells after well ion implantation, where the Vt adjust implant is designed for high voltage transistors. In the present example, the wells are designed for high voltage transistors. In an alternate embodiment, channel regions under thin oxide can be masked so that they do not receive any Vt adjust implant. At step **602**, wells for the core circuit area are implanted, followed by a Vt adjust implant, which corresponds to the fabrication steps shown in Figures 9B and 10B. Thick gate oxide is grown for the I/O transistors and the access transistors of the anti-fuse memory cells in the memory array area at step **604**, which corresponds to the fabrication steps shown in Figures 9C and 10C. Then thin gate oxide is grown for the anti-fuse transistor/devices in the memory array area and the core circuit transistors at step **606**, which corresponds to the fabrication steps shown in Figures 9D and 10D. Step **606** can include thermally growing the thin oxide or deposition of the thin oxide. In either case, the thick gate oxide grown in step **604** is increased in thickness as the formed thin gate oxide is added to the thick gate oxide. Finally at step **608**, the polysilicon gates for all the transistors are formed and the diffusion regions for the I/O transistors, anti-fuse memory cell transistors and the core circuit transistors are implanted. This corresponds to the fabrication steps shown in Figures 9D-9F and 10D-10F.

[0059] The previous Figures show one anti-fuse memory cell in isolation from other anti-fuse memory cells in a memory array. Figures 12 to 14 are plan view layout illustrations of multiple anti-fuse memory cells of the present embodiments arranged in a memory array.

[0060] Figure 12 is a plan view layout of a two-transistor anti-fuse memory cell memory array according to an embodiment of the present invention. Each two-transistor anti-fuse memory cell in memory array **700** has both polysilicon gates **106** and **108** connected to each other, and have the same structure as anti-fuse memory cell **100** of Figures 6A and 6B. In order to maintain clarity of the drawing, only polysilicon gates **106** and **108** of one anti-fuse memory cell are annotated. Memory array **700** is shown to include six anti-fuse memory cells, where three are arranged in a first row **702** and another three are arranged in a second row **704**. A first wordline WLi is connected to the anti-fuse memory cells of row **702**, while a second wordline WLi+1 is connected to the anti-fuse memory cells of row **704**. The dashed outline **705** defines the areas in the memory array in which a thick gate oxide is to be formed via a thick gate oxide definition mask during the fabrication process. In the configuration shown in Figure 12, each pair of memory cells from rows **702** and **704** share a common

diffusion region **706** and a common bitline contact **708**. Each bitline contact is connected to a different bitline, such as bitlines BL_n , BL_{n+1} and BL_{n+2} . All the anti-fuse memory cells are formed in well **710**, which according to the present embodiment is a high voltage p-type well. The anti-fuse memory cells of memory array **700** can be formed using the fabrication steps shown in Figures 9A-9G.

[0061] Figure 13 is a plan view layout of a two-transistor anti-fuse memory cell memory array according to an embodiment of the present invention. Each two-transistor anti-fuse memory cell in memory array **800** has individually controlled polysilicon gates **106** and **108**, and have the same structure as anti-fuse memory cell **100** of Figures 6A and 6B. In memory array **800**, the polysilicon line forming polysilicon gates **106** and **108** of each anti-fuse memory cell are common to all the anti-fuse memory cells of the row. Memory array **800** is shown to include six anti-fuse memory cells, where three are arranged in a first row **802** and another three are arranged in a second row **804**. A first wordline WLi is connected to the polysilicon gates **106** of row **802** while a first cell plate voltage VCP_i is connected to the polysilicon gates **108** of row **802**. A second wordline $WLi+1$ is connected to the polysilicon gates **106** of row **804** while a second cell plate voltage VCP_i+1 is connected to the polysilicon gates **108** of row **804**. The dashed outline **805** defines the areas in the memory array in which a thick gate oxide is to be formed via a thick gate oxide definition mask during the fabrication process. In the configuration shown in Figure 13, each pair of memory cells from rows **802** and **804** share a common diffusion region **806** and a common bitline contact **808**. Each bitline contact is connected to a different bitline, such as bitlines BL_n , BL_{n+1} and BL_{n+2} . All the anti-fuse memory cells are formed in well **810**, which according to the present embodiment is a high voltage p-type well. The anti-fuse memory cells of memory array **800** can be formed using the fabrication steps shown in Figures 9A-9G.

[0062] Figure 14 is a plan view layout of a single transistor anti-fuse memory cell memory array according to an embodiment of the present invention. Each single transistor anti-fuse memory cell in memory array **900** has one polysilicon gate **206**, and have the same structure as anti-fuse memory cell **200** of Figures 7A and 7B. In memory array **900**, the polysilicon line forming polysilicon gates **206** of each anti-fuse memory cell are common to all the anti-fuse memory cells of the row. Memory array **900** is shown to include sixteen anti-fuse memory cells, where four are arranged in each of first row **902**, second row **904**, third row **906** and fourth row **908**. Wordlines WLi , $WLi+1$, $WLi+2$ and $WLi+3$ are connected to the

polysilicon gates **206** of rows **902**, **904**, **906** and **908** respectively. The dashed outlines **909** define the areas in the memory array in which a thick gate oxide is to be formed via a thick gate oxide definition mask during the fabrication process. In the configuration shown in Figure 14, each pair of memory cells from rows **902** and **904** share a common diffusion region **910** and a common bitline contact **912**. Each bitline contact is connected to a different bitline, such as bitlines BL_n , BL_{n+1} , BL_{n+2} and BL_{n+3} . The anti-fuse memory cells of rows **902** and **904** are formed in a first well **914**, while the anti-fuse memory cells of rows **906** and **908** are formed in a second well **916**. Both wells **914** and **916** can be identical high voltage p-type wells, but separated from each other via STI oxide formed in the substrate between $WLi+1$ and $WLi+2$. The anti-fuse memory cells of memory array **900** can be formed using the fabrication steps shown in Figures 10A-10G.

[0063] The previously described embodiments can be applied to mask ROM anti-fuse devices, such as the ones disclosed in commonly owned PCT Patent Publication No. WO2008/077240 filed on December 20, 2007. WO2008/077240 teaches that an anti-fuse memory cell can be programmed by fabricating an electrical connection between its diffusion region or channel to a voltage supply.

[0064] The embodiments of the present invention illustrate two-transistor and single transistor memory cells having anti-fuse devices with threshold voltages that differ from low voltage core circuit transistors. This is achieved by forming the anti-fuse memory cells in a well used for high voltage transistors such as I/O transistors, while the core circuit transistors are formed in a well typically used for low voltage transistors. Since a single V_t adjustment implant and a single LDD implant are applied for both thick gate oxide transistors and thin gate oxide transistors in the memory array area, regions of potentially uncontrolled implant concentrations and implant damages are eliminated. In contrast, anti-fuse transistors using two different wells suffer from the aforementioned disadvantages due to mask misalignment causing two or more implant regions to overlap each other. Accordingly, a higher quality thin gate oxide for the anti-fuse transistor, or anti-fuse device, results in lowered effective threshold and resistance, thereby providing good breakdown characteristics.

[0065] In summary, the thin and thick gate oxide or dielectric regions of the anti-fuse memory cell are formed in the same well, or in the wells of the same type and doping profile. The core circuit transistors, I/O transistors, or both, use a different well doping profile than the wells of the memory array area. The thin and thick gate oxide regions of the anti-fuse

memory cell can receive the same V_t adjust, or control ion implantation, but the thin gate oxide region and the core circuit region receive different V_t control ion implantation. The effective V_t of the anti-fuse device will be lower than at least one core circuit transistor of the same type and having the same gate oxide thickness.

[0066] The previously presented example embodiments show anti-fuse memory cells formed in high voltage p-wells while core circuit transistors are formed in low voltage p-wells. Alternately, the anti-fuse memory cells can be formed in high voltage n-wells while core circuit transistors are formed in low voltage n-wells.

[0067] In the preceding description, for purposes of explanation, numerous details are set forth in order to provide a thorough understanding of the embodiments of the invention. However, it will be apparent to one skilled in the art that these specific details are not required in order to practice the invention. In other instances, well-known electrical structures and circuits are shown in block diagram form in order not to obscure the invention. For example, specific details are not provided as to whether the embodiments of the invention described herein are implemented as a software routine, hardware circuit, firmware, or a combination thereof.

[0068] The above-described embodiments of the invention are intended to be examples only. Alterations, modifications and variations can be effected to the particular embodiments by those of skill in the art without departing from the scope of the invention, which is defined solely by the claims appended hereto.

What is claimed is:

1. A memory device comprising:

5 a memory array including a plurality of anti-fuse memory cells, each of the plurality of anti-fuse memory cells including

an access transistor having a thick gate oxide formed in a high voltage well, the high voltage well being one of n-type and p-type, and

10 an anti-fuse device having a thin gate oxide formed in the high voltage well, the thin gate oxide having a thickness less than the thick gate oxide; and,

a core transistor having a gate oxide corresponding in thickness to the thin gate oxide, the core transistor being formed in a low voltage well having a same type as the high voltage well.

15 2. The memory device of claim 1, further including input/output transistors formed in another well being substantially identical in type and doping profile to the high voltage well.

20 3. The memory device of claim 1, wherein the anti-fuse device has a lower threshold voltage than the core transistor.

4. The memory device of claim 1, wherein the thick gate oxide includes an intermediate oxide and the thin gate oxide deposited over the intermediate oxide.

25 5. The memory device of claim 1, wherein the thin gate oxide is thermally grown on a substrate surface of the first well.

6. The memory device of claim 5, wherein the thick gate oxide includes an intermediate oxide and thermally grown oxide between the intermediate oxide and the substrate surface.

7. The memory device of claim 1, wherein the access transistor includes a first diffusion region electrically connected to a bitline and a second diffusion region electrically connected to the anti-fuse device.

5 8. The memory device of claim 7, wherein the access transistor has a threshold voltage greater than the core transistor and the anti-fuse device.

9. The memory device of claim 8, wherein the anti-fuse device has a variable thickness gate oxide having a thin portion corresponding to the thin gate oxide and a thick portion
10 corresponding to the thick gate oxide, the variable thickness gate oxide being formed underneath a single polysilicon gate.

10. The memory device of claim 9, wherein channel regions under the thick portion of the variable thickness gate oxide and the access transistor thick gate oxide have substantially
15 the same V_t implant.

11. The memory device of claim 1, wherein the access transistor thick gate oxide corresponds to a thick portion of a variable thickness gate oxide and the anti-fuse device thin gate oxide corresponds to a thin portion of the variable thickness gate oxide, the variable
20 thickness gate oxide being formed underneath a single polysilicon gate.

12. The memory device of claim 11, wherein the anti-fuse transistor has a threshold voltage that is less than the access transistor and the core transistor.

25 13. A method for fabricating a memory device comprising:

implanting first wells in a memory array circuit area, the first wells being one of n-type and p-type;

30 implanting second wells in a core circuit area, the second wells being a same type as the first wells;

forming a first oxide for access transistors in the first wells of the memory array circuit area; and,

5 simultaneously forming a second oxide for core transistors in the second wells of the core circuit area and for anti-fuse devices in the first wells of the memory array circuit area.

14. The method of claim 13, wherein the first wells are high voltage wells and the second wells are low voltage wells.

10 15. The method of claim 13, wherein the step of simultaneously forming includes increasing a thickness of the first oxide as the second oxide is being formed, the second oxide corresponding to a thin gate oxide of the anti-fuse devices.

15 16. The method of claim 15, wherein increasing includes depositing the second oxide on a substrate surface and on the first oxide at the same time, the combination of the first oxide and the second oxide forming a thick gate oxide of the access transistors.

20 17. The method of claim 15, wherein increasing includes thermally growing the second oxide on a substrate surface and underneath the first oxide at the same time, the combination of the first oxide and the second oxide forming a thick gate oxide of the access transistors.

25 18. The method of claim 13, further including exposing the first wells to a high threshold voltage adjust implant for adjusting a threshold voltage of the access transistors and the anti-fuse devices.

30 19. The method of claim 13, further including exposing the first wells to a high threshold voltage adjust implant for adjusting a threshold voltage of the access transistors and the anti-fuse devices while masking channel regions corresponding to the anti-fuse device for inhibiting implantation of the high threshold voltage adjust implant.

20. The method of claim 13, further including exposing the second wells to a low threshold voltage adjust implant for adjusting a threshold voltage of the core transistors,

while inhibiting exposure of the antifuse transistors to the low threshold voltage adjust implant.

21. The method of claim 16, wherein the step of implanting the first wells includes
5 simultaneously implanting the first wells in an input/output circuit area.

22. The method of claim 21, wherein the step of forming a first oxide includes
simultaneously forming the first oxide of input/output transistors in the first wells of the
input/output circuit area.

10

23. The method of claim 22, wherein the step of increasing includes depositing the
second oxide on the first oxide of the input/output transistors, the combination of the first
oxide and the second oxide forming a thick gate oxide of the input/output transistors.

15 24. The method of claim 22, wherein the step of exposing includes exposing the first
wells to a high threshold voltage adjust implant for adjusting a threshold voltage of the
access transistors, the anti-fuse devices and the input/output transistors.

25. The method of claim 24, further including exposing the second wells to a low
20 threshold voltage adjust implant for adjusting a threshold voltage of the core transistors.

26. A memory device comprising:

anti-fuse memory cells in first wells of a memory array circuit area, the first wells
25 being one of n-type and p-type;

input/output transistors in the first wells of an input/output area; and,

core transistors in second wells in a core circuit area, the second wells being a same
30 type as the first wells, but having a different profile than the first wells.

27. The memory device of claim 26, wherein each of the anti-fuse memory cells includes
an access transistor and an anti-fuse device.

28. The memory device of claim 27, wherein the access transistor and the input/output transistors have gate oxides with a first thickness.

5 29. The memory device of claim 28, wherein the anti-fuse device and the core transistors have gate oxides with a second thickness smaller than the first thickness.

30. The memory device of claim 29, wherein the access transistor and the input/output transistors have a first threshold voltage, the anti-fuse device has a second threshold voltage
10 less than the first threshold voltage, and the core transistors have a third threshold voltage less than the first threshold voltage and different from the second threshold voltage.

1/15

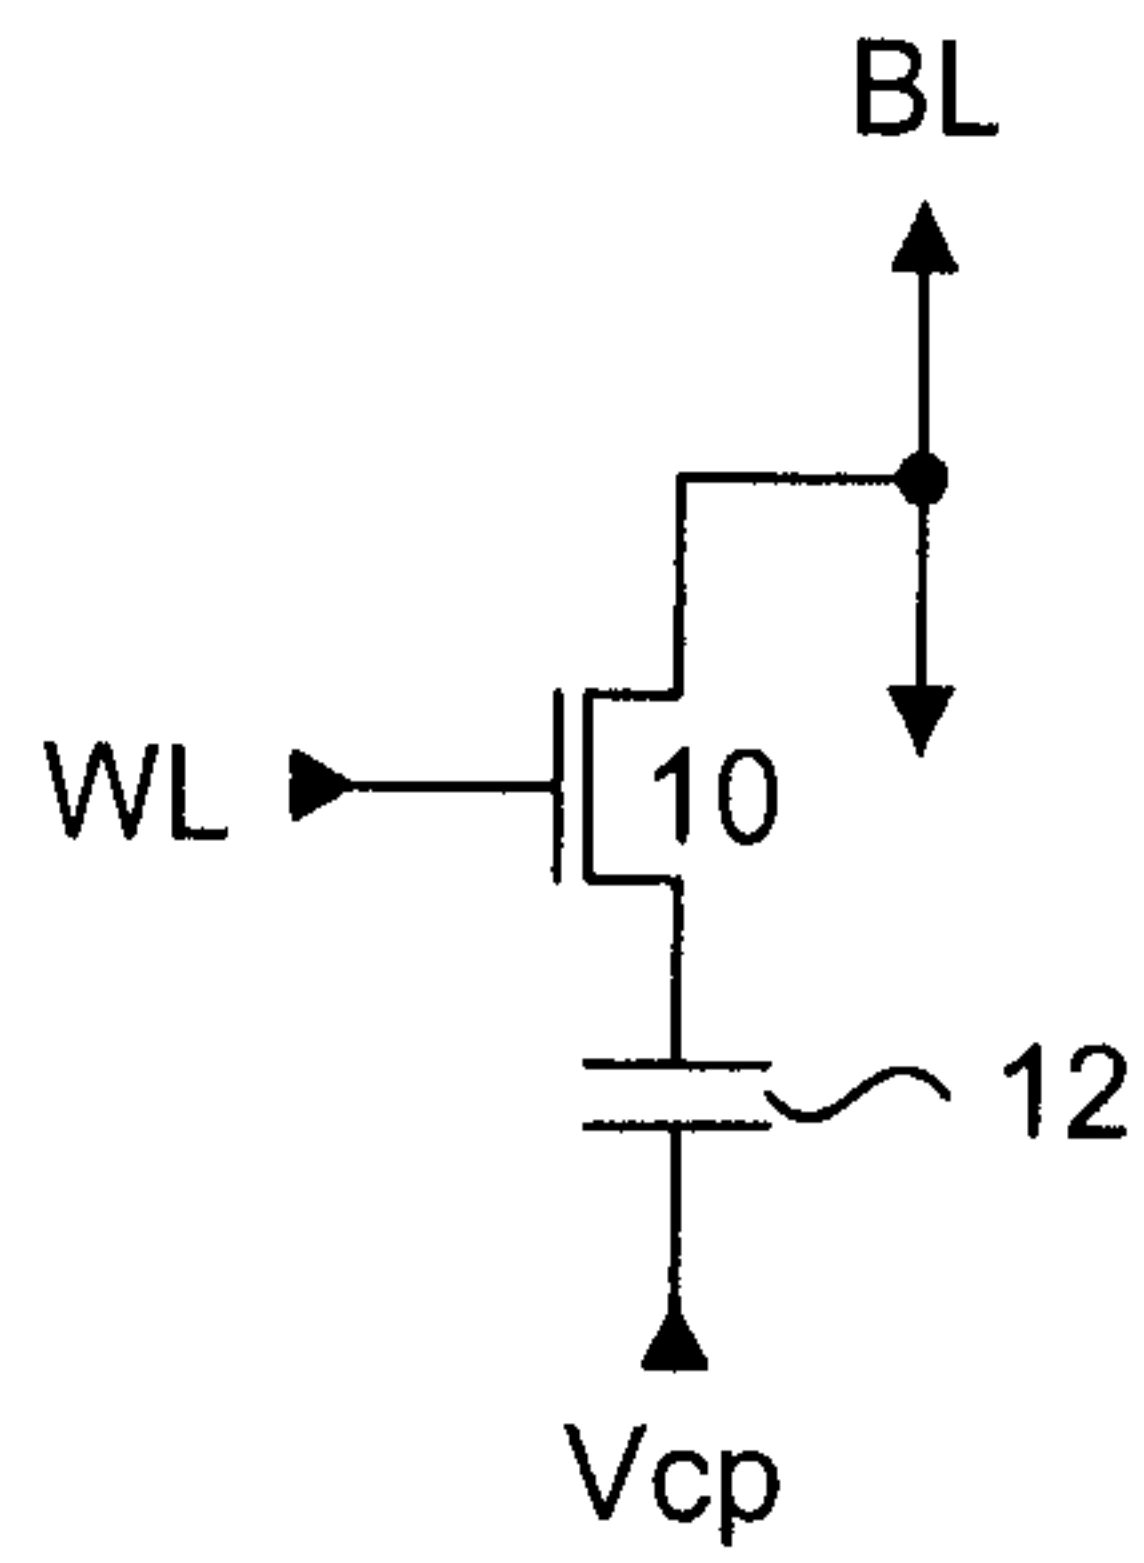


FIG. 1 (Prior Art)

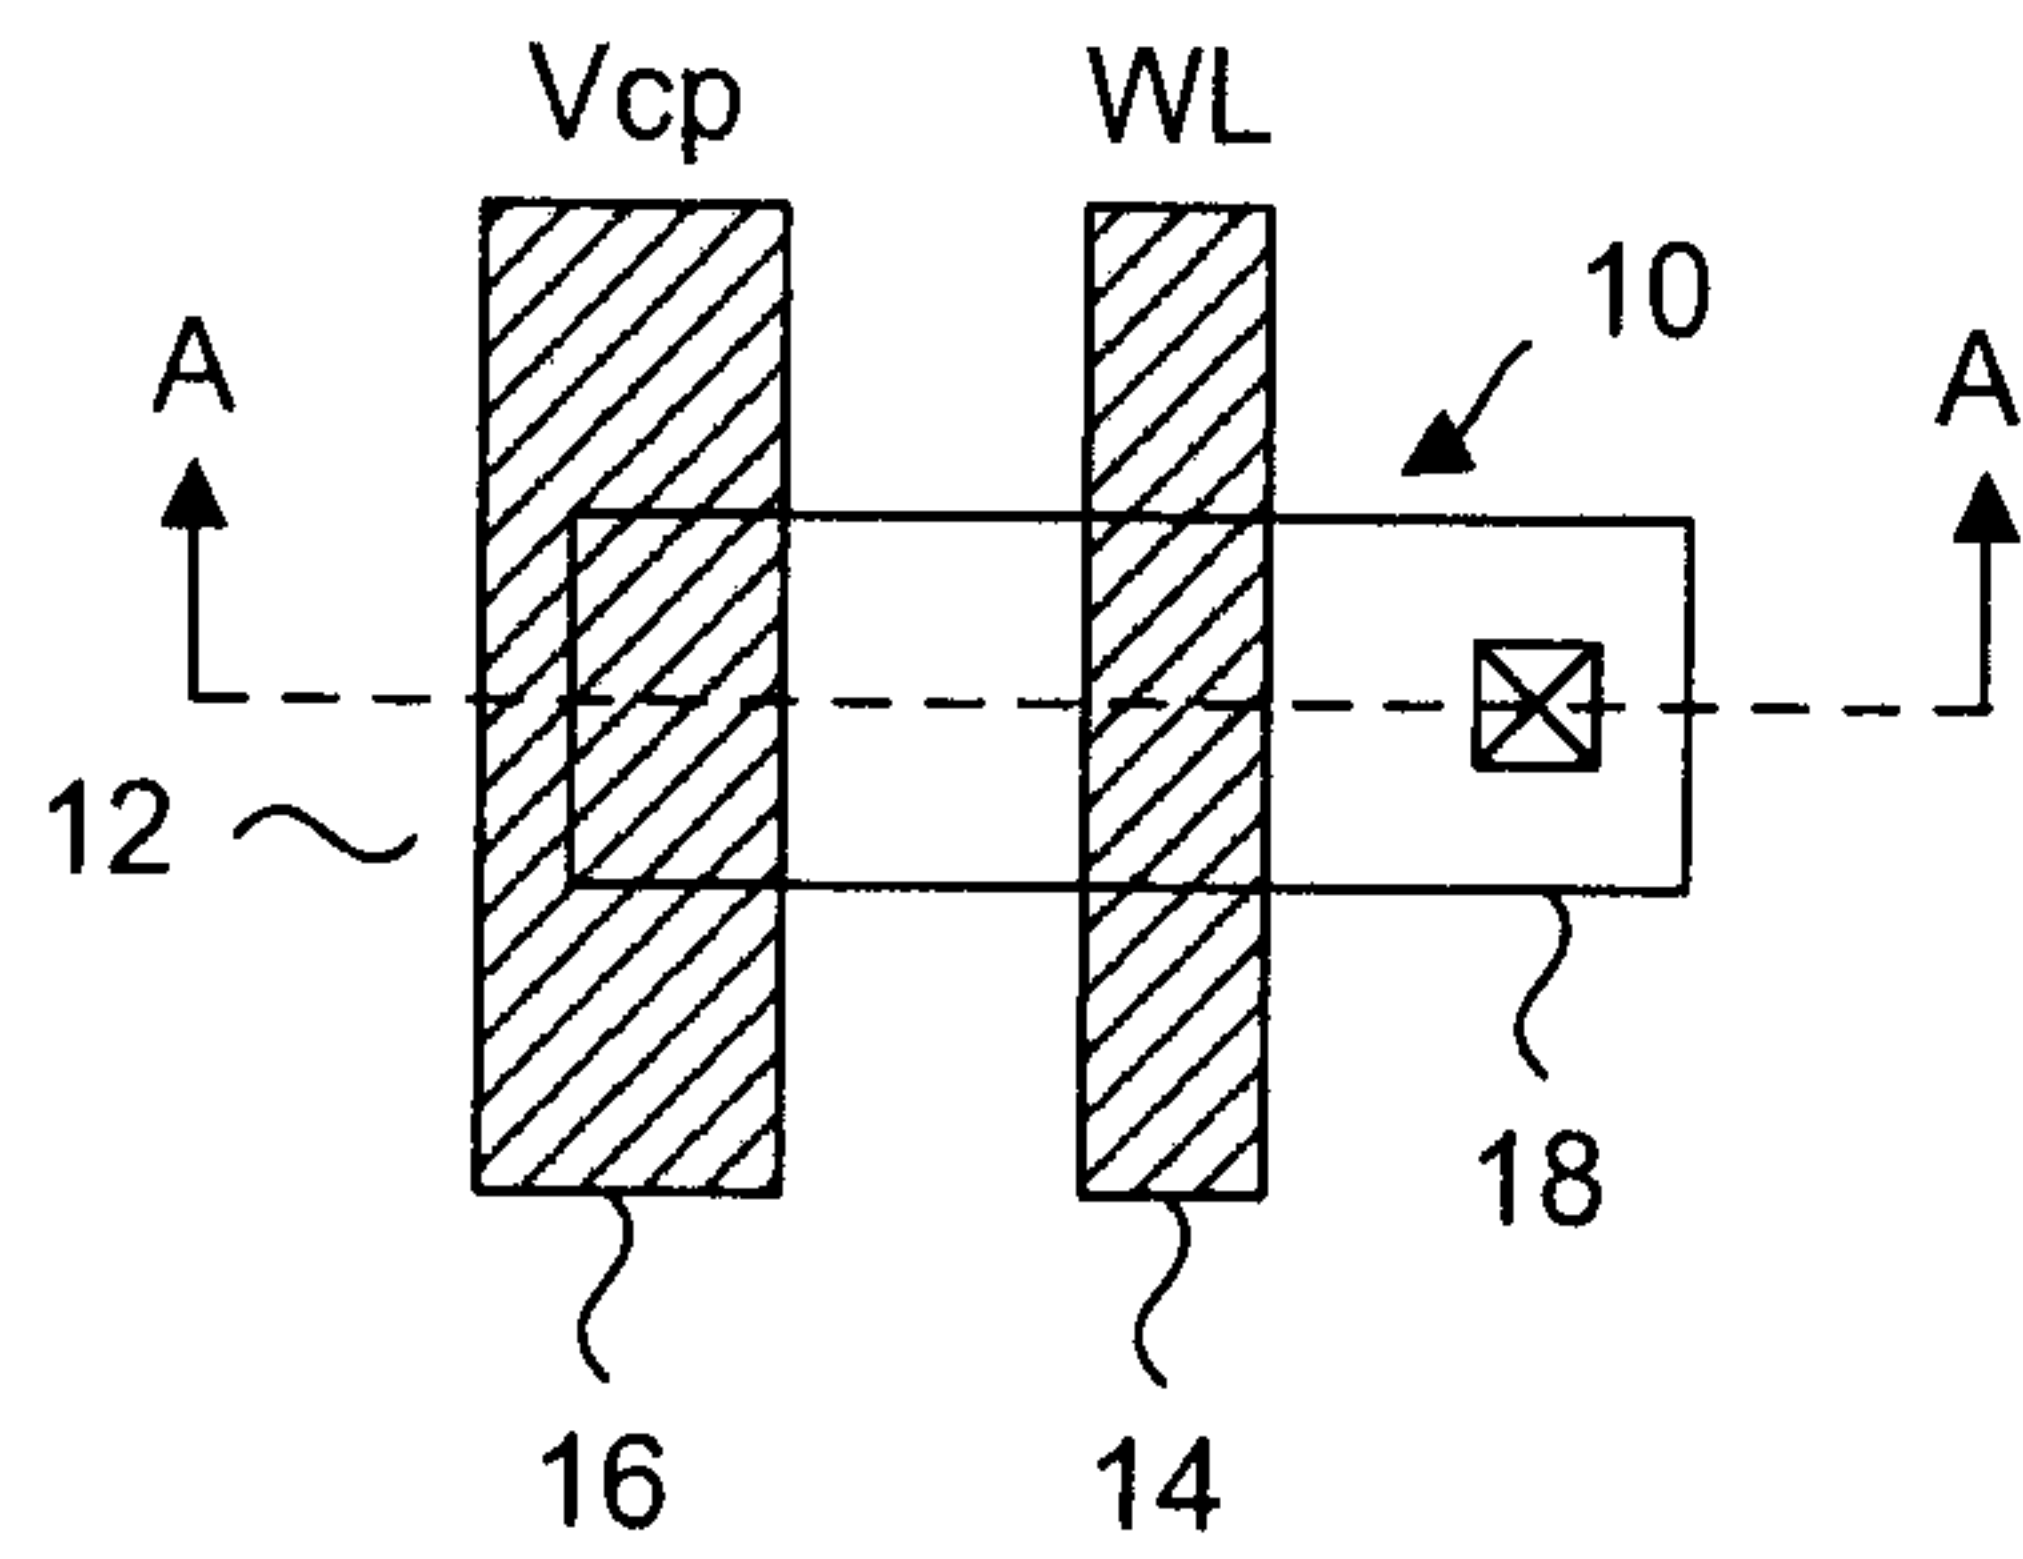


FIG. 2 (Prior Art)

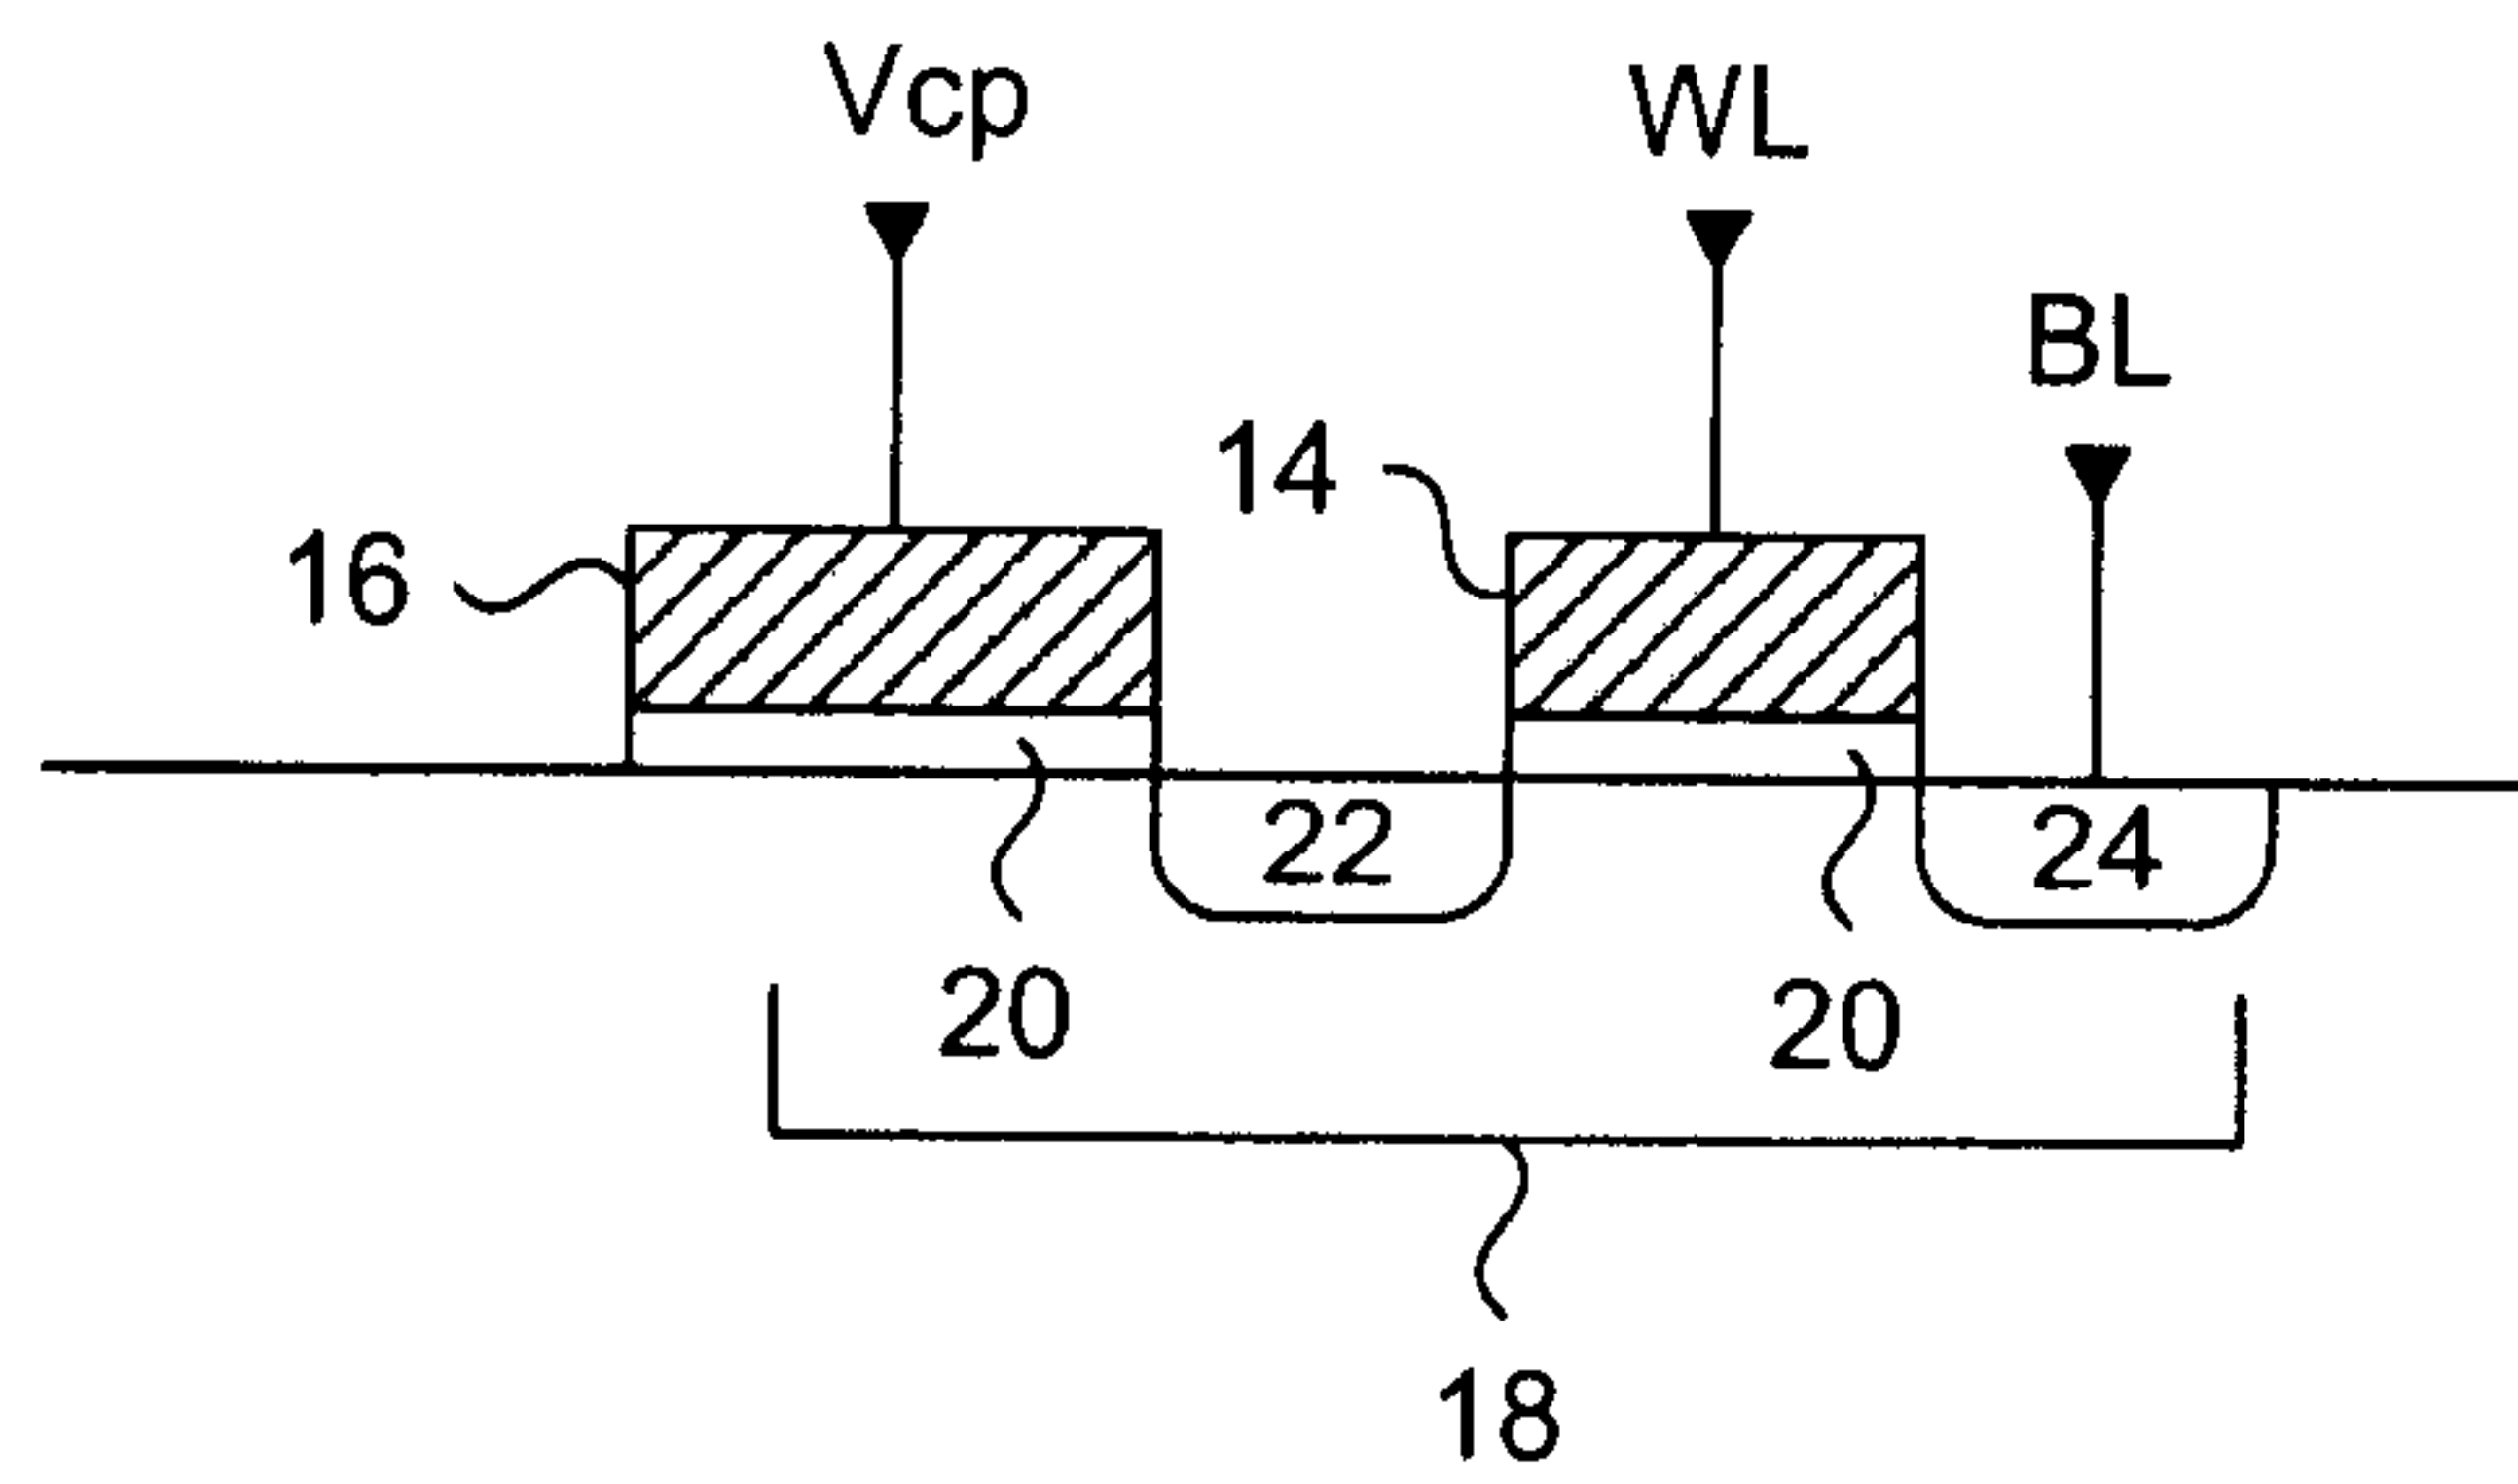


FIG. 3 (Prior Art)

2/15

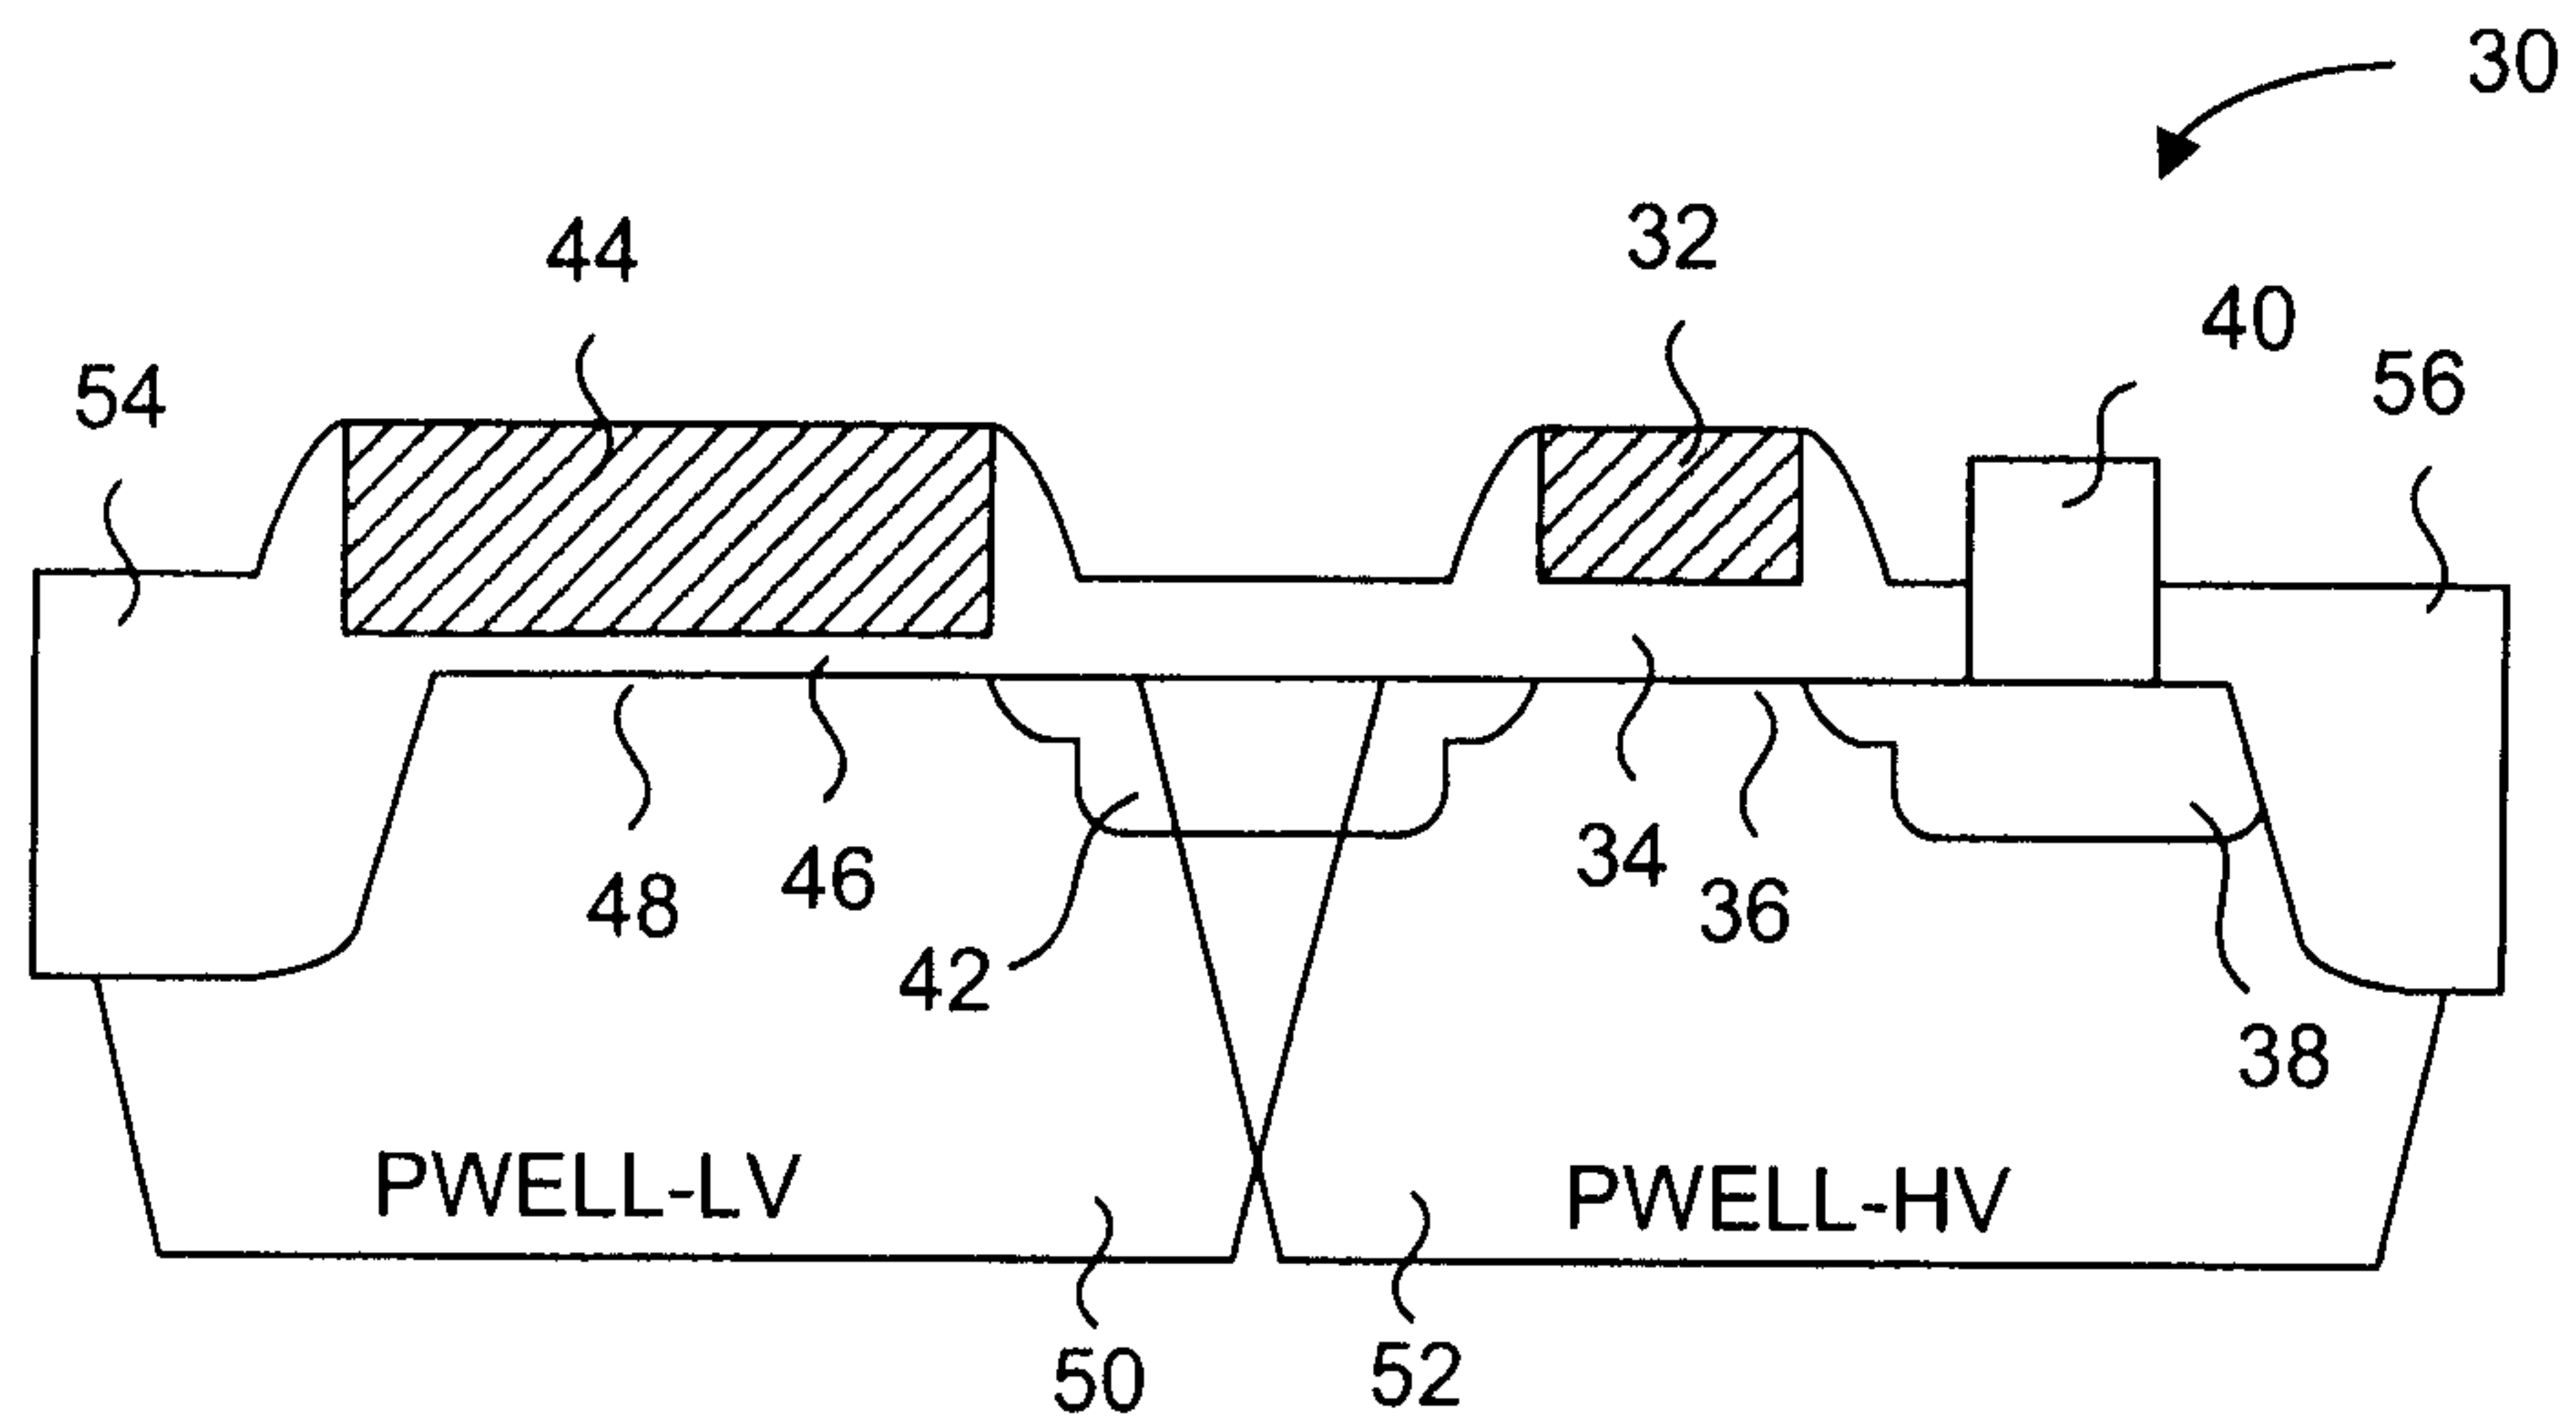


FIG. 4

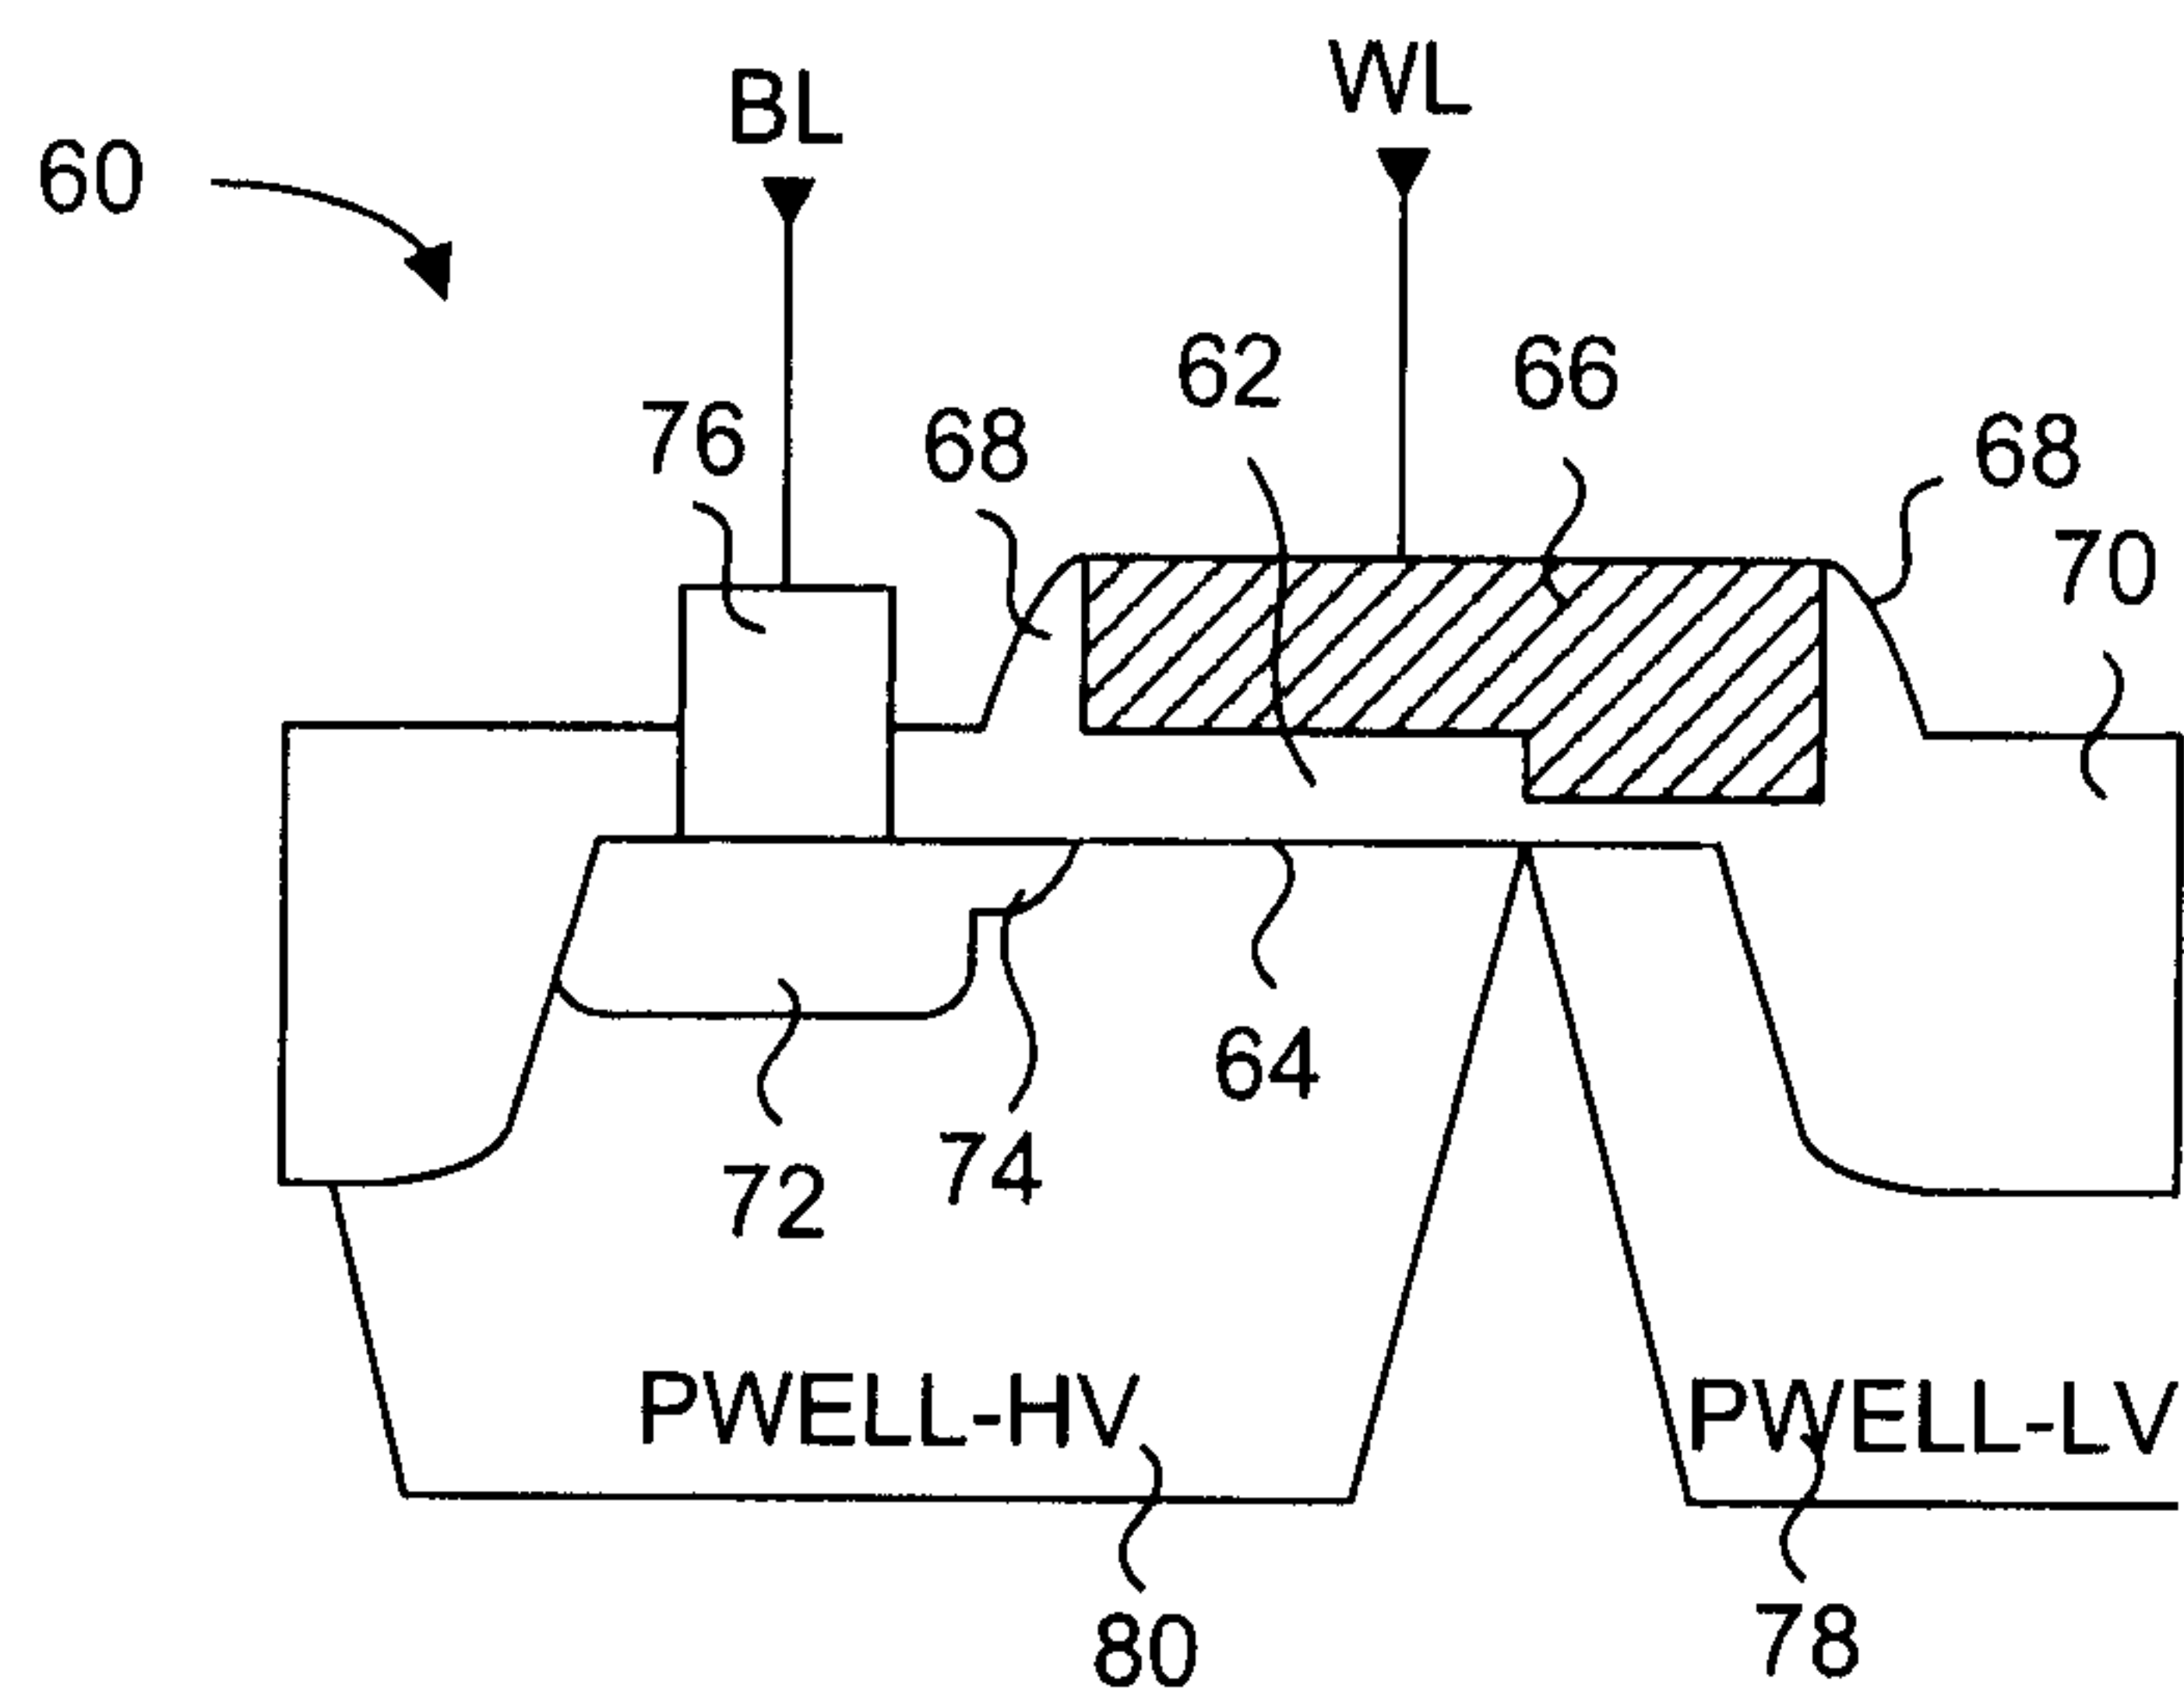


FIG. 5

3/15

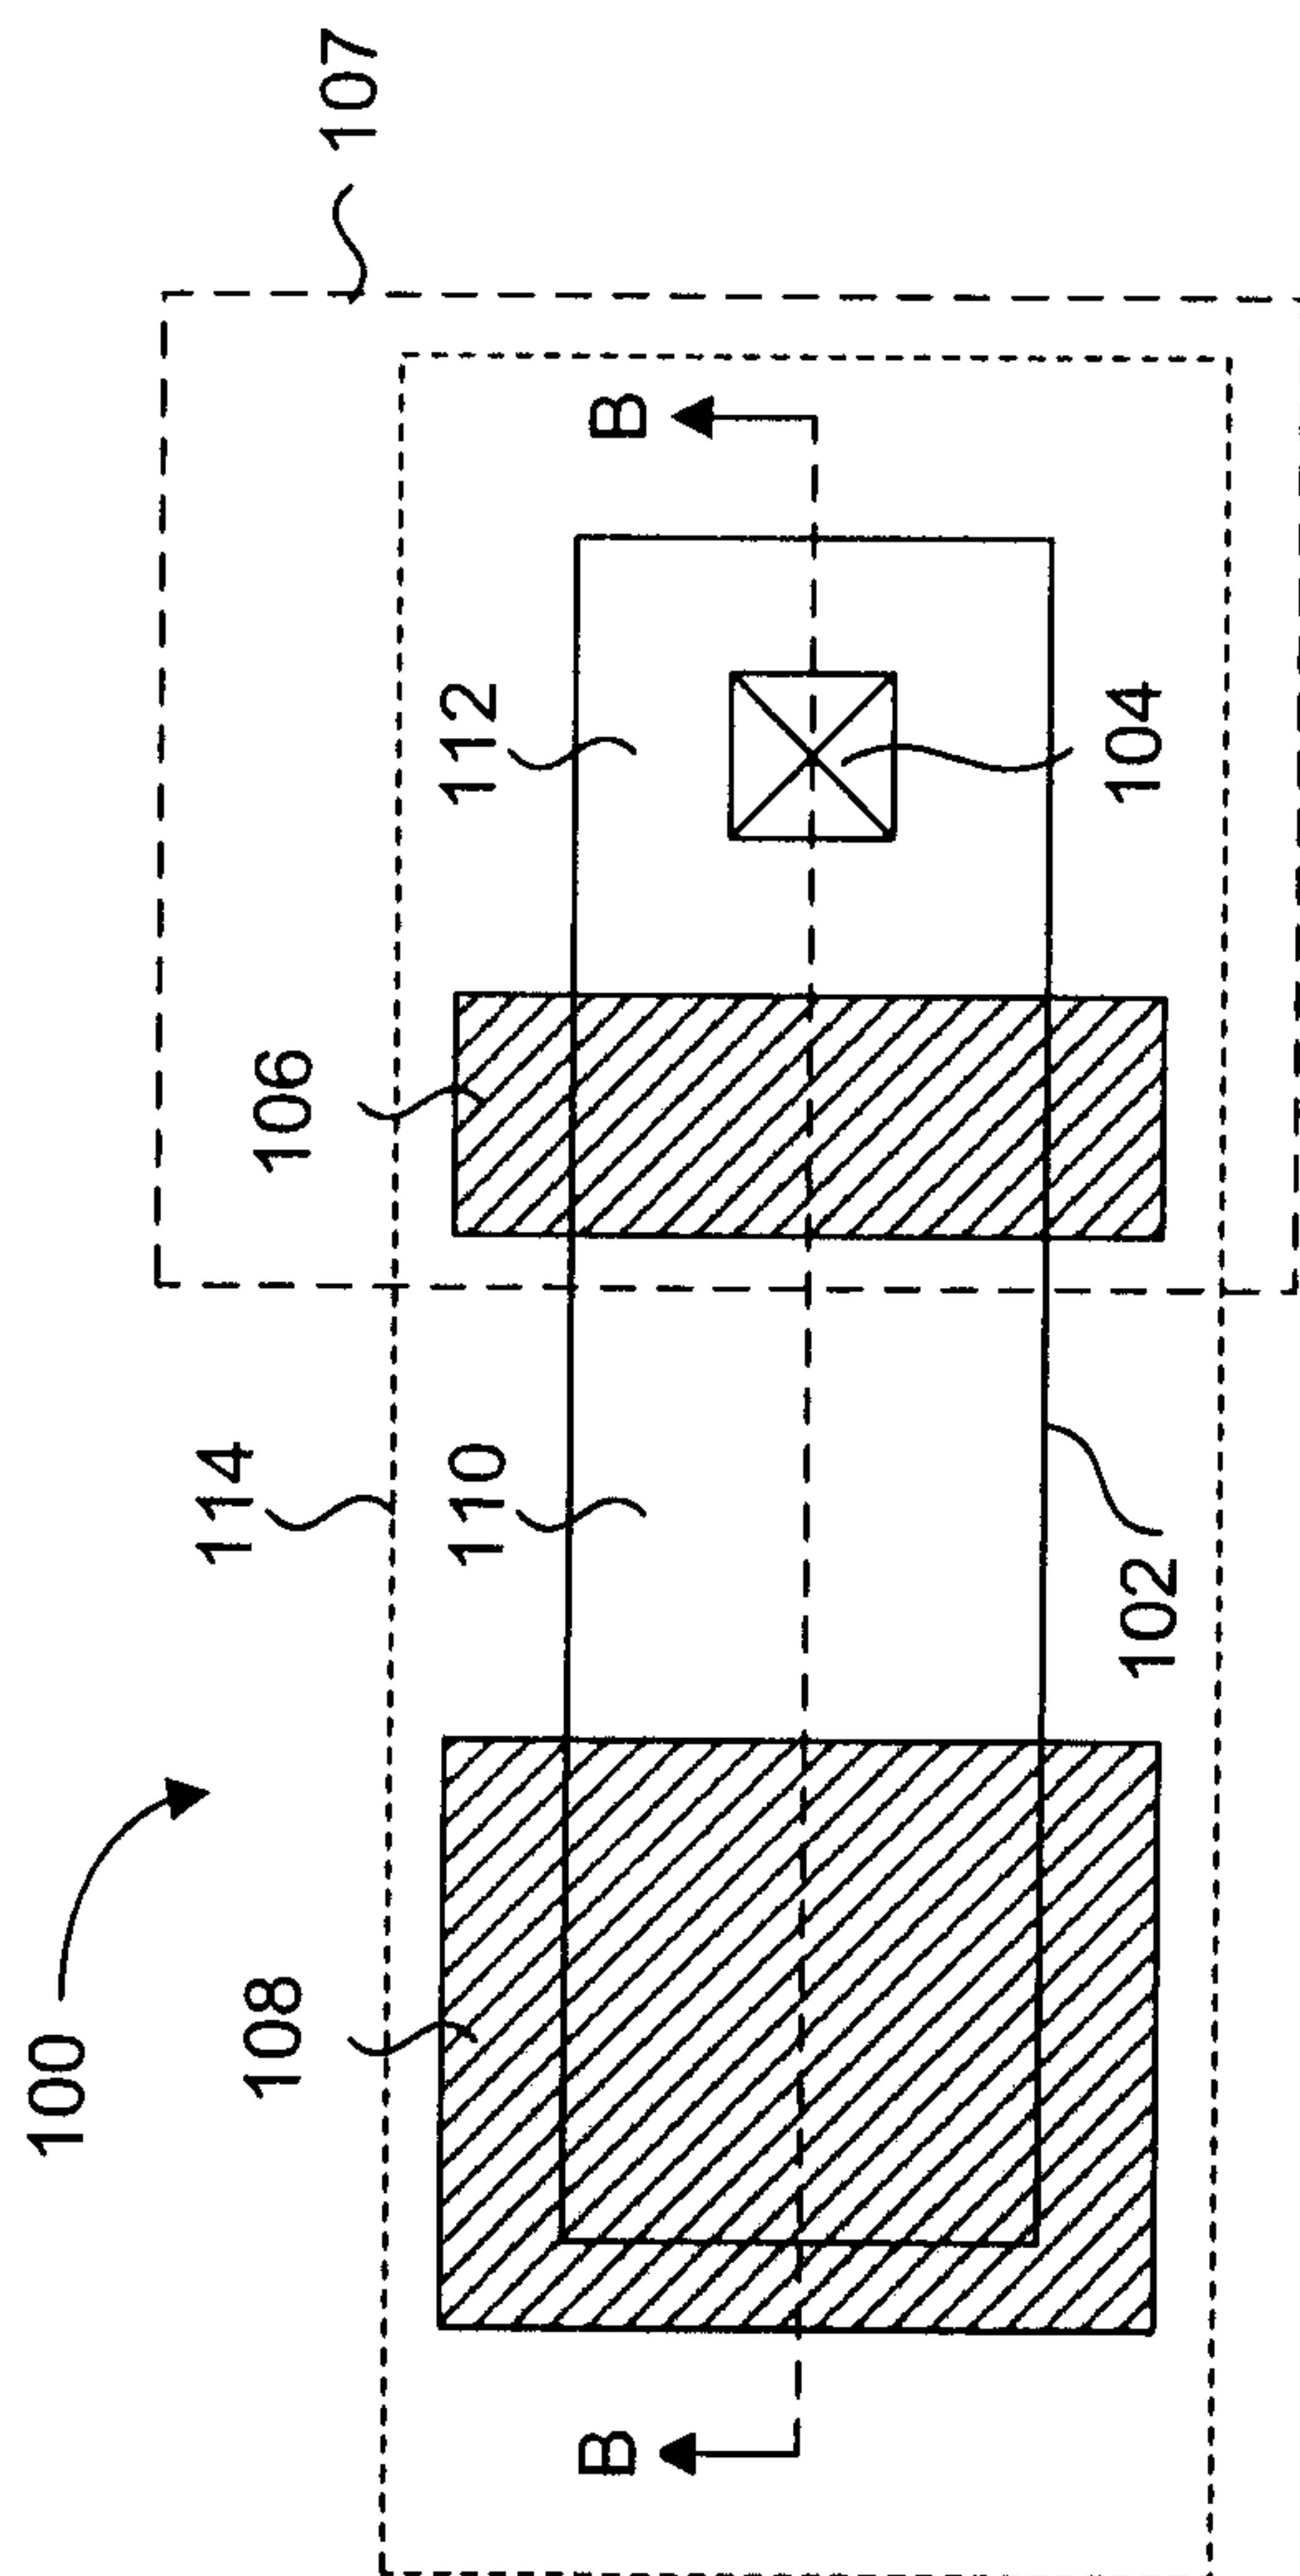


FIG. 6A

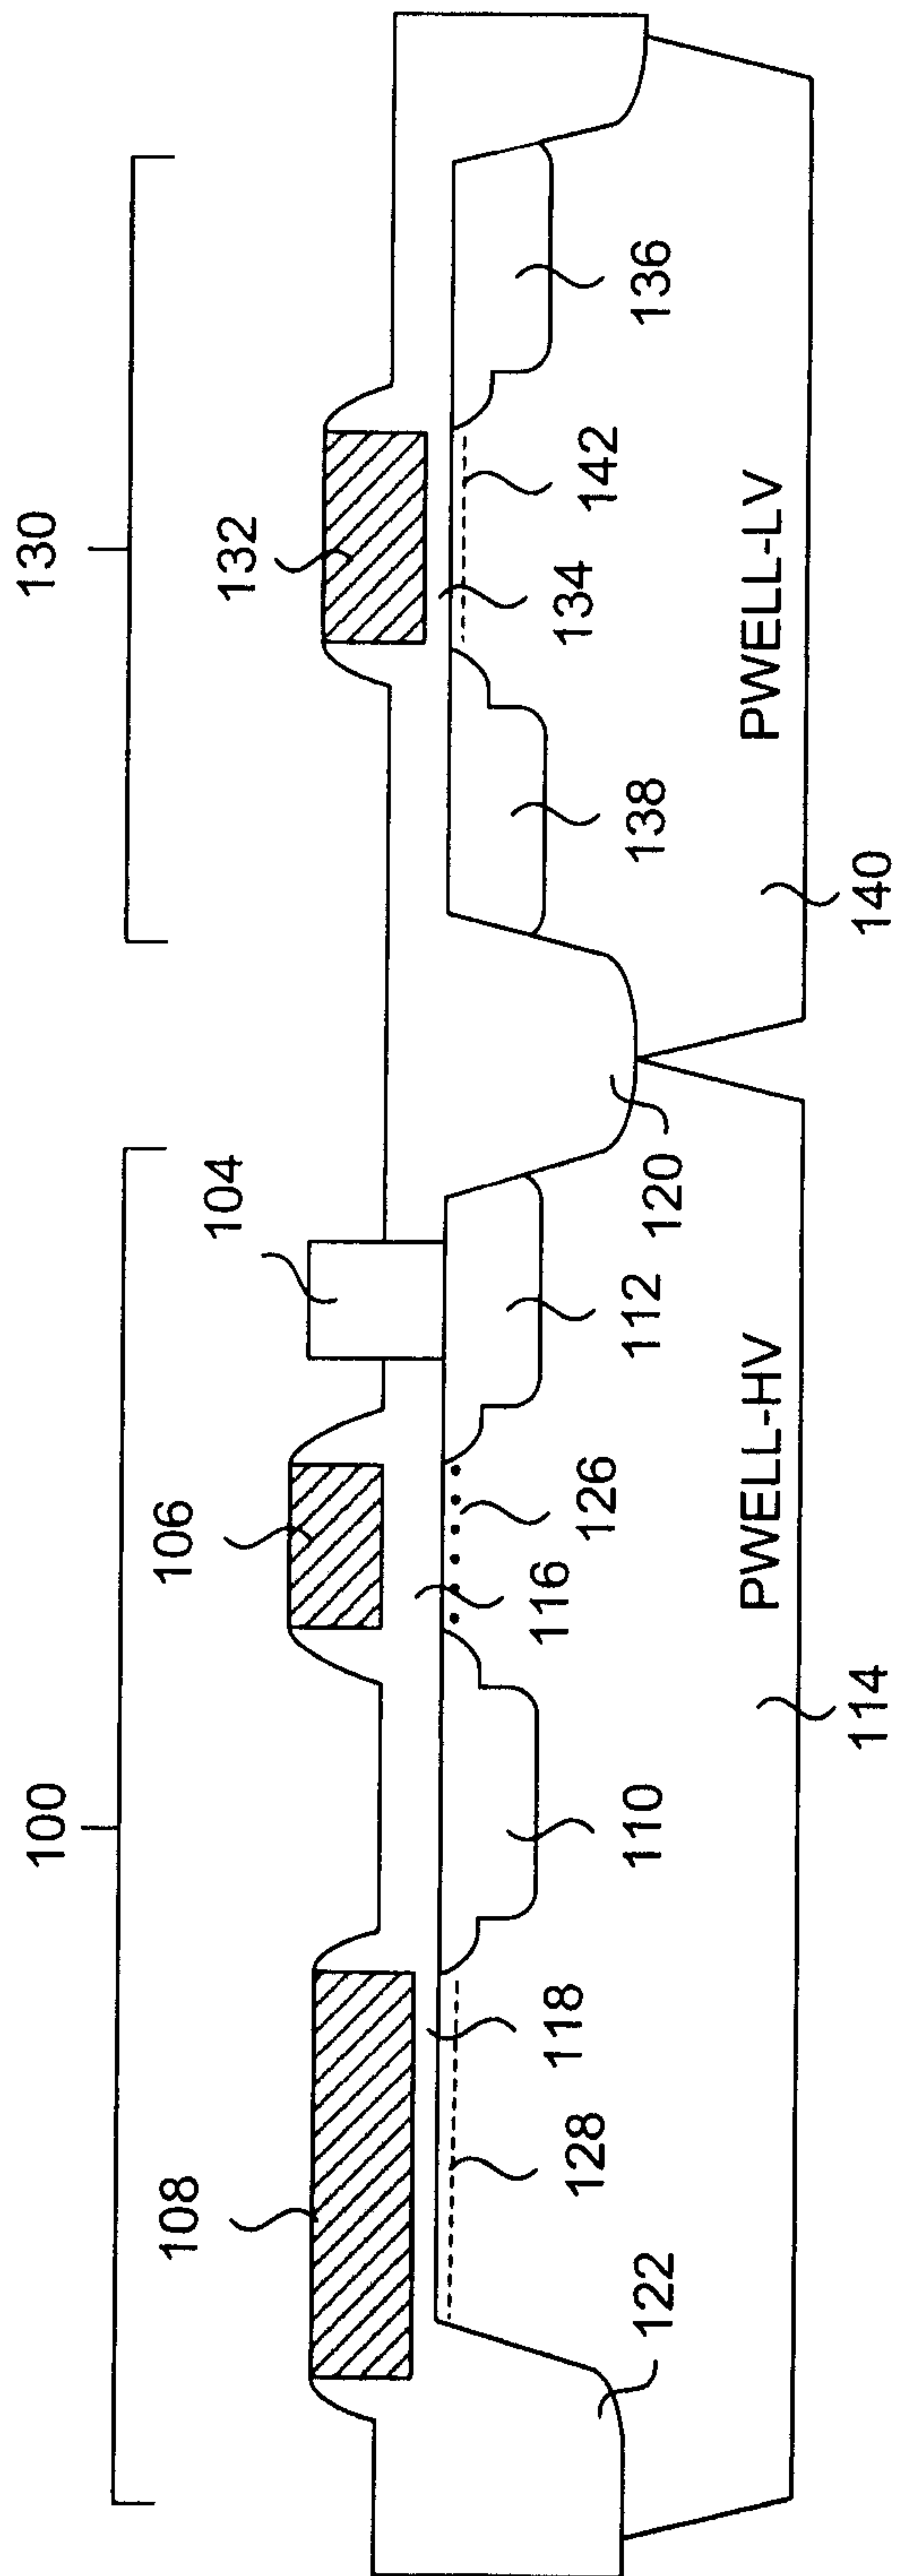


FIG. 6B

4/15

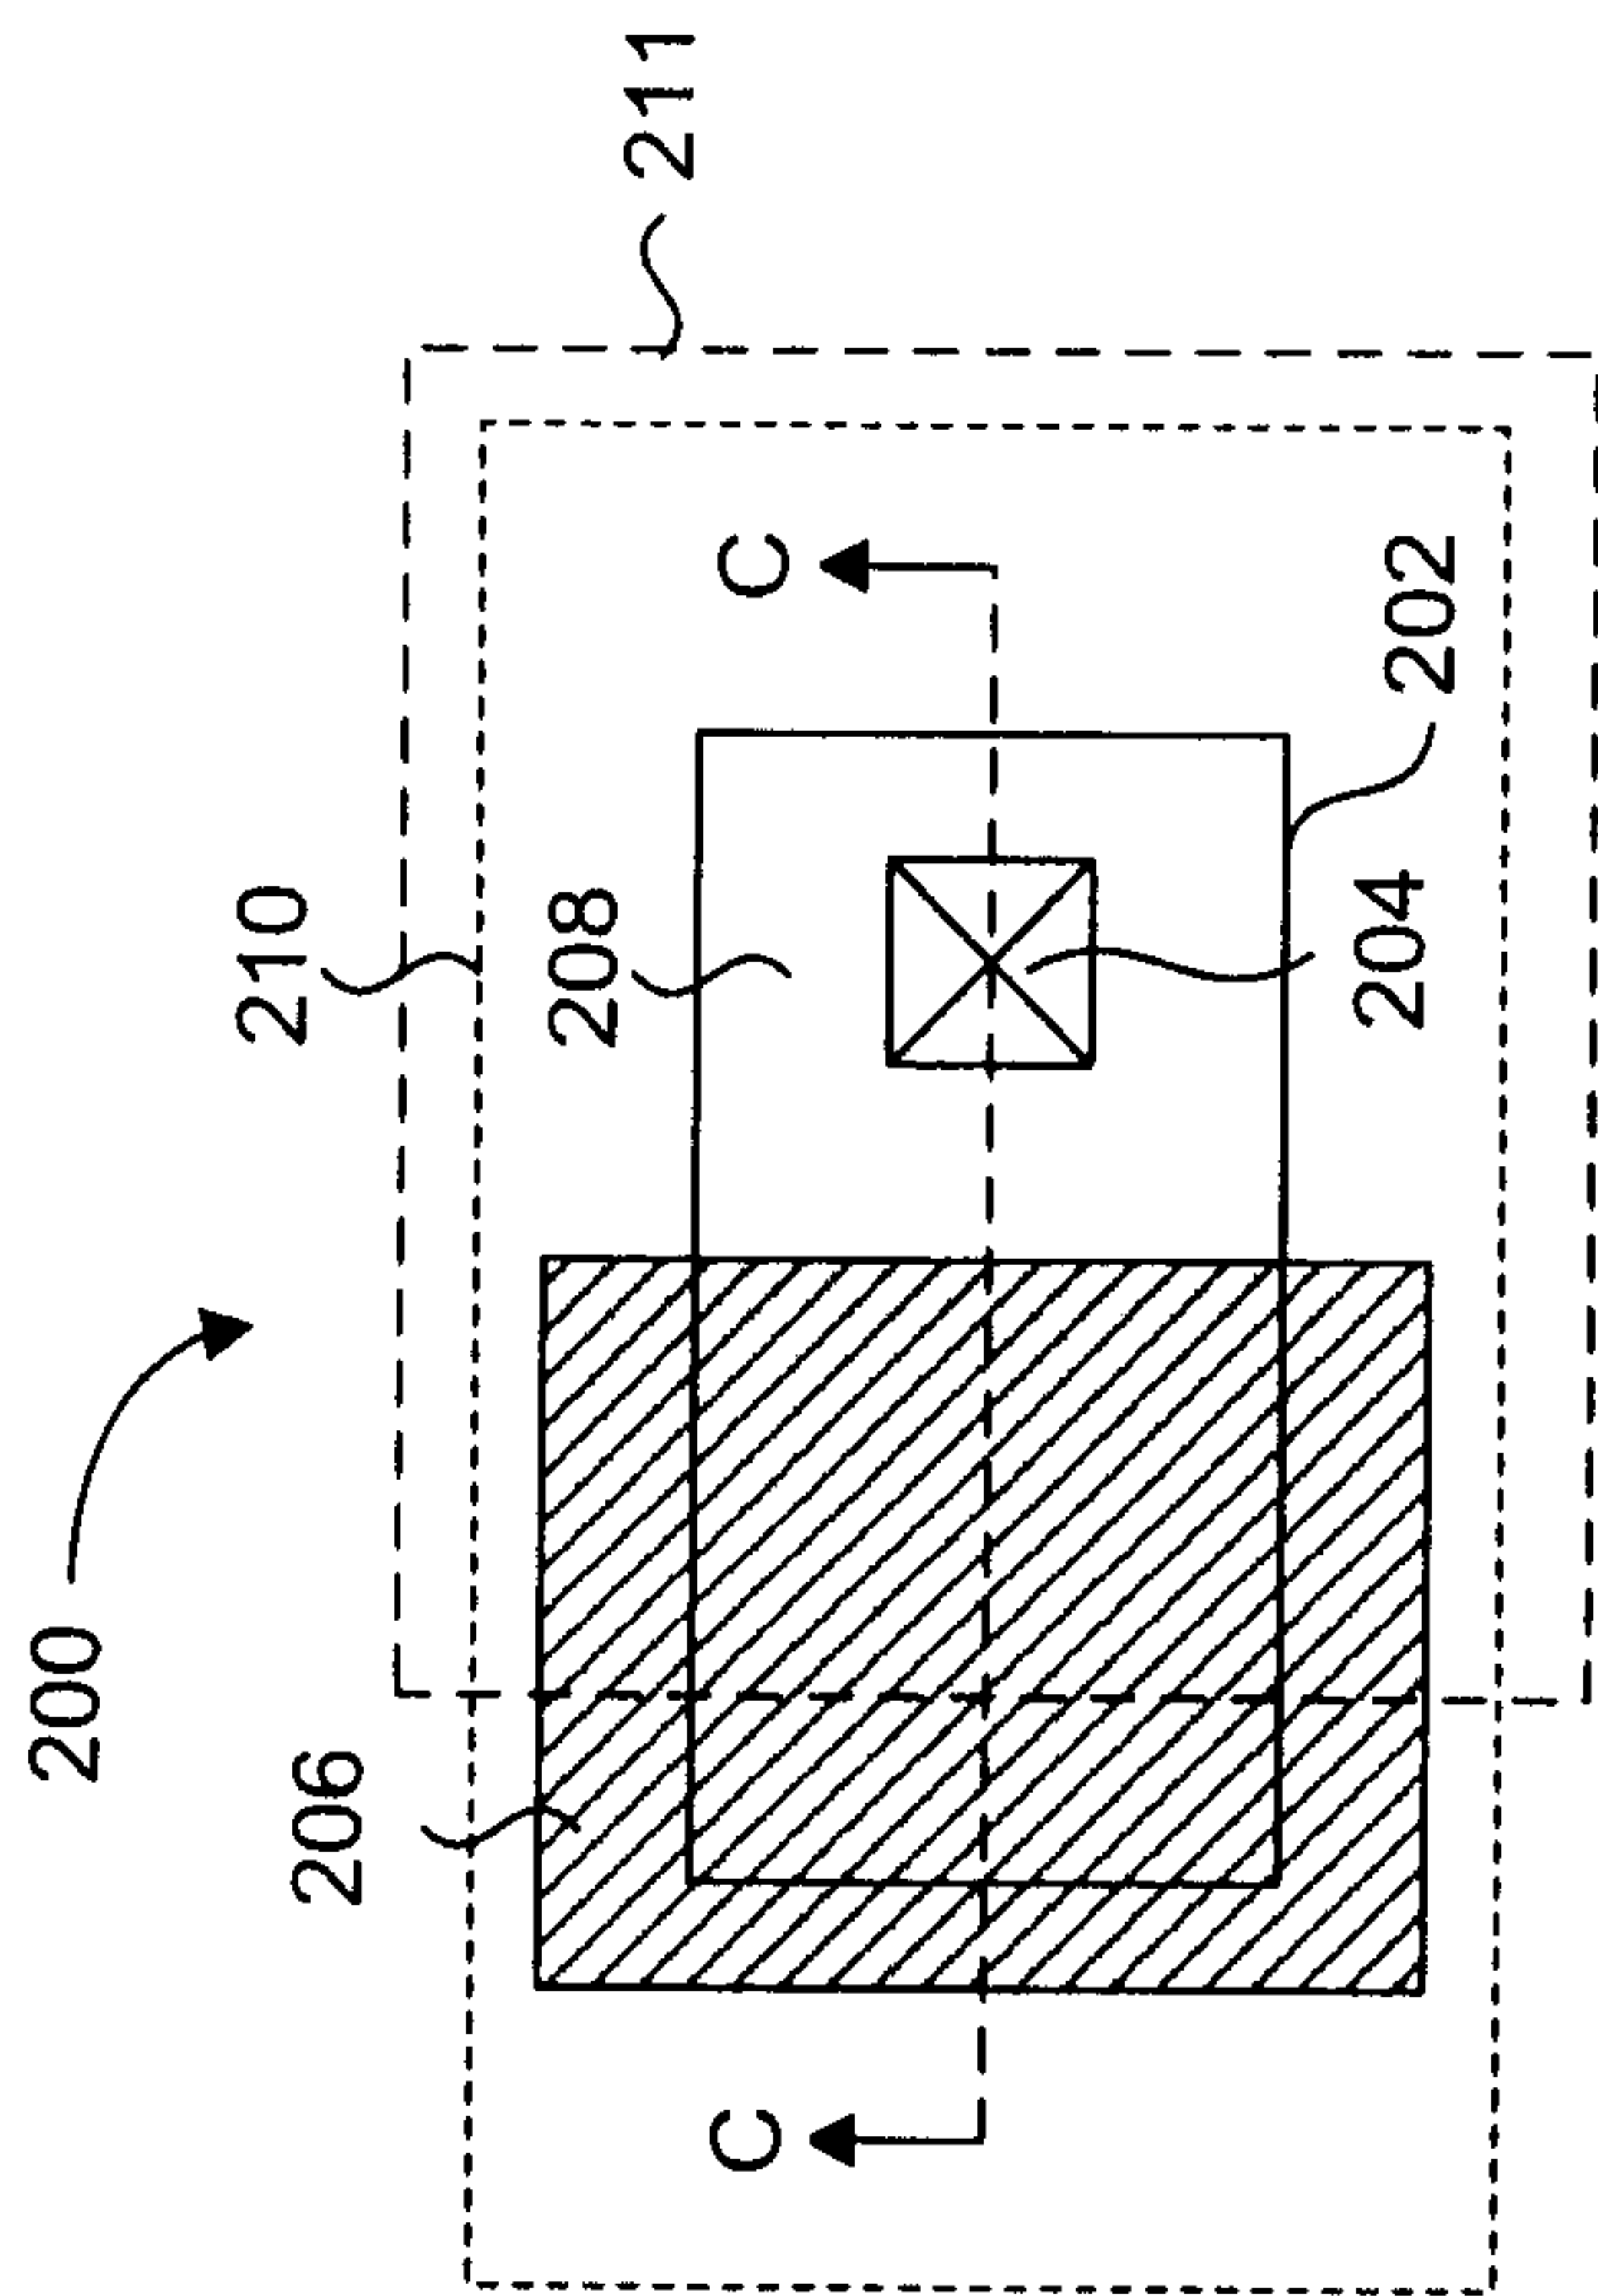


FIG. 7A

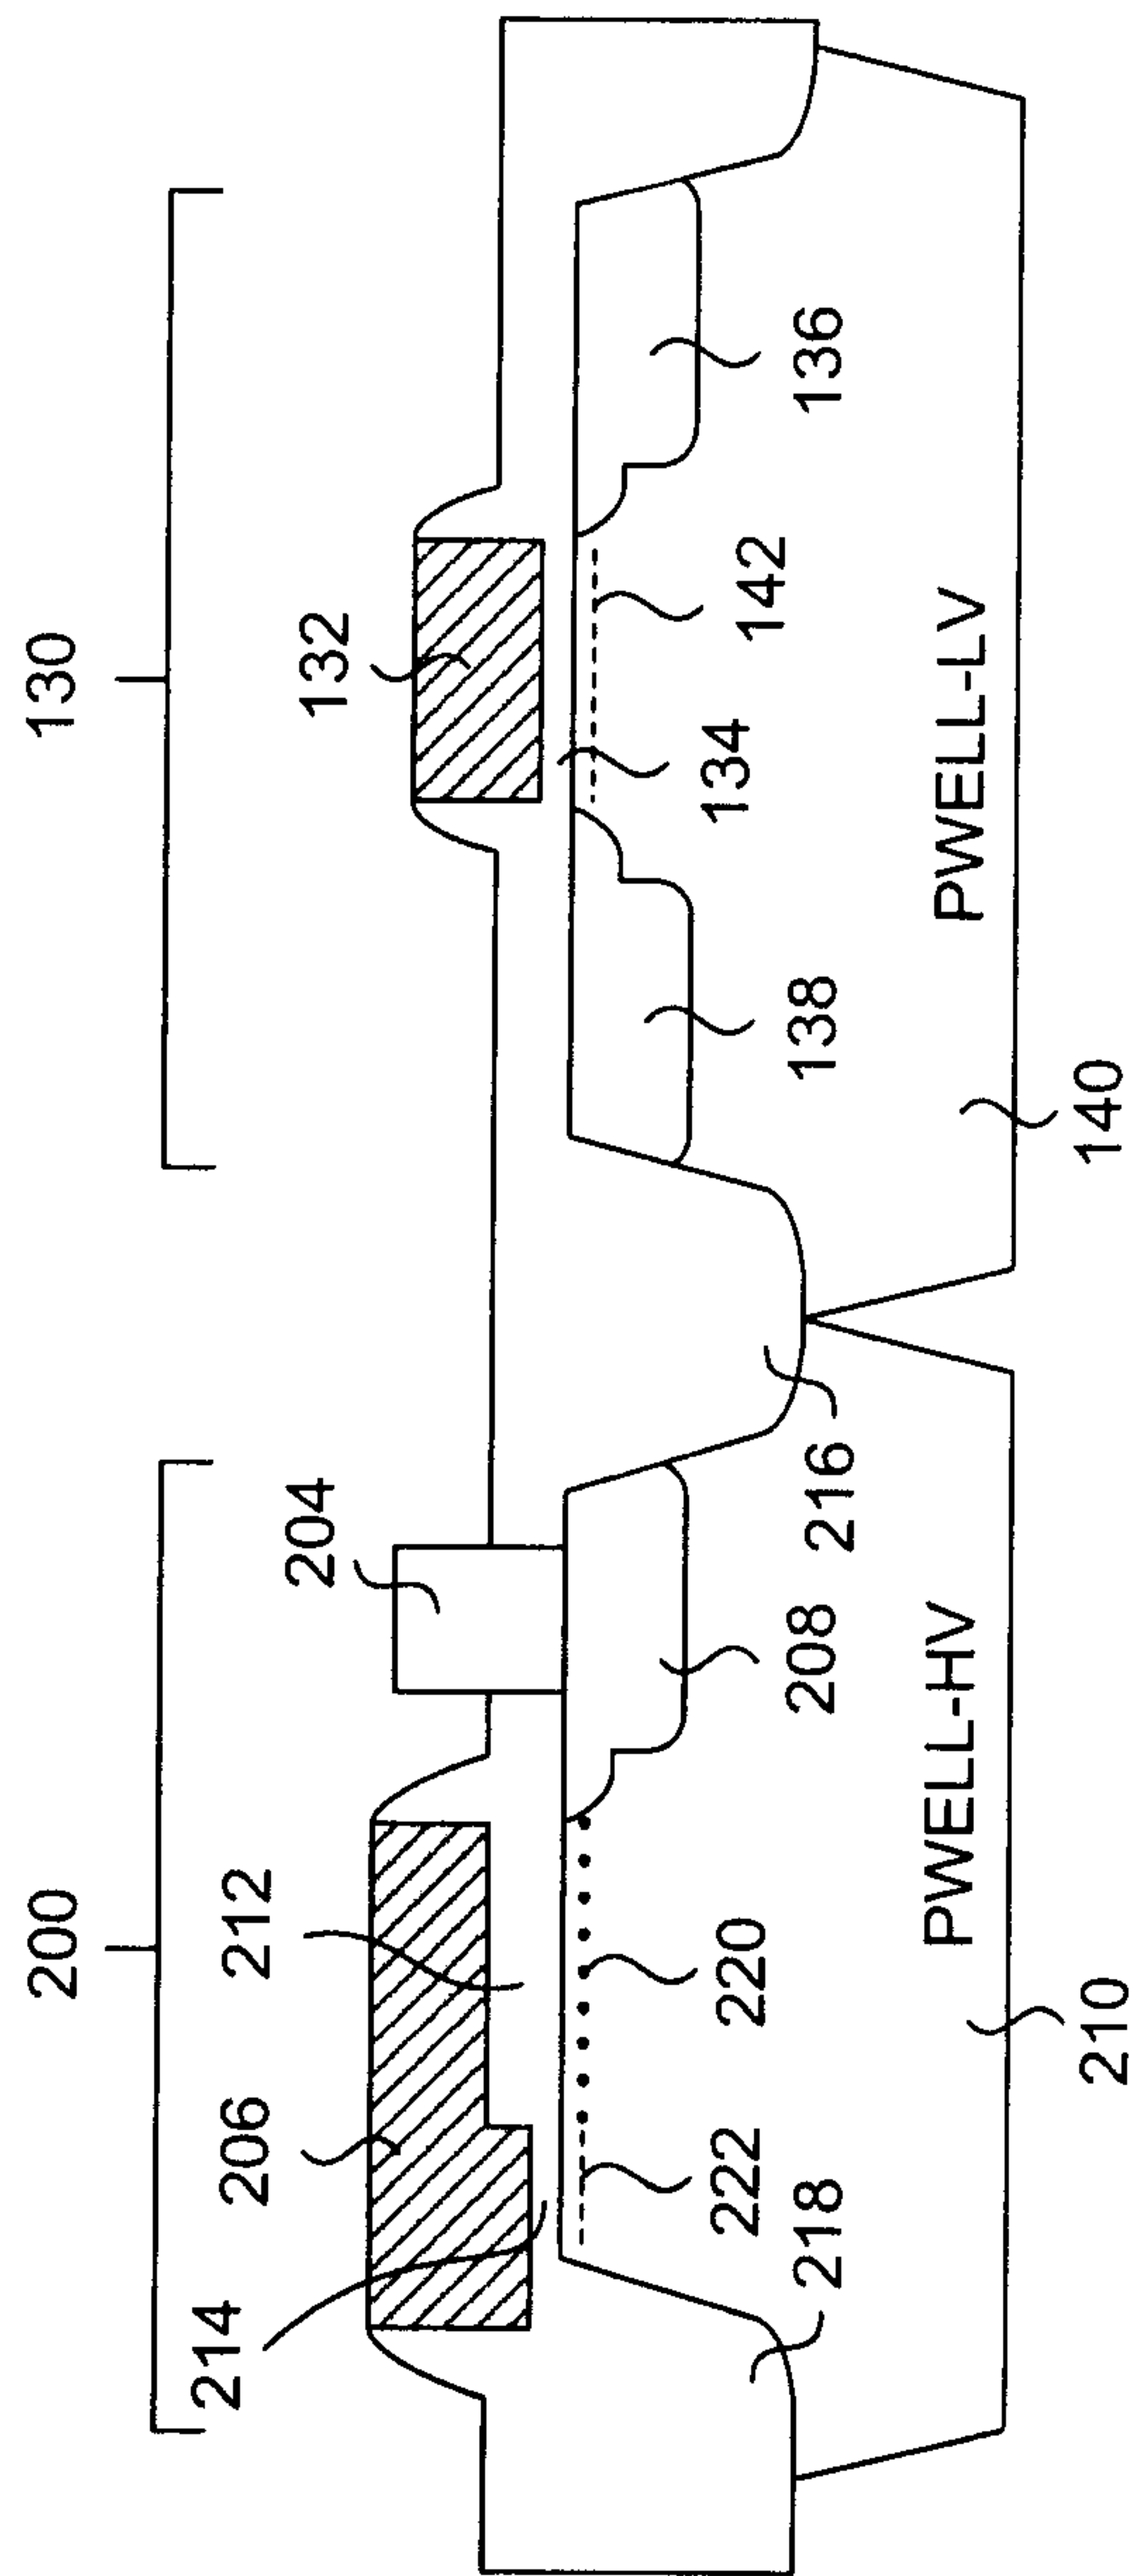


FIG. 7B

5/15

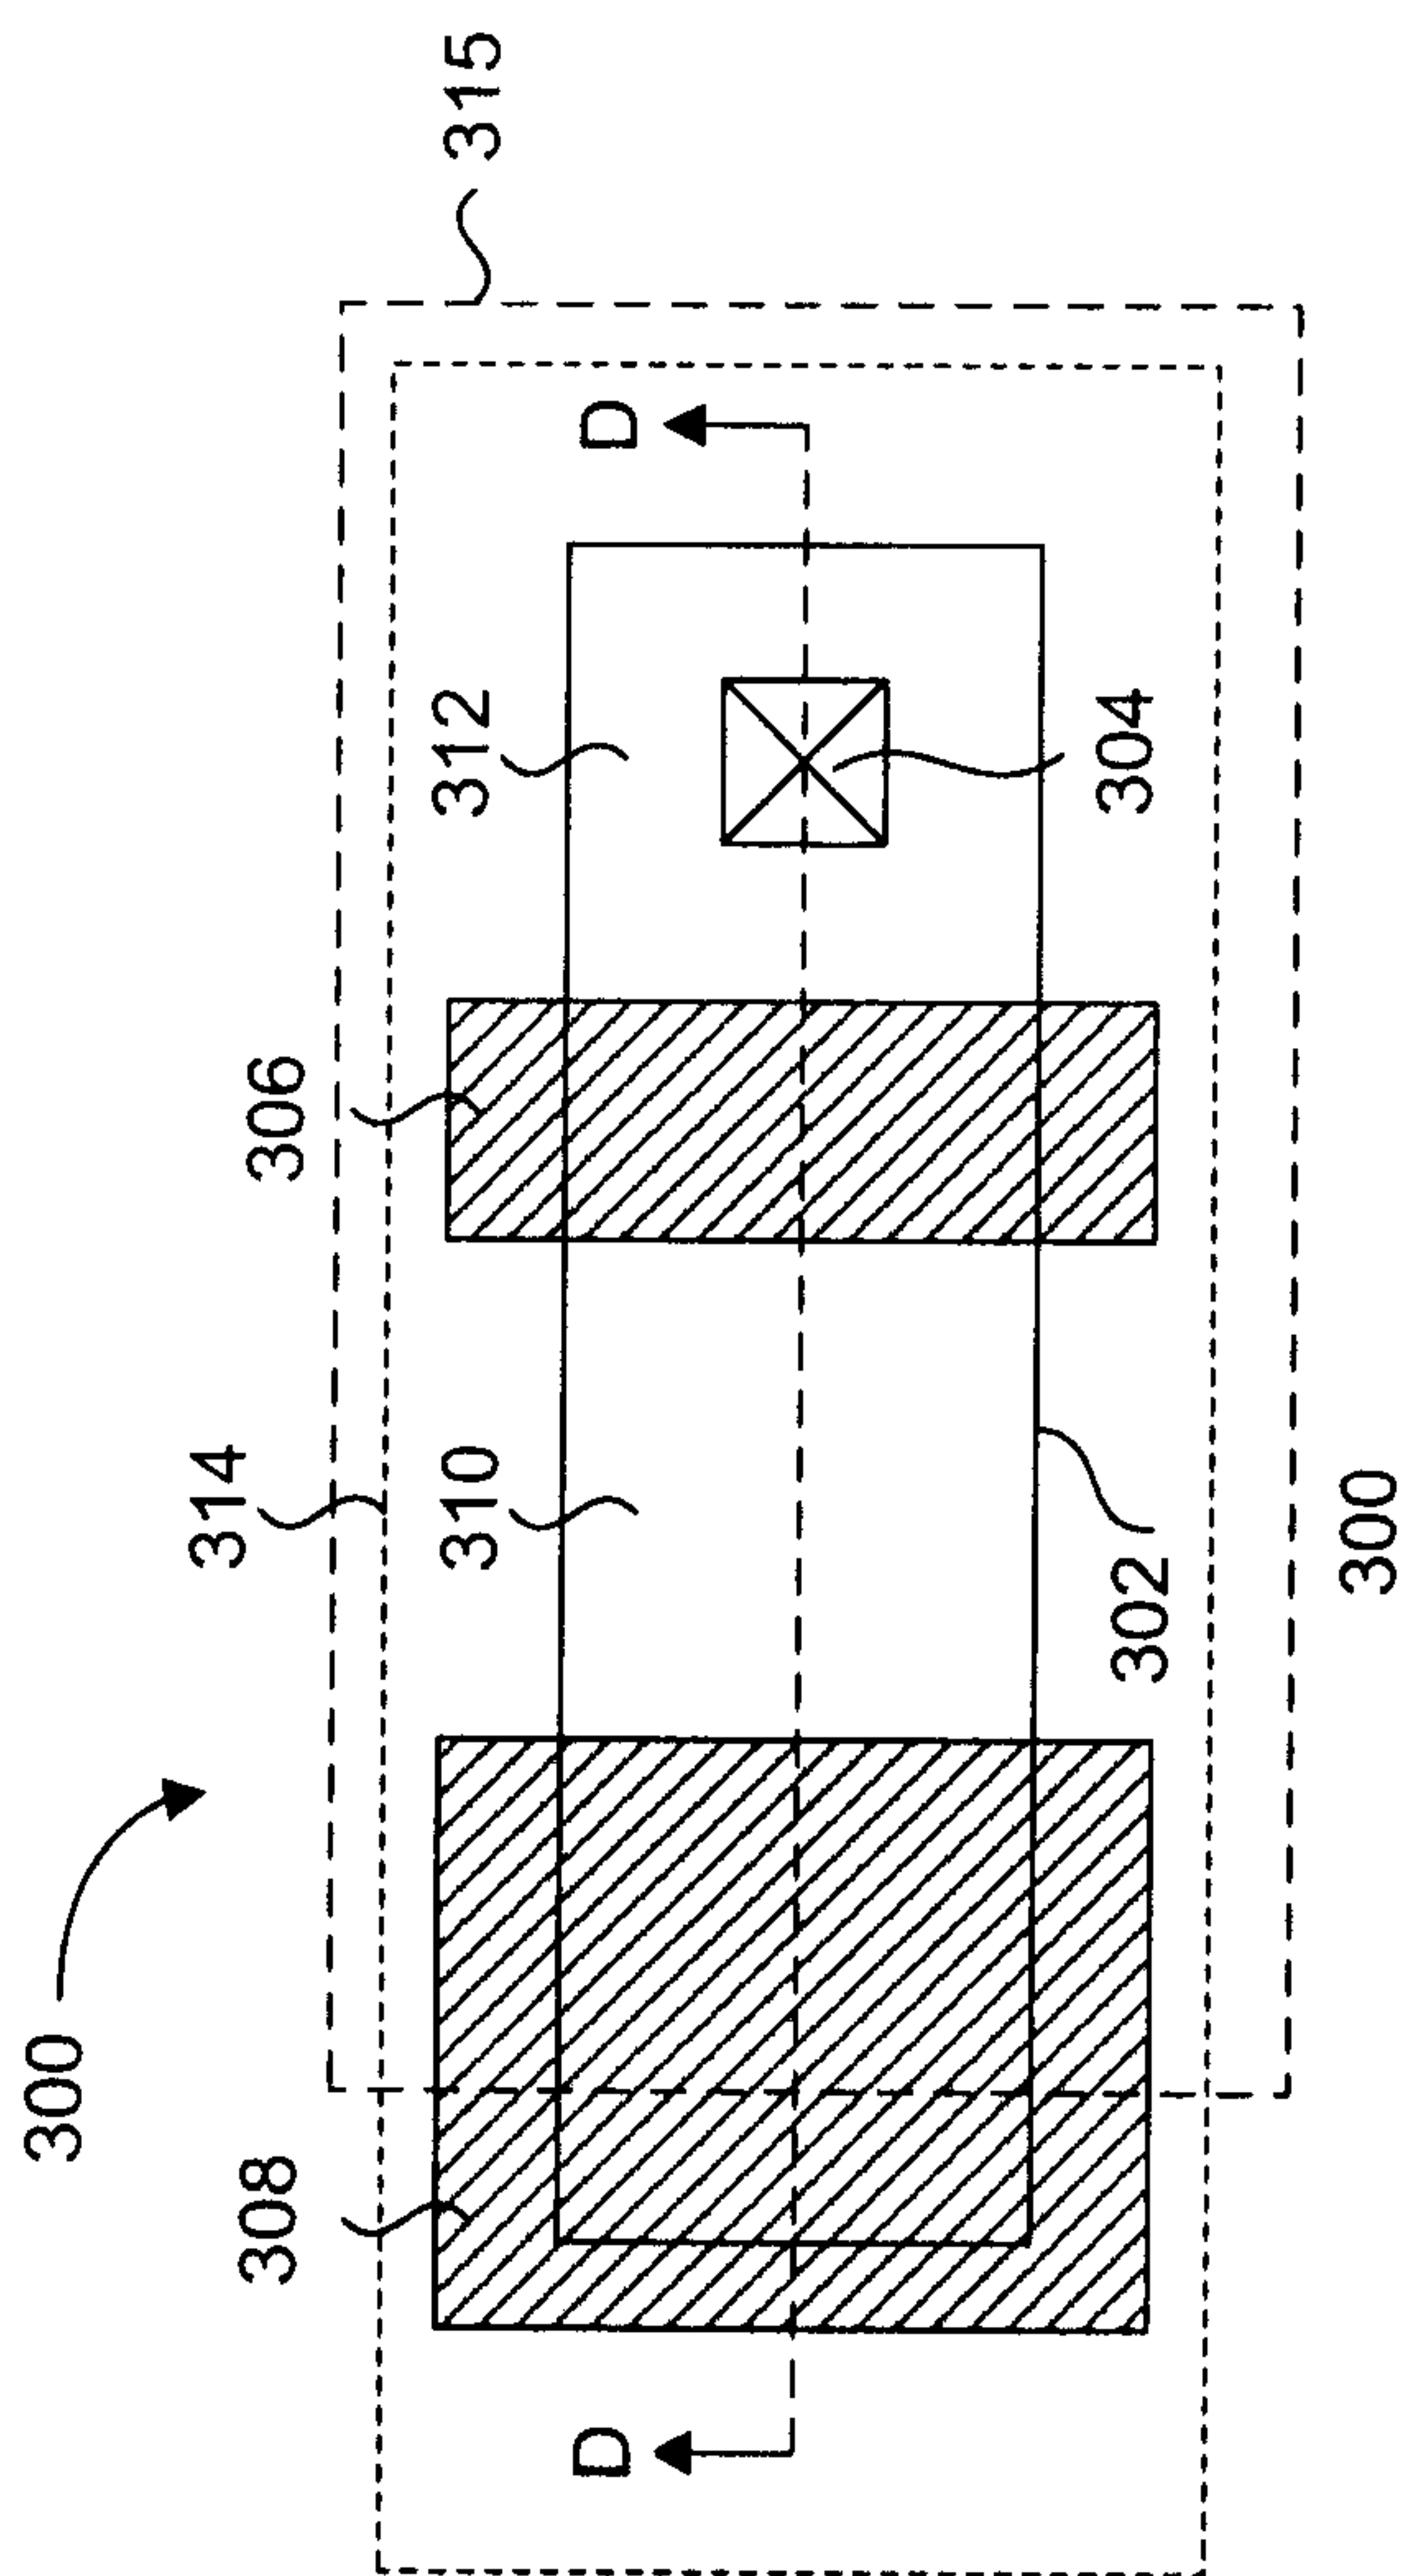


FIG. 8A

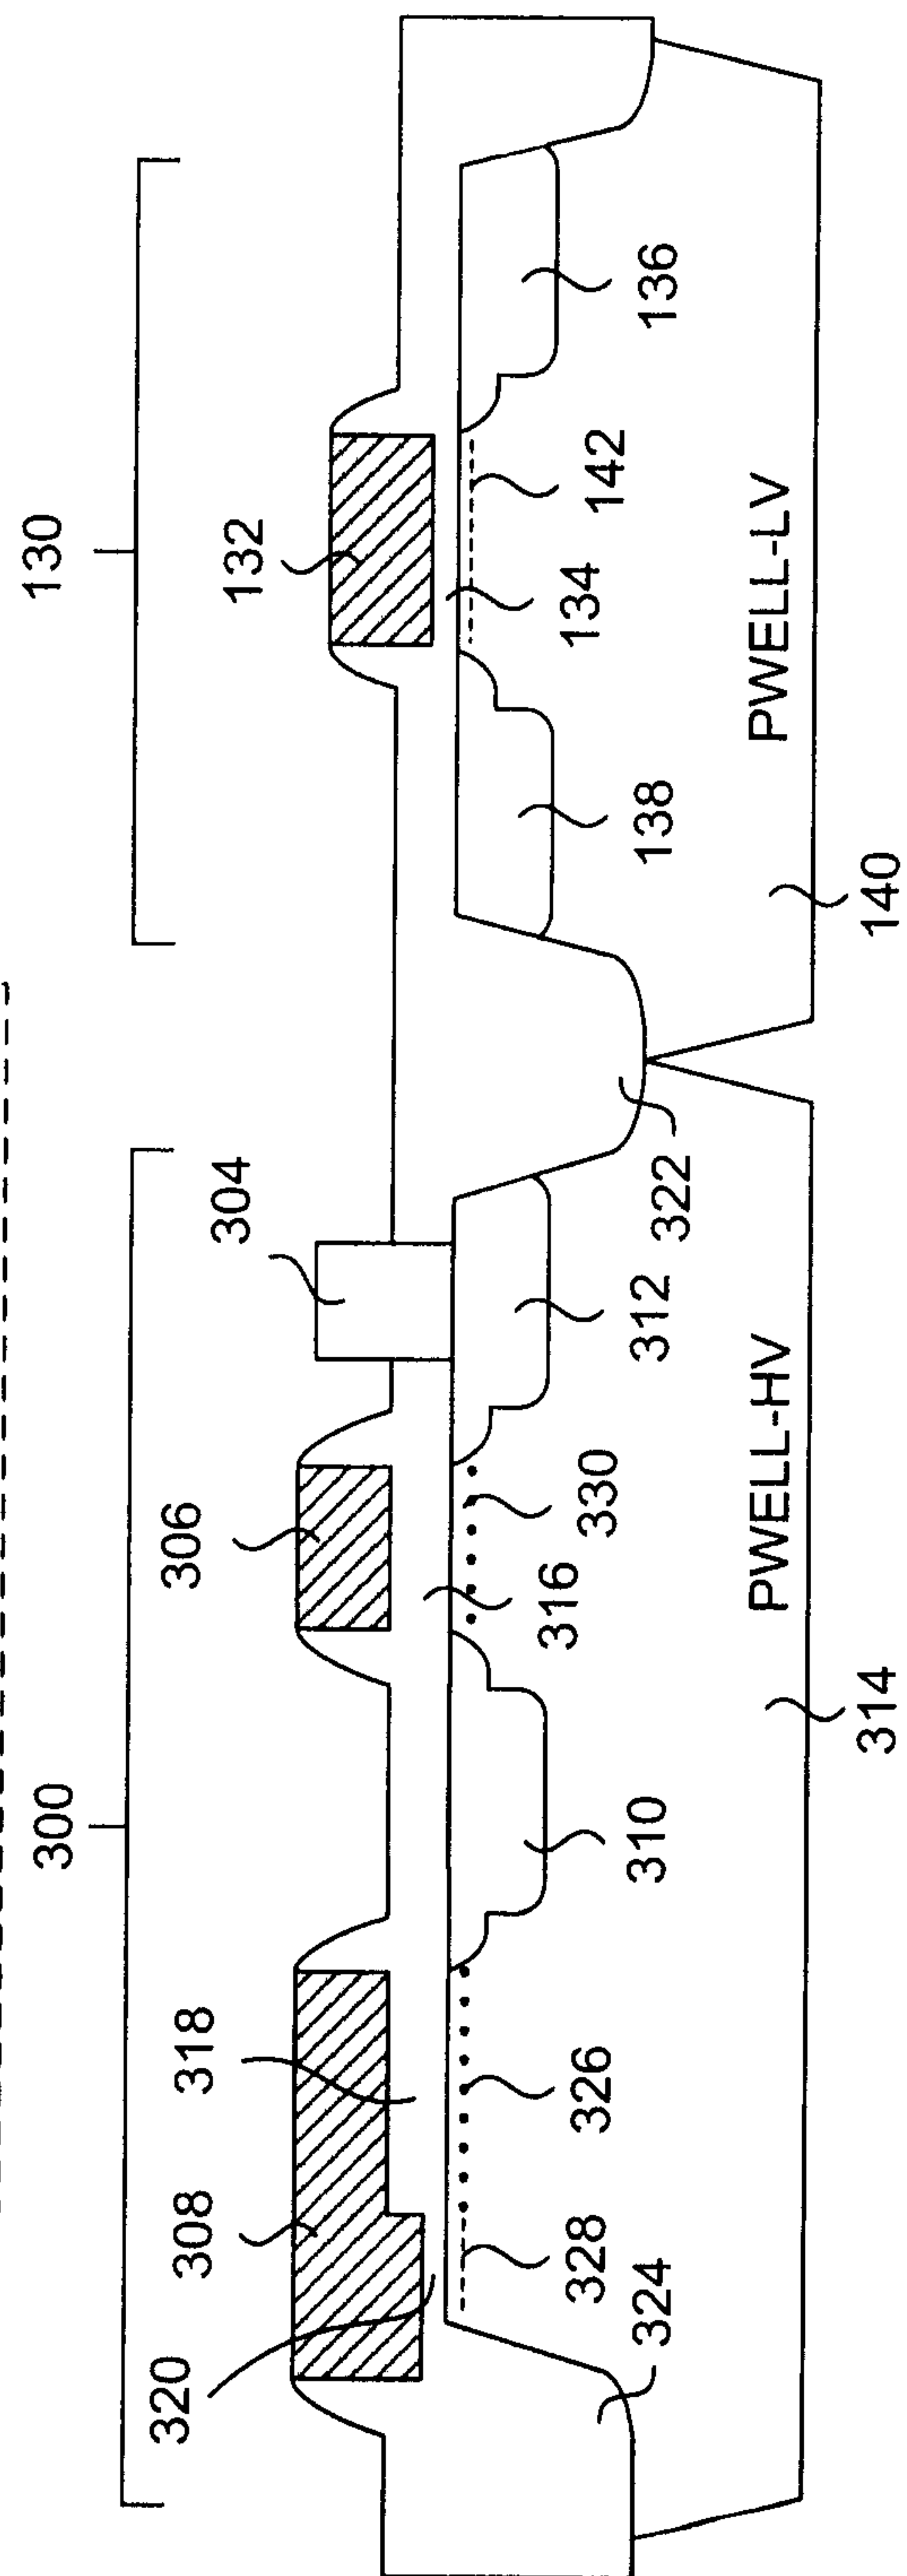


FIG. 8B

6/15

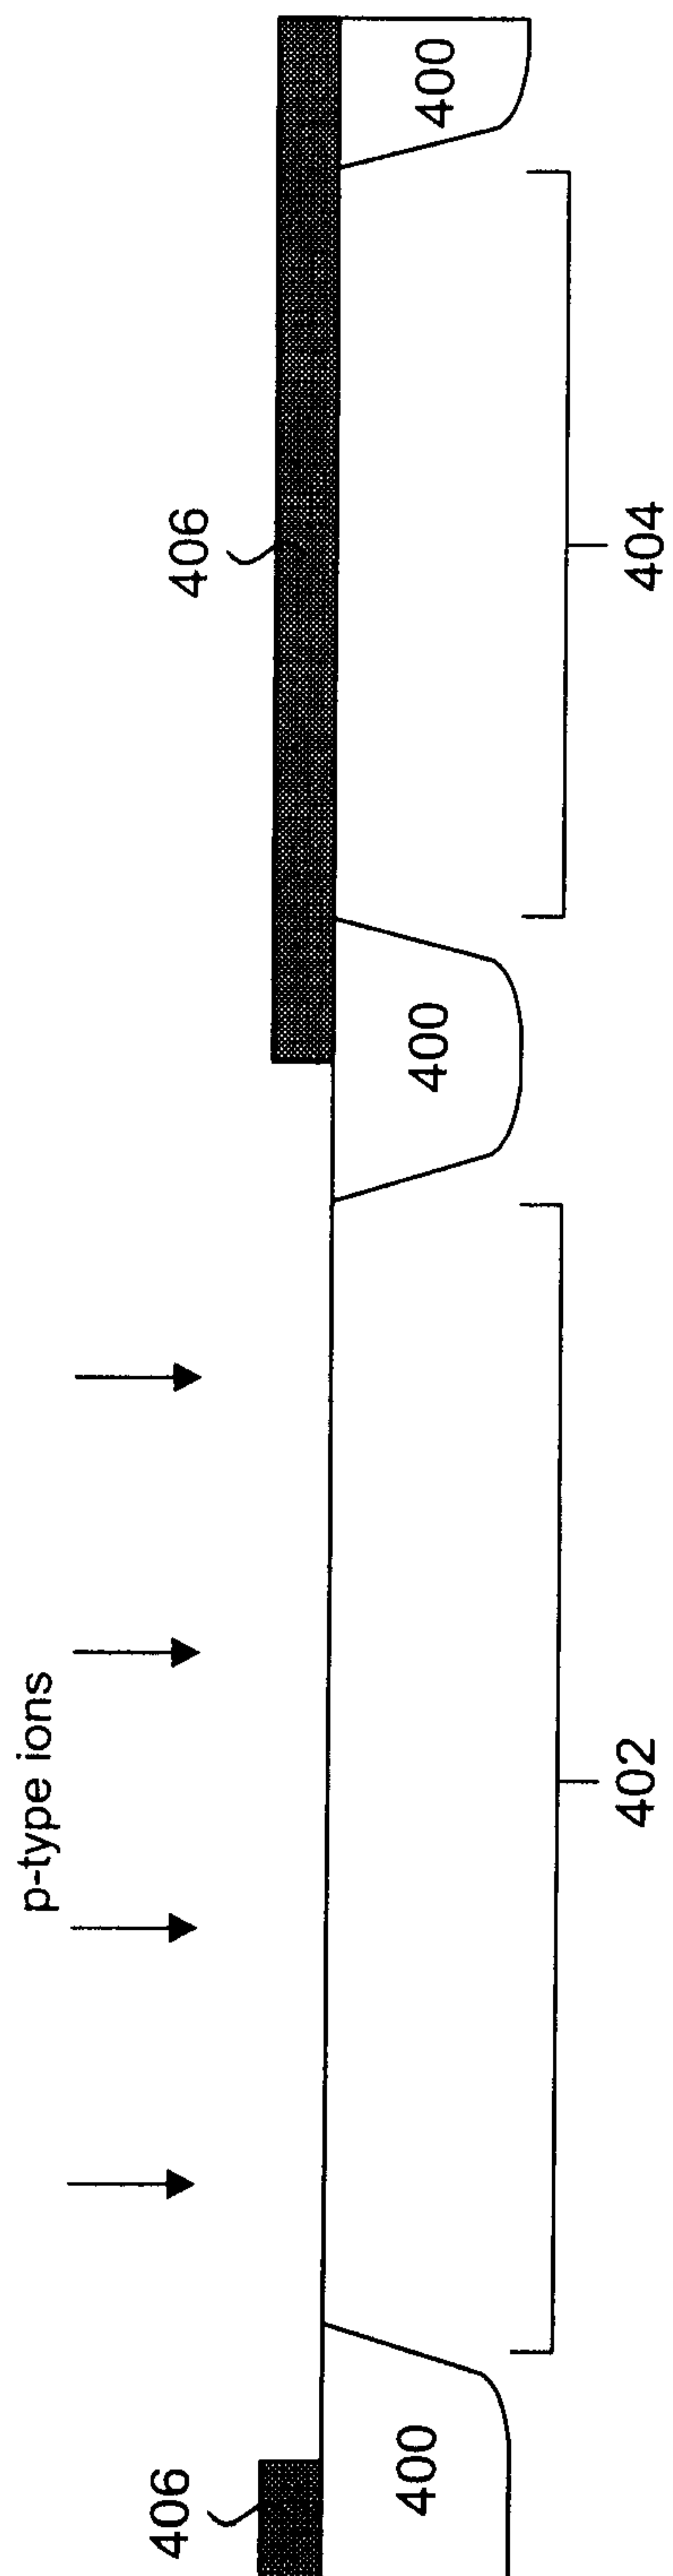


FIG 9A



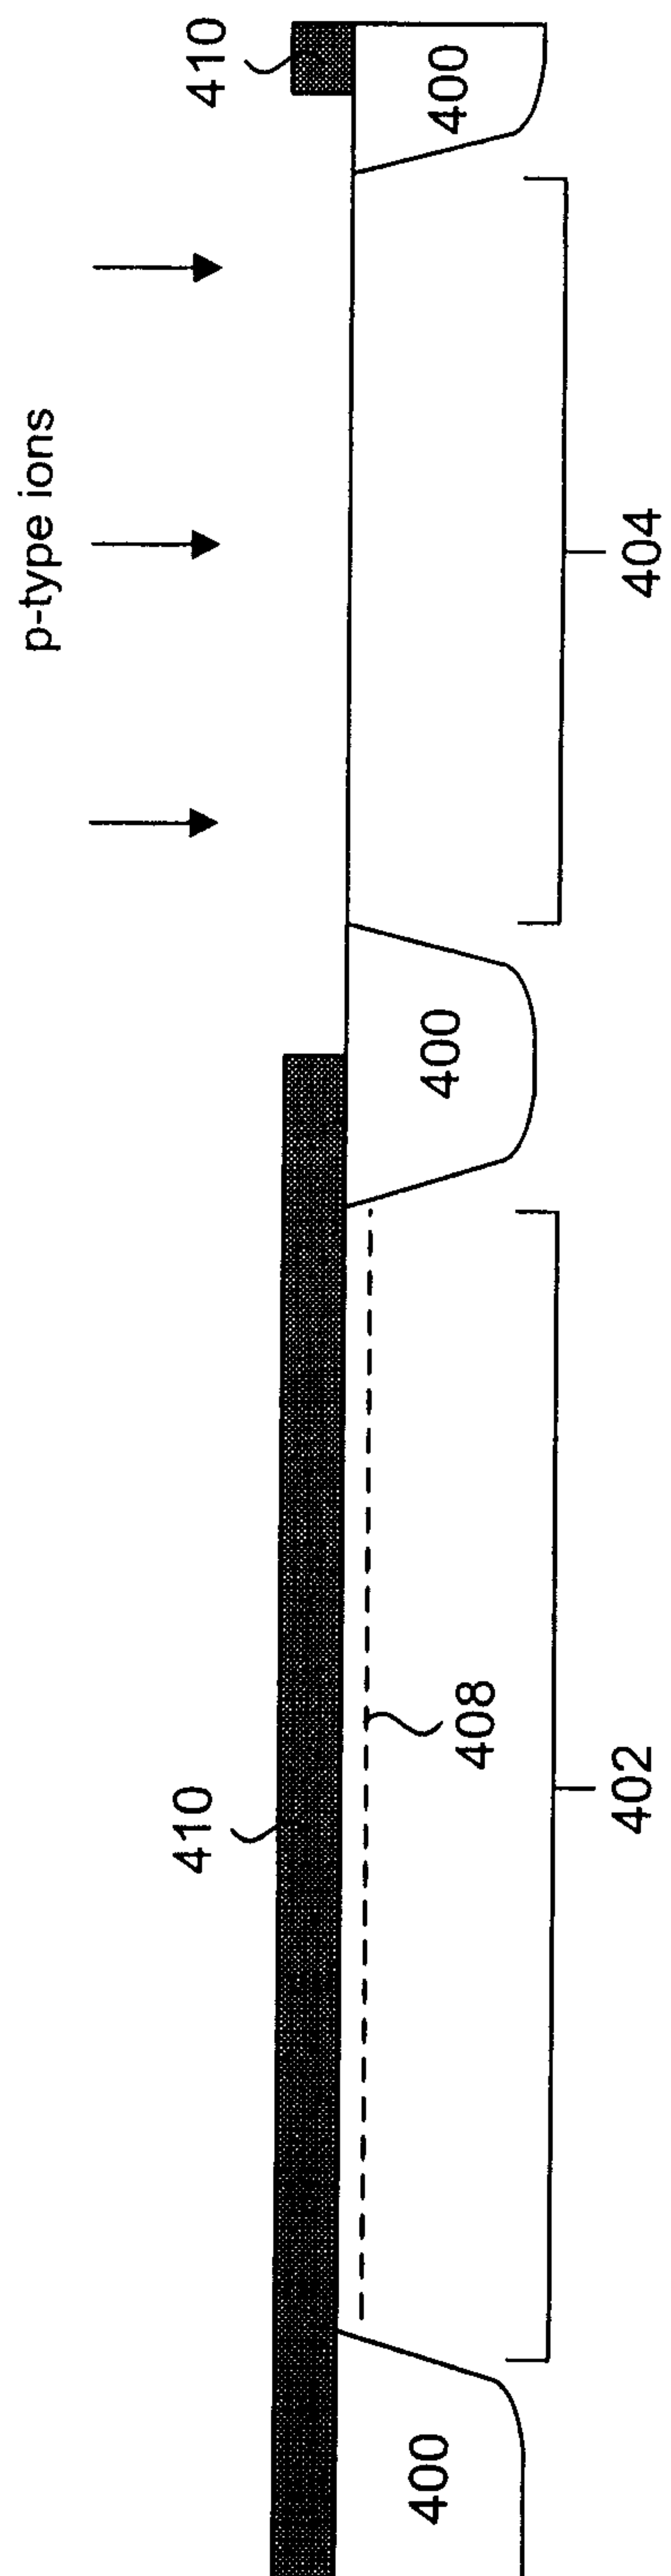


FIG 9B

7/15

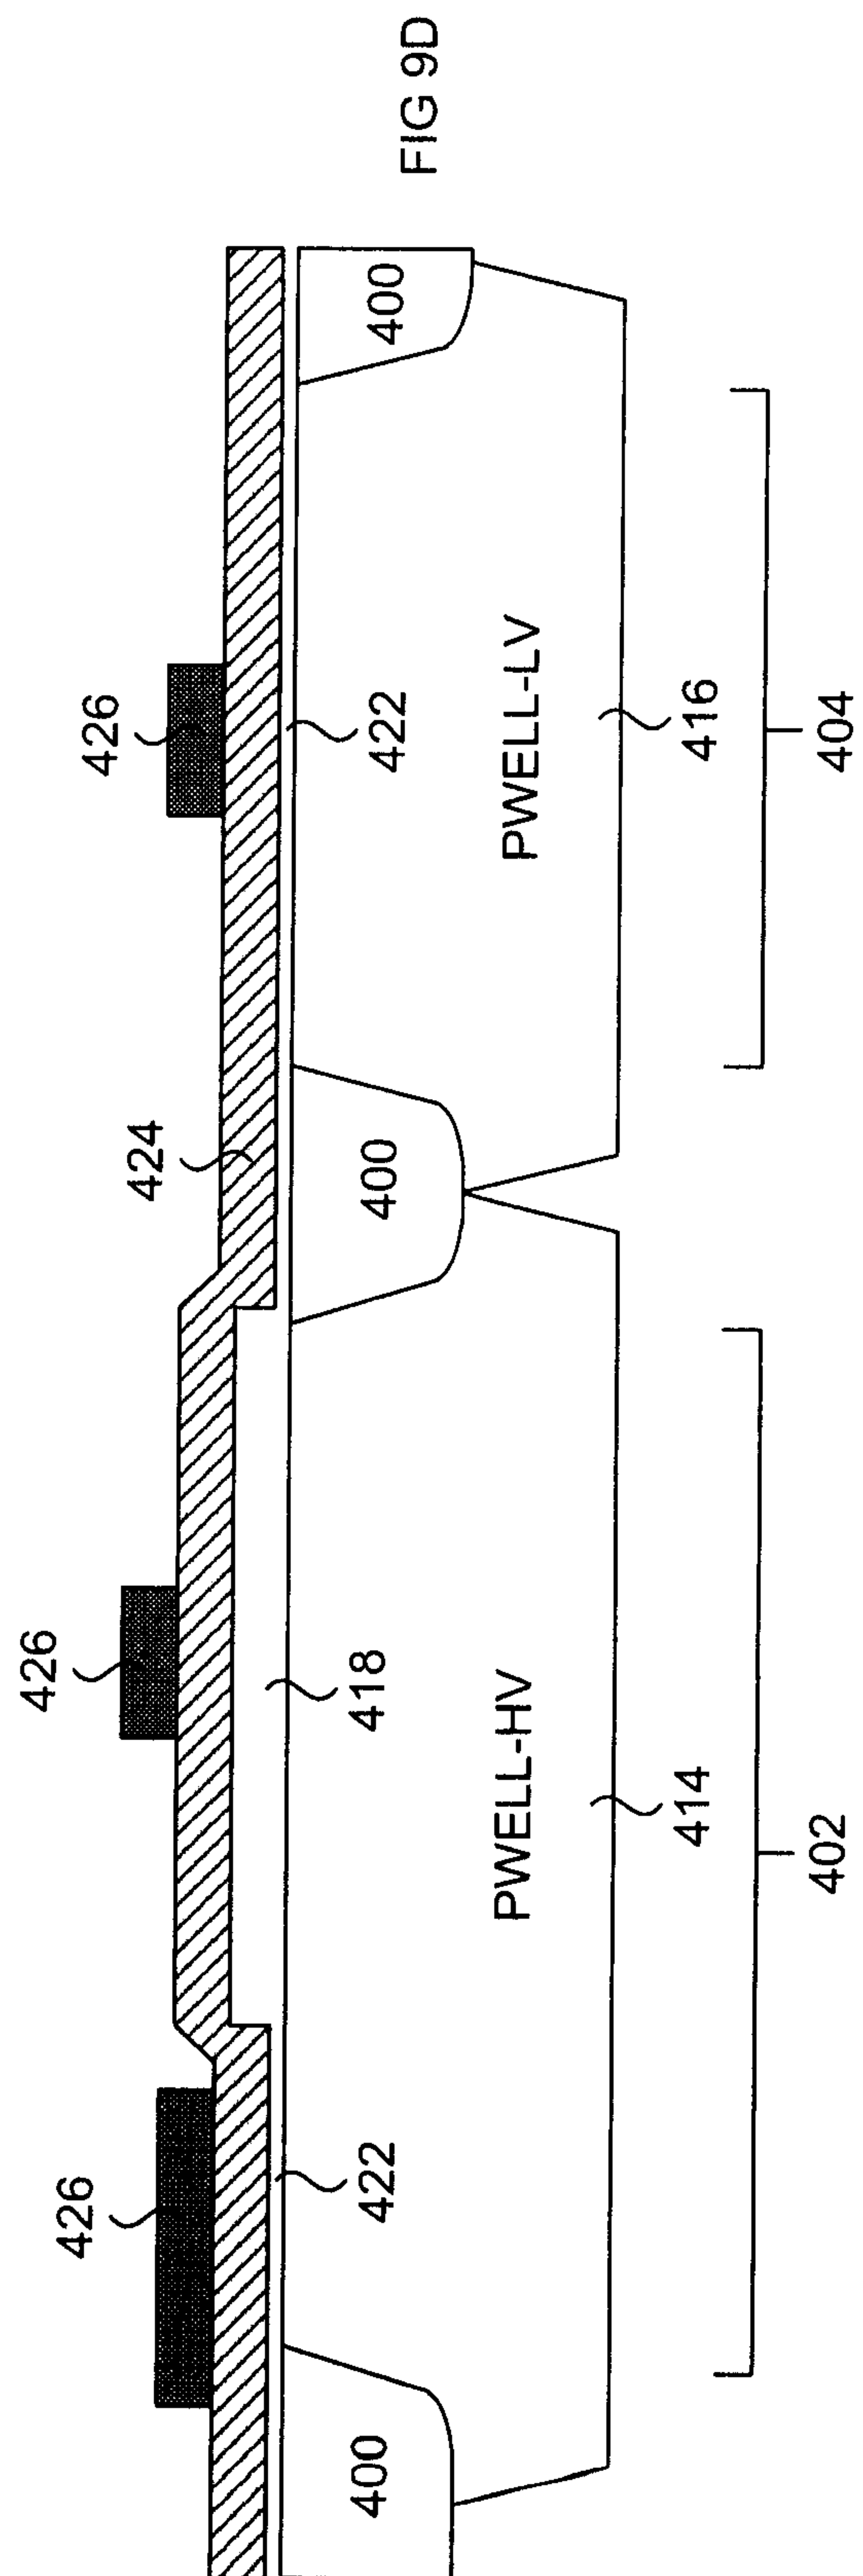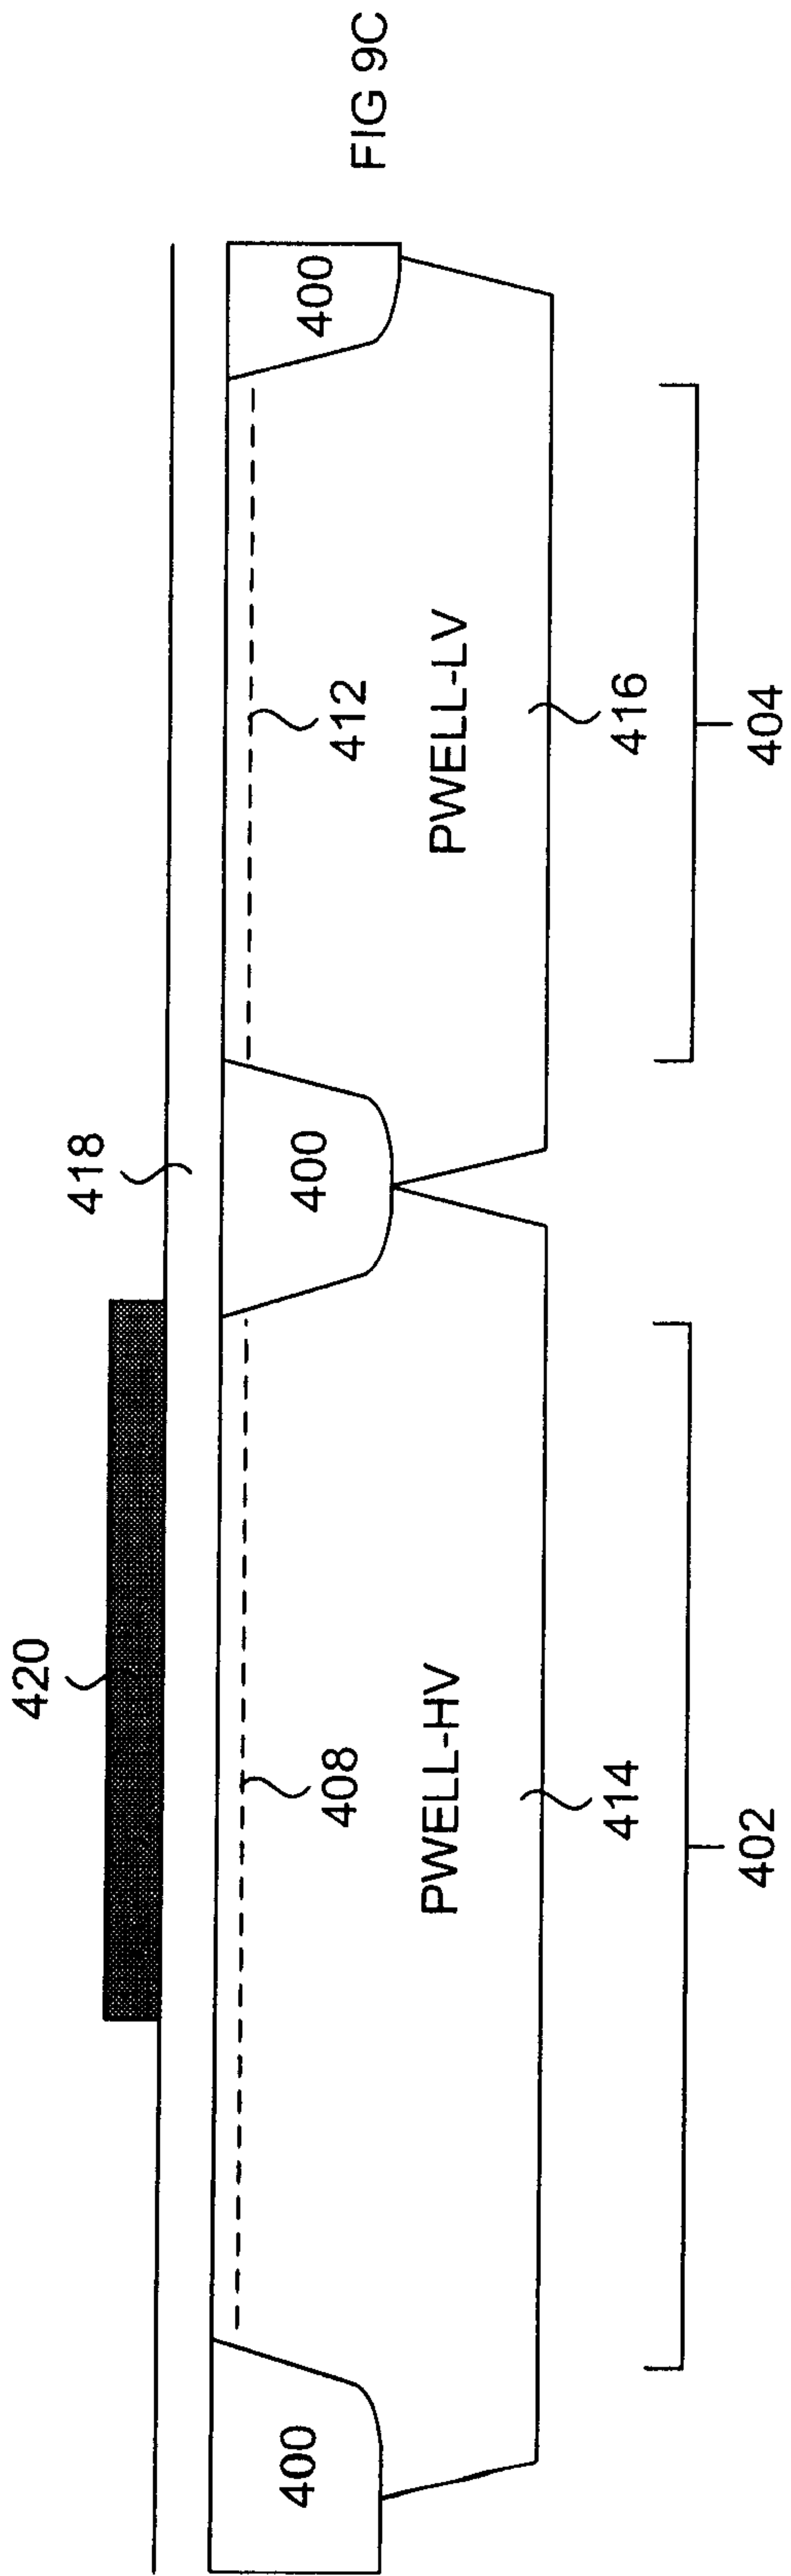

8/15



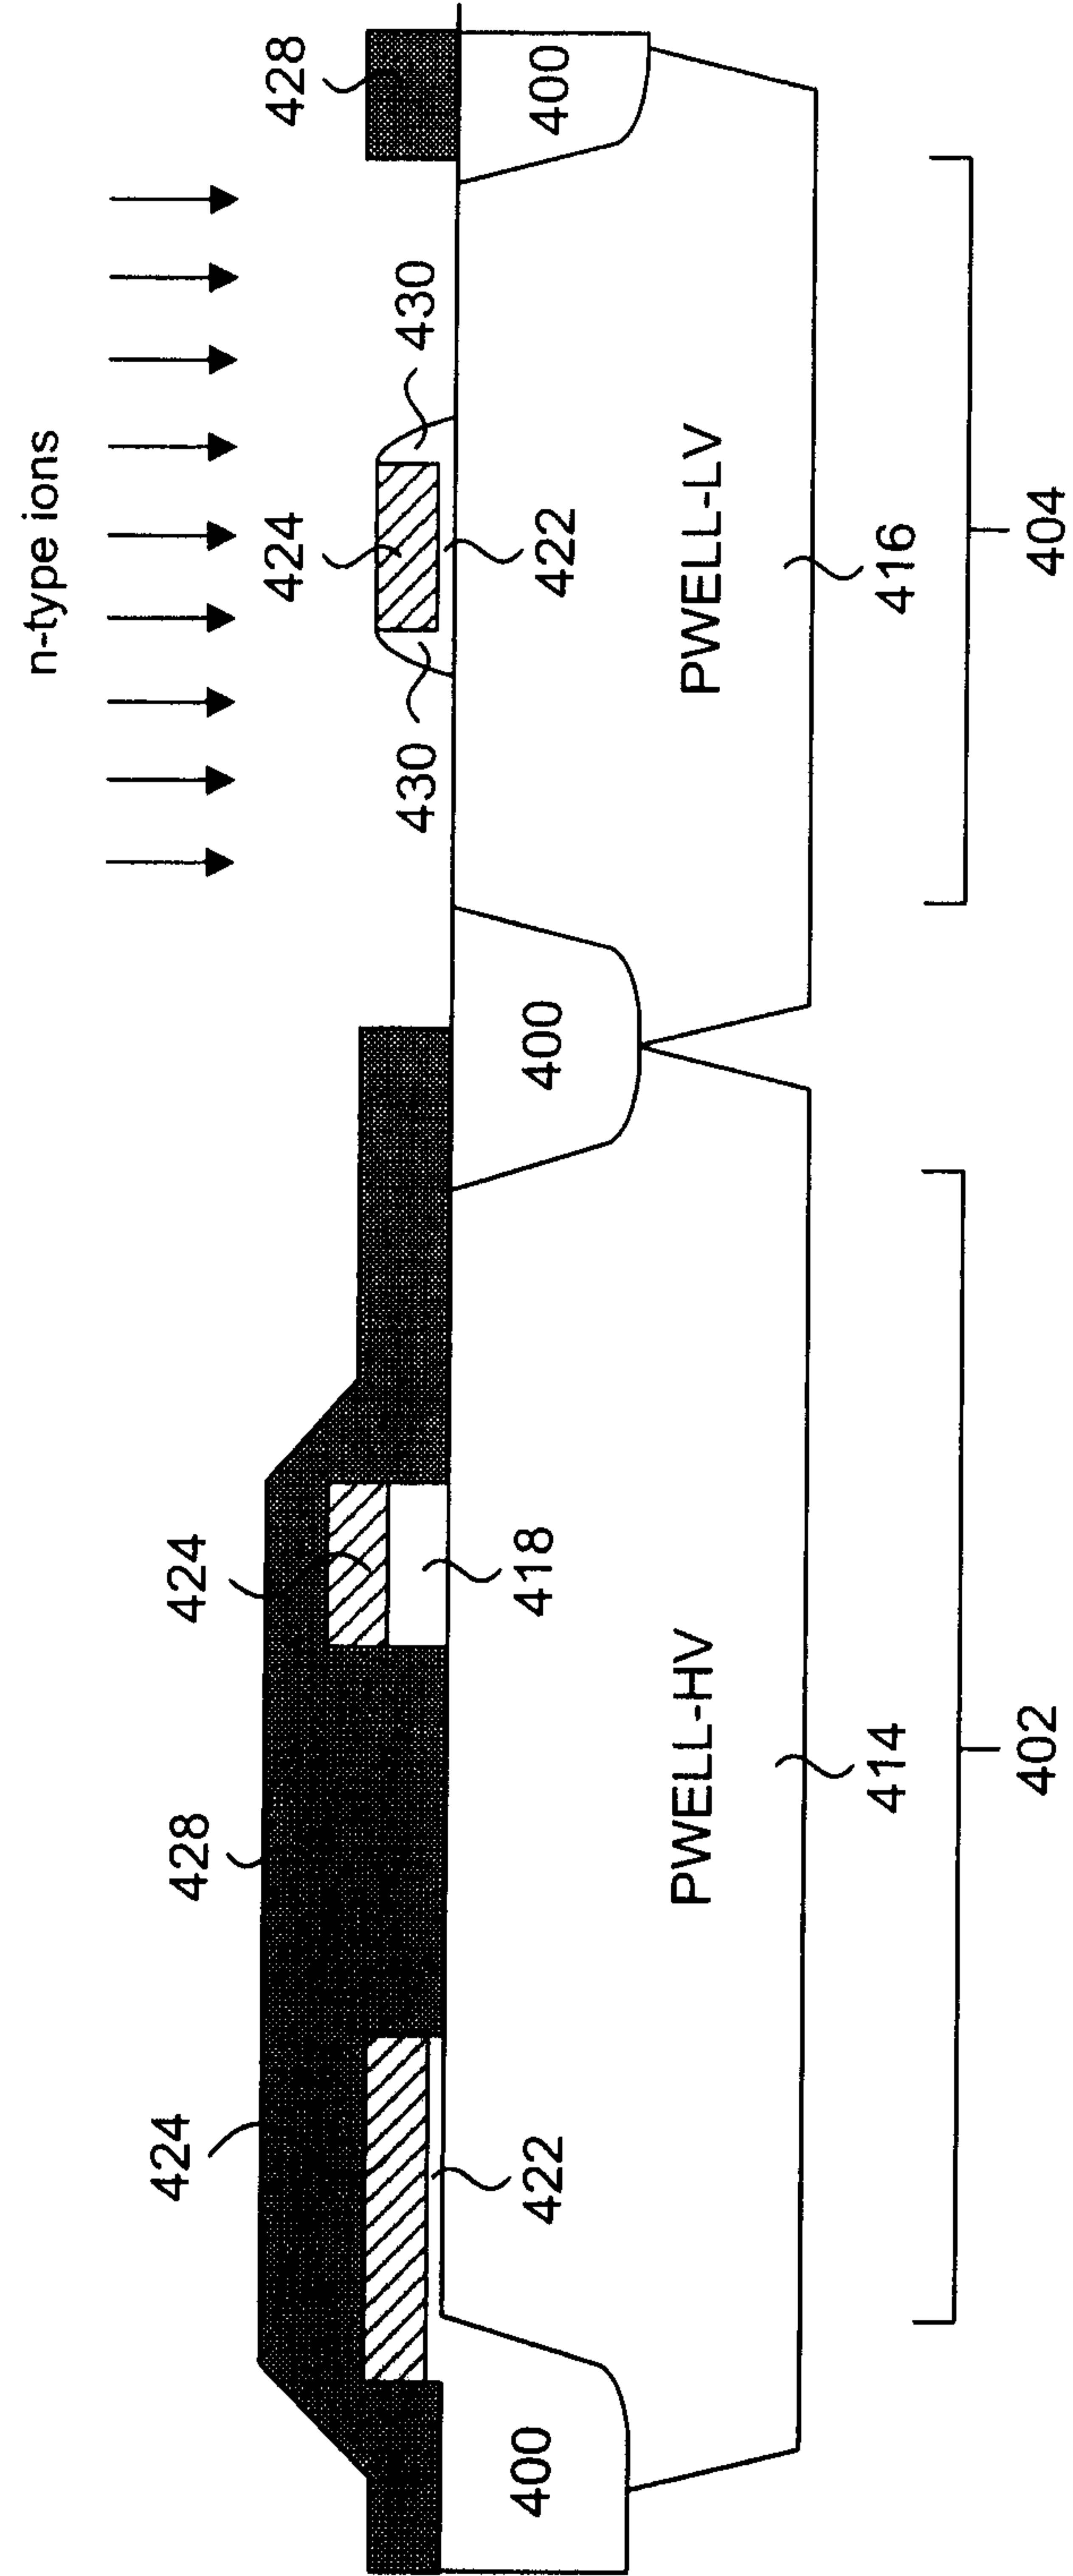


FIG 9E

9/15

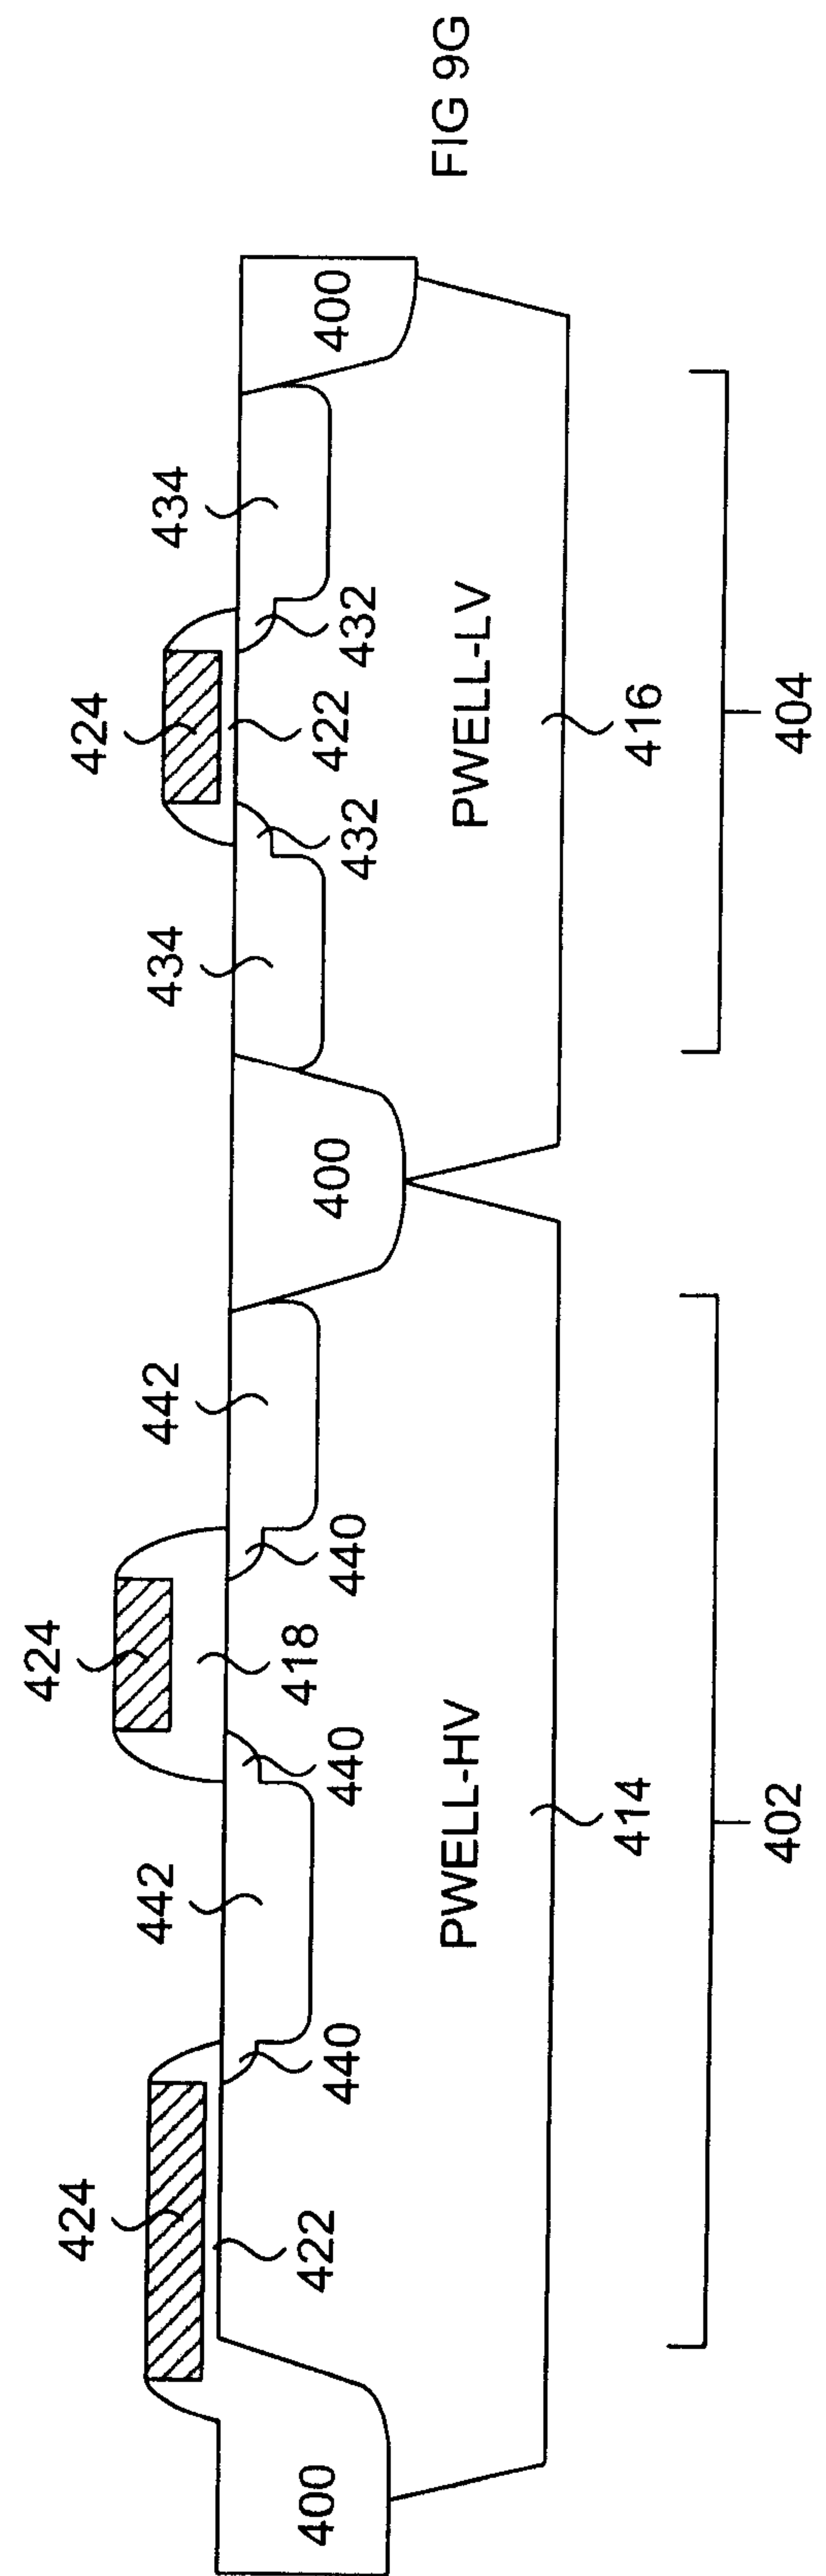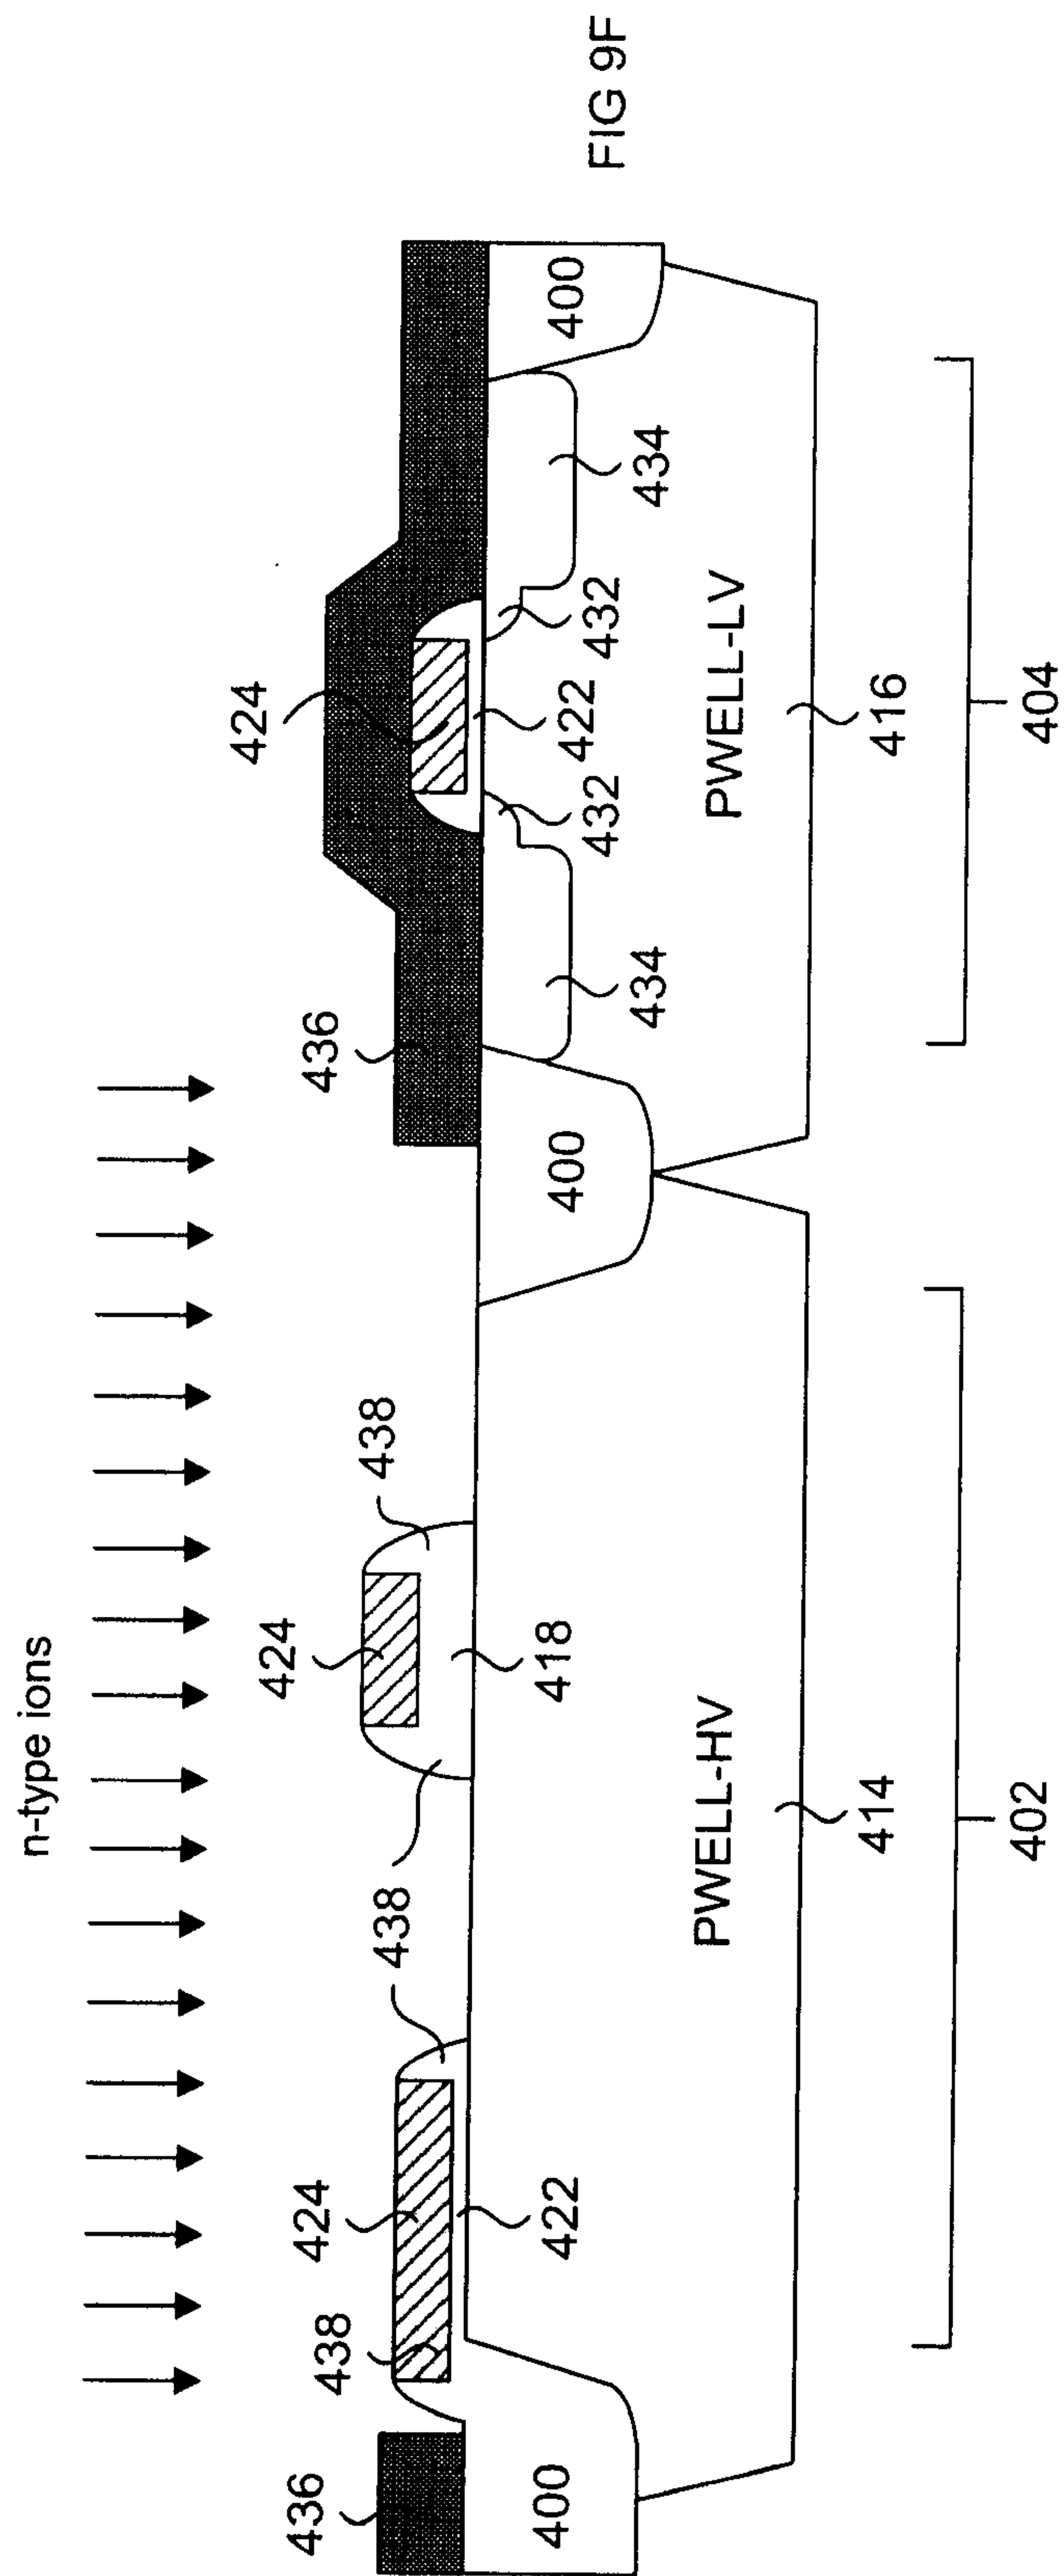

10/15

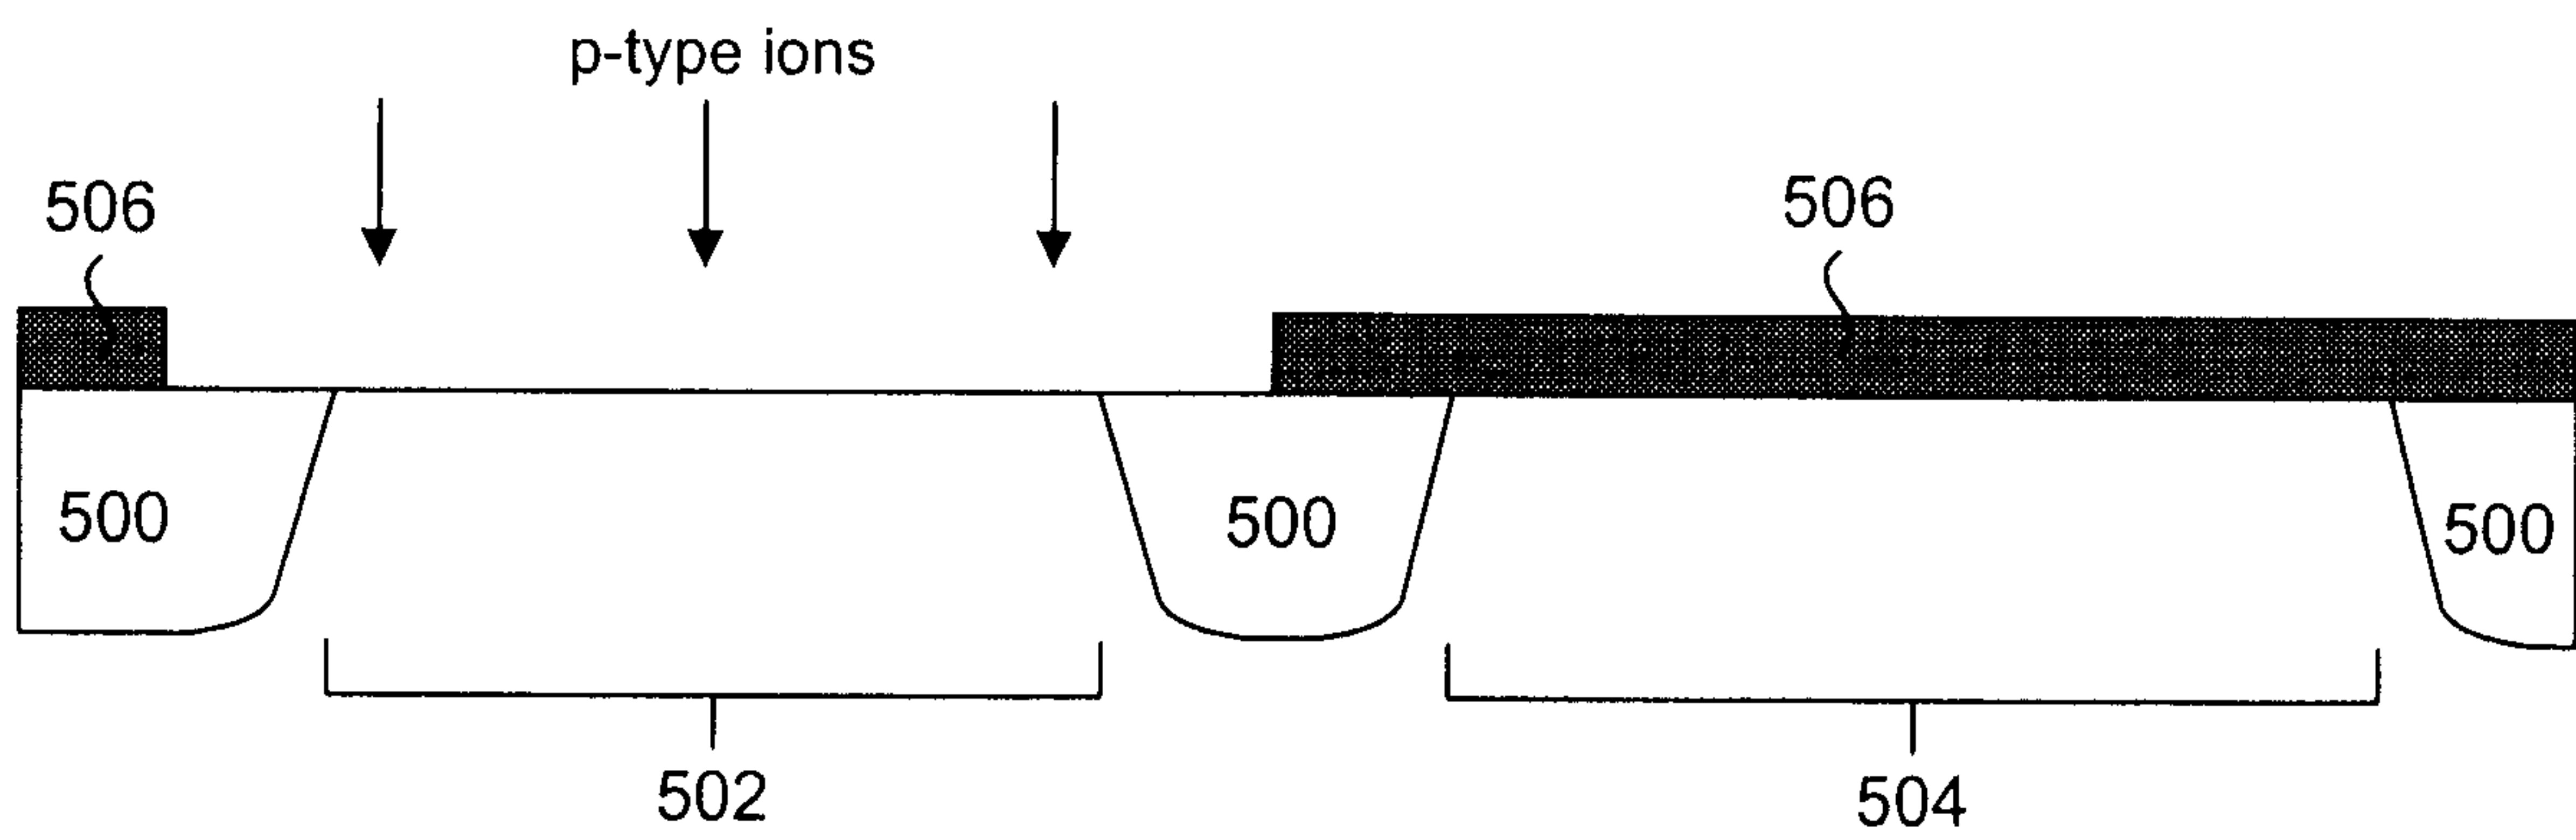


FIG 10A

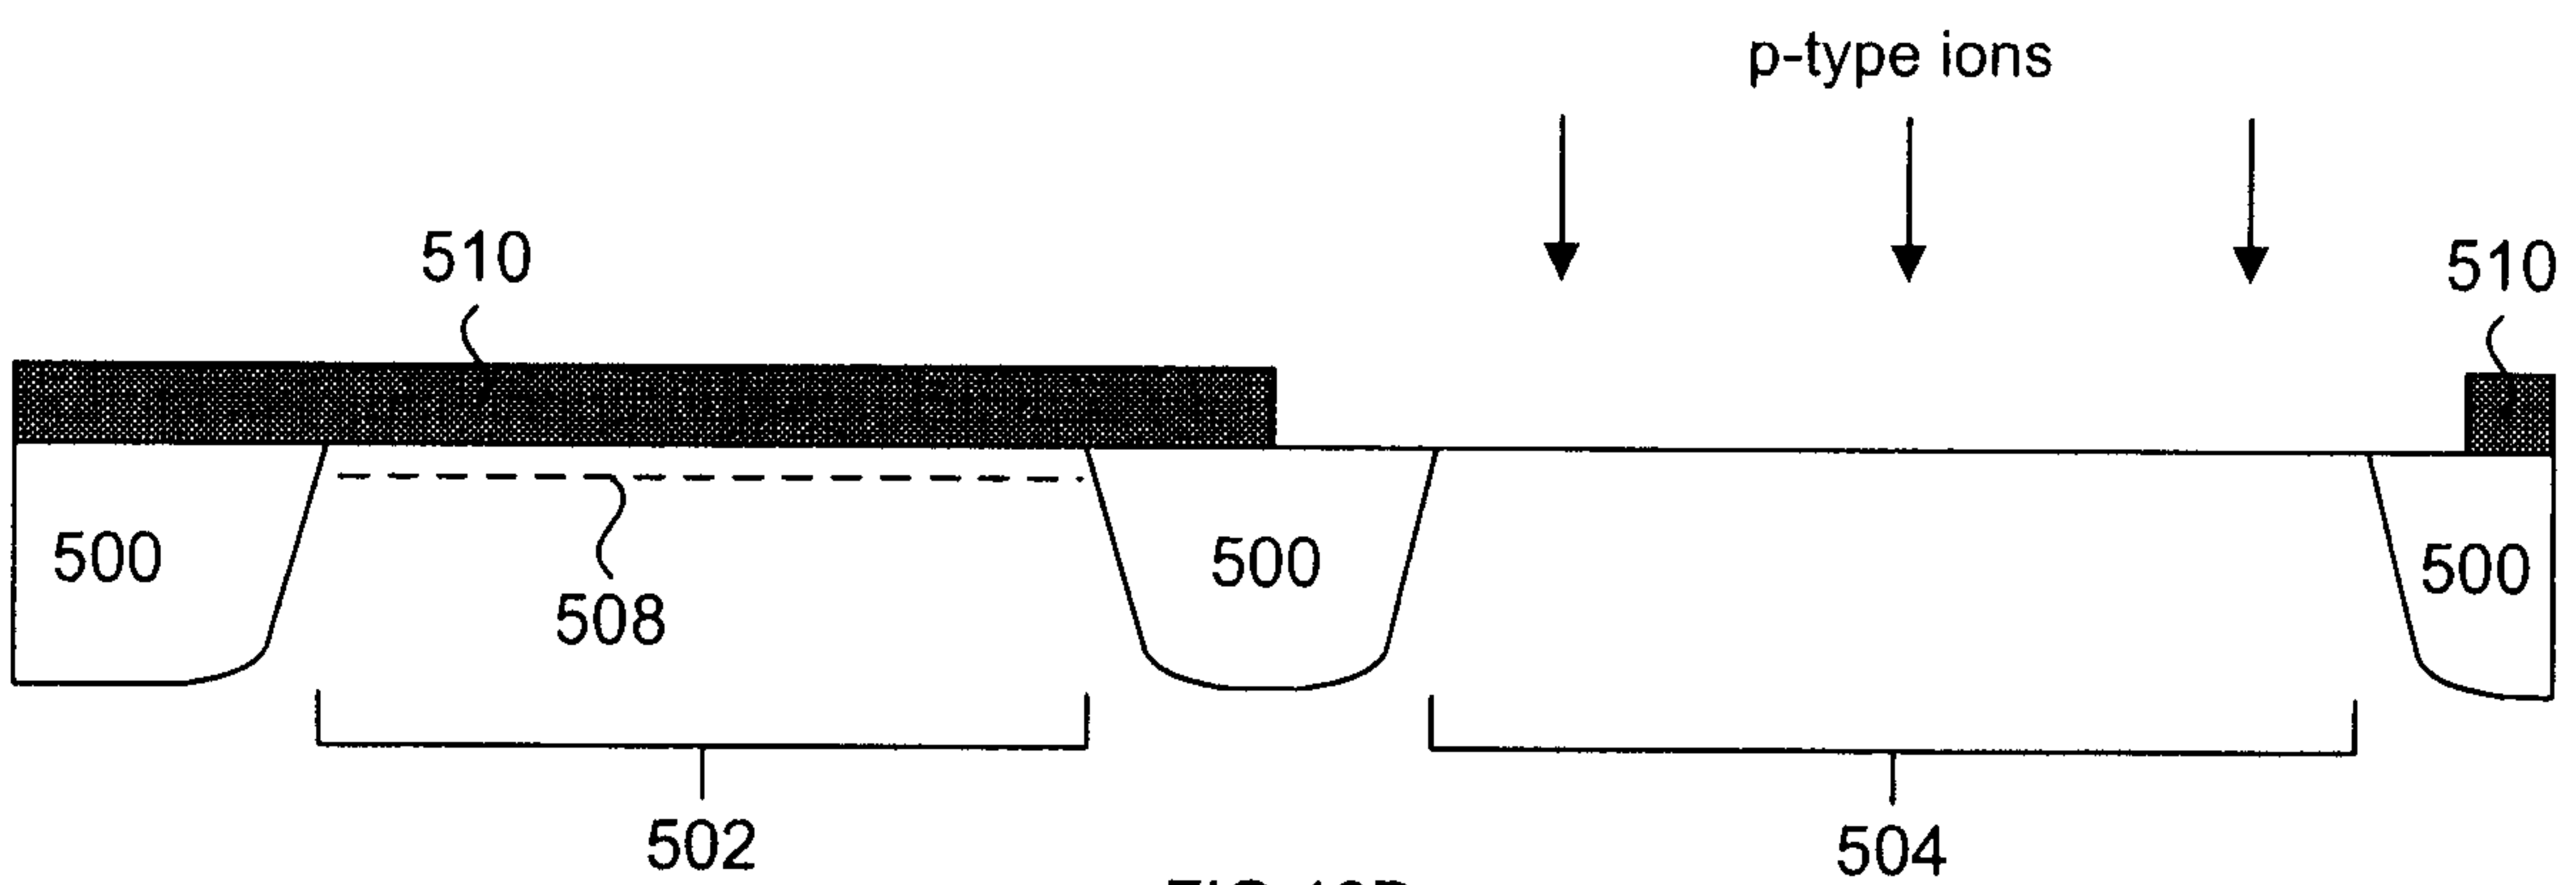


FIG 10B

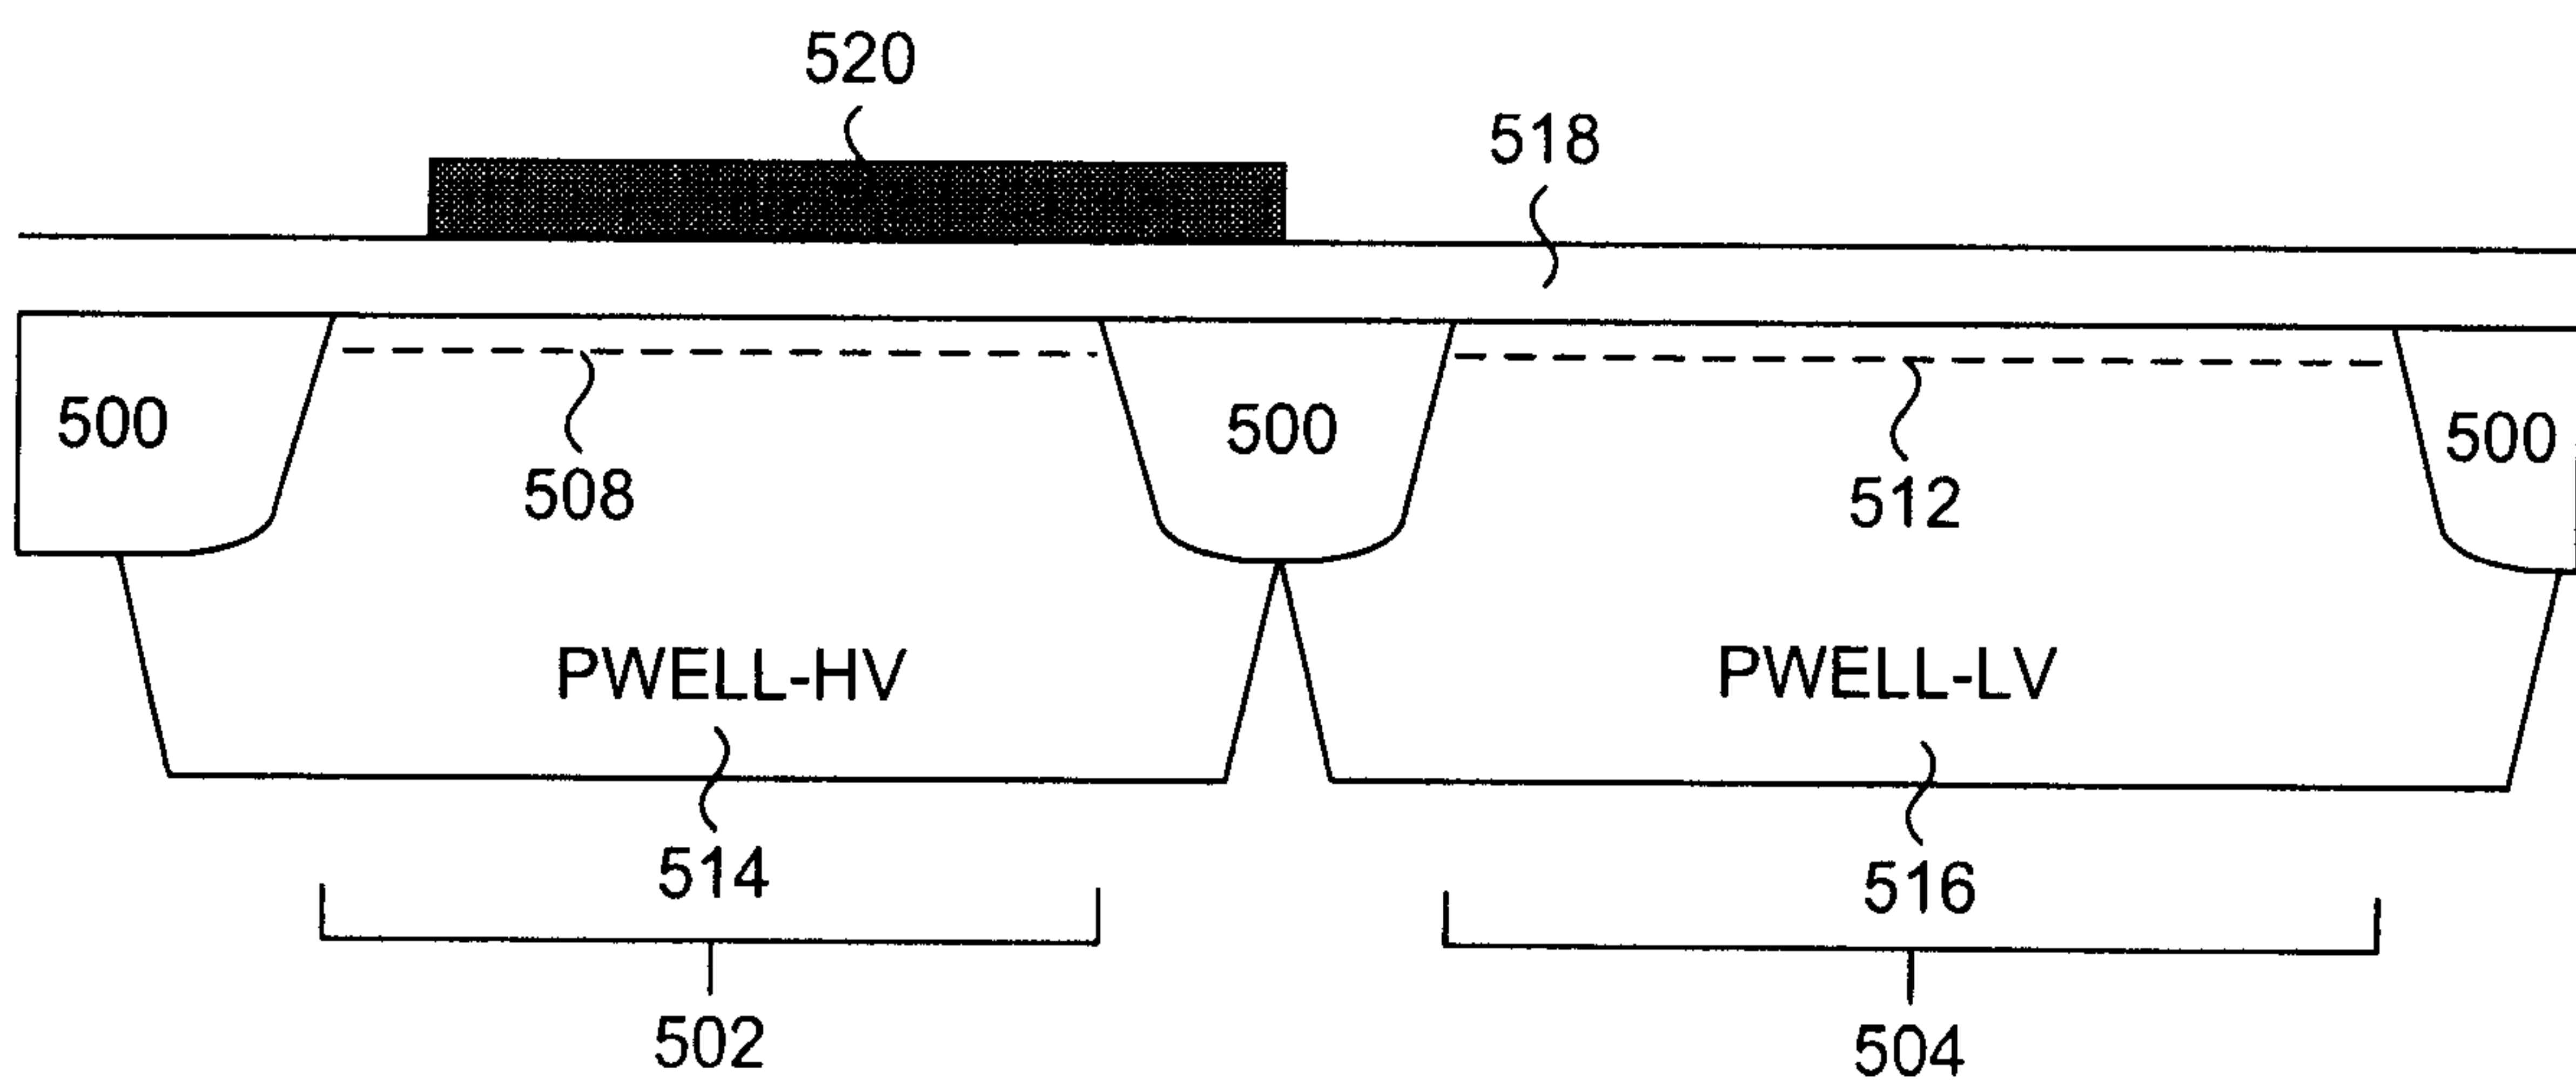


FIG 10C

11/15

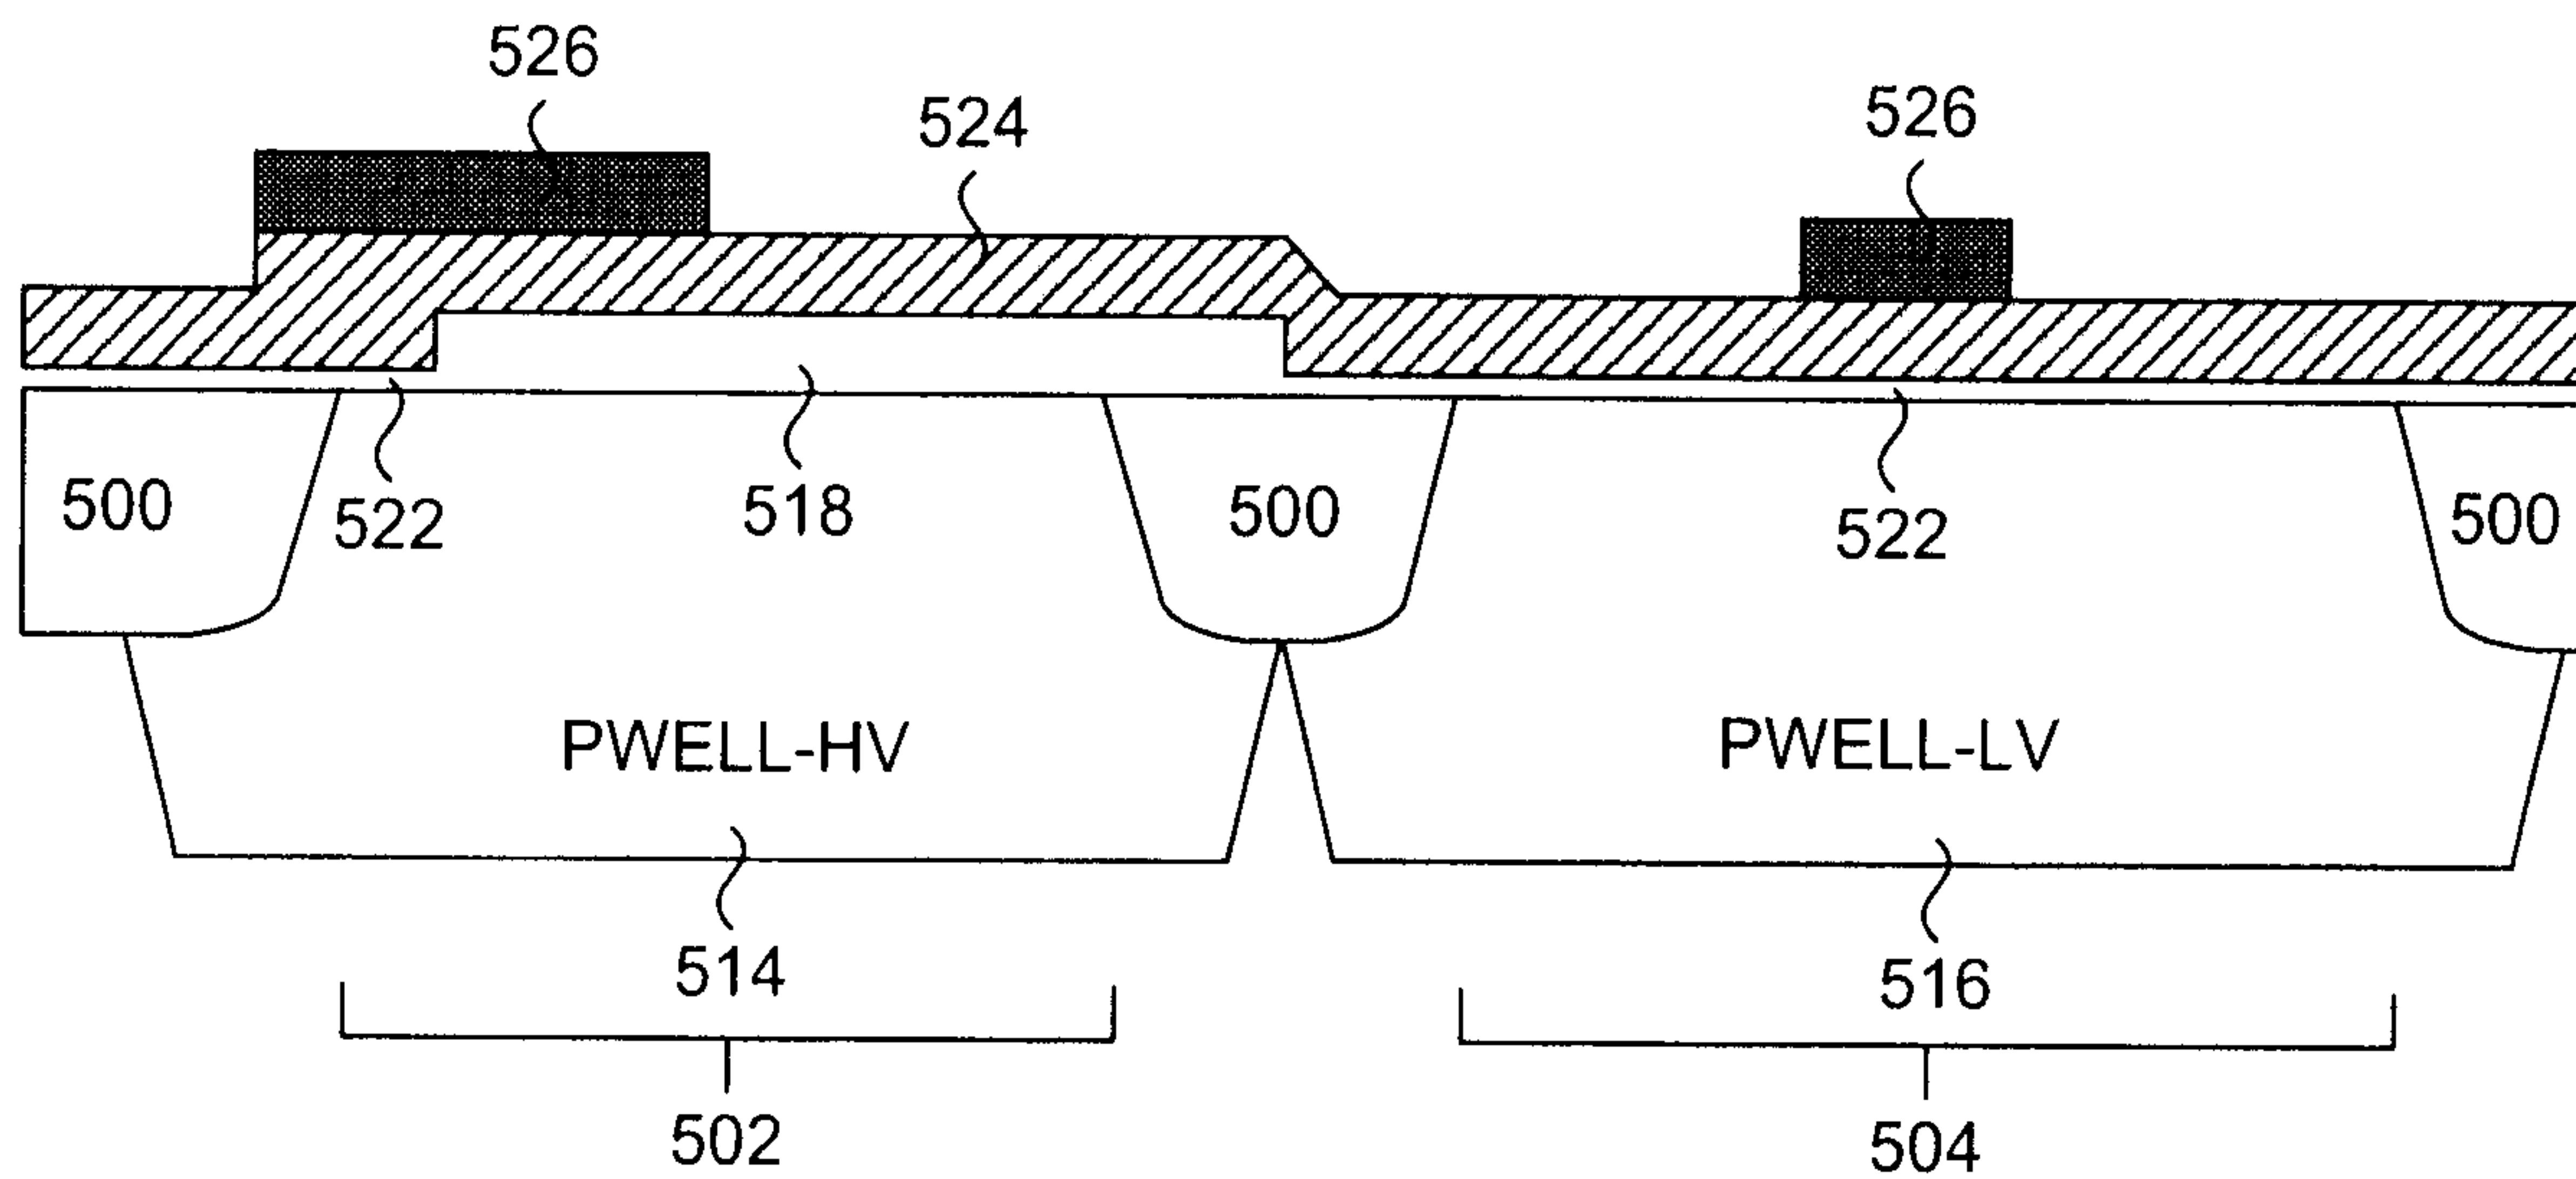


FIG 10D

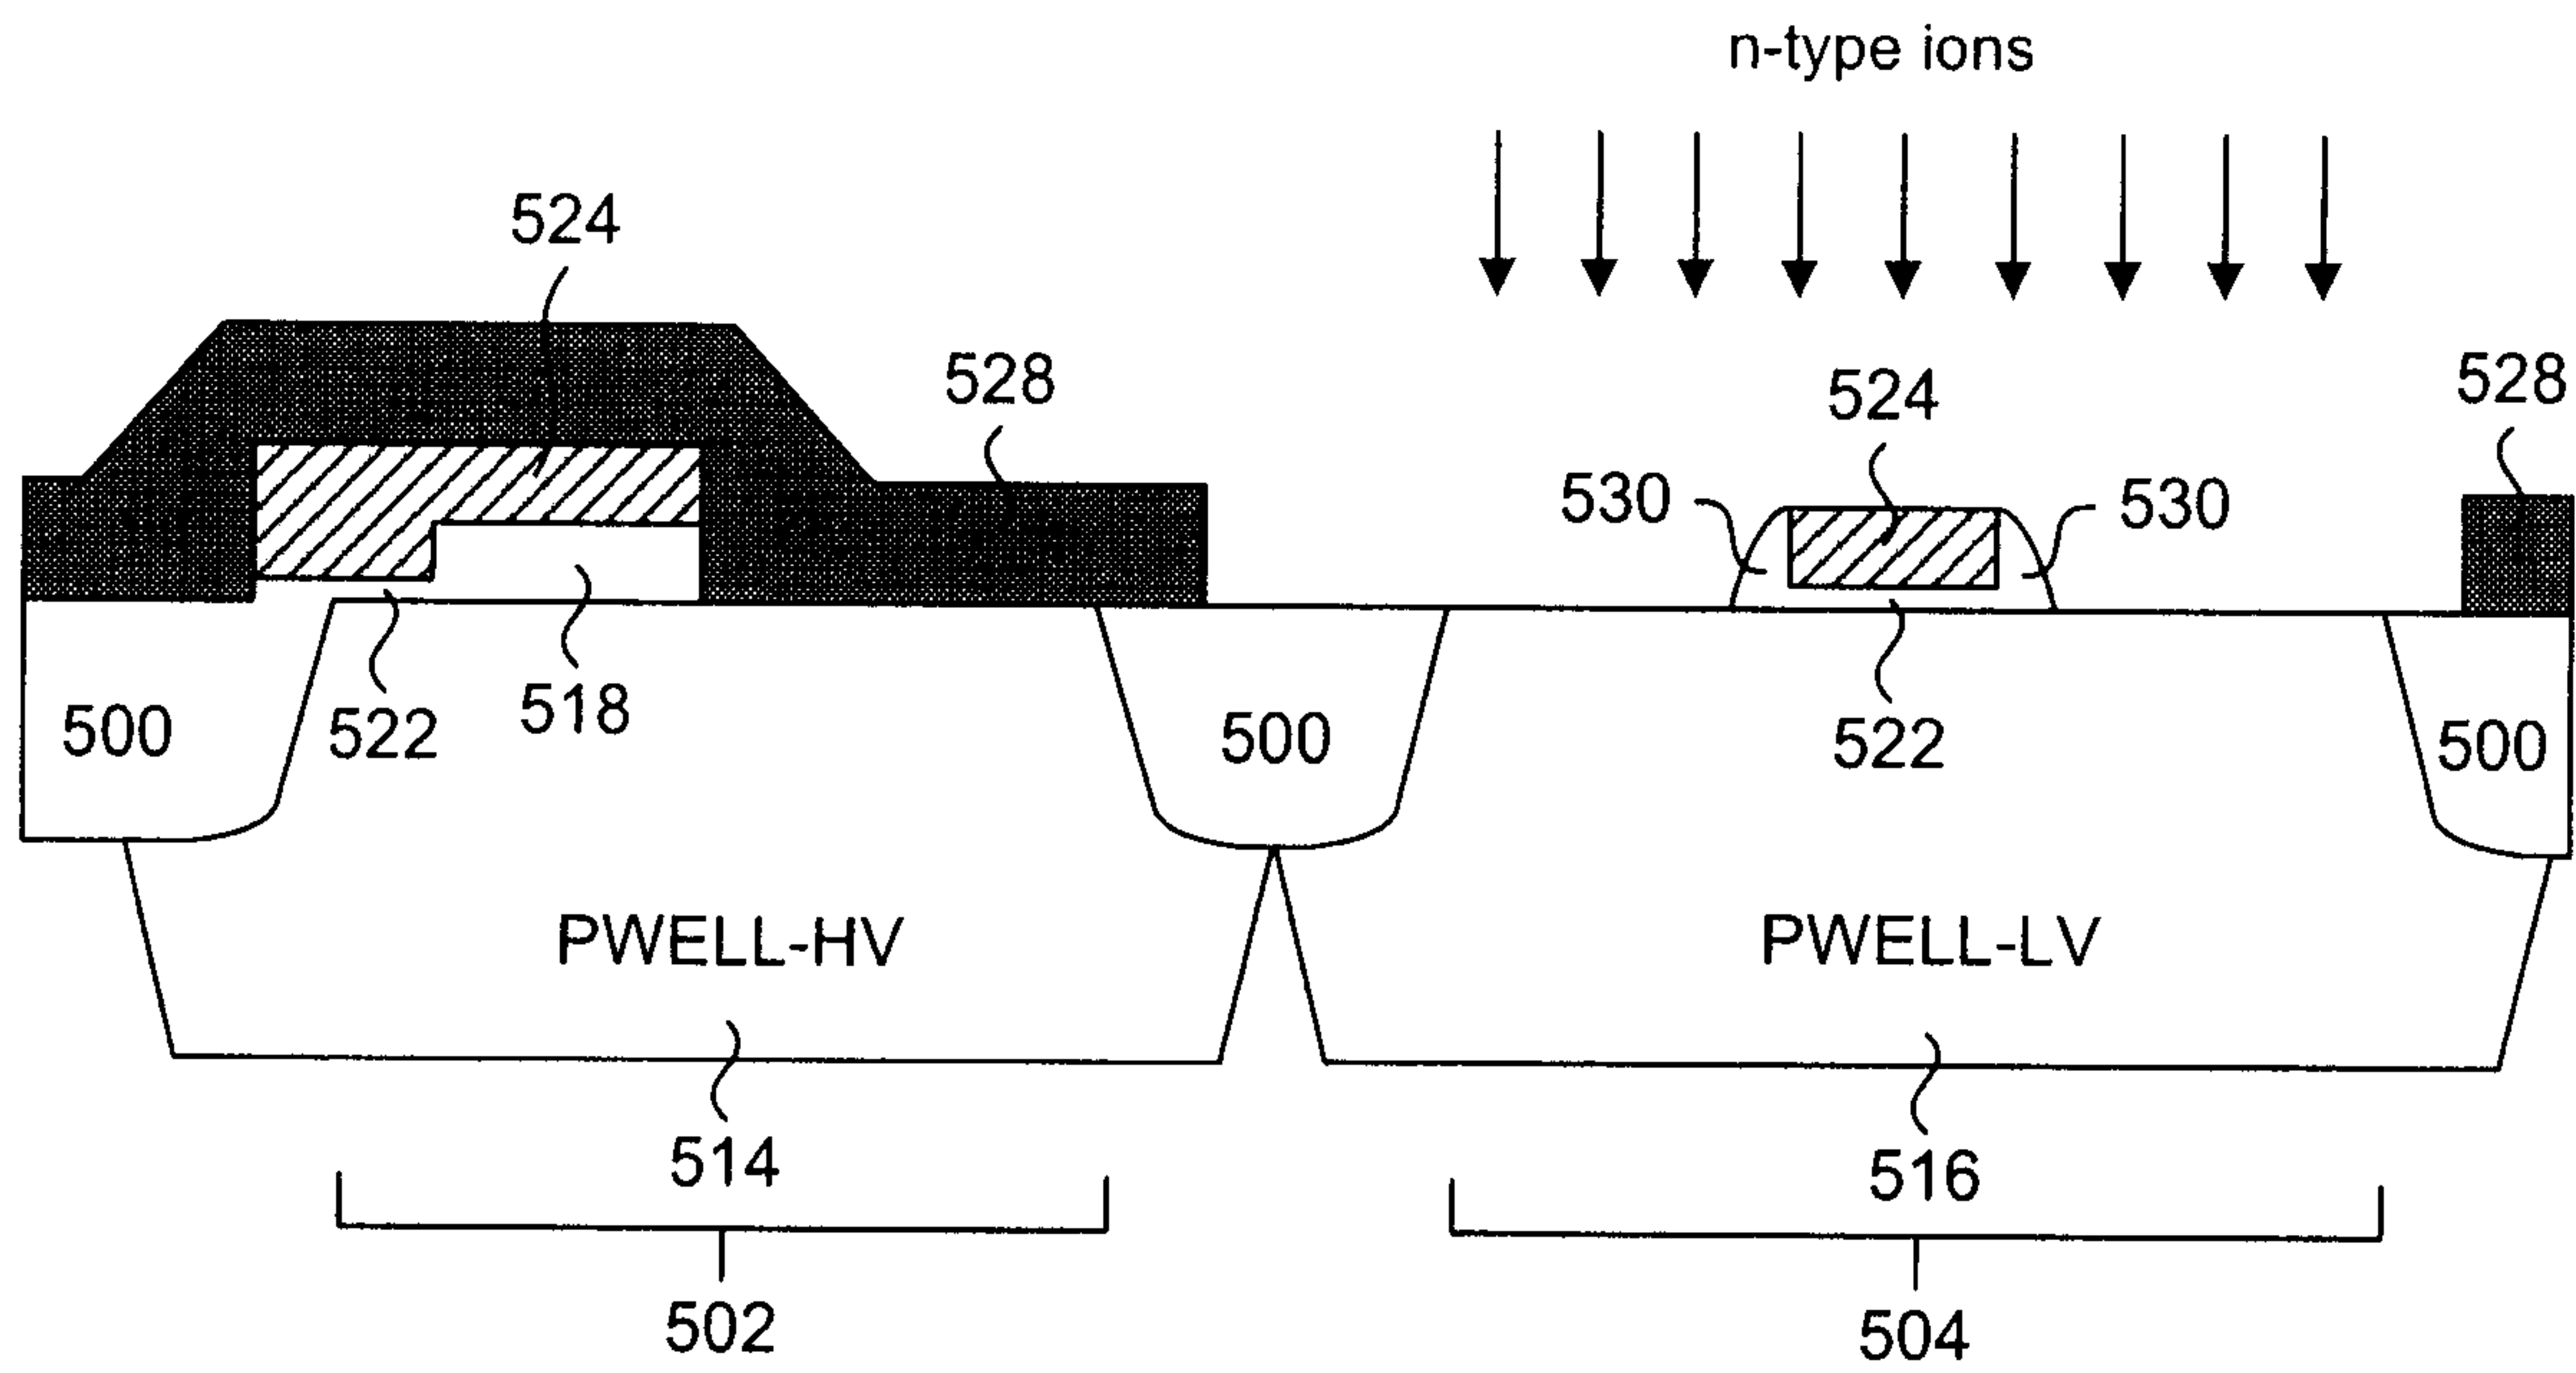


FIG 10E

12/15

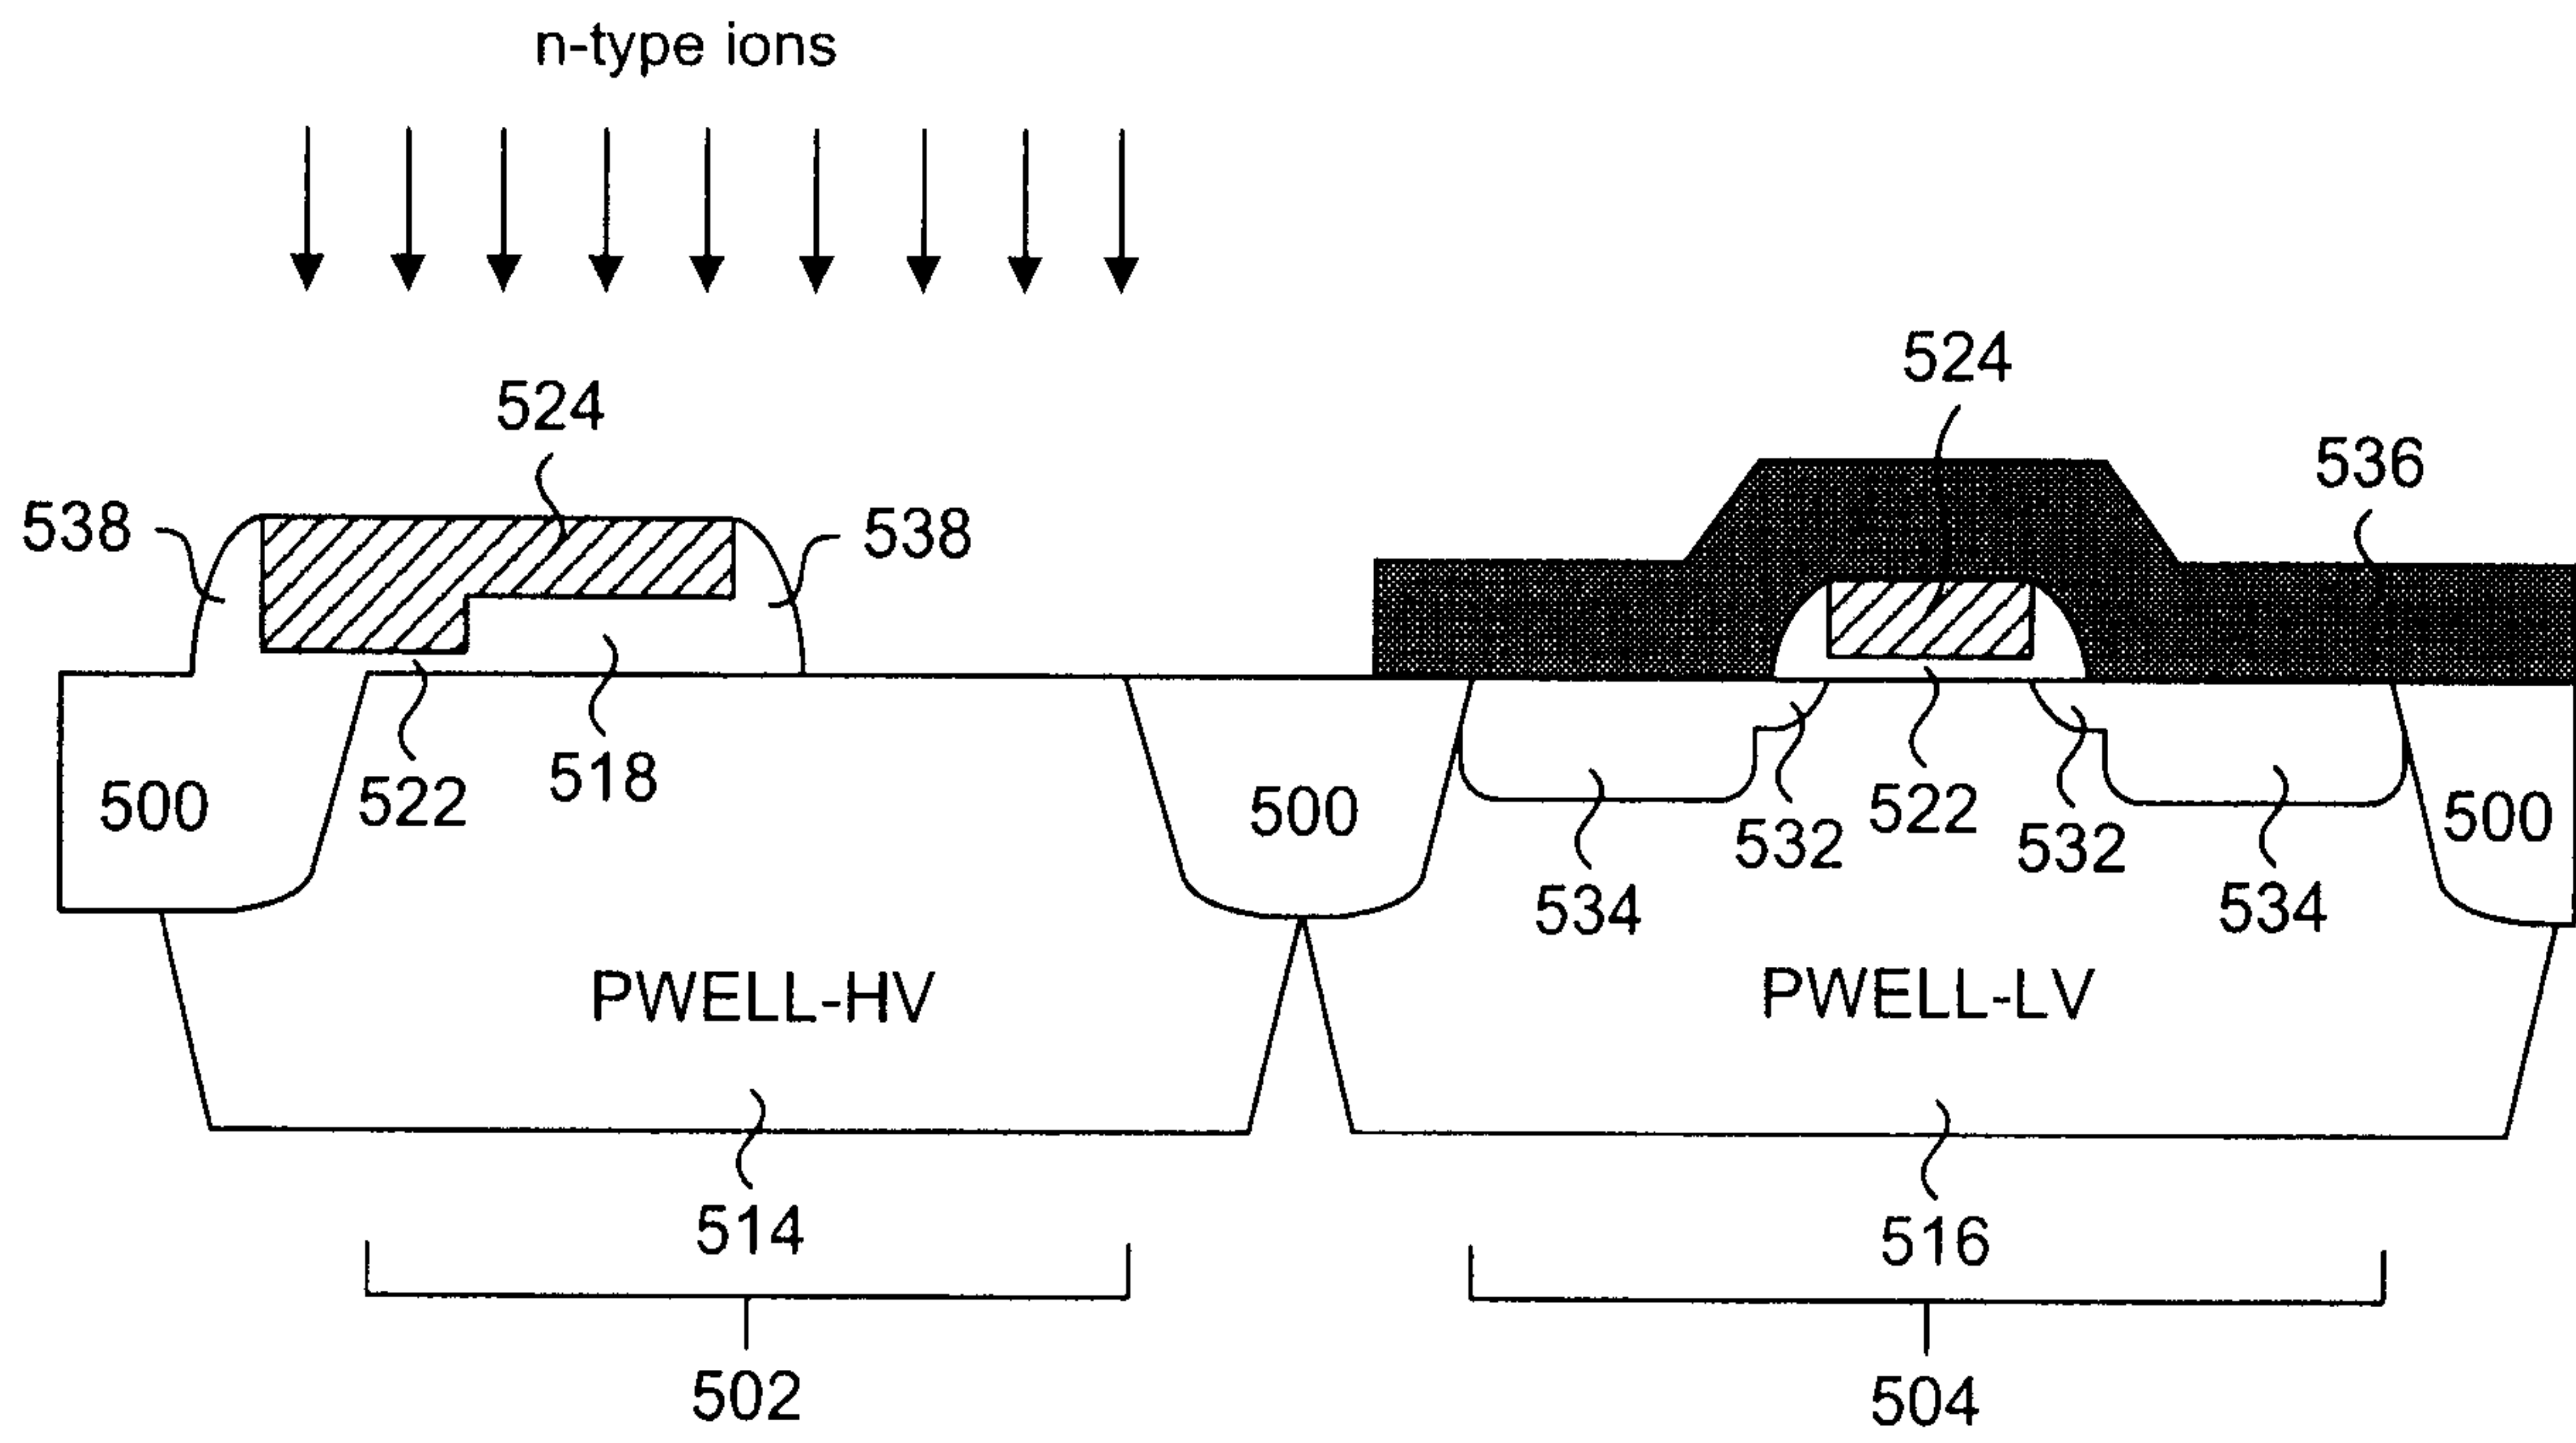


FIG 10F

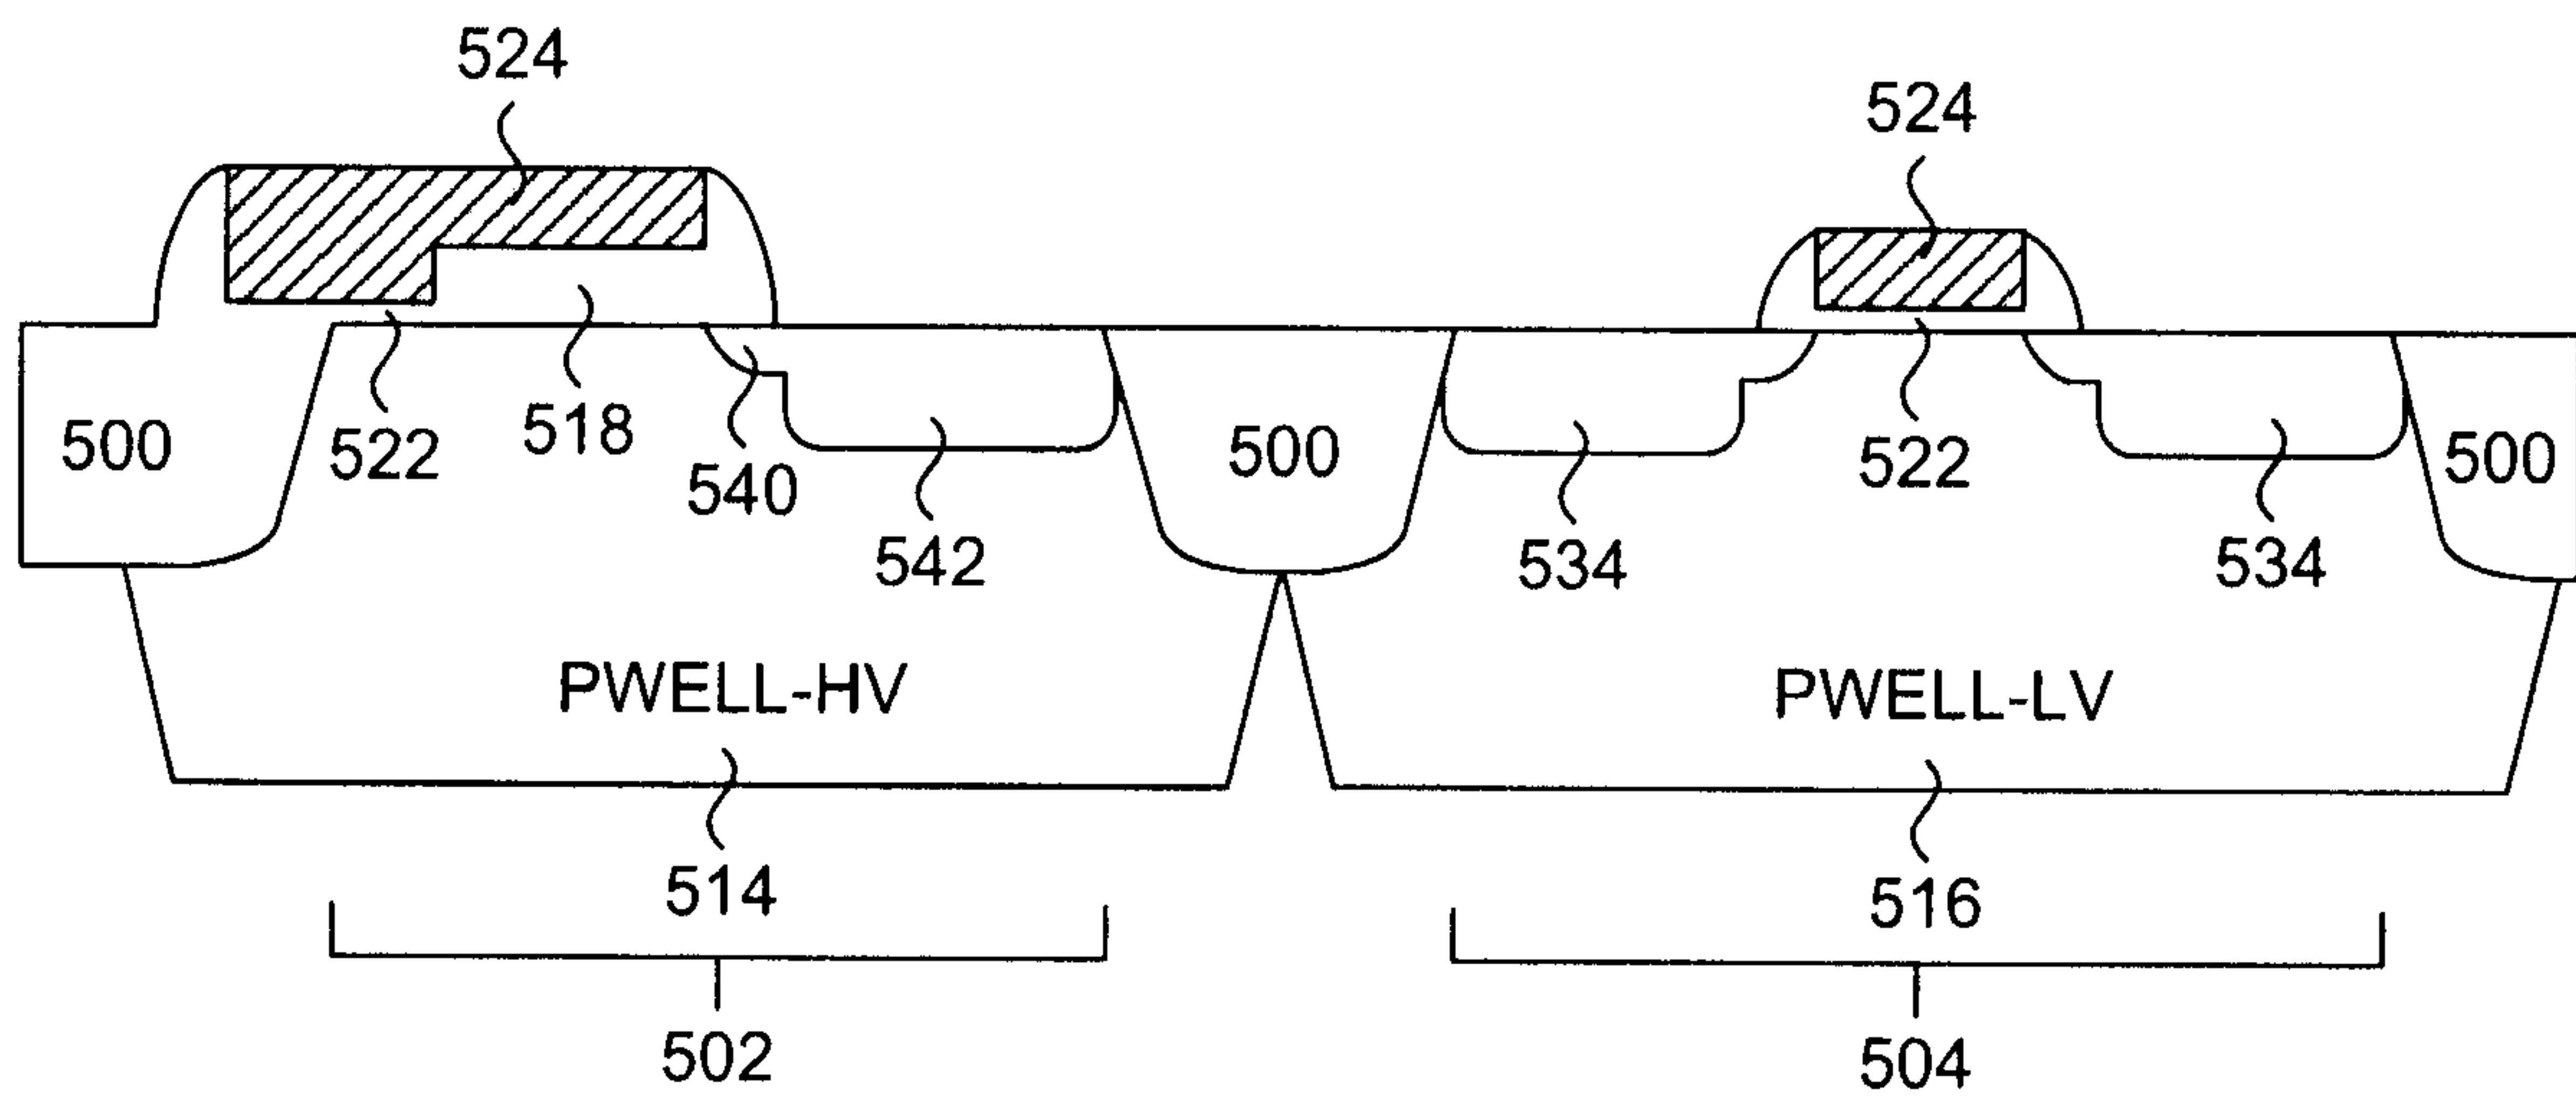


FIG 10G

13/15

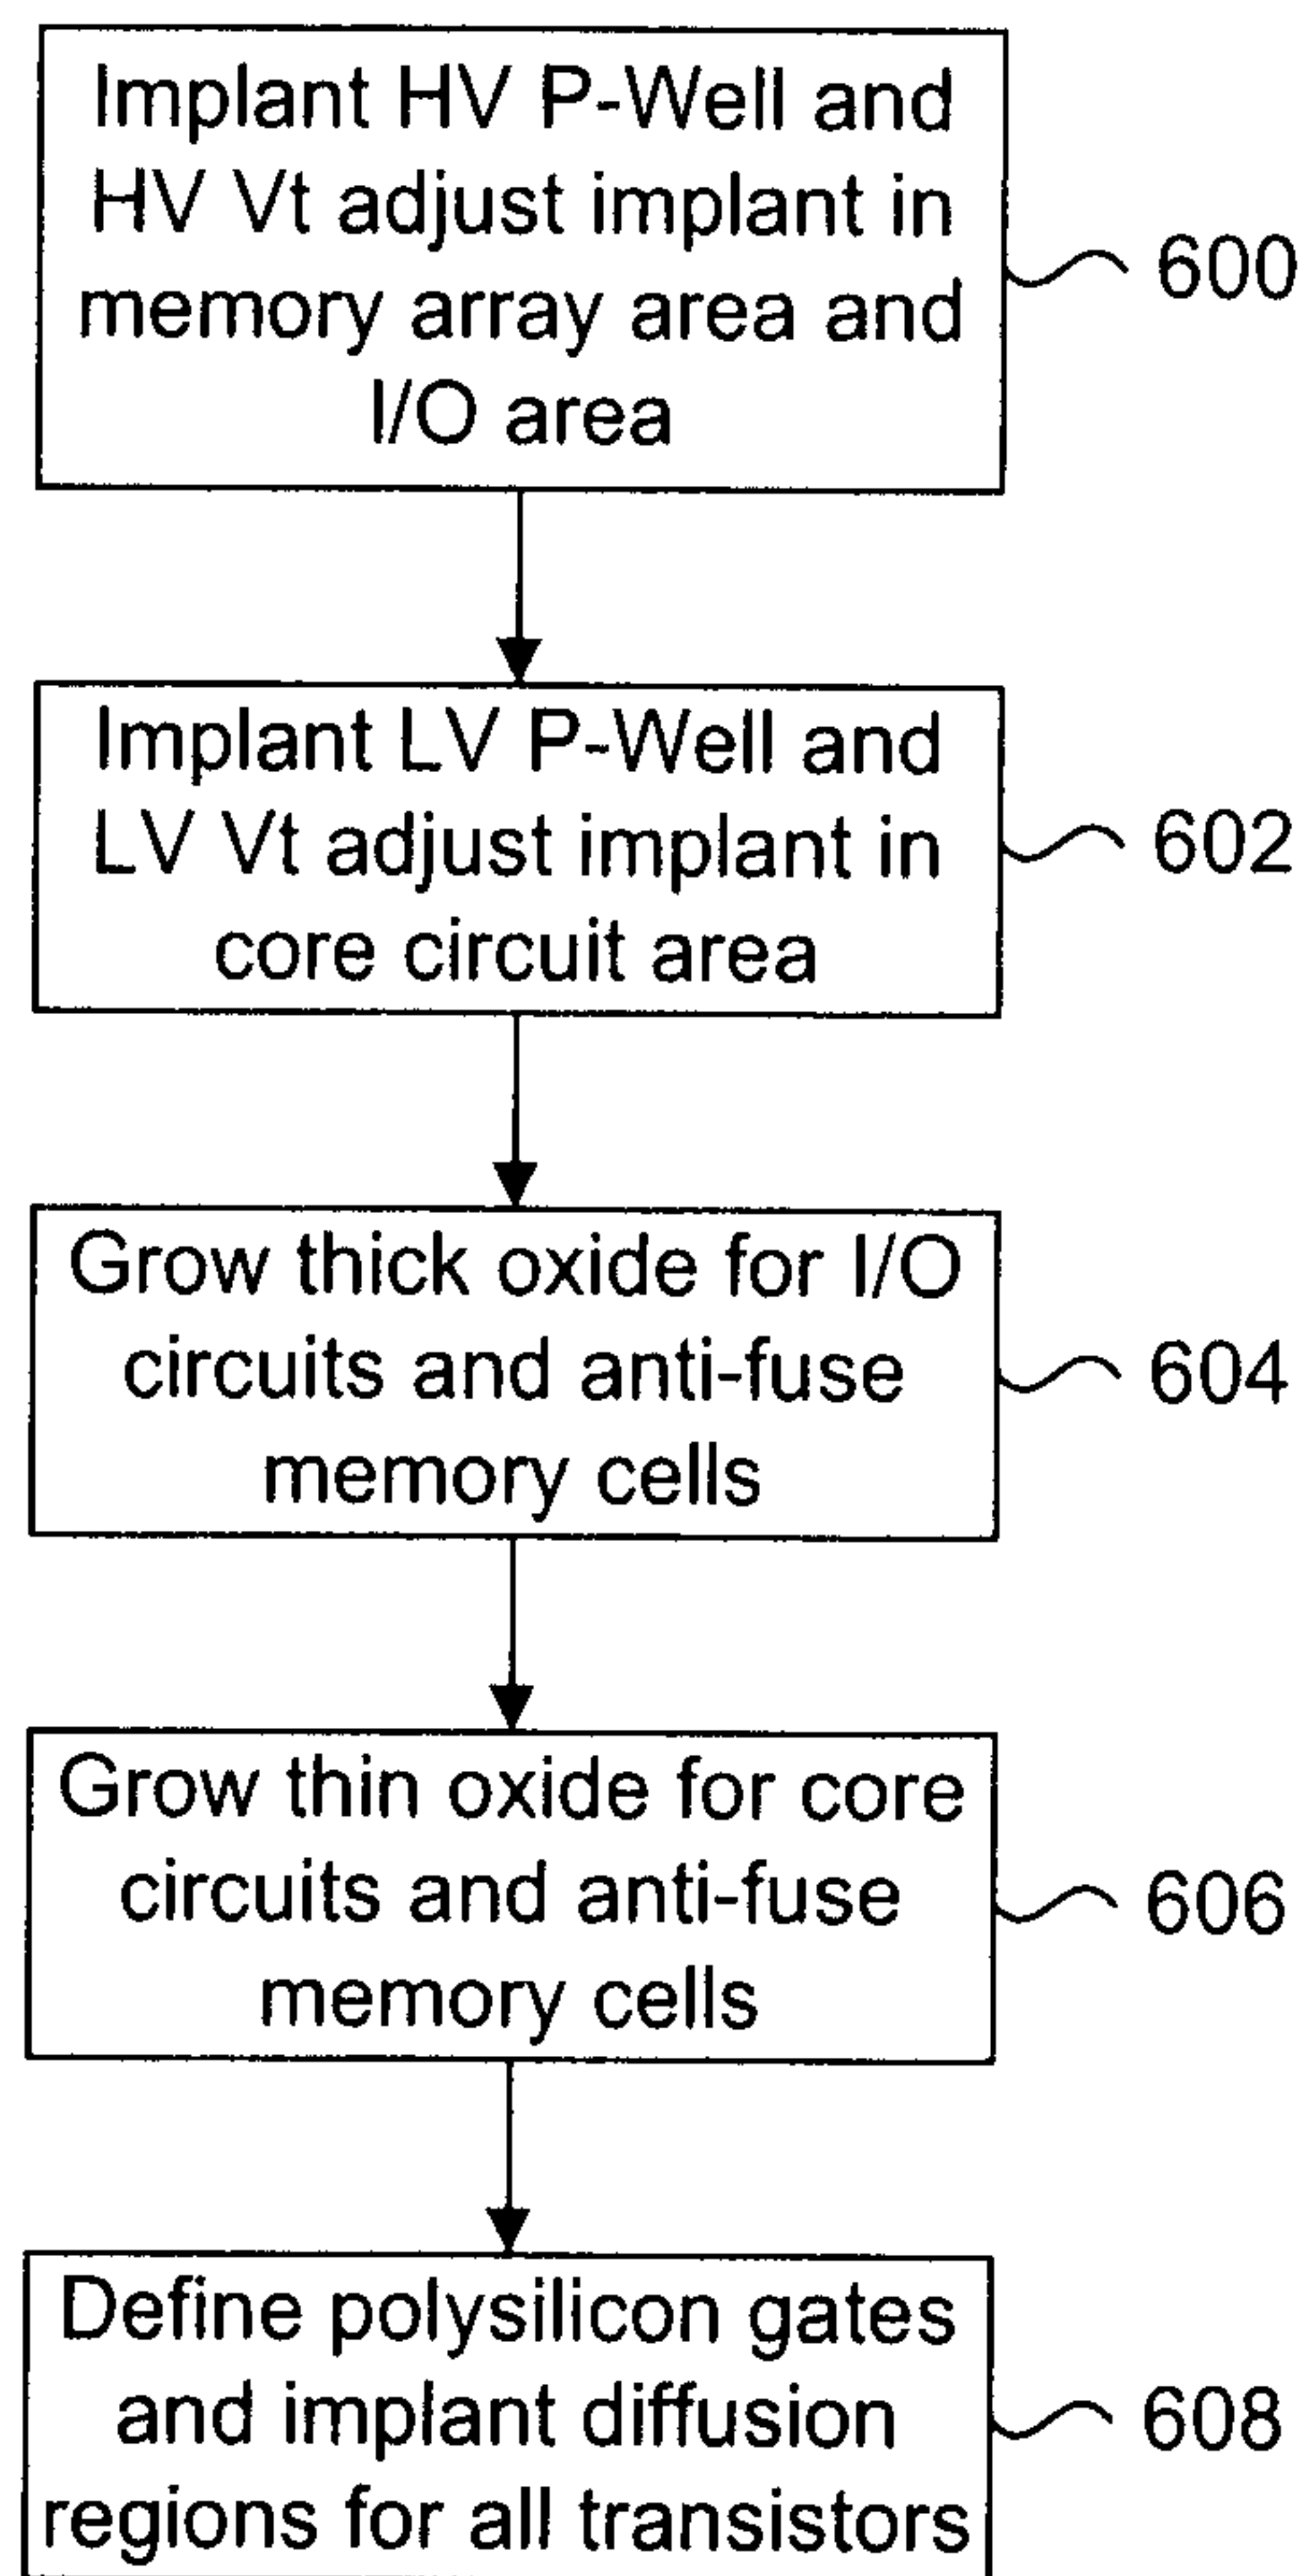


FIG 11

14/15

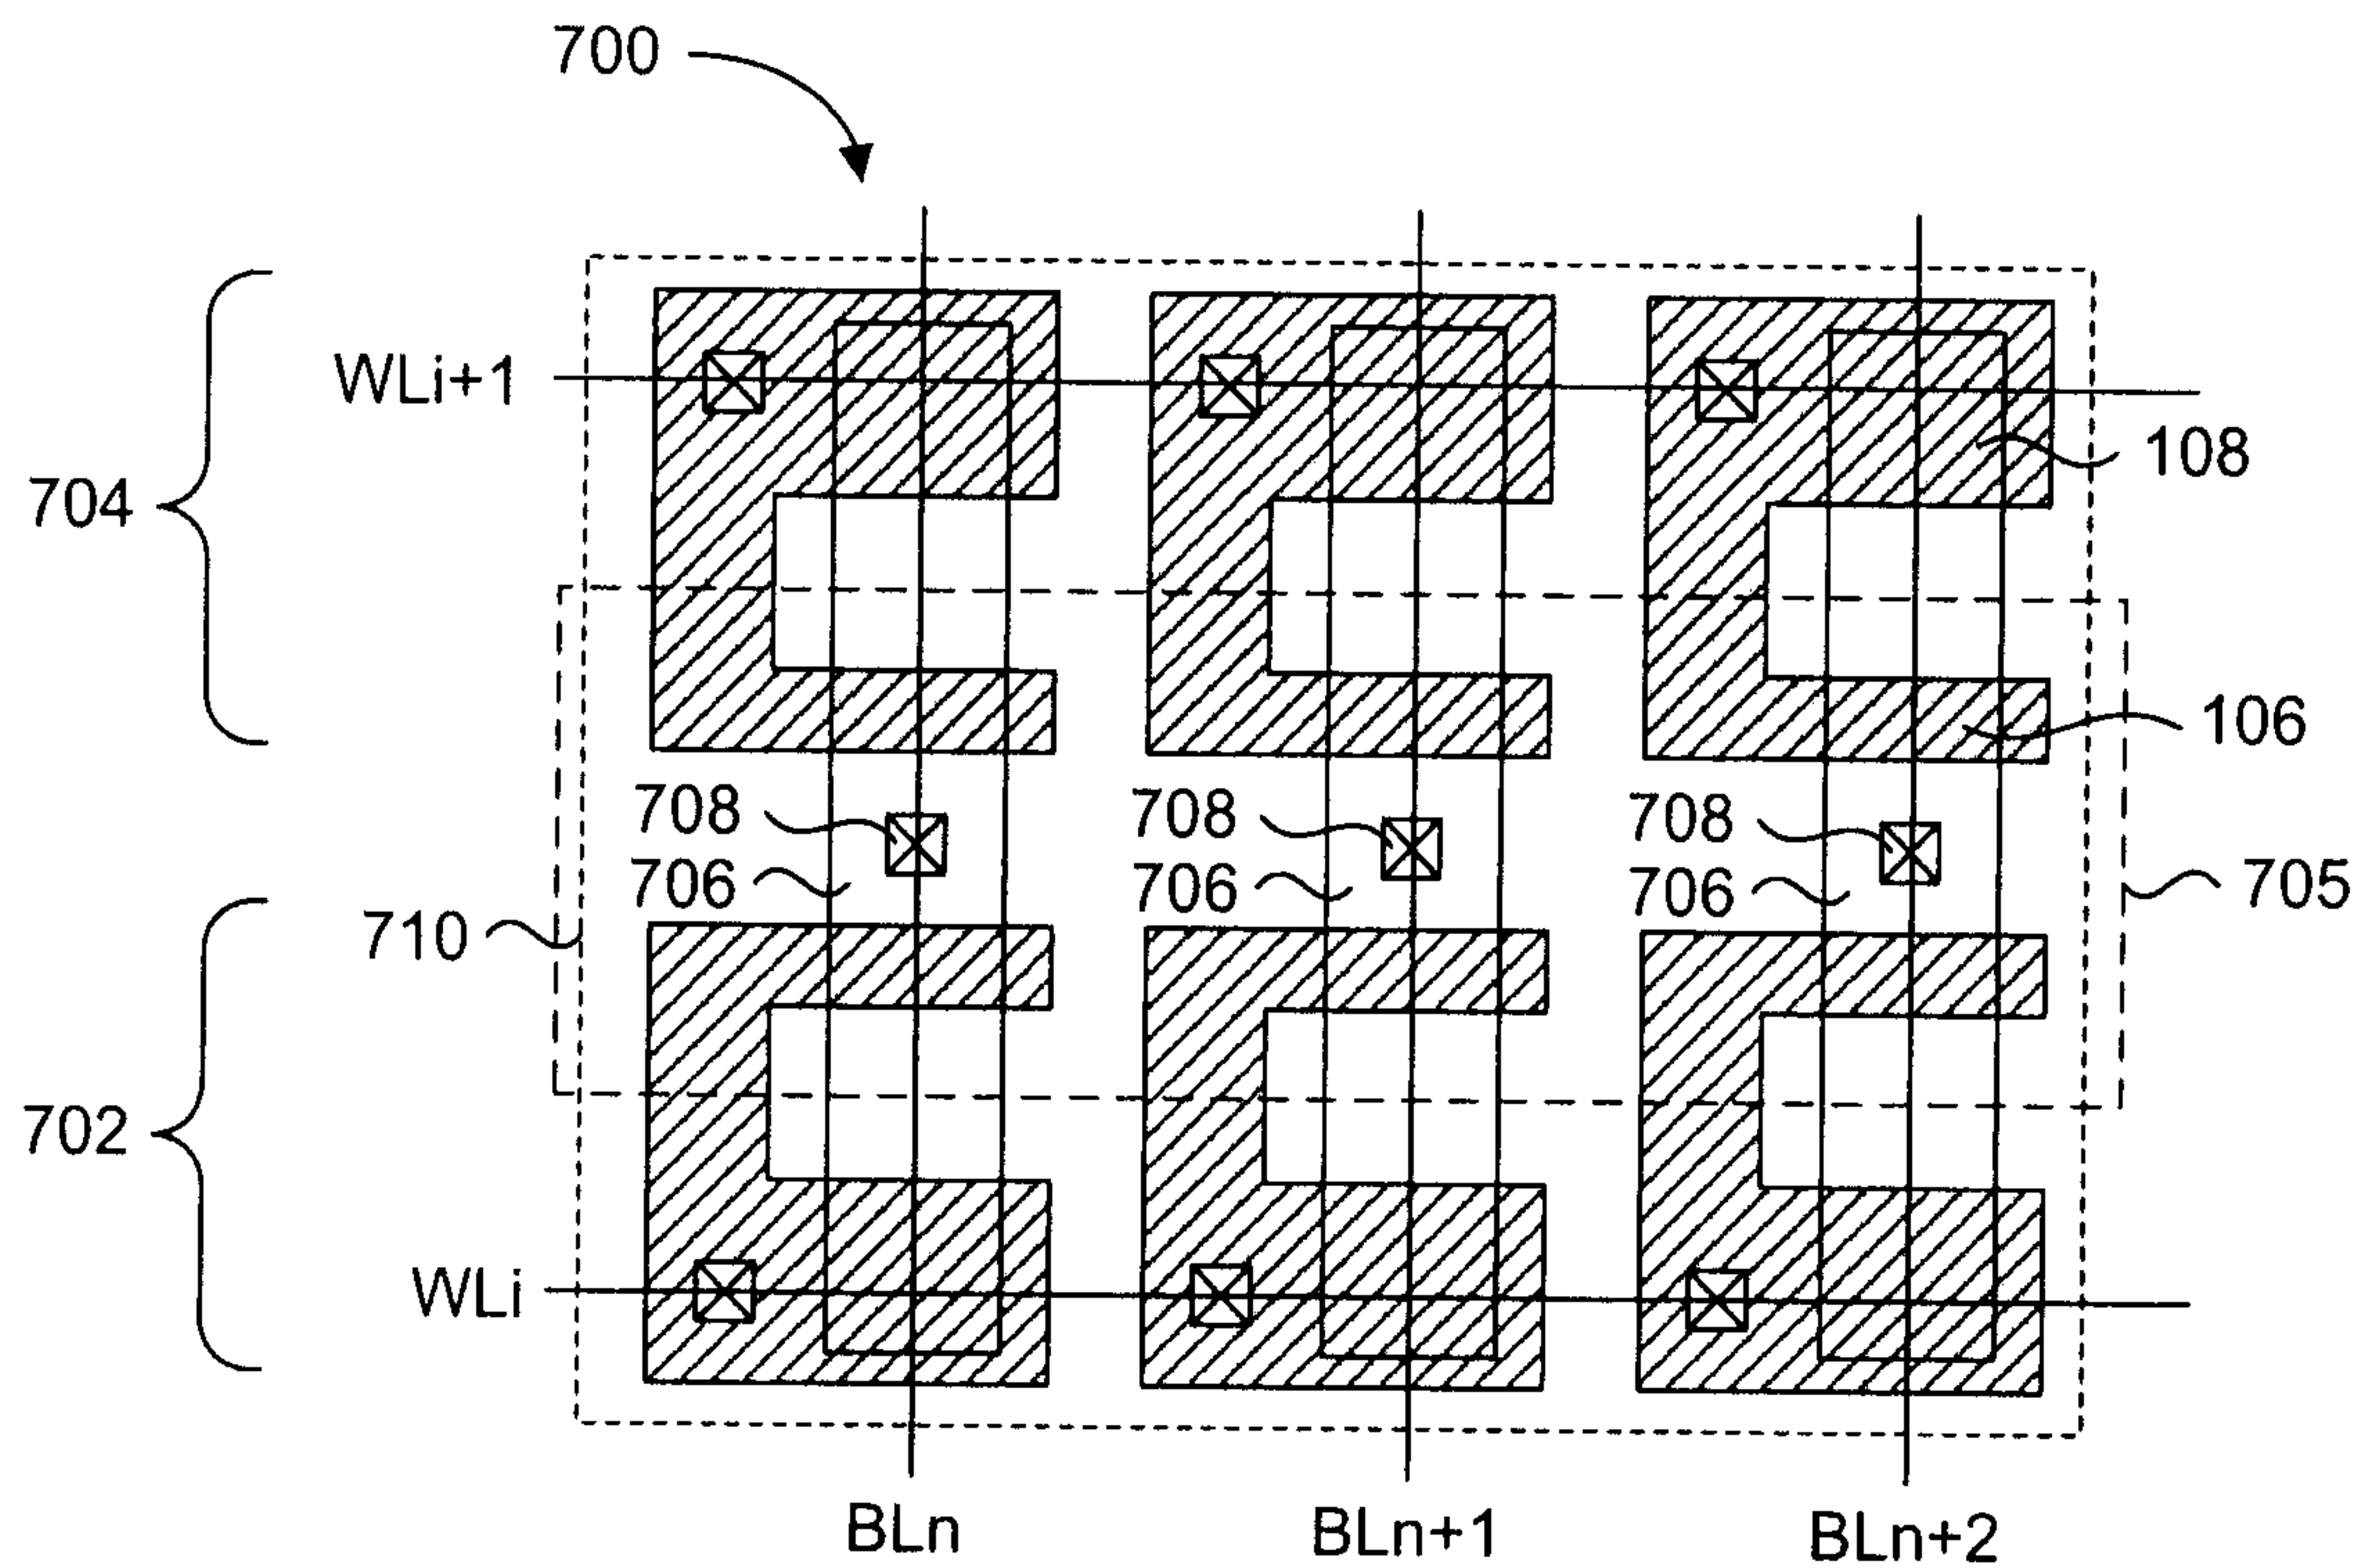


FIG. 12

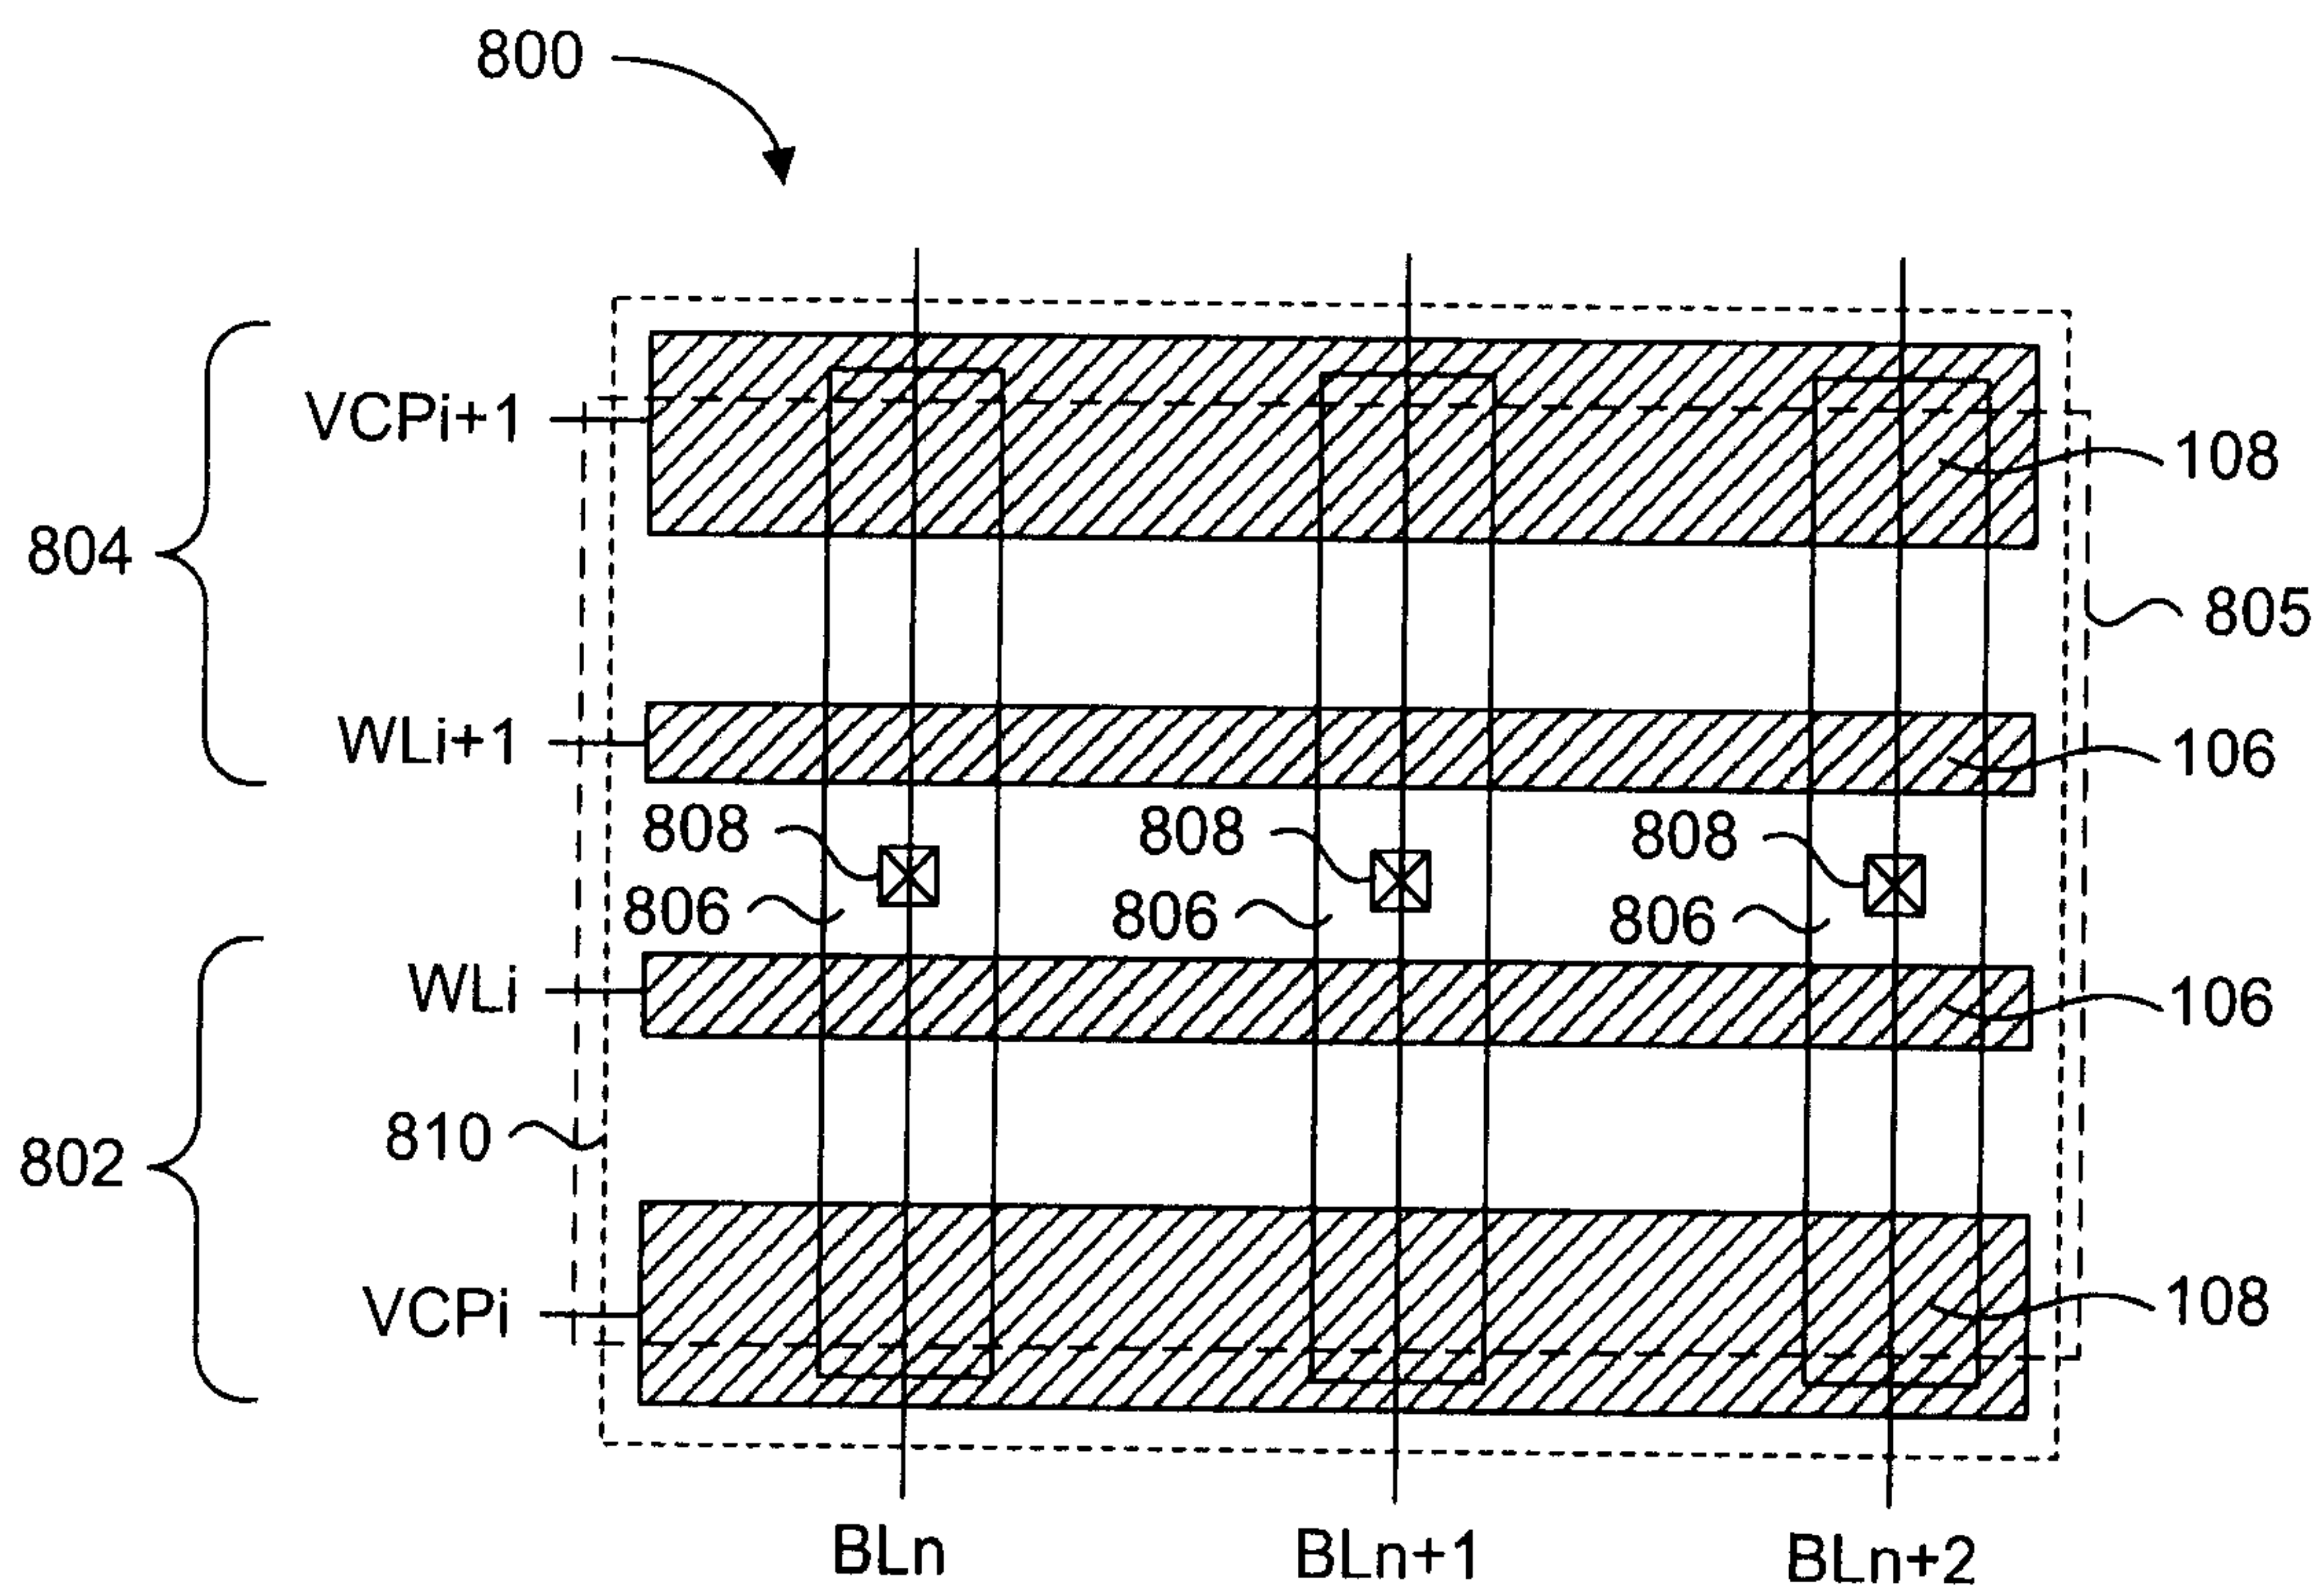


FIG. 13

15/15

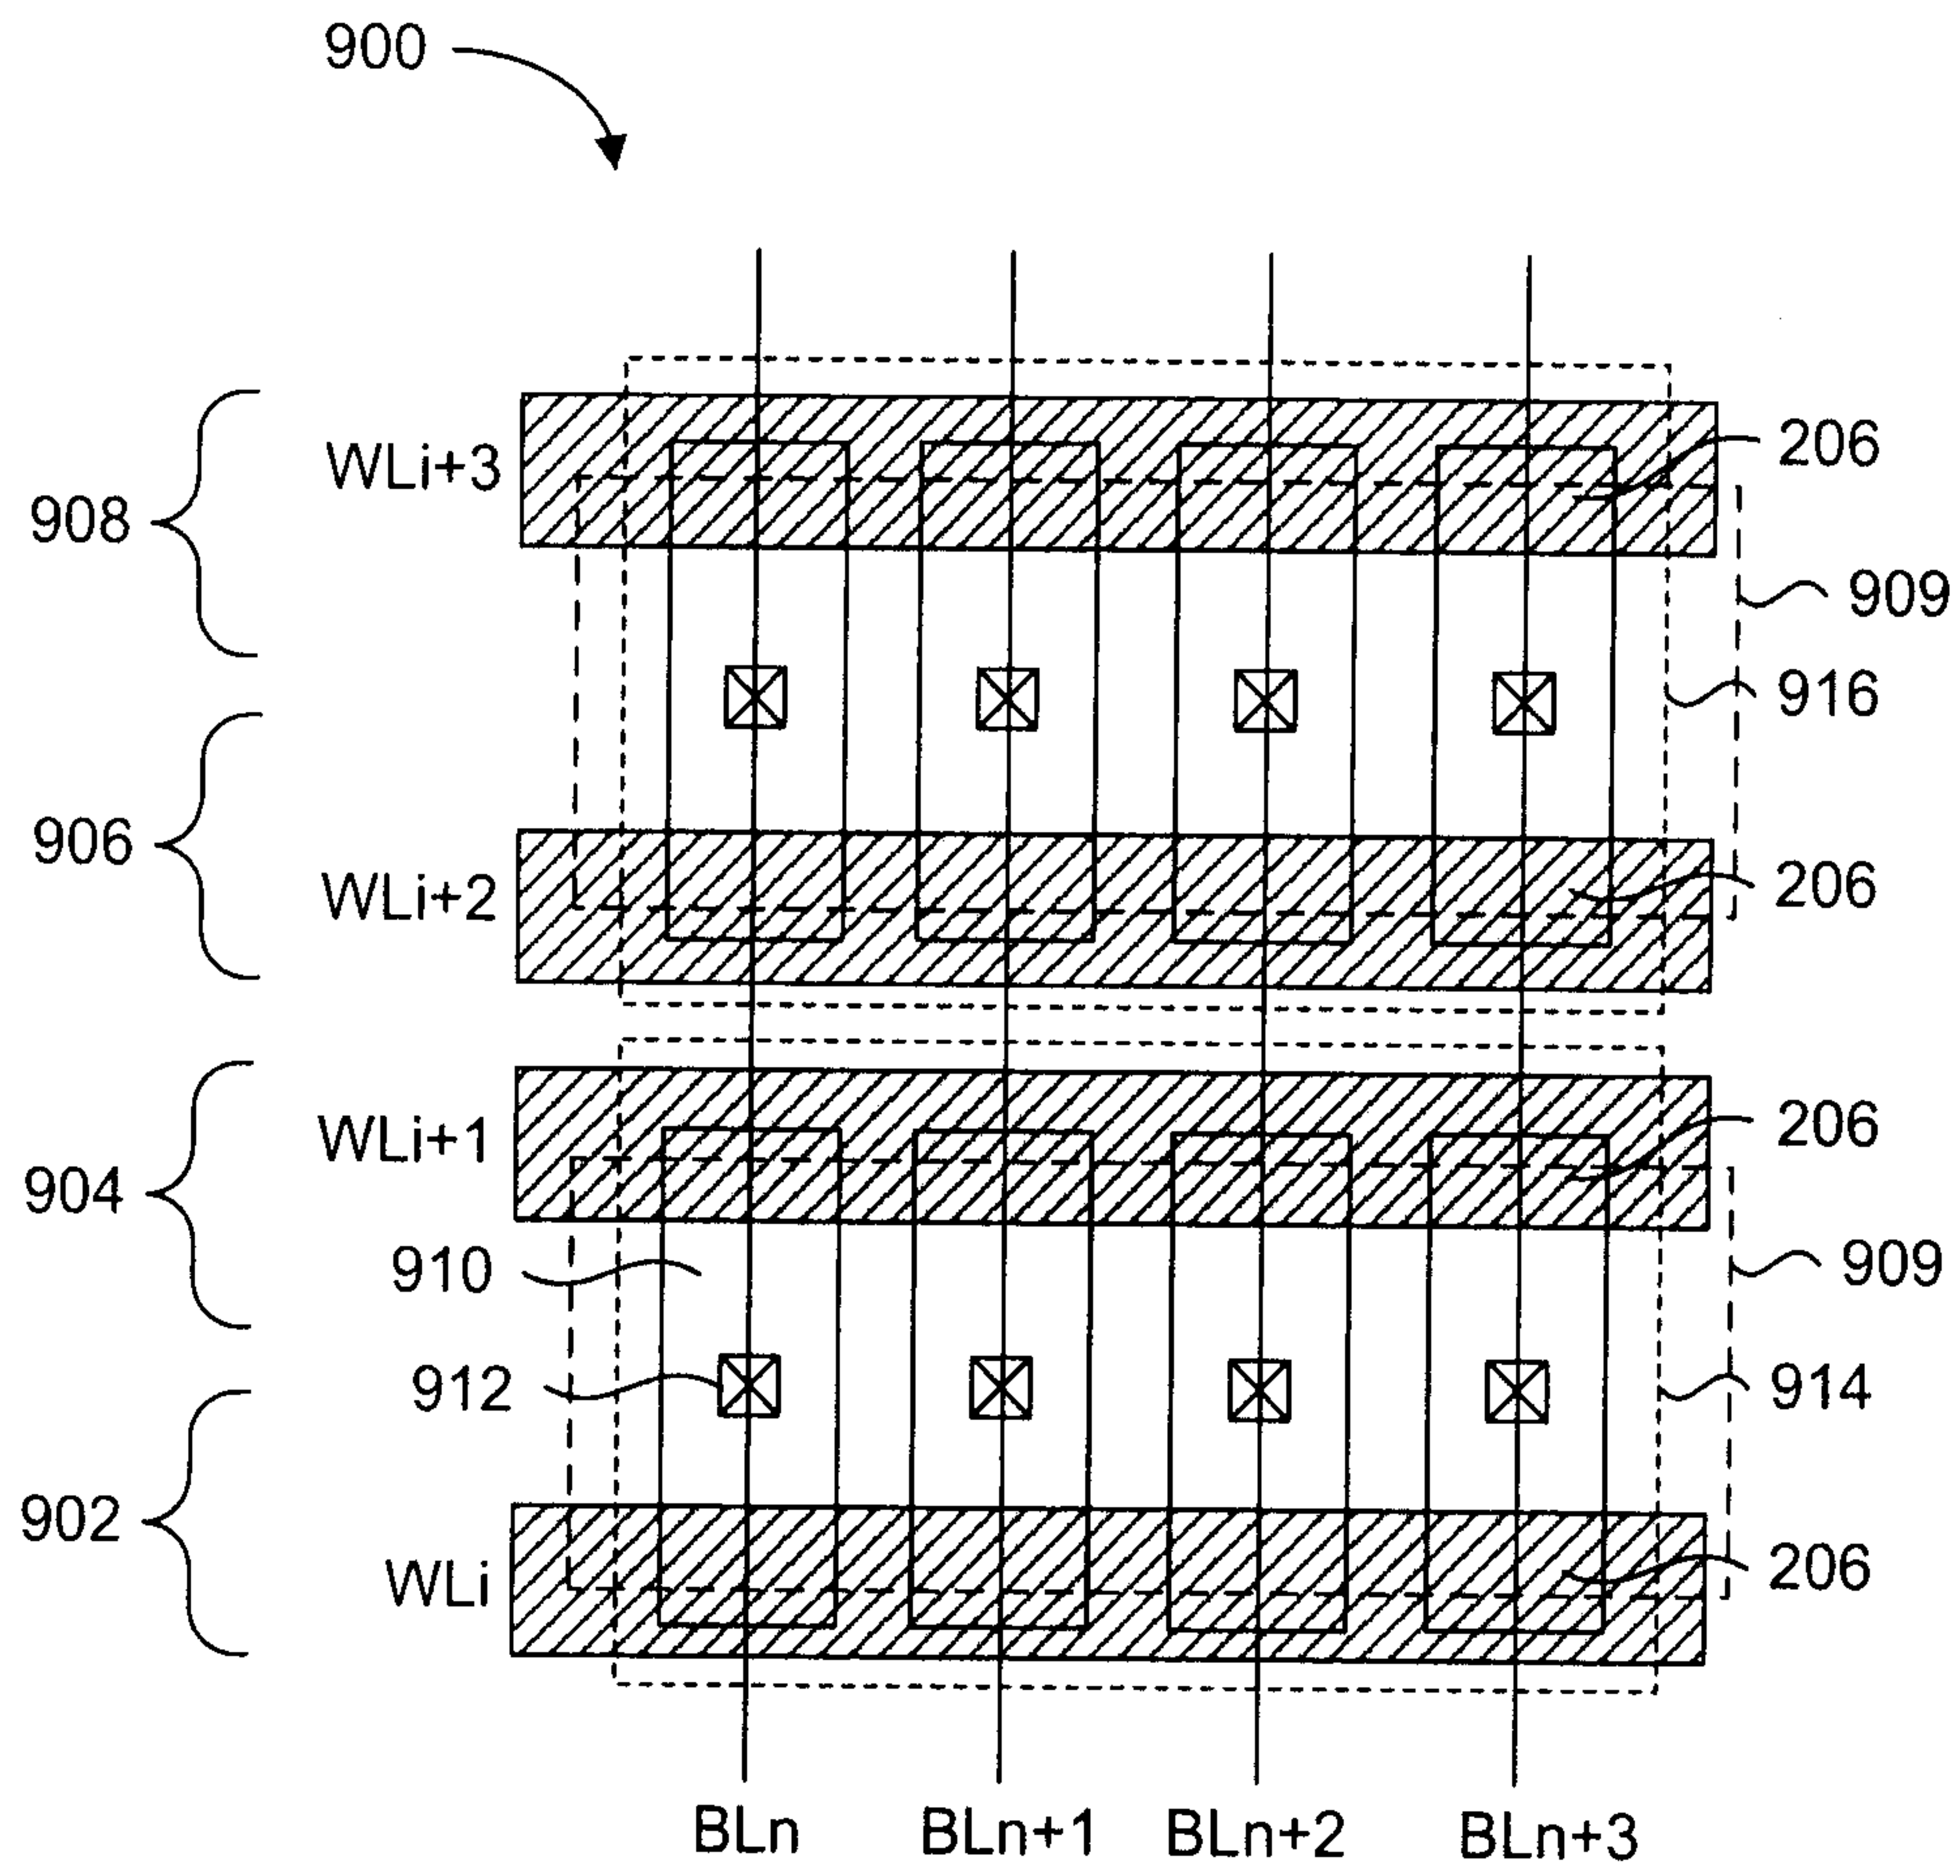


FIG. 14

