

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
29 January 2009 (29.01.2009)

PCT

(10) International Publication Number  
**WO 2009/013450 A1**

(51) International Patent Classification:  
A61B 5/097 (2006.01)

(21) International Application Number:  
PCT/GB2008/001954

(22) International Filing Date: 6 June 2008 (06.06.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0714424.9 24 July 2007 (24.07.2007) GB

(71) Applicant (for all designated States except US): **EQUINE HEALTHCARE LIMITED** [GB/GB]; 1 Worthing Road, Swanton Morley, Dereham, Norfolk NR20 4QD (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BULBROOK, George, Lee** [GB/GB]; Orchard Cottage, Bintree Road, Billingford, Dereham, Norfolk NR20 4AJ (GB).

(74) Agent: **IP21 LIMITED**; Central Formalities Department, Norwich Research Park, Colney, Norwich Norfolk NR4 7UT (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


**Declarations under Rule 4.17:**

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

**Published:**

- with international search report

(54) Title: BREATH CONDENSATE COLLECTOR

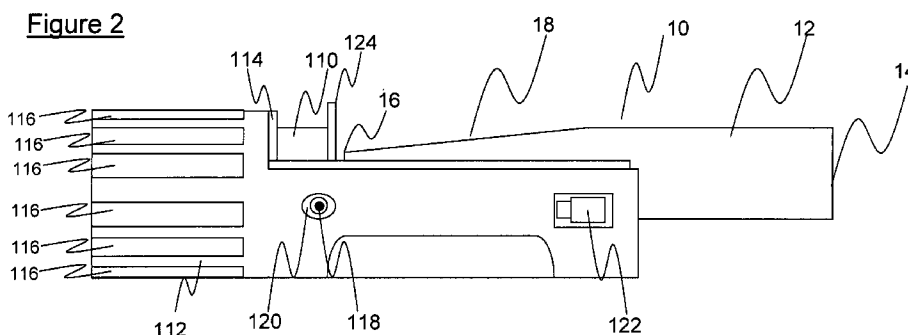

(57) Abstract: A breath condensate collector (10) comprising a chamber having a breath inlet port (14) and an outlet port (16); a sample collector, adapted to receive breath from the chamber outlet and having air exhaust means; cooling means (112) to promote in use condensation of vapour from breath entering the sample collector and where the sample collector comprises a partially lidded dish (110).



WO 2009/013450 A1

5

10

- 1 -

## BREATH CONDENSATE COLLECTOR

### Field of the Invention

15

This invention concerns apparatus for the collection of breath condensate and also apparatus specifically for collection of breath condensate from animals, especially horses and humans.

20

### Background and Prior Art known to the Applicant

Breath Condensate collectors are known. For example, application number GB 2427686 discloses, in its broadest aspect:

25

*A breath condensate collector comprising: a chamber having a breath inlet port, an air inlet port and an outlet port; a one-way valve, located in said air inlet port, to allow flow of air into the chamber, whilst resisting flow of air or breath out of the chamber; a sample collector, adapted to receive air from the chamber outlet, and having air exhaust means; cooling means, to promote, in use, condensation of vapour from breath entering the sample*

30 *collector; and characterised by the feature that the flow path from the breath inlet port to the sample collector is unimpeded by a valve.*

Application GB 2427686 also discloses the following prior art:

Determination of the concentration of metabolites present in exhaled breath is useful for a number of clinical indications. One such metabolite is hydrogen peroxide, and elevated levels of this in exhaled breath can be indicative of pulmonary dysfunction. Apparatus for the collection breath condensate are known in themselves. One such device is illustrated in Figure 1. The device consists essentially of a tube 1 with a side-arm 2. Within the tube are two one-way valves, 3 and 4, located either side of the side arm. The side arm acts as a mouthpiece, and may be specifically shaped to assist sealing by a user's lips. During use, a patient inserts the mouthpiece into their mouth, and is instructed to breathe through their mouth (rather than nose). As they breathe in, the valve arrangement allows air to pass through the lower one-way valve, 4, with the upper valve, 3, remaining closed, as indicated in Figure 1(a). As they breathe out, the lower valve 4 closes, and the upper valve opens, causing the air to pass through the upper portion of the tube 1. Breath condensate then collects on the inner surface of the tube 1, from where it may be harvested. Cooling may be applied to the outside of the tube, 1, to promote condensation.

In one such type of apparatus, the upper valve 3, is of a so-called "duckbill" configuration – a generally dome-shaped configuration, made of a rubber-like material, and having a slit at the domed end, forming a pair of lip-like structures. This is illustrated in cross-section in Figure 1. In its relaxed state, the duckbill valve is in a closed configuration. A decreased pressure within the dome of the valve, as would be experienced during inhalation tends to maintain this closed configuration. An increased pressure within the dome, as would be experienced during exhalation against the now closed second valve, 4, causes the valve to open. It is known that, during storage, one-way valves (and especially those of the "duckbill" configuration) tend to stick in their "at rest" state. In consequence, the device may prevent a user from exhaling. Unless rectified by an informed user before use, this phenomenon may cause alarm. Whilst an informed adult user might recognise the problem, and take actions to remedy it, a child may tend to become distressed, or annoyed.

The passage of air through the valve systems also tends to offer some resistance to breathing. For informed and cooperative users, with relatively good lung function, this is usually not problematic, but can become a significant drawback in situations where communication with the patient, or subject, is difficult.

*In addition, devices of this nature require the user to consciously breathe through their mouths, rather than through their nose. Again, when used with informed and cooperative users this is usually not problematic, but can become problematic where communication with the patient, or subject, is difficult.*

5

*Finally, devices of this nature are relatively complex, and require multiple one-way valves, located within the body of a narrow tube, in order to function. This tends to increase manufacture costs.*

10 *All of these problems with current devices become especially heightened in the field of veterinary, and especially equine, healthcare. In these situations, the subject animal is likely to be restless, uncooperative, and easily alarmed. On top of this, meaningful communication is impossible.*

15 Since that invention, it has been discovered that the type of sample collected in conventional collectors usually comprises a mixture of aerosol and true condensate.

None of the current breath condensate collectors facilitates the collection of both types of sample separately.

20

Both are useful to the analyst, but for different diagnostic purposes. As there is therefore a need for a condensate collector, which makes easy the collection of samples enriched in condensate or aerosol.

25 In addition, it has been observed that existing breath condensate collection technology can cause problems for those who need to take a quick sample – perhaps for a drug test before a horse race – or those who need to take a sample outside of a well – equipped clinical environment, such as travelling vets.

Of course, such environments present a greater risk of contamination to samples, and the  
30 high risk of contamination is something which previous examples of the art have suffered, perhaps due to their complexity, or perhaps due to the difficulties presented to the person who would try to clean them.

It is an object of the present invention to attempt to provide a solution to these and other problems.

### Summary of the Invention

5

In its broadest aspect, the invention comprises a breath condensate collector comprising a chamber having a breath inlet port and an outlet port; a sample collector, adapted to receive breath from the chamber outlet and having air exhaust means; cooling means to promote in use condensation of vapour from breath entering the sample collector and  
10 where the sample collector comprises a partially lidded dish.

Samples will collect in both the chamber and the sample collector. Samples in the chamber will be condensate rich; Samples in the sample collector will be aerosol rich.

15 By partially lidded dish, it is meant that the area of the opening of the dish is less than the cross sectional area of the dish's interior immediately beneath the opening.

The partially lidded dish is advantageous over fully open receptacles in that when air flows into the dish, it will not immediately deflect back out of the dish again. Instead, a large  
20 proportion of the breath will hit the inside of the lid. Unable to vacate the sample collector, it is caused to swirl around. Such swirling will lead to the deposition of more condensate and aerosol from the breath, into the dish itself. This gives a larger sample, and may also have more diagnostic value, since parts of the sample more easily carried by the air will be more likely to settle in the dish.

25

The partially lidded dish is further advantageous in relation to open dishes in that it provides a smaller target for contamination.

The invention is further advantageous in that both the chamber and the sample collector  
30 may be used to collect condensate. In other words, the invention provides a breath collection apparatus, having two sample collection recipients: one with a collection surface substantially parallel to the flow of breath for collection of a sample primarily comprising breath condensate and a second recipient with a collection surface substantially perpendicular to the flow of breath (such that the breath flow impinges on the collection

surface thereby causing breath borne aerosol droplets to impact on the collection surface) for collection of sample containing condensate and enriched with breath – borne aerosol. Given that it has been proven that each sort of condensate has its own value, this may prove particularly useful in cases where a comparative study is desirable, and further or  
5 alternatively in situations where tests on both samples may advantageously be taken, or further where the right test has yet to be ascertained, and therefore either or both samples may prove useful.

Still more advantageous is the fact that both samples may be collected almost simultaneously, via one exhalation from the subject. This is quicker, and this speed is useful  
10 when the very act of procuring the sample is putting an animal under stress.

In any aspect of invention, it is preferable that the chamber is cylindrical.

It is advantageous to have a cylindrical chamber because it is easier to scrape the  
15 condensate out of a cylinder – none of it will be stuck in corners, or at the intersection between planes, as would happen with a rectangular or a pyramidal chamber. As has been mentioned, the condensate collected in the cylinder has particular diagnostic value and as such it is especially important that collection should be made easier.

20 For the same reason, it is easier to clean cylindrical tubes. This is particularly important where tests may be for a contagious disease, because hygiene will be paramount in those circumstances.

Also, in any aspect of invention, it is preferable that at least a part of the chamber is  
25 tapered.

The tapered chamber is particularly advantageous in that it disrupts air passing down it, creating turbulent rather than laminar flow conditions. This has two subsidiary advantages in itself.

30 The first is that the turbulence tends to cause more condensate and aerosol to drop out of the air.

The second is that turbulent flow leads to the formation of a thinner boundary layer on the inside of the tube, which itself increases condensation.

Also, in any aspect of invention, it is preferable that at least a part of the inner surface of  
5 the chamber comprises a hydrophobic material.

This is particularly advantageous in that hydrophobic material will encourage the condensate to form droplets, rather than spread out and "wet" the surface. This will lead to faster and more effective collecting of condensate from the chamber.

10

It is also advantageous in that the provision of a hydrophobic surface will tend to aid the flowing of the condensate from chamber to sample collector, especially when held at such an angle as to encourage such flow.

15 Also, in any aspect of invention, it is preferable that at least part of the inner surface of the sample collector comprises a hydrophobic material.

This is particularly advantageous in that hydrophobic material will encourage the condensate to form droplets, rather than spread out and "wet" the surface. This will lead to  
20 faster and more effective collecting of condensate from the sample collector.

Also, in any aspect of invention, it is preferable that the cooling means comprises a Peltier device.

25 The provision of a Peltier device is advantageous, in that it provides a manner of controlling the temperature of a sample collector placed adjacent to it, to a high degree of precision.

A second advantage is that the Peltier device will tend to cool for longer than other means,  
30 such as a gel wrapper or the provision of cold – retentive materials.

The most important advantage of all is that unlike the gel wrapper and the cold retentive materials, the Peltier device provides its own means for displacing heat – it is integral to the condensate collector and is not reliant on external sources for cooling. This will be of

particular utility to the travelling veterinarian, for example, who may need to take samples of condensate on an *ad hoc* basis, and away from the external refrigeration means that would be required to cool other cooling means to the requisite temperature.

- 5 Also, in any aspect of invention, it is preferable that the breath condensate collector further comprises a wand.

It is particularly advantageous to include a wand in the apparatus, as the wand may be used to collect condensate from the chamber and the sample collector.

10

Also, in any aspect of invention, it is preferable that the wand is tapered.

The wand will be of advantage in that when held correctly, the taper will encourage the condensate to run along the wand and form at the tip, allowing for ease of collection.

15

Also, in any aspect of invention, it is preferable that the wand is resiliently deformable.

Advantageously, the resiliently deformable wand will deform to match the profile of the inside of the condensate collector, allowing the wand to scrape or wipe in a quicker and  
20 more comprehensive fashion, covering more of the surface area per motion.

Also, in any aspect of invention, it is preferable that the surface of the wand is hydrophobic.

- 25 Making the surface of the wand hydrophobic will encourage the formation of droplets on the wand, which will enhance the efficiency with which a large droplet can be formed at the end of the wand.

30 That the wand is hydrophobic will further encourage the travel of the droplets to the tip of the wand.

In another aspect, the invention comprises a breath condensate collector comprising a chamber having a breath inlet port and an outlet port; a sample collector, adapted to receive breath from the chamber outlet and having air exhaust means; cooling means to

promote in use condensation of vapour from breath entering the sample collector and wherein the chamber is cylindrical.

5 In another aspect, the invention comprises a breath condensate collector comprising a chamber having a breath inlet port and an outlet port; a sample collector, adapted to receive breath from the chamber outlet and having air exhaust means; cooling means to promote in use condensation of vapour from breath entering the sample collector and wherein the chamber is tapered

10 In another aspect, the invention comprises a breath condensate collector comprising a chamber having a breath inlet port and an outlet port; a sample collector, adapted to receive breath from the chamber outlet and having air exhaust means; cooling means to promote in use condensation of vapour from breath entering the sample collector and wherein the chamber comprises a hydrophobic material.

15 In another aspect, the invention comprises a breath condensate collector comprising a chamber having a breath inlet port and an outlet port; a sample collector, adapted to receive breath from the chamber outlet and having air exhaust means; cooling means to promote in use condensation of vapour from breath entering the sample collector and  
20 wherein at least part of the inner surface of the sample collector comprises a hydrophobic material.

In another aspect, the invention comprises a breath condensate collector comprising a chamber having a breath inlet port and an outlet port; a sample collector, adapted to  
25 receive breath from the chamber outlet and having air exhaust means; cooling means to promote in use condensation of vapour from breath entering the sample collector and wherein the cooling means comprises a Peltier device.

In another aspect, the invention comprises a breath condensate collector comprising a  
30 chamber having a breath inlet port and an outlet port; a sample collector, adapted to receive breath from the chamber outlet and having air exhaust means; cooling means to promote in use condensation of vapour from breath entering the sample collector; and a wand.

In another aspect, the invention comprises a breath condensate collector comprising a chamber having a breath inlet port and an outlet port; a sample collector, adapted to receive breath from the chamber outlet and having air exhaust means; cooling means to promote in use condensation of vapour from breath entering the sample collector; and a tapered wand.

In another aspect, the invention comprises a breath condensate collector comprising a chamber having a breath inlet port and an outlet port; a sample collector, adapted to receive breath from the chamber outlet and having air exhaust means; cooling means to promote in use condensation of vapour from breath entering the sample collector; and a resiliently deformable wand.

In another aspect, the invention comprises a breath condensate collector comprising a chamber having a breath inlet port and an outlet port; a sample collector, adapted to receive breath from the chamber outlet and having air exhaust means; cooling means to promote in use condensation of vapour from breath entering the sample collector; and a hydrophobic wand.

#### Brief Description of the Drawings

20

The invention will be illustrated by the accompanying drawings, in which:

Figure 1 shows a cross sectional view of the prior art.

25 Figure 2 shows a side elevation view of a breath collection device.

Figure 3 shows a cross – sectional side view of a partially lidded dish.

Figure 4 shows a plan view of the device.

30

Figure 5 shows a plan view of a disposable tube.

Figure 6 shows an elevational view of a wand.

Figure 7 shows an elevational view of a chamber.

Figure 8 shows a further elevational view of a chamber.

5 Figure 9 shows a further elevational view of a chamber.

Figure 10 shows a further elevational view of a chamber.

Figure 11 shows a further elevational view of a chamber.

10

Figure 12 shows a cross sectional view of a chamber and a dish, illustrating a wand in use.

Figure 13 shows a cross sectional view of a chamber and a dish, illustrating a wand in use.

15 Description of Preferred Embodiments

Figure 2 shows a breath condensate collector generally indicated by 10. This embodiment is made largely of polypropylene and aluminium, both of which are robust and easy to clean. The device 10 has a chamber 12, with a breath inlet port 14 and an outlet port 16.

20 In the present embodiment, the chamber 12 is cylindrical and has a circular cross section. The chamber also has a tapered portion 18. Other embodiments need not be cylindrical. Equally, the chamber 12 may be entirely tapered or not tapered at all. A particularly advantageous shape for the chamber 12 is a frusto – conical shape or similar, since a resiliently deformable wand may easily be designed to match the profile of the taper of  
25 the inner surface of such a chamber 12.

In this embodiment, the inlet port 14 is furthest away from the sample collector, which is a partially lidded dish 110, while the outlet port 16 is near to the partially lidded dish 110. The chamber 12 fits frictionally inside the breath condensate collector 10. It may  
30 alternatively be held in place by supplementary attachment means. In this embodiment, the chamber 12 is removable.

In this embodiment, the entire inside of the chamber 12 is coated with a hydrophobic material. This may be a material of the polytetrafluoroethylene (PTFE) family such as

Teflon™, made by E. I. du Pont de Nemours and Company of 1007 Market St. Wilmington, DE 19898, USA, or comprise a siliconised surface or any other material or combination of materials known to the skilled man. The material may be part of the chamber 12 itself or the chamber 12 may be made from it. It may cover all or part of the  
5 inside of the chamber 12.

The chamber 12, may be partially or entirely transparent.

In this embodiment, the chamber 12 is reusable and it is made of plastics. It is so fashioned  
10 that it may be easily cleaned between uses. Reusable chambers may also be fashioned of stainless steel or composite materials. Alternatively, disposable cardboard or plastics chambers may be appropriate.

Figure 3 shows a partially lidded dish 110. The dish comprises a dish portion 22 and a  
15 partial lid portion 124 defining an aperture. These two portions 22 124 are inseparable in some embodiments. In others, the partial lid portion 124 may be detached from the dish portion 22. In this embodiment, the entire inside of the dish 110 is coated with a hydrophobic material. This may be a material of the polytetrafluoroethylene (PTFE) family, or comprise a siliconised surface or any other material or combination of materials known  
20 to the skilled man. In other embodiments, it need not be a coating – the dish 110 can be made from the material. Equally, it is not necessary that the entire surface be made or coated in a hydrophobic material – only part of it may be coated. The partially lidded dish feature is also of particular advantage over the syringe used in GB2427686 in that the partially lidded dish has a smaller surface area than the syringe and is therefore easier to  
25 cool. In this embodiment the partial lid portion 24 is transparent. The dish portion 22 is made of aluminium, in order to effect good heat transfer.

Returning to figure 2, there is illustrated an embodiment of the partially lidded dish, 110,  
30 placed in the condensate receiving position within the breath condensate collector 10. It is inside a recess (not shown). It is retained there by any retention means known to the skilled man, although a frictional fit may suffice. The partially lidded dish 110 is positioned so that its aperture faces the outlet port 16. In circumstances where the breath condensate collector 10 is positioned in such a way that its longest axis runs along a substantially horizontal plane, the partial lid feature 24 will serve to stop the condensate

from coming out of the aperture, because the inside of the partial lid feature 24 forms a reservoir with the inner surface of the partially lidded dish 110.

The ideal placement of the partially lidded dish 110 in relation to the outlet port 18, is to have each facing the other, the outlet port 16 being so sized that condensate travelling  
5 down it will be directed into the partially lidded dish 110 and so placed so as to be substantially aligned with the aperture formed by the partial lid. In this embodiment there is a distance of about 2mm between the outlet port 16 and the partial lid portion 124. Other placements are envisaged, but this is the optimal placement. If the outlet port 16,  
10 was inside the dish 110, the flow of air into the dish 110 would serve to dry any condensate collected, thus robbing it of at least part of its diagnostic value. If the outlet port 16 was further away from the partially lidded dish 110, there would be two problems. The first would be that of improperly directed condensate, which may at least be messy, and at most the possible carrier of infectious matter or otherwise dangerous. The second  
15 would be that the flow of air would be prone to making a whistling sound upon contact with the partially lidded dish 110. In embodiments where the collector is being used to collect condensate from an animal such as a horse, the whistling may startle or otherwise disconcert the horse, thus hampering the collection of condensate or endangering the people collecting it.

20

The collector 10 further features cooling means 112 to promote in use condensation of vapour from breath entering the collection condensate vessel. In this embodiment, said cooling means 112 comprises a Peltier device, having a cooling surface 114 and heat  
dissipating fins 116 of which six can be seen. The cooling surface 114 is so arranged as to  
25 be in operable communication with the partially lidded dish 110 on a flat or curved plane, and may follow the profile of the partially lidded dish 110.

The device is powered by conventional means (not shown), and is rechargeable. It may be attached to a power source via a recharge point 118 which in this embodiment is situated  
30 in a recess 120. The employment of a Peltier device 112 dispenses with the need for external cooling means, making it particularly useful for the travelling vet, or someone who is otherwise without separate refrigeration means. The Peltier device 112 is operated via an on / off switch 122, but may alternatively be operated by a switch actuated by the placement or removal of the lidded dish 110 in the recess (not shown).

In the alternative, other cooling means, such as a pre-cooled metallic element or a cooling jacket may be substituted.

5 Figure 4 shows the invention 10. It has a partially lidded dish 110, in a recess 44. In this embodiment, it can clearly be seen that the recess 44 is so fashioned as to bring the partially lidded dish 110, into abutment with the cooling surface 46 of the Peltier device 112. In this embodiment, the fascia 410 is transparent and removable, being attached by screws 412. This increases the visibility of parts under the fascia 410 and allows easy  
10 cleaning of the device. The device also has an LED 414, which in this embodiment shines green when the device is on, and flashes red when it is running out of power.

Figure 5 shows, for human use, a disposable, cylindrical, open – ended tube made, for example, of cardboard, which may be connected to the inlet port 14 of a device 10 to  
15 facilitate a user blowing into a device without ever having to place the device itself into the mouth, with evident hygiene benefits.

Figure 6 shows a wand, 60. In this embodiment, the wand 60 is tapered, resiliently deformable and of a hydrophobic material, although in other embodiments, it might  
20 feature only a selection of these features, or none at all. In this embodiment, the dimensions of the wand are optimised so that it can best be used to remove condensate attached to the sides of a chamber, being operated by the user with a motion which could be described as "scraping" or "wiping"

25 This embodiment of the wand 60 has a deformation profile of such attributes that when, in use, force is applied to the wand 60 it deforms in such a way as to mimic the curvature of the chamber or sample collector of the device. This will enable the wand 60 to be used to scrape the condensate more quickly and effectively. Having got the condensate onto the wand 60, the provision of hydrophobic material encourages the condensate to form in  
30 beads on the wand 60. The taper will then encourage droplets on a wand 60 which is held so that the thin end is pointing substantially downwards to travel towards the tip.

Figure 7 shows a chamber 70. It has an open - ended frusto-conical profile, so as to work synergistically with a wand.

Figure 8 shows another chamber 80. It has a flange 82, allowing for the attachment of further items, such as, for example, filtration devices or deformable plastic masks.

- 5 Figure 9 shows a further chamber 90. It is cylindrical and open – ended. It has a raised, tapered inlet 92 which may act as a flange.

Figure 10 shows a still further chamber 1000. It features attachment means 1002 which in this example is a flange portion, but alternative means may be provided. For veterinary  
10 use, the chamber 1000 may be connected to a mask, adapted to fit over one or more nostrils of an animal. The mask (not shown) is specifically adapted to fit over a horse's nostril. The mask has generally cylindrical symmetry. Known devices for breath collection rely on a user putting the device in their mouth and breathing out, into the device, through the mouth rather than the nose. For veterinary use, it is not possible to communicate with  
15 animals to make them breathe through the mouth, and the use of the device in an animal's mouth poses risk of biting either the device, or the supervising veterinarian. The provision of a mask adapted to receive exhaled breath from the nostrils overcomes this problem. For some animals, it is envisaged that a suitable mask might fit over both the nose and the mouth.

20

Figure 11 shows a still further chamber 1100 with an integral mask 1102 of the type described above. In this embodiment, the mask 1102 is resiliently deformable and designed so as to fit the contours of an animal's nostril and provide an airtight seal. The mask 1102 is resiliently deformable so that if more than one attempt is required to fit the mask over  
25 the nostril, the mask will spring back into shape between attempts. The mask may also, therefore, be used again with a different animal.

Figure 12 shows a method by which a chamber 12, shown here in cross – section, is wiped or scraped of condensate 1202 using a wand 60. This is the second method of collection  
30 possible with this device, the first method being that outlined above, wherein the subject breathes down the chamber 12 and into the partially lidded dish 110. This second method facilitates collection of condensate with a lower aerosol quotient, whereas the first method facilitates collection of condensate with a higher aerosol quotient. Also shown is a dish

1204. Here the chamber 12 has been detached from the device 10. The wand 60 is placed inside the chamber 12.

Figure 13 shows a wand 60 being manipulated (manipulation means not shown) so that it  
5 deforms to form a substantial contact with the inner wall of the chamber 12. Condensate  
1202 lining the chamber 12 will be forced off it by the contact of the wand 60 as it is  
wiped around the inside of the chamber and will be manipulated into the dish 1204. It will  
be encouraged to flow down the wand 60 if the wand 60 is tapered and/or has a  
hydrophobic surface. The condensate 1202 will tend to form a droplet 1302, which when  
10 force is applied to it may drop into a conveniently placed dish 1204.

Clearly the chamber 12 need not be detached from the device 10 in order for condensate  
to be collected.

15 It is possible to use the chamber 12 and wand 60 configuration on its own (i.e. without the  
sample collector) to collect condensate, and embodiments may therefore be envisaged  
comprising the chamber 12 and the wand 60.

## CLAIMS

- 1 A breath condensate collector comprising:
- 5 a chamber having a breath inlet port and an outlet port;
- a sample collector, adapted to receive breath from the chamber outlet and having air exhaust means;
- 10 cooling means to promote in use condensation of vapour from breath entering the sample collector;
- and where the sample collector comprises a partially lidded dish.
- 15 2 A breath condensate collector according to claim 1, wherein the chamber is cylindrical.
- 3 A breath condensate collector according to either of the previous claims, where at least a part of the chamber is tapered
- 20 4 A breath condensate collector according to any preceding claim, wherein at least a part of the inner surface of the chamber comprises a hydrophobic material.
- 5 A breath condensate collector according to any preceding claim, wherein at least
- 25 part of the inner surface of the sample collector comprises a hydrophobic material.
- 6 A breath condensate collector according to any preceding claim, wherein the cooling means comprises a Peltier device.
- 30 7 A breath condensate collector according to any preceding claim further comprising a wand.
- 8 A breath condensate collector according to claim 7 wherein the wand is tapered.

- 9 A breath condensate collector according to either of claims 7 and 8 wherein the wand is resiliently deformable.
- 10 A breath condensate collector according to any of claims 7 to 9 wherein the  
5 surface of the wand is hydrophobic.
- 11 A breath condensate collector substantially as described herein, with reference to and as illustrated by any appropriate combination of the appropriate drawings.

1/5

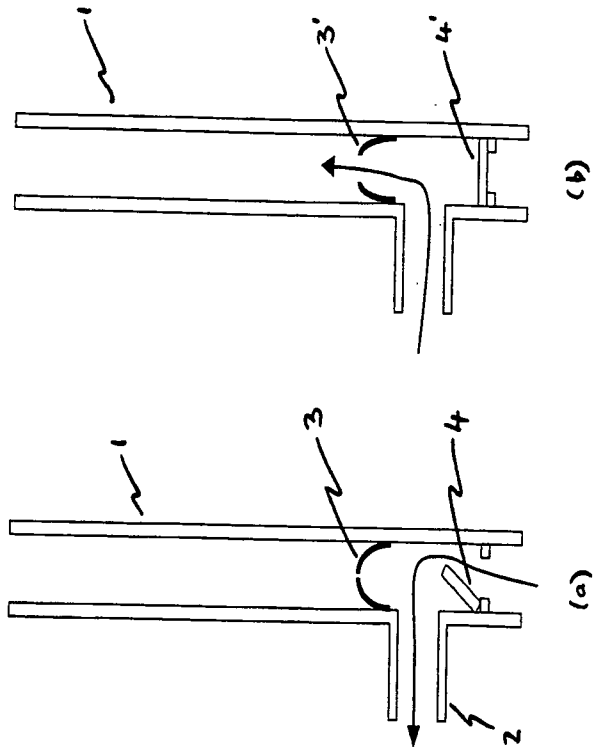


Figure 1 – Prior Art

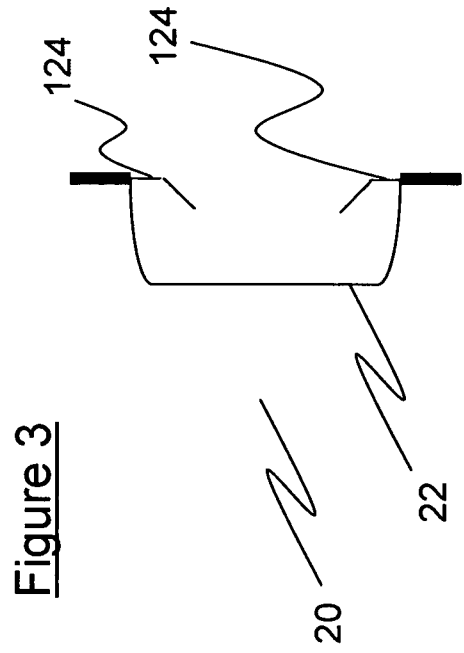
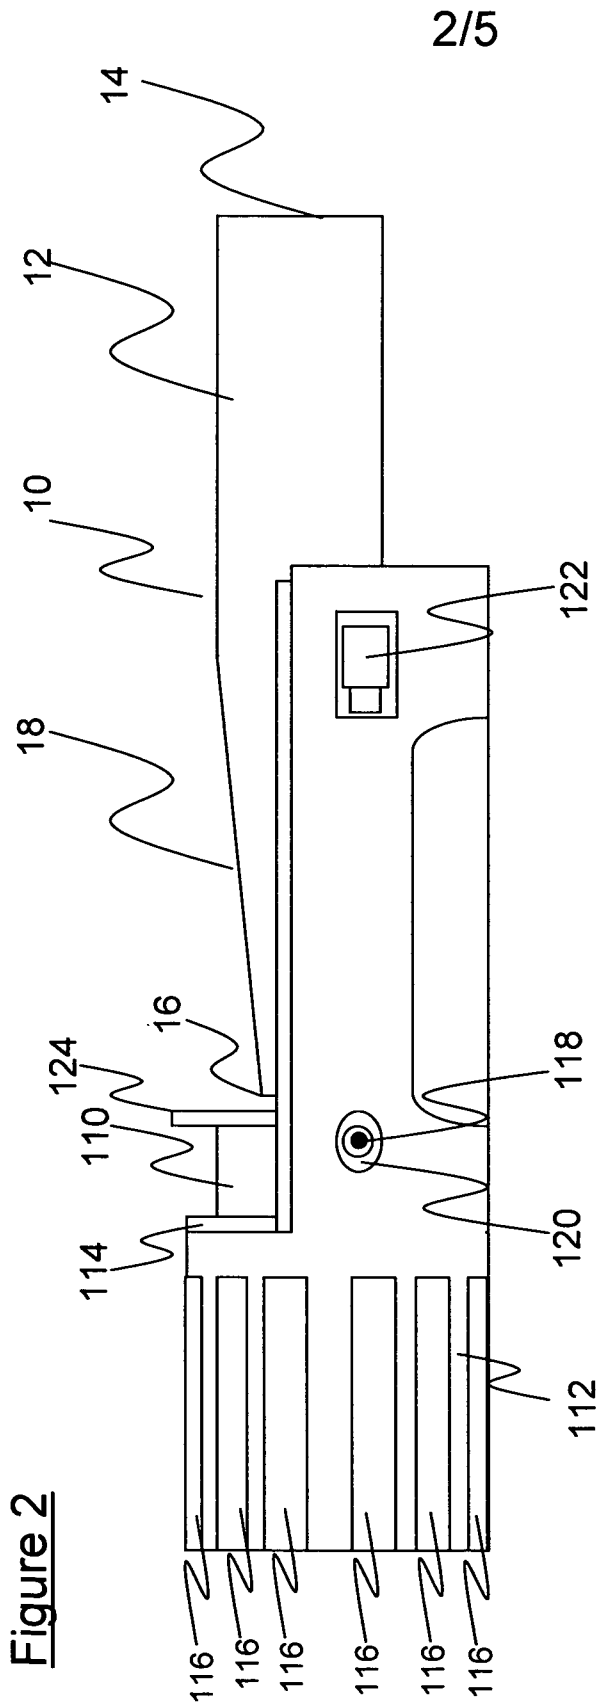


Figure 4

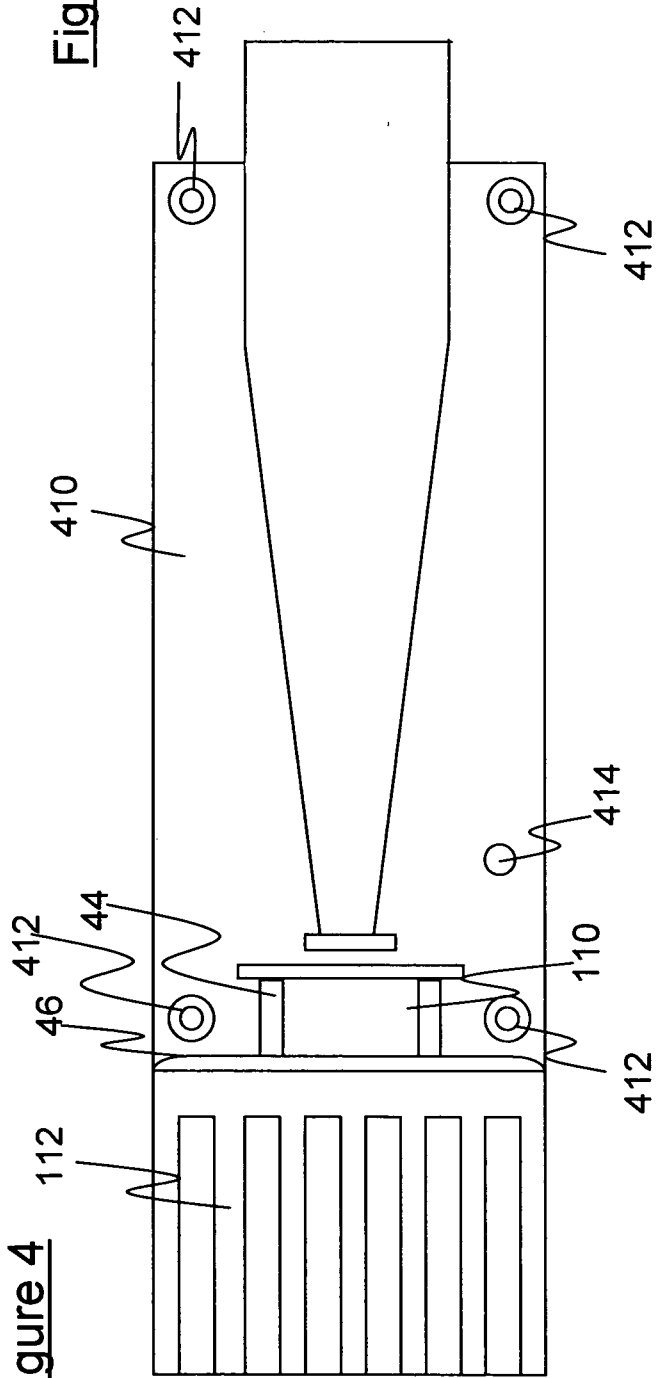


Figure 6

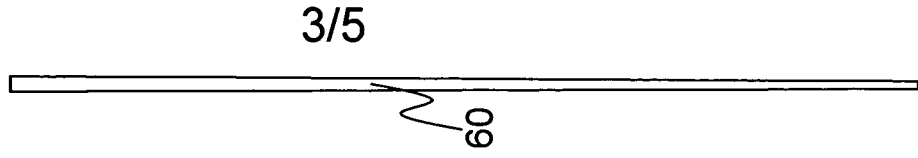


Figure 5

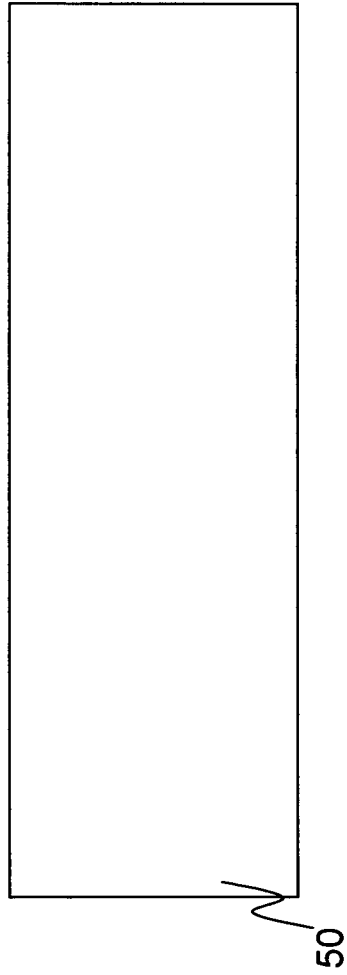


Figure 7



Figure 8

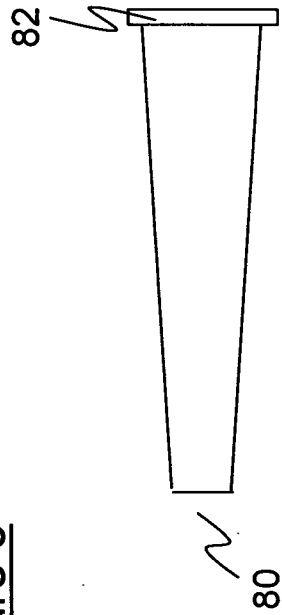


Figure 9



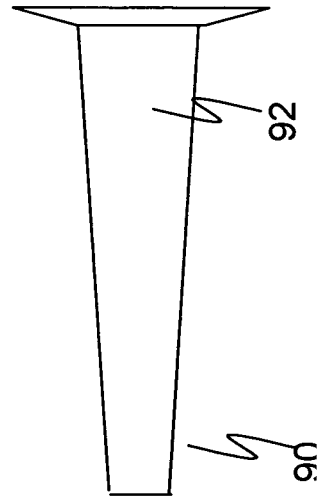




Figure 10

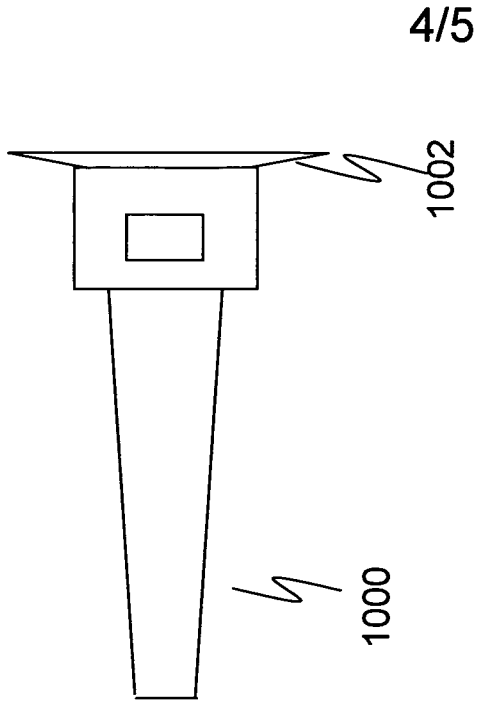

4/5

Figure 11

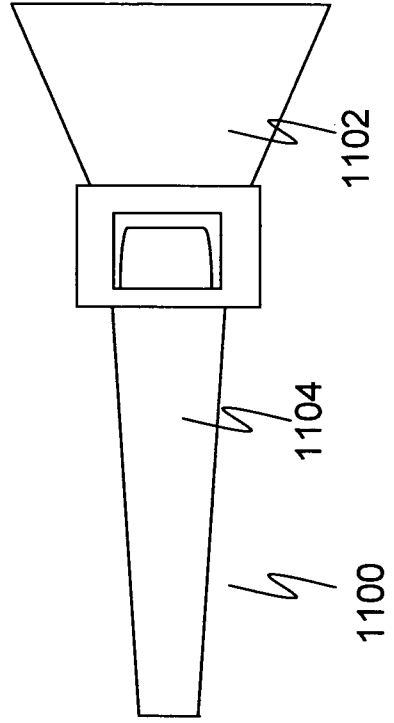

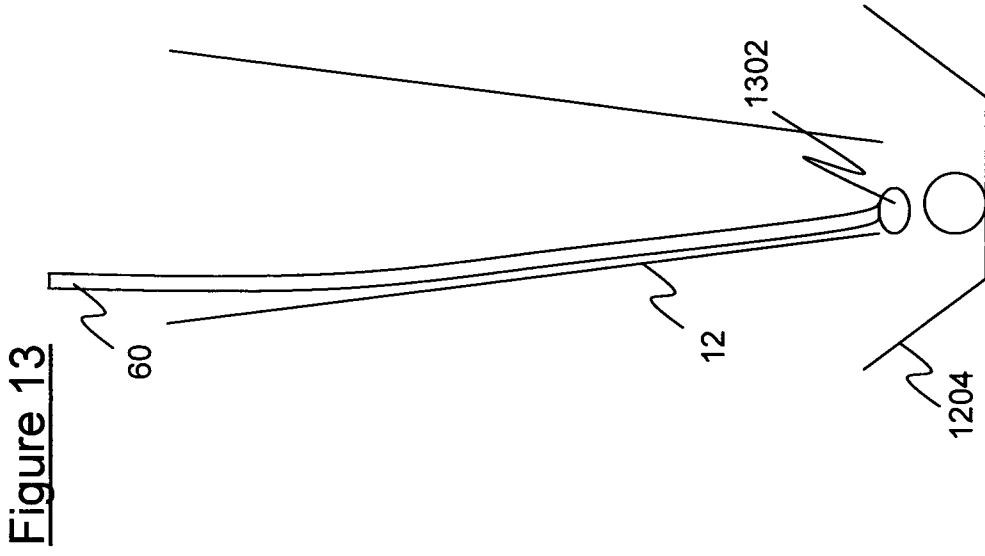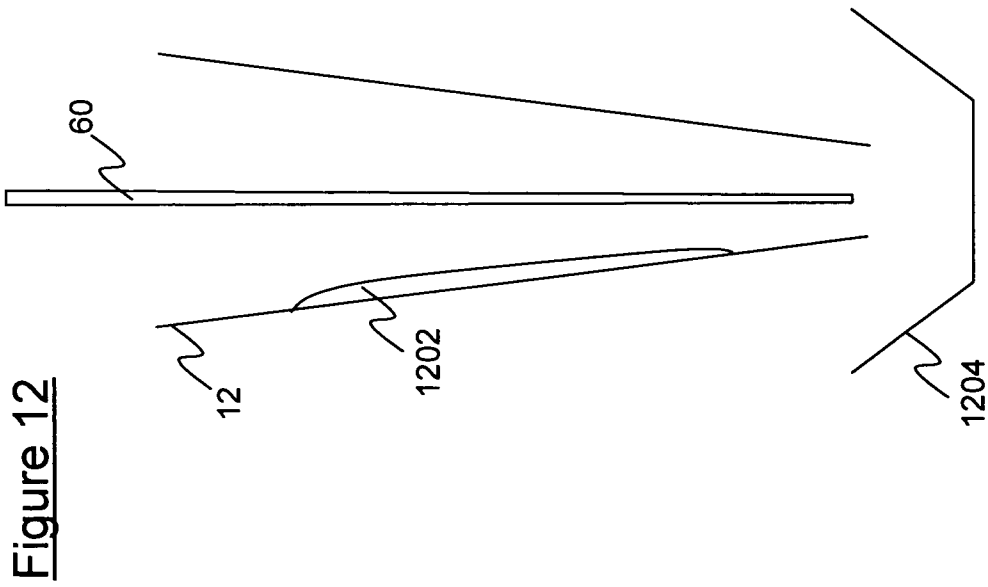

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/GB2008/001954

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> INV. A61B5/097		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols) A61B G01N		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2004/127808 A1 (VAUGHAN JOHN W [US] ET AL) 1 July 2004 (2004-07-01) paragraphs [0044] - [0053] figure 1	1-4
Y	GB 2 427 686 A (EQUINE HEALTHCARE LTD [GB]) 3 January 2007 (2007-01-03) cited in the application page 5, line 3 - page 6, line 4 figures 2,3	1-10
Y	US 2004/161804 A1 (MCCASH ELAINE MARIE [GB] ET AL) 19 August 2004 (2004-08-19) paragraph [0283] paragraphs [0288], [0289] figure 6	1-10
-/--		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C.		
<input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents :		
*A* document defining the general state of the art which is not considered to be of particular relevance	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	
*E* earlier document but published on or after the international filing date	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.	
*O* document referring to an oral disclosure, use, exhibition or other means	*&* document member of the same patent family	
*P* document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search  <div style="text-align: center; font-weight: bold;">19 September 2008</div>	Date of mailing of the international search report  <div style="text-align: center; font-weight: bold;">29/09/2008</div>	
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer  <div style="text-align: center; font-weight: bold;">Völlinger, Martin</div>	

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/GB2008/001954

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2004/162500 A1 (KLINE JEFFREY A [US]) 19 August 2004 (2004-08-19) paragraphs [0068] - [0071] paragraphs [0079], [0080] paragraph [0088] paragraph [0091] figures 5,20,21	1,2,7
A	WO 95/31721 A (FILT FORSCHUNGSGESELLSCHAFT FU [DE]; WINSEL KLAUS [DE]; BECHER GUNTHER) 23 November 1995 (1995-11-23) page 6, last paragraph - page 7, paragraph 1 page 9, paragraph 3 - page 10, last paragraph figures 1,5	1-6

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/GB2008/001954

## Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1.  Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2.  Claims Nos.: 11  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:  
see FURTHER INFORMATION sheet PCT/ISA/210
  
3.  Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1.  As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
  
2.  As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
  
3.  As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
  
4.  No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

### Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box II.2

Claims Nos.: 11

Claim 11 does not define technical features of the claimed subject-matter. It merely refers to the drawings contrary to the requirements of Rule 6.2(a) PCT.

## INTERNATIONAL SEARCH REPORT

International application No

PCT/GB2008/001954

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2004127808 A1	01-07-2004	AU 2002309803 A1 WO 02082977 A2	28-10-2002 24-10-2002
GB 2427686 A	03-01-2007	WO 2006136782 A1	28-12-2006
US 2004161804 A1	19-08-2004	AU 2002253310 B2 BR 0210210 A CA 2442359 A1 EP 1377815 A2 WO 02084266 A2 JP 2004537038 T MX PA03009111 A	05-10-2006 29-06-2004 24-10-2002 07-01-2004 24-10-2002 09-12-2004 22-11-2004
US 2004162500 A1	19-08-2004	US 2007073183 A1 US 2007100250 A1	29-03-2007 03-05-2007
WO 9531721 A	23-11-1995	AU 2444195 A EP 0759169 A1	05-12-1995 26-02-1997