



Office de la Propriété

Intellectuelle  
du Canada

Un organisme  
d'Industrie Canada

Canadian  
Intellectual Property  
Office

An agency of  
Industry Canada

CA 2694694 C 2012/10/30

(11)(21) **2 694 694**

(12) **BREVET CANADIEN  
CANADIAN PATENT**

(13) **C**

(86) Date de dépôt PCT/PCT Filing Date: 2008/06/12  
(87) Date publication PCT/PCT Publication Date: 2008/12/18  
(45) Date de délivrance/Issue Date: 2012/10/30  
(85) Entrée phase nationale/National Entry: 2009/12/11  
(86) N° demande PCT/PCT Application No.: KR 2008/003291  
(87) N° publication PCT/PCT Publication No.: 2008/153331  
(30) Priorités/Priorities: 2007/06/13 (US60/943,783);  
2007/08/09 (US60/955,019); 2007/10/01 (US60/976,487);  
2007/10/25 (US60/982,435); 2007/10/29 (US60/983,234);  
2007/11/29 (KR10-2007-0122986)

(51) Cl.Int./Int.Cl. *H04B 7/06* (2006.01)


(72) Inventeurs/Inventors:  
LEE, JUNG HOON, KR;  
KIM, KI JUN, KR;  
ROH, DONG WOOK, KR;  
LEE, DAE WON, KR;  
AHN, JOON KUI, KR

(73) Propriétaire/Owner:  
LG ELECTRONICS INC., KR

(74) Agent: SMART & BIGGAR

(54) Titre : EMISSION D'UN SIGNAL A ETEALLEMENT DE SPECTRE DANS UN SYSTEME DE COMMUNICATION

(54) Title: TRANSMITTING SPREAD SIGNAL IN COMMUNICATION SYSTEM

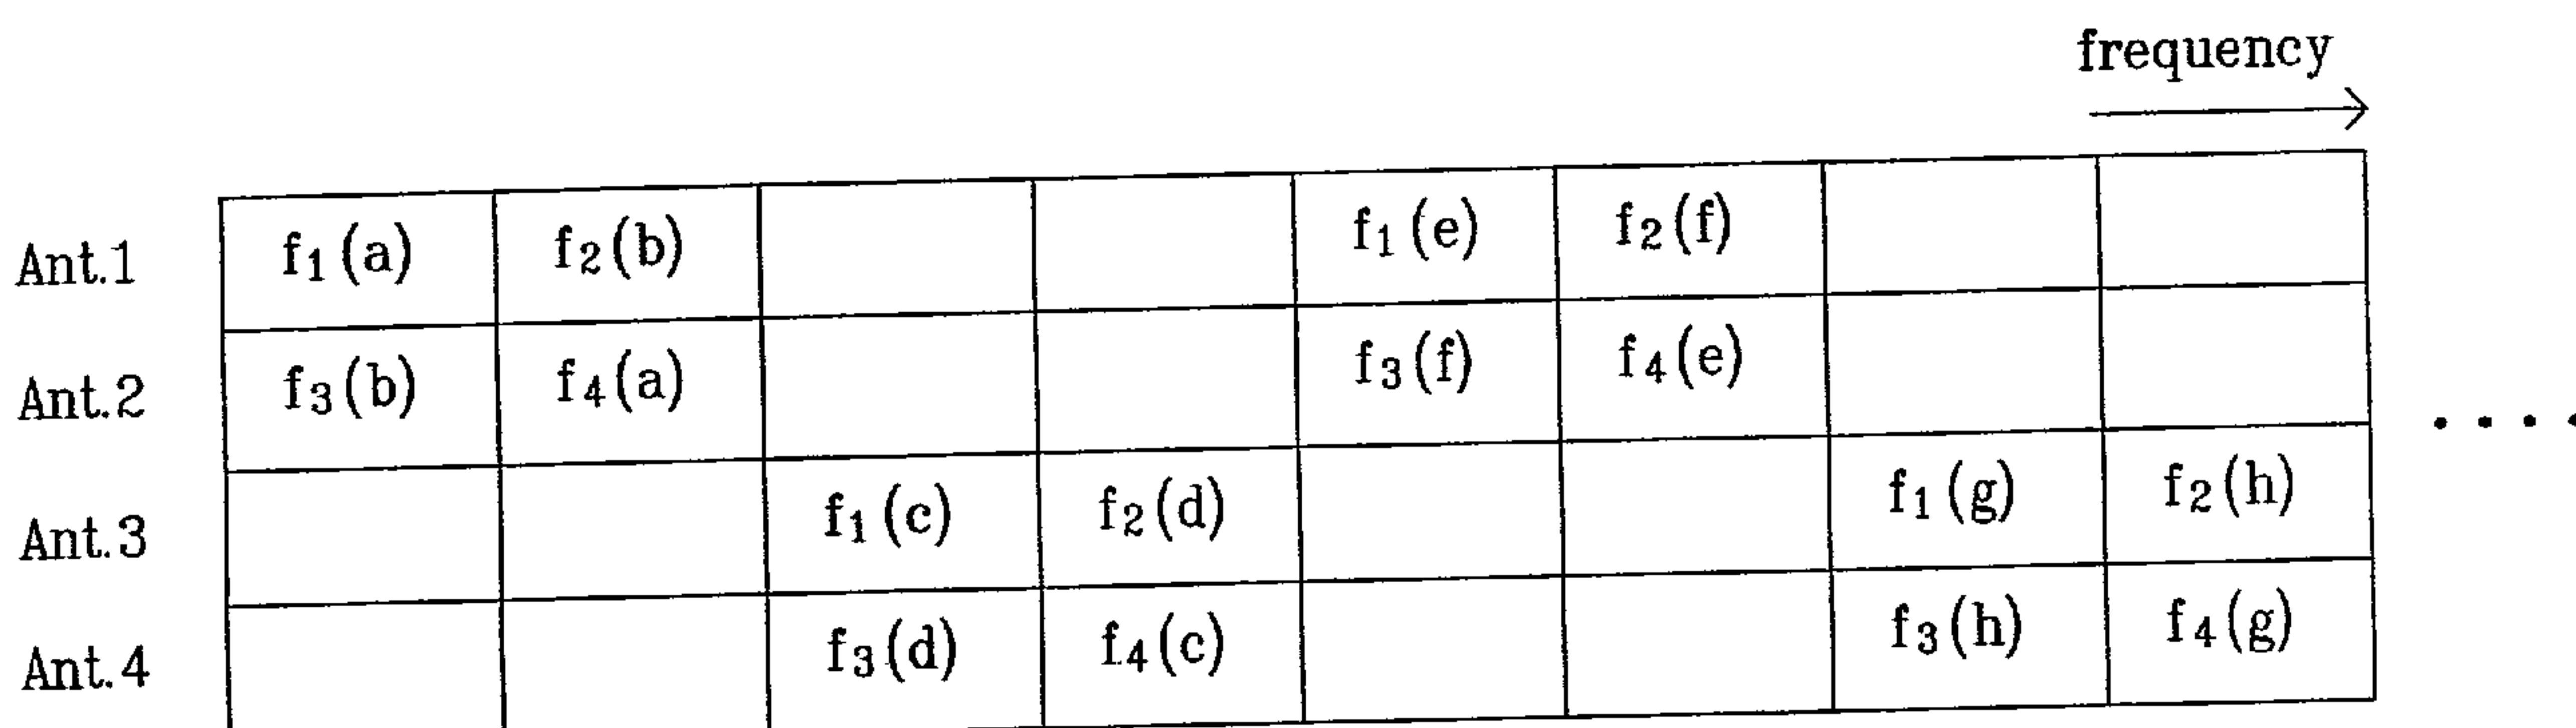

(57) Abrégé/Abstract:

The present invention provides for transmitting a spread signal in a mobile communication system. The present invention includes spreading a signal using a plurality of spreading codes, wherein the plurality of spreading codes have a spreading factor, multiplexing the spread signal by code division multiplexing, transmitting the multiplexed signal via a plurality of neighboring frequency resources of one OFDM symbol of a first antenna set, and transmitting the same multiplexed signal via a plurality of neighboring frequency resources of one OFDM symbol of a second antenna set.



## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
18 December 2008 (18.12.2008)

PCT

(10) International Publication Number  
WO 2008/153331 A3

## (51) International Patent Classification:

H04B 7/06 (2006.01)

## (21) International Application Number:

PCT/KR2008/003291

## (22) International Filing Date:

12 June 2008 (12.06.2008)

## (25) Filing Language:

English

## (26) Publication Language:

English

## (30) Priority Data:

60/943,783	13 June 2007 (13.06.2007)	US
60/955,019	9 August 2007 (09.08.2007)	US
60/976,487	1 October 2007 (01.10.2007)	US
60/982,435	25 October 2007 (25.10.2007)	US
60/983,234	29 October 2007 (29.10.2007)	US
10-2007-0122986	29 November 2007 (29.11.2007)	KR

(71) Applicant (for all designated States except US): **LG ELECTRONICS INC.** [KR/KR]; 20, Yeouido-dong, Yeongdeungpo-gu, Seoul 150-721 (KR).

## (72) Inventors; and

(75) Inventors/Applicants (for US only): **LEE, Jung Hoon** [KR/KR]; LG Institute, Hogye 1(il)-dong, Dongan-gu,, Anyang-si, Gyeonggi-do 431-080 (KR). **KIM, Ki Jun** [KR/KR]; LG Institute, Hogye 1(il)-dong, Dongan-gu,, Anyang-si, Gyeonggi-do 431-080 (KR). **ROH, Dong Wook** [KR/KR]; LG Institute, Hogye 1(il)-dong, Dongan-gu,, Anyang-si, Gyeonggi-do 431-080 (KR). **LEE,**Dae Won [KR/KR]; LG Institute, Hogye 1(il)-dong, Dongan-gu,, Anyang-si, Gyeonggi-do 431-080 (KR). **AWN, Joon Kui** [KR/KR]; LG Institute, Hogye 1(il)-dong, Dongan-gu,, Anyang-si, Gyeonggi-do 431-080 (KR).(74) Agents: **KIM, Yong In** et al.; KBK & Associates, 7th Floor, Hyundae Building, 175-9 Jamsil-dong, Songpa-ku, Seoul 138-861 (KR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


## Published:

— with international search report

(88) Date of publication of the international search report: 19 March 2009

## (54) Title: TRANSMITTING SPREAD SIGNAL IN COMMUNICATION SYSTEM

FIG. 1

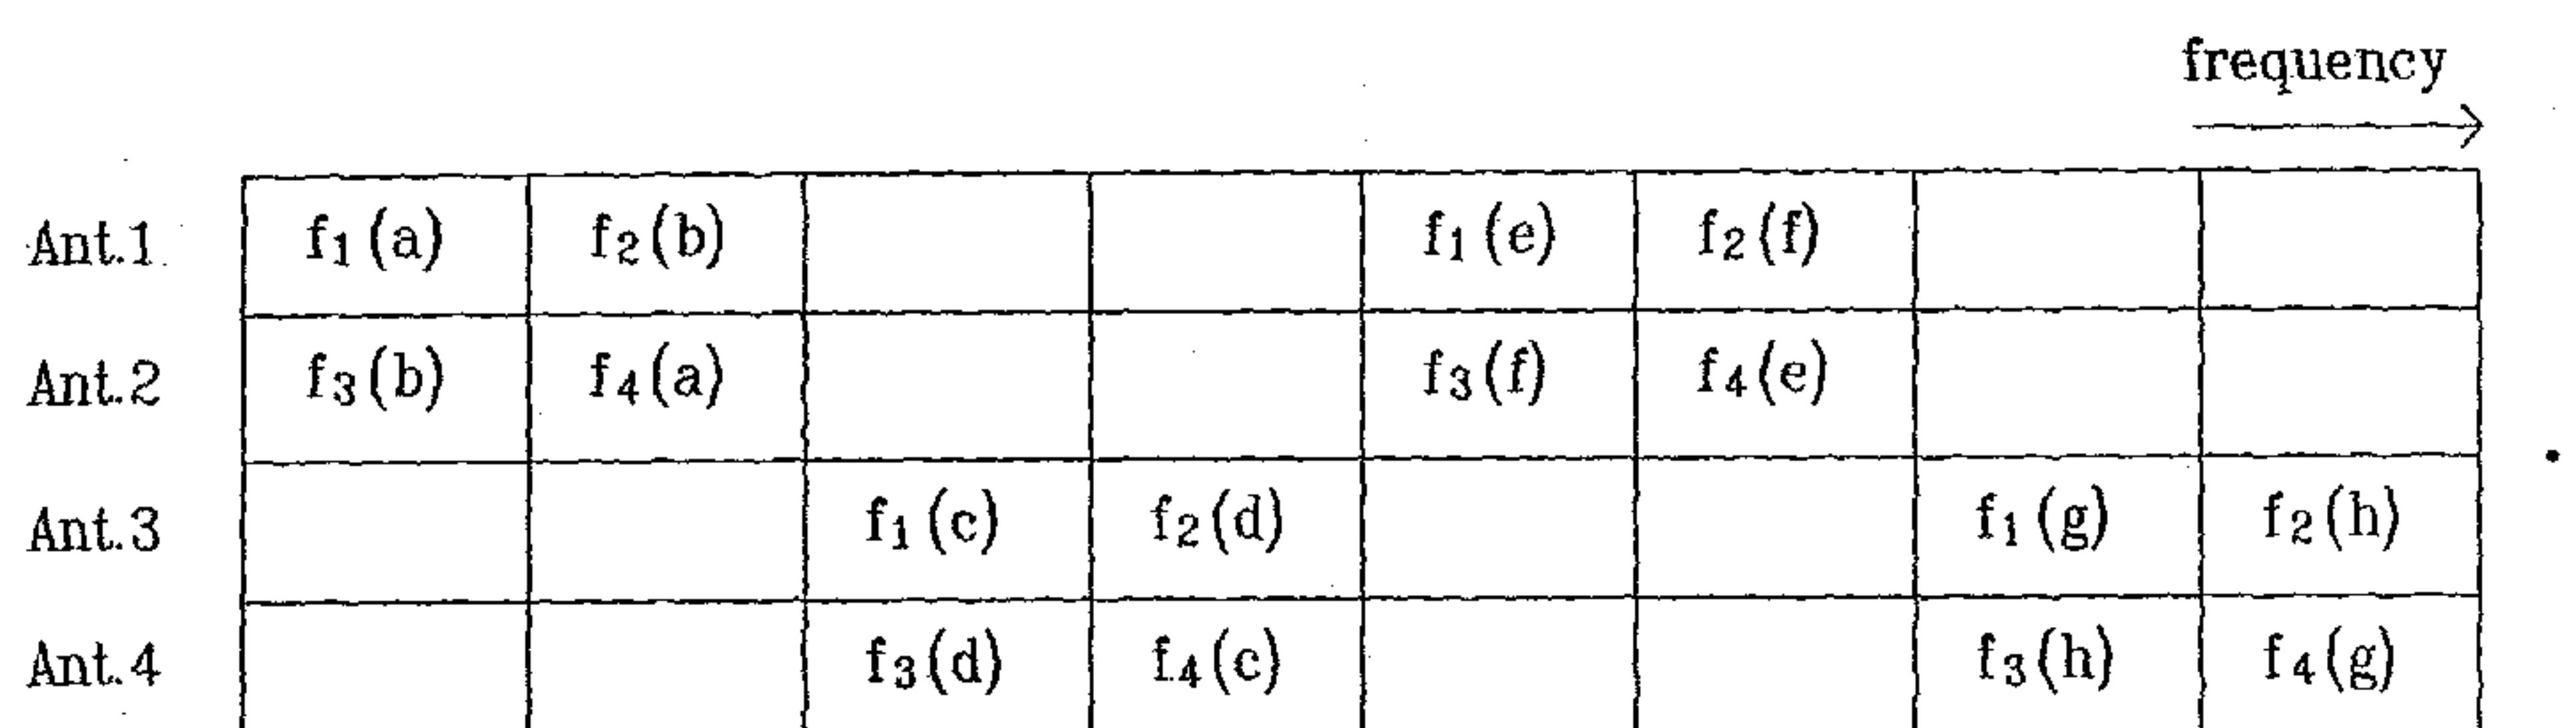

WO 2008/153331 A3

(57) Abstract: The present invention provides for transmitting a spread signal in a mobile communication system. The present invention includes spreading a signal using a plurality of spreading codes, wherein the plurality of spreading codes have a spreading factor, multiplexing the spread signal by code division multiplexing, transmitting the multiplexed signal via a plurality of neighboring frequency resources of one OFDM symbol of a first antenna set, and transmitting the same multiplexed signal via a plurality of neighboring frequency resources of one OFDM symbol of a second antenna set.

## TRANSMITTING SPREAD SIGNAL IN COMMUNICATION SYSTEM

## [DESCRIPTION]

5 TECHNICAL FIELD

**[0001]** The present invention relates to a communication system, and more particularly, to transmitting a spread signal in a communication system.

10 BACKGROUND ART

**[0002]** Recently, the demand for wireless communication services has risen abruptly due to the generalization of information communication services, the advent of various multimedia services and the appearance of high-quality services.

15 To actively cope with the demand, a communication system's capacity should first be increased. In order to do so, methods for finding new available frequency bands and raising the efficiency of given resources in wireless communication environments are considered.

20 **[0003]** Much effort and attention has been made to research and develop multi-antenna technology. Here, diversity gain is obtained by additionally securing a spatial area for resource utilization with a plurality of antennas provided to a

74420-388

transceiver or raising transmission capacity by transmitting data in parallel via each antenna.

[0004] An example of a multi-antenna technology is a multiple input multiple output (MIMO) scheme. The MIMO scheme indicates an antenna system 5 having multiple inputs and outputs, raises a quantity of information by transmitting different information via each transmitting antenna, and enhances reliability of transport information using coding schemes such as STC (space-time coding), STBC (space-time block coding), SFBC (space-frequency block coding) and the like.

#### DISCLOSURE OF THE INVENTION

10 [0005] The present invention is directed to transmitting a spread signal in a mobile communication system.

According to an aspect of the present invention, there is provided a method for transmitting Acknowledgement/Negative Acknowledgement (ACK/NACK) information in a mobile communication system, the method comprising: spreading 15 the ACK/NACK information using an orthogonal sequence with a spreading factor of 4 to generate first spread ACK/NACK information; spreading the ACK/NACK information using the orthogonal sequence to generate second spread ACK/NACK information; transmitting a first signal including the first spread ACK/NACK information via a first antenna set in an orthogonal frequency division multiplexing 20 (OFDM) symbol, the first spread ACK/NACK information existing in a form as shown in Table 1; and transmitting a second signal including the second spread ACK/NACK information via a second antenna set in an OFDM symbol, the second spread ACK/NACK information existing in a form as shown in Table 1:

74420-388

Table 1

		four available neighboring subcarriers			
the first antenna set	antenna A	$a_1$	$a_2$	$a_3$	$a_4$
	antenna B	$-a_2^*$	$a_1^*$	$-a_4^*$	$a_3^*$
the second antenna set	antenna C	$b_1$	$b_2$	$b_3$	$b_4$
	antenna D	$-b_2^*$	$b_1^*$	$-b_4^*$	$b_3^*$

wherein  $a_1$  to  $a_4$  are elements of the first spread ACK/NACK information,  $b_1$  to  $b_4$  are elements of the second spread ACK/NACK information, and the "\*" symbol

5 represents a conjugate operation, wherein the four available neighboring subcarriers for the first spread ACK/NACK information are not contiguous with the four available neighboring subcarriers for the second spread ACK/NACK information in a frequency domain.

According to another aspect of the present invention, there is provided

10 a method for receiving Acknowledgement/Negative Acknowledgement (ACK/NACK) information in a mobile communication system, the method comprising: receiving a first signal including first spread ACK/NACK information from a first antenna set of a transmitting end in an orthogonal frequency division multiplexing (OFDM) symbol, the first spread ACK/NACK information existing in a form as shown in Table 1, receiving  
15 a second signal including second spread ACK/NACK information from a second antenna set of the transmitting end in an OFDM symbol, the second spread ACK/NACK information existing in a form as shown in Table 1:

74420-388

Table 1

		four available neighboring subcarriers			
the first antenna set	antenna A	$a_1$	$a_2$	$a_3$	$a_4$
	antenna B	$-a_2^*$	$a_1^*$	$-a_4^*$	$a_3^*$
the second antenna set	antenna C	$b_1$	$b_2$	$b_3$	$b_4$
	antenna D	$-b_2^*$	$b_1^*$	$-b_4^*$	$b_3^*$

wherein  $a_1$  to  $a_4$  are elements of the first spread ACK/NACK information,  $b_1$  to  $b_4$  are elements of the second spread ACK/NACK information, and the “\*” symbol

5 represents a conjugate operation, wherein the first spread ACK/NACK information is generated by spreading of the ACK/NACK information using an orthogonal sequence with a spreading factor of 4, wherein the second spread ACK/NACK information is generated by spreading of the ACK/NACK information using the orthogonal sequence, wherein the four available neighboring subcarriers for the first spread

10 ACK/NACK information are not contiguous with the four available neighboring subcarriers for the second spread ACK/NACK information in a frequency domain.

According to another aspect of the present invention, there is provided an apparatus configured to transmit Acknowledgement/Negative Acknowledgement (ACK/NACK) information in a mobile communication system, the apparatus

15 comprising: a radio frequency unit; and a processor, wherein the processor is configured to: spread the ACK/NACK information using an orthogonal sequence with a spreading factor of 4 to generate first spread ACK/NACK information, spread the ACK/NACK information using the orthogonal sequence to generate second spread ACK/NACK information, transmit a first signal including the first spread ACK/NACK

20 information via a first antenna set in an orthogonal frequency division multiplexing

74420-388

(OFDM) symbol, the first spread ACK/NACK information existing in a form as shown in Table 1, and transmit a second signal including the second spread ACK/NACK information via a second antenna set in an OFDM symbol, the second spread ACK/NACK information existing in a form as shown in Table 1:

5 Table 1

		four available neighboring subcarriers			
the first antenna set	antenna A	$a_1$	$a_2$	$a_3$	$a_4$
	antenna B	$-a_2^*$	$a_1^*$	$-a_4^*$	$a_3^*$
the second antenna set	antenna C	$b_1$	$b_2$	$b_3$	$b_4$
	antenna D	$-b_2^*$	$b_1^*$	$-b_4^*$	$b_3^*$

wherein  $a_1$  to  $a_4$  are elements of the first spread ACK/NACK information,  $b_1$  to  $b_4$  are elements of the second spread ACK/NACK information, and the “\*” symbol represents a conjugate operation, wherein the four available neighboring subcarriers for the first spread ACK/NACK information are not contiguous with the four available neighboring subcarriers for the second spread ACK/NACK information in a frequency domain.

According to another aspect of the present invention, there is provided an apparatus configured to receive Acknowledgement/Negative Acknowledgement (ACK/NACK) information in a mobile communication system, the apparatus comprising: a radio frequency unit; and a processor, wherein the processor is configured to: receive a first signal including first spread ACK/NACK information from a first antenna set of a transmitting end in an orthogonal frequency division multiplexing (OFDM) symbol, the first spread ACK/NACK information existing in a

74420-388

form as shown in Table 1, receive a second signal including second spread ACK/NACK information from a second antenna set of the transmitting end in an OFDM symbol, the second spread ACK/NACK information existing in a form as shown in Table 1:

5 Table 1

		four available neighboring subcarriers			
the first antenna set	antenna A	$a_1$	$a_2$	$a_3$	$a_4$
	antenna B	$-a_2^*$	$a_1^*$	$-a_4^*$	$a_3^*$
the second antenna set	antenna C	$b_1$	$b_2$	$b_3$	$b_4$
	antenna D	$-b_2^*$	$b_1^*$	$-b_4^*$	$b_3^*$

wherein  $a_1$  to  $a_4$  are elements of the first spread ACK/NACK information,  $b_1$  to  $b_4$  are elements of the second spread ACK/NACK information, and the symbol “\*” denotes a conjugate operation, wherein the first spread ACK/NACK

10 information is generated by spreading of the ACK/NACK information using an orthogonal sequence with a spreading factor of 4, wherein the second spread ACK/NACK information is generated by spreading of the ACK/NACK information using the orthogonal sequence, wherein the four available neighboring subcarriers for the first spread ACK/NACK information are not contiguous with the four available  
15 neighboring subcarriers for the second spread ACK/NACK information in a frequency domain.

20 [0006] Additional features and advantages of some embodiments of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. The objectives and other advantages of some embodiments of the invention will be realized and

74420-388

attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0007] Another aspect provides a method for transmitting a spread signal in a mobile communication system, the method comprising spreading a signal 5 using a plurality of spreading codes, wherein the plurality of spreading codes have a spreading factor, multiplexing the spread signal by code division multiplexing, transmitting the multiplexed signal via a plurality of neighboring frequency resources of one OFDM symbol of a first antenna set, and transmitting the same multiplexed signal via a plurality of neighboring frequency resources of one OFDM symbol of a 10 second antenna set.

[0008] In some embodiments, the multiplexed signal is transmitted on four neighboring frequency resources. Preferably, the spreading factor is 4. Alternatively, the spreading factor is equal to the number of neighboring frequency resources.

15 [0009] In one embodiment, the first antenna set is space frequency block coded by applying a space frequency block code to each neighboring pair of frequency resources of one OFDM symbol, wherein the first antenna set comprises two antennas. Moreover, the second antenna set is space frequency block coded by applying a space frequency block code to each neighboring pair of frequency 20 resources of one OFDM symbol, wherein the second antenna set comprises two antennas.

[0010] In some embodiments, the multiplexed signal transmitted via the first antenna set and the multiplexed signal transmitted via the second antenna set are transmitted via respectively different frequency resources. Preferably, the 25 multiplexed signal transmitted via the first antenna set and the multiplexed signal transmitted via the second antenna set are transmitted via respectively different OFDM symbols.

74420-388

**[0011]** In some embodiments, the multiplexed signal is transmitted alternately by the first antenna set and second antenna set via independent frequency resources repeatedly. In some embodiments, the multiplexed signal is transmitted a total of 3 times using the first antenna set and second antenna set  
5 alternately.

**[0012]** In some embodiments, the first antenna set comprises a first antenna and a second antenna of a four-antenna group, and the second antenna set comprises a third antenna and a fourth antenna of the four-antenna group.

**[0013]** In some embodiments, the first antenna set comprises a first antenna and a third antenna of a four-antenna group, and the second antenna set comprises a second antenna and a fourth antenna of the four-antenna group.  
10

**[0014]** It is to be understood that both the foregoing general description and the following detailed description of some embodiments of the present invention are exemplary and explanatory and are

intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

5 [0015] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention.

10 Features, elements, and aspects of the invention that are referenced by the same numerals in different figures represent the same, equivalent, or similar features, elements, or aspects in accordance with one or more embodiments.

15 [0016] FIG. 1 is a diagram illustrating an example of a method for applying an SFBC/FSTD scheme in a communication system in accordance with one embodiment of the present invention.

20 [0017] FIG. 2 is a diagram illustrating an example of a method for applying an SFBC/FSTD scheme to a spread signal in a communication system in accordance with one embodiment of the present invention.

[0018] FIG. 3 is a diagram illustrating an example of a method for applying an SFBC/FSTD scheme to a spread signal in a

communication system in accordance with one embodiment of the present invention.

5 [0019] FIG. 4 is a diagram illustrating another example of a method for applying an SFBC/FSTD scheme to a spread signal in a communication system in accordance with one embodiment of the present invention.

10 [0020] FIG. 5 is a diagram illustrating an example of a method for applying an SFBC/FSTD scheme to a spread signal in a communication system in accordance with one embodiment of the present invention.

15 [0021] FIG. 6 is a diagram illustrating another example of a method for applying an SFBC/FSTD scheme to a spread signal in a communication system in accordance with one embodiment of the present invention.

20 [0022] FIG. 7 is a diagram illustrating an example of a method for transmitting a spread signal via a plurality of OFDM symbols in accordance with one embodiment of the present invention.

25 [0023] FIG. 8 is a diagram illustrating an example of a method for transmitting a spread signal via a plurality of OFDM symbols in accordance with one embodiment of the present invention, in which an SFBC/FSTD scheme is applied to the spread signal.

**[0024]** FIG. 9 is a diagram illustrating an example of a method for applying an SFBC/FSTD scheme to a spread signal in a communication system in accordance with one embodiment of the present invention.

5       **[0025]** FIG. 10 is a diagram illustrating another example of a method for applying an SFBC/FSTD scheme to a spread signal in a communication system in accordance with one embodiment of the present invention.

10      **[0026]** FIG. 11 is a diagram illustrating another example of a method for applying an SFBC/FSTD scheme to a spread signal in a communication system in accordance with one embodiment of the present invention.

15      **[0027]** FIG. 12 is a diagram illustrating another example of a method for applying an SFBC/FSTD scheme to a spread signal in a communication system in accordance with one embodiment of the present invention.

20      **[0028]** FIG. 13 is a diagram illustrating an example of a method for applying an SFBC/FSTD scheme to at least one spread signal in a communication system in accordance with one embodiment of the present invention.

**BEST MODE FOR CARRYING OUT THE INVENTION**

**[0029]** The present invention relates to transmitting a spread signal in a wireless communication system.

**[0030]** Reference will now be made in detail to the preferred 5 embodiments of the present invention, examples of which are illustrated in the accompanying drawings. It is to be understood that the following detailed description of the present invention is exemplary and explanatory and is intended to provide further explanation of the invention as claimed.

10 The following detailed description includes details to provide complete understanding of the present invention. Yet, it is apparent to those skilled in the art that the present invention can be embodied without those details. For instance, predetermined terminologies are mainly used for the following 15 description, need not to be limited, and may have the same meaning in case of being called arbitrary terminologies.

**[0031]** To avoid vagueness of the present invention, the structures or devices known in public are omitted or depicted as a block diagram and/or flowchart focused on core functions 20 of the structures or devices. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

**[0032]** For the following embodiments, elements and features of the present invention are combined in prescribed forms. Each of the elements or features should be considered as selective unless there is separate and explicit mention. Each 5 of the elements or features can be implemented without being combined with others. And, it is able to construct an embodiment of the present invention by combining partial elements and/or features of the present invention. The order of operations explained in the following embodiments of the 10 present invention can be changed. Some partial configurations or features of a prescribed embodiment can be included in another embodiment and/or may be replaced by corresponding configurations or features of another embodiment.

**[0033]** In this disclosure, embodiments of the present 15 invention are described mainly with reference to data transmitting and receiving relations between a base station and a terminal. In this case, the base station has a meaning of a terminal node of a network, which directly performs a specific operation described as performed by a base station can 20 be carried out by an upper node of the base station. Namely, it is understood that various operations carried out by a network, which includes a plurality of network nodes including a base station, for the communication with a terminal can be

carried out by the base station or other network nodes except the base station. "Base station" can be replaced by such a terminology as a fixed station, Node B, eNode B (eNB), access point and the like. And, "terminal" can be replaced by such a 5 terminology as UE (user equipment), MS (mobile station), MSS (mobile subscriber station) and the like.

**[0034]** FIG. 1 is a diagram illustrating an example of a method of applying an SFBC/FSTD scheme in a wireless communication system, in accordance with one embodiment of the 10 present invention. In FIG. 1, a method for obtaining 4-degree transmitting antenna diversity is implemented using a plurality of transmitting antennas, e.g., four downlink transmitting antennas of a communication system. Here, two modulation signals transmitted via two adjacent subcarriers are 15 transmitted via a first antenna set including two antennas by having space frequency block coding (SFBC) applied thereto. Two SFBC-coded subcarrier sets are transmitted via two different antenna sets each including two different antennas by having frequency switching transmit diversity (FSTD) applied 20 thereto. As a result, a transmitting antenna diversity degree 4 can be obtained.

**[0035]** Referring to FIG. 1, a single small box indicates a single subcarrier transmitted via a single antenna. The letters "a", "b", "c" and "d" represent modulation symbols

modulated into signals differing from each other. Moreover, functions  $f_1(x)$ ,  $f_2(x)$ ,  $f_3(x)$  and  $f_4(x)$  indicate random SFBC functions that are applied to maintain orthogonality between two signals. These functions can be represented as in Equation 5 1.

**[0036]** [Equation 1]

$$f_1(x) = x, f_2(x) = x, f_3(x) = -x^*, f_4(x) = x^*$$

**[0037]** Despite two signals being simultaneously transmitted 10 via two antennas through the random SFBC function applied to maintain orthogonality between the two signals, a receiving side may be able to obtain an original signal by decoding each of the two signals. In particular, FIG. 1 shows a structure that SFBC and FSTD transmitted in downlink within a random time 15 unit is repeated. By applying a simple reception algorithm that the same SFBC decoding and FSTD decoding are repeated in a receiving side through the structure of SFBC and FSTD repeating transmissions, decoding complexity is reduced and decoding efficiency is raised.

**[0038]** In the example shown in FIG. 1, modulated symbol sets 20 (a, b), (c, d), (e, f) and (g, h) become an SFBC-coded set, respectively. FIG. 1 shows that subcarriers having SFBC/FSTD applied thereto are consecutive. However, the subcarriers having SFBC/FSTD applied thereto may not necessarily be

consecutive in a frequency domain. For instance, a subcarrier carrying a pilot signal can exist between SFBC/FSTD applied subcarriers. Yet, two subcarriers constructing an SFBC coded set are preferably adjacent to each other in a frequency domain

5 so that wireless channel environments covered by a single antenna for two subcarriers can become similar to each other.

Hence, when SFBC decoding is performed by a receiving side, it is able to minimize interference mutually affecting the two signals.

10 **[0039]** In accordance with one embodiment of the present invention, an SFBC/FSTD scheme may be applied to a spread signal sequence. In a manner of spreading a single signal into a plurality of subcarriers through (pseudo) orthogonal code in a downlink transmission, a plurality of spread signals may be 15 transmitted by a code division multiplexing (CDM) scheme.

**[0040]** For example, when attempting to transmit different signals "a" and "b", if the two signals are to be CDM-transmitted by being spread by a spreading factor (SF) 2, the signal a and the signal b are transformed into spread signal sequences  $(a \cdot c_{11}, a \cdot c_{21})$  and  $(b \cdot c_{12}, b \cdot c_{22})$  using (pseudo) orthogonal spreading codes of two chip lengths  $(c_{11}, c_{21})$  and  $(c_{12}, c_{22})$ , respectively. The spread signal sequences are modulated by adding  $a \cdot c_{11} + b \cdot c_{12}$  and  $a \cdot c_{21} + b \cdot c_{22}$  to two subcarriers,

74420-388

respectively. Namely,  $a \cdot c_{11} + b \cdot c_{12}$  and  $a \cdot c_{21} + b \cdot c_{22}$  become modulated symbols, respectively. For clarity and convenience, the spread signal sequence resulting from spreading the signal  $a$  by  $SF=N$  is denoted as  $a_1, a_2, \dots, a_N$ .

5 [0041] FIG. 2 is a diagram illustrating an example of a method of applying an SFBC/FSTD scheme to a spread signal in a communication system, in accordance with one embodiment of the present invention. In order to decode a signal spread over a plurality of subcarriers by despreading in a receiving side, as 10 mentioned in the foregoing description, it is preferable that each chip of a received spread signal sequence undergo a similar wireless channel response. In FIG. 2, four different signals  $a$ ,  $b$ ,  $c$  and  $d$  are spread by  $SF=4$  and the spread signals are transmitted by SFBC/FSTD through four subcarriers explained 15 in the foregoing description of FIG. 1. Assuming that the function explained for the example in Equation 1 is used as an SFBC function, a received signal in each subcarrier can be represented as in Equation 2.

[0042] [Equation 2]

20 Subcarrier 1:  $h_1(a_1 + b_1 + c_1 + d_1) - h_2(a_2 + b_2 + c_2 + d_2)^*$

Subcarrier 2:  $h_1(a_2 + b_2 + c_2 + d_2) + h_2(a_1 + b_1 + c_1 + d_1)^*$

Subcarrier 3:  $h_3(a_3 + b_3 + c_3 + d_3) - h_4(a_4 + b_4 + c_4 + d_4)^*$

74420-388

Subcarrier 4:  $h_3(a_4+b_4+c_4+d_4) + h_4(a_3+b_3+c_3+d_3) *$

[0043] In Equation 2,  $h_i$  indicates fading undergone by an  $i^{\text{th}}$  antenna. Preferably, subcarriers of the same antenna undergo the same fading. A noise component added to a receiving side may be ignored. And, a single receiving antenna preferably exists. In this case, spread sequences obtained by a receiving side after completion of SFBC decoding and FSTD decoding can be represented as in Equation 3.

[0044] [Equation 3]

$$\begin{aligned} & \cdot (|h_1|^2 + |h_2|^2) \cdot (a_1 + b_1 + c_1 + d_1), \\ & \cdot (|h_1|^2 + |h_2|^2) \cdot (a_2 + b_2 + c_2 + d_2), \\ & \cdot (|h_3|^2 + |h_4|^2) \cdot (a_3 + b_3 + c_3 + d_3), \\ & \cdot (|h_3|^2 + |h_4|^2) \cdot (a_4 + b_4 + c_4 + d_4) \end{aligned}$$

[0045] Here, in order to separate the spread sequence obtained by the receiving side from the signals b, c and d by despreading with a (pseudo) orthogonal code corresponding to the signal a for example, the wireless channel responses for the four chips is preferably the same. However, as can be observed from Equation 3, signals transmitted via different antenna sets by FSTD are  $(|h_1|^2 + |h_2|^2)$  and  $(|h_3|^2 + |h_4|^2)$  and provide

results through different wireless channel responses, respectively. Thus, complete elimination of a different CDM-multiplexed signal during disspreading is not performed.

**[0046]** Therefore, one embodiment of the present invention is 5 directed to a method of transmitting at least one spread signal in a communication system, wherein each of at least one signal is spread by (pseudo) orthogonal code or the like with a spreading factor (SF), and wherein the at least one spread signal is multiplexed by CDM and transmitted via the same 10 antenna set. FIG. 3 is a diagram illustrating an example for a method of applying an SFBC/FSTD scheme to a spread signal in a communication system in accordance with one embodiment of the present invention. In the present embodiment, each of at least one signal is spread by (pseudo) orthogonal code or the like 15 with SF=4. Furthermore, the at least one spread signal is multiplexed and transmitted by CDM, and the multiplexed signals are transmitted via the same antenna set.

**[0047]** In FIG. 3, when a total of four transmitting antennas are used, a first antenna set includes a first antenna and a 20 second antenna. A second antenna set includes a third antenna and a fourth antenna. In particular, each of the first and second antenna sets is the antenna set for performing SFBC coding, and an FSTD scheme is applicable between the two antenna sets. According to the present embodiment, assuming

that data to be transmitted is carried by a single OFDM symbol, the signal spread with SF=4, as shown in FIG. 3, can be transmitted via four neighbor subcarriers of one OFDM symbol via the same SFBC-coded antenna set.

5 [0048] In FIG. 3(a), shown is a case where the spread signal transmitted via the first antenna set is different from the spread signal transmitted via the second antenna set. In FIG. 3(b), shown is a case where the spread signal transmitted via the first antenna set is repeatedly transmitted via the second 10 antenna set to obtain a 4-degree transmitting antenna diversity gain.

15 [0049] FIG. 4 is a diagram illustrating another example for a method of applying an SFBC/FSTD scheme to a spread signal in a communication system in accordance with one embodiment of the present invention. In the present embodiment, like the former embodiment shown in FIG. 3, each of at least one signal is 20 spread by (pseudo) orthogonal code or the like with SF=4. The at least one spread signal is multiplexed and transmitted by CDM, and the multiplexed signals are transmitted via the same antenna set.

20 [0050] In FIG. 4, unlike FIG. 3, when a total of four transmitting antennas are used, a first antenna set includes a first antenna and a third antenna. A second antenna set includes a second antenna and a fourth antenna. Namely,

compared to FIG. 3, FIG. 4 shows a case of using a different method for constructing each antenna set but applying the same SFBC/FSTD scheme. Here, according to the present embodiment, the signal spread with SF=4 can be transmitted via four 5 neighbor subcarriers of one OFDM symbol via the same SFBC-coded antenna set.

**[0051]** In FIG. 4(a), shown is a case where the spread signal transmitted via the first antenna set is different from the spread signal transmitted via the second antenna set. In FIG. 10 4(b), shown is a case where the spread signal transmitted via the first antenna set is repeatedly transmitted via the second antenna set to obtain a 4-degree transmitting antenna diversity gain.

**[0052]** FIG. 5 is a diagram illustrating an example of a 15 method for applying an SFBC/FSTD scheme to a spread signal in a communication system in accordance with an embodiment of the present invention. Preferably, a same signal can be repeatedly transmitted to obtain additional diversity. Accordingly, the present embodiment relates to a case where the same signal is 20 repeatedly transmitted at least twice via different subcarriers on a frequency axis, i.e., for a period of the same time unit.

**[0053]** In the present embodiment, an antenna set is determined as follows. First, after a signal has been spread with SF=4, an antenna set is determined by a 4-subcarrier unit

to enable the signal spread according to the aforesaid embodiment to be transmitted via the same antenna set. In this case, as mentioned in the foregoing description, the signal is repeatedly transmitted by changing an antenna set in case of 5 repetitive transmission to apply the SFBC/FSTD scheme for obtaining 4-degree transmitting antenna diversity. According to the present embodiment, an antenna-frequency mapping structure, to which the SFBC/FSTD scheme for obtaining 4-degree transmitting antenna diversity gain is applied, may be repeated 10 by an 8-subcarrier unit.

**[0054]** In FIG. 5(a), shown is an example where the repetitive transmission method is applied to the embodiment described with reference to FIG. 3. In FIG. 5(b), shown is an example where the repetitive transmission method is applied to 15 the embodiment described with reference to FIG. 4. In particular, FIG. 5(a) and FIG. 5(b) show examples for applying the SFBC/FSTD scheme for obtaining 4-degree transmitting antenna diversity gain using eight neighbor subcarriers, respectively. Although FIG. 5(a) and FIG. 5(b) differ from 20 each other with respect to the antennas included in the first and second antenna sets, each use the same method in applying the present embodiment.

**[0055]** In accordance with the present invention, a one-time transmission may correspond to a case where a signal having

been spread with SF=4 is CDM-multiplexed and then transmitted via four subcarriers. Accordingly, assuming that one-time transmission is performed via the first antenna set shown in FIG. 5(a) or 5(b), a two-time transmission, which is the 5 repetitive transmission of the one-time transmission, can be carried out via the second antenna set. Thus, it is observed that the SFBC/FSTD scheme is implemented via the one-time transmission and the two-time transmission. In the same manner, a three-time transmission may be carried out when the first 10 antenna set performs the transmission again.

**[0056]** FIG. 6 is a diagram illustrating another example for a method of applying a SFBC/FSTD scheme to a spread signal in a communication system in accordance with an embodiment of the present invention. In FIG. 6, like the embodiment shown in FIG. 15 5, after a signal is spread with SF=4, an antenna set is determined by a 4-subcarrier unit to enable the signal spread according to the aforesaid embodiment to be transmitted via the same antenna set. In this case, as mentioned in the foregoing description, the signal is repeatedly transmitted by changing 20 an antenna set in case of repetitive transmission to apply SFBC/FSTD for obtaining 4-degree transmitting antenna diversity.

**[0057]** However, while the embodiments shown in FIG. 5 use the SFBC/FSTD scheme through eight neighbor subcarriers, the embodiment of FIG. 6 uses subcarriers having an interval

compared to a previous transmission. Thus, frequency diversity may be obtained in addition to 4-degree antenna diversity. Notably, it is preferable that subcarriers through which a spread signal sequence is multiplexed and transmitted include subcarriers that neighbor each other.

**[0058]** This may be explained as follows. First, a one-time transmission may be performed using only four of eight subcarriers to which the SFBC/FSTD scheme is applied in the embodiment shown in FIG. 5 using a first antenna set. Subsequently, the one-time transmission is performed using four of eight subcarriers to which the SFBC/FSTD scheme is applied using a second antenna set. Accordingly, in order to implement the SFBC/FSTD scheme for obtaining 4-degree transmitting antenna diversity, an antenna set different from that of a previous transmission is used.

**[0059]** In FIG. 6(a), shown is an example where a repetitive transmission method is applied to the embodiment described with reference to FIG. 3. In FIG. 6(b), shown is an example where a repetitive transmission method is applied to the embodiment described with reference to FIG. 4. Although FIG. 6(a) and FIG. 6(b) differ from each other with respect to the antennas included in the first and second antenna sets, each use the same method in applying the present embodiment.

**[0060]** Referring to FIG. 6, compared to the method described in FIG. 5, the embodiment of FIG. 6 may considerably save resources required for the repetitive transmission by reducing additionally used resources in half. Therefore, if the repetitive transmission method according to FIG. 6 is applied, resources used for data transmission are used more efficiently.

**[0061]** As described above, a method of applying an SFBC/FSTD scheme for a single time unit according to an embodiment of the present invention was explained. However, situations occur where a signal may be transmitted using a plurality of time units, wherein a single OFDM symbol may be preferably defined as a time unit in a communication system adopting orthogonal frequency division multiplexing. Accordingly, in accordance with an embodiment of the present invention, a method of applying an SFBC/FSTD scheme to a case of transmitting a signal using a plurality of OFDM symbols will be explained.

**[0062]** When a signal is transmitted via a plurality of OFDM symbols, repetitive transmission on a time axis as well as a frequency axis is possible to obtain diversity additional to transmitting antenna diversity. Accordingly, CDM and SFBC/FSTD schemes may be applied to a spread signal for an ACK/NAK signal transmitted in downlink to announce the successful/failed reception of data transmitted in uplink.

**[0063]** FIG. 7 is a diagram illustrating an example of a method for transmitting a spread signal via a plurality of OFDM symbols in accordance with one embodiment of the present invention. Referring to FIG. 7, each small box indicates a resource element (RE) constructed with a single OFDM symbol and a single subcarrier.  $A_{ij}$  may indicate an ACK/NAK signal multiplexed by CDM, wherein "i" indicates an index of a signal spread and then multiplexed, and "j" indicates an ACK/NAK channel index of the multiplexed ACK/NAK signal. In this case, an ACK/NAK channel indicates a set of multiplexed ACK/NAK signals. A plurality of ACK/NAK channels may exist according to necessity and resource situation of each system. However, for clarity and convenience of description, a single ACK/NAK channel exists in FIG. 7.

**[0064]** In FIG. 7(a), shown is an example where a multiplexed ACK/NAK signal is transmitted via a single OFDM symbol. Referring to FIG. 7(a), four ACK/NAK signals are spread by a spreading factor equal to four (SF=4) for a single OFDM symbol, multiplexed by CDM, and then transmitted via four neighbor subcarriers. Because a single OFDM symbol is used for the ACK/NAK signal transmission, diversity gain on a time axis may not be obtained. However, four repetitive transmissions of the ACK/NAK signal multiplexed by CDM may be carried out along a frequency axis. Hence, the four-time repetitive transmission

exemplifies repetition to obtain diversity. Notably, a repetition count may vary according to a channel status and/or a resource status of a system.

**[0065]** In FIG. 7(b), shown is an example where a multiplexed ACK/NAK signal is transmitted via a plurality of OFDM symbols. Referring to FIG. 7(b), four ACK/NAK signals are spread by a spreading factor SF=4 for two OFDM symbols each, multiplexed by CDM, and then transmitted via four neighbor subcarriers. Namely, in case that OFDM symbols for ACK/NAK signal transmission increase, the ACK/NAK signal may be repetitively transmitted using a single OFDM symbol for the increased OFDM symbols as it is. However, when the ACK/NAK signal is repetitively transmitted for a second OFDM symbol, transmission is performed to maximize use of subcarriers that are not overlapped with former subcarriers used for the first OFDM symbol. This is preferable considering a frequency diversity effect.

**[0066]** In FIG. 7(b), shown is a case where the number of ACK/NAK signals transmittable despite the increased number of OFDM symbols is equal to the case where a single OFDM symbol is used. Previously, an ACK/NAK signal was transmitted repeatedly only on a frequency axis when using a single OFDM symbol. However, in accordance with the present embodiment, more time-frequency resources may be used for transmitting the same

number of ACK/NAK signals as in the single OFDM symbol case by substantially incrementing the repetition count of time-frequency. Here, because OFDM symbols used for the ACK/NAK transmission are increased, more signal power used for the ACK/NAK transmission can be allocated. Hence, the ACK/NAK signal may be transmitted to a cell having a wider area.

**[0067]** In FIG. 7(c), shown is another example where multiplexed ACK/NAK signals are transmitted via a plurality of OFDM symbols. Referring to FIG. 7(c), when the number of OFDM symbols for ACK/NAK signal transmission is set at 2, the transmission may be carried out by reducing the frequency-axis repetition count of the ACK/NAK signal multiplexed by CDM. Thus, by decreasing the repetition count to facilitate transmission when the number of OFDM symbols is set at 2, resources are efficiently utilized.

**[0068]** Compared with the transmission method shown in FIG. 7(b), four time-frequency axis transmission repetitions of the ACK/NAK signal are reduced to two transmission repetitions in FIG. 7(c). However, because the number of OFDM symbols used for the ACK/NAK signal transmission is incremented, the transmission method shown in FIG. 7(c) is similar to the method shown in FIG. 7(a), where a single OFDM symbol is used, because four time-frequency resource areas are available in both the methods shown in FIGS. 7(a) and 7(c).

**[0069]** Furthermore, compared to the transmission method shown in FIG. 7(b), the method shown in FIG. 7(c) may reduce the signal power for ACK/NAK channel transmission because the number of time-frequency resource areas used for a single ACK/NAK channel transmission is reduced. Moreover, because the ACK/NAK channel is transmitted across the time-frequency areas, per-symbol transmission power allocation may be performed more efficiently than transmission over a single OFDM symbol only.

**[0070]** In case that ACK/NAK signals are repetitively transmitted in the same structure for all OFDM symbols to simplify a system's scheduling operation, such as when the time-frequency resources shown in FIG. 7(b) are used for example, different ACK/NAK channels may be transmitted. In particular, because double ACK/NAK channels are transmittable, more efficient resource use is achieved.

**[0071]** As described above, a spreading factor for multiplexing a plurality of ACK/NAK signals, a repetition count in time-frequency domain and the number of OFDM symbols for ACK/NAK signal transmission, which are explained with reference 0 to FIG. 7, are exemplarily provided for a more accurate description of the present invention. It is understood that different spreading factors, different repetition counts and various OFDM symbol numbers are applicable to the present invention. Moreover, the embodiments shown in FIG. 7 may

relate to using a single transmitting antenna that does not use transmitting antenna diversity, but may also be applicable to a 2-transmitting antenna diversity method, 4-transmitting antenna diversity method, and the like.

**[0072]** FIG. 8 is a diagram illustrating an example of a method for transmitting spread signals via a plurality of OFDM symbols in accordance with one embodiment of the present invention, in which an SFBC/FSTD scheme is applied to the spread signal. Referring to FIG. 8, a 4-degree transmitting antenna diversity method using a total of four transmitting antennas is implemented. Here, a single ACK/NAK channel exists for clarity and convenience of description.

**[0073]** In FIG. 8(a), an SFBC/FSTD scheme is applied to a spread signal using four transmitting antennas, and the signal is transmitted for a plurality of OFDM symbols. Furthermore, four ACK/NAK signals are spread with a spreading factor SF=4 for each of two OFDM symbols, multiplexed by CDM, and then transmitted via four neighbor subcarriers. Preferably, when OFDM symbols for ACK/NAK signal transmission increase, the ACK/NAK signal may be repetitively transmitted using a single OFDM symbol for the increased OFDM symbols as it is. Notably, this process is similar to the process described with reference to FIG. 7(b).

**[0074]** However, when a repetitive transmission is performed for a second OFDM symbol, it is carried out using an antenna set different from an antenna set used for a first OFDM symbol. For example, if a transmission for a first OFDM symbol is performed using a first antenna set including a first antenna and a third antenna, a transmission for a second OFDM symbol can be performed using a second antenna set including a second antenna and a fourth antenna. Accordingly, the transmission for the second OFDM symbol is carried out by maximizing use of subcarriers not overlapped with former subcarriers used for the first OFDM symbol. This is preferable to achieve a frequency diversity effect.

**[0075]** In FIG. 8 (b), shown is another example of applying an SFBC/FSTD scheme to a spread signal using four transmitting antennas and transmitting the signal for a plurality of OFDM symbols in accordance with one embodiment of the present invention. Referring to FIG. 8 (b), when the number of OFDM symbols for ACK/NAK signal transmission is set to 2, the signal may be transmitted by reducing a frequency-axis repetition count of the ACK/NAK signal multiplexed by CDM. Notably, this process is similar to the method described with reference to FIG. 7(c). However, when repetitive transmission is carried out for a second OFDM symbol, the transmission will be

performed using an antenna set different from the antenna set used for the first OFDM symbol.

**[0076]** FIG. 9 is a diagram illustrating an example for a method of applying an SFBC/FSTD scheme to a spread signal in a communication system in accordance with one embodiment of the present invention. Referring to FIG. 9, when a total of four transmitting antennas are used, a first antenna set includes a first antenna and second antenna, and a second antenna set includes a third antenna and fourth antenna. Preferably, each of the first and second antenna sets is an antenna set for performing SFBC coding and an FSTD scheme applicable between the two antenna sets. According to the present embodiment, if data is transmitted for a single OFDM symbol, the signal spread with SF=2, as shown in FIG. 9, can be transmitted via two neighbor subcarriers of one OFDM symbol via the same SFBC-coded antenna set.

**[0077]** In FIG. 9(a), shown is a case where the spread signal transmitted via the first antenna set is different from the spread signal transmitted via the second antenna set. In FIG. 9(b), shown is a case where the spread signal transmitted via the first antenna set is repeatedly transmitted via the second antenna set to obtain a 4-degree transmitting antenna diversity gain.

**[0078]** Accordingly, with regard to FIG. 9, a single signal may be spread with SF=2. Thus, the same structure as applying an SFBC/FSTD scheme by 4-subcarrier unit for a CDM-multiplexed signal may be used, but without considering spreading as in FIG. 1.

**[0079]** FIG. 10 is a diagram for illustrating another example of a method for applying an SFBC/FSTD scheme to spread signals in a communication system in accordance with one embodiment of the present invention. In the embodiment shown in FIG. 10, like the former embodiment shown in FIG. 9, at least one or more signals are spread by (pseudo) orthogonal code or the like with SF=2. The at least one or more spread signals are also multiplexed and transmitted by CDM. Here, the multiplexed signals are transmitted via the same antenna set.

**[0080]** In FIG. 10, unlike FIG. 9, when a total of four transmitting antennas are used, a first antenna set includes a first antenna and third antenna, and a second antenna set includes a second antenna and fourth antenna. Thus, compared to FIG. 9, FIG. 10 illustrates use of a different method for constructing each antenna set but applies the same SFBC/FSTD scheme. In accordance with the present embodiment, the signal spread with SF=2 may be transmitted via two neighbor subcarriers of one OFDM symbol via the same SFBC-coded antenna set.

**[0081]** In FIG. 10(a), shown is a case where the spread signal transmitted via the first antenna set is different from the spread signal transmitted via the second antenna set. In FIG. 10(b), shown is a case where the spread signal transmitted via the first antenna set is repeatedly transmitted via the second antenna set to obtain a 4-degree transmitting antenna diversity gain.

**[0082]** Accordingly, with regard to FIG. 10, a single signal may be spread by SF=2. Thus, the same structure as applying SFBC/FSTD by 4-subcarrier unit for a CDM-multiplexed signal may be used without considering spreading as in FIG. 1.

**[0083]** FIG. 11 is a diagram illustrating another example of a method for applying an SFBC/FSTD scheme to spread signals in a communication system in accordance with one embodiment of the present invention. In accordance with the present invention, a same signal can be repeatedly transmitted to obtain additional diversity. In particular, the same signal may be repeatedly transmitted at least once via different subcarriers on a frequency axis, i.e., for a period of the same time unit.

**[0084]** Referring to FIG. 11, an antenna set is determined as follows in accordance with the present invention. After a signal has been spread with SF=2, a plurality of the spread signals are multiplexed. An antenna set is then determined by 2-subcarrier unit to enable the spread signal to be transmitted

via the same antenna set. In this case, the signal is repeatedly transmitted by changing an antenna set in case of repetitive transmission to apply the SFBC/FSTD scheme for obtaining the 4-degree transmitting antenna diversity. Accordingly, an antenna-frequency mapping structure, to which the SFBC/FSTD scheme for obtaining 4-degree transmitting antenna diversity gain is applied, is repeated by 4-subcarrier unit.

**[0085]** In FIG. 11(a), shown is an example where the repetitive transmission method is applied to the embodiment described with reference to FIG. 9. In FIG. 11(b), shown is an example where the repetitive transmission method is applied to the embodiment described with reference to FIG. 10. In particular, FIG. 11(a) and FIG. 11(b) illustrate examples for applying the SFBC/FSTD scheme using four neighbor subcarriers, respectively. Notably, FIGS. 11(a) and 11(b) differ from each other with respect to the antennas included in the first and second antenna sets, but use the same method in applying the described embodiment.

**[0086]** FIG. 12 is a diagram illustrating another example of a method for applying an SFBC/FSTD scheme to spread signals in a communication system in accordance with one embodiment of the present invention. In FIG. 12, like the embodiment shown in FIG. 11, after a plurality of signals spread with SF=2 have

been multiplexed, an antenna set is determined by 2-subcarrier unit to enable the spread signals to be transmitted via the same antenna set. Here, the signal may be repeatedly transmitted by changing an antenna set in case of repetitive transmission to apply the SFBC/FSTD scheme for obtaining the 4-degree transmitting antenna diversity.

**[0087]** However, unlike the embodiment shown in FIG. 11 wherein the SFBC/FSTD scheme is applied through the four neighbor subcarriers, the embodiment of FIG. 12 uses a subcarrier having a prescribed interval by comparing a subcarrier used for repetitive transmission to that of a previous transmission. Notably, it is preferable that subcarriers through which a spread signal sequence is multiplexed and transmitted include subcarriers that neighbor each other.

**[0088]** In FIG. 12(a), shown is an example where a repetitive transmission method is applied to the embodiment described with reference to FIG. 9. In FIG. 12(b), shown is an example where a repetitive transmission method is applied to the embodiment described with reference to FIG. 10. Notably, FIGS. 12(a) and 12(b) differ from each other with respect to the antennas included in the first and second antenna sets but use the same method in applying the described embodiment.

**[0089]** Accordingly, the embodiment of FIG. 12 may be described as follows. First, a one-time transmission is first performed using two of four subcarriers to which an SFBC/FSTD scheme is applied. The one-time transmission is then carried out using two of four subcarriers to which a next SFBC/FSTD scheme is applied. In this case, an antenna set different from that of a previous transmission is used to implement the SFBC/FSTD scheme.

**[0090]** FIG. 13 is a diagram illustrating an example of a method for applying an SFBC/FSTD scheme to at least one spread signal in a communication system in accordance with one embodiment of the present invention. Preferably, if an antenna-frequency mapping structure according to the SFBC/FSTD transmission scheme shown in FIG. 1 is maintained collectively for each OFDM symbol or subframe on a system, then the rest of an SFBC antenna set unused in the SFBC/FSTD scheme of FIG. 12 may be used for another data transmission.

**[0091]** Referring to FIG. 13, the same antenna-frequency mapping structure in the SFBC/FSTD scheme for obtaining 4-degree transmitting antenna diversity gain by the 4-subcarrier unit (described with reference to FIG. 1) is used. Accordingly, two different multiplexed signals may be transmitted using this structure. Here, each of the multiplexed signals is a

multiplexed signal spread by SF=2, and can be transmitted through two subcarriers.

**[0092]** As applied, in the SFBC/FSTD transmission scheme for transmitting a random multiplexed signal generated from multiplexing a plurality of spread data signals, a second antenna set other than a first antenna set to be SFBC-coded can be used to transmit another multiplexed signal. Moreover, by repeatedly transmitting the multiplexed signals via the first and second antenna sets, the multiplexed signals may respectively be transmitted through the different antenna sets. Hence, a 4-degree transmitting antenna diversity effect may be obtained.

**[0093]** For example, a first multiplexed signal is transmitted via first antenna set and a second multiplexed signal is transmitted via second antenna set. In case of a repetitive transmission, mapping between a multiplexed signal and an antenna is changed. Accordingly, the second multiplexed signal will be transmitted via the first antenna set, while the first multiplexed signal is transmitted via the second antenna set. In case of a next repetitive transmission, the mapping between the multiplexed signal and the antenna is changed again to perform the corresponding transmission. Thus, the first multiplexed signal will again be transmitted via first antenna set and the second multiplexed signal will again be transmitted

via second antenna set. Accordingly, if transmission is performed in the above-mentioned manner, resources are efficiently used. Moreover, the antenna-frequency mapping structure in the SFBC/FSTD scheme described with reference to FIG. 1 will be maintained.

**[0094]** In the example above, the signal spread by SF=2 is transmitted via a single OFDM symbol only. If so, repetition on a frequency axis is possible to obtain additional frequency diversity. However, using a single OFDM symbol is merely exemplary for illustrating the present invention. As mentioned in the foregoing description of SF=4, the present embodiment is applicable to a case of using several OFDM symbols.

**[0095]** When transmitting via several OFDM symbols, repetition on a time axis as well as a frequency axis is applicable to obtain diversity in addition to transmitting antenna diversity. The above embodiments are provided to explain applications of the present invention and are also applicable to a system using an SFBC/FSTD transmission diversity method regardless of various spreading factors (SF), various OFDM symbols numbers and repetition counts on time and frequency axes.

**[0096]** Embodiments of the present invention can be implemented by various means, e.g., hardware, firmware, software, and any combination thereof. In case of the

implementation by hardware, a method of transmitting a spread signal in a communication system according to one embodiment of the present invention can be implemented by at least one of application specific integrated circuits (ASICs), digital signal processors (DSPs), digital signal processing devices (DSPPs), programmable logic devices (PLDs), field programmable gate arrays (FPGAs), a processor, a controller, a microcontroller, a microprocessor, etc.

**[0097]** In case of implementation by firmware or software, a method of transmitting a spread signal in a communication system according to one embodiment of the present invention can be implemented by a module, procedure, function and the like capable of performing the above mentioned functions or operations. Software code is stored in a memory unit and can be driven by a processor. The memory unit is provided within or outside the processor to exchange data with the processor by various means known in public.

**[0098]** The foregoing embodiments and advantages are merely exemplary and are not to be construed as limiting the present invention. The present teaching can be readily applied to other types of apparatuses. The description of the present invention is intended to be illustrative, and not to limit the scope of the claims. Many alternatives, modifications, and variations will be apparent to those skilled in the art. In

the claims, means-plus-function clauses are intended to cover the structure described herein as performing the recited function and not only structural equivalents but also equivalent structures.

#### INDUSTRIAL APPLICABILITY

The present invention can be applied to a mobile communication system which uses multiple carriers.

74420-388

CLAIMS:

1. A method for transmitting Acknowledgement/Negative Acknowledgement (ACK/NACK) information in a mobile communication system, the method comprising:

5 spreading the ACK/NACK information using an orthogonal sequence with a spreading factor of 4 to generate first spread ACK/NACK information;

spreading the ACK/NACK information using the orthogonal sequence to generate second spread ACK/NACK information;

transmitting a first signal including the first spread ACK/NACK 10 information via a first antenna set in an orthogonal frequency division multiplexing (OFDM) symbol, the first spread ACK/NACK information existing in a form as shown in Table 1; and

transmitting a second signal including the second spread ACK/NACK information via a second antenna set in an OFDM symbol, the second spread 15 ACK/NACK information existing in a form as shown in Table 1:

Table 1

		four available neighboring subcarriers			
the first antenna set	antenna A	$a_1$	$a_2$	$a_3$	$a_4$
	antenna B	$-a_2^*$	$a_1^*$	$-a_4^*$	$a_3^*$
the second antenna set	antenna C	$b_1$	$b_2$	$b_3$	$b_4$
	antenna D	$-b_2^*$	$b_1^*$	$-b_4^*$	$b_3^*$

74420-388

wherein  $a_1$  to  $a_4$  are elements of the first spread ACK/NACK information,  $b_1$  to  $b_4$  are elements of the second spread ACK/NACK information, and the “\*” symbol represents a conjugate operation,

wherein the four available neighboring subcarriers for the first spread

5 ACK/NACK information are not contiguous with the four available neighboring subcarriers for the second spread ACK/NACK information in a frequency domain.

2. The method of claim 1, wherein the four available neighboring subcarriers for the first spread ACK/NACK information and the four available neighboring subcarriers for the second spread ACK/NACK information exist on  
10 different OFDM symbols.

3. The method of claim 1, further comprising:

spreading the ACK/NACK information using the orthogonal sequence to generate third spread ACK/NACK information;

transmitting a third signal including the third spread ACK/NACK  
15 information via the first antenna set in an OFDM symbol, the third spread ACK/NACK information existing in a form as shown in Table 1 with replacing  $a_1$  to  $a_4$  with  $c_1$  to  $c_4$ ,

wherein  $c_1$  to  $c_4$  are elements of the third spread ACK/NACK information,

wherein the four available neighboring subcarriers for the first spread  
20 ACK/NACK information are not contiguous with the four available neighboring subcarriers for the third spread ACK/NACK information in a frequency domain.

4. The method of claim 1, wherein the antennas A and B are first two contiguously numbered antennas, and the antennas C and D are second two contiguously numbered antennas.

74420-388

5. The method of claim 1, wherein the antennas A and B are odd-numbered antennas, and the antennas C and D are even-numbered antennas.

6. A method for receiving Acknowledgement/Negative Acknowledgement (ACK/NACK) information in a mobile communication system, the method comprising:

5 receiving a first signal including first spread ACK/NACK information from a first antenna set of a transmitting end in an orthogonal frequency division multiplexing (OFDM) symbol, the first spread ACK/NACK information existing in a form as shown in Table 1,

10 receiving a second signal including second spread ACK/NACK information from a second antenna set of the transmitting end in an OFDM symbol, the second spread ACK/NACK information existing in a form as shown in Table 1:

Table 1

		four available neighboring subcarriers			
the first antenna set	antenna A	$a_1$	$a_2$	$a_3$	$a_4$
	antenna B	$-a_2^*$	$a_1^*$	$-a_4^*$	$a_3^*$
the second antenna set	antenna C	$b_1$	$b_2$	$b_3$	$b_4$
	antenna D	$-b_2^*$	$b_1^*$	$-b_4^*$	$b_3^*$

15 wherein  $a_1$  to  $a_4$  are elements of the first spread ACK/NACK information,  $b_1$  to  $b_4$  are elements of the second spread ACK/NACK information, and the "\*" symbol represents a conjugate operation,

74420-388

wherein the first spread ACK/NACK information is generated by spreading of the ACK/NACK information using an orthogonal sequence with a spreading factor of 4,

5 wherein the second spread ACK/NACK information is generated by spreading of the ACK/NACK information using the orthogonal sequence,

wherein the four available neighboring subcarriers for the first spread ACK/NACK information are not contiguous with the four available neighboring subcarriers for the second spread ACK/NACK information in a frequency domain.

7. The method of claim 6, wherein the four available neighboring 10 subcarriers for the first spread ACK/NACK information and the four available neighboring subcarriers for the second spread ACK/NACK information exist on different OFDM symbols.

8. The method of claim 6, further comprising receiving a third signal 15 including third spread ACK/NACK information from the first antenna set of the transmitting end in an OFDM symbol, the third spread ACK/NACK information existing in a form as shown in Table 1 with replacing  $a_1$  to  $a_4$  with  $c_1$  to  $c_4$ ,

wherein  $c_1$  to  $c_4$  are elements of the third spread ACK/NACK information,

wherein the third spread ACK/NACK information is generated by 20 spreading of the ACK/NACK information using the orthogonal sequence,

wherein the four available neighboring subcarriers for the first spread ACK/NACK information are not contiguous with the four available neighboring subcarriers for the third spread ACK/NACK information in a frequency domain.

9. The method of claim 6, wherein the antennas A and B are first two 25 contiguously numbered antennas, and the antennas C and D are second two contiguously numbered antennas.

74420-388

10. The method of claim 6, wherein the antennas A and B are odd-numbered antennas, and the antennas C and D are even-numbered antennas.

11. An apparatus configured to transmit Acknowledgement/Negative Acknowledgement (ACK/NACK) information in a mobile communication system, the 5 apparatus comprising:

a radio frequency unit; and

a processor,

wherein the processor is configured to:

spread the ACK/NACK information using an orthogonal sequence with 10 a spreading factor of 4 to generate first spread ACK/NACK information,

spread the ACK/NACK information using the orthogonal sequence to generate second spread ACK/NACK information,

transmit a first signal including the first spread ACK/NACK information via a first antenna set in an orthogonal frequency division multiplexing (OFDM) 15 symbol, the first spread ACK/NACK information existing in a form as shown in Table 1, and

transmit a second signal including the second spread ACK/NACK information via a second antenna set in an OFDM symbol, the second spread ACK/NACK information existing in a form as shown in Table 1:

74420-388

Table 1

		four available neighboring subcarriers			
the first antenna set	antenna A	$a_1$	$a_2$	$a_3$	$a_4$
	antenna B	$-a_2^*$	$a_1^*$	$-a_4^*$	$a_3^*$
the second antenna set	antenna C	$b_1$	$b_2$	$b_3$	$b_4$
	antenna D	$-b_2^*$	$b_1^*$	$-b_4^*$	$b_3^*$

wherein  $a_1$  to  $a_4$  are elements of the first spread ACK/NACK information,  $b_1$  to  $b_4$  are elements of the second spread ACK/NACK information, and

5 the “\*” symbol represents a conjugate operation,

wherein the four available neighboring subcarriers for the first spread ACK/NACK information are not contiguous with the four available neighboring subcarriers for the second spread ACK/NACK information in a frequency domain.

12. The apparatus of claim 11, wherein the four available neighboring subcarriers for the first spread ACK/NACK information and the four available neighboring subcarriers for the second spread ACK/NACK information exist on different Orthogonal Frequency-Division Multiplexing (OFDM) symbols.

13. The apparatus of claim 11, wherein the processor is further configured to:

15 spread the ACK/NACK information using the orthogonal sequence to generate third spread ACK/NACK information, and

74420-388

transmit a third signal including the third spread ACK/NACK information via the first antenna set in an OFDM symbol, the third spread ACK/NACK information existing in a form as shown in Table 1 with replacing  $a_1$  to  $a_4$  with  $c_1$  to  $c_4$ ,

wherein  $c_1$  to  $c_4$  are elements of the third spread ACK/NACK

5 information,

wherein the four available neighboring subcarriers for the first spread ACK/NACK information are not contiguous with the four available neighboring subcarriers for the third spread ACK/NACK information in a frequency domain.

14. The apparatus of claim 11, wherein the antennas A and B are first two  
10 contiguously numbered antennas, and the antennas C and D are second two  
contiguously numbered antennas.

15. The apparatus of claim 11, wherein the antennas A and B are odd-  
numbered antennas, and the antennas C and D are even-numbered antennas.

16. An apparatus configured to receive Acknowledgement/Negative  
15 Acknowledgement (ACK/NACK) information in a mobile communication system, the  
apparatus comprising:

a radio frequency unit; and

a processor,

wherein the processor is configured to:

20 receive a first signal including first spread ACK/NACK information from  
a first antenna set of a transmitting end in an orthogonal frequency division  
multiplexing (OFDM) symbol, the first spread ACK/NACK information existing in a  
form as shown in Table 1,

74420-388

receive a second signal including second spread ACK/NACK information from a second antenna set of the transmitting end in an OFDM symbol, the second spread ACK/NACK information existing in a form as shown in Table 1:

Table 1

		four available neighboring subcarriers			
the first antenna set	antenna A	$a_1$	$a_2$	$a_3$	$a_4$
	antenna B	$-a_2^*$	$a_1^*$	$-a_4^*$	$a_3^*$
the second antenna set	antenna C	$b_1$	$b_2$	$b_3$	$b_4$
	antenna D	$-b_2^*$	$b_1^*$	$-b_4^*$	$b_3^*$

5

wherein  $a_1$  to  $a_4$  are elements of the first spread ACK/NACK information,  $b_1$  to  $b_4$  are elements of the second spread ACK/NACK information, and the symbol “\*” denotes a conjugate operation,

wherein the first spread ACK/NACK information is generated by  
10 spreading of the ACK/NACK information using an orthogonal sequence with a spreading factor of 4,

wherein the second spread ACK/NACK information is generated by spreading of the ACK/NACK information using the orthogonal sequence,

wherein the four available neighboring subcarriers for the first spread  
15 ACK/NACK information are not contiguous with the four available neighboring subcarriers for the second spread ACK/NACK information in a frequency domain.

17. The apparatus of claim 16, wherein the four available neighboring subcarriers for the first spread ACK/NACK information and the four available

74420-388

neighboring subcarriers for the second spread ACK/NACK information exist on different OFDM symbols.

18. The apparatus of claim 16, wherein the processor is further configured to:

5 receive a third signal including the third spread ACK/NACK information from the first antenna set of the transmitting end in an OFDM symbol, the third spread ACK/NACK information existing in a form as shown in Table 1 with replacing  $a_1$  to  $a_4$  with  $c_1$  to  $c_4$ ,

10 wherein  $c_1$  to  $c_4$  are elements of the third spread ACK/NACK information,

wherein the third spread ACK/NACK information is generated by spreading of the ACK/NACK information using the orthogonal sequence,

15 wherein the four available neighboring subcarriers for the first spread ACK/NACK information are not contiguous with the four available neighboring subcarriers for the third spread ACK/NACK information in a frequency domain.

19. The apparatus of claim 16, wherein the antennas A and B are first two contiguously numbered antennas, and the antennas C and D are second two contiguously numbered antennas.

20. The apparatus of claim 16, wherein the antennas A and B are odd-numbered antennas, and the antennas C and D are even-numbered antennas.

FIG. 1

frequency →

Ant.1	$f_1(a)$	$f_2(b)$		$f_1(e)$	$f_2(f)$		
Ant.2	$f_3(b)$	$f_4(a)$		$f_3(f)$	$f_4(e)$		...
Ant.3		$f_1(c)$	$f_2(d)$			$f_1(g)$	$f_2(h)$
Ant.4		$f_3(d)$	$f_4(c)$			$f_3(h)$	$f_4(g)$

FIG. 2

				frequency $\rightarrow$
Ant.1	$f_1 (a_1 + b_1)$ $+ c_1 + d_1$	$f_2 (a_2 + b_2)$ $+ c_2 + d_2$	$f_1 (e_1 + f_1)$ $+ g_1 + h_1$	$f_2 (e_2 + f_2)$ $+ g_2 + h_2$
	$f_3 (a_2 + b_2)$ $+ c_2 + d_2$	$f_4 (a_1 + b_1)$ $+ c_1 + d_1$	$f_3 (e_2 + f_2)$ $+ g_2 + h_2$	$f_4 (e_1 + f_1)$ $+ g_1 + h_1$
Ant.2				...
				...
Ant.3		$f_1 (a_3 + b_3)$ $+ c_3 + d_3$	$f_2 (a_4 + b_4)$ $+ c_4 + d_4$	$f_1 (e_3 + f_3)$ $+ g_3 + h_3$
				$f_2 (e_4 + f_4)$ $+ g_4 + h_4$
Ant.4		$f_3 (a_4 + b_4)$ $+ c_4 + d_4$	$f_4 (a_3 + b_3)$ $+ c_3 + d_3$	$f_3 (e_4 + f_4)$ $+ g_4 + h_4$
				$f_4 (e_3 + f_3)$ $+ g_3 + h_3$

3  
FIG

		frequency			
		Ant.1		Ant.2	
		Ant.3		Ant.4	
(a)		$f_1 (a_1+b_1+c_1+d_1)$	$f_2 (a_2+b_2+c_2+d_2)$	$f_3 (a_3+b_3+c_3+d_3)$	$f_4 (a_4+b_4+c_4+d_4)$
Ant.1		$f_1 (a_1+b_1+c_1+d_1)$	$f_2 (a_2+b_2+c_2+d_2)$	$f_3 (a_3+b_3+c_3+d_3)$	$f_4 (a_4+b_4+c_4+d_4)$
Ant.2		$f_1 (e_1+f_1+g_1+h_1)$	$f_2 (e_2+f_2+g_2+h_2)$	$f_3 (e_3+f_3+g_3+h_3)$	$f_4 (e_4+f_4+g_4+h_4)$
Ant.3		$f_1 (e_1+f_1+g_1+h_1)$	$f_2 (e_2+f_2+g_2+h_2)$	$f_3 (e_3+f_3+g_3+h_3)$	$f_4 (e_4+f_4+g_4+h_4)$
Ant.4		$f_1 (e_1+f_1+g_1+h_1)$	$f_2 (e_2+f_2+g_2+h_2)$	$f_3 (e_3+f_3+g_3+h_3)$	$f_4 (e_4+f_4+g_4+h_4)$

		frequency			
		Ant.1		Ant.2	
		$f_1 (a_1+b_1+c_1+d_1)$	$f_2 (a_2+b_2+c_2+d_2)$	$f_3 (a_3+b_3+c_3+d_3)$	$f_4 (a_4+b_4+c_4+d_4)$
(b)		$f_1 (a_1+b_1+c_1+d_1)$	$f_2 (a_2+b_2+c_2+d_2)$	$f_3 (a_3+b_3+c_3+d_3)$	$f_4 (a_4+b_4+c_4+d_4)$
Ant.3		$f_1 (a_1+b_1+c_1+d_1)$	$f_2 (a_2+b_2+c_2+d_2)$	$f_3 (a_3+b_3+c_3+d_3)$	$f_4 (a_4+b_4+c_4+d_4)$
Ant.4		$f_1 (a_1+b_1+c_1+d_1)$	$f_2 (a_2+b_2+c_2+d_2)$	$f_3 (a_3+b_3+c_3+d_3)$	$f_4 (a_4+b_4+c_4+d_4)$

FIG. 4

frequency →

Ant. 1	$f_1 (a_1 + b_1 + c_1 + d_1)$	$f_2 (a_2 + b_2 + c_2 + d_2)$	$f_1 (a_3 + b_3 + c_3 + d_3)$	$f_2 (a_4 + b_4 + c_4 + d_4)$		
(a)	Ant. 2			$f_1 (e_1 + f_1 + g_1 + h_1)$	$f_2 (e_2 + f_2 + g_2 + h_2)$	$f_1 (e_3 + f_3 + g_3 + h_3)$
	Ant. 3	$f_3 (a_2 + b_2 + c_2 + d_2)$	$f_4 (a_1 + b_1 + c_1 + d_1)$	$f_4 (a_3 + b_3 + c_3 + d_3)$		$f_2 (e_4 + f_4 + g_4 + h_4)$
	Ant. 4				$f_3 (e_2 + f_2 + g_2 + h_2)$	$f_4 (e_3 + f_3 + g_3 + h_3)$
					$f_4 (e_4 + f_4 + g_4 + h_4)$	$f_4 (e_3 + f_3 + g_3 + h_3)$

frequency →

Ant. 1	$f_1 (a_1 + b_1 + c_1 + d_1)$	$f_2 (a_2 + b_2 + c_2 + d_2)$	$f_1 (a_3 + b_3 + c_3 + d_3)$	$f_2 (a_4 + b_4 + c_4 + d_4)$		
(b)	Ant. 2			$f_1 (a_1 + b_1 + c_1 + d_1)$	$f_2 (a_2 + b_2 + c_2 + d_2)$	$f_1 (a_3 + b_3 + c_3 + d_3)$
	Ant. 3	$f_3 (a_2 + b_2 + c_2 + d_2)$	$f_4 (a_1 + b_1 + c_1 + d_1)$	$f_4 (a_3 + b_3 + c_3 + d_3)$		$f_2 (a_4 + b_4 + c_4 + d_4)$
	Ant. 4				$f_3 (a_2 + b_2 + c_2 + d_2)$	$f_4 (a_1 + b_1 + c_1 + d_1)$
					$f_3 (a_4 + b_4 + c_4 + d_4)$	$f_4 (a_3 + b_3 + c_3 + d_3)$

FIG. 5

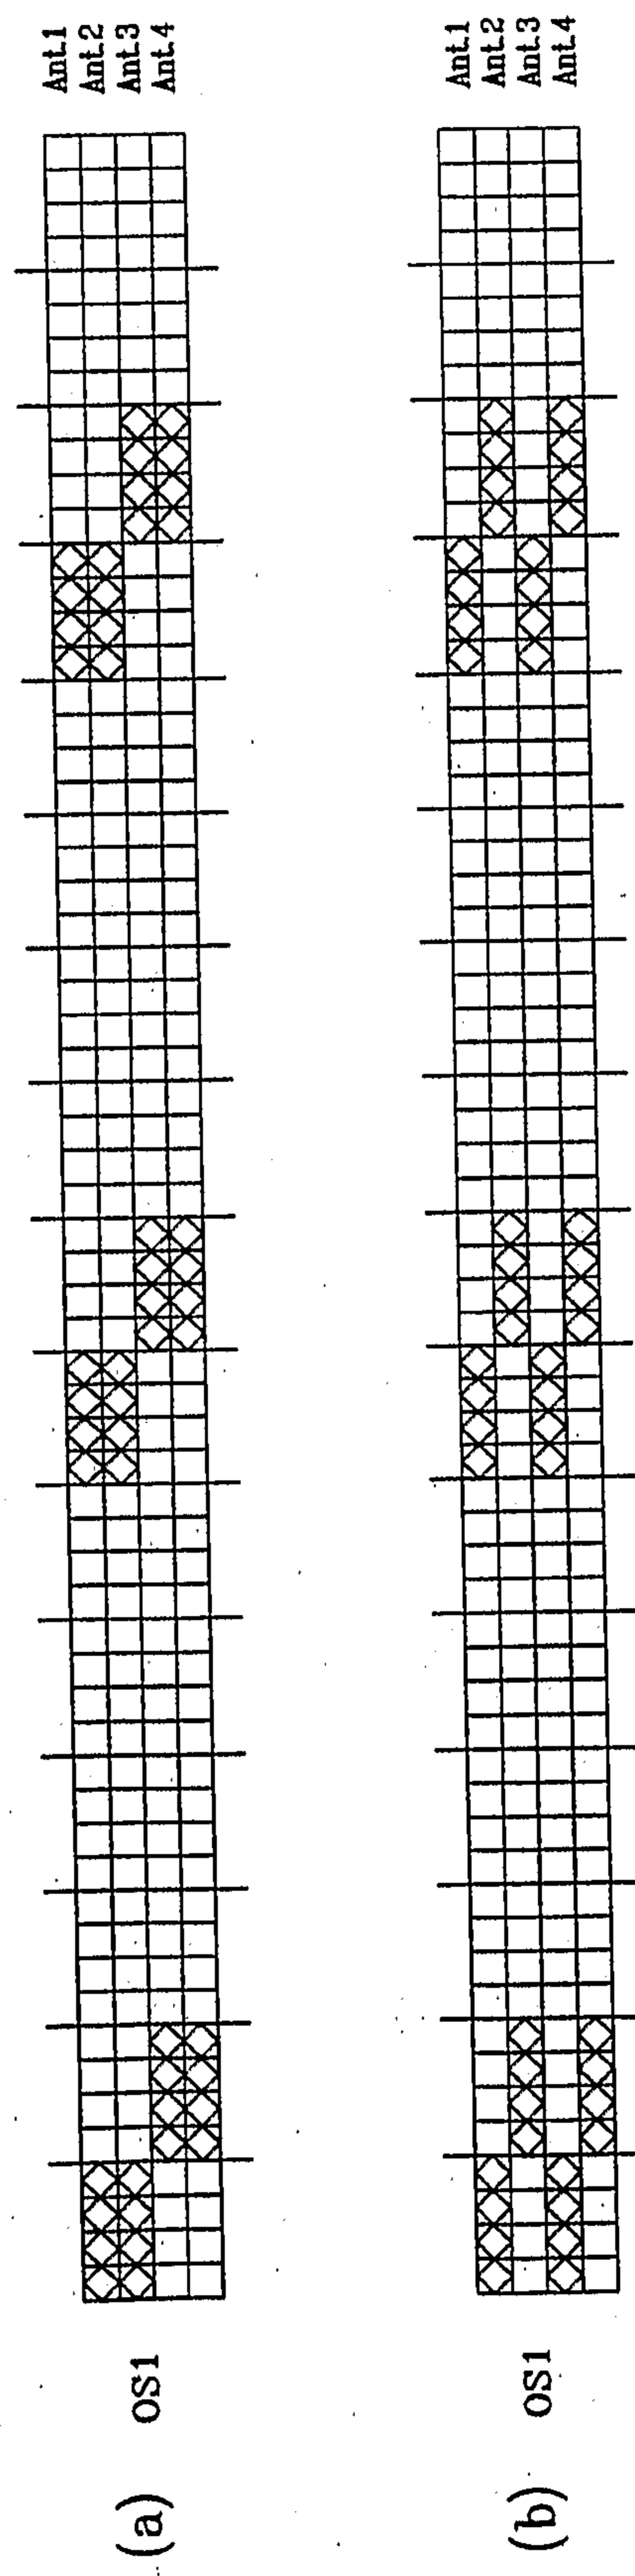


FIG. 6

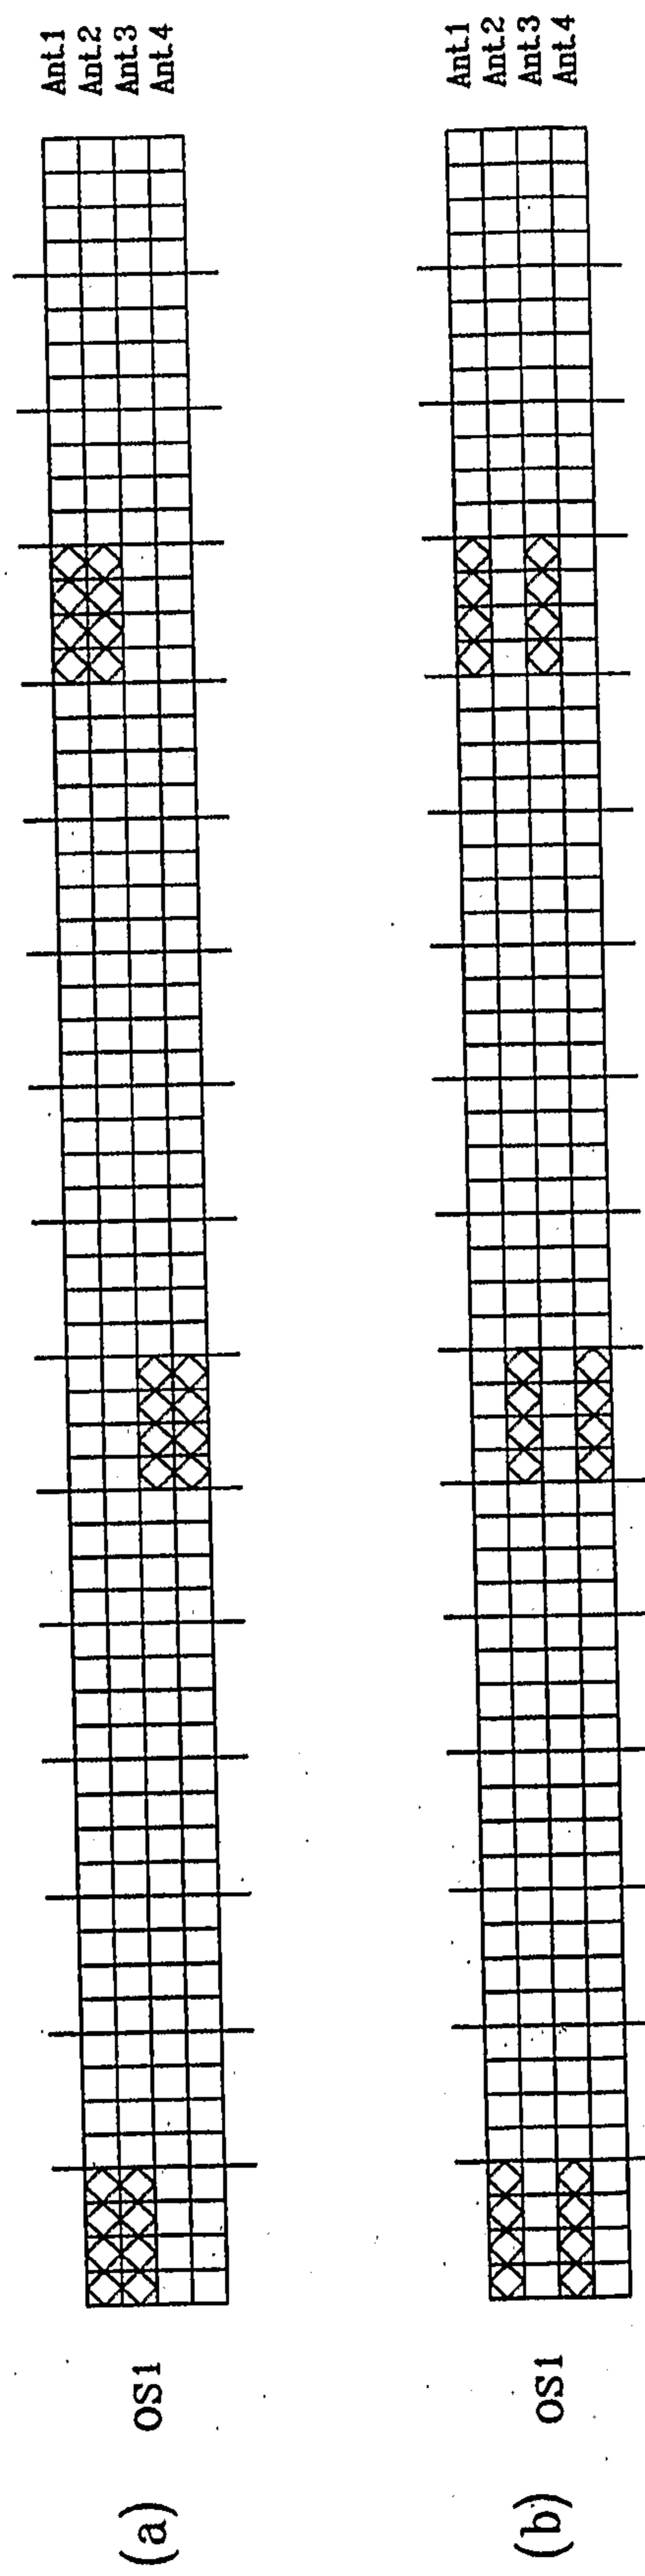


FIG. 7

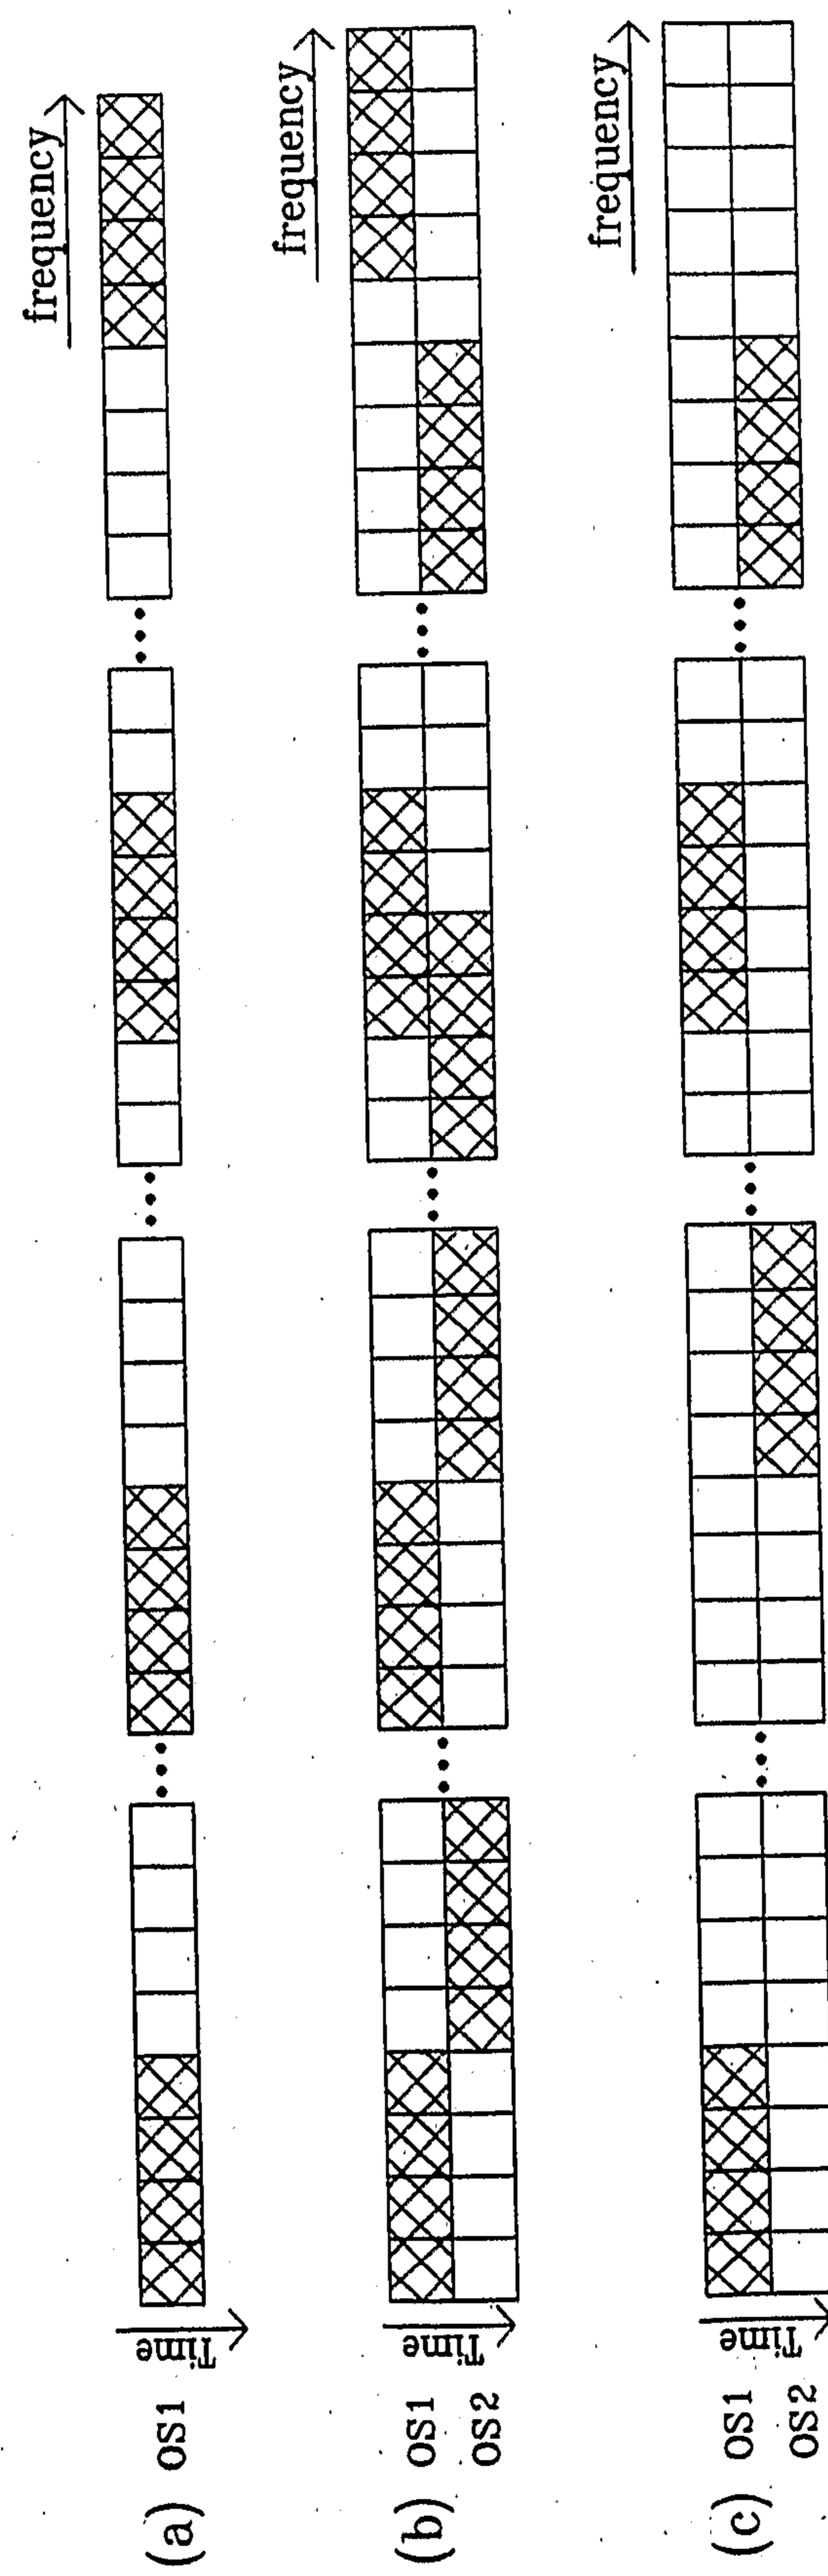


FIG. 8

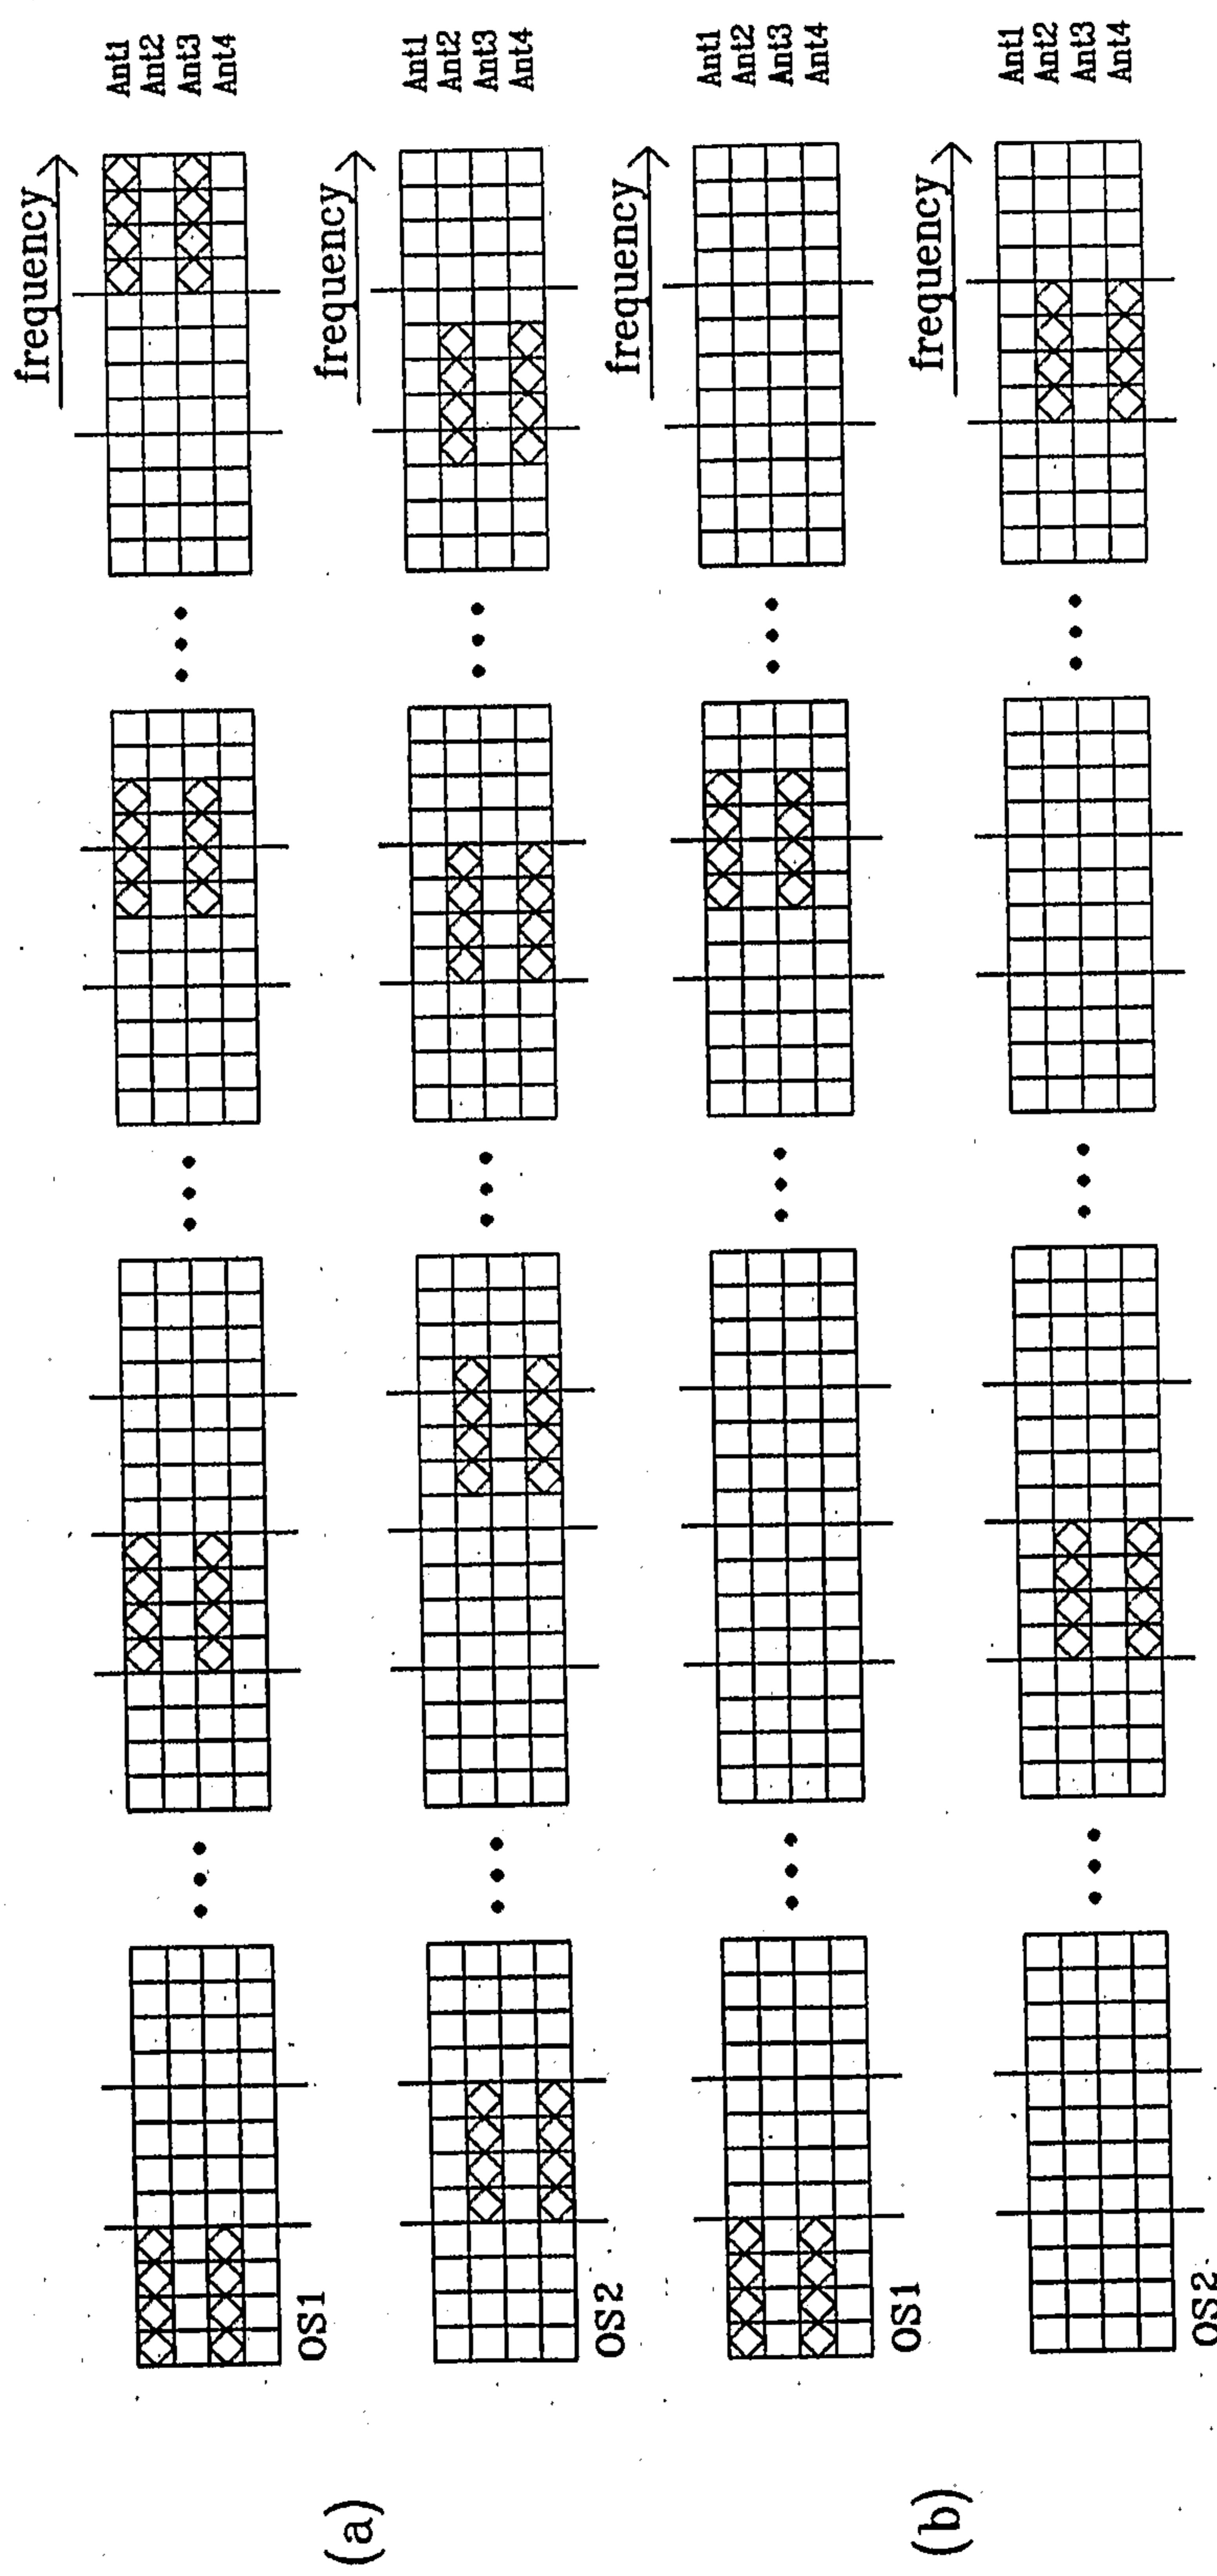


FIG. 9

frequency →

Ant. 1	$f_1(a_1 + b_1)$	$f_2(a_2 + b_2)$		$f_1(e_1 + f_1)$	$f_2(e_2 + f_2)$		
Ant. 2	$f_3(a_2 + b_2)$	$f_4(a_1 + b_1)$		$f_3(e_2 + f_2)$	$f_4(e_1 + f_1)$		
Ant. 3			$f_1(c_1 + d_1)$	$f_2(c_2 + d_2)$		$f_1(g_1 + h_1)$	$f_2(g_2 + h_2)$
Ant. 4			$f_3(c_2 + d_2)$	$f_4(c_1 + d_1)$		$f_3(g_2 + h_2)$	$f_4(g_1 + h_1)$

frequency →

Ant. 1	$f_1(a_1 + b_1)$	$f_2(a_2 + b_2)$		$f_1(c_1 + d_1)$	$f_2(c_2 + d_2)$		
Ant. 2	$f_3(a_2 + b_2)$	$f_4(a_1 + b_1)$		$f_3(c_2 + d_2)$	$f_4(c_1 + d_1)$		
Ant. 3			$f_1(a_1 + b_1)$	$f_2(a_2 + b_2)$		$f_1(c_1 + d_1)$	$f_2(c_2 + d_2)$
Ant. 4			$f_3(a_2 + b_2)$	$f_4(a_1 + b_1)$		$f_3(c_2 + d_2)$	$f_4(c_1 + d_1)$

FIG. 10

frequency →

Ant. 1	$f_1(a_1 + b_1)$	$f_2(a_2 + b_2)$		$f_1(e_1 + f_1)$	$f_2(e_2 + f_2)$	
Ant. 2		$f_1(c_1 + d_1)$	$f_2(c_2 + d_2)$		$f_1(g_1 + h_1)$	$f_2(g_2 + h_2)$
(a)						...
Ant. 3	$f_3(a_2 + b_2)$	$f_4(a_1 + b_1)$		$f_3(e_2 + f_2)$	$f_4(e_1 + f_1)$	
Ant. 4		$f_3(c_2 + d_2)$	$f_4(c_1 + d_1)$		$f_3(g_2 + h_2)$	$f_4(g_1 + h_1)$

frequency →

Ant. 1	$f_1(a_1 + b_1)$	$f_2(a_2 + b_2)$		$f_1(c_1 + d_1)$	$f_2(c_2 + d_2)$	
Ant. 2		$f_1(a_1 + b_1)$	$f_2(a_2 + b_2)$		$f_1(c_1 + d_1)$	$f_2(c_2 + d_2)$
(b)						...
Ant. 3	$f_3(a_2 + b_2)$	$f_4(a_1 + b_1)$		$f_3(c_2 + d_2)$	$f_4(c_1 + d_1)$	
Ant. 4		$f_3(a_2 + b_2)$	$f_4(a_1 + b_1)$		$f_3(c_2 + d_2)$	$f_4(c_1 + d_1)$

FIG. 11

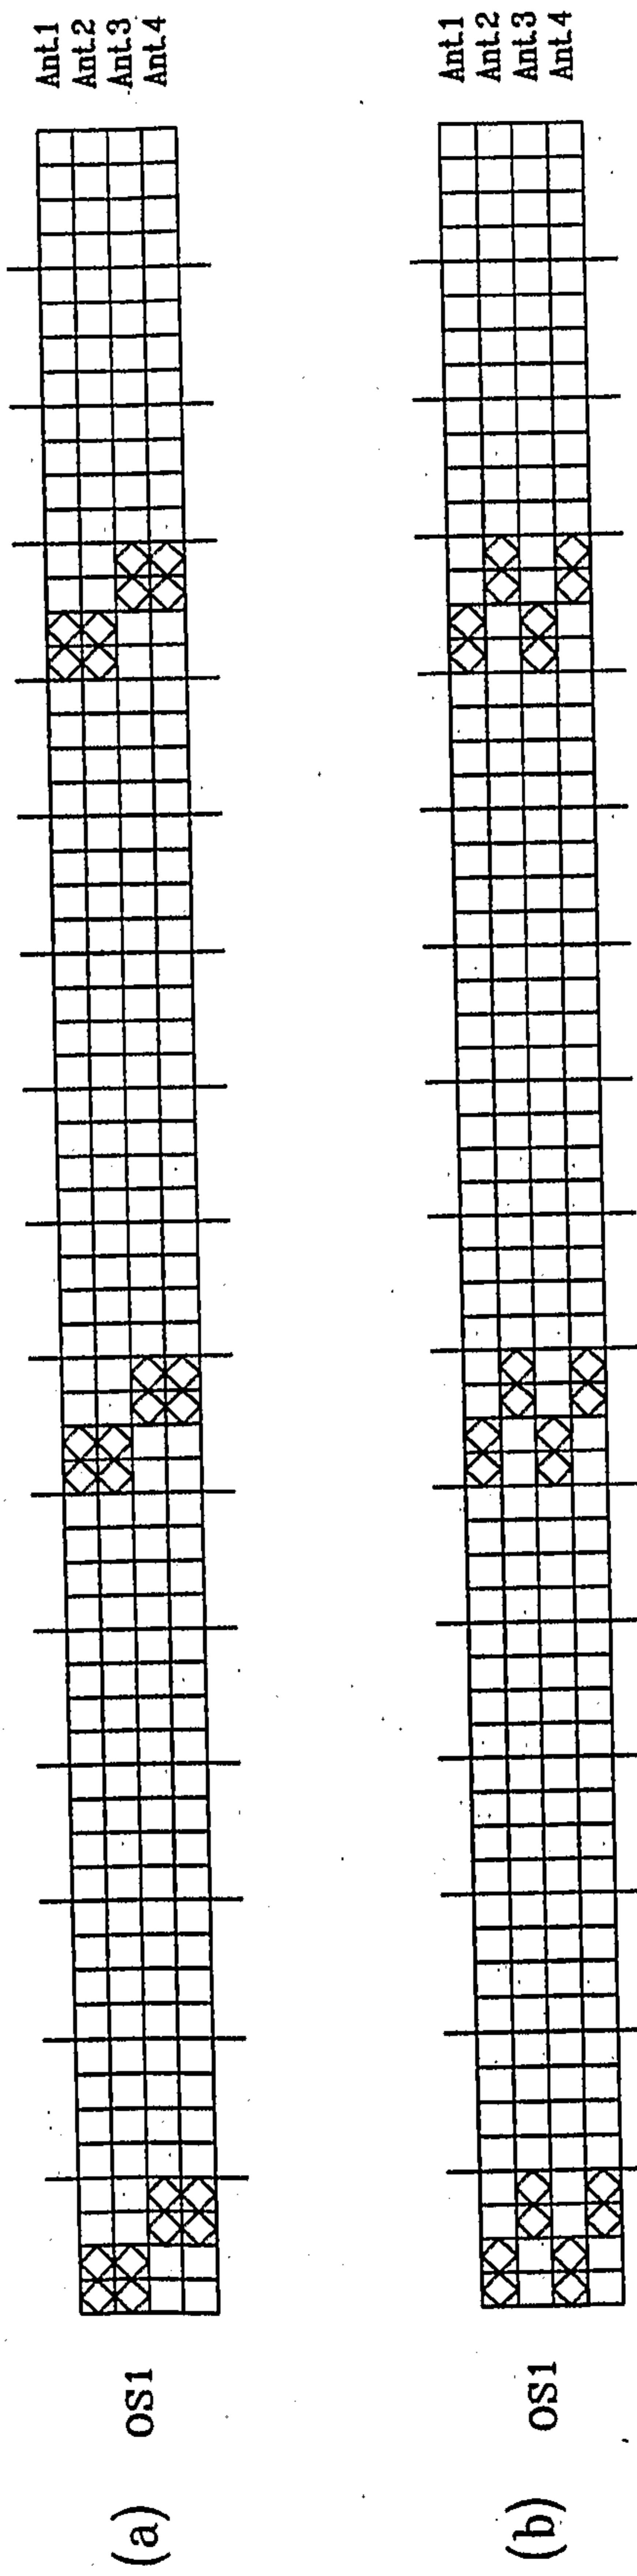


FIG. 12


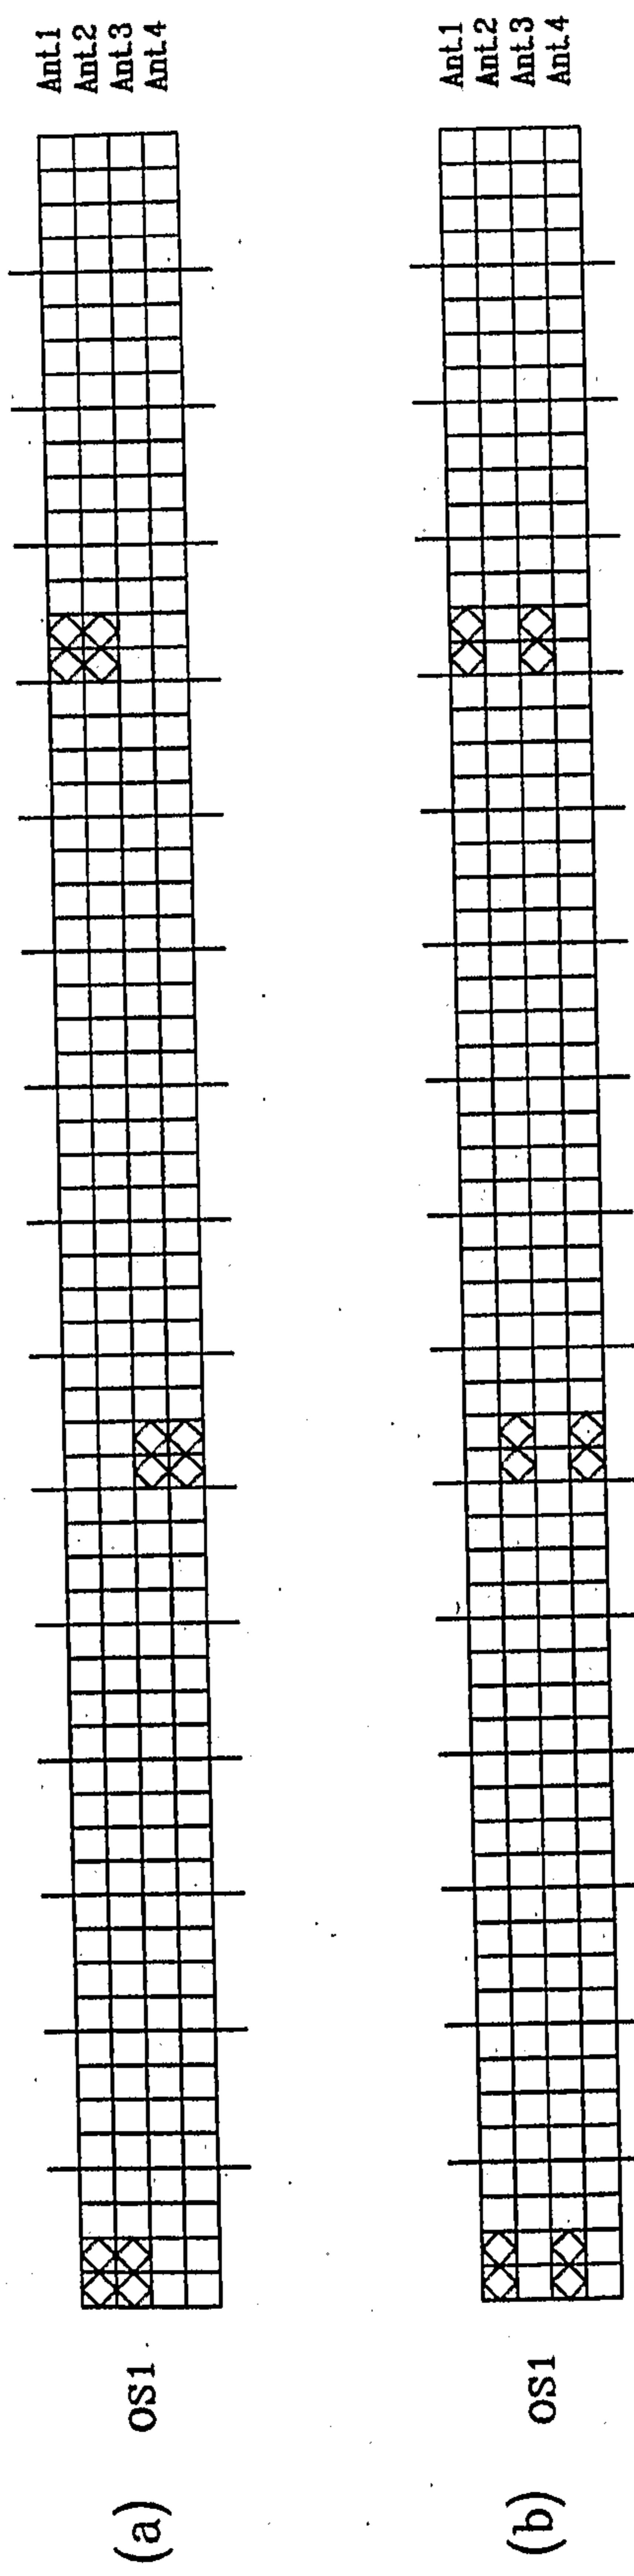


FIG. 13

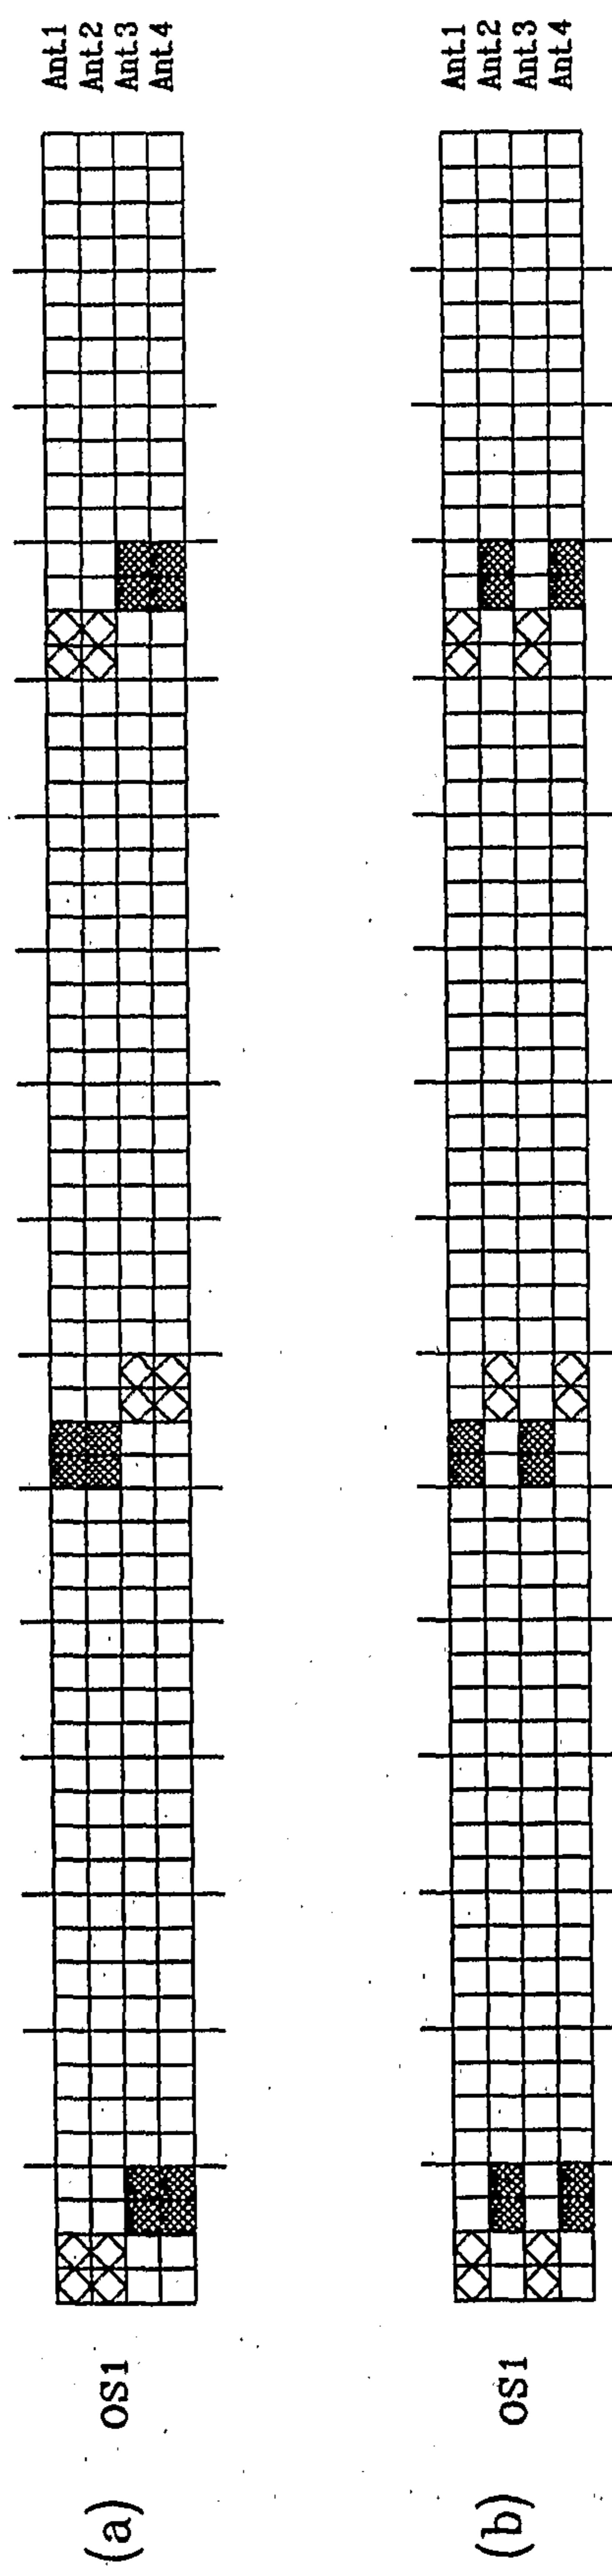

## frequen

— 1 —

Ant.1	$f_1(a)$	$f_2(b)$			$f_1(e)$	$f_2(f)$		
Ant.2	$f_3(b)$	$f_4(a)$			$f_3(f)$	$f_4(e)$		
Ant.3			$f_1(c)$	$f_2(d)$			$f_1(g)$	$f_2(h)$
Ant.4			$f_3(d)$	$f_4(c)$			$f_3(h)$	$f_4(g)$