



- (51) International Patent Classification:  
A61B 5/055 (2006.01)
- (21) International Application Number:  
PCT/US2013/037468
- (22) International Filing Date:  
19 April 2013 (19.04.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
61/635,813 19 April 2012 (19.04.2012) US
- (71) Applicant: NEW YORK UNIVERSITY [US/US]; 70 Washington Square South, New York, New York 10012-1091 (US).
- (72) Inventors: Wiggins, Graham Charles; 201 East 35th Street, Apt. 7J, New York, New York 10016 (US). Zhang, Bei; 160 East Hartsdale Avenue, Apt. 4E, Hartsdale, New York 10530 (US). Lattanzi, Riccardo; 526 E. 20th Street, Apt. 12H, New York, New York 10009 (US). Sodickson, Daniel; 9 Orchard Road, Larchmont, New York 10538 (US).

(74) Agents: Abelev, Gary (Reg. No. 40,479) et al.; Dorsey & Whitney LLP, 51 West 52nd Street, New York, New York 10019 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) Title: DIPOLE ARRAY ARRANGEMENT

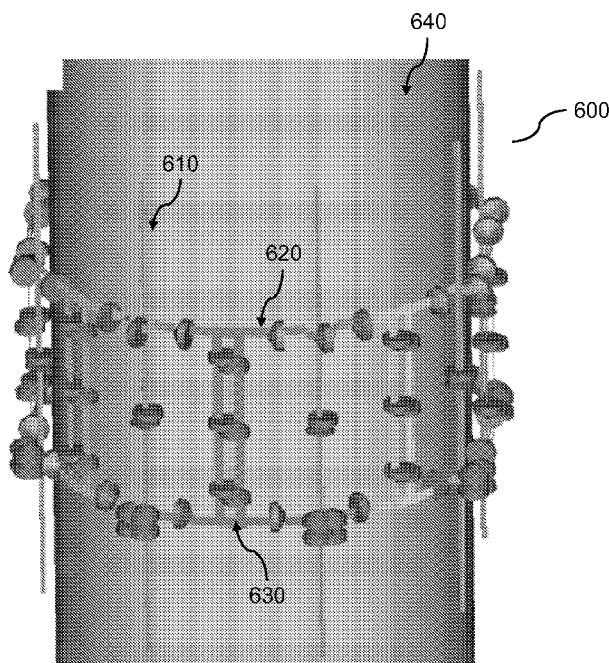


FIG. 6

(57) Abstract: An apparatus can be provided that can include a plurality of electric dipole antenna arrangements, and a processing arrangement configured to receive a signal(s) from the electric dipole antenna arrangements, and generate a magnetic resonance image based on the signal(s). Each of the electric dipole antenna arrangements can have at least two poles extending in opposite directions from each other. One of the poles can have a curved shape, which can bifurcate and follow two mirror symmetric S-shapes.





TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

**Published:**

— with international search report (Art. 21(3))

**DIPOLE ARRAY ARRANGEMENT****CROSS-REFERENCE TO RELATED APPLICATION(S)**

[0001] This application relates to and claims priority from U.S. Provisional Patent Application  
5 No. 61/635,813, filed on April 19, 2012, the entire disclosure of which is incorporated herein  
by reference in its entirety.

**FIELD OF THE DISCLOSURE**

[0002] The present disclosure generally relates to a medical imaging apparatus, and more  
10 specifically, to exemplary embodiments of an electric dipole antenna array.

**STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH**

[0003] Portions of the material described herein were funded, at least in part, by National  
Institute of Health under grant number: R01 EB002568. Therefore, the Federal Government  
15 may have certain rights to the invention.

**BACKGROUND INFORMATION**

[0004] Analysis of the Ultimate Intrinsic Signal-To-Noise Ratio (“UISNR”) through a current  
mode expansion employing dyadic Green’s functions (“DGF”) (See, e.g., 1 and 2) can make it  
20 possible to plot the current pattern on a given surface which can result in the UISNR for a given  
position in the phantom, which can be called the ideal current pattern (See, e.g., References 1  
and 3). For a cylindrical phantom with a concentric cylindrical surface, the ideal current pattern  
which maximizes central signal to-noise ratio (“SNR”) can look like a pair of distributed loops  
at low field (See, e.g., Figure 1, section 110). At high fields, however, the ideal current pattern

for central SNR can assume a pattern that can be a mixture of loops and electric dipole components (See, e.g., Reference 3).

[0005] A contribution of the latter to UISNR can increase with frequency (See, e.g., References 3 and 4) and, for certain geometries, the ideal current pattern can be dominated by electric dipole currents, in which the current can flow in straight lines along the length of the cylinder with no return path (See, e.g., Figure 2, section 120). Traditionally, a common antenna structure for magnetic resonance imaging (“MRI”) can be a surface coil loop. Although conventional stripline coils or transverse electro-magnetic (“TEM”) elements can appear to mimic an electric dipole antenna, both can rely on the presence of a closely coupled shield, which can provide a return path, and therefore can support loops of current rather than electric dipole currents.

[0006] Thus, there may be a need to address and/or overcome at least some of the above-described deficiencies.

## 15 SUMMARY OF EXEMPLARY EMBODIMENTS

[0007] To address at least some of these drawbacks and/or deficiencies, exemplary embodiments of the present disclosure can be provided which can implement an array of electric dipole antennas, for example, to mimic the ideal current pattern. The exemplary electric dipole antennas can be used to transmit or receive RF signals. For example, electric dipole antenna arrays can be used for hyperthermia therapy to steer heating into deep tissues. (See e.g., Reference 5). Due to the nature of exemplary ideal current patterns there can be exemplary embodiments where electric dipole antennas can provide superior performance than conventional magnetic loop antennas. According to further exemplary embodiments of the present disclosure, it is possible to provide a combination of electric dipole antennas and magnetic loop antennas can provide superior performance than either type of antenna on its

own. Exemplary embodiments of the present disclosure, therefore, can include, for example, an array of 8 electric dipole antennas on a cylinder, and, for example, an array combining 8 electric dipole antennas and 8 magnetic loop antennas.

[0008] According to certain exemplary embodiments of the present disclosure, arrangements, methods, and computer readable mediums can be provided which can include, utilize and/or  
5 implement an RF coil array arrangement, for example, which can include: a plurality of electric dipole antennas; and a processing arrangement configured to: receive signals from the electric dipole antennas and determine a Magnetic Resonance Image. In certain exemplary  
10 embodiments, at least one pole of at least one electric dipole antenna can be provided that can have two mirror symmetric S-shapes. According to certain exemplary embodiments, a plurality of electric dipole antennas can be combined with a plurality of magnetic loop antenna elements.

[0009] According to certain exemplary embodiments, a plurality of electric dipole antennas and magnetic loop antennas can be combined with a parallel transmit arrangement which  
15 transmits RF power through a plurality of electric dipole antennas or to a combination of electric dipole antennas and magnetic loop antenna elements. In certain exemplary embodiments of the present disclosure, a heat controller can be provided that can be connected to the electric dipole antennas, and which can be configured to deposit heat to a target area of a biological structure.

[0010] In some exemplary embodiments of the present disclosure, a receiving element(s) can  
20 be configured to receive the signal(s), which can be based on a further signal(s) transmitted by the electric dipole antenna arrangements, and send the signal(s) to the processing arrangement. The electric dipole antenna arrangements can be configured to transmit a further signal(s), receive the signal(s) which is based on the further signal(s), and send the signal(s) to the  
25 processing arrangement. In certain exemplary embodiments of the present disclosure, one of

the magnetic loop antenna arrangement(s) or the electric dipole antenna arrangements can be configured to transmit a further signal(s), and the other one of the magnetic loop antenna arrangement(s) or the electric dipole antenna arrangements can be configured to receive the signal(s) which can be based on the further signal(s), and transmit the signal(s) to the processing arrangement.

[0011] In a further exemplary embodiment of the present disclosure, arrangements, methods, and computer readable mediums can be provided which can include, utilize and/or implement the electric dipole antenna array arrangement that can comprise, for example, a plurality of electric dipole antenna elements, each including two poles extending in substantially opposite directions. For example, at least part of each pole can bifurcate and then follow curves such that a length of each pole can be longer than a distance between a start of each pole and a distal end of each pole. In certain exemplary embodiments of the present disclosure the part of each pole that can be bifurcated can form two mirror symmetric S-shape curves. In certain exemplary embodiments of the present disclosure, the part of each of the poles that curves can be located at or near the distal end of each such pole. According to additional exemplary embodiments of the present disclosure, a processing arrangement can be provided which can be connected to the plurality of electric dipole antenna elements, and which can be configured to receive signals from the electric dipole antenna elements and determine data associated with a Magnetic Resonance Image.

[0012] These and other objects of the present disclosure can be achieved by provision of an apparatus that can include a plurality of electric dipole antenna arrangements, and a processing arrangement configured to receive a signal(s) from the electric dipole antenna arrangements and generating a magnetic resonance image based on signal(s). Each of the electric dipole antenna arrangements can have at least two poles extending in opposite directions from each other. The poles can have a curved shape, which can bifurcate and follow two mirror

symmetric S-shapes. The mirror symmetric S-shapes can be located at or near a distal end of the pole(s). The electric dipole antenna arrangements can include at least 8 electric dipole antenna arrangements, which can be arranged in the shape of a cylinder.

[0013] In certain exemplary embodiments of the present disclosure, a radiation arrangement  
5 can be coupled to the electric dipole antenna arrangements, which can be configured to provide a radiation to a target area of a biological structure. The electric dipole antennas can be configured to receive the radiation from the radiation arrangement, and direct a resultant radiation to the target area. The radiation can include a radio frequency signal(s).

[0014] In some exemplary embodiments of the present disclosure, a magnetic loop antenna  
10 arrangement(s) can be configured to operate in conjunction and simultaneously with the electric dipole antenna arrangements. The magnetic loop antenna arrangement(s) can at least 8 magnetic loop antenna elements.

[0015] In a further embodiment of the present disclosure is an electric dipole antenna array  
15 arrangement, which can include a plurality of electric dipole antenna arrangements, each of the electric dipole antenna arrangements can include at least two poles extending in substantially opposite directions. A particular(s) end of the poles can be curved, and a length of each of the poles can be longer than a distance between a proximal end of a particular one of the poles and a distal end of the particular one of the poles. The particular end(s) can have a form of an S-shape, which can be bifurcated, and then follow a mirror symmetric S-shaped path.

[0016] In certain exemplary embodiments of the present disclosure, a processing arrangement  
20 can be coupled to the electric dipole antenna arrangements, and can be configured to receive a signal(s) from the electric dipole antenna arrangements, and generate a magnetic resonance image based on the signal(s). In some exemplary embodiments of the present disclosure, a plurality of magnetic dipole arrangements can be configured to operate in conjunction and  
25 simultaneously with the electric dipole antenna arrangements. The electric dipole antenna

arrangements can include at least 8 electric dipole antenna arrangements, and the magnetic dipole arrangements can include at least 8 magnetic dipole arrangements.

[0017] These and other objects, features and advantages of the present disclosure will become apparent upon reading the following detailed description of exemplary embodiments of the present disclosure, when taken in conjunction with the accompanying exemplary drawings and  
5 appended claims.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

[0018] Further objects, features and advantages of the present disclosure will become apparent  
10 from the following detailed description taken in conjunction with the accompanying Figures showing illustrative embodiments of the present disclosure, in which:

[0019] Figure 1 is an illustration of an ideal current pattern at low and high field; to;

[0020] Figure 2 is an illustration of an exemplary folded electric dipole antenna array according to an exemplary embodiment of the present disclosure;

15 [0021] Figure 3 is an illustration of an exemplary match circuit according to an exemplary embodiment of the present disclosure;

[0022] Figure 4 is an exemplary system, including an exemplary computer-accessible medium, according to an exemplary embodiment of the present disclosure;

20 [0023] Figure 5 is an illustration of an exemplary illustration of exemplary dipole coil according to an exemplary embodiment of the present disclosure;

[0024] Figure 6 is an illustration of an exemplary combined electric dipole antenna and magnetic loop antenna array according to an exemplary embodiment of the present disclosure;

25 [0025] Figure 7 is an exemplary image of an exemplary combined electric dipole antenna and magnetic loop antenna array implementation according to an exemplary embodiment of the present disclosure;



[0026] Figure 8 is a set of illustrations of exemplary signal-to-noise ratio maps according to an exemplary embodiment of the present disclosure; and

[0027] Figure 9 is an exemplary chart illustrating the Ultimate Intrinsic Signal-To-Noise Ratio and experimental Signal-To-Noise Ratio according to an exemplary embodiment of the present disclosure.

[0028] Throughout the drawings, the same reference numerals and characters, unless otherwise stated, are used to denote like features, elements, components, or portions of the illustrated embodiments. Moreover, while the present disclosure will now be described in detail with reference to the figures, it is done so in connection with the illustrative embodiments and is not limited by the particular embodiments illustrated in the figures or the accompanying claims.

#### DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

[0029] According to exemplary embodiments of the present disclosure, an electric dipole antenna and/or methods for making/using the same can be provided. In the exemplary electric dipole antennas, exemplary maximum efficiency can be achieved when the length of the antenna can be equal to about  $\frac{1}{2}$  the free space wavelength of the electromagnetic wave that can be transmitted or received. For example, in the case of 7 Tesla, this can correspond to a length of approximately 50 cm, which can be impractical for certain applications. In certain exemplary embodiments, the electric dipole antenna can be shortened with some loss of efficiency by adopting an exemplary folded dipole design, such as shown in Figure 2.

[0030] According to certain exemplary embodiments of the present disclosure, the exemplary electric dipole antenna array can include certain exemplary arrangements of the conductors, for example, to shorten the length of the electric dipole antenna. One exemplary way to accomplish this shortening can be with the exemplary S-shapes 210, as shown in Figure 2.

According to certain exemplary embodiments of the present disclosure, electromagnetic simulations can be exhibited, which can indicate that the current pattern on a cylinder, for example, which can correspond to the ultimate possible sensitivity, can have greater electric dipole-like properties than magnetic loop-like properties. For example, at low field, the ultimate sensitivity can come from loops of current, although at high field, the ultimate sensitivity can come from current patterns which can resemble an electric dipole. Thus, the exemplary electric dipole antennas which can be used to excite and receive signals for MR imaging can provide a surprising benefit over previously known antennas that avoid the use of electric dipole antennas for MRI applications. According to exemplary embodiments of the present disclosure, the ultimate sensitivity can come from current patterns which can contain a mixture of electric dipole and magnetic loop components. Thus, the exemplary combinations of electric dipole antennas and magnetic loop elements, which can be used to excite and receive signals for MR imaging, can provide receive sensitivity or parallel transmit performance substantially greater than can be obtained with either type of element used alone.

[0031] As shown in Figure 5, various exemplary coils can be simulated and constructed on, e.g., identical 31.5 cm diameter cylindrical surfaces (e.g. an 8-element magnetic loop antenna array 510, an 8-element electric dipole antenna array 520 and an array that can include 8 electric dipole antennas and 8 magnetic loop antenna elements 530). For example, an exemplary array 540, which can include 16 magnetic loop antenna elements, can also be simulated. The exemplary coils can surround a 29.5 cm diameter cylindrical phantom (e.g., element 640 of Figure 6) with  $\epsilon_r = 81.8$  and  $\sigma = 0.604$  s/meter. Simulations can be conducted using an exemplary finite difference time domain method (e.g., Microwave Studio, CST, Framingham MA). An array of, e.g., 8 overlapped magnetic loop antenna elements 510 about 14.6 cm x 15 cm in size can be simulated and constructed. A single row of 8 electric dipole antennas 520 can be simulated and also constructed, with each element self-resonant with a

conductor length of 35.6 cm (See e.g., Figure 1b). A 16 element array 530 can be simulated and constructed which can include a single row of 8 overlapped magnetic loop antennas with approximately 35.6 cm long electric dipole antenna centered over each magnetic loop antenna. Additionally, a single row of, e.g., 16 overlapped 7.3 x 15 cm magnetic loop antenna elements  
5 540 can be simulated. All coil elements can be tuned and matched in the simulation, and driven with 50 Ohm ports. As shown in Figure 7, a constructed magnetic loop antenna 710 can be fashioned from tinned bus wire incorporating 11 distributed capacitors and matched to coax with  $\lambda/4$  lattice baluns 720.

[0032] The exemplary electric dipole antennas 730 can be made from, e.g., FR4 circuit board  
10 with 7 mm wide traces having lengths adjusted between 32 cm and 36 cm to fine-tune them according to their proximity to the phantom. All or most elements can be matched to coaxes with  $\lambda/4$  lattice baluns. The exemplary coil can be connected to the scanner using in-house constructed T/R coil interface boxes. For the exemplary electric dipole and the exemplary combined electric dipole and magnetic loop experiments, the electric dipole antennas can be  
15 used to transmit. For the exemplary electric dipole or the exemplary magnetic loop experiments the unused coil elements can be defeated by removal of capacitors, or by cutting through the electric dipole antenna conductors. In each experiment equal power can be supplied to each channel, and phase can be adjusted to provide circularly polarized excitation at the center of the phantom.

20 [0033] The exemplary data can be acquired on, e.g., a 7 Tesla whole body scanner (e.g., Siemens Medical Solutions, Erlangen, Germany) with an 8 channel parallel transmit system. SNR maps for the optimal combination (See e.g., Reference 6), and can be generated from GRE acquisitions with and without RF excitation (e.g., TR/TE/Flip/BW = 1000/3.39/20/300, FoV=400mm, Matrix=128, Slice = 5mm) after calibrating the excitation flip angle at the center  
25 of the phantom. B1+ maps with matched FoV and matrix can be generated using the AFI

technique (See e.g., Reference 7), acquiring maps with transmit phases corresponding to the “uniform” birdcage mode, and then with the first gradient mode, as well as corresponding low flip angle GRE magnitude images. Exemplary normalized SNR maps can be obtained by dividing the SNR maps by the sine of the measured flip angle at each pixel.

5

### *Exemplary Results*

[0034] Exemplary derivation of the UISNR for the center of the phantom can illustrate that curl-free (e.g., electric dipole-like) currents can provide 21% higher SNR than magnetic loop-like currents, and that facilitating both types of currents can provide 54% higher SNR than magnetic loop-like currents alone. Exemplary CST simulations achieved  $S_{11}$  match of better than -18 dB on all ports and maximum  $S_{12}$  coupling of -13.7 dB. Simulation of the exemplary map of 8 electric dipole antennas 820 alone can provide a 3.1% boost compared to the exemplary map of 8 magnetic loop antennas 810. However, the exemplary map of the combination of the two antennas 830 can provide an SNR boost of 24% (See e.g., Figure 8). This additional SNR may not only be attributed to the increased number of elements in the combined array, since the simulation with, e.g., the exemplary map of 16 magnetic loop antennas 840 may only provide approximately 1.2% SNR increase compared to 8 magnetic loop antennas.

[0035] For the exemplary coil, the overall pattern of SNR can be very close to the simulated results. Experimental results with the exemplary map of 8 electric dipole antennas alone 860 can provide an 8.3% boost as compared to the exemplary map of 8 magnetic loop antennas 850, which can be higher than the 3.1% found in simulation. Using the exemplary maps of combined magnetic loop antennas and electric dipole antennas 860 can provide a 22% boost, very close to the 24% boost found in simulation. Using the exemplary dimensions of the coil surface and phantom, as well as the phantom electrical properties, the ultimate intrinsic SNR

25

for the center of the phantom can be calculated, scaled to account for the acquisition parameters used in the exemplary experiments. (See e.g., Reference 8). For exemplary 8 magnetic loop antennas can capture 85.6% of the magnetic loop-only UISNR (e.g., element 910 of Figure 9), and 8 electric dipole antennas can capture about 76.0% of the electric dipole-only UISNR (e.g.,  
5 element 920 of Figure 9). The coil combining magnetic loop antennas and electric dipole antennas can achieve a central SNR higher than the UISNR for magnetic loop currents only (element 930 of Figure 9). This can demonstrate that combining electric dipole antennas and magnetic loop antennas can provide receive sensitivity that can be higher than that which can be obtained with any previously known or conceivable array of magnetic loop antennas.  
10 Greater diversity of the high field ideal current patterns can be captured, which can provide a significant performance gain.

[0036] Certain electromagnetic simulations have shown that in some circumstances, particularly at high field or for large objects, for example, the highest possible sensitivity for an MR antenna can be obtained if the antenna can support current patterns that can be electric  
15 dipole-like, and not composed of loops of current. Thus, use of exemplary electric dipole antennas can provide a superior sensitivity, as compared to magnetic loop antennas or shielded stripline elements, particularly at high field and for large objects. Further, the exemplary use of the exemplary electric dipole antennas, combined with conventional magnetic loop antennas, can provide a better sensitivity compared to what can be possible even with an array of a large  
20 number of magnetic loop antenna elements at high field and for large objects. According to certain exemplary embodiments of the present disclosure, it can be possible to utilize mirror image meanders, for example, to shorten the electric dipole antenna which can make it possible to create a shorter antenna that can still be resonant at the desired frequency, for example, without the incorporation of lossy lumped elements.

[0037] Exemplary electric dipole antennas for both heating of the body and magnetic resonance (“MR”) imaging can facilitate certain functions to be performed by, for example, a single coil structure. Phase and magnitude of the RF signal to different elements can be controlled to steer the heating to the desired region, while applying high RF power, for example to heat tumors. The exemplary location of the tumor can be determined by, for example, using the same antenna for MR imaging. Additionally, the exemplary MR image can be used to measure the temperature in the tumor through the use of MR thermometry, using the same structure for all purposes. This can also be applied at lower fields where the MR sensitivity of the electric dipole antennas can be lower than a conventional coil, yet still sufficient for imaging, while providing simultaneous application as a heat delivery device.

[0038] According to further exemplary embodiments of the present disclosure, certain exemplary electric dipole antennas can differ from existing “stripline” coil designs in that they may not incorporate a close proximity ground plane, which can limit the efficiency of shielded stripline elements, and can cause them to differ in behavior from the current patterns which can maximize efficiency.

#### *Exemplary Combined Electric Dipole Antenna and Magnetic Loop Antenna Array*

[0039] Figure 6 illustrates an exemplary 7 Tesla Combined Electric Dipole Antenna and Magnetic Loop Antenna Array 600. Each electric dipole antenna 610 can have a magnetic loop antenna 620 placed symmetrically on top of it, for example, to minimize inductive coupling between the magnetic loop antenna and electric dipole antenna. Neighboring magnetic loop antennas can be overlapped (e.g., as shown at 630) to minimize inductive coupling. The configuration can include any number of settings, dimensions, parameters, and/or attributes, and Figure 6 can illustrate a phantom 640 with a diameter = 29.5 cm ( $\epsilon_r = 60$ ,  $s = 0.61$  S/m), an array diameter = 31.5cm, an electric dipole antenna length = 36cm, and a magnetic loop

antenna size = 14.6cm x 15cm. Figure 7 shows an exemplary image illustrating an exemplary combined electric dipole antenna and magnetic loop antenna array implementation according to certain exemplary embodiments of the present disclosure.

[0040] Figure 8 illustrates exemplary SNR maps obtained by electromagnetic simulation and the exemplary experimentation of certain exemplary embodiments. For example, map 810 illustrates a simulated SNR map for 8 magnetic loop antennas alone (e.g., with a central SNR of 0.4344), the exemplary map 820 illustrates a simulated SNR map for 8 electric dipole antennas alone (e.g., with a central SNR of .44780.2838), the exemplary map 830 illustrates a simulated SNR map for 8 electric dipole antennas and 8 magnetic loop antennas combined (e.g., with a central SNR of 0.539), and the exemplary map 840 illustrates a simulated SNR map for 16 magnetic loop antennas alone (e.g., with a central SNR of 0.4395). Additionally, the exemplary map 850 illustrates an experimental SNR map for 8 magnetic loop antennas alone (e.g., with a central SNR of 3951), the exemplary map 860 illustrates an experimental SNR map for 8 electric dipole antennas alone (e.g., with a central SNR of 4281), and the exemplary map 870 illustrates an experimental SNR map for 8 electric dipole antennas and 8 magnetic loop antennas (e.g., with a central SNR of 4806). As the exemplary simulated and experimental SNR maps can indicate, the SNR of 8 electric dipole antennas combined with 8 magnetic loop antennas can be higher than 8 electric dipole antennas alone and/or 8 magnetic loop antennas alone.

20

#### *Exemplary Dipole Antenna System*

[0041] Figure 4 shows a block diagram of an exemplary embodiment of a system according to the present disclosure. For example, exemplary procedures in accordance with the present disclosure described herein can be performed by a processing arrangement and/or a computing arrangement 410 and an electric dipole antenna array arrangement 480. Such

25

processing/computing arrangement 410 can be, for example, entirely or a part of, or include, but not limited to, a computer/processor 420 that can include, for example, one or more microprocessors, and use instructions stored on a computer-accessible medium (e.g., RAM, ROM, hard drive, or other storage device).

5 [0042] As shown in Figure 4, for example, a computer-accessible medium 430 (e.g., as described herein above, a storage device such as a hard disk, floppy disk, memory stick, CD-ROM, RAM, ROM, etc., or a collection thereof) can be provided (e.g., in communication with the processing arrangement 410). The computer-accessible medium 430 can contain executable instructions 440 thereon. In addition or alternatively, a storage arrangement 450  
10 can be provided separately from the computer-accessible medium 430, which can provide the instructions to the processing arrangement 410 so as to configure the processing arrangement to execute certain exemplary procedures, processes and methods, as described herein above, for example.

[0043] Further, the exemplary processing arrangement 410 can be provided with or include an  
15 input/output arrangement 470, which can include, for example, a wired network, a wireless network, the internet, an intranet, a data collection probe, a sensor, etc. As shown in Figure 4, the exemplary processing arrangement 410 can be in communication with an exemplary display arrangement 460, which, according to certain exemplary embodiments of the present disclosure, can be a touch-screen configured for inputting information to the processing  
20 arrangement in addition to outputting information from the processing arrangement, for example. Further, the exemplary display 460 and/or a storage arrangement 450 can be used to display and/or store data in a user-accessible format and/or user-readable format.

[0044] The foregoing merely illustrates the principles of the disclosure. Various  
modifications and alterations to the described embodiments will be apparent to those skilled in  
25 the art in view of the teachings herein, and especially in the appended numbered paragraphs. It



will thus be appreciated that those skilled in the art will be able to devise numerous systems, arrangements, and methods which, although not explicitly shown or described herein, embody the principles of the disclosure and are thus within the spirit and scope of the disclosure. In addition, all publications and references referred to above are incorporated herein by reference

5 in their entirety. It should be understood that the exemplary procedures described herein can be stored on any computer accessible medium, including a hard drive, RAM, ROM, removable disks, CD-ROM, memory sticks, etc., and executed by a processing arrangement which can be a microprocessor, mini, macro, mainframe, etc. In addition, to the extent that the prior art

10 knowledge has not been explicitly incorporated by reference herein above, it is explicitly being incorporated herein in its entirety. All publications referenced above are incorporated herein by reference in their entirety.

**EXEMPLARY REFERENCES:**

The following references are hereby incorporated by reference in their entirety.

- [1] Lattanzi R. (2008) ISMRM p.78
- [2] Lattanzi R. (2010) NMR Biomed 23(2):142-51
- 5 [3] Lattanzi R. (2011), ISMRM p.
- [4] Schnell W. (2000), IEEE Trans Ant Prop 48:418-28.
- [5] Issels R. Lancet Oncology 2010;11:561-70
- [6] Kellman P. MRM 54:1439–1447 (2005)
- [7] Yarnykh; Magn Reson Med, 2007. 57(1):192-200
- 10 [8] Lattanzi R. NMR Biomed 23(2):142-51(2010)

WHAT IS CLAIMED IS:

1. An apparatus comprising:  
a plurality of electric dipole antenna arrangements; and  
5 a processing arrangement configured to receive at least one signal from the electric dipole antenna arrangements, and generating a magnetic resonance image based on the at least one signal.
2. The apparatus of claim 1, wherein each of the electric dipole antenna arrangements has  
10 at least two poles extending in opposite directions from each other.
3. The apparatus of claim 2, wherein at least one of the poles has a curved shape.
4. The apparatus of claim 3, wherein the curved shape bifurcates and follows two mirror  
15 symmetric S-shapes.
5. The apparatus of claim 4, wherein the mirror symmetric S-shapes are located at or near a distal end of the at least one pole.
- 20 6. The apparatus of claim 1, wherein the electric dipole antenna arrangements comprise at least 8 electric dipole antenna arrangements.
7. The apparatus of claim 6, wherein the electric dipole antenna arrangements are arranged in the shape of a cylinder.  
25
8. The apparatus of claim 1, further comprising a radiation arrangement coupled to the electric dipole antenna arrangements, the radiation arrangement being configured to provide a radiation to a target area of a biological structure.

9. The apparatus of claim 8, wherein the electric dipole antennas are configured to receive the radiation from the radiation arrangement, and direct a resultant radiation to the target area.
- 5 10. The apparatus of claim 8, wherein the radiation comprises at least one radio frequency signal.
11. The apparatus of claim 1, further comprising at least one magnetic loop antenna arrangement configured to operate in conjunction and simultaneously with the electric dipole  
10 antenna arrangements.
12. The apparatus of claim 11, wherein the at least one magnetic loop antenna arrangement comprises at least 8 magnetic loop antenna arrangements.
- 15 13. The apparatus of claim 1, further comprising at least one receiving element configured to receive the at least one signal based on at least one further signal transmitted by the electric dipole antenna arrangements, and transmit the at least one signal to the processing arrangement.
- 20 14. The apparatus of claim 1, wherein the electric dipole antenna arrangements are configured to transmit at least one further signal, receive the at least one signal which is based on the at least one further signal, and transmit the at least one signal to the processing arrangement.
- 25 15. The apparatus of claim 11, wherein at least one of the at least one magnetic loop antenna arrangement or the electric dipole antenna arrangements is configured to transmit at least one further signal, and wherein at least one of the at least one magnetic loop antenna arrangement or the electric dipole antenna arrangements is configured to receive the at least

one signal which is based on the at least one further signal, and transmit the at least one signal to the processing arrangement.

16. An electric dipole antenna array arrangement, comprising:

5 a plurality of electric dipole antenna arrangements, each of the electric dipole antenna arrangements including at least two poles extending in substantially opposite directions ;

wherein at least one particular end of the poles is curved ; and

10 wherein a length of each of the poles is longer than a distance between a proximal end of a particular one of the poles and a distal end of the particular one of the poles.

17. The arrangement of claim 16, wherein the at least one particular end has a form of an S-shape.

15 18. The arrangement of claim 17, wherein the at least one particular end is bifurcated, and then follows a mirror symmetric S-shaped path.

19. The arrangement of claim 16, further comprising a processing arrangement coupled to the electric dipole antenna arrangements, wherein the processing arrangement is configured to  
20 receive at least one signal from the electric dipole antenna arrangements, and generate a magnetic resonance image based on the at least one signal.

20. The arrangement of claim 16, further comprising a plurality of magnetic dipole  
25 antenna arrangements configured to operate in conjunction and simultaneously with the electric dipole antenna arrangements.

21. The arrangement of claim 20, wherein the electric dipole antenna arrangements comprises at least 8 electric dipole antenna arrangements, and the magnetic dipole arrangements comprises at least 8 magnetic dipole arrangements.

5

22. An antenna arrangement, comprising:  
a plurality of electric dipole antenna array arrangements; and  
a plurality of magnetic dipole array arrangements cooperating with the electric dipole antenna array arrangements.

10

15

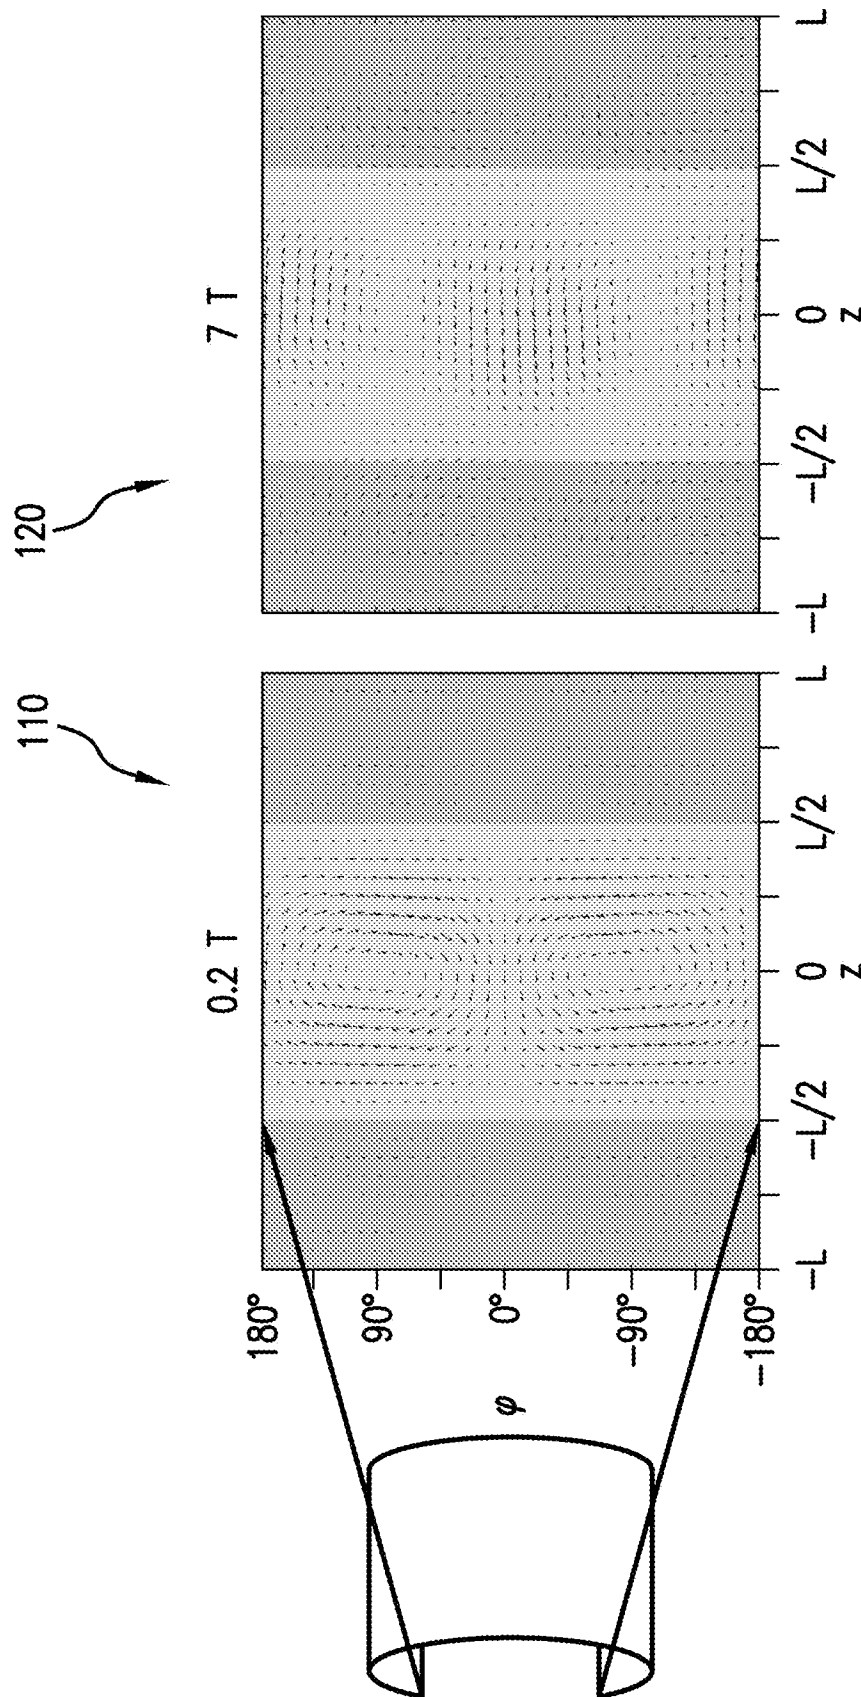


FIG.1

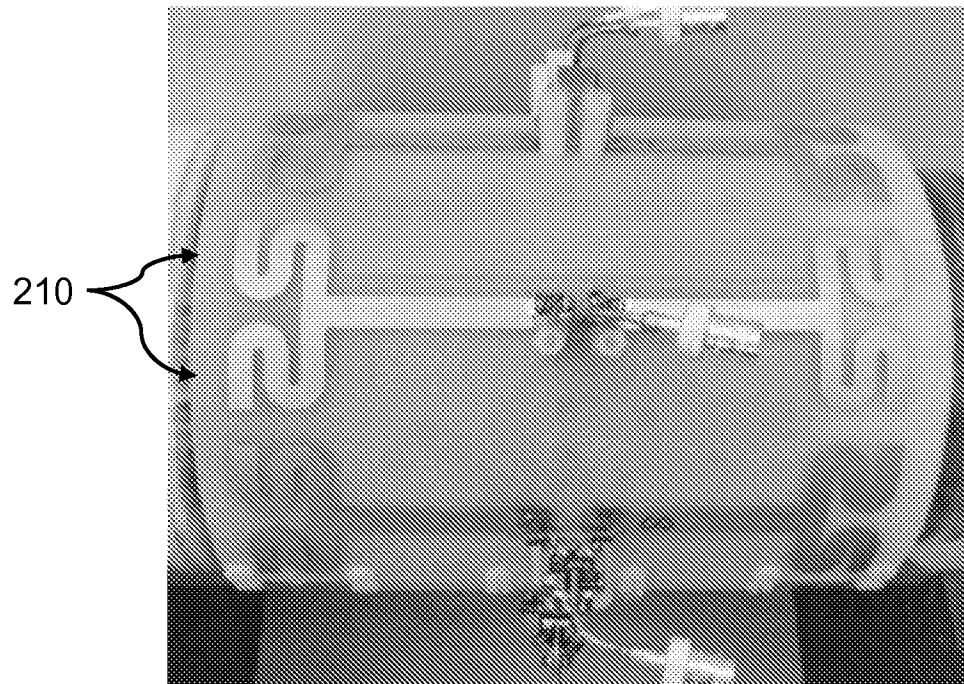


FIG. 2



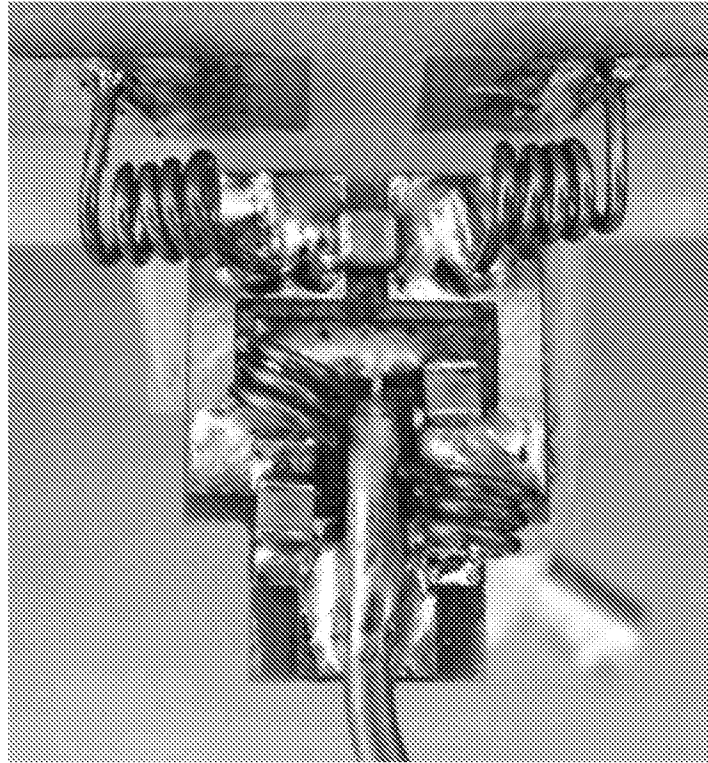


FIG.3

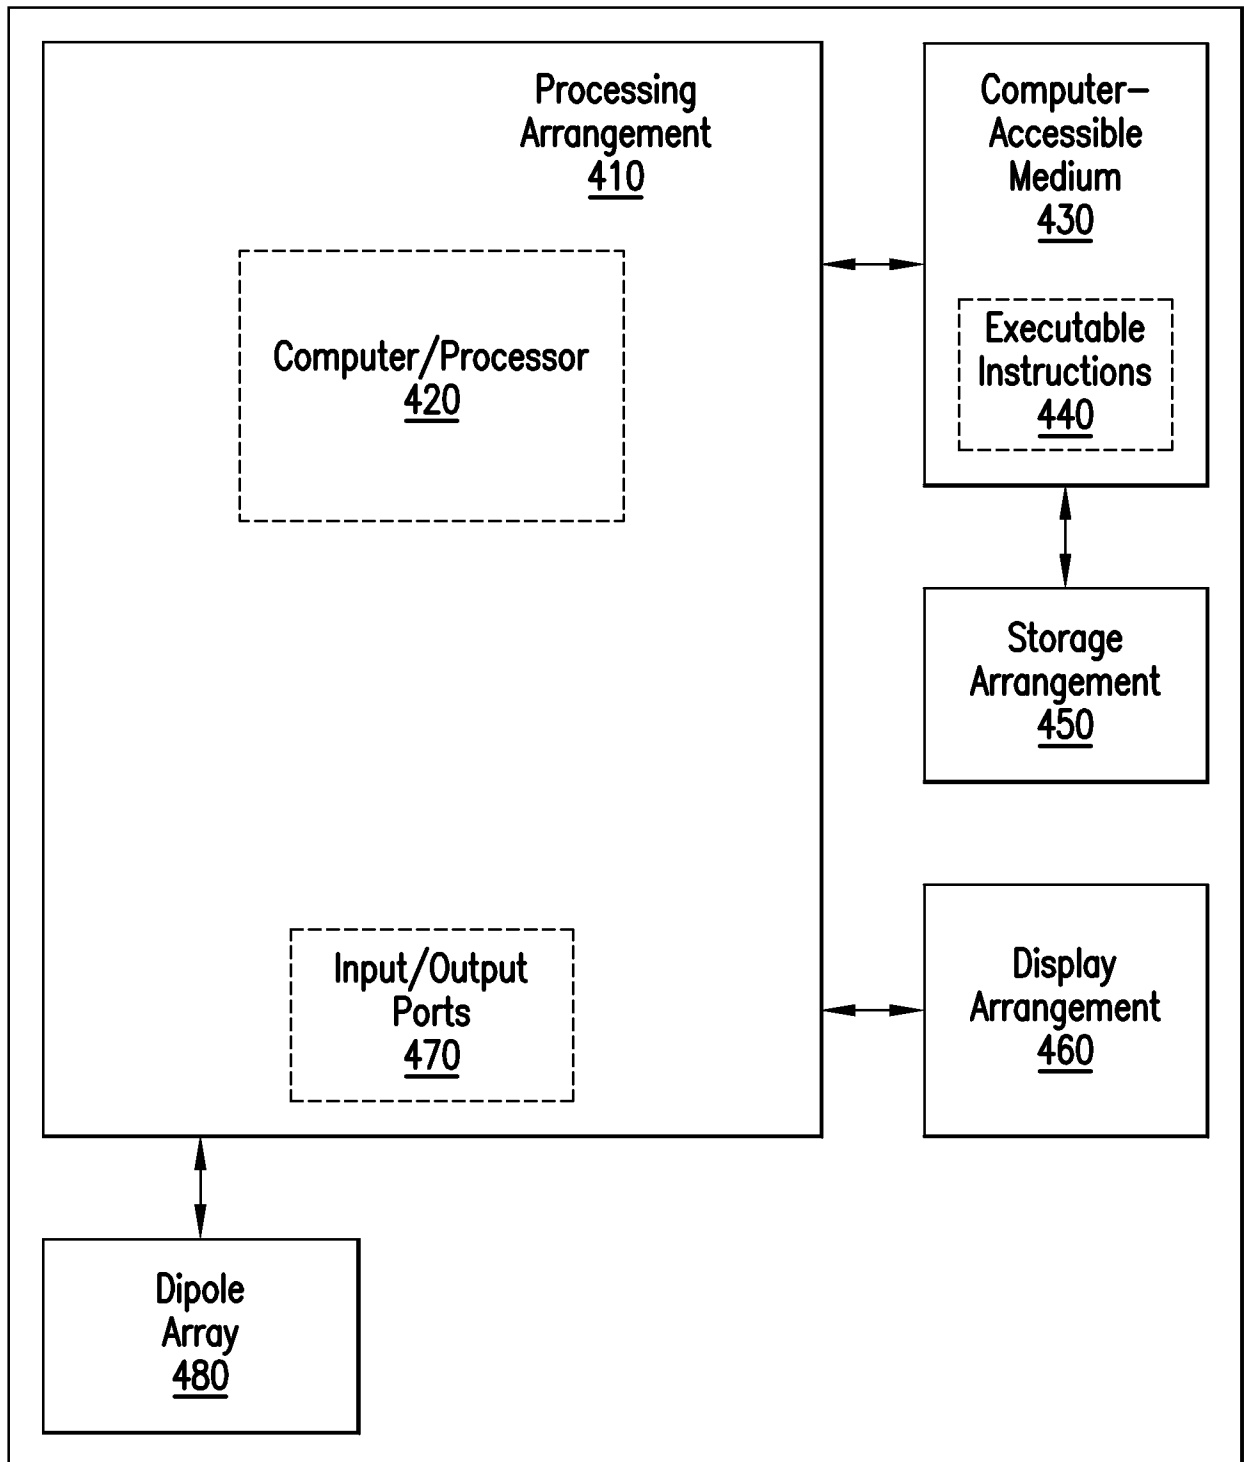


FIG.4

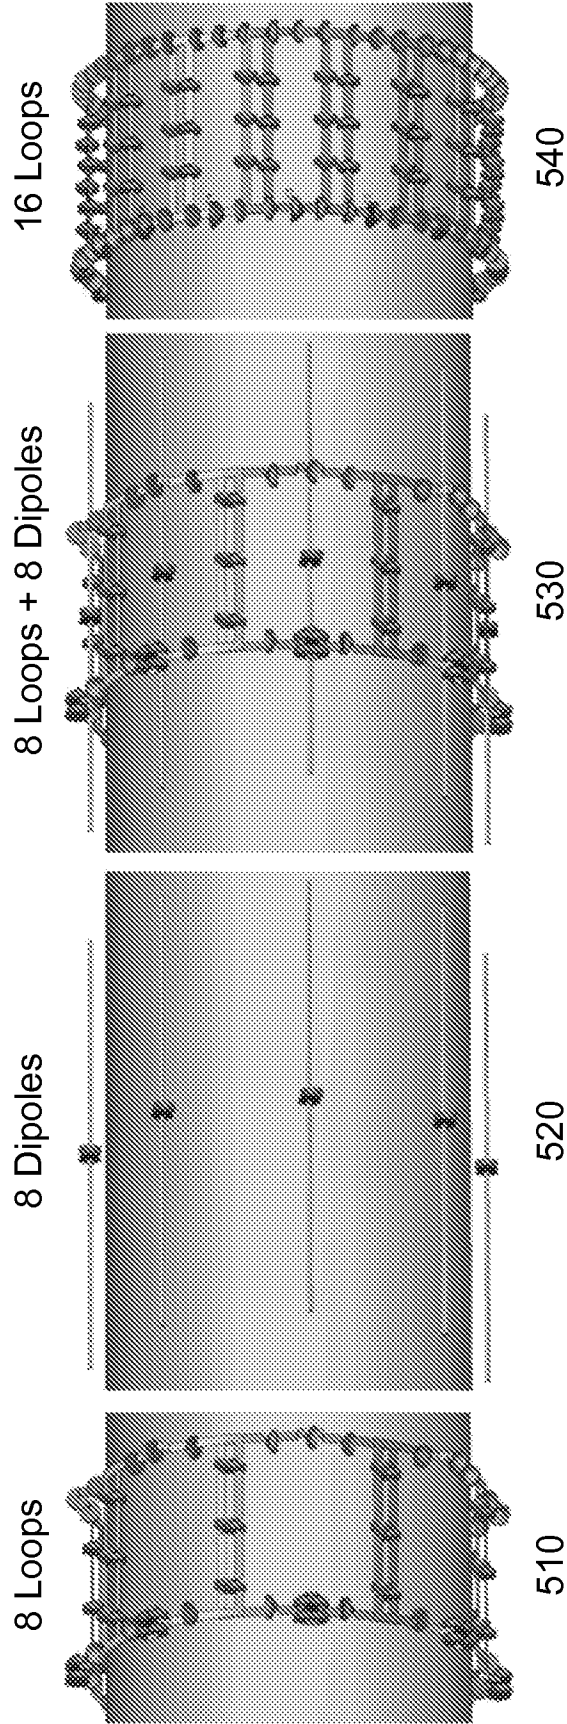


FIG.5

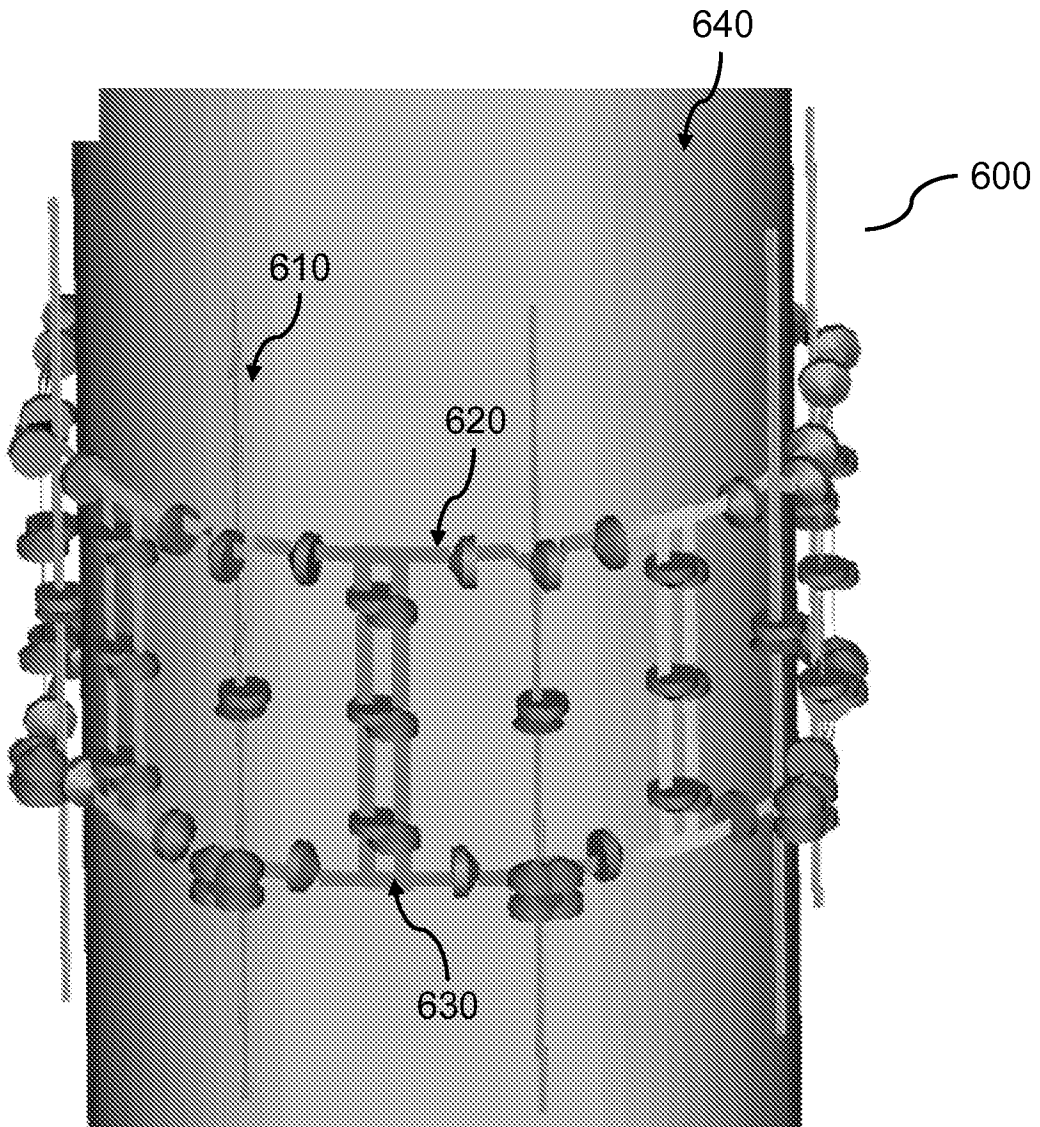


FIG. 6

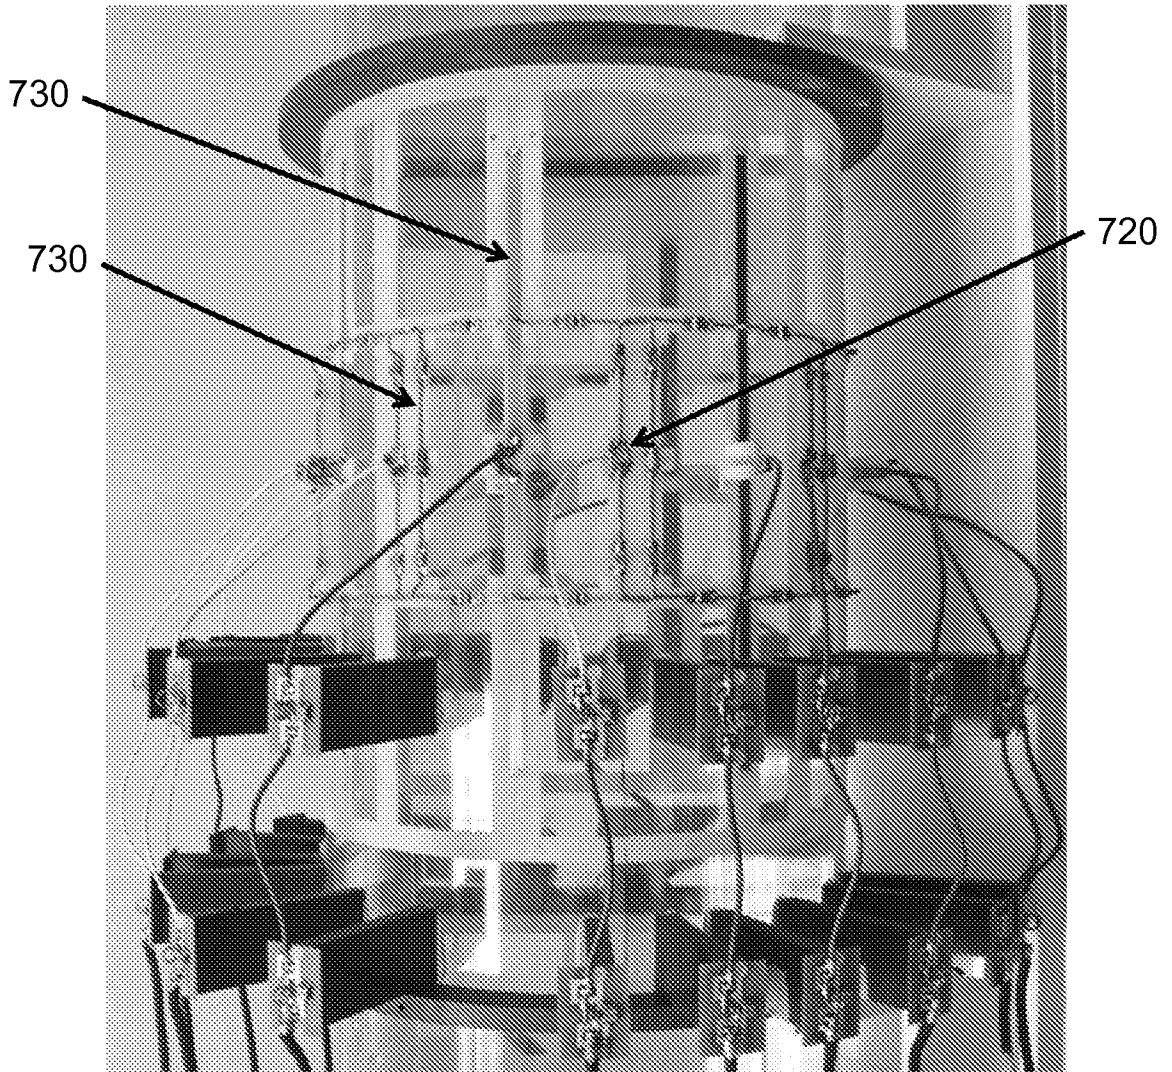


FIG. 7

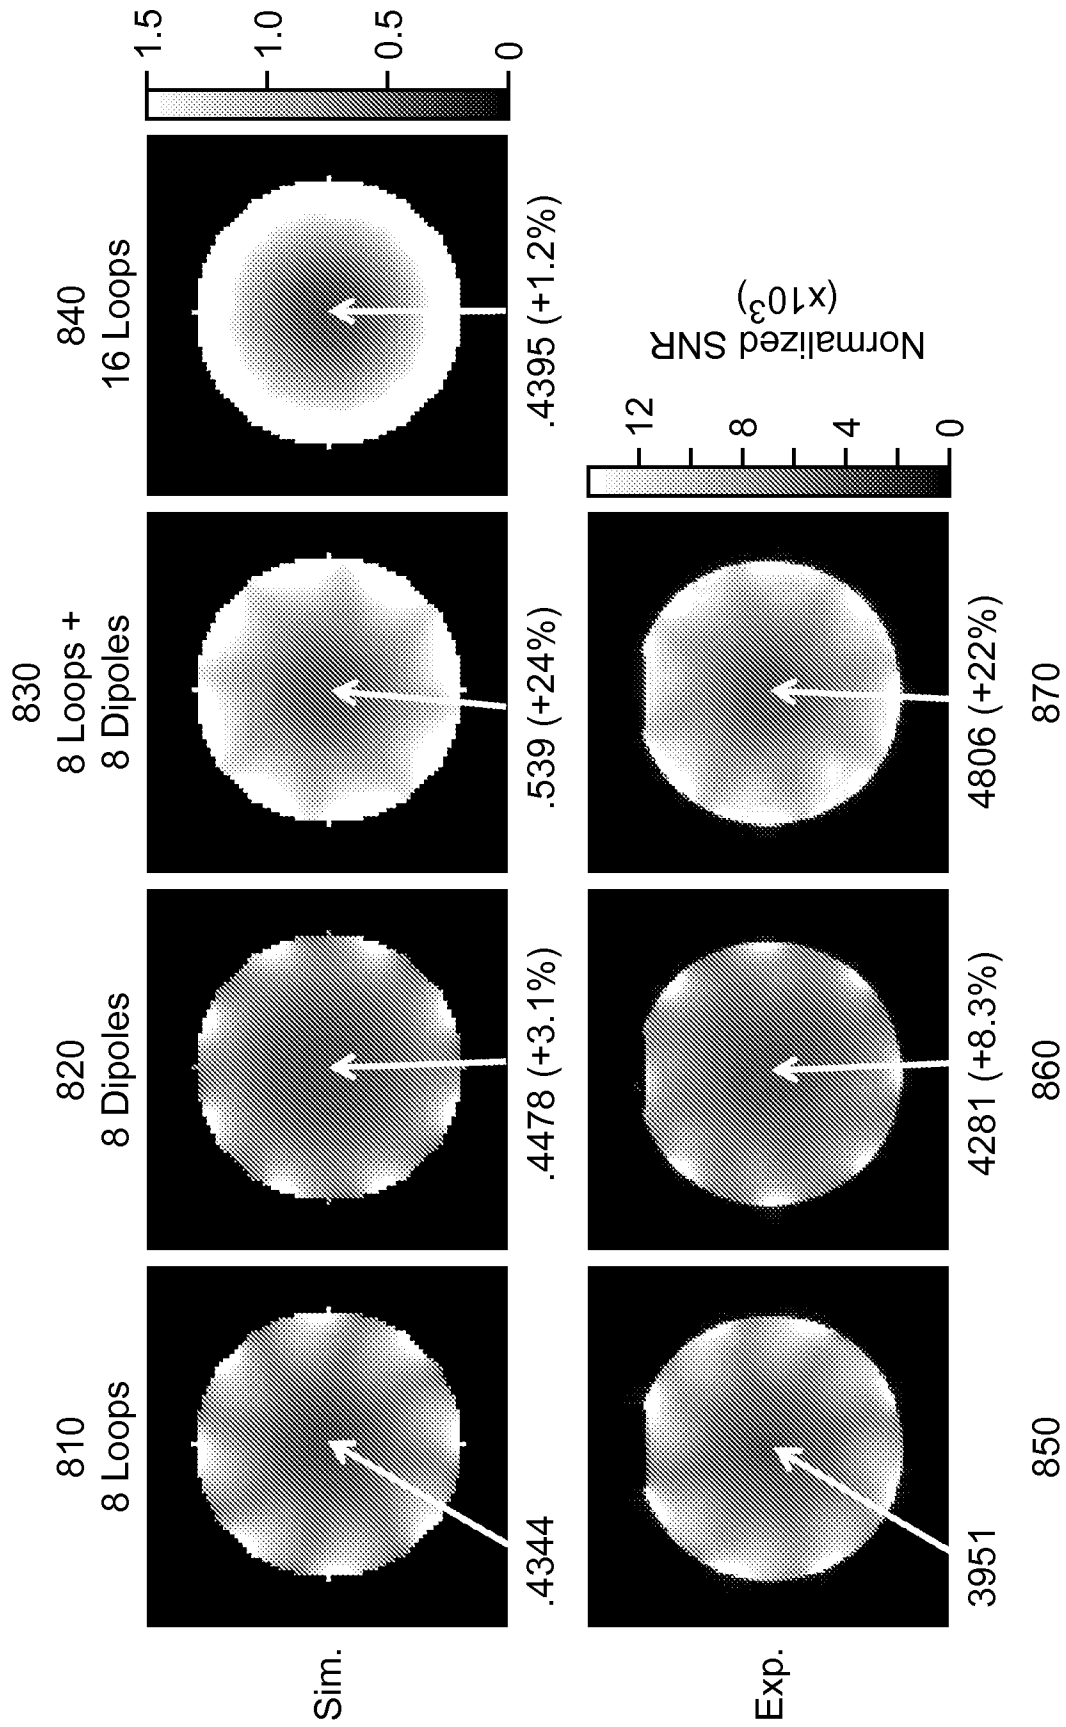


FIG.8

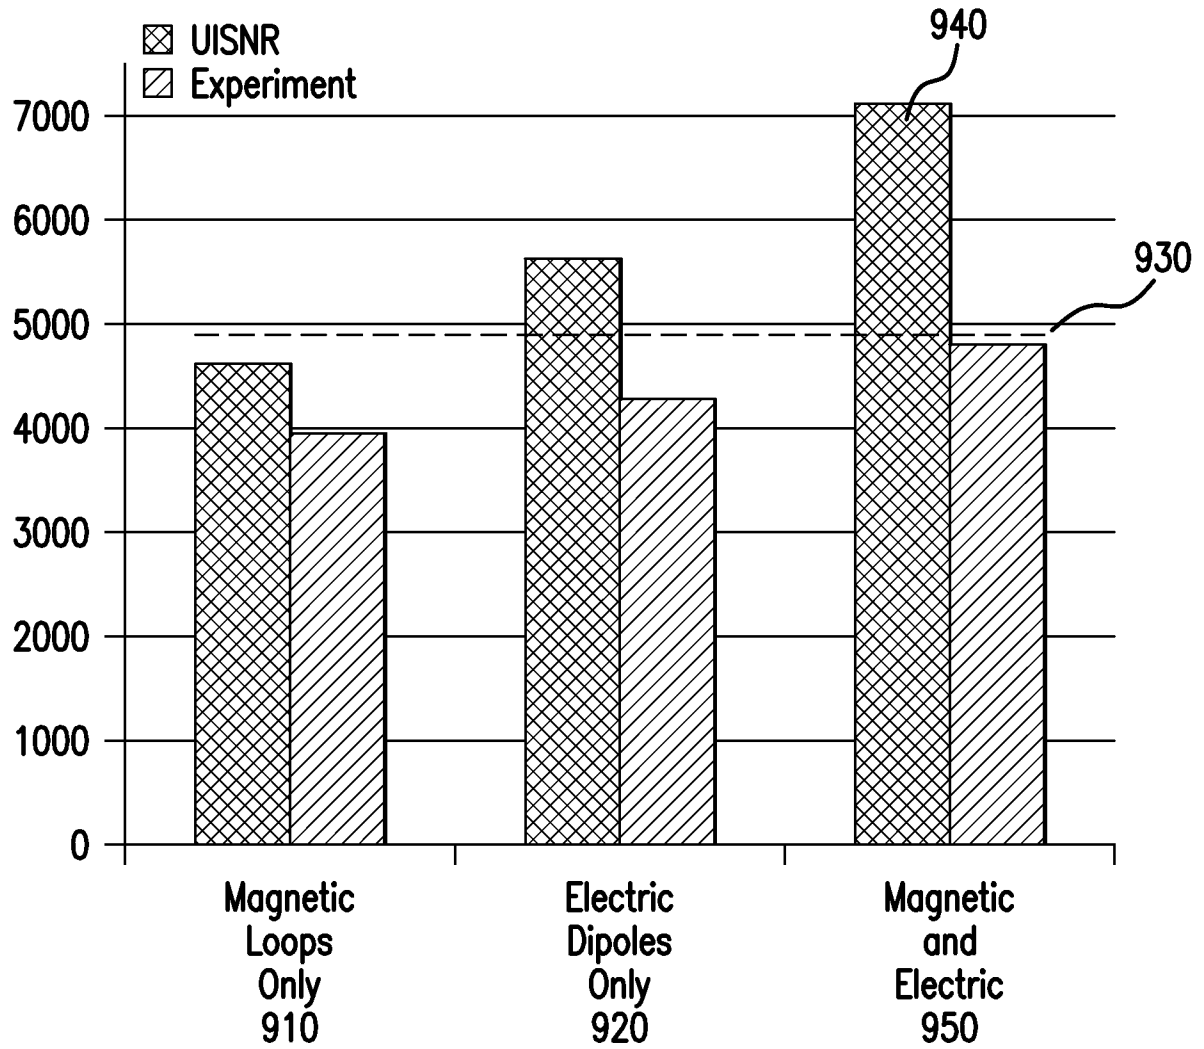


FIG.9

**A. CLASSIFICATION OF SUBJECT MATTER****A61B 5/055(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

A61B 5/055; H01Q 1/50; G01R 33/32; H01Q 9/26; G01R 33/34; H01Q 19/10; H04B 1/06; H04B 1/18; A61B 18/18

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) &amp; Keywords:dipole antenna, MRI

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 11-056806A (GE YOKOGAWA MEDICAL SYST LTD.) 02 March 1999 See abstract, paragraphs [0015]-[0017],[0020]-[0028],[0037] and figures 1-2,6.	1-6, 11-15, 22
Y		7-10, 19-21
A		16-18
Y	US 2010-0117652 A1 (PETER CORK et al.) 13 May 2010 See abstract, paragraphs [0034],[0038]-[0039], claims 1,4 and figures 1,3.	7
Y	US 2008-0228063 A1 (PAUL F. TURNER et al.) 18 September 2008 See abstract, paragraphs [0057],[0061],[0065],[0078]-[0081],[0087],[0101],[0104]-[0105], claims 1,3 and figures 1-6,18-25.	8-10
X	US 2010-0297972 A1 (JAN HOHANNES MARIA VAN DEN ELZEN) 25 November 2010 See abstract, paragraphs [0066]-[0069] and figure 5.	16-18
Y		19-21
A	US 5462055 A (JAMES A. CASEY et al.) 31 October 1995 See abstract, column 3, line 35 - column 4, line 2 and figures 1-2.	1-22
A	US 4381566 A (JOHJI KANE) 26 April 1983 See abstract, column 4, line 36 - column 7, line 36 and figures 2-3,7-22.	1-22

 Further documents are listed in the continuation of Box C. See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family


Date of the actual completion of the international search

23 August 2013 (23.08.2013)

Date of mailing of the international search report

**23 August 2013 (23.08.2013)**

Name and mailing address of the ISA/KR


 Korean Intellectual Property Office  
 189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City,  
 302-701, Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

KIM Tae Hoon

Telephone No. +82-42-481-8407





**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/US2013/037468**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 11-056806A	02/03/1999	None	
US 2010-0117652 A1	13/05/2010	GB 0820689 D0 GB 0903728 D0 GB 0903729 D0 GB 2465238 A GB 2465239 A GB 2465239 B US 8129992 B2	17/12/2008 15/04/2009 15/04/2009 19/05/2010 19/05/2010 16/11/2011 06/03/2012
US 2008-0228063 A1	18/09/2008	CN 1973789 A CN 1973789 B CN 1973789 C0 US 2007-0118193 A1 US 7565207 B2 US 8170643 B2	06/06/2007 25/08/2010 06/06/2007 24/05/2007 21/07/2009 01/05/2012
US 2010-0297972 A1	25/11/2010	AU 2008-316521 A1 CA 2703308 A1 CN 101836331 A CN 101836331 B EP 2203956 A1 JP 2011-501595 A RU 2010120717 A TW 201017988 A US 8320869 B2 WO 2009-053404 A1	30/04/2009 30/04/2009 15/09/2010 19/06/2013 07/07/2010 06/01/2011 27/11/2011 01/05/2010 27/11/2012 30/04/2009
US 05462055 A	31/10/1995	None	
US 04381566 A	26/04/1983	JP 56-000709 A JP 56-000711 A JP 56-000712 A	07/01/1981 07/01/1981 07/01/1981