




- (51) **International Patent Classification:**
G06K 7/00 (2006.01) **H01Q 7/00** (2006.01)
G06K 19/077 (2006.01) **H01Q 1/22** (2006.01)
H01Q 1/24 (2006.01)
- (21) **International Application Number:**
PCT/US2010/025323
- (22) **International Filing Date:**
25 February 2010 (25.02.2010)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
12/393,249 26 February 2009 (26.02.2009) US
- (71) **Applicant (for all designated States except US):** **HARRIS CORPORATION** [US/US]; 1025 W. NASA Blvd., MS A-11I, Melbourne, Florida 32919 (US).
- (72) **Inventor:** **PARSCHE, Francis Eugene**; 1107 Glenham Drive NE, Palm Bay, Florida 32905 (US).
- (74) **Agents:** **YATSKO, Michael S.** et al.; Harris Corporation, 1025 W. NASA Blvd., MS A-11I, Melbourne, Florida 32919 (US).

- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
 — with international search report (Art. 21(3))

(54) **Title:** WIRELESS COMMUNICATIONS INCLUDING AN ANTENNA FOR WIRELESS POWER TRANSMISSION AND DATA COMMUNICATION AND ASSOCIATED METHODS

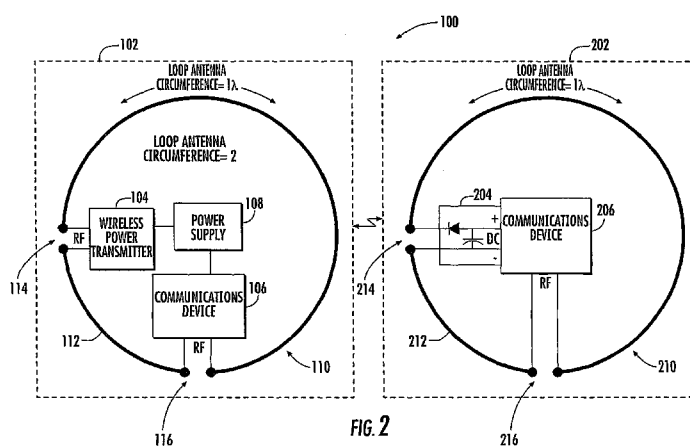

(57) **Abstract:** The wireless communication system (100) includes a first device (102), e.g., a radio frequency identification (RFID) reader, having a wireless power transmitter (104), a first wireless data communications unit (106), and a first dual polarized loop antenna (110) having isolated signal feedpoints (114, 116) along a first loop electrical conductor (112). The wireless power transmitter (104) transmits a power signal having a first polarization, and the first wireless data communications unit (106) communicates using a data signal having a second polarization. A second device (202), e.g., an RFID tag, includes a second dual polarized loop antenna (210). A second wireless data communications unit (206) communicates with the first wireless data communications unit (106) using the data signal having the second polarization. A wireless power receiver (204) receives the power signal having the first polarization from the wireless power transmitter (104) of the first device (102), and provides power for the second device (202).

WO 2010/099266 A1

**WIRELESS COMMUNICATIONS INCLUDING AN ANTENNA FOR
WIRELESS POWER TRANSMISSION AND DATA COMMUNICATION AND
ASSOCIATED METHODS**

5 The present invention relates to the field of communications, and, more particularly, to antennas for wireless communication and related methods.

 Power requirements for modern, solid state electronics are progressively becoming lower and lower. For example, the Liquid Crystal Display (LCD) may require only milliwatts for operation, and the field effect transistor (FET)
10 can respond to even small static charges. This has enhanced the utility of wireless power transmission as an approach for energizing electronics. An example and application of wireless power for electronics is the Radio Frequency Identification (RFID) transponder “tag”, which can allow a method of storing and remotely retrieving data to a reader.

15 As background, wireless power transmission can be the conveyance of electrical energy by radio frequency (RF) techniques, such as the electric power transmitted and received between two radio antennas. Depending on antenna size and range of transmission, the energy may convey by far fields or by near fields, and the energy transferred weak or small. Although it may be impractical or even hazardous
20 to convey high power over great distances, wireless power transmission can be effective, safe and reliable for lower powers and shorter ranges. Generally the shorter the range, the greater the power that can be conveyed. There is a need for wireless power that is more easily integrated with communications.

 It is possible to have dual linear or dual circular polarization channel
25 diversity. That is, a frequency may be reused if one channel is vertically polarized and the other horizontally polarized. Or, a frequency can also be reused if one channel uses right hand circular polarization (RHCP) and the other left hand circular polarization (LHCP). Polarization refers to the orientation of the E field in the radiated wave, and if the E field vector rotates in time, the wave is then said to be
30 rotationally or circularly polarized. Orthogonal polarizations, e.g., polarizations that

are perpendicular, can be vertical linear and horizontal linear or right and left hand circular, and they can be uncoupled as separate channels in communications.

The dipole antenna has been perhaps the most widely used of all the antenna types. It is of course possible however to radiate from a conductor which is not constructed in a straight line. Preferred antenna shapes are often Euclidian, being simple geometric shapes known through the ages. In general, antennas may be classified as to the divergence or curl of electric current, corresponding to dipoles and loops, and line and circle structures.

Many structures are described as loop antennas, but standard accepted, e.g., canonical, loop antennas are a circle. The resonant loop is a full wave circumference circular conductor, often called a "full wave loop". The typical prior art full wave loop is linearly polarized, having a radiation pattern that is a two petal rose, with two opposed lobes normal to the loop plane, and a gain of about 3.6 dBi. Reflectors are often used with the full wave loop antenna to obtain a unidirectional pattern.

Dual linear polarization (simultaneous vertical and horizontal polarization from the same antenna) has commonly been obtained from crossed dipole antennas. For instance, U.S. Patent 1,892,221, to Runge, proposes a crossed dipole system. A dual polarized loop antenna could be more desirable however, as loops provide greater gain in smaller area. An approach to dual circular polarization in single loops is described in U.S. Published Patent Application No. 20080136720, to Parsche et. al.

U.S. Patent No. 645,576, to Tesla, is directed to wireless power transmission. A pair of "elevated terminals" function as monopole antennas to accomplish radiation and reception of electric energy by radio. Spiral loading inductors were included to force antenna resonance. At ranges beyond $\lambda/2\pi$, operation may have been by far field radiation of electromagnetic waves, and at ranges less than $\lambda/2\pi$, the antennas radial reactive electric field (near E field) may have allowed for additional coupling. The spiral loading inductors were collocated with other windings to form a transformer in situ, to couple the generators and loads

to the antennas. Connections were not however provided, to include a separate communications channel along with the power transmission.

Hybrid junctions, also known as hybrid couplers, are passive RF devices that may automatically sort and route. An example of a hybrid junction is the
5 Branch Line Coupler, which may have four ports. When a signal is applied at port 1, it is coupled equally to ports 2 and 3 but not to port 4. Simple antennas having multiple ports with hybrid properties may be uncommon.

U.S. Patent No. 2,147,809, to Alford describes a conjugate bridge circuit providing for isolation between selected ports connected thereto. A 90 and 180
10 degree phase shifts are used between ports in a transmission line ring, forming a branch line coupler. Radiation from the circuit is not however described.

U.S. Patent 5,977,921 to Niccolai, et al. and entitled "Circular-polarized Two-way Antenna" is directed to an antenna for transmitting and receiving circularly polarized electromagnetic radiation which is configurable to either right-
15 hand or left-hand circular polarization. The antenna has a conductive ground plane and a circular closed conductive loop spaced from the plane, i.e., no discontinuities exist in the circular loop structure. A signal transmission line is electrically coupled to the loop at a first point and a probe is electrically coupled to the loop at a spaced-apart second point. This antenna requires a ground plane and includes a parallel feed
20 structure, such that the RF potentials are applied between the loop and the ground plane. The "loop" and the ground plane are actually dipole half elements to each other.

U.S. Patent 5,838,283 to Nakano and entitled "Loop Antenna for Radiating Circularly Polarized Waves" is directed to a loop antenna for a circularly
25 polarized wave. Driving power fed may be conveyed to a feeding point via an internal coaxial line and a feeder conductor passes through an I-shaped conductor to a C-type loop element disposed in spaced facing relation to a ground plane. By the action of a cutoff part formed on the C-type loop element, the C-type loop element radiates a circularly polarized wave. Dual linear, or dual circular polarization are not
30 however provided.

Although various antennas are known for power transmission and communication they do not include isolated ports and cannot simultaneously provide the radio frequency (RF) power and communications link, e.g., diversity in the field of wireless RF identification (RFID) tags.

5 In view of the foregoing background, it is therefore an object of the present invention to provide data communication and power transmission between devices using a dual polarized antenna.

This and other objects, features, and advantages in accordance with the present invention are provided by a wireless communication system for data
10 communication and power transmission. The system includes a first device, e.g., a radio frequency identification (RFID) reader, having a wireless power transmitter, a first wireless data communications unit, and a first dual polarized loop antenna comprising a first loop electrical conductor and first and second isolated signal feedpoints along the first loop electrical conductor and separated by one quarter of a
15 length of the first loop electrical conductor. The wireless power transmitter is coupled to the first isolated signal feedpoint to transmit a power signal having a first polarization, and the wireless data communications unit is coupled to the second isolated signal feedpoint to communicate using a data signal having a second polarization.

20 A second device, e.g., an RFID tag, for communications with the first device includes a second dual polarized loop antenna comprising a second loop electrical conductor and first and second isolated signal feedpoints along the second loop electrical conductor and separated by one quarter of a length of the second loop electrical conductor. A second wireless data communications unit is coupled to the
25 second isolated signal feedpoint of the second dual polarized loop antenna to communicate with the first wireless data communications unit of the first device using the data signal having the second polarization. A wireless power receiver is coupled to the first isolated signal feedpoint of the second dual polarized loop antenna to receive the power signal having the first polarization from the wireless power
30 transmitter of the first device, and to provide power for the second device.

The first and second dual polarized loop antennas may provide for simultaneous data communication and power transmission between the first and second devices. Also, the first and second isolated signal feedpoints along the loop electrical conductor of each of the first and second dual polarized loop antennas may be operated at a signal feedpoint phase angle input difference of 0 degrees. Each of the first and second isolated signal feedpoints of each of the first and second dual polarized loop antennas may define a discontinuity in the respective loop electrical conductor.

In of each of the first and second dual polarized loop antennas, the loop electrical conductor may be a circular electrical conductor. Also, each of the first and second dual polarized loop antennas may be a dual linearly polarized loop antenna.

A method aspect is directed to data communication and power transmission between first and second wireless communication devices, the method including providing the first device with a wireless power transmitter, a first wireless data communications unit, and a first dual polarized loop antenna comprising a loop electrical conductor and first and second isolated signal feedpoints along the loop electrical conductor and separated by one quarter of a length of the loop electrical conductor. The wireless power transmitter is coupled to the first isolated signal feedpoint to transmit a power signal having a first polarization, and the wireless data communications unit being coupled to the second isolated signal feedpoint to communicate using a data signal having a second polarization.

The method includes providing the second device with a second dual polarized loop antenna comprising a loop electrical conductor and first and second isolated signal feedpoints along the loop electrical conductor and separated by one quarter of a length of the loop electrical conductor. A second wireless data communications unit is coupled to the second isolated signal feedpoint of the second dual polarized loop antenna to communicate with the wireless data communications unit of the first device using the data signal having the second polarization. A wireless power receiver is coupled to the first isolated signal feedpoint of the second dual polarized loop antenna to receive the power signal having the first polarization

from the wireless power transmitter of the first device, and to provide power for the second device.

The approach includes the use of isolated ports and allows simultaneous use of the radio frequency (RF) power and communications link on the same frequency or spaced apart in frequency by wireless RF identification (RFID) tags.

FIG. 1 is a schematic diagram of an embodiment, a dual polarized (e.g., orthogonally linearly polarized) loop antenna, in accordance with features of the present invention.

FIG. 2 is a schematic diagram of an embodiment of a system including first and second devices each using the dual polarized loop antenna of FIG. 1.

FIG. 3 is a graph depicting an elevation cut far field radiation pattern for the dual polarized loop antenna of FIG. 1, compared with a $\frac{1}{2}$ wave dipole turnstile antenna, mounted in the same plane.

FIG. 4 is a graph of the continuous power conveyed between two units of the present invention loop antenna.

The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like numbers refer to like elements throughout.

As discussed above, features of the present invention may apply to the field of radio frequency identification (RFID). RFID tags may be defined in three general types: passive, active, or semi-passive (also known as battery-assisted). Passive tags require no internal power source, thus being pure passive devices (they are only active when a reader is nearby to power them). Semi-passive and active tags use a power source, usually a small battery. To communicate, tags respond to queries from a tag reader.

Passive RFID tags have no internal power supply. The small electrical current induced in the antenna by the incoming radio frequency signal provides just enough power for the integrated circuit in the tag to power up and transmit a response. Most passive tags signal by backscattering the carrier wave from the reader. This
5 means that the antenna has to be designed both to collect power from the incoming signal and also to transmit the outbound backscatter signal. The response of a passive RFID tag is not necessarily just an ID number as the tag chip may even include non-volatile memory for storing data.

Active RFID tags are much larger and have their own internal power
10 source, which is used to power the integrated circuits and to broadcast the response signal to the reader. Communications from active tags to readers is typically much more reliable than from passive tags. Many active tags today have operational ranges of hundreds of meters, and a battery life of up to 10 years. Active tags may include larger memories than passive tags, and may include the ability to store additional
15 information received from the reader.

Semi-passive tags are similar to active tags in that they have their own power source, but the battery only powers the microchip and does not power the broadcasting of a signal. The response is usually powered by backscattering the RF energy from the reader, where energy is reflected back to the reader as with passive
20 tags. An additional application for the battery is to power data storage. Energy from the reader may be collected and stored to emit a response in the future.

Extending the capability of RFID to go beyond the basic capabilities of conventional RFID is desirable. For example, extending the capability may include reading at longer distances and within challenging environments, and/or storing larger
25 amounts of data on the tag.

Referring initially to FIG. 1, an embodiment of the antenna for use in a wireless communication system for data communication and power transmission in accordance with features of the present embodiment will be described. The antenna is a dual polarized (e.g., operates with two orthogonal polarizations) loop antenna
30 which can provide simultaneous vertical and horizontal polarization from two isolated

ports. The dual polarized loop antenna **10** is a 2-channel antenna, which can sort and multiplex two channels on the same frequency. In the dual polarized loop antenna **10**, the ports (e.g., the respective orthogonal polarization ports) are isolated from one another, and are used as independent channels, for data communication and power
5 transmission as will be discussed in further detail below.

The dual polarized loop antenna **10** includes a loop electrical conductor **12**, e.g., a circular electrical conductor. The loop electrical conductor **12** may be a conductive wire, tubing, trace etc., and the circumference is preferably equal to one wavelength. Two signal feedpoints **14**, **16** are along the loop electrical conductor and
10 separated by one quarter of a length of the loop electrical conductor. One signal feedpoint **14** may be referred to as the vertical polarized port and include a signal source **18** connected in series in the loop electrical conductor **12**. The other signal feedpoint **16** may be referred to as the horizontal polarized port and include a signal source **20** connected in series in the loop electrical conductor **12**.

Each of the signal feedpoints **14**, **16** is a series signal feedpoint and the
15 signal sources **18**, **20** coupled thereto provide the simultaneous vertical and horizontal polarization for the loop electrical conductor **12**. Also, the signal feedpoints **14**, **16** along the loop electrical conductor **12** of the dual polarized loop antenna **10** may be operated at a signal feedpoint phase angle input difference of 0 degrees. Each of the
20 series signal feedpoints **14**, **16** preferably defines a discontinuity in the loop electrical conductor **12**. Each of the signal feedpoints **14**, **16** may have two terminals **40** to form a port.

Referring additionally to FIG. 2, a wireless communication system **100**
for data communication and power transmission in accordance with features of the
25 present invention will now be described. The system **100** includes a first device **102**, e.g., a radio frequency identification (RFID) reader, having a wireless power transmitter **104**, a first wireless data communications unit **106**, and a first dual polarized loop antenna **110** as discussed above. The wireless power transmitter may be coupled to a power supply **108**.

The antenna **110** includes a loop electrical conductor **112** and first and second isolated signal feedpoints **114**, **116** along the loop electrical conductor and separated by one quarter of a length of the loop electrical conductor. The wireless power transmitter **104** is coupled to the first isolated signal feedpoint **114** to transmit a power signal having a first polarization (e.g., vertical polarization). The wireless data communications unit **106** is coupled to the second isolated signal feedpoint **116** to communicate using a data signal having a second polarization (e.g., horizontal polarization).

A second device **202**, e.g., an RFID tag, is for communications with the first device **102** and includes a second dual polarized loop antenna **210** comprising a loop electrical conductor **212** and first and second isolated signal feedpoints **214**, **216** along the loop electrical conductor and separated by one quarter of a length of the loop electrical conductor. A second wireless data communications unit **206** is coupled to the second isolated signal feedpoint **216** of the second dual polarized loop antenna **210** to communicate with the wireless data communications unit **106** of the first device **102** using the data signal having the second polarization. A wireless power receiver **204** (e.g., a power rectifier circuit) is coupled to the first isolated signal feedpoint **214** to receive the power signal having the first polarization from the wireless power transmitter **104** of the first device, and to provide power for the wireless data communications unit **106** of the first device **102**.

The first and second dual polarized loop antennas **110**, **210** may provide for simultaneous data communication and power transmission between the first and second devices **102**, **202**.

The approach includes the use of isolated ports and allows simultaneous use of the radio frequency (RF) power and communications link, e.g., in the field of wireless RF identification (RFID) tags. The approach uses a combination of two full wave loop antennas, each antenna having 2 ports which are $\frac{1}{4}$ wavelength apart and isolated from each other. The features of the system may be advantageously used to address range issues with RFID devices. Although the present invention is directed to RFID transponders, it can also be used to remotely power other

communication devices including e.g., remote controls or wireless microphones. The system advantages include real time operation, e.g., power and communications are conveyed simultaneously on the same frequency.

A theory of operation for the dual polarized loop antenna **110** will now be described. Signal feedpoints **14**, **16** are separated by unequal distances in the clockwise and counterclockwise directions, corresponding to 90 and 270 degrees phase shifts and a phase difference of 180 degrees. The transposition of forwards and backwards traveling waves from either feedpoint to the other feedpoint results in potentials equal in amplitude but 180 out of phase, and cancellation of the two waves at the opposite feedpoint occurs.

Continuing the theory of operation, the one wavelength circular conductor of dual polarized loop antenna **110** is akin to the one wavelength perimeter of a branch line hybrid coupler (note that although the branch line coupler is frequently printed in a square shape of one wavelength perimeter, it may also of course be printed in a circle of 1 wavelength circumference). Dual polarized loop antenna **110** signal feedpoint **14** is akin to branchline coupler port 4, and dual polarized loop antenna **110** signal feedpoint **16** is akin to branch line coupler port 1. As branch line couplers provide isolation between ports 1 and 4, isolation is similarly provided between polarized loop antenna **110** signal feedpoints **14**, **16**. The dual polarized loop antenna **110** is of course without physical provision of branch line coupler ports 2 and 3. As dual polarized loop antenna **110** is without the shielding, e.g., ground plane(s) typically used with the branch line coupler, dual polarized loop antenna **110** provides the radiating function of an antenna as well. As background, theory for Branch Line Hybrid Couplers is described in "Hybrid Circuits For Microwaves", W. A. Tyrell, Proceedings of the Institute Of Radio Engineers, Nov. 1947, pp. 1294 -1306.

A method aspect is directed to data communication and power transmission between first and second wireless communication devices **102**, **202**. The method includes providing the first device **102** with a wireless power transmitter **104**, a first wireless data communications unit **106**, and a first dual polarized loop antenna

110 comprising a loop electrical conductor **112** and first and second isolated signal feedpoints **114**, **116** along the loop electrical conductor and separated by one quarter of a length of the loop electrical conductor. The wireless power transmitter **104** is coupled to the first isolated signal feedpoint **114** to transmit a power signal having a first polarization, and the wireless data communications unit **106** is coupled to the second isolated signal feedpoint **116** to communicate using a data signal having a second polarization.

The method includes providing the second device **202** with a second dual polarized loop antenna **210** comprising a loop electrical conductor **212** and first and second isolated signal feedpoints **214**, **216** along the loop electrical conductor and separated by one quarter of a length of the loop electrical conductor. A second wireless data communications unit **206** is coupled to the second isolated signal feedpoint **216** of the second dual polarized loop antenna **210** to communicate with the wireless data communications unit **106** of the first device **110** using the data signal having the second polarization. A wireless power receiver **204** is coupled to the first isolated signal feedpoint **214** of the second dual polarized loop antenna **210** to receive the power signal having the first polarization from the wireless power transmitter **104** of the first device **110**, and to provide power for the wireless data communications unit **106** of the first device **110**.

Wireless power receiver **204** may be a rectifier circuit for the conversion of radio frequency alternating currents into direct current (DC), such as the half wave rectifier circuit illustrated. Full wave or bridge rectifier circuits (not shown) may be used for higher efficiency or higher voltages as needed. Wireless power receiver **204** may also include storage capacitors or storage batteries (not shown) to accumulate and store wireless power over time, and to permit high peak transmit powers from communications device **206**.

The elevation (XZ plane) cut radiation pattern for the dual polarized loop antenna embodiment of the present invention is compared with that of a conventional $\frac{1}{2}$ wave dipole turnstile antenna in FIG. 3. As can be appreciated, the dual polarized loop antenna has a two petal rose pattern ($\cos^n \theta$), a half power

beamwidth near 98 degrees, and a gain of 3.6 dBic compared to 2.1 dBic of a conventional $\frac{1}{2}$ wave dipole turnstile antenna, resulting in an increase of 1.4 dB. This higher gain is obtained in less physical area as well. The azimuth (XY plane) cut radiation pattern (not shown) is nearly omnidirectional, e.g., circular, and has a gain near -3.3 dBi in that plane. Isolation between the antenna ports can be infinite in theory and -33 dB has been measured in practice.

FIG. 4 is a graph of the power conveyed between two dual polarized loop antennas **10**, as a function of the range between them. FIG. 3 is for operation at 915 MHz, 1 watt transmitter power, and with antennas aligned for maximum coupling. Calculated trace **301** was obtained by a method of moments simulation in the NEC4.1 Numerical Electromagnetic Code by Lawrence Livermore National Laboratories of Livermore, CA. Measured trace **302** was obtained by building and testing thin wire prototypes of first and second dual polarized loop antennas **110**, **210** in an anechoic chamber.

The measured data indicates slightly higher losses than calculated. This was primarily due to reflection loss due to VSWR: the antennas **110**, **210** were operated directly into a 50 ohm system for simplicity, resulting in 2.8 to 1 VSWR and 1.1 dB of reflection loss at each end. As can be seen, the difference between measured and calculated is about 2.2 dB at most ranges which corresponds to the $2(1.1) = 2.2$ dB reflection loss. The present invention can of course be further matched to avoid this loss or the loss can be taken in trade for convenience or economy. The impedance at series signal feedpoints **14**, **16** at resonance may be about $Z = 130 + j0$ Ohms.

At ranges beyond about 0.5λ coupling between two dual polarized loop antennas **10** is by radiated far fields, which may be calculated as:

$$P_r = P_t (\lambda/4\pi r)^2 G_t G_r$$

where:

30

P_t = The Power Input Into The Transmit Antenna, Watts

P_r = The Power Extracted From The Receive Antenna, Watts

λ = The Free Space Wavelength In Meters

r = The Free Space Range Between The Antennas

5 G_t = The Transmit Antenna Gain = $10^{(\text{Transmit Antenna Gain in dBi}/10)}$

G_r = The Receive Antenna Gain = $10^{(\text{Receive Antenna Gain in dBi}/10)}$.

The above equation assumes perfectly aligned antennas and perfect impedance matching. The squared term, e.g., $(\lambda/4\pi r)^2$ arises from the spherical wave spreading loss for radiated far fields. For the present invention both the transmit and receive antenna gain is about $10^{(3.6/10)} = 2.3$.

Exact resonance in the present invention loop antennas occurs at slightly larger than 1 wavelength (λ) nominal circumference. For thin wire loop conductors, of diameter $<\lambda/50$, resonance occurs at 1.04λ . This is in reverse to thin wire $\frac{1}{2}$ wave dipoles, where exact resonance may occur at 0.47λ to 0.48λ . Although 1λ nominal circumference is a preferred embodiment for loop antenna **12**, the invention may continue to produce dual polarization for smaller loop circumferences.

The preceding discussion has been for series signal sources **18, 20**, to be identical in frequency and with a constant phase relationship. Series signal sources **18, 20** may however be operated slightly offset in frequency with only a slight degradation in isolation between ports **14, 16**.

The present invention is not so limited as to require discontinuities in the loop conductor at signal feed points **14, 16**, and other signal feed approaches may be used, as for example, shunt feeding. The gamma or Y match are suitable shunt feeds, as are common in dipole and yagi-uda antenna practice, and would be appreciated by those skilled in the art.

Inset feed approaches may also be used to form signal feed points **14, 16**. For instance, loop electrical conductor **12** may be made of coaxial cable, and the radiating current a common mode current on the outside of a coaxial cable loop. The coax cable braid may be spread, but not severed, to bring the center conductor out at

the desired location, and the signal feed points **14**, **16** formed by a discontinuity the coaxial cable loops outer conductor. Also, other loop shapes may be substituted in the present invention, with qualitatively similar results. For instance the full wave circular loop may be made square, with 1/4 wavelength sides, or even triangular.

5 Accordingly, a dual polarization loop antenna is provided with an increase in gain and decrease in size. In the antenna according to the present invention there are two isolated feedpoints in series in the loop conductor and dual orthogonal polarizations. Sufficient port isolation may be provided to simultaneous convey wireless power and communications.

CLAIMS

1. A wireless communication system for data communication and power transmission, the system comprising:
- 5 a first device including
- a wireless power transmitter,
 - a first wireless data communications unit, and
 - a first dual polarized loop antenna comprising a first loop electrical conductor and first and second isolated signal feedpoints
- 10 along the first loop electrical conductor and separated by one quarter of a length of the first loop electrical conductor,
- the wireless power transmitter being coupled to the first isolated signal feedpoint to transmit a power signal having a first polarization, and the wireless data communications unit being coupled
- 15 to the second isolated signal feedpoint to communicate using a data signal having a second polarization; and
- a second device for communications with the first device and including
- a second dual polarized loop antenna comprising a second loop electrical conductor and first and second isolated signal feedpoints
- 20 along the second loop electrical conductor and separated by one quarter of a length of the second loop electrical conductor,
- a second wireless data communications unit coupled to the second isolated signal feedpoint of the second dual polarized loop antenna to communicate with the wireless data communications unit of
- 25 the first device using the data signal having the second polarization, and
- a wireless power receiver coupled to the first isolated signal feedpoint of the second dual polarized loop antenna to receive the
- 30 power signal having the first polarization from the wireless power

transmitter of the first device, and to provide power for the second device.

2. The wireless communication system according to Claim 1,
5 wherein the first and second dual polarized loop antennas provide for simultaneous data communication and power transmission between the first and second devices.

3. The wireless communication system according to Claim 1,
wherein the first and second isolated signal feedpoints along the loop electrical
10 conductor of each of the first and second dual polarized loop antennas are operated at a signal feedpoint phase angle input difference of 0 degrees.

4. The wireless communication system according to Claim 1,
wherein each of the first and second isolated signal feedpoints of each of the first and
15 second dual polarized loop antennas defines a discontinuity in the respective first and second loop electrical conductors.

5. The wireless communication system according to Claim 1,
wherein each of the first and second dual polarized loop antennas comprises a dual
20 linearly polarized loop antenna.

6. The wireless communication system according to Claim 1,
wherein the first device defines a radio frequency identification (RFID) reader, and
the second device defines an RFID tag.

25

7. A method for data communication and power transmission
between first and second wireless communication devices, the method comprising:
operating the first device including a wireless power transmitter, a first
wireless data communications unit, and a first dual polarized loop antenna comprising
30 a loop electrical conductor and first and second isolated signal feedpoints along the

loop electrical conductor and separated by one quarter of a length of the loop electrical conductor, the wireless power transmitter being coupled to the first isolated signal feedpoint and transmitting a power signal having a first polarization, and the wireless data communications unit being coupled to the second isolated signal

5 feedpoint and communicating using a data signal having a second polarization; and operating the second device including a second dual polarized loop antenna comprising a loop electrical conductor and first and second isolated signal feedpoints along the loop electrical conductor and separated by one quarter of a length of the loop electrical conductor, a second wireless data communications unit coupled

10 to the second isolated signal feedpoint of the second dual polarized loop antenna and communicating with the wireless data communications unit of the first device using the data signal having the second polarization, and a wireless power receiver coupled to the first isolated signal feedpoint of the second dual polarized loop antenna and receiving the power signal having the first polarization from the wireless power

15 transmitter of the first device, and providing power for the second device.

8. The method according to Claim 7, wherein data communication and power transmission is simultaneous.

20 9. The method according to Claim 7, further comprising operating the first and second isolated signal feedpoints along the loop electrical conductor of each of the first and second dual polarized loop antennas at a signal feedpoint phase angle input difference of 0 degrees.

25 10. The method according to Claim 7, wherein operating the first device is for a radio frequency identification (RFID) reader function; and wherein operating the second device comprises is for an RFID tag function.

1/4

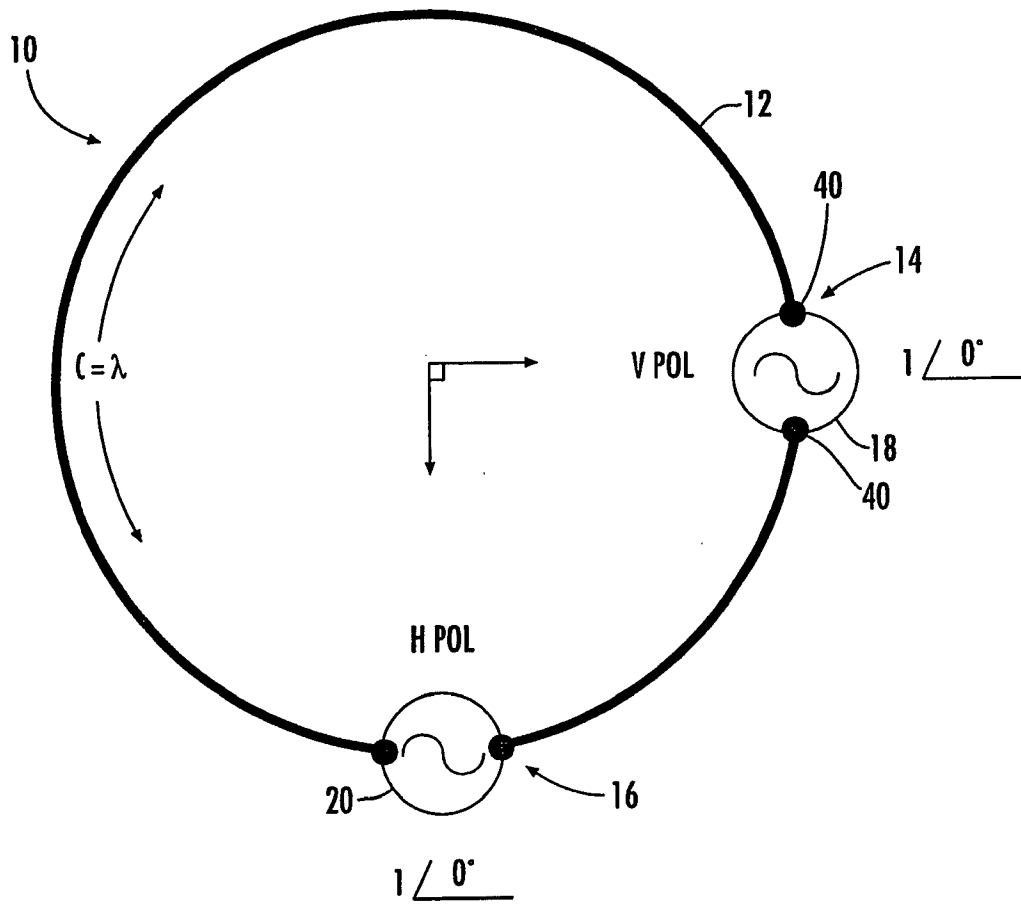


FIG. 1

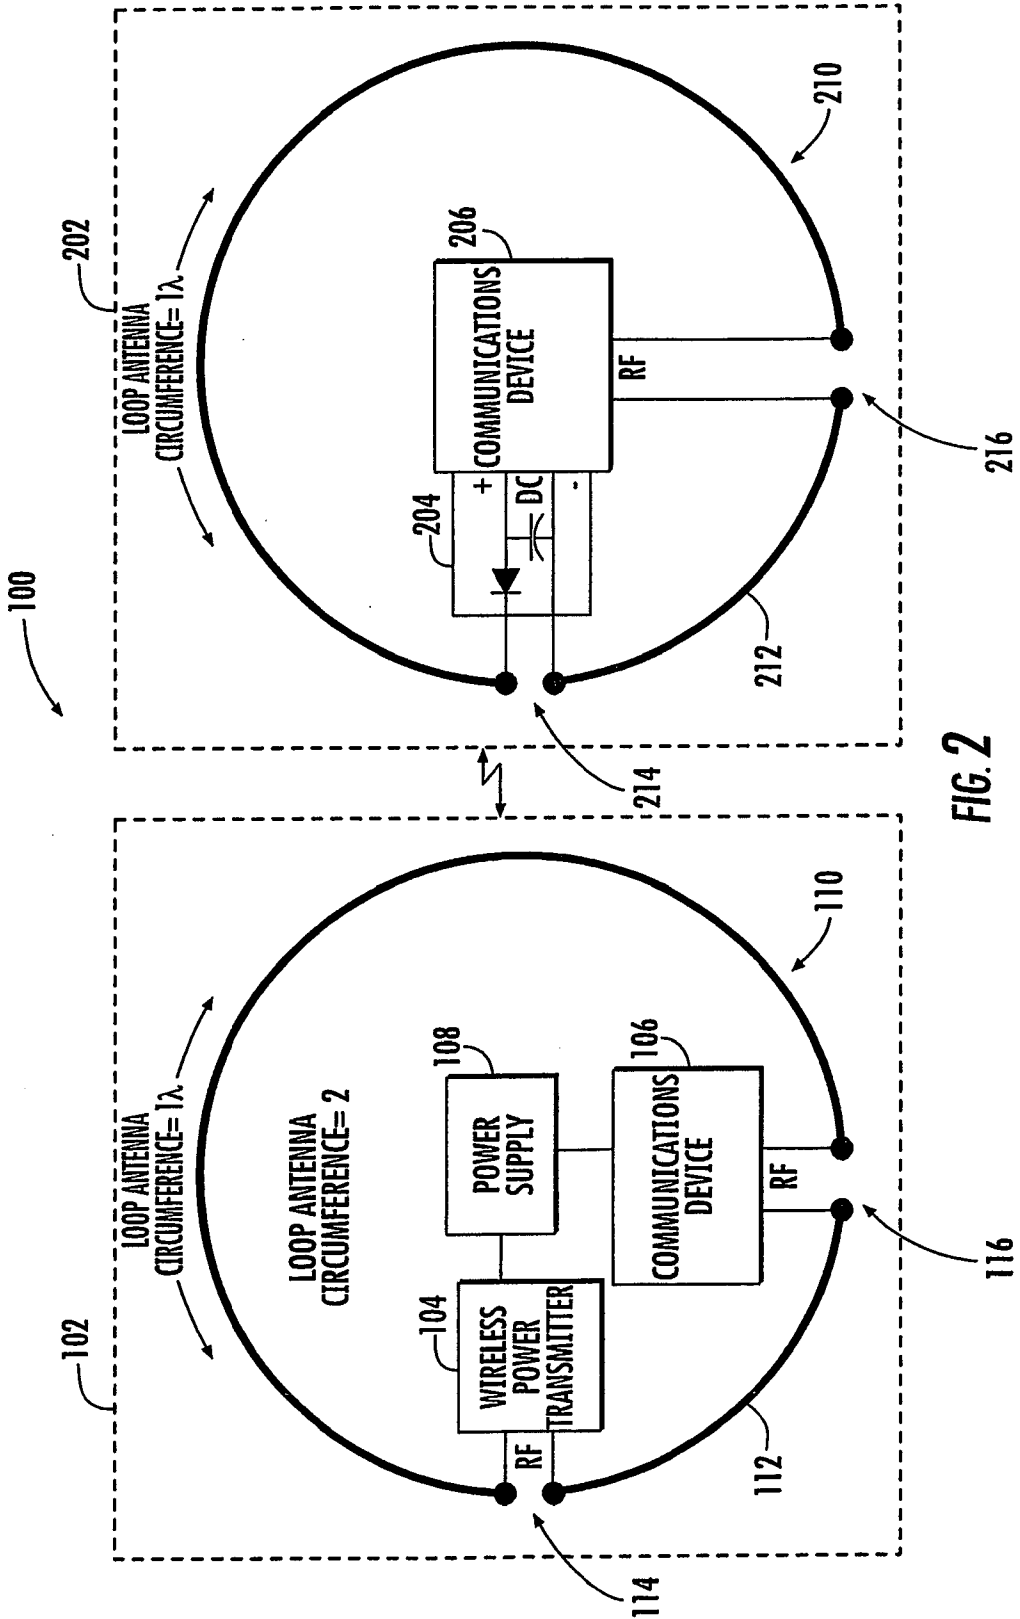


FIG. 2

3/4

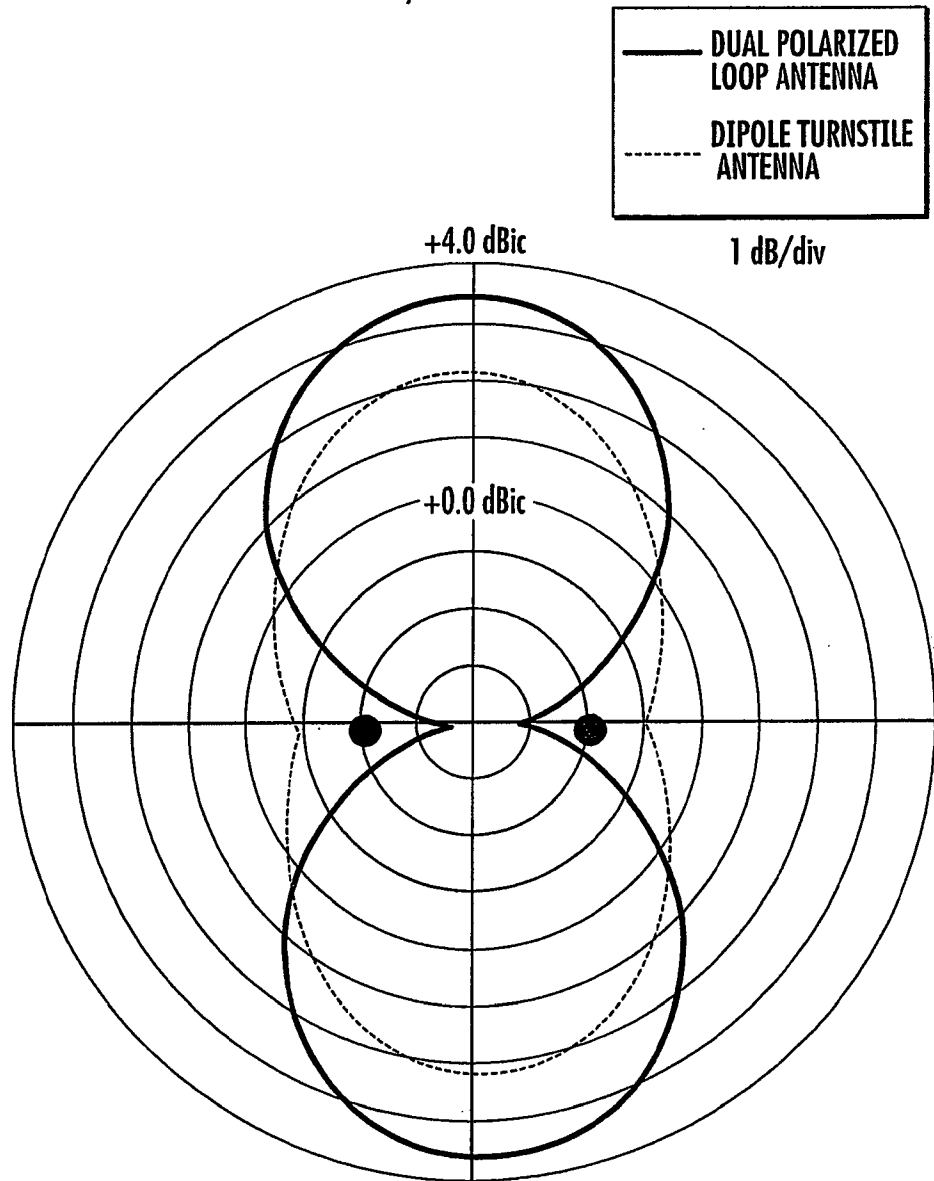


FIG. 3

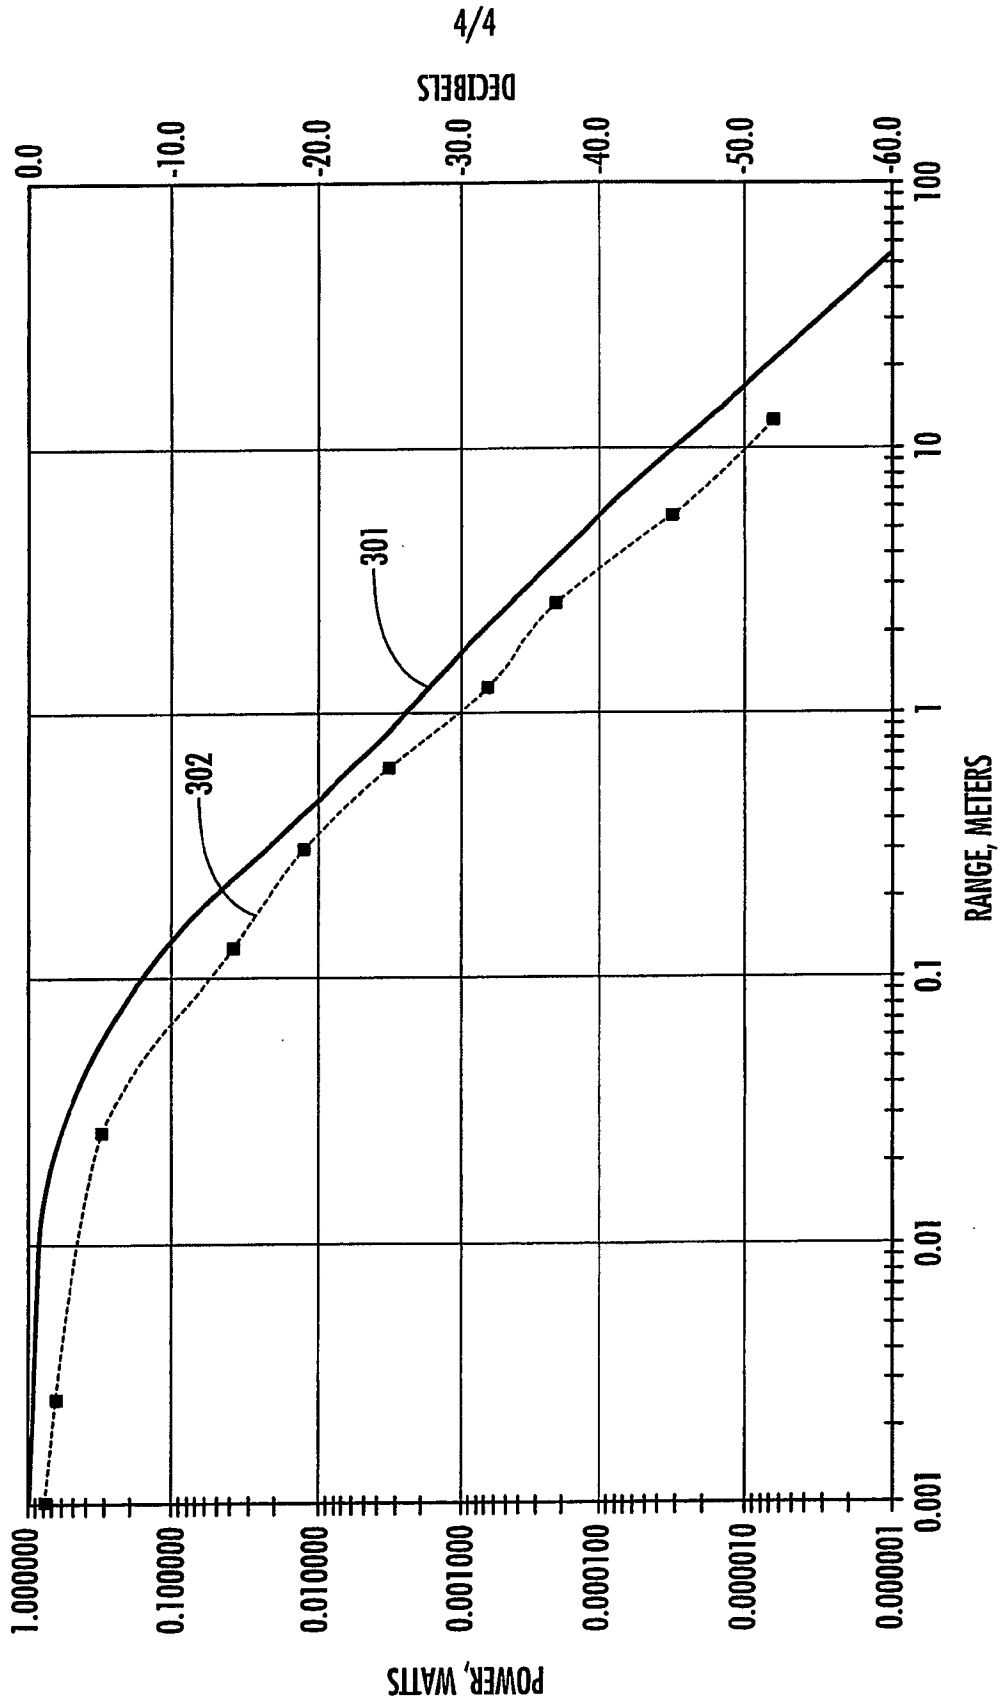


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2010/025323

A. CLASSIFICATION OF SUBJECT MATTER
 INV. G06K7/00 G06K19/077 H01Q1/24 H01Q7/00 H01Q1/22
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
 Minimum documentation searched (classification system followed by classification symbols)
 G06K H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
 EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 00/64004 A2 (UNIV SINGAPORE [SG]; CET TECHNOLOGIES PTE LTD [SG]; MEDDLE ALAN LEONAR) 26 October 2000 (2000-10-26) page 3, line 8 - page 4, line 15 page 7, line 14 - page 12, line 9 page 15, line 9 - line 12 figures 1-3, 7-10, 13	1-10
Y	EP 0 257 544 A2 (BBC BROWN BOVERI & CIE [DE]) 2 March 1988 (1988-03-02) column 2, line 5 - column 3, line 49 figures 1, 2	1-10
Y	US 2008/136720 A1 (PARSCHE FRANCIS EUGENE [US] ET AL) 12 June 2008 (2008-06-12) cited in the application the whole document	1-10
	----- -/--	

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier document but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 11 May 2010	Date of mailing of the international search report 20/05/2010
--	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Köppe, Maro
--	---------------------------------------

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2010/025323

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 516 303 A1 (SONY CORP [JP]) 2 December 1992 (1992-12-02) page 4, line 29 - page 6, line 39 figures 6-9, 11, 16-19 -----	1-10
Y	US 2005/110689 A1 (MASUTANI TAKESHI [JP]) 26 May 2005 (2005-05-26) paragraph [0043] - paragraph [0051] figures 1-4 -----	1-10
A	US 5 675 346 A (NISHIKAWA KUNITOSHI [JP] ET AL) 7 October 1997 (1997-10-07) column 3, line 66 - column 5, line 3 column 5, line 38 - column 6, line 5 figures 1A, 1B, 2, 7A, 7B -----	1-10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2010/025323

Patent document cited in search report	Publication date	Publication date	Patent family member(s)	Publication date
WO 0064004	A2	26-10-2000	AU 2816900 A	02-11-2000
			GB 2363912 A	09-01-2002
			HK 1040570 A1	18-06-2004
			SG 76615 A1	21-11-2000
			US 6693599 B1	17-02-2004
EP 0257544	A2	02-03-1988	DE 3628583 A1	10-03-1988
			JP 2812680 B2	22-10-1998
			JP 63054023 A	08-03-1988
			US 4918749 A	17-04-1990
US 2008136720	A1	12-06-2008	NONE	
EP 0516303	A1	02-12-1992	DE 69218045 D1	17-04-1997
			DE 69218045 T2	19-06-1997
US 2005110689	A1	26-05-2005	JP 2005176294 A	30-06-2005
US 5675346	A	07-10-1997	JP 2761195 B2	04-06-1998
			JP 8265038 A	11-10-1996