US 20070161383A1

(19) United States

(12) Patent Application Publication (10) Pub. No.: US 2007/0161383 A1

Caci (43) Pub. Date: Jul. 12, 2007

(54) METHOD AND APPARATUS FOR LOCATING A WIRELESS DEVICE

(75) Inventor: **J. Claude Caci**, Baldwinsville, NY (US)

Correspondence Address:
MILES & STOCKBRIDGE PC
1751 PINNACLE DRIVE
SUITE 500
MCLEAN, VA 22102-3833 (US)

(73) Assignee: **Lockheed Martin Corporation**, Bethesda, MD (US)

(21) Appl. No.: **11/619,426**

(22) Filed: **Jan. 3, 2007**

Related U.S. Application Data

(63) Continuation of application No. 11/419,843, filed on May 23, 2006, now abandoned, which is a continuation of application No. 10/695,894, filed on Oct. 30, 2003, now Pat. No. 7,050,786.

(60) Provisional application No. 60/422,202, filed on Oct. 30, 2002.

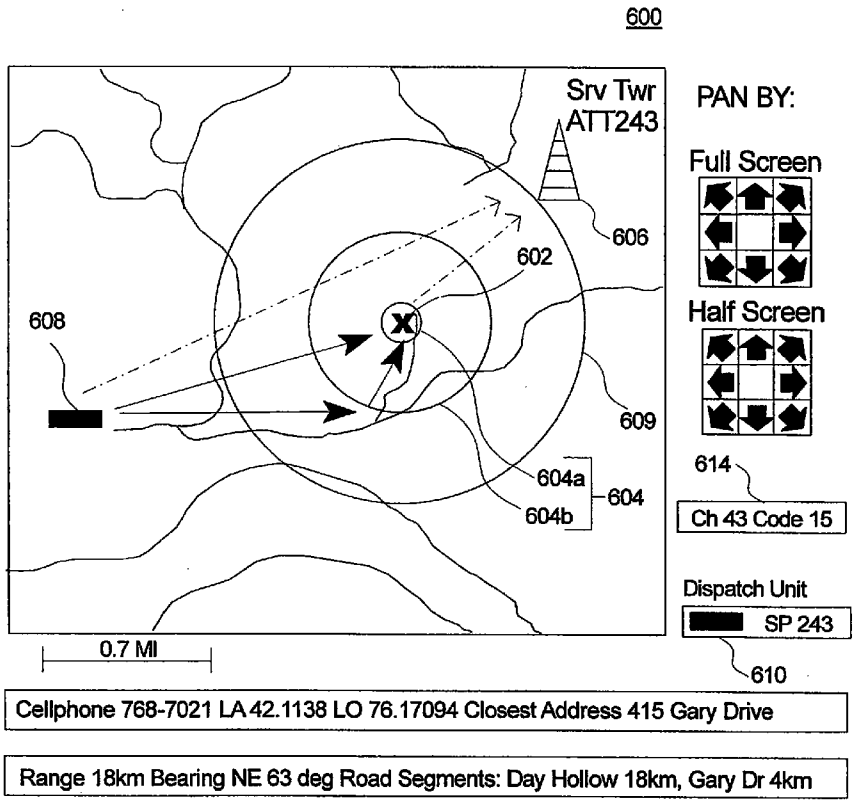
Publication Classification

(51) **Int. Cl.**
H04Q 7/20 (2006.01)

(52) **U.S. Cl.** **455/457**; 455/456.2

(57) **ABSTRACT**

Disclosed is a method and apparatus for locating a wireless device especially useful for locating a cellular telephone making a call from an unknown location. The call may be a request for emergency assistance, or for location-based commercial services, for example. Various embodiments may optionally include a mobile location component, a cellular telephone enabled to chirp-on-demand, and/or an interferometer link. A mobile location component may include a directional antenna. The directional antenna may be mounted on an antenna boom on top of an emergency vehicle, for example. The mobile location component may alternately or additionally comprise a hand-held unit. System elements may cooperate to generate a situation awareness map or other display. The mobile location component may be moved in the general direction of a first location calculation associated with a first circular error of probability. After being moved in the general direction, the mobile location component may cooperate with other elements to determine a second location calculation associated with a second circular error of probability. Second and subsequent location calculations are of increasing precision, enabling an emergency vehicle or attendant to zero in on a cellular telephone.



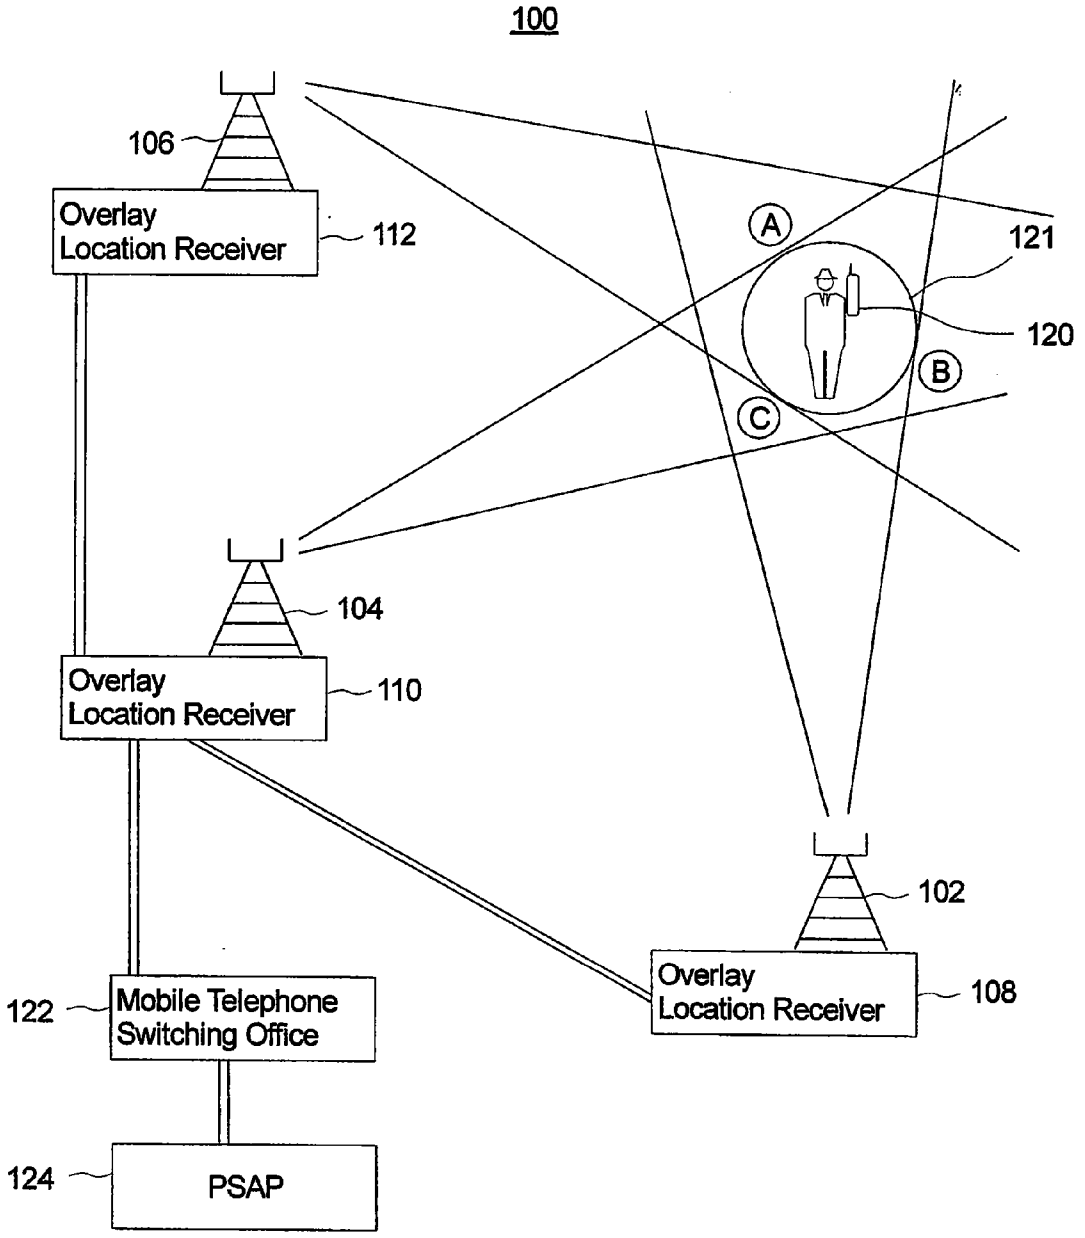

100
106
Overlay
Location Receiver
112
A
121
120
B
C
104
Overlay
Location Receiver
110
102
Overlay
Location Receiver
108
122
Mobile Telephone
Switching Office
124
PSAP

Fig. 1

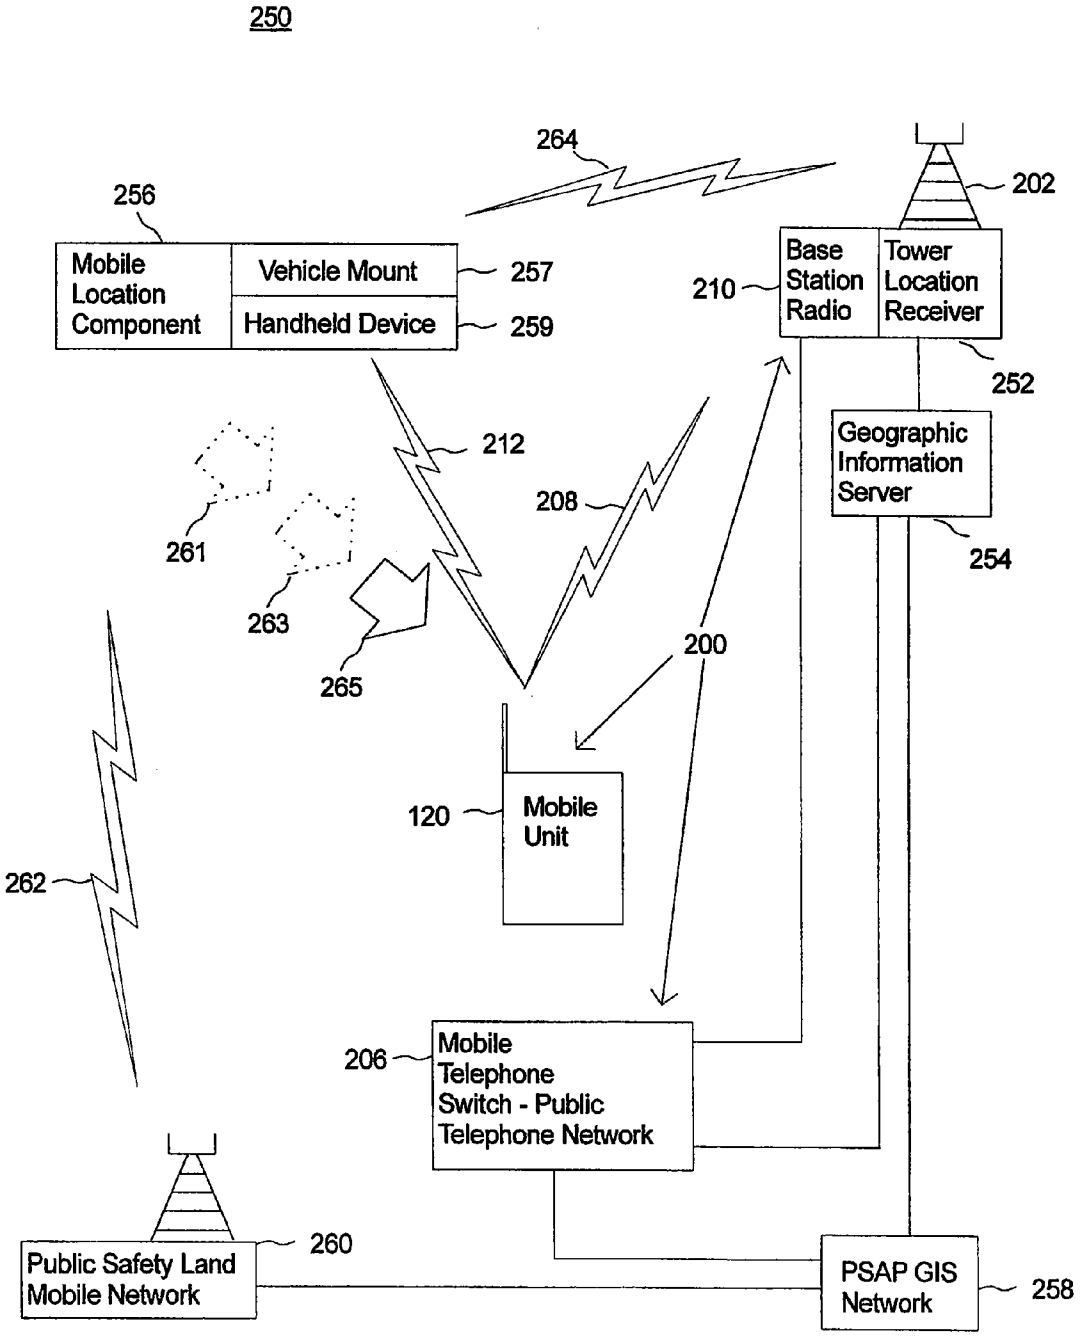

250
264
256
202
Mobile Location Component
Vehicle Mount
257
Handheld Device
259
210
Base Station Radio
Tower Location Receiver
252
212
208
Geographic Information Server
254
261
263
265
200
120
Mobile Unit
262
206
Mobile Telephone Switch - Public Telephone Network
260
Public Safety Land Mobile Network
PSAP GIS Network
258

Fig. 2

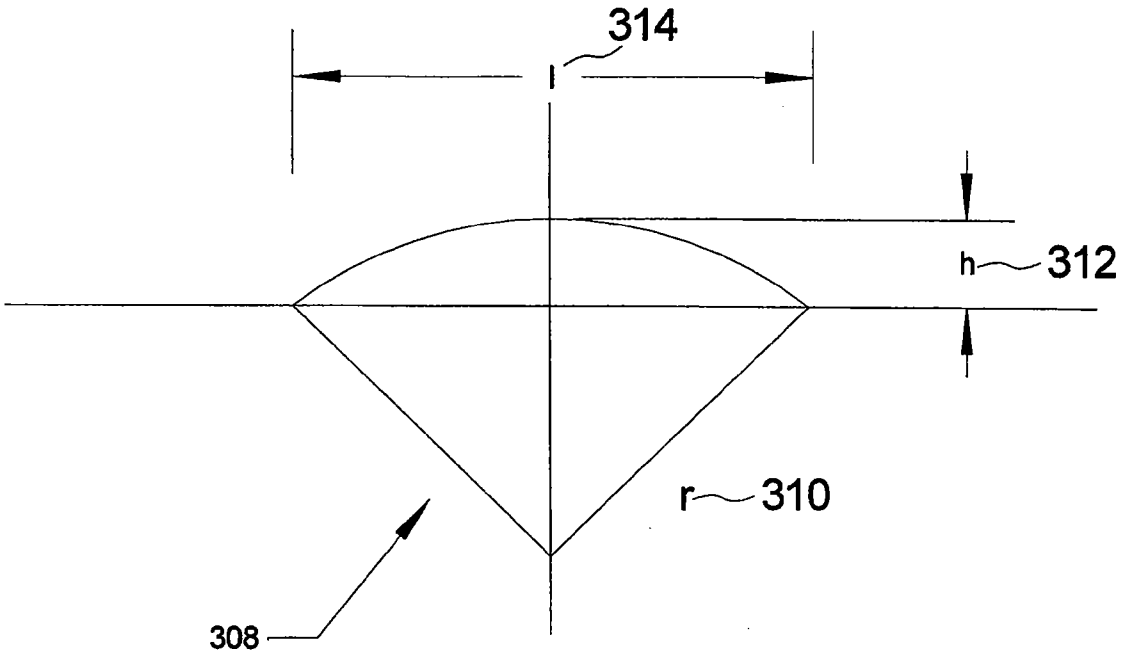


Fig. 3

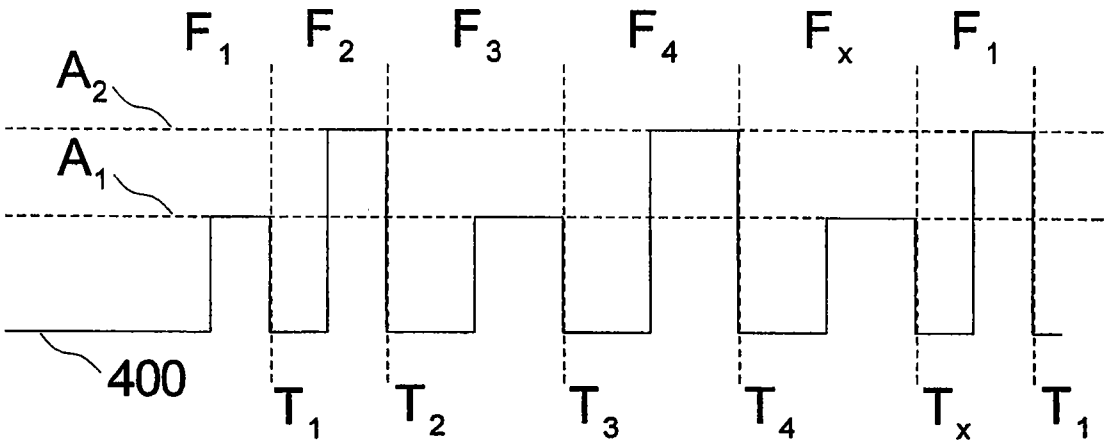


Fig. 4

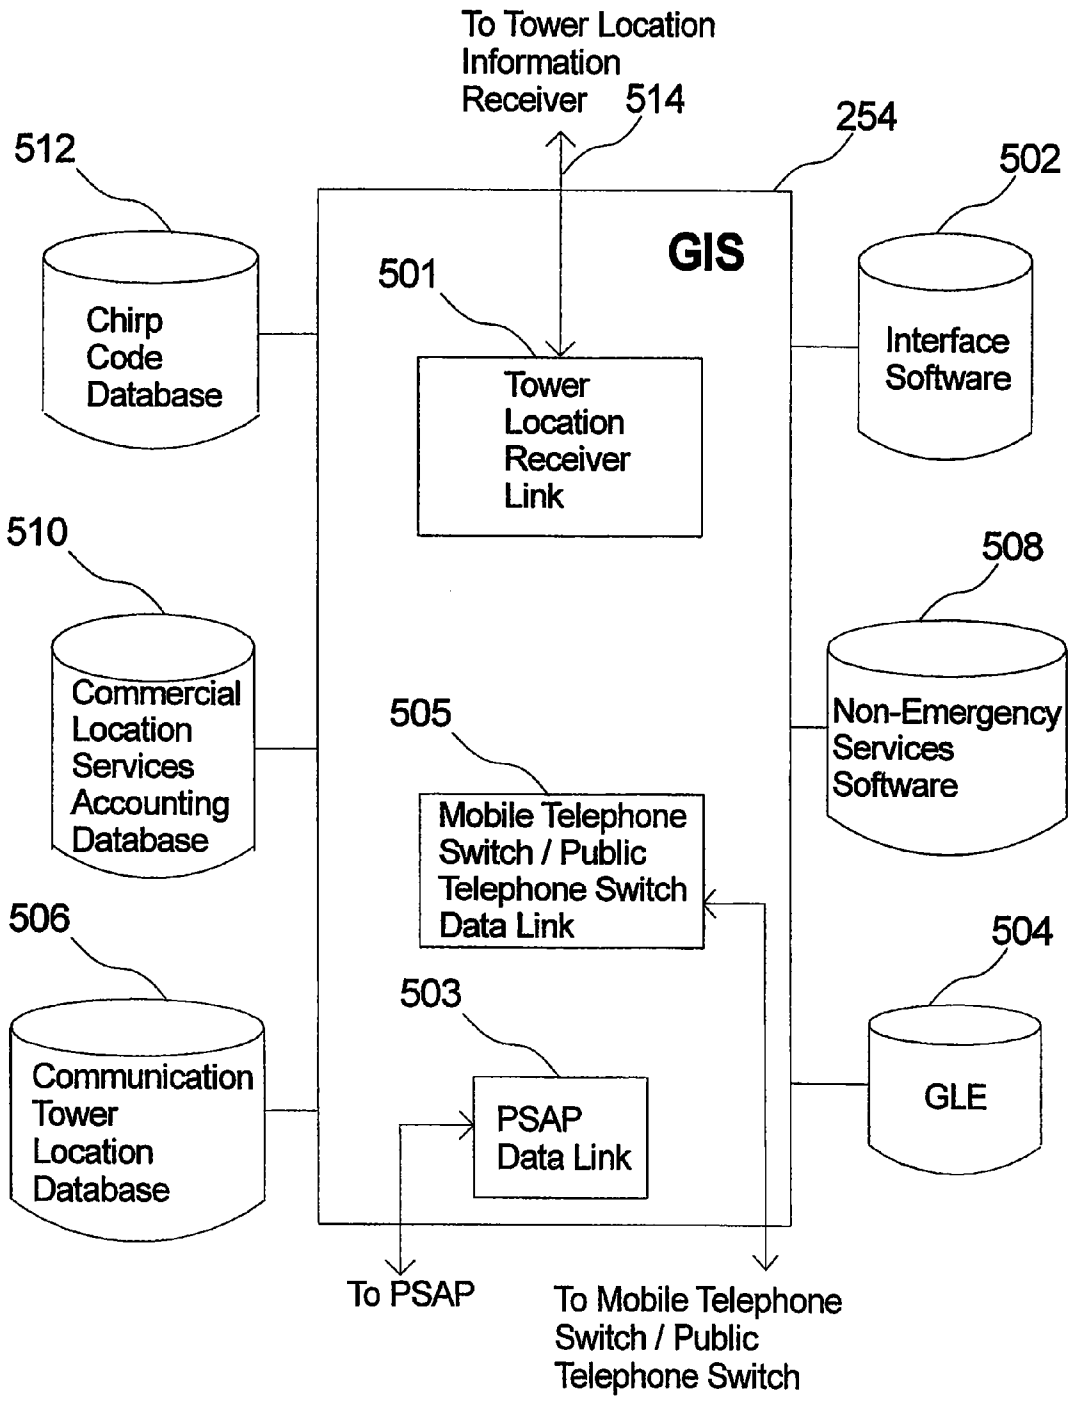

To Tower Location Information Receiver
514
254
512
502
GIS
501
Chirp Code Database
Interface Software
Tower Location Receiver Link
510
508
Commercial Location Services Accounting Database
505
Non-Emergency Services Software
Mobile Telephone Switch / Public Telephone Switch Data Link
506
504
503
Communication Tower Location Database
PSAP Data Link
GLE
To PSAP
To Mobile Telephone Switch / Public Telephone Switch

Fig. 5

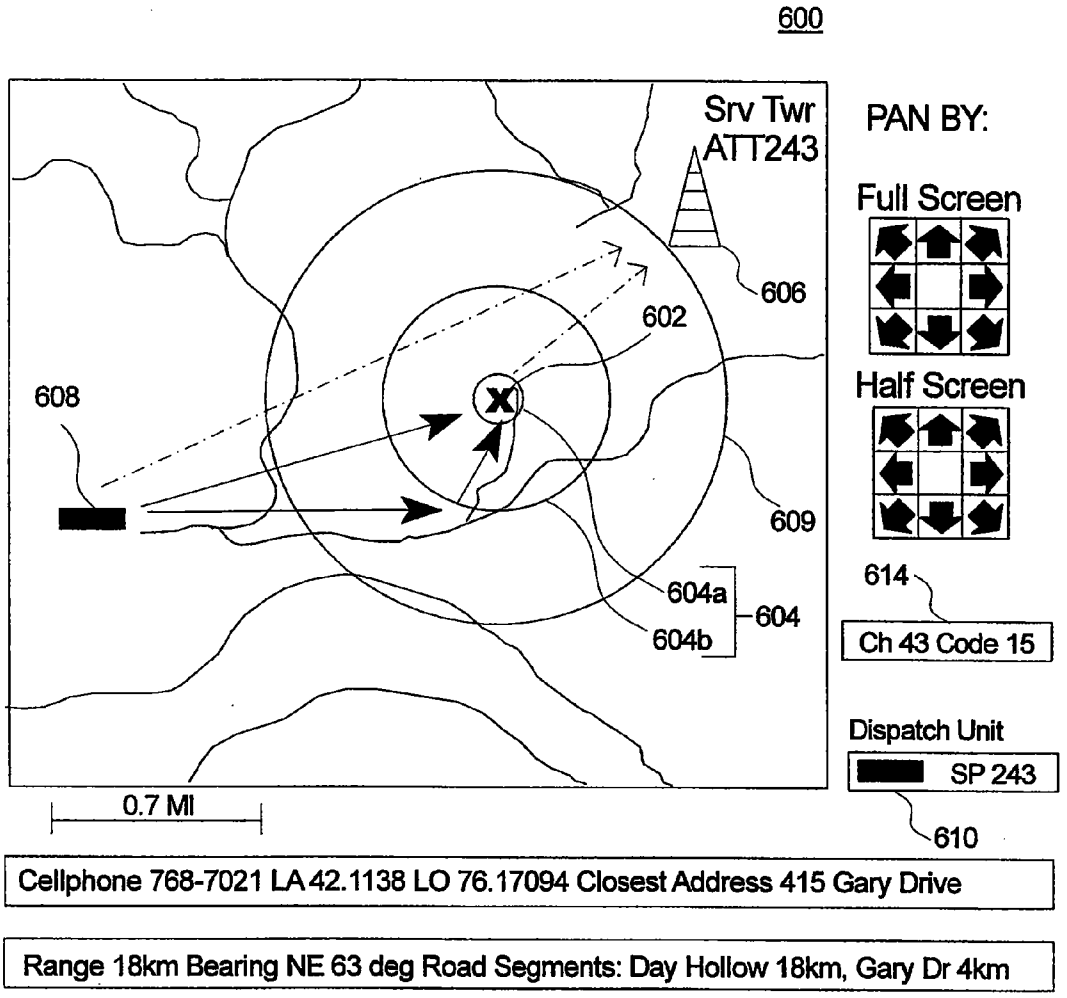

600
Srv Twr
ATT243
606
602
608
609
604a
604
604b
PAN BY:
Full Screen
Half Screen
614
Ch 43 Code 15
Dispatch Unit
SP 243
610
0.7 MI
Cellphone 768-7021 LA 42.1138 LO 76.17094 Closest Address 415 Gary Drive
Range 18km Bearing NE 63 deg Road Segments: Day Hollow 18km, Gary Dr 4km

Fig. 6

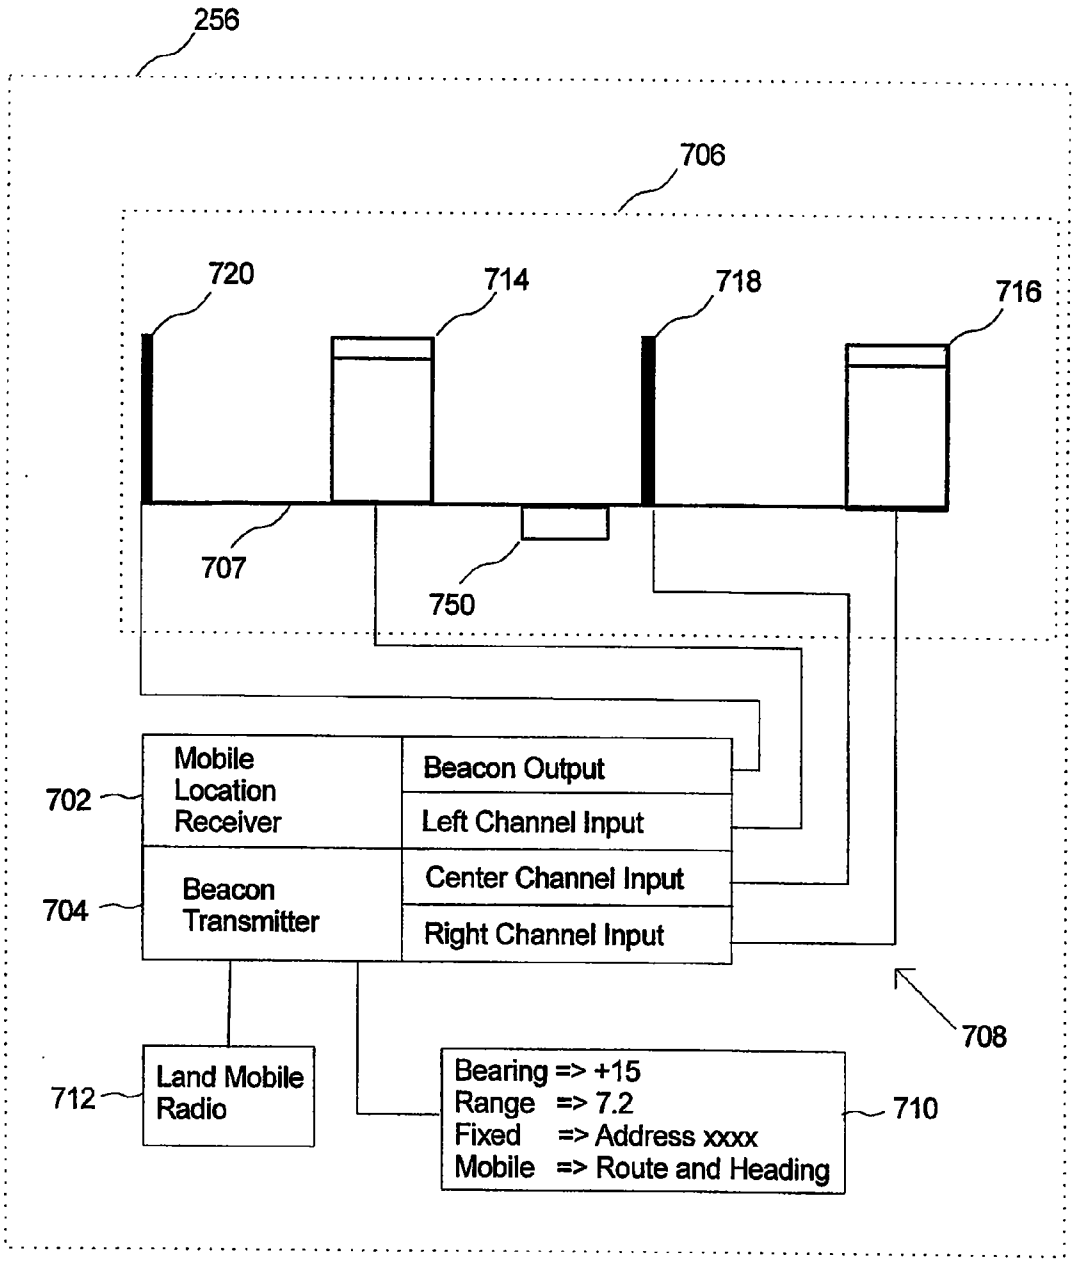

256
706
720
714
718
716
707
750
Mobile Location Receiver
Beacon Output
Left Channel Input
Beacon Transmitter
Center Channel Input
Right Channel Input
702
704
708
Land Mobile Radio
712
Bearing => +15
Range => 7.2
Fixed => Address xxxx
Mobile => Route and Heading
710

Fig. 7

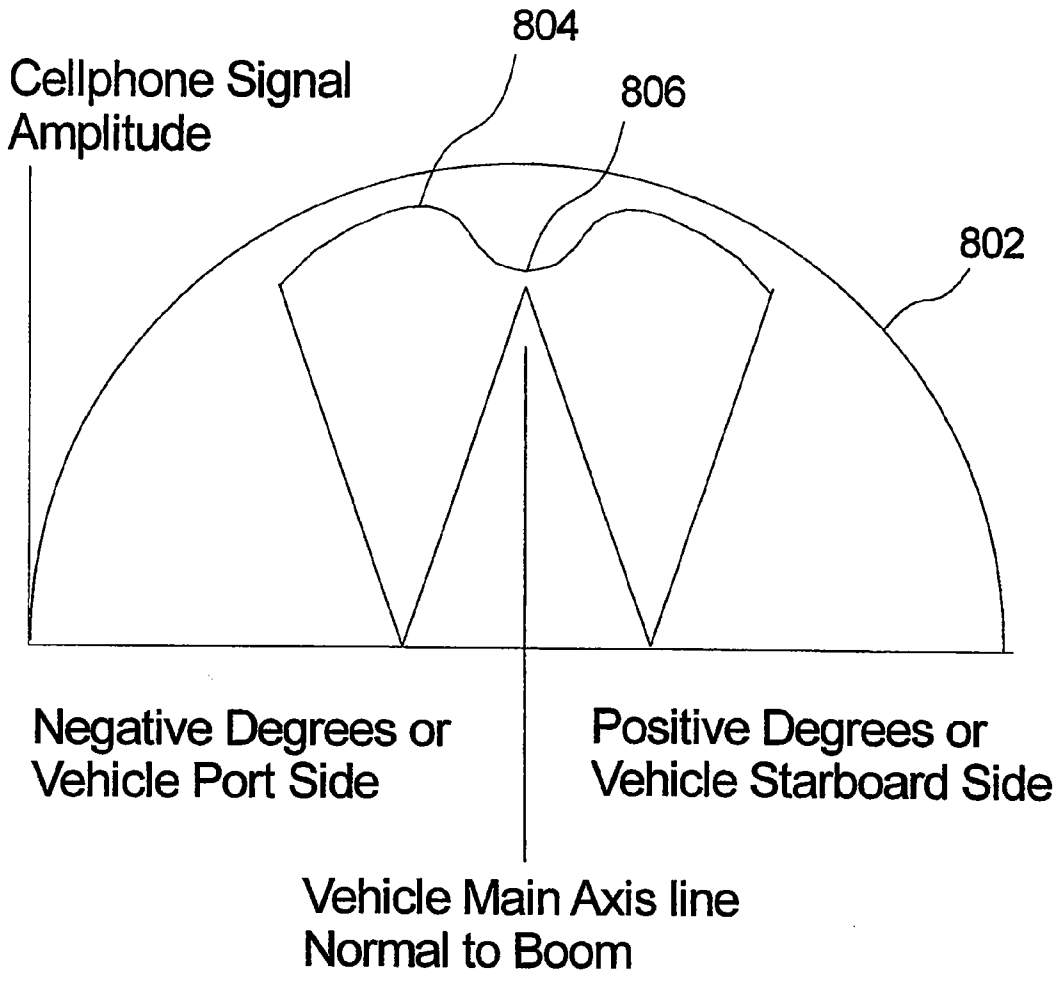

804
Cellphone Signal
Amplitude
806
802
Negative Degrees or
Vehicle Port Side
Positive Degrees or
Vehicle Starboard Side
Vehicle Main Axis line
Normal to Boom

Fig. 8

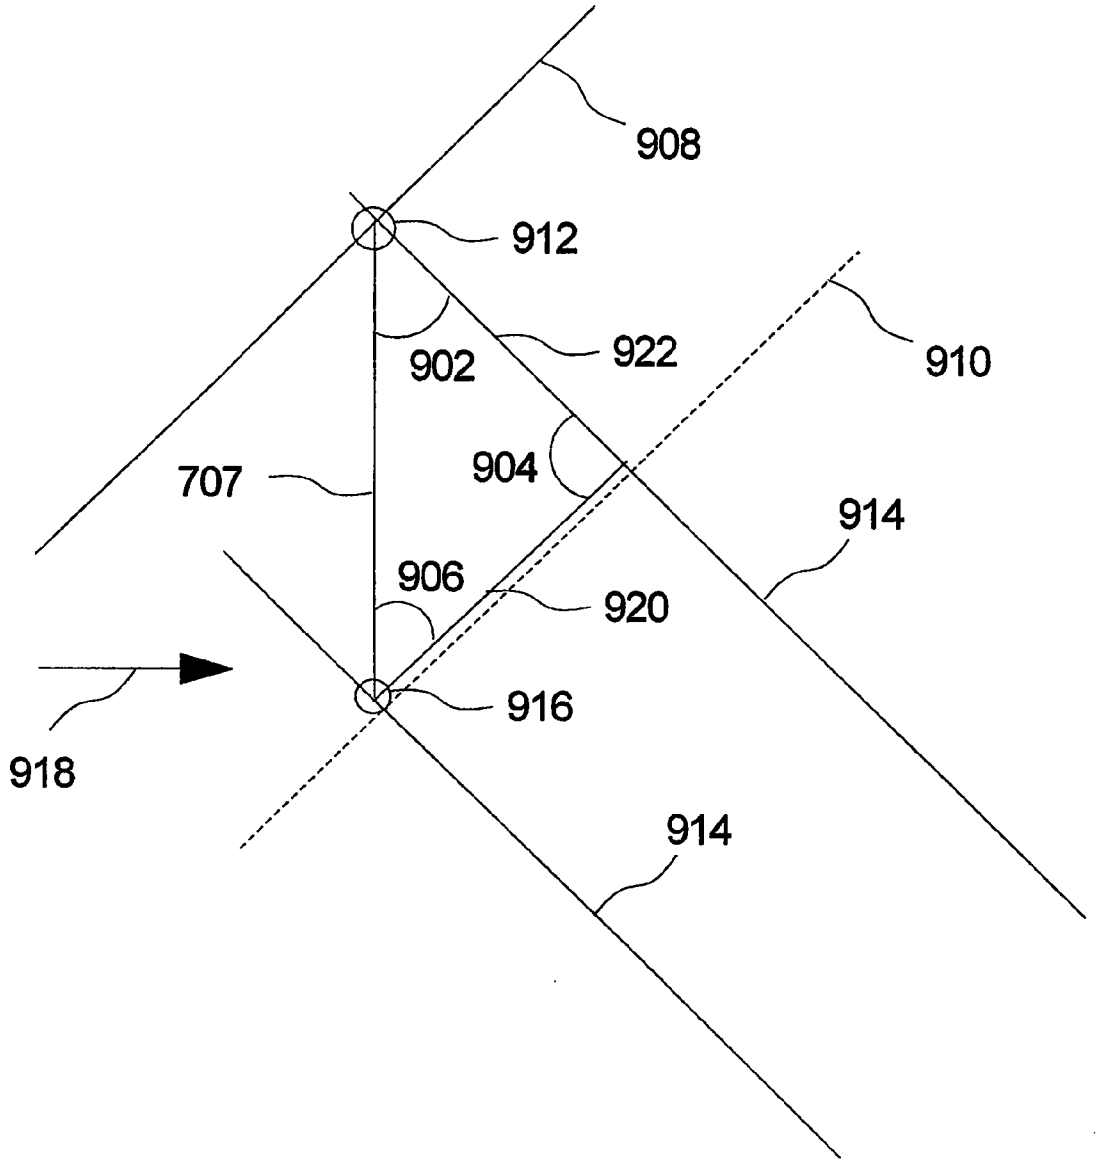


Fig. 9

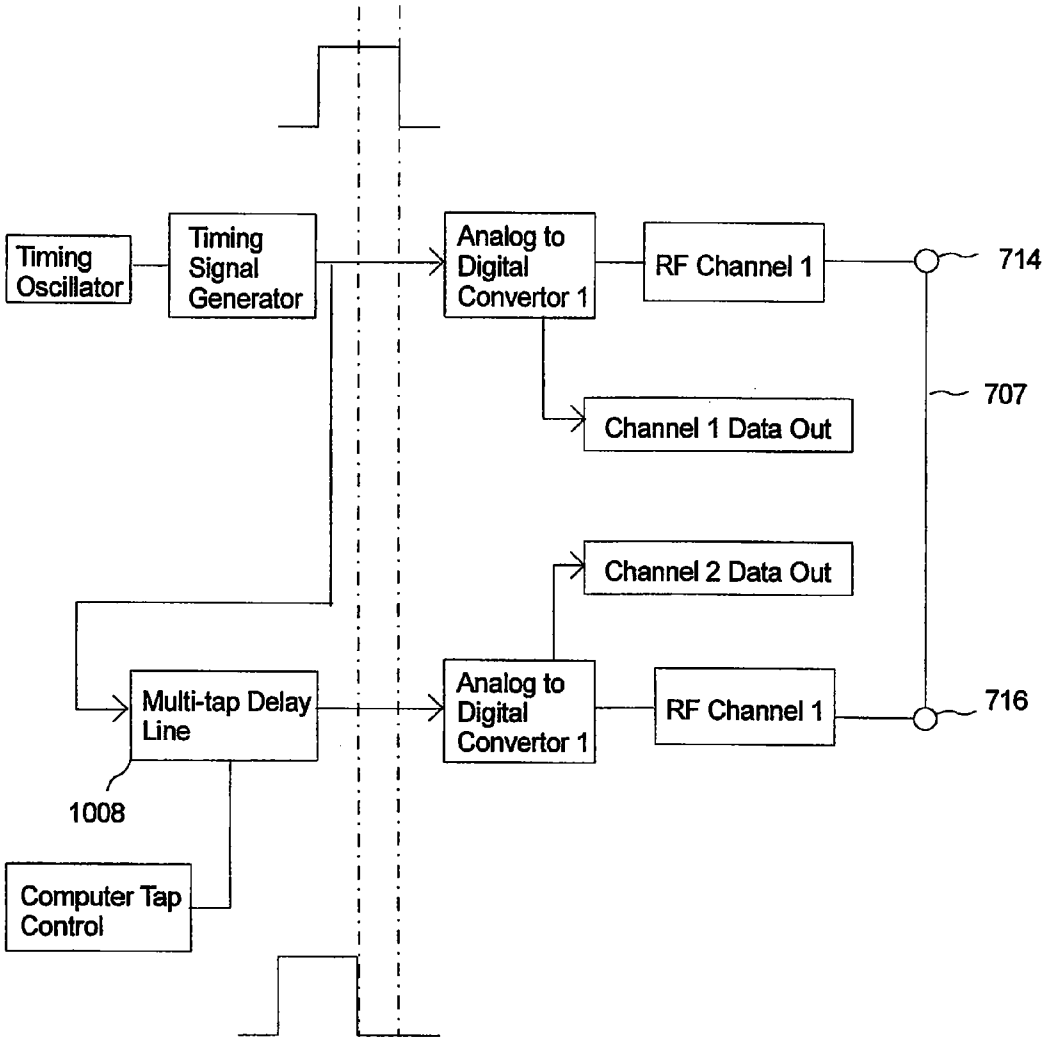

Timing Oscillator
Timing Signal Generator
Analog to Digital Convertor 1
RF Channel 1
714
707
Channel 1 Data Out
Channel 2 Data Out
Multi-tap Delay Line
Analog to Digital Convertor 1
RF Channel 1
716
1008
Computer Tap Control

Fig. 10

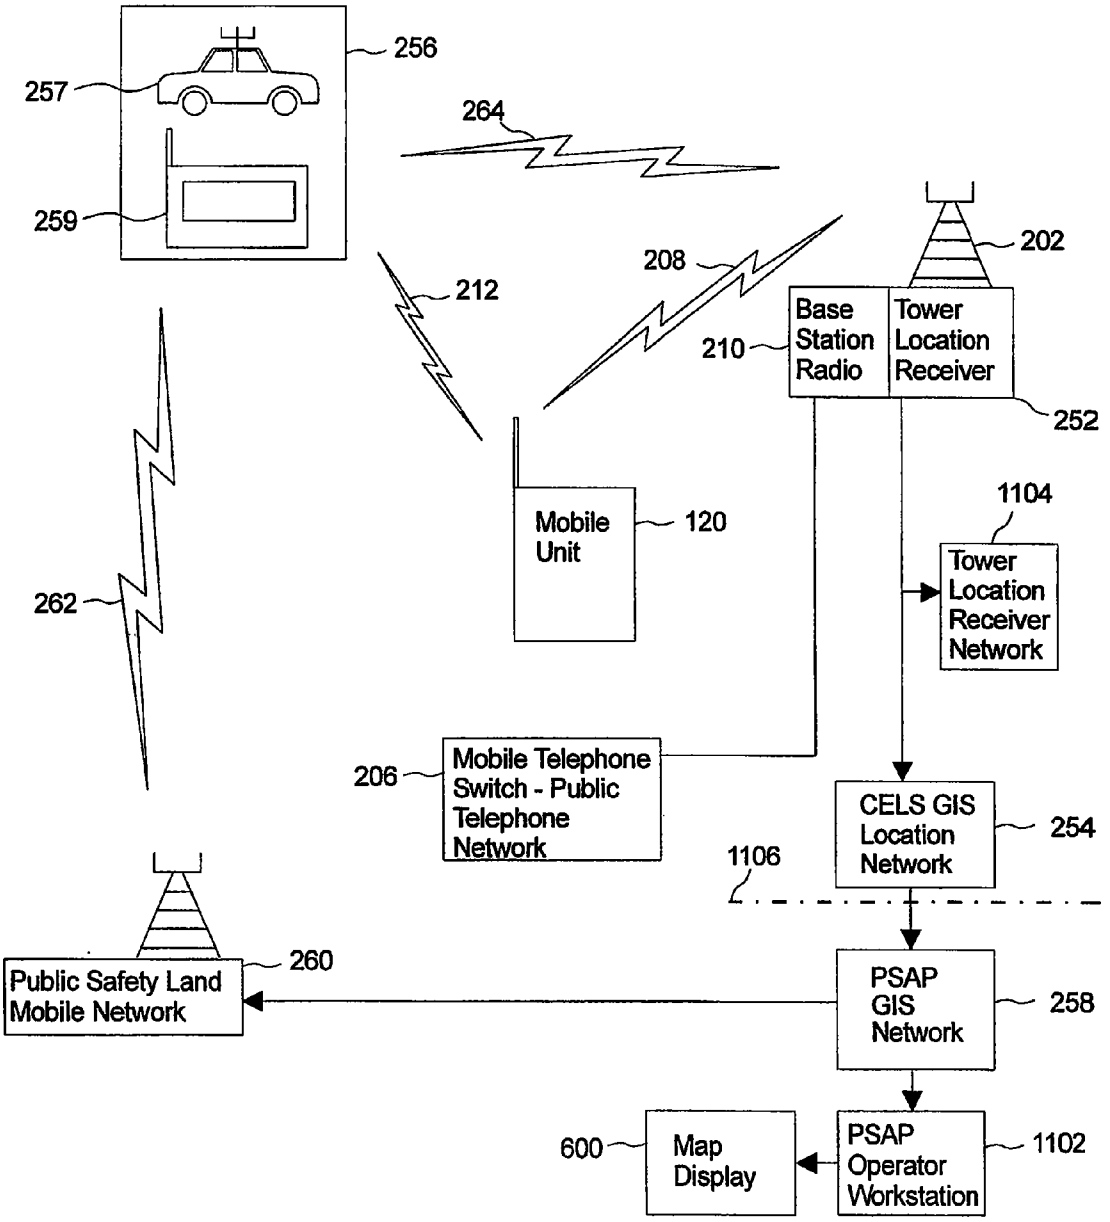

256
257
264
259
202
208
212
Base Station Radio
Tower Location Receiver
210
252
Mobile Unit
120
1104
Tower Location Receiver Network
262
206
Mobile Telephone Switch - Public Telephone Network
CELS GIS Location Network
254
1106
Public Safety Land Mobile Network
260
PSAP GIS Network
258
600
Map Display
PSAP Operator Workstation
1102

Fig. 11

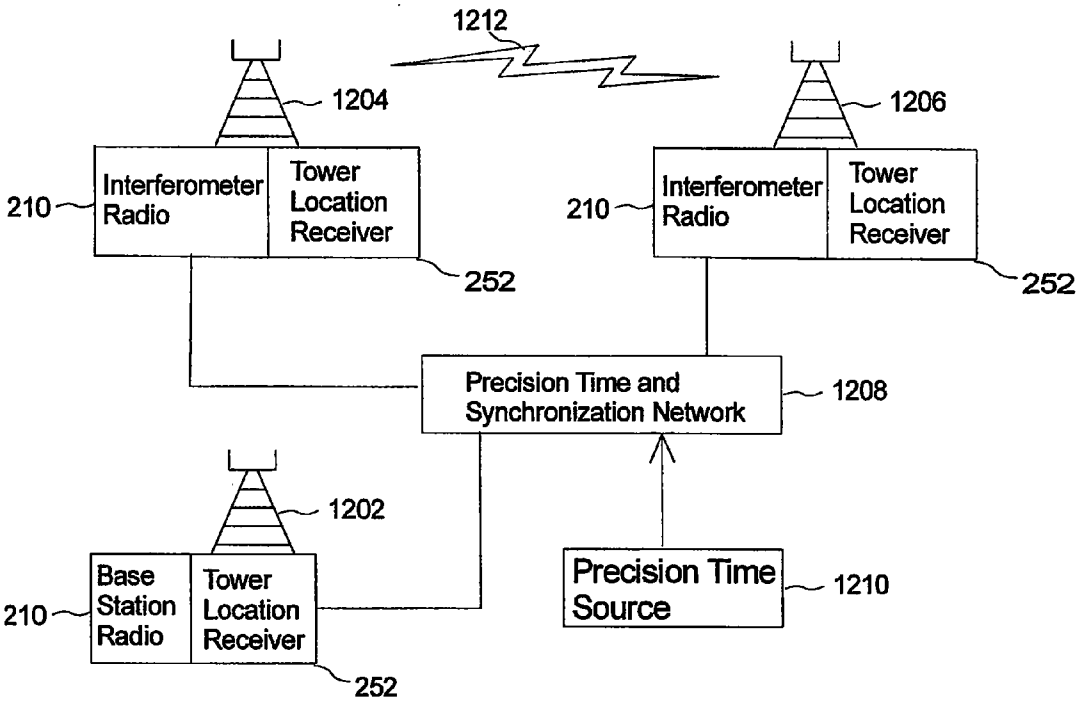

1212
1204
1206
210
Interferometer Radio
Tower Location Receiver
252
210
Interferometer Radio
Tower Location Receiver
252
Precision Time and Synchronization Network
1208
1202
210
Base Station Radio
Tower Location Receiver
252
Precision Time Source
1210

Fig. 12

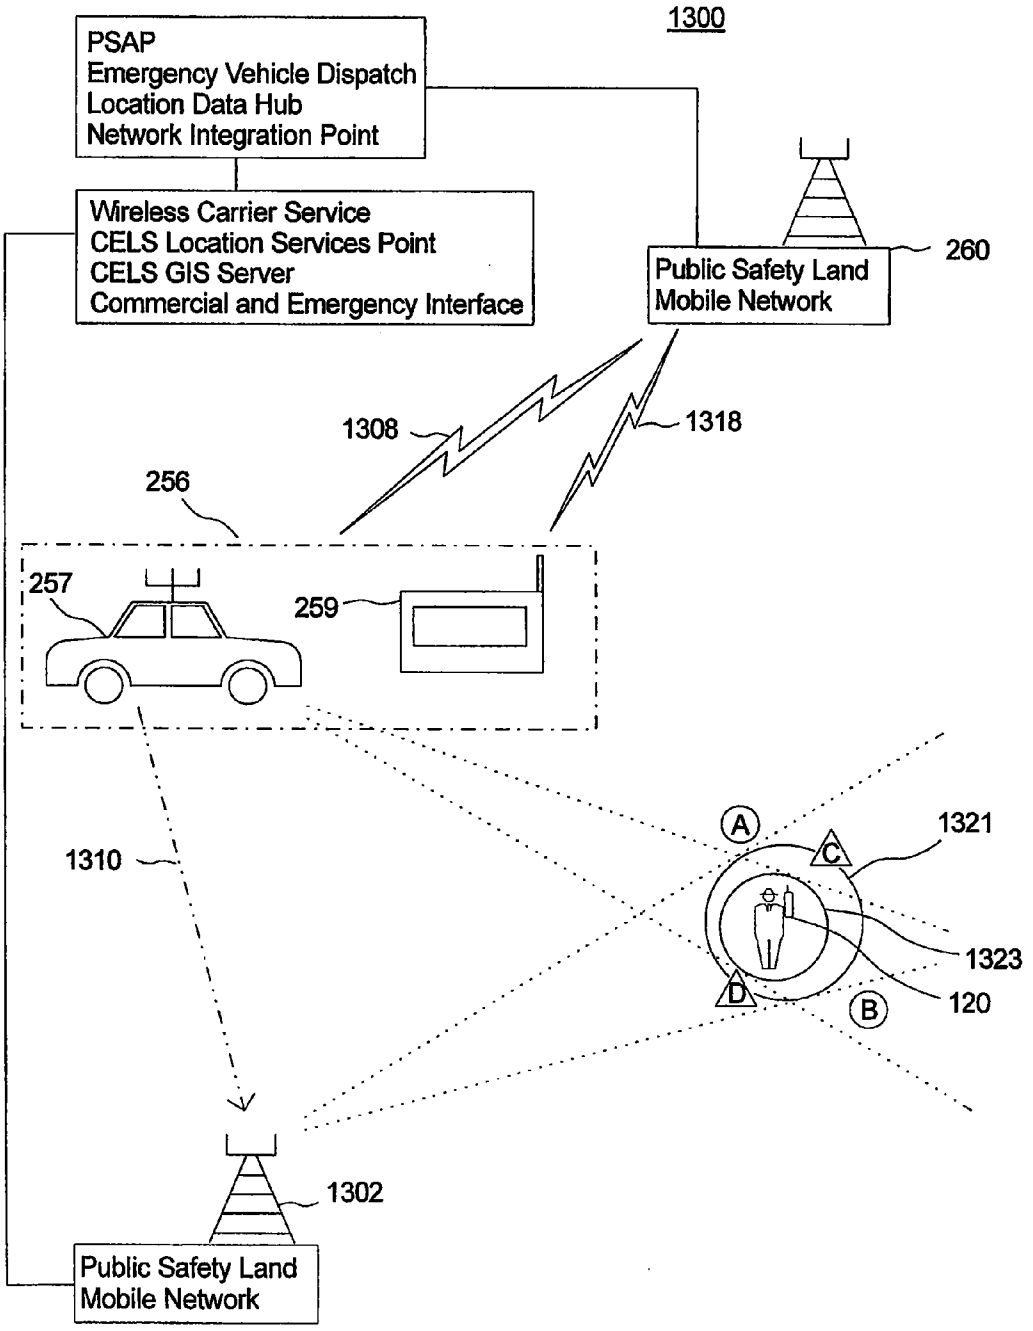

1300
PSAP
Emergency Vehicle Dispatch
Location Data Hub
Network Integration Point
Wireless Carrier Service
CELS Location Services Point
CELS GIS Server
Commercial and Emergency Interface
Public Safety Land
Mobile Network
260
1308
1318
256
257
259
1310
A
B
C
D
1321
1323
120
1302
Public Safety Land
Mobile Network

Fig. 13

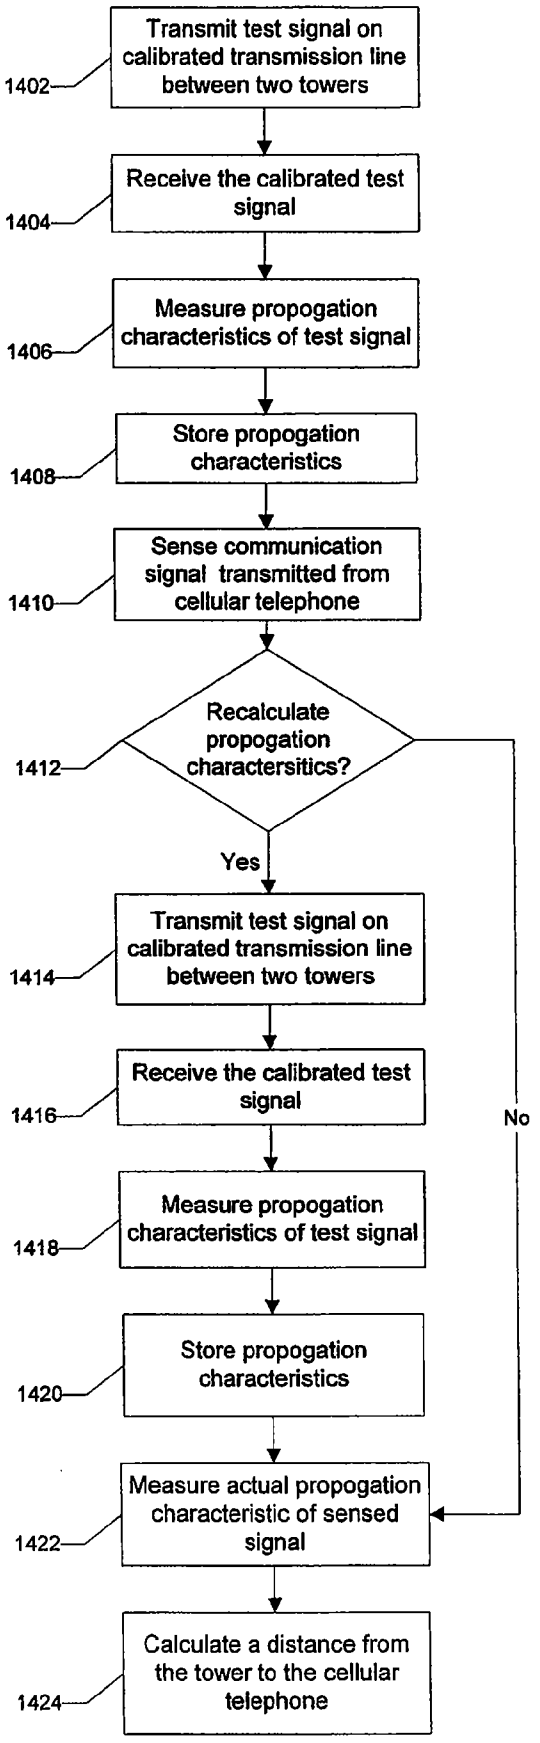

Transmit test signal on calibrated transmission line between two towers
1402
Receive the calibrated test signal
1404
Measure propogation characteristics of test signal
1406
Store propogation characteristics
1408
Sense communication signal transmitted from cellular telephone
1410
Recalculate propogation charactersitics?
1412
Yes
No
Transmit test signal on calibrated transmission line between two towers
1414
Receive the calibrated test signal
1416
Measure propogation characteristics of test signal
1418
Store propogation characteristics
1420
Measure actual propogation characteristic of sensed signal
1422
Calculate a distance from the tower to the cellular telephone
1424

Fig. 14

METHOD AND APPARATUS FOR LOCATING A WIRELESS DEVICE

[0001] This application claims benefit to U.S. provisional patent application No. 60/422,202 filed Oct. 30, 2002, which is hereby incorporated by reference.

[0002] The present invention relates generally to wireless communications, and more particularly to the provisioning of emergency services and location-based services using a wireless network.

[0003] Cellular phone user's need prompt, effective emergency services that require the certain knowledge of a user's location much the same as wire-line users. In 1996 the Federal Communications Commission (FCC) concluded a Consensus Agreement between wireless carriers and public safety representatives to implement a cellular location service in which carriers are required to provide the location of cell phones requesting emergency assistance by dialing 9-1-1. The E-911 Mandate is structured into two phases. The first phase requires wireless carriers to provide Public Safety Answering Points (PSAP), essentially 9-1-1 dispatchers, with information comprising a telephone number of the call originator and the cellular site location managing the 9-1-1 call. The second phase, mandatory by Dec. 31, 2005, implements more location precision through an Automatic Location Identification (ALI) service.

[0004] One previous attempt at E-911 compliance uses a Geographic Positioning Service (GPS) receiver in the mobile unit or handset, classifying it as a handset-centric solution. In this approach, a mobile unit of a wireless network has a GPS receiver embedded therein, so that a position coordinate can be fixed using the GPS satellite network. Once the position coordinate is fixed, it can be transmitted over the wireless network to the servicing PSAP.

[0005] Another previous attempt at E-911 compliance makes use of a location Radio Frequency RF) receiver on the cellular communications tower of a wireless network, classifying it as a network-centric solution.

[0006] FIG. **1** shows the present inventor's analysis of a Time Difference Of Arrival (TDOA) method of locating a wireless caller. System **100** comprises at least three towers **102**, **104**, **106**, each equipped with at least one overlay location receiver **108**, **110**, **112**, respectively, for RF detection of emission signals originating from a caller's mobile unit **120**. Each overlay location receiver unit **108**, **110**, **112**, shares the legacy infrastructure of system **100** without interfering with existing base station equipment.

[0007] To locate mobile unit **120**, each overlay location receiver **108**, **110**, **112**, measures the time for the RF signals propagating from mobile unit **120** in a wireless call to reach tower **102**, **104**, **106**. The differences in these temporal measurements are applied to a triangulation algorithm to identify the location of mobile unit **120** within a general area. Once this area is identified, a mobile telephone switching office **122** forwards this location information, along with the mobile number and voice call, to PSAP **124** for emergency services.

[0008] In FIG. **1**, circle **121** represents a circular error of probability (CEP) that the signal source (mobile unit **120**) is contained within the area. A probability may be associated with the circle. Points A, B, and C bound circle **121**, so this circle is a three-point CEP. The size of the CEP depends on the signal source location relative to the three towers **102**, **104**, and **106**.

[0009] Separately, certain commercial location tracker systems are designed for tracking wildlife. These systems use a radio frequency chirp beacon transmitter and directional receiver. The user follows a vector decoded by the directional receiver to the emitting chirp beacon transmitter.

[0010] In a preferred embodiment of the present invention, a cooperative element location system includes a cellular telephone that is located at an unknown location and may be moving. The system also includes a mobile location component used to zero in on the cellular telephone's location. The mobile location component may be mounted in an emergency vehicle equipped with a directional antenna bar, for example. As the vehicle approaches a first CEP area, the system elements cooperate to generate second and subsequent CEP's of increasing accuracy and decreasing size. The elements may include a mobile location component, one or more cellular telephone tower location receivers, a cellular telephone, and an optional chirp-on-demand signal. In this manner, the mobile location component may provide an emergency vehicle with increasingly accurate estimates of a cellular telephone location, as the vehicle moves toward the general area of that location. An attendant may then take a hand-held device and carry it inside a building, for example, where the elements continue their cooperation to lead the attendant precisely to the cell phone location within the building. An optional interferometer link between cells may further enhance precision.

DESCRIPTION OF THE DRAWINGS

[0011] FIG. **1** is a diagram of a time of arrival solution to locating an emitter.

[0012] FIG. **2** is a diagram of a cooperative element location system in the context of a wireless communication network.

[0013] FIG. **3** is an exaggerated graph of a radiation pattern.

[0014] FIG. **4** is a timing diagram of a chirp-on-demand signal.

[0015] FIG. **5** is a diagram of an exemplary geographic information server.

[0016] FIG. **6** shows a graphical user interface for use with the present invention.

[0017] FIG. **7** is a diagram of a mobile location component including an antenna boom.

[0018] FIG. **8** is a graph illustrating radiation patterns for a directional antenna.

[0019] FIG. **9** is a diagram showing the relationship of time of arrival to angle of arrival of a signal wave front.

[0020] FIG. **10** showing an antenna and associated electronics.

[0021] FIG. **11** illustrates message flow in a cooperative element location system.

[0022] FIG. **12** is a diagram of an interferometer link between representative cells.

[0023] FIG. **13** is a representative diagram showing a series of Circular Error of Probability estimations of decreasing size.

[0024] FIG. **14** is a flowchart describing the process of using towers with an interferometer link to locate a cellular telephone.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0025] Referring now to FIG. **2**, a wireless communication network **200** is shown comprising at least one communications tower **202**, at least one mobile unit **120**, and a mobile telephone switch/public telephone network **206**.

[0026] Communication tower **202** receives a first signal **208** from mobile unit **120** when a user of mobile unit **120** initiates a cellular call. In a preferred embodiment, signal **208** may be a radio frequency (RF) signal. In accordance with normal cellular operation, a base station receiver **210**, operatively coupled to the at least one communication tower **202**, process signal **208**. Using digital signal processing techniques, base station radio transceiver **210** analyzes signal **208** to determine whether mobile unit **120** is authenticated for service.

[0027] Under current cellular protocols, a mobile unit's unique Electronic Serial Number (ESN) provides the basis for cellular authentication. Mobile unit **120** transmnits its ESN to tower **202** when a call is initiated. Base station transceiver **210** analyzes signal **208** to determine the ESN of mobile unit **120**. The ESN is referenced in an authentication database, which indexes the ESN to a user's account information. Once the ESN is authenticated, base station radio **210** issues a control channel and channel assignment. The channel may be assigned in frequency, time, or code representative of the network technology.

[0028] Upon authentication, base station radio transceiver **210** analyzes signal **208** to retrieve the dialed digit sequence. The call is connected to mobile telephone switch/public telephone network **206**. The dialed digit sequence determines call routing and final destination.

[0029] Now, in accordance with one embodiment of the invention, a cooperative element location system **250** comprises a tower location receiver **252**, a Geographic Information Server (GIS) **254**, and a mobile location component **256**. Tower location receiver **252** is operatively connected with communication tower **202**, and configured to determine a first location calculation of mobile unit **120**. Tower location receiver **252** receives signal **208** from mobile unit **120**. Tower location receiver **252** decodes signal **208** to search for a special predetermined sequence of digits, which indicate a need or request for an emergency or non-emergency location-based service. For example, these digits may include 9-1 -1, indicating a request for emergency services, 4-1 -1, indicating a request for information services, 5-1 -1, indicating a request for yellow pages (business directory) services, a sequence of digits for roadside assistance, or some other predetermined sequence. Preferably, the sequence may consist of three digits.

[0030] If tower location receiver **252** does not identify any of the predetermined sequences indicating that there is no request for emergency or non-emergency location-based services, no further action is taken. However, if the dialed digits represent a request for an emergency service or a non-emergency location-based service, tower location receiver **252** performs a location measurement on signal **208**.

[0031] The location measurement includes a range measurement and bearing measurement, which in combination can determine an approximate location of mobile unit **120** relative to the location of tower **202**. GIS **254** converts the measurements to a first location calculation of mobile unit **120**.

[0032] Depending on the nature of environmental circumstances and the distance of mobile unit **120** from tower **202** at the moment tower location receiver **252** takes the location measurement, the first location calculation may not meet E-911 performance and accuracy requirements. However, the first location calculations will meet the needs of many non-emergency location-based services.

[0033] The first location calculation is a map space location comprising a latitude and longitude position of mobile unit **120**.

[0034] In one embodiment, GIS **254** may be further configured to calculate a Circular Error Probability (CEP) measurement. A CEP measurement provides statistical probabilities as to the accuracy of the location calculation.

[0035] In an alternative embodiment, the tower location receiver **252** itself may be equipped to calculate the first location calculation and/or the CEP measurement, which are subsequently forwarded to GIS **254**.

[0036] If mobile unit **120** has requested a non-emergency location-based service, GIS **254** forwards the location calculation to mobile telephone switch/public telephone network **206**, along with the digit sequence so network **206** may appropriately route the location calculation. The location calculation may be routed to a commercial service providing location-based information to mobile unit **120**. In other embodiments, GIS **254** can provide the commercial service

[0037] GIS **254** routes the first location calculation and any CEP measurement to a servicing PSAP GIS network **258**. This link can be a dedicated connection, or alternatively, packet routed through mobile telephone switch/public telephone switch **206** to PSAP GIS network **258**.

[0038] PSAP GIS network **258** receives the location calculation and any CEP measurement so that a PSAP operator can analyze location information, including the location calculation and any CEP measurement, to efficiently manage the progress to the site of the emergency.

[0039] PSAP GIS network **258** dispatches a vehicle or attendant over public safety land mobile network **260** to a general area identified by the first location calculation in cooperation with any available CEP accuracy measurement. Public safety land mobile network **260** is representative of the Private Land Mobile Radio Network used by police, fire, and medical services in accordance with 47 CFR § 90. A PSAP operator vocally confers the general location of the emergency site, which is inherently the location of mobile unit **120**, using a first voice channel of an RF signal **262** on public safety land mobile network **260**.

[0040] Mobile location component **256** may for example comprise a vehicle mount **257** and/or a hand-held device

259. Mobile location component 256 may be in physical association with an emergency vehicle or attendant proceeding to the site of an emergency, and is positioned some distance from mobile unit 120 in accordance with the first location calculation. Upon receipt of the first location calculation, mobile location component 256 is moved in the general direction of mobile unit 120 as indicated by arrow 261.

[0041] Mobile location component 256 is configured to determine a second location calculation of mobile unit 120. Mobile location component 256 is configured to receive a second, data channel of RF signal 262 having parameter exchange protocols for receiving data necessary for fixing and tracking signal 212 from mobile unit 120. In a preferred embodiment signal 212 may be an RF signal similar to signal 208. The data includes the unique ESN of mobile unit 120 and its control channel and channel assignment issued by base station transceiver 210. Using this data, mobile location component 256 is initialized to lock to signal 212.

[0042] It should be appreciated that while mobile location component 256 is configured to receive both the voice and data channel of signal 262 in the present embodiment, other embodiments include a mobile location component configured to receive the data channel of signal 262, while a separate radio receiver is configured to receive the voice channel of signal 262.

[0043] In still yet another embodiment, a radio receiver may be capable of receiving the voice channel and data channel of signal 262.

[0044] Most emergency vehicles or attendants communicate with dispatchers using two-way data/voice radios communicating over RF modulation signal 262 to public safety land mobile network 260. These radios are sophisticated in that they can multiplex several low rate channels into one high-speed air link. For example, the Federal Communications Commission (FCC) has opened up the UHF band for land mobile radios capable of 25.6 Kbp/s. These are commercial units with a voice channel and multiple RS-232 data channels, enabling the addition of data protocols to the voice signal simultaneously without interferences. Accordingly, mobile location component 256 cooperates with an existing radio configured to receive the data from public safety land mobile network 260. The data, which require a low data rate channel, may be transmitted over one of the multiple RS-232 data channels alternatively, mobile location component 256 comprises a receiver for receiving the data directly from signal 262 over public safety land mobile network 260.

[0045] As the emergency vehicle or attendant approaches mobile unit 120 so does the associated mobile location component 256 as shown by arrow 261. Mobile location component 256 will acquire signal 212 at some distance from mobile unit 120. If tower location receiver 252 performs the first location measurement on a good signal, there will be sufficient information to engage mobile location component 256 with signal 212 at several miles from mobile unit 120. Once engaged, mobile location component 256 performs a new location measurement for determining a second location calculation.

[0046] As the distance decreases between mobile location component 256 and mobile unit 120, mobile location component 256 refines the measurement, which becomes increasingly more accurate relative to the actual location of mobile unit 120 as shown by arrow 263. This process continues until the highest accuracy is achieved as mobile location component 256 converges upon mobile unit 120 as shown by arrow 265 mobile location component 256 continuously transmits a refined measurement over public safety land mobile network 260 to GIS 254. GIS 254 continuously calculates and refines the second location calculation of mobile unit 120. Any CEP measurement may also be refined to reflect the updated location measurement. PSAP GIS network 258 receives the second location calculation to assist the PSAP operator in efficiently coordinating emergency services.

[0047] In the present embodiment, mobile location component 256 includes a beacon transmit unit for transmitting a tracking beacon signal 264 for determining the present location of mobile location component 256 and consequently the location of the associated emergency vehicle or attendant. To initiate the tracking beacon, a PSAP operator requests a tracking channel be assigned for the beacon. The request alerts tower location receiver 252 to look for the tracking beacon signal 264. The request crosses the network demarcation and is received by GIS 254 and forwarded on to tower location receiver 252. The tracking channel will be on or near the frequency channel used by mobile unit 120. Tower location receiver 252 differentiates the modulation of the tracking signal to process with little interference. Tracking beacon signal 264 is not on continuously but on for only a low duty cycle to limit its interference with the voice channel of signal 208. Tracking beacon signal 264 is specifically designed for location accuracy. In fact, if the tracking beacon source is moving, this should negate some propagation path ambiguities providing even more location accuracy. Tracking beacon signal 264 carries this location data information at regular intervals to communication tower 202, where tower location receiver 252 receives tracking beacon signal 264, decodes tracking beacon signal 264, and forwards the location data to PSAP GIS network 258. Because there is a chance that more than one tracking beacon signal 264 is being transmitted if CELS 250 is servicing other emergencies, each tracking beacon signal 264 is assigned a unique beacon identification code so tower location information receiver 252 looks for tracking beacon signal 264 and appropriately associates the emergency services of mobile unit 120, and not another mobile unit requesting emergency services. In this manner, an operator at PSAP GIS network 258 who is handling the emergency service request from mobile unit 120 will receive the correct location data of the vehicle or attendant reporting to the emergency site. The PSAP operator can provide updated progress reports to the user of mobile unit 120 as to the current location of the vehicle or attendant reporting to the scene of the emergency through voice communication. The beacon allows the cell tower receiver to refine the coefficients used in the location algorithm and to improve the accuracy.

[0048] In one embodiment, the beacon transmit code is uniquely built into the beacon transmit unit of mobile location component 256 and associated with the emergency vehicle of the attendant by way of manual entry into PSAP and forwarded to GIS 254 and eventually tower location receiver 252 at the appropriate time.

[0049] In another embodiment, the beacon transmit code is uniquely generated by PSAP GIS network **258** and uploaded to the beacon transmit unit as needed.

[0050] While the present embodiment discloses the beacon transmit unit as an integral member of mobile location component **256**, the tracking unit may be independent in alternative embodiments.

[0051] The first location calculation and the second location calculation performed by GIS **254** is now discussed, including range and bearing measurements taken for achieving these location calculations is now described. Referring to FIG. **3**, a mobile unit radiation pattern **308** representative of signal **208** received by tower location receiver **252** or signal **212** received by mobile component **256** is shown. Mobile unit radiation pattern **308** is characterized by radius ("r") **310**, length ("l") **314**, and height ("h") **312**.

[0052] The receive signal level (RSL), from which the bearing and range measurements can be obtained, should follow the "one over distance squared" law for a propagating spheroid surface, where power density is a function of the spheroid surface area. Because the originating mobile unit signal antenna power generally is limited to 600 milliwatts, the radiation sphere volume will always contain the 600 milliwatts. However, as the sphere grows, the surface energy density in watts per square meter follows the rule for a spherical sector:

$$A_t=3\pi r^2$$

where A_t is the area of the spherical sector surface, and

$$V=\frac{2\pi r^2 h}{3}$$

where V is the volume of the spherical sector which estimates free space loss Lf of the signal.

[0053] In assuming r is the location distance vector, h is assumed the error. For short distances r, error h will be noteworthy, and for long distances r, error h will be negligible. However, a sphere is not always a practical radiation pattern due to the reflection and absorption properties of Earth's surface. Earth's surface becomes a reflector under certain conditions and an absorber of signals under other conditions. The radiation pattern may be more hemispherical in practice.

[0054] To calculate range and bearing of an RF signal, certain assumptions need to be made about its power density. Those assumptions include free space signal loss plus a number of additional factors. Those factors can be lumped into an average aggregate value that varies by climate and environmental conditions or time of year. For example, if rainy weather conditions exist, signal loss would be expected to be higher. Heavy downpours absorb more signal than light rainfall, so rainfall rate is an important factor. Fog and temperature inversions also play a modest part. Therefore L_p is total propagation loss consisting of free space loss L_f and climate loss L_c. Most Communication towers each have several antennas with two or more to a cell face. Each antenna is connected to at least one channel and space diversity could apply. By way of example let antenna gains be respectively G_{T1} and G_{T2} where T**1** represents tower antenna one and T**2** represents tower antenna two and so forth. The mobile unit's antenna gain is G_p. Total gain per channel (G_1, G_2, respectively) is then:

$$G_1=G_{T1}+G_p$$

and

$$G_2=G_{T2}+G_p$$

Then RSL for each channel becomes:

$$RSL_{L1}=(G_{T1}+G_p)-(L_f+L_p)+P_t$$

and

$$RSL_{L2}=(G_{T2}+G_p)-(L_f+L_p)+P_t$$

where P_T is the mobile unit's transmit power.

RSL is measured by tower location receiver **252**.

[0055] G_{T1} and G_{T2} are known variables. While G_p is not known, it may be accurately estimated by an assumption. G_p may be a small negative value when using a hand held mobile unit and a small positive value when using an automotive installation. L_p can be derived from a signal strength profile such as published data. Each communication tower has a signal strength profile from measured values at the time of tower construction, and are necessary to determine handoff from tower to tower. This data can also be used to determine propagation losses. Alternatively, the signal strength profile may be measured by an interferometer or some other accurate means.

[0056] Although not required by the present invention, tower-to-tower communications can be used to more accurately compute propagation losses as part of a rough interferometer setup, especially under current atmospheric weather conditions. For example, if a calibrated power level signal is put on a calibrated transmission line to a calibrated antenna, then path loss could be measured. Knowing the propagation velocity, location accuracy can be improved.

[0057] Free space loss may be computed from tower face to tower face and any extra loss is mostly due to climate and fading factors. Therefore, all the variables of the RSL_{L1} equation are known except for L_F for which it is solved. Range and bearing may be calculated therefrom. The range and bearing measurement provide an estimate of the location of the mobile unit.

[0058] At this point no provision has been made for noise interference. However, a noise figure can be included in L_p. Therefore, an accurate expression can be developed to compute range and bearing from a single communication tower or a single mobile location information component. Although not required by the present invention, multiple communication towers can compute a range and bearing measurement on a single mobile unit provided that multiple towers can receive a signal from the mobile unit. This may improve location accuracy. In this case, the original serving tower carrying the voice call has a means to indicate that it is the prime serving location receiver, so as to insure an emergency request be forwarded to the appropriate PSAP network servicing the caller's area.

[0059] While not required by the above-disclosed embodiment, the present invention may additionally or alternately incorporate a mobile unit configured to transmit a cooperating chirp-on-demand signal to improve location performance. This chirp-on-demand signal significantly improves the accuracy of the first location calculation, as well as the

fine location calculation. A chirp-on-demand signal would offer additional accuracy not available with normal RF emissions from mobile unit **120** and a single communication tower solution. While emergency services will benefit from a chirp-on-demand signal, it is especially significant to commercial services that most likely do not have the benefit of implementing mobile location component **256**. The chirp signal, consisting of a known frequency and a calibrated time duration between chirp bursts, provides a reasonable accurate location determination resolving enough location ambiguity for commercial revenue generation using a single communication tower **202**. These "radar-like" chirp signals provide resilience to RF interference and to low quality RF path propagation. The chirp-on-demand signal does not interfere with ongoing functions even while within signal **208** or signal **212** of mobile unit **120**. The chirp-on-demand signal weaves into a voice call while one is ongoing.

[**0060**] Chirp-on-demand works by varying the amplitude and frequency of signal **208** and signal **212** from mobile unit **120** in a known, accurate pattern. Tower location receiver **252**, or optionally, mobile location component **256**, can extract known propagation variables from signal **208** or signal **212** using digital signal processing techniques. By analyzing these additional propagation variables, the RSL can be calculated to a more precise measurement.

[**0061**] In this alternative method, mobile unit **120** is capable of providing a calibrated chirp-on-demand signal. With respect to government performance and accuracy requirements, the chirp method may be able to meet the accuracy specification without the use of a mobile location component **256** in many situations such as, for example, flat terrain areas.

[**0062**] FIG. **4** shows an example of a segmented, calibrated chirp signal **400** weaved into signal **208**. In order to alter the frequency pattern of signal **400**, a calibrated time and calibrated time interval T_1, T_2, . . . T_x has been added.

[**0063**] In one embodiment of chirp-on-demand, mobile unit **120** is configured to uplink or receive absolute time as part of the RF protocol then some form of system synchronization is possible. Time intervals T_1, T_2, . . . T_x may also be added by mobile unit **120** itself. Knowing absolute time and time intervals T_1, T_2, . . . T_x, the propagation path then can be thought of as an unknown delay line. At ingress of this delay line, the calibrated time signal is injected, eventually yielding calculated information about path range. Propagation velocity variations across the cell space will be minimal because propagation velocity generally will be uniform. Propagation velocity can be measured from tower to tower as part of a rough interferometer setup.

[**0064**] With knowledge of the propagation velocity and time intervals T_1, T_2, . . . T_x of chirp signal **400**, range accuracy is improved.

[**0065**] Frequency likewise sometimes detects changes in path length and direction. Changes in RSL due to chirp frequency variations would help average out the measured RSL.

[**0066**] Likewise, calibrated chirp amplitude variations A_1 . . . A_x will help average out RSL amplitude deviations. If, for example, a chirp code comprises a 3 dB change in amplitude, but the tower receiver only receives a 2.5 dB change in amplitude, then most likely diffraction is deducting from the measured RSL and would be 0.5 dB higher than the computed RSL. This helps to improve RSL accuracy.

[**0067**] This demonstrates that chirp-on-demand can improve range accuracy as measure by the cell tower location receiver and add improvement to commercial location services.

[**0068**] Referring now to FIG. **5**, one embodiment of GIS **254** is shown. GIS **254** integrates between commercial and emergency services by providing a common denominator for both.

[**0069**] A demarcation point may exist between PSAP GIS network **258**, which is a publicly serviced network, and GIS **254**, which would most likely be privately serviced by a wireless carrier. GIS **254** comprises a tower location receiver data link **501**, a PSAP network data link **503**, and a mobile telephone switch/public telephone switch data link **505**. A common message format enables interoperability and the transfer of data from one network to the other. The common message format standard could be agreed upon by PSAP interest groups and wireless carrier interest groups.

[**0070**] GIS **254** comprises interface software **502** that establishes a common message format. Interface software provides protocols for the transfer of data including a range and bearing measurement, a latitude and longitude position, a CEP measurement, unique codes, RF signal intercept data, or other data as well, across tower location receiver data link **501**, PSAP data link **503**, and mobile telephone switch/public telephone switch data link **505**.

[**0071**] Where GIS **254** is at a demarcation point between a wireless carrier's network and PSAP GIS network **258**, interface software **502** implements the appropriate protocols for communication therebetween. Interface software **502** facilitates communication of GIS **254** with tower location information receiver **252**, PSAP GIS network **258**, and mobile location component **256**.

[**0072**] GIS **254** comprises a geographic location engine (GLE) **504** configured to generate a map space location from the first measurement from tower location receiver **252** and, in the case of an emergency service request, the second measurements from mobile location component **256**.

[**0073**] GIS **254** includes a communication tower location database **506** comprising a unique identification number for each of a plurality of communication towers and corresponding geographic locations. These geographic locations are in a map space, comprising latitude and longitude positions. In this manner, a single GIS may service a plurality of communication towers.

[**0074**] Interface software **502** receives a location measurement from tower location receiver **252** along with the identification number of servicing tower **202**. GLE **504** generates the location calculation of mobile unit **120** by searching database **506** for the identification number and upon finding a matching identification number, calculating the location calculation from the corresponding geographic location of servicing tower **202** and the location measurement.

[**0075**] In some embodiments, GLE **504** will geocode the latitude and longitude position to a street address using methods familiar in the art. This is most likely useful for commercial services, or for third party commercial vendors

who do not provide their own geocoding software offsite. GLE **504** may geocode to street addresses for emergency services, although this is more likely to be handled by PSAP GIS network **258** to comply with specific geocoding performance standards.

[**0076**] Non-emergency services software **508** provides non-emergency location-based services that may be requested by mobile unit **120**. These services may include navigation directions, commercial location information on restaurants or retail outlets in the geographic area of mobile unit **120**, etc. GIS **254** may log such transactions in a commercial location services accounting database **510**, such as by the ESN of requesting mobile unit **120** for accounting purposes. Alternatively, if a subscriber business methodology is employed, GIS **254** first references the requesting ESN in commercial accounting database **510**, and upon a match, non-emergency services software **508** provides the requested service.

[**0077**] If cooperative element location system **250** employs the chirp-on-demand capability, GIS **254** is operatively configured to a chirp code database **512**. Chirp code databases **512** accommodates a pool of chirp codes. When a request for emergency or non-emergency location-based service is received, tower location receiver **252** decodes the dialed digit sequence and engages location-based services by sending the ESN to servicing GIS **254** via data link **501**. GIS **254** receives the ESN at connection **514** and a database is searched for a matching ESN to identify whether requesting mobile unit **120** is chirp capable.

[**0078**] If no match is found, a message indicating that the chirp feature is not possible is sent back to tower location receiver **252**. Tower location receiver **252** takes bearing and range measurements without searching for a chirp signal. G1S **254** calculates the first location calculation as previously described.

[**0079**] However, if a match is found indicating mobile unit **120** has the chirp-on-demand capability, GIS **254** retrieves a chirp code from the chirp code pool in database **512**. GIS **254** sends this chirp code to base station radio transmitter **210** to transmit the code to mobile unit **120**.

[**0080**] Mobile unit **120** receives the chirp code and transmits the chirp code in signal **208** and signal **212** so that tower location receiver **252** can make the first location measurement and, in the case of an emergency service request, mobile location component **256** can make the second location measurement.

[**0081**] In the case of the emergency service request, the chirp signal continues intermittently until mobile location component **256** converges upon mobile unit **120**, indicating that the emergency attendant has reached mobile unit **120**, or is terminated by PSAP GIS network **258**. In the case of a non-emergency service request, the chirp signal continues intermittently until tower location receiver **252** completes the first location measurement. In either case, GIS **254** notifies mobile unit **120** via communication tower **202** to kill its chirp. GIS **254** returns the chirp code to the available chirp code pool in database **512**.

[**0082**] In the case of an emergency service request, PSAP GIS network **258** is configured to receive location information from GIS **254** via PSAP network data link **503** to generate a situation awareness map.

[**0083**] FIG. **6** shows one embodiment of a situation awareness map graphical user interface (GUI) **600** for use by a PSAP operator of PSAP GIS network **258**. GUI **600** updates the PSAP operator as the emergency situation develops. The geographic map data of GUI **600** may be provided by PSAP GIS network **258**.

[**0084**] GUI **600** includes map space location data, including a location icon **602** of mobile unit **120** layered with geographic data.

[**0085**] Mobile unit location icon **602** is first displayed in accordance with the first location calculation, and adjusted according to the continual updates from the second location calculation received by GIS **254**. GLTI **600** displays a CEP measurement **604** to the operator, each outlying circle representing an area with an associated location probability of mobile unit **120**. For example, GUI **600** shows a CEP measurement comprising two CEP estimations **604***a-b*. Innermost CEP estimation **604***a* may represent a 60% probability that mobile unit **120** is within the encirclement. Outermost CEP estimation **604***b* may represent a 90% probability that mobile unit **120** is within the encirclement.

[**0086**] GUI **600** shows communication tower icon **606** in accordance with the map space location of servicing communication tower **202**. Communication tower icon **606** is complemented with the tower identification number, so that the PSAP operator has this information readily available if needed.

[**0087**] GUI **600** displays a mobile component location icon **608** in accordance with the map space location of mobile location component **256** assists the PSAP operator in initially vectoring the emergency attendants to a signal intercept area represented by signal intercept circle (SIC) **609**. The PSAP operator vectors the emergency attendant to SIC **609**, at which point, mobile location component **256** should pick up signal **208** of mobile unit **120** for performing the second location calculation.

[**0088**] GUI **600** optionally shows dispatch unit identification **610**, a unique identifier of the attending dispatcher unit.

[**0089**] GUI **600** optionally shows a channel and code number **614** over which the PSAP operator is communication on the public safety land mobile network **260** to the emergency attendant.

[**0090**] Referring now to FIG. **7**, one embodiment of mobile location component **256** is shown. Mobile location component **256** may be a vehicular unit and/or a hand-held unit. The vehicular unit fits into an emergency vehicle without requiring significant modifications to the vehicle. The vehicular unit will generally be more sensitive to RF emissions from mobile unit **120** than a handheld unit because a vehicular unit can be operatively coupled with a lager antenna size. A handheld unit may be appropriate to function inside buildings or between buildings where a vehicular unit proves impractical. If target mobile unit **120** is in an area that is hard to see or navigate, or in a high-rise building, the emergency attendant can easily switch from a vehicular unit to a handheld unit when necessary.

[**0091**] In one embodiment, mobile location component **256** is a hand-held unit that plugs into a vehicle-mounted antenna. For example, a vehicle may have a cradle for

placing a hand-held device in communication with a directional antenna bar on the roof. When desired, the hand-held device may be removed from the cradle and employ its own built-in antenna for use outside the vehicle.

[0092] Mobile location component **256** preferably comprises a mobile location receiver **702**, a beacon transmitter **704**, an antenna **706**, a plurality of channels **708**, and a display **710**. Mobile location receiver **702** may also include or be operatively coupled to a land mobile radio **712** which can transmit voice communication using antenna **706** over public safety land mobile network **260**.

[0093] Mobile location receiver **702** is operatively configured to receive signal **208** with antenna **706** through channels **708** for making the second location measurement. This may be done using a boom servo technique.

[0094] As shown in FIG. **1**, antenna **706** may be directional, and may be placed on an emergency vehicle. For example, antenna **706** may comprise a left directional antenna **714** and a right directional antenna **716**. A navigation solution requires two components, a bearing and a range. A mobile platform such as mobile location component **256** can make successively accurate measurements just by traveling in the direction of increasing signal level. As an alternative to simple directional antennas, omnidirectional antennas consisting of two or more each spatially separated (Reference FIG. **9**) at the antenna boom ends coupled with time of arrival and angle of arrival computation techniques can provide bearing information. They can also be used together as shown in this example of FIG. **7**. RSL computations provide range information. Together they provide navigation information which can be overlaid on a map. As signals from mobile unit **120** reach antennas **714**, **716**, mobile location receiver **702** uses a time difference of arrival algorithm that measures an offset time to determine a bearing measurement. Alternatively, an angle of arrival algorithm or other algorithm may be employed. Mobile location receiver **702** calculates the RSL to arrive at a range measurement, providing the range required for the second navigation component.

[0095] The velocity of propagation in the atmosphere is slightly slower than in free space. The velocity of propagation in free space has been accurately determined to be $2.99792458*10^8$ meters per second by national standards groups. A very small percentage error in the atmospheric velocity calculation will generate a large position error. Atmospheric propagation speeds are dependent on atmospheric air pressure, humidity and temperature. Air pressure and temperature in turn depend on elevation and climatology. Air density is a function of air temperature, altitude and humidity. These factors affect the size of the antenna boom. To make the boom length practical for vehicles and hand held units, mobile location receiver adds a second channel with offset timing signal. In this example the second timing signal is offset from the first by some 300 picoseconds in round numbers or a third of a nanosecond. Small accurate delays can be achieved a number of ways using circuitry components. The important point is to delay the second channel relative to the first by a controlled amount so FIG. **9** can be computed with precision. Delay can be controlled by a number of methods for example extra circuitry path length in one timing signal relative to the other. It could be generated by an extra gate in a FPGA circuit. It can even be crafted by surface acoustic wave devices. In the case where antenna **706** is directional, antenna **706** may have a directional antenna pattern as shown in FIG. **8**, for example. An omni-directional antenna (e.g. directional antennas **714** and **716**) may have directional pattern **804**. Null point **806** occurs when the antenna boom **707** is on a heading directly toward the mobile unit.

[0096] In this example the 500-picosecond time delay gives the ability to run two antennas on a shortened boom to perform wave front angle of arrival computations. In our example of above that would be in this example roughly a meter. The short boom means the antenna boom can fit on a car roof or be hand carried into buildings. Note that the offset time is not fixed but must be variable by some fine level of increments. To detect the wave front, the measured complex signal needs to be exactly the same value on both antennas. To find this point, the offset is varied from a small value to larger values until the antenna signals match. This point is a constant wave front and the delay is the time it took for the wave front to travel to the second antenna. The time delay is related to the boom length. The offset then becomes a normalized angle with respect to the boom and gives direction. When the signal direction is straight ahead of the boom the signal path is the same for both antennas mounted at the boom ends. When the emitter is off to one side, it takes longer for the wave front to reach the farther antenna. By measuring how long it takes we can compute the angle to the boom. When the wave front is at right angles to the boom, boom length divided by signal propagation velocity should roughly equal the maximum system offset time.

[0097] FIG. **9** shows the time of arrival to angle of arrival relationship. Three angles are shown in FIG. **9**: Angle of arrival **902**, angle of normal vector to wave front propagation direction vector **904** and angle of antenna boom **707** to normal vector **906**. The antenna boom **707** has a north antenna center point **912** and a south antenna center point **916**. The responding emergency vehicle is traveling with a direction vector **918**. The wave front at time t_1 **910** and at time t_2 **908** is shown. The wave front propagation direction vectors **914** are also shown. The elapsed time from the reception of wave front at south antenna center point **916** to the reception at the north antenna center point **912** is used to calculate angle of arrival **902**. Multiplying the time between reception of wave front **910** and reception of wave front **908** it is possible to calculate the length of side **922** which represents the extra measured distance the wavefront must travel to reach the second antenna to be at the same value point as measured by the first antenna. By applying trigonometric functions to the known values length of antenna boom **707**, the angle of normal vector **920**, and the length of side **922**, it is possible to compute the value of the angle of arrival **902**. The angle of arrival **902** indicates the direction that the radio frequency waves are emanating from.

[0098] An alternative method is mounting the boom on a calibrated servo **750** and rotating the boom to null the signal as shown in FIG. **8**. Note that a handheld receiver with boom would not require a servo as the person holding the system could move the boom while walking and thus keep the boom aimed at the null until arriving at the mobile unit **120** location. The time of arrival technique means an omni directional antenna can be used on the boom. Directional antennas can also be used on the boom. The advantage of

using directional antennas is that once the vehicle is headed directly onto the location the null V as shown in FIG. **8** will be easier to use.

[**0099**] The mobile location receiver **702** will need readout display to update the users in making progress. In FIG. **7**, the CELS mobile location receiver **702** shows a display **710** with minimal information. Minimal information is the bearing and range to the mobile unit **120**. More information can be added such as street address or if the mobile unit **120** is mobile the Highway identification and heading. This information could come from the PSAP operator over the Public Safety Land Mobile Network **260**.

[**0100**] In the display **710** is shown two readouts, Fixed and Mobile. In practice only one would be active at a time. The field denotes whether the target mobile unit **120** is moving or fixed. If it is fixed and can be tied to an address, the address is given. If it cannot be tied to an address, the closest tangent point to a highway is given. It may be given as latitude/longitude or distance to the nearest intersection. If the target cellular telephone were in an open space such as an over grown vacant lot or open space but difficult to see and navigate, the first responders would switch to the handheld location receiver and continue the final location. The same is true if the first responder came to a high rise building. In the case of a high rise, the map would show the high rise within the CEP so there would be advanced knowledge that a handheld location receiver is required.

[**0101**] FIG. **10** is a schematic showing logic for performing angle of arrival computations for wave fronts impinging antenna **706**. Timing signal is delayed some number of nanoseconds behind the first signal. Integrated circuits in multi-tap delay line **1008** provide delay taps for a range of values, such as for example 0.3 nanoseconds to 30 nanoseconds. Such delay taps are commercially available, such as DS**1110** from Dallas Semiconductor. When channel **2** is delayed to channel **1**, the boom **707** looks port side. When channel **1** is delayed to channel **2**, the boom **707** looks at the starboard side.

[**0102**] For determining the second location calculation of mobile unit **120** from the second location measurement, the current location position of mobile location component **256** should be determined. For example, to determine the current location position of mobile location component **256**, beacon transmitter **704** sends the unique beacon transmit signal to half wave whip transmit antenna **720** for reception by communication tower **202**, and eventually for processing by tower location receiver **252**. Using signal-processing techniques known in the art, the map space location of mobile location component **256** can be derived from the beacon signal by GIS **254** using communication tower location database **506**. The second location calculation of mobile unit **120** then can be calculated in combination with the second location measurements.

[**0103**] Display **710** of mobile location component **256** updates progress made by the emergency attendant in locating mobile unit **120**. Information displayed includes bearing and range measurements of mobile unit **120**. More information can be added such as street address or if mobile unit **120** is moving, the highway identification and heading. The situation awareness map illustrated as GUI 600in FIG. **6** may also be displayed on display **710**, for example. This additional information may come from PSAP GIS network **258** over public safety land mobile network **260**.

[**0104**] FIG. **11** illustrates message flow in an exemplary embodiment of the present invention. Tower location receiver **252** transmits to the GIS **254** messages of the following types: tower e911 cellular telephone coarse position data; request for chirp data; RF signal parameter message including unique cellular telephone electronic identification number/electronic serial number (EID/ESN), control channel, and channel assignment for PSAP GIS network **258**; and tower e911 refined position data using chirp results. GIS **254** transmits to PSAP G**6**S network **258** messages of the following types: e911 cellular telephone position location data; tracking beacon location data; and e911 RF signal parameters including unique cellular telephone EID/ESN, control channel and channel assignment for mobile unit **256**. PSAP GIS network **258** transmits to mobile unit **256**, via public safety land mobile network **260**, messages of the following types: mobile cellular telephone initial position location text and graphic message for display; and RF signal parameter exchange message including unique cellular telephone EID/ESN, control channel, and control channel assignment for location receiver. GIS **254** and PSAP GIS network **258** are interconnected at the network demarcation **1106**.

[**0105**] FIG. **12** illustrates the optional addition of an interferometer link between cells of a cellular telephone network. This may be useful in the context of the current invention to further enhance precision, but is not strictly necessary.

[**0106**] An interferometer link can be formed between any two cell points that can see each other. It is used to establish a means to compute accurately propagation velocity, propagation time, and distance between points in real time. A calibrated link will detect the type and variance of transmission losses associated with atmospheric conditions.

[**0107**] In FIG. **12**, cell towers **1202**, **1204**, and **1206** are linked by a precision time and synchronization network **1208** which is linked to a precise time source **1210** and distributes data to all cells in a region. Precise time and time interval calibrated transmission bursts **1212** are communicated between cell towers **1204** and **1206**, for example.

[**0108**] The interferometer function provides information about propagation loss factors so an accurate estimate of basic transmission loss can be used to compare with an unknown received signal level. Tower location receiver **252** may use this comparison to more accurately compute range and bearing of mobile unit **120**.

[**0109**] FIG. **14** shows a flowchart that describes the process of using the optional interferometer link to calculate distance from a tower to a cellular telephone. In step **1402**, a test signal is transmitted from a first tower on a calibrated line. In step **1404**, a second tower receives the calibrated test signal. In step **1406**, the second tower measures the propagation characteristic of the test signal. In step **1408**, the propagation characteristic is stored for future use. In step **1410**, a communications signal is sensed from a cellular telephone. In step **1412**, the system determines whether a recalculation of the propagation characteristic is needed. If a recalculation is needed, steps **1414**-**1420** are performed. These steps are the same as steps **1402**-**1408** described above. Otherwise, step **1422** is performed. In step **1422**, the propagation characteristic of the sensed signal is measured. In step **1424**, the calculated propagation characteristic is

compared against the measured propagation characteristic to determine a distance to the cellular telephone.

[0110] FIG. **12** shows the addition of an interferometer capability to an existing cellular system. Note that it is not necessary to add interferometer capability to all cell sites. The network that carries the precision time and sync data can also carry the interferometer data to all cells within a geographical location. For example a geographic region as large as 500 miles could be served from one representative interferometer link. The interferometer provides useful information in the form of corrections for the path predication calculations. It is a fact that propagation loss does not exactly match the $1/r^2$ loss model. It is in fact somewhere between $1/r^2$ and $1/r^3$. What the interferometer does is allow the link equipment to measure the loss at the time and compute an accurate $1/r^x$ where $2 \leqq x \leqq 3$. The other way to compute propagation loss in excess of the $1/r^2$ model is use information from publications like NBS Technote **101** that contain tables of climate loss values and pull those values that match the current climatic situation and enter them into the prediction model. The prediction model is used to compute the estimated range and in turn location of the mobile unit **120**.

[0111] FIG. **13** shows the operation of a cooperative element location system **1300** designed to locate a mobile unit **120**. A coarse CEP **1321** provides the initial dispatch point defined by two point circle A, B. Targeted mobile unit **120** is located somewhere within coarse CEP **1321**. Determination of this coarse CEP requires only one cell tower **1302**, for example. Mobile location component **256** may include vehicle mount **257** and/or hand-held device **259**. A location beacon **1310** is transmitted from emergency vehicle **1304** to cell tower **1302**.

[0112] Emergency vehicle **1304** receives transmission **1308** including information identifying coarse CEP **1321**. In response, emergency vehicle travels in the direction of CEP **1321**. As emergency vehicle **1304** travels closer to target mobile unit **120** located in coarse CEP **1321**, cooperative element location system **1300** is able to provide a fine location solution of a smaller circle bounded by points C and D. The smaller circle represents fine CEP **1323** which is a two point circle contained within coarse CEP **1321**. Target mobile unit **120** is now known to be located in fine CEP **1323**. This process may be reiterated until target mobile unit **120** is located.

[0113] If necessary, handheld location receiver **259** may be used to go places where emergency vehicle **1304** cannot travel, such as inside a building. In that case, handheld location receiver **259** receives transmission **1318** containing increasingly accurate information regarding the location of target mobile unit **120**.

1-18. (canceled)

19. A method of determining a location of a mobile telephone and displaying the location on a map, the method comprising:

receiving, at a controller, a first location signal from a single cellphone tower in wireless communication with the mobile telephone;

receiving, at the controller, a second location signal from a non-tower source in wireless communication with the mobile telephone;

determining the location of the mobile telephone based solely on the first and second location signals;

generating a situation awareness map including the determined location and geographic map data for an area surrounding the determined location;

digitally displaying on a digital display device the situation awareness map showing the determined location of the mobile phone on a digital map of a geographic area surrounding the determined location.

20. A system for determining a location of a mobile telephone and displaying the location on a map, the method comprising:

means for receiving a first location signal from a single cellphone tower in wireless communication with the mobile telephone;

means for receiving a second location signal from a non-tower source in wireless communication with the mobile telephone;

means for determining the location of the mobile telephone based on the first and second location signals;

means for generating a situation awareness map including the determined location and geographic map data for an area surrounding the determined location;

means for displaying the situation awareness map showing the determined location of the mobile phone on a map of the surrounding area.

21. The method of claim **1** wherein the digital display device is a hand-held wireless communication device.

* * * * *