



- (51) **International Patent Classification:**
A61F 5/442 (2006.01)
- (21) **International Application Number:**
PCT/IL2013/050401
- (22) **International Filing Date:**
9 May 2013 (09.05.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/645,118 10 May 2012 (10.05.2012) US
- (71) **Applicant:** STIMATIX GI LTD. [IL/IL]; 17 Thelet Street, Misgav Business Park, 20174 Doar-Na Misgav (IL).
- (72) **Inventors:** HANUKA, David; 67 MaAle HaShikma Street, 30095 Ramat-Yishai (IL). OR, Meir; Kfar Eshchar, 20196 Doar-Na Misgav (IL). ZISO, Hadas; 21/4 HaDe-ganiot Street, 36054 Kiryat-Tivon (IL).
- (74) **Agents:** EHRLICH, Gal et al.; G. E. EHRLICH (1995) LTD., 11 Menachem Begin Road, 5268104 Ramat Gan (IL).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

(54) **Title:** OSTOMY APPLIANCE

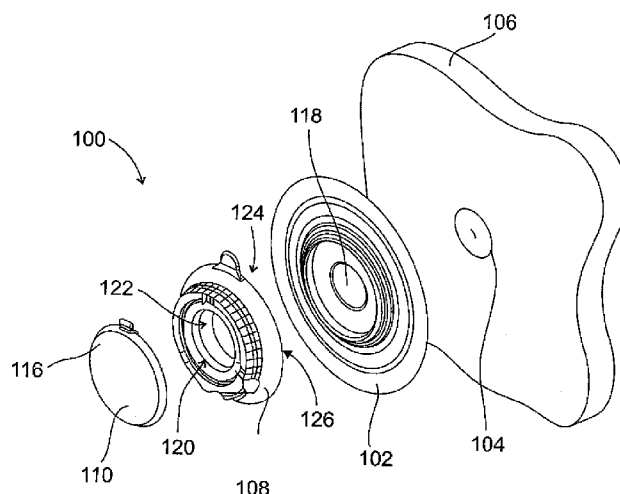


FIG. 1A

(57) **Abstract:** An ostomy appliance comprising an adaptor having a distal end adapted to be coupled to an ostomy wafer and a proximal end adapted to be coupled to a cap, said distal end having an opening in fluid communication with an opening in said proximal end.



OSTOMY APPLIANCE

RELATED APPLICATIONS

This application claims the benefit of priority under 35 USC §119(e) of U.S. Provisional Patent Application No. 61/645,118 filed May 10, 2012, the contents of which are incorporated herein by reference in their entirety. This application is related to International Patent Application No. IB2011/051938 filed May 2, 2011.

FIELD AND BACKGROUND OF THE INVENTION

The present invention, in some embodiments thereof, relates to the field of surgically created openings for waste removal (stoma) in living subjects, and more particularly, to devices and methods for covering a stoma as may be used in the case of a colostomy, ileostomy or urostomy.

In performing an ostomy, the physician will generally form the stoma in the abdominal wall and attach an end or a side of a healthy portion of the intestine (large or small intestine, depending on the type of ostomy) to the stoma from the visceral side of the abdominal wall or, alternatively, pass the intestinal portion through the stoma and attach it to the outside of the abdominal wall. The stoma may be permanently left in a patient suffering from a condition for when it is no longer possible for the intestinal content to pass out via the anus, for example, due to colon cancer, diverticulitis, trauma, or inflammatory bowel disease, or may be temporary, as may be the case following an operation on a section of the bowel (small intestine and/or large intestine) requiring a healing period.

During or following the surgical procedure, an invasive ostomy port may be temporarily or permanently inserted through the stoma for conducting the body wastes from the intestine through the stoma. The invasive ostomy port may also serve to prevent the body wastes from coming in contact with the external abdominal wall as they are expelled through the stoma. Such an invasive ostomy port, in various embodiments thereof, is described by the Applicant in WO 2011/13872 A2, incorporated herein by reference in its entirety.

A waste collection bag (also known as "pouch") is frequently attached to the invasive ostomy port on the side of the external abdominal wall for collecting the waste

content flowing through the port. The pouch may be of a disposable type or may be reusable following emptying of its contents.

In some ports, either invasive or non-invasive, a cap is removably attached to the port for maintaining the port sealed and the waste content inside. When required, the user removes the cap and attaches the pouch, replacing the cap following the port having been substantially emptied from the accumulated waste content.

Alternatively to the use of the invasive ostomy port and possibly more popular due to its simplicity and comparatively low cost is the non-invasive ostomy port such as ostomy wafer (also known as "skin barrier" or "faceplate") or ostomy belt. Such a wafer is typically a patch which is placed over the stoma on the external abdominal wall and protects the skin around the stoma from coming into contact with the waste content. The wafer typically includes an adhesive on one side for removably adhering it to the abdominal wall. It generally includes a flange or other pouch attachment element to which a pouch may be either removably or permanently attached. The combination of a wafer with a removable pouch is generally referred to in the art as an ostomy "two-piece" system whereas that of a wafer with a fixed, non-removable pouch is generally referred to as an ostomy "one-piece" system. The wafer also includes a wafer port peripherally surrounded by the flange and in fluid communication with the stoma for allowing waste content flow from the stoma into the pouch. One requirement of the wafer port is that it be sized to accommodate a portion of the stoma which may protrude from the abdominal wall. Some wafers may be available in different sizes and/or may have different sized ports so that a user may select a wafer with a suitably sized port. Other wafers may include a wafer port template so that the user may cut an opening in the template suitable for accommodating the stoma. Still other wafers may include wafer ports which may be manually shaped by the user to accommodate the stoma.

In addition to the one-piece and the two-piece system described above, other non-invasive ostomy ports are known in the art. Some example are described in U.S. Patent No. 7,250,040 to Andersen; U.S. Patent Application Publication Number 2004/0181197, 2007/0088300, and 2007/0191794, to Clive et al.; and U.S. Patent No. 6,689,111 to Mulhauser et al.

U.S. Patent No. 7,250,040 relates to "an arrangement at a stoma bag of the type used by persons or animals with a colostoma, including a flexible bag (flexibag) and a

ring fastener/magazine ring, where the ring fastener/magazine ring is designed to be connected to a stoma plate, and where, in its initial position, the entire flexibag is located in or in close proximity to the ring fastener/magazine ring.”

U.S. Patent Application Publication Number 2004/0181197 relates to “a flexible
5 membrane is situated within a rigid or semi-rigid cap. The edge of the cap wall is adhesively fixed to the tissue surrounding the stoma. The interior of the cap is pressurized to press the membrane to seal the stoma against the discharge of solid and semi-solid waste. Gas escapes through a vent with a filter element. The cap can be pressurized by an external pump or an integral pump member situated on top of the cap.
10 A relief valve prevents over pressurization. A collection pouch can be provided as part of a device. The device can be removably mounted on a standard two-piece faceplate.”

U.S. Patent Application Publication Number 2007/0088300 relates to "a single-use ostomy appliance is described including an ostomy coupling for releasable coupling first and second portions at a stomal orifice. The two portions may be separable body-
15 side and non-body-side parts, or the two portions may be portions of a unitary ostomy device such as a controlled evacuation device. The coupling includes a mechanical fastener configured such that the coupling is rendered substantially not resecurable after the fastener is released.”

U.S. Patent Application Publication Number 2007/0191794 relates to "a
20 controlled evacuation ostomy appliance comprises a membrane that is urged into sealing engagement with a stoma, by the generation of radial tension in the membrane. A tensioning device applies tension, with respect to the stoma, at one or more positions that are (i) outboard of the periphery of the projecting portion of the stoma, and/or (ii) between the level of the peristomal skin and the level of the most projecting part of the
25 stoma. Tension limiting means are disclosed. The membrane may be gas-permeable to allow flatus to be vented.”

U.S. Patent No. 6,689,111 relates to “a balloon-like member is received in the bowel and inflated to seal the stoma. The member includes a thin, flexible wall defining an opening. A rigid or semi-rigid cap retains the member and closes the opening in the
30 member wall. Skin comfortable adhesive adheres the edge of the cap to the tissue surrounding the stoma. A flexible dilation tube facilitates insertion of the member and cooperates with a pump to inflate the member. The cap is preferably removeably

attached to a standard two-piece ostomy faceplate and is provided with a filter element to vent flatus.”

SUMMARY OF THE INVENTION

According to an aspect of some embodiments of the present invention there is provided an ostomy appliance comprising an adaptor having a distal end adapted to be coupled to an ostomy wafer and a proximal end adapted to be coupled to a cap, said distal end having an opening in fluid communication with an opening in said proximal end.

According to some embodiments of the invention a cap is provided, adapted to be removably coupled to said adaptor.

According to some embodiments of the invention, said ostomy wafer is removably coupled to said adaptor.

According to some embodiments of the invention, said adaptor includes a sealing mechanism for sealing a wafer/adaptor interface.

According to some embodiments of the invention, said adaptor includes an attachment mechanism configured to mate with an attachment element on said wafer, and said sealing mechanism is integral to said attachment mechanism.

According to some embodiments of the invention, said adaptor includes an attachment mechanism for mating with an attachment element on said wafer.

According to some embodiments of the invention, said attachment mechanism includes a snap-fit mechanism.

According to some embodiments of the invention, said attachment mechanism includes a twist-and-lock mechanism.

According to some embodiments of the invention, said attachment mechanism comprises a chemical bonding mechanism.

According to some embodiments of the invention, there is provided a cap locking mechanism for affixing said cap to said adaptor.

According to some embodiments of the invention, the cap is affixed by threading onto the adaptor.

According to some embodiments of the invention, said cap locking mechanism is adapted to sealingly couple between the cap and the adaptor.

According to some embodiments of the invention, said sealing is configured to withstand a pressure differential of 15 mmHg.

According to some embodiments of the invention, said sealing is configured to withstand a pressure differential of 50 mmHg.

5 According to some embodiments of the invention, said sealing is configured to withstand a pressure differential of 150 mmHg.

According to some embodiments of the invention, said adaptor includes an opening for releasing gas flowing from the stoma.

10 According to some embodiments of the invention, said opening is selectively controlled by a user of the ostomy appliance.

According to some embodiments of the invention, said adaptor includes a rotatable ring for releasing gases flowing from the stoma.

According to some embodiments of the invention, manipulating said rotatable ring adjusts a release rate of said gas.

15 According to some embodiments of the invention, said adaptor includes a gas filtering mechanism for filtering gases flowing from the stoma.

According to some embodiments of the invention, there is provided a sealing element adapted to be accommodated within an interior cavity of said adaptor.

20 According to some embodiments of the invention, said sealing element includes a soft elastomer.

According to some embodiments of the invention, said sealing element includes an inflatable balloon.

According to some embodiments of the invention, said sealing element includes a compressed foam element.

25 According to some embodiments of the invention, said compressed foam element is adapted to filter gases flowing from the stoma.

According to some embodiments of the invention, less than 15 cc of the internal lumen is available to be occupied by stomal waste when worn.

30 According to some embodiments of the invention, less than 5 cc of the internal lumen is available to be occupied by stomal waste when worn.

According to some embodiments of the invention, less than 1 cc of the internal lumen is available to be occupied by stomal waste when worn.

According to some embodiments of the invention, said ostomy appliance does not press on the stoma when worn.

According to some embodiments of the invention, the axial length of the closed ostomy appliance is 12 mm or less.

5 According to some embodiments of the invention, the axial length of the closed ostomy appliance is 6 mm or less.

According to an aspect of some embodiments of the present invention there is provided an ostomy component sealing system for sealing to an ostomy wafer comprising: a housing adapted to be attached to said wafer; and a sealing mechanism,
10 formed of at least one element, that resists the flow of pressurized gasses through the housing-wafer interface.

According to some embodiments of the invention, the at least one sealing mechanism element comprises an element integrally formed in the housing which presses against a surface of the wafer to form a seal that resists the outflow of gasses
15 under pressure from the stoma.

According to some embodiments of the invention, the at least one sealing mechanism element comprises an element integrally formed in the wafer which presses against a surface of the housing to form a seal that resists the outflow of gasses under
pressure from the stoma.

20 According to some embodiments of the invention, the at least one sealing mechanism element comprises a separate element contained within a cavity of the wafer which presses against a surface of at least one of the housing and the stoma to form a seal that resists the outflow of gasses under pressure from the stoma.

According to some embodiments of the invention, the housing comprises the
25 housing of an ostomy cap.

According to some embodiments of the invention, the housing comprises a lumen having a proximal end, and is attached to a collapsed collection bag which closes the proximal end.

According to some embodiments of the invention, the housing is attached to a
30 pouch deployment prevention element which at least partially covers the collapsed collection bag and the closed proximal end.

According to some embodiments of the invention, the housing comprises a cavity sized to hold a filter, and within the cavity there is a filter for filtering gasses flowing from the stoma.

5 According to some embodiments of the invention, the housing comprises the housing of an ostomy adaptor appliance.

According to some embodiments of the invention, the housing and the at least one element of the sealing mechanism element do not press on the stoma.

10 According to an aspect of some embodiments of the present invention there is provided a method of sealing a stoma in a subject's body comprising: attaching an ostomy wafer over the stoma; attaching an adaptor to said wafer; and fitting a cap onto said adaptor.

According to some embodiments of the invention, said cap is fitted prior to attachment of said adaptor to said wafer.

15 According to some embodiments of the invention, a collapsed pouch is attached onto said adaptor.

According to some embodiments of the invention, said adaptor is fitted to said wafer prior to attaching said wafer over the stoma.

According to some embodiments of the invention, sealing the stoma is done without applying direct force to the stoma.

20 According to an aspect of some embodiments of the present invention there is provided a method of sealing a stoma in a subject's body comprising: attaching an ostomy wafer over the stoma; and fitting onto said adaptor a cap comprising a collapsed pouch, a deployment prevention element and a gas filter, without applying direct force to the stoma.

25 According to some embodiments of the invention, the adaptor and the cap are integrally coupled.

According to some embodiments of the invention, the adaptor and the wafer are integrally coupled.

30 Unless otherwise defined, all technical and/or scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which the invention pertains. Although methods and materials similar or equivalent to those described herein can be used in the practice or testing of embodiments of the invention,

exemplary methods and/or materials are described below. In case of conflict, the patent specification, including definitions, will control. In addition, the materials, methods, and examples are illustrative only and are not intended to be necessarily limiting.

BRIEF DESCRIPTION OF THE DRAWINGS

5 Some embodiments of the invention are herein described, by way of example only, with reference to the accompanying drawings. With specific reference now to the drawings in detail, it is stressed that the particulars shown are by way of example and for purposes of illustrative discussion of embodiments of the invention. In this regard, the description taken with the drawings makes apparent to those skilled in the art how
10 embodiments of the invention may be practiced.

 In the drawings:

 FIG. 1 schematically illustrates an exploded perspective view of an ostomy appliance that couples a cap to an ostomy wafer through an adaptor, in accordance with an exemplary embodiment of the present invention;

15 FIG. 2A schematically illustrates a sectional view of the ostomy appliance attached to the wafer covering the stoma, in accordance with an exemplary embodiment of the present invention;

 FIG. 2B schematically illustrates an exploded view of FIG. 2A, in accordance with an exemplary embodiment of the present invention;

20 FIG. 2C schematically illustrates an adaptor and a sealing element forming part of the ostomy appliance, in accordance with an exemplary embodiment of the present invention;

 FIG. 2D schematically illustrates an exploded perspective view of an ostomy appliance for coupling a cap to an ostomy wafer, in accordance with an exemplary
25 embodiment of the present invention;

 FIG. 2E schematically illustrates a cross sectional view of the ostomy appliance of FIG. 2D, in accordance with an exemplary embodiment of the present invention;

 FIG. 2F schematically illustrates a perspective view of the housing and attachment mechanism of an ostomy appliance cap, in accordance with exemplary
30 embodiments of the present invention;

FIG. 2G schematically illustrates a perspective view of the housing, sealing element, and attachment mechanism of an ostomy appliance cap, in accordance with exemplary embodiments of the present invention;

FIG. 2H schematically illustrates a perspective view of the housing, sealing
5 element, and attachment mechanism of an ostomy appliance cap, in accordance with exemplary embodiments of the present invention;

FIG. 2I schematically illustrates an exploded perspective view of an ostomy assembly coupled by threaded attachment, in accordance with exemplary embodiments of the present invention;

FIG. 2J schematically illustrates a perspective view of the adaptor component of
10 the ostomy assembly of Figure 2I, in accordance with exemplary embodiments of the present invention;

FIG. 2K schematically illustrates a perspective view of the cap component of the ostomy assembly of Figure 2I, in accordance with exemplary embodiments of the
15 present invention;

FIG. 3 schematically illustrates an exploded perspective view of adaptor and sealing element, in accordance with an exemplary embodiment of the present invention;

FIG. 4A schematically illustrates a partial-exploded perspective view of the cap and the adaptor in the ostomy appliance having an optional gas release mechanism, in
20 accordance with an exemplary embodiment of the present invention;

FIGs. 4B and 4C schematically illustrate sectional views of the cap fitted onto the adaptor, the latter showing a gas flow path between the cap and the adaptor as part of the gas release mechanism, in accordance with some exemplary embodiments of the present invention;

FIG. 4D schematically illustrates an exploded perspective view of a low-profile ostomy adaptor with rotary slider, in accordance with exemplary embodiments of the
25 present invention;

FIG. 4E schematically illustrates a cross sectional view of the assembled ostomy adaptor of FIG. 4D, in accordance with exemplary embodiments of the present
30 invention;

FIG. 4F schematically illustrates a detailed cross sectional view of the assembled ostomy adaptor of FIG. 4D, in accordance with exemplary embodiments of the present invention;

FIG. 5A schematically illustrates a perspective view of an adaptor and a removable cap included in a ostomy appliance having an optional gas release mechanism, in accordance with some exemplary embodiments of the present invention;

FIG. 5B schematically illustrates a sectional view of an ostomy appliance having an optional gas release mechanism, in accordance with some exemplary embodiments of the present invention;

FIGs. 6A and 6B schematically illustrate sectional views of a cap fitted onto an adaptor, the latter showing a gas flow path through a gas filter between the cap and the adaptor as part of a gas release mechanism, in accordance with some exemplary embodiments of the present invention;

FIG. 7A schematically illustrates a perspective view of an adaptor having a flexible fixation ring for gas release in a ostomy appliance, in accordance with some exemplary embodiments of the invention;

FIG. 7B shows a front view of the adaptor with the flexible fixation ring in a gas release mode, in accordance with some exemplary embodiments of the invention;

FIG. 8 schematically illustrates a sectional view of an adaptor having an external ventilation port for gas release in an ostomy appliance in accordance with some exemplary embodiments of the present invention;

FIG. 9 schematically illustrates a sectional view of an adaptor having an external ventilation port for gas release in an ostomy appliance, in accordance with some exemplary embodiments of the present invention;

FIG. 10A schematically illustrates a perspective view of an adaptor and an inflatable sealing element in an ostomy appliance, in accordance with some exemplary embodiments of the present invention;

FIG. 10B schematically illustrates a sectional view of the adaptor with the inflatable sealing element inside a cavity, in accordance with some exemplary embodiments of the present invention;

FIGs. 10C and 10D schematically show side views of inflatable sealing element applying pressure in different directions, in accordance with some exemplary embodiments of the invention;

FIG. 11 schematically illustrates a sectional view of an adaptor with a compressible sealing element in an ostomy appliance, in accordance with some exemplary embodiments of the present invention;

FIG. 12 schematically illustrates a sectional view of the ostomy appliance attached to the wafer covering the stoma and having the adaptor with a plug, in accordance with some embodiments of the present invention;

FIG. 13 schematically illustrates a sectional view of the ostomy appliance attached to the wafer covering the stoma and having the adaptor with an absorbing pad, in accordance with some embodiments of the present invention;

FIG. 14 schematically illustrates a sectional view of the ostomy appliance attached to the wafer covering the stoma and having the adaptor with a disc-shaped absorbing pad, in accordance with some embodiments of the present invention;

FIG. 15 schematically illustrates a sectional view of the cap with a disc-shaped absorbing pad, in accordance with some embodiments of the present invention;

FIGs. 16A and 16B schematically illustrate perspective views of, respectively, an adaptor having a flushing-type sealing element in an ostomy appliance, and a cross-section of the sealing element, in accordance with some exemplary embodiments of the present invention;

FIG. 16C schematically illustrates a sectional view of the adaptor with the sealing element, in accordance with some exemplary embodiments of the present invention;

FIG. 17A schematically illustrates a perspective view of a flushing-type sealing element, in accordance with some exemplary embodiments of the present invention;

FIG. 17B schematically illustrates a sectional view of adaptor with the sealing element inside a cavity, in accordance with some exemplary embodiments of the present invention;

FIG. 18 schematically illustrates a section of an adaptor including a flushing-type sealing element in an ostomy appliance, in accordance with some exemplary embodiments of the present invention;

FIG. 19 schematically illustrates a sectional view of an integral ostomy appliance for attaching to a wafer, in accordance with some exemplary embodiments of the present invention;

FIG. 20 schematically illustrates a sectional view of an ostomy appliance including an integral adaptor/wafer, in accordance with some exemplary embodiments of the present invention;

FIG. 21 schematically illustrates a sectional view of an integral ostomy appliance including a collapsed pouch, a wafer, and a lid, in accordance with some exemplary embodiments of the present invention;

FIG. 22A schematically illustrates a perspective view of the adaptor shown in FIGs. 5A and 5B including an integral cap, in accordance with some exemplary embodiments of the present invention;

FIG. 22B schematically illustrates a sectional view of the adaptor and the integral cap shown in FIG. 22A, in accordance with some exemplary embodiments of the present invention;

FIG. 22C schematically illustrates an exploded perspective view of an integral ostomy appliance including a collapsed pouch, a wafer, a filter, and a lid, in accordance with exemplary embodiments of the present invention;

FIG. 22D schematically illustrates a perspective view of the assembled ostomy appliance of FIG. 22C, in accordance with exemplary embodiments of the present invention;

FIG. 23 is a flow chart of a method of covering a stoma with an ostomy appliance, in accordance with an exemplary embodiment of the present invention;

FIG. 24 is a flow chart of a method of using a smart cap with an ostomy appliance, in accordance with an embodiment of the present invention;

FIG. 25 is a picture illustrating an ostomy appliance worn on the body without a cap, in accordance with an exemplary embodiment of the present invention;

FIG. 26 is a picture illustrating an ostomy appliance worn on the body with a cap, in accordance with an exemplary embodiment of the present invention;

FIG. 27 is a picture illustrating an ostomy appliance worn on the body with a cap, the lid being removed and the waste pouch deployed, in accordance with an exemplary embodiment of the present invention; and

FIG. 28 is a block diagram of an ostomy appliance and its components, in accordance with some exemplary embodiments of the present invention.

DESCRIPTION OF SPECIFIC EMBODIMENTS OF THE INVENTION

The present invention, in some embodiments thereof, relates to the field of surgically created openings for waste removal (stoma) in living subjects, and more particularly, to devices and methods for covering a stoma as may be used in the case of a colostomy, ileostomy or urostomy.

An aspect of some embodiments of the present invention relates to coupling a cap to an ostomy wafer. Optionally, the coupling is temporary and/or reversible. In some embodiments, the coupling is permanent and/or integral.

An aspect of some embodiments of the present invention relates to an ostomy appliance component for coupling a cap to an ostomy wafer. Optionally, the coupling is through an adaptor having a proximal end for connecting a cap and an opposing distal end for connecting an ostomy wafer. Optionally, the proximal and the distal end are fluid communication with one another. “Proximal end” refers to an end of the adaptor furthest away from the stoma in a direction away from the abdomen while “distal end” refers to an end of the adaptor closest to the stoma in a direction into the abdomen.

In some embodiments, the adaptor is adapted to couple the cap to the wafer by pressing the cap against the wafer. In some embodiments, the cap and/or the wafer is detachable. Optionally, an adaptor may be configured to accommodate a cap by an attachment mechanism configuration selected according to the cap design. Optionally, an adaptor may be configured to accommodate a wafer by an attachment mechanism configuration selected according to the wafer design. The cap-accommodating attachment mechanism configuration on the adaptor may be different than the attachment mechanism configuration used by the wafer. Potentially, this permits wafers and caps to be used in combination within a single stack of elements comprising an ostomy appliance (an “ostomy stack”), even in certain cases where their combination was not contemplated as a requirement of their original design. Alternatively, a cap attachment element may be fitted onto the cap and/or the adaptor for enabling coupling of the prior art cap to the wafer. Optionally, the cap attachment element may be

exchangeable, allowing coupling of different types of caps to the wafer. In some embodiments, the cap is a non-invasive cap optionally housing a collapsed waste collection pouch. Optionally, the pouch may be automatically or manually deployed. Optionally, the adaptor attaches to a pouch attachment element on the wafer, for example a flange used for attaching waste collection pouches.

An aspect of some embodiments of the present invention relates to primary sealing of the ostomy appliance. Primary sealing resists the flow of gasses at pressures normally generated from within a stoma, for example 10-20 mmHg, 30-70 mmHg, 100-200mmHg, or a range with intermediate values. Primary sealing also prevents the leakage of solid and liquid stomal discharge.

In some exemplary embodiments, the ostomy appliance may include a sealing system which provides for primary sealing at one or more component-component interfaces and/or component-tissue interfaces. For example, sealed component-component interfaces may be between a cap and an adaptor, an adaptor and a wafer, or a cap and a wafer. Also for example, a sealed component-tissue interface may be between a cap and a stoma, an adaptor and a stoma, a wafer and a stoma, or between one of those ostomy components and the peristomal skin. In some exemplary embodiments, sealing at component-component interfaces is designed such that passage of gas at the interface is substantially prevented when a pressure differential in the range of, for example, 10-20 mmHg, 30-70 mmHg, 100-200mmHg, or a range with intermediate values exists across the interface.

An aspect of some embodiments of the present invention relates to the introduction of fluids to the stoma, surrounding tissue and/or organ surfaces internal to the stoma. The ostomy appliance may further include a flushing mechanism for washing an inside of the appliance, and/or for washing the peristomal skin and/or the stoma. Additionally or alternatively, the flushing mechanism may be used for intestinal irrigation.

An aspect of some embodiments of the present invention relates to ostomy components which couple to one another in potentially different combinations of structural roles and/or attachment mechanisms. In some exemplary embodiments, the adaptor, the cap, and the wafer are three separate attachable components. Optionally,

the ostomy appliance is a non-disposable item, and all the components are washable. Alternatively, one or more components of the ostomy appliance is a disposable item, that is, one or more of the cap, the adaptor, and the wafer are separately disposable after a predetermined number of uses or a predetermined amount of time which may vary according to the component. For example, the cap may be disposed of after a single use, while the wafer after three days of use, and the adaptor after one year of use during which time it may be washed on a regular basis.

In some embodiments, the cap and the ostomy appliance are a single component attachable to the wafer. Alternatively, the ostomy appliance and the wafer are a single component to which the cap may be attached. Alternatively, the cap, the ostomy appliance and the wafer are a single component.

A potential advantage of having an ostomy appliance which may be used with caps and/or wafers of potentially uncoordinated design is a reduced production cost compared to that of producing it together with the cap and/or wafer, making the item more accessible to users at a lower cost. Another potential advantage is to allow users who have established a preference for one ostomy component, such as a wafer, to enjoy access to a wider range of alternatives for other ostomy components, such as caps.

In contrast, a potential advantage of combining into merged ostomy components the functions of, for example, a cap, a wafer, and/or an adaptor is the simplification of a potentially tedious procedure requiring that the user attach each component separately. This may be particularly of benefit to users having poor motor skills.

An aspect of some embodiments of the present invention relates to protection of the stoma from potentially damaging sustained contact with components of a surrounding ostomy appliance. In some embodiments, the ostomy appliance is adapted to be physically isolated from the stoma, optionally from the peristomal skin, potentially preventing possible tissue damage to the stoma and/or surrounding area due to contact, friction, mechanical stress and/or use of non-biocompatible materials in part of the appliance.

In some exemplary embodiments, the distal end of an adaptor is cross-sectionally shaped to conform to a shape of the stoma. For example, the cross-sectional shape may be circular for use with circular stomas, or may have non-circular shapes, for example, elliptical for use with elliptically shaped stomas. Additionally or alternatively,

the distal end is cross-sectionally shaped to conform to the shape of a wafer port in the wafer and/or the proximal end is cross-sectionally shaped to conform to the shape of a cap.

In some exemplary embodiments, the adaptor is configured for being sealingly
5 attached at the distal end to a pouch attachment element on a wafer, so that the seal peripherally surrounds the wafer port. Optionally, the distal end attaches to another attachment element on the wafer, for example, a rim for fitting a cap, or a dedicated attachment element configured for attaching the adaptor. At this wafer/adaptor interface, the connection may include use of an O-ring or other type of sealing element
10 for preventing waste content leakage. Attaching the adaptor to the wafer allows for waste content flow from the stoma, optionally through the wafer port, into the adaptor, without the adaptor being in physical contact with the stoma. This physical isolation is potentially advantageous for protecting the tissue against damage from mechanical stress and/or use of non-biocompatible materials. In some embodiments, the adaptor is
15 sealingly attached to the wafer as a single component, for example, during a manufacturing process wherein the adaptor is formed integrally with the wafer, or is attached using known processes, including welding or bonding. Bonding comprises one or both of chemical bonding and adhesive bonding. Adhesive bonding, according to the specific embodiment, includes adhesive materials used and processes performed during
20 original manufacture and/or adhesive materials used and processes performed by the end user.

In some exemplary embodiments, the adaptor may be used, according to specifics of its design, with one or more of an assortment of alternative wafer designs, potentially including designs for which use with an adaptor was not originally
25 contemplated. For example, different embodiments of the adaptor may have different types and/or sizes of attachment mechanisms for mating with the pouch attachment elements of different wafer designs. Optionally, the adaptor is configured for use with wafers having adjustable size wafer ports for accommodating different stoma sizes. In some embodiments, the adaptor has a one-size/type attachment mechanism which mates
30 with a one-size/type pouch attachment element in a "dedicated" wafer.

In some embodiments, the adaptor is configured for being used with stoma of different heights, for example, by having a single height which is suitable for varying

stoma heights. For example, the single height adaptor may be capable of accommodating stomal protrusion in a proximal direction away from the abdomen by up to 2 cm, 1.5 cm, 1 cm, 0.5 cm, or less. Alternatively, the adaptor can be of a particular height according to the requirements of a particular user. For example, a first size adaptor may accommodate a stomal protrusion ranging from 0–0.5 cm, a second size adaptor may accommodate a stomal protrusion ranging from 0.5 cm–1.5 cm, and a third size adaptor may accommodate a stomal protrusion ranging from 1.5 cm–2 cm. In some embodiments, the adaptor provides these and/or other adaptations, a wafer of a type suitable to be cut to size for use with a standard size adaptor.

An aspect of some embodiments of the present invention relates to the flexibility of an ostomy appliance. In some exemplary embodiments, major structural elements of the adaptor and/or the cap, for example, their body or housing, may be wholly made of a flexible and/or elastic material, for example, silicone rubber or thermoplastic elastomer (TPE). Optionally, the material may be of a durometer ranging from 20–80 Shore A, 25–75 Shore A, 35–75 Shore A, 45–75 Shore A, 50–75 Shore A. In some embodiments, attachment mechanisms are of a sufficiently rigid material for substantially limiting a possibility of mechanical failure of attachment mating between components. For example, the material may be a silicone rubber of high durometer in a range of between 50–90 Shore A, 55–85 Shore A, 60–80 Shore A, or may be a semi-rigid thermoplastic such as polyethylene or a rigid thermoplastic such as polyamide. In some embodiments, the attachment mechanism is formed from the same material as the adaptor and/or cap. Alternatively, the attachment mechanism may be formed from different material than the adaptor and/or cap. Separate materials offer a potential advantage in that the adaptor and/or cap may be formed from the flexible and/or elastic material while the attachment mechanism is formed from the more rigid material.

An aspect of some embodiments of the present invention relates to the use of combinations of ostomy components having different ostomy component features. In some exemplary embodiments, the adaptor is used with the cap attached to the proximal end by the user at the time of use. Optionally, the cap is a non-invasive cap. In some embodiments, the cap is disposable. Alternatively, the proximal end is attached to the cap as a single component, for example, during a manufacturing process wherein the

adaptor is formed integrally with the cap, or is attached using known processes, including welding or bonding.

In some embodiments, the cap houses the collapsed pouch and includes a removable lid for allowing pouch deployment. In some embodiments, the collapsed
5 pouch is accommodated inside a housing which is attached to the adaptor. Optionally, the housing and pouch are replaceable as a single unit. In some embodiments, the cap is integrally attached to the adaptor and the housing accommodating the pouch is removably attached to the adaptor, for example, by inserting through an opening in the cap following removing of a lid. In some embodiments, the collapsed pouch is
10 deployable when a user needs to eliminate waste through the stoma. In some embodiments, deployment of the pouch is automatic, for example, responsive to a pressure buildup inside the ostomy appliance from waste content. Additionally or alternatively, the user deploys the pouch, for example, in response to a signal from a warning mechanism in the ostomy appliance, or periodically according to
15 predetermined criteria, or randomly as desired, or any combination thereof.

In some embodiments, the ostomy appliance includes a gas release system for allowing the user to release gases from within the stoma without deploying the pouch or removing the cap. International Patent Publication Nos. WO 2011/13872 A2, WO 2011/138731 A2, and WO 2011/138727 A1 by the applicant and all incorporated herein
20 by reference in their entirety, describe various embodiments of smart caps, automatic and manual pouch deployment mechanisms, pressure warning mechanisms, gas release mechanisms, and irrigation mechanisms, which may be incorporated individually or in combination in some embodiments of the present invention.

In some exemplary embodiments, use of the ostomy appliance may include
25 attaching the adaptor to the wafer prior to placing the wafer over the stoma. Alternatively, the user may first place the wafer over the stoma and then attach the adaptor. The cap may be attached to the adaptor either before attachment to the wafer, or after attachment. In some embodiments, the user replaces the cap following deployment of the pouch.

30 An aspect of some embodiments of the present invention relates to secondary sealing of the ostomy appliance. Secondary sealing controls the access of stomal waste, particularly liquid waste but potentially also gaseous and/or solid waste, to tissue and/or

appliance surfaces inside the ostomy appliance. In some embodiments, secondary sealing may seal and/or contribute to sealing against leakage from the ostomy appliance of liquids, solids, and/or stomal gases. An aspect of some embodiments of the present invention relates to a sealing element for use with an ostomy appliance for providing
5 sealing at a wafer/stoma interface. Use of the sealing element provides a second level of sealing in the ostomy appliance in addition to that at the wafer/adaptor interface. The sealing element is sized and shaped to be fittedly accommodated inside the adaptor, and optionally includes a hole for allowing waste content flow through the element. Optionally, the sealing element is adapted to peripherally surround the wafer port and to
10 press against the wafer for providing sealing at the wafer/stoma interface. Additionally or alternatively, the sealing element presses against the stoma for providing the sealing.

In some exemplary embodiments, the sealing element is adapted to direct at least a portion of the waste content flow from the stoma through the opening in an axial direction towards the proximal end. Optionally, a remaining portion of waste content
15 reaching the sides of the adaptor is an amount which may be readily handled by the sealing arrangement at the wafer/adaptor interface for preventing possible waste content leakage. In some embodiments, user cleaning of the adaptor is facilitated by the reduced amount of waste content reaching the walls of the adaptor.

In some exemplary embodiments, the sealing element may include an inflatable
20 element, for example, an annular shaped balloon, which is inflated inside the adaptor. Alternatively, the sealing element may include a compressible material adapted to exert a force against the inner walls of the adaptor. In some embodiments, the sealing element allows gas flow (flatus) through the compressible material. In some embodiments, the sealing element is annular in shape. In some embodiments, the sealing element is
25 dimensioned to accommodate the stoma according to its dimensions. Alternatively, the sealing element includes a non-circular shape for accommodating stoma of non-circular shape.

In some exemplary embodiments, the sealing element may be used to plug the wafer port and/or the stoma for preventing waste content leaking into the adaptor from
30 the stoma. Optionally, the plug is disposable and is unplugged from the wafer port and/or the stoma when the waste collection pouch is deployed or when the cap is removed from the adaptor. In some embodiments, the sealing element includes an

absorbent material for absorbing liquid waste content flowing into the adaptor from the stoma. Additionally or alternatively, a liquid absorbing element may be included in the adaptor together with the sealing element for absorbing the liquid waste content.

In some exemplary elements, the ostomy appliance may provide for multiple
5 types of sealing relative to the stoma. For example, one sealing type may be at the wafer/adaptor interface. Another sealing type may be at the wafer/stoma interface. Yet another sealing type may be at a cap/adaptor interface at the proximal end where the cap is attached to the adaptor. And yet another sealing type may include at an abdomen/wafer interface where the wafer is pressed against the abdomen. Optionally,
10 sealing at the abdomen/wafer may not be a complete sealing.

In some exemplary embodiments, the sealing element may be compressible and may be made of a highly elastic material, for example, silicone rubber of durometer in a range from 1–30 Shore A, 2–20 Shore A, 2–15 Shore A, 3–10 Shore A, 3–8 Shore A. Alternatively, the sealing element may include a material that distends when in contact
15 with a wet environment such as, for example, cotton or rayon.

An aspect of some embodiments of the present invention relates to structurally combining features such as secondary sealing and the introduction of fluids to the stomal environment. In some exemplary embodiments, the sealing element may form part of a flushing mechanism in the ostomy appliance for cleaning an interior of the
20 adaptor and/or the peristomal skin and/or the stoma. Optionally, the flushing mechanism may be used for intestinal irrigation. In some embodiments, the sealing element fluidly connects to a valve exteriorly connected on the adaptor and through which a flushing fluid is introducible into the adaptor. Additionally, the sealing element includes a fluid distribution system having one or more inlets and one or more outlets through which the
25 fluid flows through the sealing element into the interior of the adaptor.

Alternatively, said flushing mechanism may be formed as part of the adaptor itself instead of being included in the sealing element. Optionally or alternatively, the flushing mechanism may be formed partially as part of the adaptor and partially as part of the sealing element.

30 Before explaining at least one embodiment of the invention in detail, it is to be understood that the invention is not necessarily limited in its application to the details of

construction and the arrangement of the components and/or methods set forth in the following description and/or illustrated in the drawings and/or the Examples. The invention is capable of other embodiments or of being practiced or carried out in various ways.

5 EXEMPLARY OSTOMY APPLIANCES

Exemplary Ostomy Appliance with Adaptor

Reference is now made to Figure 1 which schematically illustrates an exploded perspective view of an ostomy appliance **100** for coupling a cap **110** to an ostomy wafer **102**, according to an exemplary embodiment of the present invention. In some
10 embodiments, appliance **100** performs the function of an adaptor permitting coupling of the wafer **102** and the cap **110** into a single ostomy stack. Additionally or alternatively, the appliance **100** may perform other functions, as detailed in subsequent sections.

Reference is also made to Figure 2A which schematically illustrates a sectional view of ostomy appliance **100** covering a stoma **104** on a body **106**, to Figure 2B which
15 schematically illustrates an exploded view of Figure 2A, and to Figure 2C which schematically illustrates an adaptor **108** and a sealing element **109** forming part of the ostomy appliance, according to an exemplary embodiment of the present invention. Optionally, wafer **102** is an ostomy wafer of a design not originally contemplated for use with an adaptor **108**.

20 In some exemplary embodiments, adaptor **108** includes a proximal end **120** having a proximal opening **122** and a distal end **124** having a distal opening **126**, the openings in fluid communication with one another. Proximal opening **122** leads into a chamber **128** adapted to accommodate a housing **112** optionally including a collapsed pouch **114**. Optionally, housing **112** is part of a cap **110** which may be attached to
25 proximal end **120**. Alternatively, chamber **128** is shaped to accommodate pouch **114** without housing **112**. Optionally, distal end **124** is shaped to accommodate housing **112** and/or pouch **114** in a sealing manner. Distal end **124** is adapted to abut with wafer **102** such that distal opening **126** optionally concentrically aligns with wafer port **118**. In this configuration, wafer port **118** is in fluid communication with both distal opening **124**
30 and proximal opening **122**.

In some embodiments of the invention, the adaptor **108** is constructed with a minimum of internal free space when attached to wafer **102**. The free space available is, for example, 1 cc, 5 cc, 10 cc, 20 cc, 30 cc, 50 cc, or any volume in between. A potential advantage of limited internal free space is limitation of the accumulation of stomal discharge, such as fecal matter, mucus, or other liquid. In some embodiments, space is minimized, for example, by the inclusion of additional material in the construction of the adaptor, beyond what is required for structural support. It should be noted that in some embodiments, space internal to adaptor **108** is occupied by another ostomy appliance component, such as a sealing element **109**, an absorbing pad (related to, for example, as absorbing pad **176** of *Figure 14*, hereinbelow) or another space-filling element.

In some embodiments of the invention, sealing is maintained without the application on the tissue of the stoma of direct force and/or pressure; or with low pressure, for example pressure below the 50 mmHg, below 50 mmHg, below 25 mmHg, below 10 mmHg, or below 5 mmHg. A sealing element **109** is, for example, shaped so that a minimum distance from the tissue of the stoma is ensured. This may provide an advantage by reducing the potential for tissue damage and/or for extending the appliance's usage duration.

Exemplary Adaptor Attachment Mechanism

In some exemplary embodiments, adaptor **108** further includes an attachment mechanism **130** peripherally surrounding distal opening **126** and adapted to mate with an attachment element **132**, for example a flange, in wafer **102** at a wafer/adaptor interface **103**.

Functions of an adaptor attachment mechanism **130** potentially include one or more of: secure coupling of an adaptor to a wafer **102**, reversible coupling of an adaptor to a wafer **102**, and/or sealed coupling of an adaptor to a wafer **102**.

In some embodiments, attachment element **132** is a pouch attachment element of a type generally found in existing wafers and onto which a rim to an opening in an existing waste content collection pouch is generally attached. A mating arrangement between attachment mechanism **130** and flange **132** is configured for preventing waste content leakage therethrough, and potentially includes use of an elastomeric seal and/or other sealing element yielding at least primary-type sealing, for example against the

outflow of stomal gasses. In some embodiments, the mating arrangement between attachment mechanism **130** and flange **132** potentially prevents undesired detachment of adaptor **108** from wafer **102**, and includes use of a snap-fit mechanism, a twist-and-lock mechanism, or other suitable locking mechanism. Optionally, the mating arrangement
5 allows detachment when desired.

Exemplary Sealing Element

In some exemplary embodiments, ostomy appliance **100** includes a sealing element **109** which is directed toward secondary sealing that reduces interior access of wastes to tissue and ostomy appliance surfaces, and in some embodiments also
10 participates in primary sealing against leakage from the ostomy appliance. Sealing element **109** has a first opening **134**, an opposing second opening **136**, and a passage **138** fluidly communicating both openings. Functions of a sealing element **109** include, for example, one or more of: providing a second seal to supplement sealing against waste leakage provided by the wafer **102** itself and/or by attachment mechanism **130**;
15 occupying a space between the stoma and the adaptor's body, limiting the accumulation of fecal matter in the adaptor; and providing absorbency to contain waste leakage so that it does not contaminate other elements or surfaces of the ostomy stack, and/or other functions as herein described.

Sealing element **109** is optionally configured for being inserted into a cavity **140**
20 between chamber **128** and distal opening **126** such that second opening **136** aligns with wafer port **118**. Optionally, sealing element **109** is reversible and fittable inside cavity **140** with first opening **134** aligned with wafer port **118**. Optionally, insertion of sealing element **109** into cavity **140** is done by a user of ostomy appliance **100**. Alternatively, said insertion is done during the device assembly and adaptor **108** is provided to the
25 user with sealing element **109** already inserted into cavity **140**. Optionally, the user can remove sealing element **109**, for example for cleaning it or for replacing it with a new sealing element. Alternatively, sealing element **109** is permanently attached adaptor **108** within cavity **140**. In some embodiments, sealing element **109** is annular shaped as shown. In some embodiments, its geometrical shape is non-annular for corresponding
30 with a geometrical shape of cavity **140**. Optionally, its geometrical shape corresponds with that of stoma **104** and/or wafer port **118** without putting pressure on stomal tissue.

In some embodiments, sealing element **109** is made of a highly compressible material such as for example, silicone rubber or thermoplastic elastomer, of durometer in a range from 1–30 Shore A, 2–20 Shore A, 2–15 Shore A, 3–10 Shore A, 3–8 Shore A. Optionally, the elasticity and structure of sealing element **109** are chosen such that

5 sealing element **109** is compressible against wafer **102** at a wafer/stoma interface **105** when adaptor **100** is attached to flange **132**. Optionally, the compression force between sealing element **109** and wafer **102** at wafer/stoma interface **105** is high enough to ensure a reliable sealing and prevent waste content and/or flushing fluid leakage therethrough. In some embodiments, the compression force ranges from 100 grams to 5

10 kg, for example, 200 grams, 500 grams, 1 kg, 2 kg, 3kg, 4.5 kg. In some embodiments, sealing element **109** is compressibly fitted inside cavity **140**. Optionally, a pressure required for maintaining sealing element **109** inside the adaptor without resorting to use of an adhesive material ranges from 0.1 psi to 2 psi, for example, 0.15 psi, 0.3 psi, 0.5 psi, 0.8 psi, 1 psi, 1.5 psi, 1.8 psi. Alternatively, sealing element **109** is made of a

15 distending material for absorbing liquid waste content flowing from stoma **104**, optionally through wafer port **118**, and expanding within cavity **140**. In some embodiments, sealing element **109** provides for a second sealing mechanism in ostomy appliance **100** additional to that provided at wafer/adaptor interface **103**. Optionally, sealing at wafer/stoma interface **105** enhances the sealing provided by wafer/adaptor interface **103** by reducing a possible amount of waste leakage and/or flushing liquid reaching the wafer/adaptor interface. Optionally, the sealing mechanisms at wafer/stoma interface **105** and wafer/adaptor interface **103** act as redundant system. In some

20 embodiments, an amount of liquid waste content absorbable by sealing element **109** is up to 100 ml, for example, 1 ml, 5 ml, 10 ml, 20 ml, 35 ml, 45 ml, 50 ml, 60 ml, 75 ml,

25 85 ml, 90 ml, 95 ml. Optionally, sealing element **109** is able to absorb amounts of liquid waste content in excess of 100 ml, for example, 120 ml, 150 ml, 180 ml, 200 ml, or more. More details on some embodiments of sealing element **109** are discussed in greater detail further on in this disclosure.

Exemplary Ostomy Cap

30 In some embodiments, cap **110** includes housing **112** accommodating collapsed pouch **114**. Potential functions of a cap include, for example, preventing the constant flow of waste from the stoma, indicating the build-up of pressure from waste, allowing

waste to flow upon sensing a sufficient pressure or upon action by the user, acting as a container for a pouch **114** which deploys to collect the waste and/or other functions as herein described.

Alternatively, pouch **114** is accommodated in cap **110** externally to housing **112**.

- 5 Collapsed pouch **114** is optionally deployable by removing a lid **116** on cap **110** and manually extracting the pouch by the user. Alternatively, pouch **114** is deployed following removal of lid **116** by the pressure of waste content flowing from stoma **104** into adaptor **108** and pushing on the pouch. In some embodiments, lid **116** is manually removable by the user. Alternatively, lid **116** is automatically removed by the pressure
10 pushing on the lid. In some embodiments, lid **116** is a pressure sensing lid which flexibly bulges outwards or stiffens or a combination thereof responsive to a pressure from waste content. Optionally, lid **116** bulges outwards responsive to a gas pressure inside adaptor **108**.

Exemplary Ostomy Appliance with Direct Cap Attachment

- 15 Reference is now made to Figures 2D and 2E which schematically illustrate an exploded perspective view and a cross sectional view, respectively, of an ostomy stack **3000** representing some embodiments of the invention, in which a cap **3010** is coupled to an ostomy wafer **3002**, according to an exemplary embodiment of the present invention. Considered in overview, potential advantages of the embodiments
20 represented here include, for example, a low ostomy stack profile, a simplified stack assembly procedure for the user, a low production cost, and/or elastic flexibility of the ostomy stack. Other possible advantages will be described in connection with additional specific features of exemplary ostomy stack **3000**.

- The cap **3010** includes an attachment mechanism **3030** which attaches to an
25 attachment element **3032** of the wafer. Optionally, the attachment element **3032** is a flange. Optionally, the attachment mechanism **3030** is integrally formed with the cap housing **3046** so as to form a ring which is held in place by the flange **3032**.

- In Figures 2F, 2G, and 2H, alternative exemplary attachment mechanisms are shown in schematic perspective view, demonstrating an exemplary variety of the
30 attachment designs which are contemplated, as will now be described.

In Figure 2F, attachment mechanism **3130** comprises a plurality of flanged tabs. In the example shown, the flanges are positioned to protrude outward from the center of

the cap housing **3146**. The tabs are optionally constructed of a rigid or semi-rigid plastic, with elasticity sufficient to bend in order to engage or disengage with attachment elements on the ostomy wafer (not shown). Additionally or alternatively, said attachment elements on the ostomy wafer bend or otherwise distort in order to engage or disengage with the tabs. Optionally, the flanged tabs are integrally formed with the cap housing **3146**.

In *Figure 2G*, an exemplary attachment mechanism **3230** comprises a circumferential rim, overhanging a circumferential recess **3231** and designed to engage with an ostomy wafer's flange (not shown) by a snap-fit mechanism operating around the circumference of cap housing **3246**. The material used to form this attachment mechanism **3230** is optionally flexible, such as silicone rubber or TPE, and optionally has durometer in the range of 30-80 Shore A. A sealing element **3209** may thereby be held against an ostomy wafer with sufficient force to resist the leakage of material issuing from the stoma. Sealing element **3209** is directed toward secondary sealing, and in some embodiments also participates in primary sealing. Additionally or alternatively, circumferential recess **3231** might, for example, be replaced with a flange, and a mating recess put on the ostomy wafer. Potentially, the use of attachment designs compatible with flexible housings for ostomy components enables the construction of wholly flexible ostomy appliances with features including, for example, manual and/or automatic gas release control, and collapsed waste collection pouches with pressure sensing release. A flexible ostomy appliance potentially provides advantages for user comfort and/or resistance to detachment during body movements.

In *Figure 2H*, an exemplary attachment mechanism comprises a plurality of flanged tabs **3330**. The tabs **3330** are optionally constructed of a rigid or semi-rigid plastic, with elasticity sufficient to bend in order to engage or disengage with attachment elements on the ostomy wafer (not shown). Additionally or alternatively, said attachment elements on the ostomy wafer bend or otherwise distort in order to engage or disengage with the tabs. In the example shown, the flanges are positioned to protrude inward toward the center of the cap housing **3346**. The flanges are optionally wedge-shaped on one side, and flat on the other.

By means of their shape and elasticity, the tabs **3330** are optionally constructed so as to rise out of the way when pressed down over a projecting flange on an ostomy

wafer, and yet engage firmly behind it once in place, providing sufficient force to hold sealing element **3309** (a secondary sealing-directed element with a potential role in primary sealing) sealingly against the ostomy wafer. Optionally, the ostomy wafer is provided with suitably arranged apertures into which the flanges of the ostomy cap insert. Optionally, the apertures or holding flange are on the cap housing, in order to mate with flanged tabs on the ostomy wafer. Optionally, and with suitable complementary changes as required to cap and ostomy wafer, the inward- and outward-pointing direction of flanges are reversed. Optionally, a projection protrudes from at least one flanged tab **3335**, for example, extending proximally so that it is accessible from the proximal side of the device, such that deflecting the projection causes the flange to bend outward. This provides a potential advantage for easier release of cap from the wafer.

In some embodiments of the invention, attachment of components is by adhesive bonding. In an exemplary embodiment of the invention, adhesive is applied by a user to at least one of two ostomy components to be attached, for example a proximal surface of wafer **3002**, and the second component, for example, ostomy cap housing **3046**, is placed over it. A potential advantage arises from using an adhesive that can be applied so as to provide a volume for one of the components to sink into, such as a foamed adhesive. A voluminous adhesive potentially allows adhesive attachment over a larger surface area. A voluminous adhesive potentially encases a portion of one or both components, providing adhesion resistant to multiple directions of force. In an alternative embodiment, the at least one of two ostomy components is supplied to the user with an adhesive already applied and covered by a release liner. In this case the user first removes the liner and then attaches the surfaces to one another to create an airtight sealing therebetween. Optionally, both components are provided with a self-adhesive material. A potential advantage is obtained by the use of an adhesive with a short time to setting well enough to maintain the components in place under at least their own weight, for example, a setting time of less than five seconds, less than ten seconds, or less than twenty seconds.

In some embodiments of the invention, the above principles and elements of attachment mechanism are used alone or in combination, and with suitable modifications in the specifics of shape or material apparent to those skilled in the art, to

achieve attachment of the ostomy cap to the ostomy wafer. With suitable modifications of attachment elements, according to the embodiment of the invention, attachment of an ostomy cap to an ostomy adaptor, or of an ostomy adaptor to an ostomy wafer, is achievable. With suitable modifications of attachment elements, according to the
5 embodiment of the invention, attachment of a lid or a pouch restraint to a more distal component of the ostomy stack is achievable. In some embodiments, a greater, lesser, or intermediate number of tabs is used than the 3-8 tabs shown, for example 2, 4, 6, 10 or more. In some embodiments, a greater, lesser, or intermediate spacing or width of the tabs is used than shown; for example, tabs occupying the entire attachment
10 circumference apart from the gaps which separate them, or 50%, or 10%. In some embodiments, greater, lesser, or intermediate tab length or flange depth is used than shown, in correspondence with the design of complementary structures which hold or receive them.

Returning again to *Figures 2D* and *2E*, the attachment interface is sealed by
15 sealing element **3009**, which is optionally held within a cavity of the cap housing **3046**.

Further exemplary features of the ostomy stack potentially useful for controlling and directing the release of waste, or for improving user comfort or convenience are potentially implemented as now described.

Optionally, a collapsed pouch **3014** is attached to the cap, and sealed to it, for
20 example, by bonding (adhesive or chemical) or welding. A lid **3016** restrains the bag in its collapsed state.

The collapsed pouch **3014** is optionally configured into a low profile package, for example by folding. Optionally, the collapsed pouch is stored at or near the proximal end of the cap housing **3046**.

25 A low profile pouch package provides a potential advantage by requiring less thickness to be added to the protruding profile of the ostomy appliance, either proximal or distal to the pouch. The ostomy appliance is potentially less obtrusive thereby. The ostomy appliance is potentially easier to carry and/or store thereby.

A proximal storage configuration of the pouch potentially provides an advantage
30 by allowing more of cavity of the cap housing **3046** to be available, for example, to accommodate protrusion of the stoma (not shown).

Optionally, cap housing **3046**, lid **3016**, and/or ostomy wafer **3002** are made in whole or in part of flexible materials (for example, material as previously described herein in connection to flexible adaptors and caps). Construction from flexible material potentially provides advantages such as, for example, allowing the ostomy stack to conform more easily and/or with minimal discomfort to the shape and/or motion of the body of the user.

Optionally, a filter **3049** is integrated into the cap **3010**. Optionally, the cap housing **3046** is designed with an aperture **3050** sized to hold the filter.

A filter potentially provides an advantage by allowing stomal gasses to passively escape during wearing of the ostomy appliance, instead of building up behind the seals of the ostomy appliance. On the other hand, a filter potentially provides an advantage by reducing the likelihood of this escape from happening in a sudden or uncontrolled fashion. The filter potentially provides the advantage of allowing such gasses to escape while controlling the leakage of fluid and solid material. The filter potentially provides the advantage of allowing stench-forming components of gasses to be filtered from the emission.

Embedding the filter within an aperture of the cap housing potentially provides an advantage by requiring less thickness to be added to the protruding profile of the ostomy appliance in order to accommodate it. An advantage is potentially provided by having the proximal face of the filter flush with a proximal face of the cap housing, thus easing the assembly of a pouch onto both faces in a sealing manner.

Exemplary Embodiment Of Adaptor With Threaded Cap

Reference is now made to *Figures 2I, 2J, and 2K*, which schematically illustrate exploded perspective views of an adaptor **3508** and cap **3510** which together comprise an ostomy assembly **3500** coupled by threaded attachment. Considered in overview, potential advantages of the embodiments represented here include, for example, one or more of reduced force, particularly reduced pressing force, required to assemble the ostomy stack on the body; an ostomy stack profile which is minimally elevated above the height required to accommodate a protruding stoma; and/or reduced cost of manufacturing ostomy stack components.

In some embodiments of the invention, adaptor **3508** is provided with threading, **3556**, configured to interlock its housing **3546** with complementary threading **3558** on

the housing **3512** of cap **3510**. Optionally, adaptor **3508** is further provided with a lever **3550** that prevents unwanted detachment of cap **3510** by interfering with a surface **3552** of the cap housing **3512**, configured into the housing. Optionally, the housing **3512** is provided with a recess, **3560**, configured to receive a portion of the lever when the adaptor **3508** and cap **3510** are fully coupled. Optionally, a catch **3554** is provided which, when depressed, bends the lever **3550** so that it no longer interferes with surface **3552**, allowing the cap **3510** to rotate and be removed from the adaptor **3508**.

The locking and unlocking mechanism comprised of lever **3550** and interfering surface **3552** may provide the advantage of preventing the cap **3510** from detaching unexpectedly from the adaptor **3508**. Embodiments including recess **3560** potentially provide the advantage of giving tactile and/or auditory feedback to the user as the lever springs into it, indicating that the cap **3510** has been securely fastened. Embodiments where the mechanism is further comprised of catch **3554** allow mechanical advantage and/or a broader surface area to be applied to the bending of lever **3550**, overcoming the lock more easily than by direct pressure on lever **3550** itself.

The use of a rotating motion to securely couple cap **3510** to adaptor **3508** may provide an advantage for patients sensitive to abdominal pain—for example, as may occur during recovery after a surgery—by reducing the need to push inward on the abdomen. The mechanical advantage obtained by using a rotating motion to secure a threaded attachment mechanism **3556** and **3558** may serve to assist patients lacking the strength to press-fit ostomy stack components together. The wide gripping surface provided by the rotating cap housing **3512** may provide an advantage by reducing the number of fine motor movements required to assemble ostomy stack components on the body. Said wide gripping surface may also provide an advantage by reducing the torque required for fastening the cap onto the adaptor.

In some embodiments of the invention, a waste pouch **3514** is provided which attaches to cap housing **3512**, and has an opening disposed to receive waste flowing through aperture **3566** in the cap. Optionally, the pouch is collapsed. Optionally, the pouch is collapsed by being folded into a low-profile package. Optionally, the collapsed pouch is restrained from deploying by a lid **3516**. The lid **3516** may be secured to cap housing **3512**, for example by means of a connecting element **3564**, which may be a

flange. The connecting element **3564** may mate to a complementary connecting element (not shown) of the cap housing **3512**.

In some embodiments of the invention, the connecting element **3564** is designed so as to self-release upon a certain pressure being exerted on lid **3516**. This self-release
5 may be, for example, by means of a deformation of the material of the lid under the force of internal pressure. In embodiments where the lid restrains a collapsed pouch, self-release also allows the pouch **3514** to deploy, so that it can receive waste.

A self-releasing lid **3516** may provide an advantage by preventing excessive buildup of internal pressure and/or material behind the ostomy appliance. Such buildup,
10 if unrelieved, might lead, for example, to leakage of one of the ostomy appliance seals and/or to formation of intestinal blockage.

In some embodiments of the invention, lid **3516** is constructed with a cavity **3515**, sized to hold the collapsed pouch **3514**.

A lid **3516** with a cavity **3515** may, by reducing one thickness requirement of
15 the ostomy appliance, provide the advantage of lowering the protruding profile of the overall ostomy appliance. Alternatively, it may provide the advantage of allowing additional internal space, for example to accommodate tissue protruding from a stoma, or to accommodate other ostomy appliance elements.

In some embodiments of the invention, the lumen of adaptor **3508** contains a
20 sealing element **3509**, a secondary sealing-directed element with a potential role in primary sealing. Optionally, sealing element **3509** is attached to adaptor housing **3546** by welding or bonding (adhesive or chemical). Optionally, sealing element **3509** is molded onto adaptor housing **3546** by over-molding or two-shot molding. Optionally, sealing element **3509** may be made of a soft elastomer, for example silicon rubber, or a
25 thermoplastic elastomer, for example SEBS. The durometer of sealing element **3509** is, for example, between 5-20 Shore A.

In some embodiments of the invention, a cap surface **3562** is forced up against a sealing element **3509** of the adaptor when cap **3510** and adaptor **3508** are fully coupled. Optionally, the parts of the locking mechanism may be disposed so as to allow a degree
30 of rotation sufficient to adjust the resistance of the seal to the flow of gas, without the rotational lock being overcome. Optionally, sealing element **3509** may also provide secondary sealing by a pressing of its distal surface against surface of an ostomy wafer

(not shown) or the body of the user (not shown), and resisting the flow and/or leakage of waste.

The seal between cap surface **3562** and sealing element **3509** may provide the advantage of ensuring that waste entering the lumen of the adaptor continues through the aperture **3566** of the cap housing **3512** to pouch **3514**, instead of leaking to the exterior of the ostomy appliance. A selective lowering in the resistance of the seal allows internal gasses to escape more quickly, which may provide an advantage, for example, to reduce user discomfort due to built-up pressure, or to prevent self-release of the lid **3516**. Because the gas flow resistance is selectable, flow of liquid and solid waste may be relatively restricted, or prevented. The use of a single sealing element **3509** to provide sealing at both its distal and proximal ends may provide the advantage of a reduced cost by using an integral element for both functions. The integration of sealing element **3509** with the housing **3546** of the adaptor **3508**, for example by over-molding or two-shot molding during manufacture may provide a further advantage of reduced cost.

Exemplary Embodiment Of Adaptor With Rotary Slider

Reference is now also made to *Figure 3* which schematically illustrates an exploded perspective view of adaptor **108** and sealing element **109**, according to an exemplary embodiment of the present invention. In overview, the rotary slider attachment mechanism shown illustrates, for example, that use of a rotating motion to couple ostomy components may be achieved by placing the rotating part on the more distal component of those being coupled. It also illustrates how tab restraint may be augmented with a rotary motion.

Adaptor **108** includes a rotary slider **142**, a fixation ring **144**, and an adaptor body **146**. Fixation ring **144** is shaped, for example with recesses, to receive attachment elements of an overlying cap, for example tab **3130**. Rotary slider **142** is shaped, for example, with notches to allow passage of tabs **3130** into fixation ring **144**. Rotary slider **142** serves as a cover which rotatably fits onto fixation ring **144** which is fixedly attached to adaptor body **146** on proximal end **120**. In some embodiments, rotary slider **142**, fixation element **144**, and adaptor body **146** mechanically resemble cover **108**, fixation ring **110**, and stomal cover **102** disclosed in the aforementioned WO 2011/138727 by the applicant. Optionally, rotary slider **142**, fixation element **144**, and

adaptor body **146** functionally resemble the aforementioned cover **108**, fixation ring **110**, and stomal cover **102** in WO 2011/138727. Sealing element **109** fits into cavity **140** through distal end **124**. In some embodiments, fixation ring **144** is an integral component of adaptor body **146**.

5 EXEMPLARY OSTOMY APPLIANCE AND GAS RELEASE MECHANISMS

Exemplary Adaptor With Rotary Slider And Gas Release

Reference is now also made to Figure 4A which schematically illustrates a partial- exploded perspective view of cap **110** and adaptor **108** in ostomy appliance **100** having an optional gas release mechanism, according to some exemplary embodiments
10 of the present invention. Reference is also made to Figures 4B and 4C which schematically illustrate sectional views of cap **110** fitted onto adaptor **108**, the latter showing a gas flow path **148** between the cap and the adaptor as part of a gas release mechanism, according to some exemplary embodiments of the present invention. In Figure 4B, cap **110** seals cavity **140** for preventing waste contents and gas from
15 escaping from stoma **104** (not shown in the figure) through adaptor **108**. In Figure 4C, cap **110** is displaced away from cavity **140** for releasing gas while preventing waste content from leaking out from adaptor **108**. In some embodiments, adaptor body **146** in adaptor **108** includes a seal **150** similar to seal **138** in the aforementioned document by the applicant.

20 In some exemplary embodiments, gas release through gas flow path **148** is performed in a similar fashion as described in the aforementioned WO 2011/138727 by the applicant. Optionally, a mechanical interaction of cap **110**, rotary slider **142**, fixation ring **144**, and adaptor body **146** including seal **150** for opening gas flow path **148** is similar to that of cap **106**, cover **108**, fixation ring **110**, and stomal cover **102** including
25 seal **138** in the aforementioned document by the applicant.

Exemplary Low Profile Adaptor With Rotary Slider and Gas Release

Reference is made now to Figures 4D, 4E, and 4F, which schematically illustrate a low profile ostomy appliance adaptor in exploded perspective view (Figure 4D), in cross section attached to an ostomy wafer (Figure 4E), and in detailed cross section

attached to a ostomy wafer (*Figure 4F*), according to some embodiments of the invention.

In overview, these drawings illustrate, for example, how a rotary slider located on the distal member of two coupled ostomy stack components may be designed so that it contributes minimal additional height to the assembled ostomy stack. As will now be detailed for this embodiment, the lowered height is optionally achieved by putting the elements which receive the connecting elements of the ostomy cap (not shown) outside the perimeter of the connecting mechanism of the ostomy wafer. This allows them to be located closer to the body, without, for example, interfering with a protruding stoma, and/or with secondary sealing.

A potential advantage of this design relates to manufacturing cost, which may be lowered, compared, for example, to embodiments corresponding to Figure 3. The parts are compatible with a two-shot injection manufacturing process, which reduces the need for more expensive manufacturing steps.

For the user, a potential advantage may arise from lowered cost itself. A lowered user cost may also open for a user possibility of more frequent changing of device components. This can reduce the need for cleaning. Potentially, the user will also enjoy a higher sense of hygiene.

In some embodiments of the invention, adaptor **3600** comprises an adaptor housing **3646** coupled to a rotary slider **3612**. Sealing element **3609** is fitted to adaptor housing **3646**. Optionally, sealing element **3609** is attached to adaptor housing **3646**, for example by chemical bonding or welding. Optionally, sealing element **3609** is molded onto adaptor housing **3646** by over-molding or two-shot molding. In some embodiments sealing element **3609** is a secondary sealing-directed element with a potential role in primary sealing.

In some embodiments of the invention, rotary slider **3612** is attached to adaptor housing **3646** by means of tabs **3611** configured to interfere with rim **3613** of adaptor housing **3646**, such that rotary slider **3612** can rotate around its axis but not move in the axial direction. In some embodiments, the height of all ostomy components together is no more than 12 mm above the level of the wafer. In some embodiments, the height of all ostomy components together is no more than 6 mm above the level of the wafer. For

many ostomates, this may be near to the minimal height available, since a typical stoma rises between 5 mm and 10 mm above the skin.

In some embodiments of the invention, a cap (not shown) is attached to adaptor **3600**, for example, in accordance with attachment elements, design, and principles described in connection to cap **110** and adaptor **108**, with suitable modifications. Optionally, gas release may be achieved by means similar to that described in connection to cap **110** and adaptor **108** in *Figures 4A* and *4B*.

In some embodiments of the invention, adaptor housing **3646** is made of rigid plastic, for example polyamide or polypropylene. In some embodiments of the invention, sealing element **3609** is made of soft elastomer, for example silicone rubber. Optionally, sealing element **3609** is made of thermoplastic elastomer, for example SEBS. The durometer of the sealing element is may be, for example, between 5-20 Shore A.

In some embodiments of the invention, adaptor housing **3646** attaches to the wafer's flange **3615**, for example by means of attachment tabs **3614** that snap onto the flange's circumferential rim **3615**.

In some embodiments of the invention, adaptor housing **3646** includes recesses **3647** configured to accommodate fixation tabs, for example the attachment mechanism **3130** of cap housing **3146** (*Figure 2F*). The recesses **3647** are external to the wafer's attachment flange **3615**, to remove potential interfering with tissue or secondary sealing within the ostomy stack cavity.

In some embodiments of the invention, adaptor rim **3613** and recesses **3647** are positioned externally to the wafer's flange **3615** lowering the protruding profile of the adaptor **3600**. Optionally, the number of tabs provided is suited to stabilizing the corresponding increase in the diameter of the adaptor, for example 6 or 8 tabs, or more.

In some embodiments of the invention, sealing element **3609** includes one or more bumps **3610A** configured to press against wafer flange **3615** when the adaptor **3600** is attached to wafer **3602**.

In some embodiments of the invention, sealing element **3609** includes one or more bumps **3610B** configured to press against a surface of an installed cap, for example, cap housing **3146**.

In some embodiments of the invention, pressing bumps **3610A** and **3610B** on the sealing adaptor **3609** provides the advantage of improved sealing force.

Another Exemplary Ostomy Appliance With Gas Release Mechanism

Reference is now made to Figure 5A which schematically illustrates a perspective view of an adaptor **208** and a removable cap **210** included in an ostomy appliance **200** having an optional gas release mechanism, and to Figure 5B which schematically illustrates a sectional view of the ostomy appliance, according to some exemplary embodiments of the present invention.

In some exemplary embodiments, cap **210** includes a housing **212** with a collapsed pouch **214** and a removable lid **216**. Optionally, lid **216** is similar to lid **116**. In some embodiments, cap **210** is a smart cap. In some embodiments, cap **210** additionally includes one or more tabs **211**, for example 4 tabs as shown, radially extending from a distal end of housing **212**. Tabs **211** are configured for locking cap **210** onto a fixation ring **244** attached to adaptor body **146**. Optionally, fixation ring **244** is an integral component of adaptor body **146**.

In some exemplary embodiments, fixation ring **244** includes one or more cap locking mechanisms **251** into which tabs **211** are inserted for locking cap **210**. Cap locking mechanism **251** includes a lock opening **252**, a rim **254**, and a lock slot **256**. Cap **210** is locked in fixation element **244** by inserting tab **211** through lock opening **252** until the tab abuts a ledge **258** peripherally surrounding opening **122**. Optionally, ledge **258** is an integral component of fixation element **244**. Alternatively, ledge **258** is a surface portion of adaptor body **146** peripherally surrounding opening **122**. Following abutment, cap **210** is rotated for sliding tab **211** under a lock rim **254** until the tab engages lock slot **256**. In some embodiments, lock rim **254** includes an inclined rim portion **260** for guiding tab **211** through lock opening **252**. In some embodiments, fixation ring **244** includes a lock seal **262** peripherally surrounding ledge **258**. Lock seal **262**, which may be an elastomeric seal, for example in the shape of a gasket adapted to be compressed by cap **210** when tab **211** is inserted in lock slot **256**, for providing sealing against waste content leakage and gas leakage. In some embodiments, partial rotation of cap **210** partially retrieves tab **211** from lock slot **256**, reducing the compressive force exerted on lock seal **262**, and allowing a small gap to be opened suitable for release of gas while preventing waste content leakage.

Reference is made to Figures 6A and 6B which schematically illustrate sectional views of cap **110** fitted onto an adaptor **308**, the latter showing a gas flow path **148** through a gas filter **349** between the cap and the adaptor as part of a gas release mechanism, according to some exemplary embodiments of the present invention.

5 In Figure 6A, cap **110** seals cavity **140** for preventing waste contents and gas from escaping from stoma **104** (not shown in the figure) through adaptor **108**. In Figure 6B, cap **110** is displaced away from cavity **140** for releasing gas while preventing waste content from leaking out from adaptor **108**. In some embodiments, adaptor body **346** in adaptor **308** includes a gas filter **349** for filtering gas flow through gas flow path **148**.

10 In some exemplary embodiments, a gas release mechanism described in WO 2011/138727 by the applicant is used with gas flow path **148**.

Another Exemplary Ostomy Appliance With Gas Release

Reference is now made to Figure 7A which schematically illustrates a perspective view of an adaptor **408** having a flexible fixation ring **444** for gas release in
15 an ostomy appliance **400**, and to Figure 7B which shows a front view of the adaptor with the flexible fixation ring in a gas release mode, according to some exemplary embodiments of the invention. In some embodiments, a gas release mechanism described in the aforementioned WO 2011/138727 by the applicant is used with flexible fixation ring **444**. Flexible fixation ring **444** is configured for allowing a gas flow path
20 **448** for gas release from within adaptor **408** when the fixation element is pressed, for example, as shown by the arrows marked "PRESS". In some embodiments, flexible fixation ring **444** is a separate component and attached to adaptor body **146**. Alternatively, fixation ring **444** is an integral component of adaptor body **146**.

Another Exemplary Ostomy Appliance With Gas Release

25 Reference is now made to Figure 8 which schematically illustrates a sectional view of an adaptor **508** in an ostomy appliance **500** having ventilation port **564** for gas release, according to some exemplary embodiments of the present invention.

In some exemplary embodiments, a ventilation lumen **566** extends from ventilation port **564** through adaptor body **546** to cavity **140**. Ventilation lumen **566** is
30 configured for conducting gases from cavity **140** to ventilation port **566** where they are expelled from adaptor **508**. Optionally, ventilation lumen **566** extends along an inner

wall of adaptor body **546** bordering cavity **140** and leads to stoma **104**. Optionally or alternatively, ventilation lumen **566** includes a plurality of openings for reducing the possibility of lumen blockage due to accumulation of waste matter in the lumen's opening.

5 In some exemplary embodiments, ventilation lumen **566** includes a filter **541** for filtering gases flowing through the ventilation lumen in a direction of ventilation port **564**. Additionally or alternatively, ventilation port **564** is fitted with a valve **568** for allowing a user to control gas release. In some embodiments, a gas release mechanism described in *Figure 7* in the WO 2011/138727 by the applicant, is used with valve **568**
10 and filter **561**.

Another Exemplary Ostomy Appliance With Gas Release

Reference is now made to *Figure 9* which schematically illustrates a sectional view of an adaptor **608** having an external ventilation port **664** for gas release in an ostomy appliance **600**, according to some exemplary embodiments of the present
15 invention. Adaptor **608** includes a ventilation lumen **666** optionally mechanically and functionally similar to ventilation lumen **566** in adaptor **508** shown in *Figure 8*. Optionally, ventilation port **664** is configured for receiving a replaceable filter **641** for filtering gases flowing through ventilation lumen **666** in a direction towards ventilation port **664**. In some embodiments, the gas release mechanism described in *Figure 9* in
20 WO 2011/138727 by the applicant, is used with filter **641**.

EXEMPLARY SEALING ELEMENTS

Inflatable Sealing Element

Reference is now made to *Figure 10A* which schematically illustrates an exploded perspective view of an adaptor **708** and an inflatable sealing element **709** in an
25 ostomy appliance **700**, and to *Figure 10B* which schematically illustrates a sectional view of the adaptor with the inflatable sealing element inside cavity **140**, according to some exemplary embodiments of the present invention. Optionally, inflatable sealing element **709** is a balloon, comprised of wall material capable of stretching under the pressure of inflation, such as a silicone elastomer. In some embodiments sealing

element **709** is a secondary sealing-directed element with a potential role in primary sealing.

In some exemplary embodiments, balloon **709** may be configured for being inflated for applying pressure to stoma **104** (not shown in the figure) for increasing the sealing at wafer/stoma interface **105** (not shown in the figure). Additionally or alternatively, balloon **709** may be configured for applying pressure to wafer **102** (not shown in the figure) for increasing the sealing at wafer/stoma interface **105**.

Increasing sealing at wafer/stoma interface **105** reduces possible leakage from adaptor **708** of waste content or of flushing liquid during flushing. Optionally, increased sealing at wafer/stoma interface provides a double sealing arrangement reducing and/or eliminating a pressure of waste content and/or flushing fluid at adaptor/wafer interface **103** (not shown in figure).

Optionally, a direction in which the pressure is applied by balloon **709** is predetermined during manufacture of the balloon and may involve adjusting balloon wall thickness, for example, by reducing thickness in portions of the wall, and/or by reinforcing portions of the wall. Additionally or alternatively, the direction of applied pressure may be predetermined by adjusting the material properties of the wall, such as the elasticity; for example by lamination of some portions with a less elastic reinforcing material. Materials which may be used to reinforce portions of the balloon wall may include fabric or polymeric mesh.

A potential advantage of controlling a direction of pressure application allows for enhancing ostomy appliance **700** sealing against wafer **102** and against stoma **104**. An additional potential advantage of said direction controlling is that a single device can potentially accommodate stomas of various diameters by controlling the extent to which balloon **709** extends in a direction towards stoma **104** during inflation.

Reference is now also made to *Figures 10C* and *10D* which schematically show side views of balloon **709** applying pressure in different directions, according to some exemplary embodiments of the invention. In *Figure 10C*, balloon **709** is shown applying a pressure **P1** in an axial direction pressing against wafer **102** increasing the sealing at wafer/stoma interface **105**. In *Figure 10D*, balloon **709** is shown applying a pressure **P2** in a negative radial direction into cavity **140** pressing against stoma **104** increasing the sealing at wafer/stoma interface **105**. Optionally, the pressure **P1** and/or

P2 may range from 5–40 mmHg, for example, 6 mmHg, 10 mmHg, 15 mmHg, 25 mmHg, 32 mmHg. In some embodiments, adaptor **708** with balloon **709** configured for pressing in the negative radial direction is usable with wafers **102** having wafer ports **118** and/or pouch attachment elements **132** (wafer, wafer port, and pouch attachment element, not shown in the figure) of varying sizes.

Adaptor **708** includes an inflation port **764** in adaptor body **746** and an inflation valve **768** adapted to be accommodated in the inflation port. An inflation lumen **766** extends from inflation port **764** through adaptor body **746** in a direction to cavity **140** and connects with balloon **709**. Inflation and deflation of balloon **709** is through inflation valve **768** which regulates a direction of air flow through inflation lumen **766**.

In some exemplary embodiments, balloon **709** may be an integral component of adaptor **708** and is formed (manufactured) together with the adaptor. Alternatively, balloon **709** is a separate component formed independently of adaptor **708** and assembled into cavity **140** at a later stage of production.

Exemplary Compressible Sealing Element

Reference is now made to *Figure 11* which schematically illustrates a sectional view of an adaptor **808** with a compressible sealing element **809** in an ostomy appliance **800**, according to some exemplary embodiments of the present invention.

In some exemplary embodiments, sealing element **809** is configured for pressing against a proximal surface of wafer **102** (not shown in the figure) when adaptor **808** is attached to wafer **102**, preventing leakage of waste matter and/or flushing fluid through wafer/stoma interface **105** (not shown in the figure). Optionally, sealing element **809** acts as a redundant sealing mechanism to that at wafer/adaptor interface **103** (not shown in figure). Optionally, sealing element **809** is compressibly accommodated inside cavity **140** and is configured for pressing against a peripheral inner wall **141** in the cavity. A potential advantage of the compressive fit inside cavity **140** is preventing waste content from coming in contact with inner wall **141** for facilitating cleaning of adaptor **808**. Optionally or alternatively, sealing element **809** is permanently attached to inner wall **141** for example by means of bonding or welding. Optionally, sealing element **809** is further configured for pressing against wafer **102** (not shown in the figure) for enhancing sealing around stoma **104** at wafer/stoma interface **105** (not shown in the figure). In some embodiments, sealing element **809** pressing against wafer **102** allows

for sealing to be maintained at wafer/stoma interface **105** during natural flexing of the wafer.

In some exemplary embodiments, sealing element **809** includes a foam material, optionally permeable or semi-permeable to gases. Optionally, sealing element **809** is enclosed in a casing **811** which may also be permeable to gases. Optionally, sealing element **809** may include materials, for example charcoal, which may allow the sealing element to be used as a gas filter for filtering flatus passing from stoma **104**, optionally through wafer port **118**, into adaptor **808** (stoma and wafer port are not shown in the figure). In some embodiments, sealing element **809** absorbs odors from flatus, and/or includes a deodorizing agent for deodorizing the flatus. In some embodiments, adaptor **808** includes one or more external ventilation ports **864** and one or more ventilation lumens **866** extending from the ventilation port through adaptor body **846** towards cavity **140**. Gas passing through sealing element **809** may flow through ventilation lumen **866** and out ventilation port **864**. In some embodiments, the foam material in sealing element **809** is configured for absorbing liquid waste content. In some embodiments, an amount of liquid waste content absorbable by sealing element **809** is up to 100 ml, for example, 1 ml, 5 ml, 10 ml, 20 ml, 35 ml, 45 ml, 50 ml, 60 ml, 75 ml, 85 ml, 90 ml, 95 ml. Optionally, sealing element **809** may absorb amounts of liquid waste content in excess of 100 ml, for example, 120 ml, 150 ml, 180 ml, 200 ml, or more.

Exemplary Disposable Plug Sealing Element

Reference is now made to *Figure 12* which schematically illustrates a sectional view of ostomy appliance **100** attached to wafer **102** covering stoma **104** and having adaptor **108** with a plug **170**, according to some embodiments of the present invention. Plug **170** is sized and shaped to be fittingly accommodated within cavity **140**, and is adapted to seal stoma **104**. Optionally, plug **170** includes a distal end **172** shaped to conform to the shape of stoma **104**. Optionally, plug **170** or distal end **172** is made of a pliable material adapted to self-conform to the shape of stoma **104**. In some embodiments, plug **170** and/or distal end **172** is partially or wholly containable inside stoma **104**.

In some exemplary embodiments, plug **170** may be a disposable plug which is disposed of together with pouch **114**. For example, plug **170** may be pushed into pouch

114 by the pressure of the waste content flowing into the pouch. Additionally or alternatively, plug 170 may be attached to cap 110 so that removal of the cap or of lid 116 pulls the plug away from stoma 104 for allowing waste content flow into the pouch. Optionally, plug 170 is extracted from ostomy appliance 100 by removal of cap 110 or
5 lid 116. In some embodiments, plug 170 is attached to pouch 114 so that deployment of the pouch removes the plug from stoma 104 and extracts the plug from ostomy device 100. In some embodiments, plug 170 is attached to cap 110, lid 116, or pouch 114 by a string, cable, or other attachment element suitable for pulling on the plug.

In some exemplary embodiments, plug 170 may include a non-fluid absorbing
10 solid elastomeric material such as, for example, silicone rubber. Alternatively, plug 170 may include a foam material which is non-fluid absorbing, or alternatively, fluid absorbing for absorbing liquid waste content flowing from stoma 104. Optionally, plug 170 may be adapted to distend when liquid waste content is absorbed. In some
15 embodiments, an amount of liquid waste content absorbable by plug 170 is up to 100 ml, for example, 1 ml, 5 ml, 10 ml, 20 ml, 35 ml, 45 ml, 50 ml, 60 ml, 75 ml, 85 ml, 90 ml, 95 ml. Optionally, plug 170 may absorb amounts of liquid waste content in excess of 100 ml, for example, 120 ml, 150 ml, 180 ml, 200 ml, or more.

Exemplary Absorbing Pad Sealing Element

Reference is now made to *Figure 13* which schematically illustrates a sectional
20 view of ostomy appliance 100 attached to wafer 102 covering stoma 104 and having adaptor 108 with an absorbing pad 174, according to some embodiments of the present invention. In some embodiments, pad 174 is a secondary sealing-directed element with a potential role in primary sealing. Absorbing pad 174 may be fitted inside cavity 140
between stoma 104 and pouch 114, and is adapted to absorb liquid waste content
25 thereby reducing possible leakage of liquid waste content from adaptor 108. Optionally, absorbing pad 174 peripherally surrounds stoma 104. In some embodiments, an amount of liquid waste content absorbable by absorbing pad 174 is up to 100 ml, for example, 1 ml, 5 ml, 10 ml, 20 ml, 35 ml, 45 ml, 50 ml, 60 ml, 75 ml, 85 ml, 90 ml, 95 ml. Optionally, absorbing pad 174 may absorb amounts of liquid waste content in excess of
30 100 ml, for example, 120 ml, 150 ml, 180 ml, 200 ml, or more. Liquid waste content absorption by absorbing pad 174 potentially reduces the sealing requirements of sealing element 109 and/or at wafer/adaptor interface 103. Additionally or alternatively,

absorbing pad **174** may serve to reduce an amount of liquid waste content required to be handled at wafer/stoma interface **105** and/or wafer/adaptor interface **103**. In some embodiments, liquid waste absorption by absorbing pad **174** potentially facilitates cleaning of adaptor **108**.

5 In some exemplary embodiments, absorbing pad **174** may be a disposable pad which is disposed of together with pouch **114**. For example, absorbing pad **174** may be pushed into pouch **114** by the pressure of the waste content flowing into the pouch. Additionally or alternatively, absorbing pad **174** may be attached to cap **110** so that removal of the cap or of lid **116** pulls the pad away from stoma **104**. Optionally,
10 absorbing pad **174** is extracted from ostomy appliance **100** by removal of cap **110** or lid **116**. In some embodiments, absorbing pad **174** is attached to pouch **114** so that deployment of the pouch removes the pad from stoma **104** and extracts the pad from ostomy device **100**. In some embodiments, absorbing pad **174** is attached to cap **110**, lid **116**, or pouch **114** by a string, cable, or other attachment element suitable for pulling on
15 the pad.

In some exemplary embodiments, absorbing pad **174** is made of a relatively highly liquid absorbing material such as, for example, cotton, cellulose, or other material from the group of materials known as super-absorbent polymers, or any combination thereof.

20 In some exemplary embodiments, absorbing pad **174** is annular in shape, and has a round cross-section, for example as in an O-ring, for peripherally surrounding a circular stoma at wafer/stoma interface **105**. Optionally, the cross-sectional shape of absorbing pad **174** conforms to the shape of sealing element **109** at wafer/stoma interface **105**. Additionally or alternatively, absorbing pad conforms to the shape of
25 cavity **140**. In some embodiments, absorbing pad **170** has a non-circular cross-sectional shape conforming to the shape of sealing element **109** at wafer/stoma interface **105**, to the shape of stoma **104**, and/or to the shape of cavity **140**. In some embodiments, adaptor **108** is fitted with a differently shaped absorbing pad, for example, a disc shape absorbing pad **176** as shown in *Figure 14*. In some embodiments, the absorbing pad is
30 accommodated in cap **110** inside housing **112**, for example as shown by absorbing pad **176** in *Figure 15* positioned between pouch **114** and a distal opening **111** in the cap.

Alternatively, other absorbing pads may be used inside housing **112**, for example absorbing pad **174**.

EXEMPLARY FLUSHING MECHANISM

Flushing-Type Sealing Element With Internal Fluid Distribution

5 Reference is now made to Figures 16A and 16B which schematically illustrate perspective views of an adaptor **908** having a flushing-type sealing element **909** in an ostomy appliance **900**, and to Figure 16C which schematically illustrates a sectional view of the adaptor with the sealing element, according to some exemplary embodiments of the present invention. In some embodiments sealing element **909** is a
10 secondary sealing-directed element with a potential role in primary sealing. Adaptor **908** including sealing element **909** are configured for introducing a fluid into an internal portion of adaptor **908**. Optionally, said fluid can be introduced into stoma **104** (not shown in the figures), for example for intestinal irrigation. In some embodiments, the
15 flushing fluid is used for easing flow of waste matter through adaptor **908** into the pouch, for washing the stoma, for washing the peristomal skin, for washing the interior of the adaptor, for irrigating an interior of the intestine, or any combination thereof. In some embodiments, flushing is performed without sealing element **909** by introducing the flushing fluid into cavity **140** and therefrom to the stoma and other areas.

 In some exemplary embodiments, adaptor body **946** includes a flushing port **964**
20 through which the flushing fluid may be injected, or otherwise administered, into adaptor **908**. A flushing lumen **966** extends from flushing port **964** through adaptor body **946** in a direction towards cavity **140**, connecting to a feeder port **965** in an outer wall **911** of sealing element **909**. A feeder lumen **967** inside sealing element **909** extends from feeder port **965** to one or more distribution lumens **969**, for example four
25 distribution lumens, peripherally extending along at least a portion of the sealing element. One or more flushing openings **971**, for example, 64 openings, are spaced along an inner wall **913** of sealing element **909** and are fluidly connected to distribution lumens **969**. Optionally, a number of distribution lumens **969** and/or a number of flushing openings **971** included in sealing element **909** varies with a particular flushing
30 application. Optionally, a design including location, size, and/or shape of distribution lumens **969** and/or flushing openings **971** in sealing element **909** vary with the

application. For example, a sealing element used only for irrigation of the stoma may be different than a sealing element also used for washing the interior of the adaptor and/or washing the stoma and/or the peristomal skin.

An exemplary method of performing flushing, according to some embodiments, includes the user introducing the flushing fluid through flushing port **964** into flushing lumen **966**. Optionally, a volume of the flushing fluid may range from 20 ml–1000 ml, or more, for example, 50 ml, 80 ml, 150 ml, 250 ml, 350 ml, 500 ml, 700 ml, 850 ml, 950 ml, 1100 ml, 1200 ml, 1500 ml. Fluid flow through flushing lumen **966** enters through feeder port **965** into feeder lumen **967**, and therefrom into distribution lumens **969**. The flushing fluid flowing through distribution lumens **969** exits through flushing openings **971** and flows therefrom into cavity **140** and other areas to be flushed.

In some exemplary embodiments, sealing element **909** may include a slot peripherally extending along outer wall **911** and positioned such that, regardless how the sealing element is positioned inside cavity **140**, the slot is always aligned with flushing lumen **966** so that the flushing fluid flowing through the flushing lumen enters into the slot. Extending from the slot may be one or more feeder lumens **967**, for example 2, 4, 7, 10, or more feeder lumens which are fluidly connect with one or more distribution lumens **969** and into which the flushing fluid from the slot flows.

In some exemplary embodiments, distribution lumens **969** and flushing openings **971** are sized and positioned in sealing element **909** for obtaining fluid flow in a predetermined location and/or direction. In some embodiments, flushing openings **971** are made of a relatively small size for allowing fluid flow out the openings and substantially preventing fluid flow back into the openings. In this manner, flushing openings **971** act as one-way valves, or flutter valves, and prevent possible outflow of waste content through the flushing system. Optionally, fluid flow out of flushing openings **971** may be at a pressure of up to 300 mm/Hg, for example 100 mm/Hg, 150 mm/Hg, 200 mm/Hg, 250 mm/Hg. In some exemplary embodiments, flushing port **964** may be closed by a flushing plug **968**. Flushing plug **968** may serve to prevent outflow of flushing fluid administered into adaptor **908**. Optionally, flushing plug **968** prevents outflow of gases or waste matter from within adaptor **908** through the flushing system. In some embodiments, a one-way valve (not shown) is included in flushing lumen **966**.

Exemplary Flushing-Type Sealing Element With External Fluid Distribution

Reference is now made to Figure 17A which schematically illustrates a perspective view of a flushing-type sealing element **909'**, and to Figure 17B which schematically illustrates a sectional view of adaptor **908** with the sealing element inside cavity **140**, according to some exemplary embodiments of the present invention.

In some exemplary embodiments, sealing element **909** includes a feeder channel **967'** circumferentially extending along outer wall **911'** and connecting to one or more inlet slots **969'**. Inlet slots **969'** extend from feeder channel **967'** along a proximal side **915'** of sealing element **909'** in a direction towards an inner wall **913'** and terminate at flushing openings **971'** proximal to inner wall **913'**. In some embodiments, flushing openings **971'** include reduced-size slots which allow fluid flow in a direction into cavity **140** while preventing backflow up into inlet slots **969'** (functionally similar to a flutter valve).

An exemplary method of performing flushing, according to some embodiments, includes the user introducing the flushing fluid through flushing port **964** into flushing lumen **966**. Fluid flow through flushing lumen **966** enters into feeder slot **967'** and therefrom into inlet slot **969'**. The flushing fluid flowing through inlet slots **969'** exit through flushing openings **971'** and flow therefrom into cavity **140** and other areas to be flushed.

In some exemplary embodiments, openings **971'** are located on inner wall **913'**. Alternatively, gaps **972'** are left between openings **971'** and inner wall **913'**, such that inlet slots **969'** are normally not in fluid communication with cavity **140**. In the later configuration, backflow of gases or waste matter from cavity **140** into slots **969'** is eliminated while inflow of flushing fluid from slots **969'** into cavity **140** is possible, through a check-valve mechanism known in the art as a "flutter valve" or a "duckbill valve". When a pressurized fluid is present in inlet slots **969'**, its pressure acts on gaps **972'** and forces them to shift in the distal direction thus enabling the fluid to flow into cavity **140**. When a pressurized fluid is present in cavity **140**, its pressure acts on inner wall **913'**. As a result gaps **972'** are tightened onto the adaptor's body, thus flow of fluid from cavity **140** into inlet slots **969'** is eliminated.

Exemplary Flushing-type Sealing Element With Flushing Tube

Reference is now made to *Figure 18* which schematically illustrates a section of adaptor **908** including a flushing-type sealing element **909''** in ostomy appliance **900**, according to some exemplary embodiments of the present invention. Sealing element **909''** includes a feeder lumen **967''** extending from an outer wall **911''** to an inner wall **913''** in the sealing element, having a feeder port **965** on the outer wall, and an outlet port **975** on the inner wall. Outlet port **975** is configured for attaching a flushing tube **977** which may be inserted into stoma **104** (not shown in the figure) for intestinal flushing or irrigation.

10 EXEMPLARY INTEGRATED-COMPONENT OSTOMY APPLIANCES

Exemplary Integrated-component Cap/Adaptor

Reference is now made to *Figure 19* which schematically illustrates a sectional view of an integral ostomy appliance **1000** for attaching to wafer **102**, according to some exemplary embodiments of the present invention. *Figure 19* illustrates an embodiment where a cap and an adaptor are integrally formed.

In some exemplary embodiments, integral ostomy appliance **1000** includes an adaptor **1008** having a housing **1012** accommodating collapsed pouch **114**, and removable lid **116**. In some embodiments, lid **116** removal and pouch **114** deployment use mechanisms earlier described for ostomy appliance **100**. Optionally, integral ostomy appliance **1000** includes sealing element **109**. Integral ostomy appliance **1000** includes attachment mechanism **130** which mates with pouch attachment element **132** for attaching the ostomy appliance to wafer **102**. In some embodiments, integral ostomy appliance **1000** includes any one feature, or combination of features, previously disclosed herein in some exemplary embodiments of the ostomy appliance. In some embodiments, integral ostomy appliance **1000** is disposed of following deployment of pouch **114**. Alternatively, housing **1012** including deployed pouch **114** is replaced by a new housing **1012** with a collapsed pouch **114**.

Exemplary Integral-component Adaptor/Wafer

Reference is now made to *Figure 20* which schematically illustrates a sectional view of an ostomy appliance **1100** including an integral adaptor/wafer **1108**, according

to some exemplary embodiments of the present invention. *Figure 20* illustrates an embodiment where a wafer and an adaptor are integrally formed.

Adaptor/wafer **1108** includes an adaptor body **1146** and wafer **1102** integrally manufactured as a single component. Alternatively, adaptor body **1146** and wafer **1102** are separately manufactured as two components and are joined together through methods known in the art which may include, for example, bonding or welding.

In some exemplary embodiments, adaptor/wafer **1108** is adapted to accommodate cap **110**. Alternatively, adaptor/wafer **1108** is adapted to accommodate cap **210**. In some embodiments, adaptor/wafer **1108** includes sealing element **109**. In some embodiments, sealing element **109** is separately attachable to the adaptor/wafer. Alternatively, sealing element **109** may be formed integrally with adaptor/wafer **1108**. In some embodiments, ostomy appliance **1100** includes any one feature, or combination of features, previously disclosed herein in some exemplary embodiments of the ostomy appliance. In some embodiments, adaptor/wafer **1108** is disposed of following a predetermined period of time, or a predetermined number of pouch deployments, or as required by the user.

Exemplary Integral-component Cap/Wafer/Adaptor

Reference is now made to *Figure 21* which schematically illustrates a sectional view of an integral ostomy appliance **1200** including a collapsed pouch **114**, a wafer **1202**, and a lid **116**, according to some exemplary embodiments of the present invention. Ostomy appliance **1200** includes an adaptor body **1246** having a housing **1212** and a wafer **1202** integrally manufactured as a single component. Alternatively, adaptor body **1246** including housing **1212** and wafer **1202** are separately manufactured as two or more components and are joined together, for example, through methods known in the art which may include, for example, bonding (chemical or adhesive) or welding. Lid **116** and collapsed pouch **114** are separately included in ostomy appliance **1200**. In some embodiments, ostomy appliance **1200** includes any one feature, or combination of features, previously disclosed herein in some exemplary embodiments of the ostomy appliance.

In some embodiments, ostomy appliance **1200** is disposed of following a predetermined period of time, or a predetermined number of pouch deployments, or as required by the user. Optionally, housing **1212** including deployed pouch **114** is

replaced by a new housing **1212** with a collapsed pouch **114**. A potential advantage in replacing only housing **1212** with pouch **114** includes minimum handling by the user of the ostomy appliance and reduced storage space required in handbags and briefcases as only the housing is required.

5 Exemplary Integrated Lid/Adaptor

Reference is now made to Figure 22A which schematically illustrates a perspective view of adaptor **208** shown in Figures 5A and 5B including an integrated lid **210'**, and to Figure 22B which schematically illustrates a sectional view of the adaptor and the integrated lid, according to some exemplary embodiments of the present invention. Integrated lid **210'** is fastened to adaptor **208**, for example by means of a hinge, which may be a flexible tab or a hinged pin arrangement or a cable or other suitable attachment means, and is adapted to cover proximal opening **122**.

In some embodiments, lid **210'** serves as a pressure sensing cap for indicating to the user a need to evacuate. Optionally, lid **210'** is adapted for use with some embodiments of cap **210** not configured with a pressure warning mechanism. In this configuration, cap **210** is inserted into the proximal opening and attached to adaptor **208**, and lid **210'** is closed over cap **210** and secured against adaptor body **244**.

In some exemplary embodiments, integrated lid **210'** may be used for preventing undesired deployment of collapsed bag **114**. In some embodiments, integral lid **210'** seals proximal opening **122** for preventing waste content from flowing or leaking out the proximal opening when closed over the proximal opening.

In some exemplary embodiments, adaptor **208** includes a fastening mechanism including a first mating element **264** on adaptor body **244** and a second mating element **266** on lid **210'** for securing the cap against the adaptor body. Optionally, first mating element **264** and/or second mating element **266** are pressure activated by the user for securing lid **210'** against adaptor body **244** and/or for releasing the cap from the body.

Exemplary Integral-Component Cap/Wafer Assembly

Reference is now made to Figures 22C and 22D which schematically illustrate perspective views of, respectively, an exploded and an assembled integral ostomy stack **3400** including a wafer **3402**, an adaptor **3446**, a collapsed pouch **3414**, and a lid **3416**, according to some exemplary embodiments of the present invention. The exemplary

ostomy stack **3400** encompasses the functions of wafer, adaptor and cap in a single integrated component, and illustrates how such a stack may include a lidded, flat-folded pouch and an aperture-held filter to add waste release control functionality while maintaining a minimal stack height.

5 In some embodiments the ostomy component stack **3400** is especially designed for brief and/or active use. By making the stack as low as possible, a fuller advantage can be taken of flexible materials, providing a more conforming ostomy appliance. As long as a short period of wearing is intended, even some pressing of the stoma may be tolerated, in exchange for a lowered profile. In embodiments where the wearing period
10 is brief, the pouch is provided primarily as a backup in case deployment becomes suddenly necessary. In such embodiments, the adhesive may be weaker, since it does not need to support the full weight of a filled waste collection pouch.

The ostomy wafer **3402** is integrally attached to ostomy adaptor **3446**. Ostomy adaptor **3446** includes an attachment element **3432** which is optionally a flange.

15 Optionally, the diameter of ostomy wafer port **3422** may be chosen to suit the diameter of the stoma. Optionally, the portion of the pad **3404** of the ostomy wafer peripherally enclosed within the lumen of the adaptor **3446** may be constructed so that a suitably-sized wafer port may be cut from it before use.

A waste-receiving aperture of the collapsed pouch **3414** is attached, for example
20 by chemical bonding or welding, so that it is in fluid communication with the lumen of adaptor **3446**. In some embodiments, the pouch **3414** is folded into a flattened package which is contained by lid **3416** when it is attached to attachment element **3432**.

In some embodiments, a pull-tab **3417** is provided on lid **3416**, which protrudes from the lid. Optionally, the pull-tab protrudes laterally. Optionally, the pull-tab is large
25 enough to be comfortably gripped with the fingers. Optionally, the pull-tab is of a material sufficiently flexible that a gripping appendage, for example a finger, can be inserted behind it. The pull-tab **3416** may be advantageous in removing lid **3417**, which allows the expansion of waste pouch **3414**, due, for example, to filling by waste.

In some embodiments, a pull-tab **3419** is provided on ostomy wafer **3402**, which
30 protrudes from the wafer, and is optionally constructed as a protrusion of pad **3404**. Optionally, the pull-tab is not adhered to the underlying skin. Optionally, the pull-tab protrudes laterally. Optionally, the pull-tab is large enough to be comfortably gripped

with the fingers. Optionally, the pull-tab is of a material sufficiently flexible that a gripping appendage can be inserted behind it. The pull-tab **3419** is advantageously used to remove ostomy wafer **3402**, in order, for example, to exchange an old wafer with a replacement.

5 In some embodiments, a filter **3449** is provided, disposed within the ostomy appliance so as to permit gasses to escape through it from within the ostomy appliance. Optionally, adaptor **3446** is provided with an aperture **3450** which contains the filter **3449**.

10 Optionally, ostomy wafer **3402**, ostomy adaptor **3446** and lid **3416** are formed from a flexible and/or elastic material, for example silicone rubber or TPE, or a semi-rigid material such as, for example, polyethylene. Forming of said components from a flexible and/or elastic or semi-rigid material may provide an advantage by enabling the ostomy stack to conform to body movements and/or skin folds while occluding effluents emanating from the stoma.

15 EXEMPLARY METHODS OF USING AN OSTOMY APPLIANCE

Exemplary Method Of Covering A Stoma Using Ostomy Appliance

Reference is now made to Figure 23 which is a flow chart of a method of covering a stoma with an ostomy appliance, according to an exemplary embodiment of the present invention. In describing the method drawing references are made to the various combinations of separate and integrated ostomy components and appliances described herein.

At **2301**, the user determines whether the ostomy appliance to be used includes an integral adaptor/wafer.

25 If so, the user further determines at **2302** whether or not the ostomy appliance includes an integral cap/adaptor, and if so attaches the integrated appliance (corresponding, for example, to **3400**) over the stoma **2303**, finishing the task. If not, the user proceeds with attaching the integral adaptor/wafer **1102**, **1108** over the stoma **2304**, and continues with **2309** as described below.

30 From a negative determination at **2301**, the user proceeds to attach the wafer (for example, **102**) over stoma **2305**. The user then determines if the ostomy appliance includes an integrated cap/adaptor **2306**. If so, the user attaches an integral cap/adaptor

1008 to the wafer **2307**, and the task is finished. If not, the user attaches an adaptor **108** to the wafer **2308**, and continues with **2309**.

At **2309**, the user determines if the adaptor includes an integrated lid **116**. If it does, the user attaches a housing **112** with a collapsed pouch **114** to the adaptor **2310**,
5 and closes the lid **116** over the housing **2311**. If not, the user attaches a cap **110** to the adaptor **2312**. In either case, the task is finished.

Method Of Using The Ostomy Appliance

Reference is now made to *Figure 24* which is a flow chart of a method of using a smart cap with an ostomy appliance, according to an exemplary embodiment of the
10 present invention. In describing the method, reference is made herein to one or more of the exemplary embodiments of the ostomy appliance previously described.

At **2401**, the user, during the course of the day, senses pressure from waste content which requires evacuation. Optionally, the pressure is sensed through a sensing lid **116** on cap **110** protruding in a proximal direction and/or through other pressure
15 sensing features which may be available in the smart cap.

At **2402**, optionally, in response to the sensed pressure the user slightly releases cap **110** from adaptor **108** opening a gas flow path **148** between proximal end **120** in the adaptor and the cap. Alternatively, the user activates other gas releasing mechanisms in adaptor **108**, for example, by pressing a gas release valve **568** in an adaptor **508**, or by
20 pressing on a flexible fixation ring **444** on adaptor **408**. In some embodiments, gas filter and/or deodorizing is performed, for example, by gas filter **349** in adaptor **308**, or gas filter **541** in adaptor **508**, or by sealing element **809** used with adaptor **808**.

At **2403**, the user determines if there is waste content to release. If no, the method returns to stage **2401**. If yes, the method continues to stage **2404**.

25 At **2404**, the user removes lid **116**. Manually removing the lid may be done at a time and place chosen by the user, for example in the privacy of a sanitary facility. Alternatively, lid is automatically ejected by safety release mechanism or other pressure-activated release mechanism.

At **2405** the ostomy bag is automatically deployed by the axial pressure from the
30 waste content pushing on collapsed pouch **114**, allowing the waste content to flow into the pouch. Alternatively, the user deploys collapsed pouch **114** using a strap or cord attached to the pouch, or any other method suitable for deployment of the bag.

At **2406**, the user, having finished evacuation disposes of the deployed ostomy pouch **114** and waste content. Optionally, the user releases cap **110** including deployed pouch **114** from adaptor **108** for disposing the pouch.

At **2407**, the user optionally determines if either ostomy wafer **102** or adaptor **5 508** requires replacement. If no, the method continues to stage **2409**. If yes, the method continues to stage **2408**.

At **2408**, the user optionally detaches adaptor **108** from wafer **102** for disposing of the adaptor. Optionally the user removes the wafer for disposing of the wafer. Optionally, a new wafer **102** is placed over stoma **104** and adaptor **108** reattached to the new wafer. Alternatively a new adaptor **108** is attached to the wafer. Alternatively, adaptor **108** is attached to new wafer **102** before being placed over stoma **104**. In some embodiments, the user removes wafer **102** together with adaptor **108** and then detaches the adaptor. In some embodiments, wafer **1102** and adaptor **1108** are integrally attached and removed together. Optionally, wafer **1102** and adaptor **1108** are replaced by a new adaptor, wafer, and/or integral wafer and adaptor. Wafer and/or adaptor are then reattached.

At **2409**, the user reattaches a new cap **110** having a new collapsed pouch **114** to proximal end **120** of adaptor **108**. Alternatively, the user reattaches removed cap **110** following accommodating a new collapsed pouch **114** in the cap. In some embodiments, stage **2409** is included in stage **2408** with new cap **110** coupled to adaptor **108** prior to coupling to wafer **102** or to placing over stoma **104**.

At **2410**, the user attaches lid **116** to cap **110**. Optionally, sensing lid **116** is that previously used. Alternatively, new cap in **2409** includes a new lid **116**.

At **2411**, the user, during the course of the day, may require flushing of adaptor **108**. Optionally, flushing may include washing the interior of adaptor **108**, the stoma, the peristomal skin, intestinal irrigation, or any combination thereof. If flushing is required continue to stage **2412**. If flushing is not required, go to stage **2401**.

At **2412**, the user connects a flushing fluid source to the adaptor, for example, through a flushing port **964** in adaptor **908**. Optionally, the user first opens a plug **968** on flushing port **964** prior to connecting the flushing fluid source, which may be, for example, a bag or syringe of saline solution, to the flushing port. In some embodiments, the flushing fluid flows into the interior of adaptor **108** through flushing lumen **966** in

the adaptor which is in fluid communication with the sealing element, for example, sealing element **909** or **909'**. Optionally, the flushing fluid flows out from sealing element **909** or **909'** into the interior of adaptor **908**, washing the adaptor's interior, the stoma, the peristomal skin, or irrigating the intestine, or any combination thereof.

5 Additionally or alternatively, a flushing tube **977** leading into the intestine may be connected to the sealing element, for example, sealing element **909''**, for irrigating the intestine.

In some embodiments, the flushing fluid source is connected, for example, by pressure fitting or threading, to a dedicated inlet in the cap. Optionally, the user first
10 detaches the regular cap from the adaptor, then attaches a new cap adapted for connecting a flushing fluid source. Optionally, said adapted cap includes a high-capacity pouch adapted to receive waste and flushing fluid.

In some embodiments, during the flushing the user removes lid **116** for deploying pouch **114** for allowing the flushing fluid to flow into the pouch together with
15 waste residue (stages **2404** and **2405**). Optionally, the user deploys pouch **114** prior to applying the flushing fluid. Alternatively, the user deploys pouch **114** after applying the flushing fluid. Optionally, the user allows the fluid to remain inside the bowel for some time, and only then remove lid **116** and deploy pouch **114** to allow bowel content flush out.

20 The Ostomy Appliance In Situ

Reference is now made to Figures 25, 26, and 27, which are pictures of an exemplary ostomy appliance as it is worn on the body during use.

In Figure 25, the abdomen of a user **3600** is shown with a partially assembled ostomy stack in place. An ostomy wafer **3620** (adherent surface of the ostomy wafer is
25 indicated) is further secured into place by an ostomy belt **3605**. An adaptor **3610** is attached over the wafer. The lumen of the adaptor **3615** is in fluid communication with the open stoma underneath.

In Figure 26, a cap **3625** comprised of a housing, pouch, and lid has been attached over the adaptor **3610**.

30 In Figure 27, the lid has been removed from the cap **3625**, allowing the pouch **3630** to unfold from its stored position. The lumen **3615** leading to the stoma is discernible through the translucent material of the deployed pouch.

BLOCK DIAGRAM OF AN OSTOMY APPLIANCE

Reference is now made to *Figure 28* which is a block diagram of ostomy appliance **100** and some of its components, according to some exemplary embodiments of the present invention. In some embodiments, ostomy appliance **100** includes any one component, or combination of components, disclosed herein for the ostomy appliance. Additionally or alternatively, ostomy appliance **100** includes any one component or combination of components disclosed herein in other exemplary embodiments of the ostomy appliance. In some embodiments, ostomy appliance **100** includes integrally formed components.

The terms “comprises”, “comprising”, “includes”, “including”, “having” and their conjugates mean “including but not limited to”.

Throughout this application, various embodiments of this invention may be presented in a range format. It should be understood that the description in range format is merely for convenience and brevity and should not be construed as an inflexible limitation on the scope of the invention. Accordingly, the description of a range should be considered to have specifically disclosed all the possible subranges as well as individual numerical values within that range. For example, description of a range such as from 1 to 6 should be considered to have specifically disclosed subranges such as from 1 to 3, from 1 to 4, from 1 to 5, from 2 to 4, from 2 to 6, from 3 to 6 etc., as well as individual numbers within that range, for example, 1, 2, 3, 4, 5, and 6. This applies regardless of the breadth of the range.

Whenever a numerical range is indicated herein, it is meant to include any cited numeral (fractional or integral) within the indicated range. The phrases “ranging/ranges between” a first indicate number and a second indicate number and “ranging/ranges from” a first indicate number “to” a second indicate number are used herein interchangeably and are meant to include the first and second indicated numbers and all the fractional and integral numerals therebetween.

It is appreciated that certain features of the invention, which are, for clarity, described in the context of separate embodiments, may also be provided in combination in a single embodiment. Conversely, various features of the invention, which are, for brevity, described in the context of a single embodiment, may also be provided

separately or in any suitable subcombination or as suitable in any other described embodiment of the invention. Certain features described in the context of various embodiments are not to be considered essential features of those embodiments, unless the embodiment is inoperative without those elements.

5 All publications, patents and patent applications mentioned in this specification are herein incorporated in their entirety by reference into the specification, to the same extent as if each individual publication, patent or patent application was specifically and individually indicated to be incorporated herein by reference. In addition, citation or identification of any reference in this application shall not be construed as an admission
10 that such reference is available as prior art to the present invention. To the extent that section headings are used, they should not be construed as necessarily limiting.

WHAT IS CLAIMED IS:

1. An ostomy appliance comprising an adaptor having a distal end adapted to be coupled to an ostomy wafer and a proximal end adapted to be coupled to a cap, said distal end having an opening in fluid communication with an opening in said proximal end.
2. An ostomy appliance according to claim 1 comprising a cap adapted to be removably coupled to said adaptor.
3. An ostomy appliance according to claim 1 or 2 wherein said ostomy wafer is removably coupled to said adaptor.
4. An ostomy appliance according to any one of claims 1-3 wherein said adaptor includes a sealing mechanism for sealing a wafer/adaptor interface.
5. An ostomy appliance according to claim 4 wherein said adaptor includes an attachment mechanism configured to mate with an attachment element on said wafer, and said sealing mechanism is integral to said attachment mechanism.
6. An ostomy appliance according to any one of claims 1-4 wherein said adaptor includes an attachment mechanism for mating with an attachment element on said wafer.
7. An ostomy appliance according to any one of claims 5-6 wherein said attachment mechanism includes a snap-fit mechanism.
8. An ostomy appliance according to any one of claims 5-6 wherein said attachment mechanism includes a twist-and-lock mechanism.
9. An ostomy appliance according to any one of claims 5-6 wherein said attachment mechanism comprises a chemical bonding mechanism.

10. An ostomy appliance according to any one of claims **2-9** further comprising a cap locking mechanism for affixing said cap to said adaptor.
11. An ostomy appliance according to claim **10** wherein the cap is affixed by threading onto the adaptor.
12. An ostomy appliance according to any one of claims **10-11** wherein said cap locking mechanism is adapted to sealingly couple between the cap and the adaptor.
13. An ostomy appliance according to any one of claims **4-5** and **12** wherein said sealing is configured to withstand a pressure differential of 15 mmHg.
14. An ostomy appliance according to any one of claims **4-5** and **12** wherein said sealing is configured to withstand a pressure differential of 50 mmHg.
15. An ostomy appliance according to any one of claims **4-5** and **12** wherein said sealing is configured to withstand a pressure differential of 150 mmHg.
16. An ostomy appliance according to any one of claims **2-11** wherein said adaptor includes an opening for releasing gas flowing from the stoma.
17. An ostomy appliance according to claim **16** wherein said opening is selectively controlled by a user of the ostomy appliance.
18. An ostomy appliance according to claim **17** wherein said adaptor includes a rotatable ring for releasing gases flowing from the stoma.
19. An ostomy appliance according to claim **18** wherein manipulating said rotatable ring adjusts a release rate of said gas.
20. An ostomy appliance according to any one of claims **2-19** wherein said adaptor includes a gas filtering mechanism for filtering gases flowing from the stoma.

21. An ostomy appliance according to any of claims **1-20** further comprising a sealing element adapted to be accommodated within an interior cavity of said adaptor.
22. An ostomy appliance according to claim **21** wherein said sealing element includes a soft elastomer.
23. An ostomy appliance according to claim **21** wherein said sealing element includes an inflatable balloon.
24. An ostomy appliance according to claim **21** wherein said sealing element includes a compressed foam element.
25. An ostomy appliance according to claim **24** wherein said compressed foam element is adapted to filter gases flowing from the stoma.
26. An ostomy appliance according to any of claims **1-25** wherein less than 15 cc of the internal lumen is available to be occupied by stomal waste when worn.
27. An ostomy appliance according to any of claims **1-25** wherein less than 5 cc of the internal lumen is available to be occupied by stomal waste when worn.
28. An ostomy appliance according to any of claims **1-25** wherein less than 1 cc of the internal lumen is available to be occupied by stomal waste when worn.
29. An ostomy appliance according to any of claims **1-28** wherein said ostomy appliance does not press on the stoma when worn.
30. An ostomy appliance according to any of claims **1-28** wherein the axial length of the closed ostomy appliance is 12 mm or less.
31. An ostomy appliance according to any of claims **1-28** wherein the axial length of the closed ostomy appliance is 6 mm or less.

- 32.** An ostomy component sealing system for sealing to an ostomy wafer comprising:
- a housing adapted to be attached to said wafer; and
 - a sealing mechanism, formed of at least one element, that resists the flow of pressurized gasses through the housing-wafer interface.
- 33.** The ostomy component sealing system of claim **32**, wherein the at least one sealing mechanism element comprises an element integrally formed in the housing which presses against a surface of the wafer to form a seal that resists the outflow of gasses under pressure from the stoma.
- 34.** The ostomy component sealing system of claim **32**, wherein the at least one sealing mechanism element comprises an element integrally formed in the wafer which presses against a surface of the housing to form a seal that resists the outflow of gasses under pressure from the stoma.
- 35.** The ostomy component sealing system of claim **32**, wherein the at least one sealing mechanism element comprises a separate element contained within a cavity of the wafer which presses against a surface of at least one of the housing and the stoma to form a seal that resists the outflow of gasses under pressure from the stoma.
- 36.** The ostomy component sealing system of any one of claims **32-35** wherein the housing comprises the housing of an ostomy cap.
- 37.** The ostomy component sealing system of any one of claims **32-36** wherein the housing comprises a lumen having a proximal end, and is attached to a collapsed collection bag which closes the proximal end.
- 38.** The ostomy component sealing system of claim **37** wherein the housing is attached to a pouch deployment prevention element which at least partially covers the collapsed collection bag and the closed proximal end.

- 39.** The ostomy component sealing system of claim **37** wherein the housing comprises a cavity sized to hold a filter, and within the cavity there is a filter for filtering gasses flowing from the stoma.
- 40.** The ostomy component sealing system of any one of claims **32-35** wherein the housing comprises the housing of an ostomy adaptor appliance.
- 41.** The ostomy component sealing system according to any one of claims **32-40** wherein the housing and the at least one element of the sealing mechanism element do not press on the stoma.
- 42.** A method of sealing a stoma in a subject's body comprising:
attaching an ostomy wafer over the stoma;
attaching an adaptor to said wafer; and
fitting a cap onto said adaptor.
- 43.** A method according to claim **42** comprising fitting said cap prior to attachment of said adaptor to said wafer.
- 44.** A method according to any of claims **42-43** comprising attaching a collapsed pouch onto said adaptor.
- 45.** A method according to any of claims **42-44** comprising fitting said adaptor to said wafer prior to attaching said wafer over the stoma.
- 46.** A method according to any of claims **42-44** wherein said sealing the stoma is done without applying direct force to the stoma.
- 47.** A method of sealing a stoma in a subject's body comprising:
attaching an ostomy wafer over the stoma; and
fitting onto said adaptor a cap comprising a collapsed pouch, a deployment prevention element and a gas filter, without applying direct force to the stoma.

- 48.** The ostomy appliance according to claim **1** wherein the adaptor and the cap are integrally coupled.
- 49.** The ostomy appliance according to any of claims **1** and **48** wherein the adaptor and the wafer are integrally coupled.

1/44

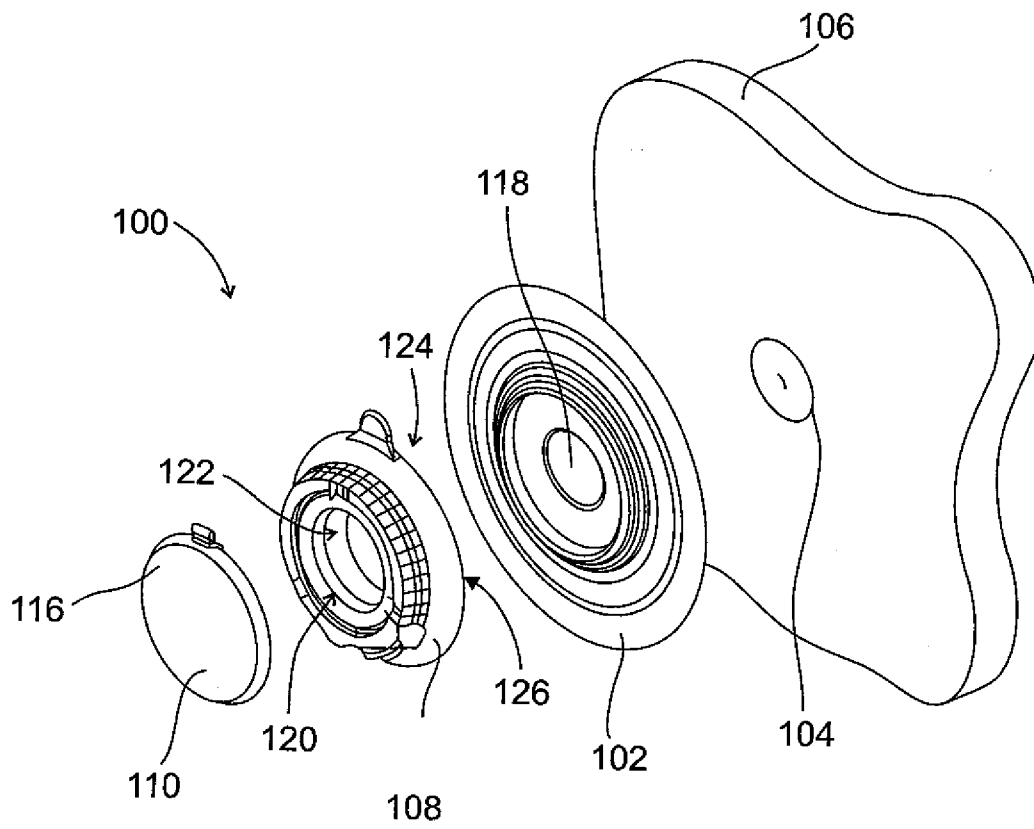


FIG. 1A

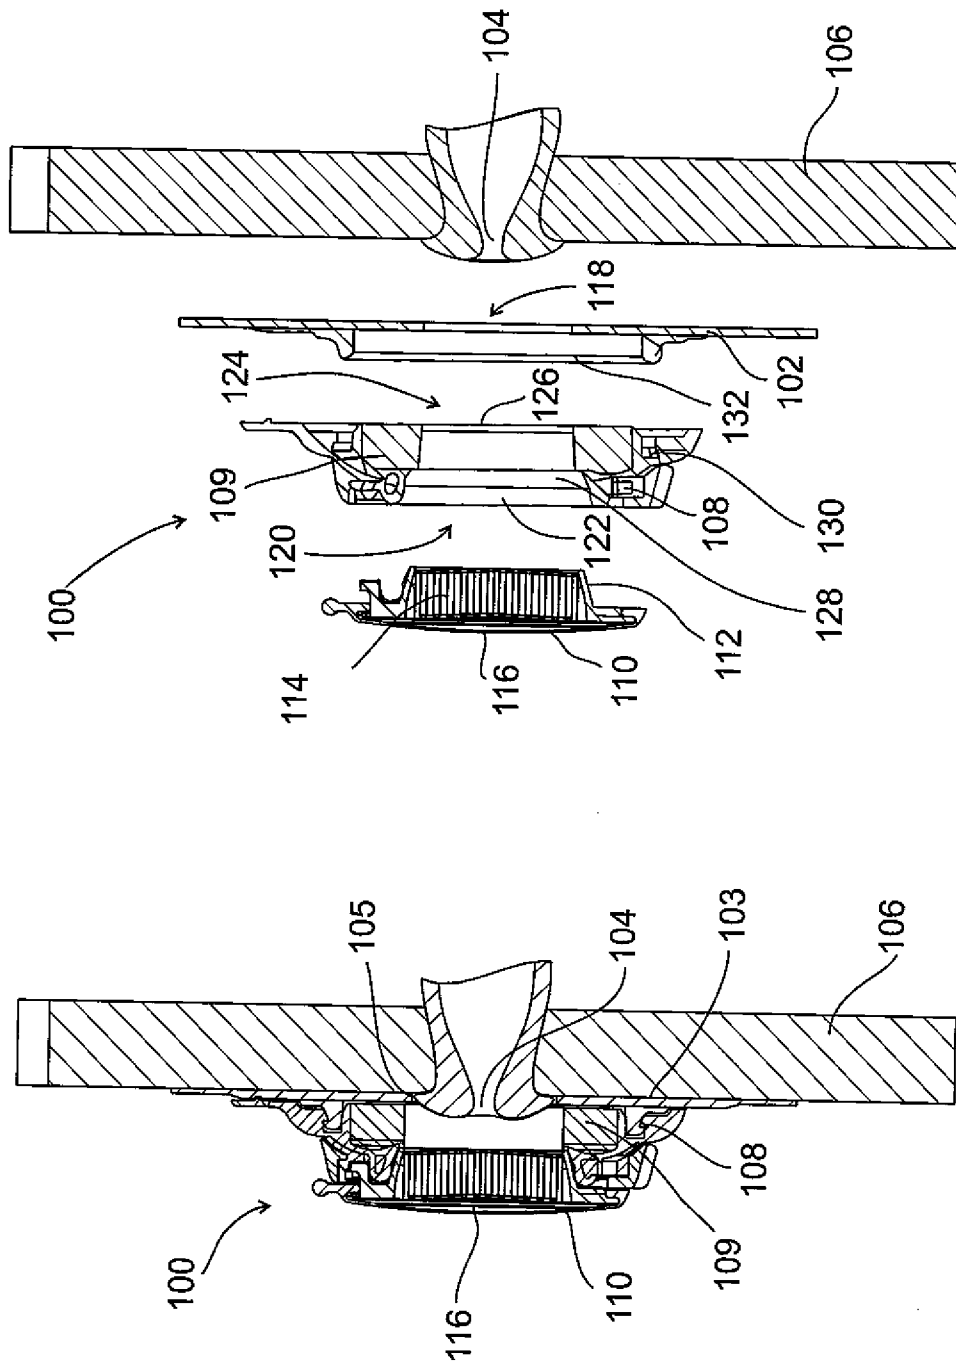


FIG. 2B

FIG. 2A

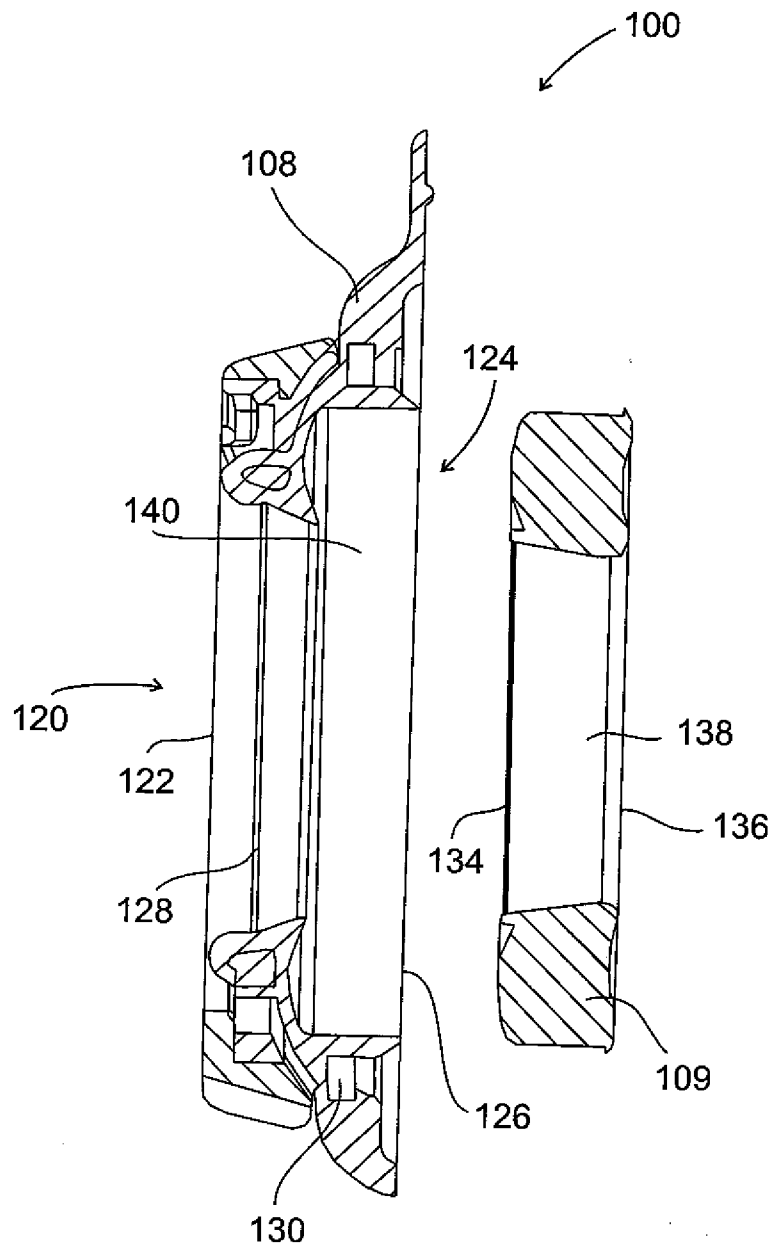


FIG. 2C

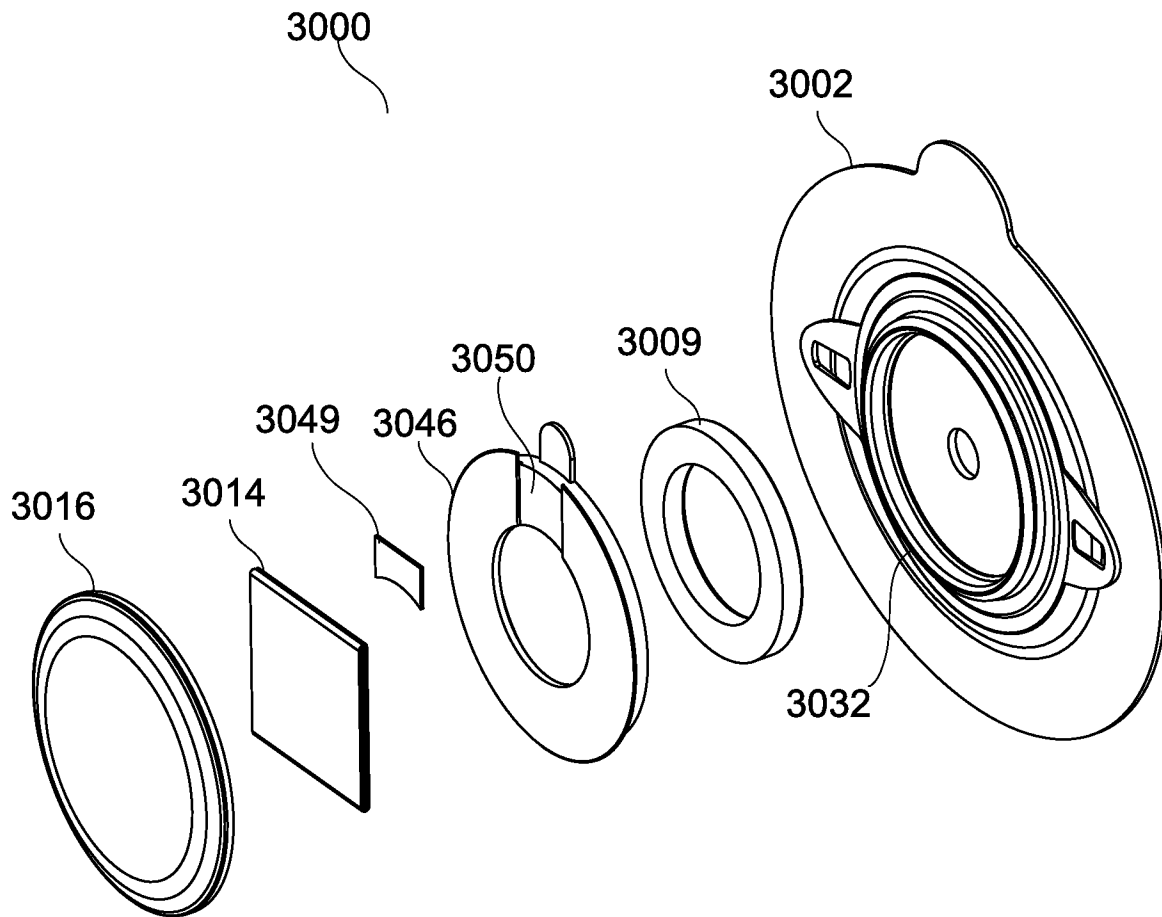


FIG. 2D

5/44

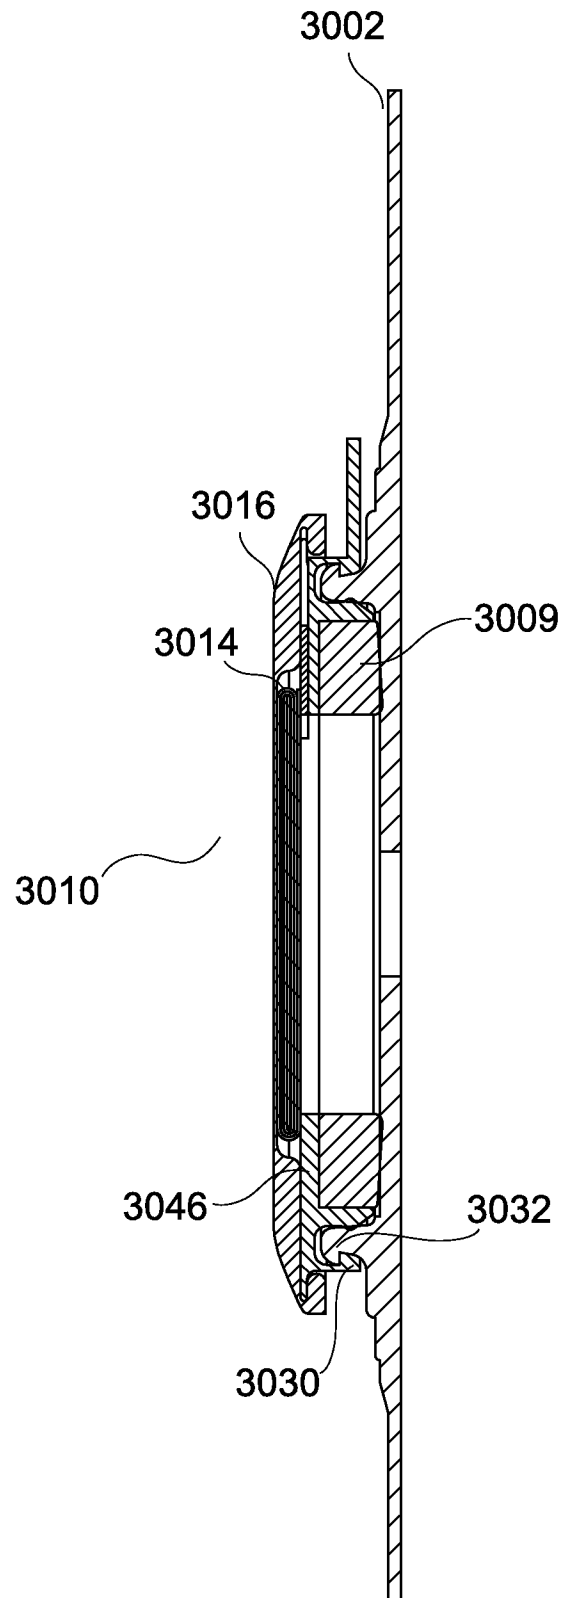


FIG. 2E

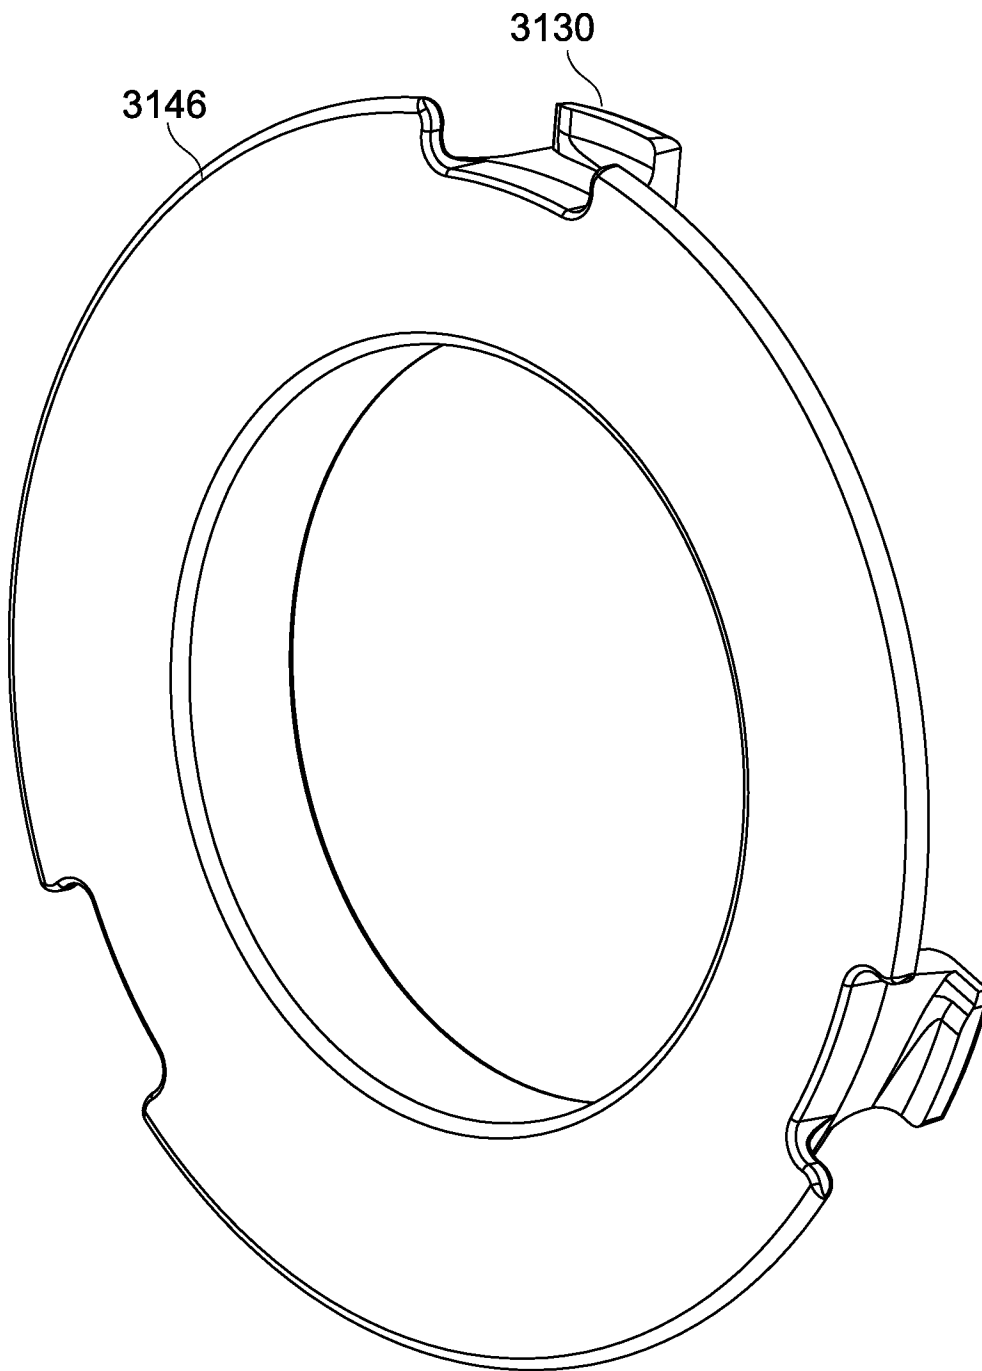


FIG. 2F

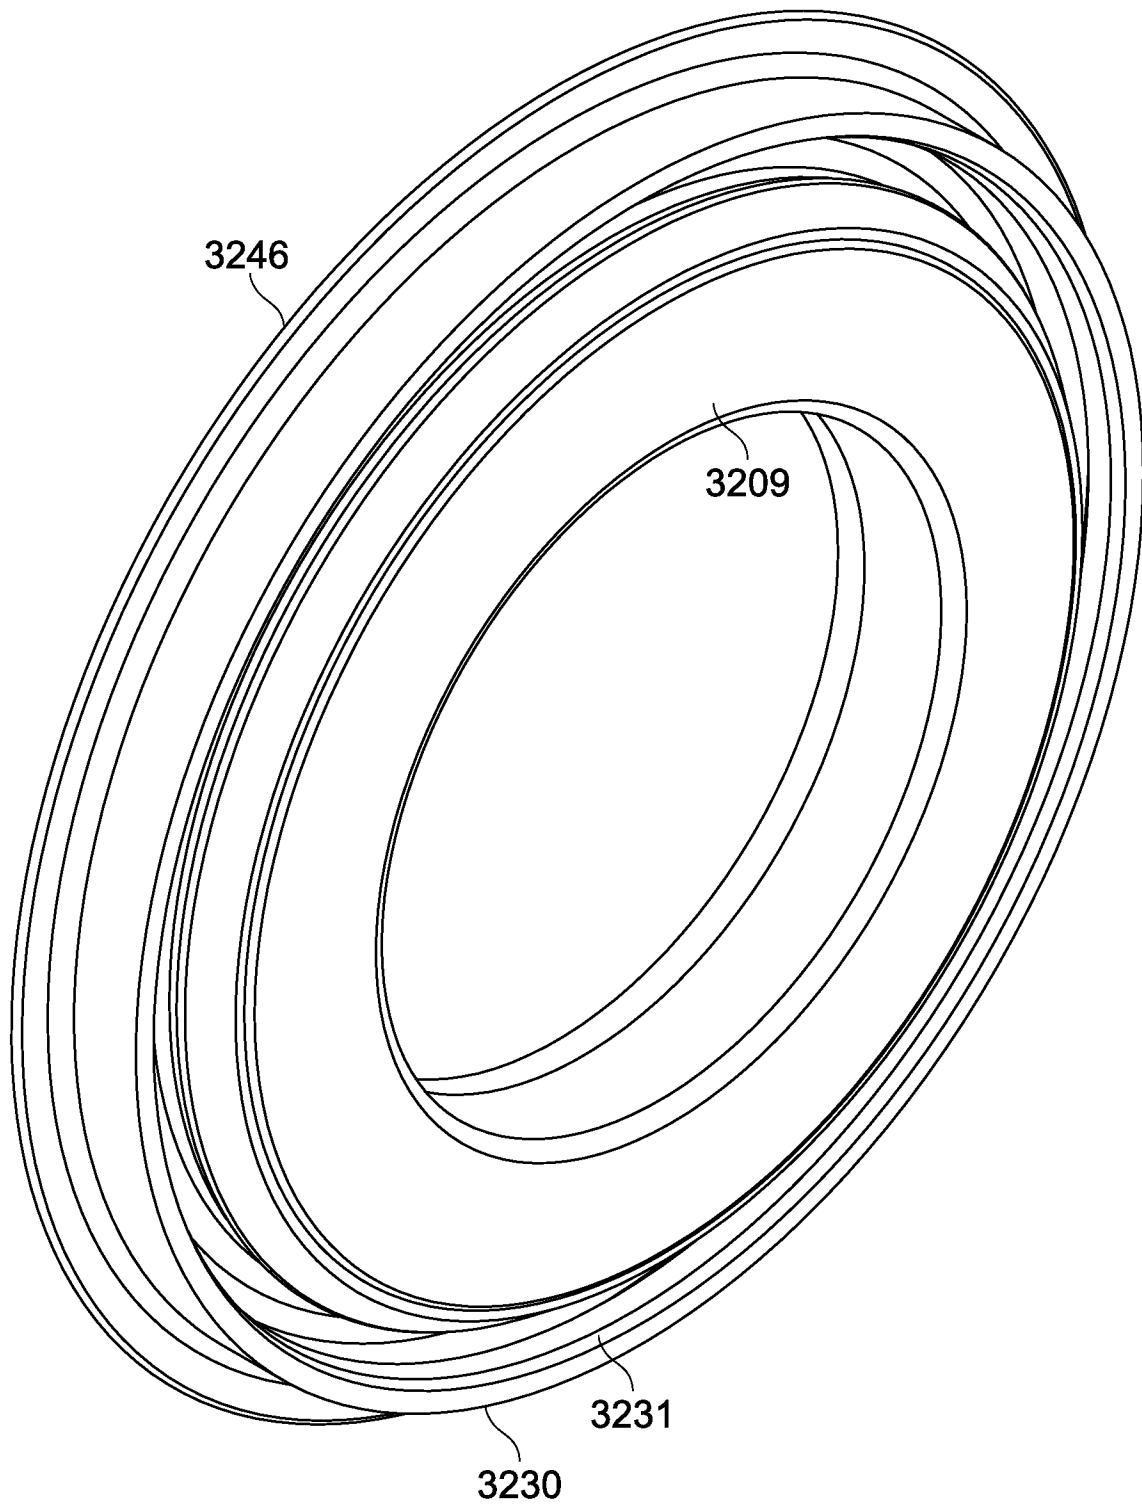


FIG. 2G

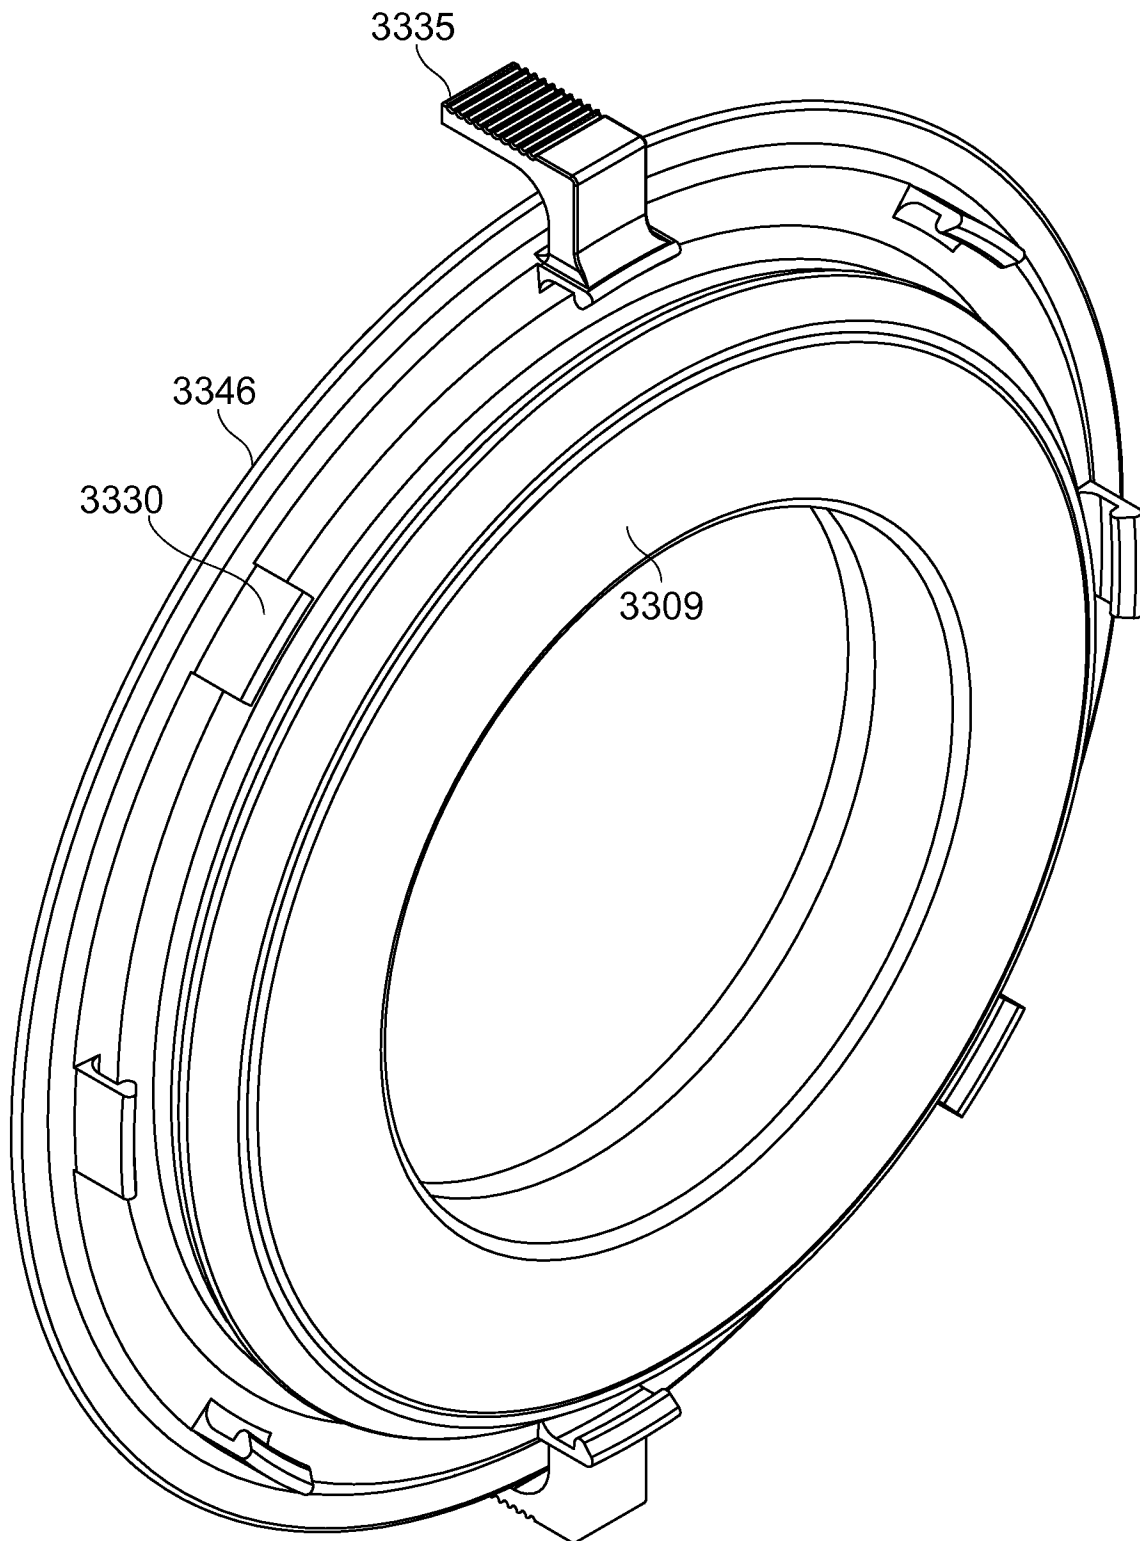


FIG. 2H

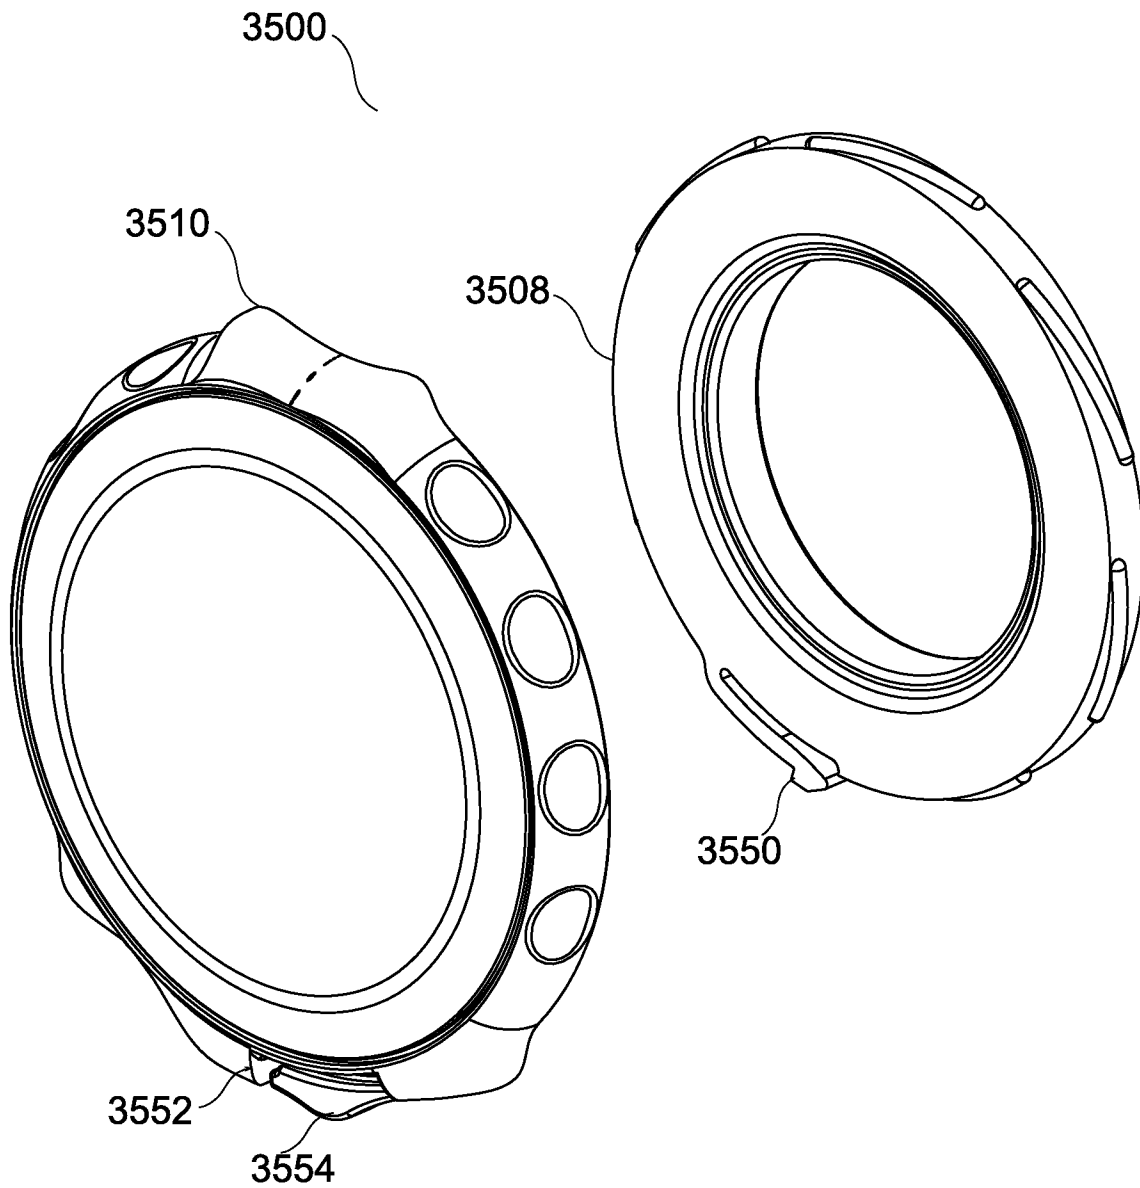


FIG. 2I

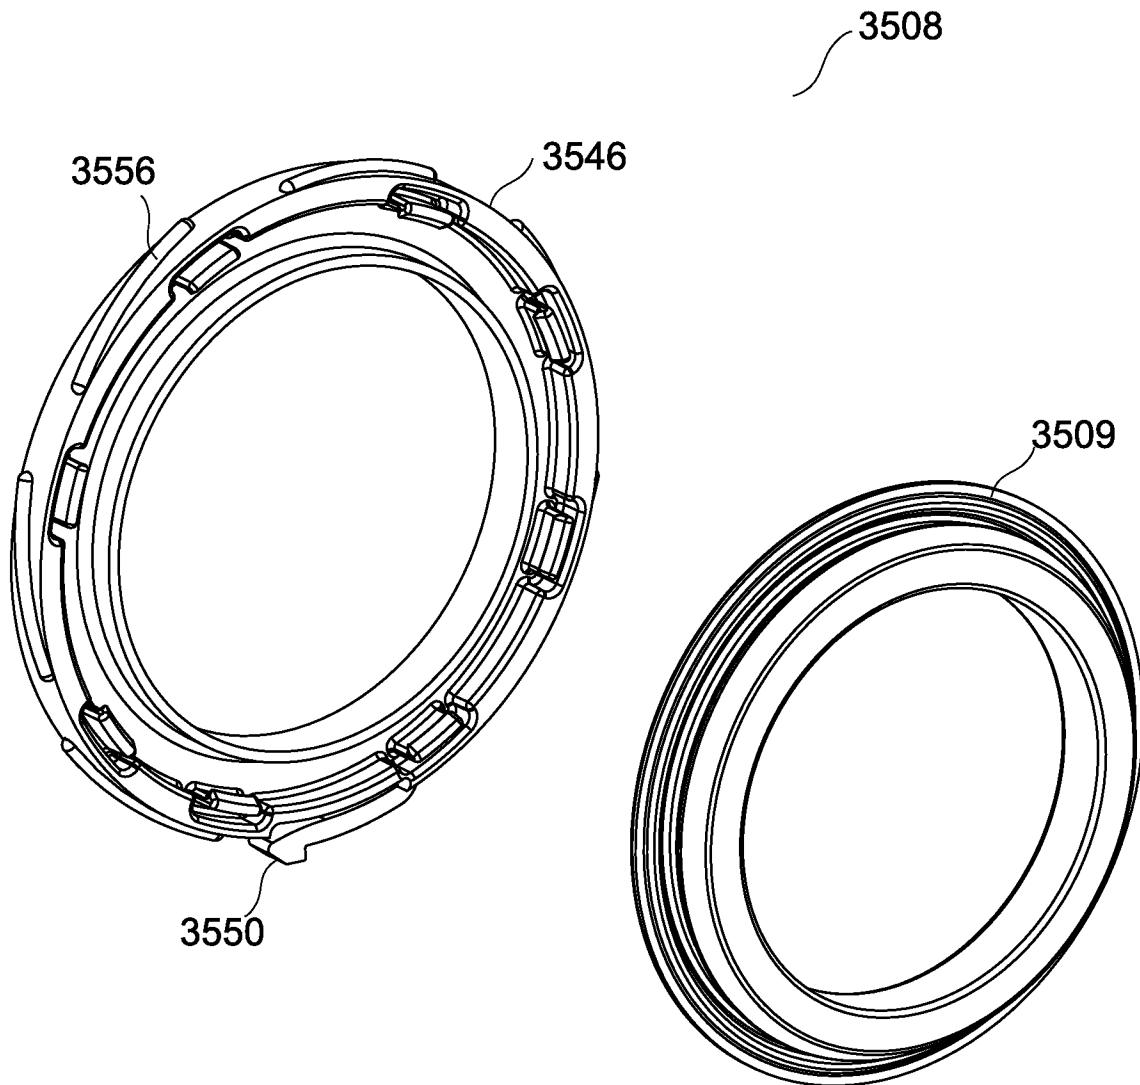


FIG. 2J

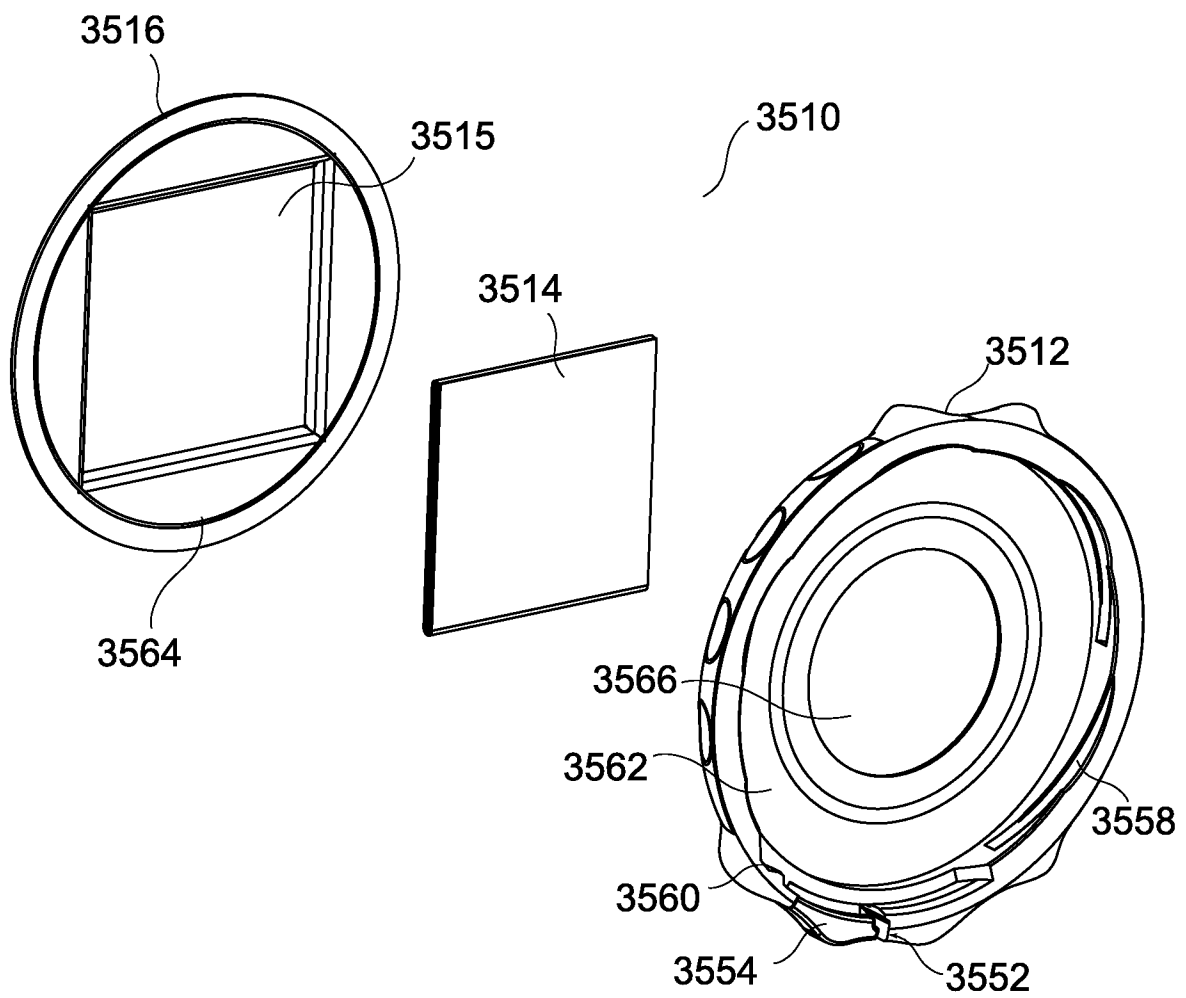


FIG. 2K

12/44

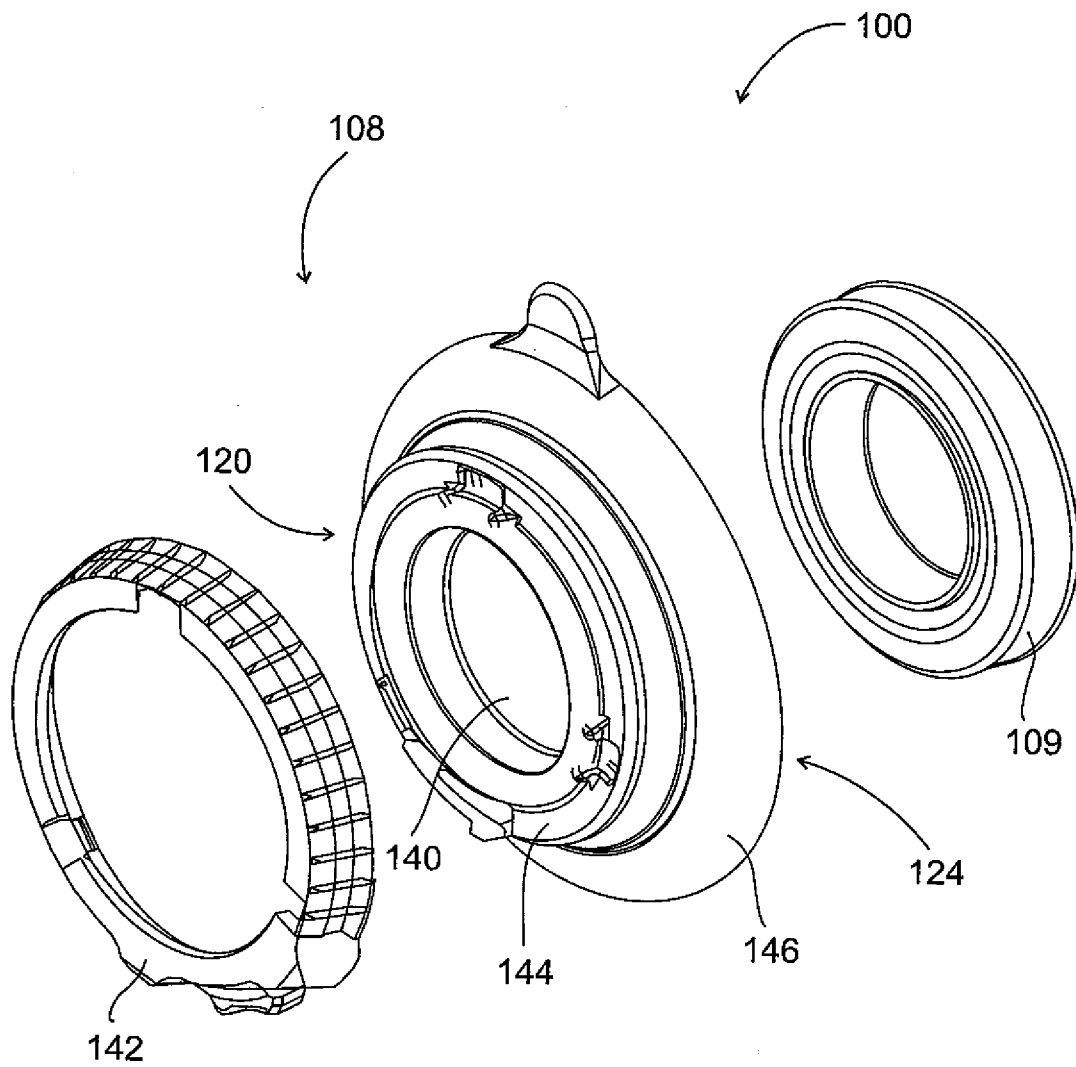


FIG. 3

13/44

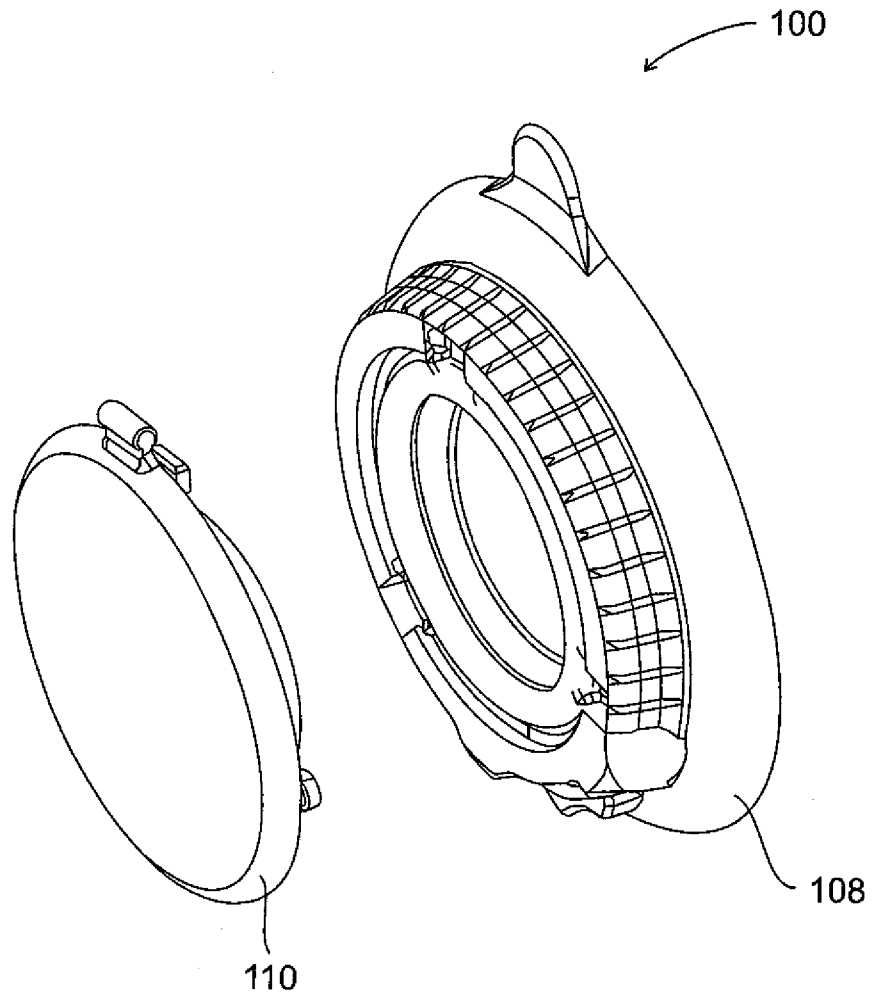


FIG. 4A

14/44

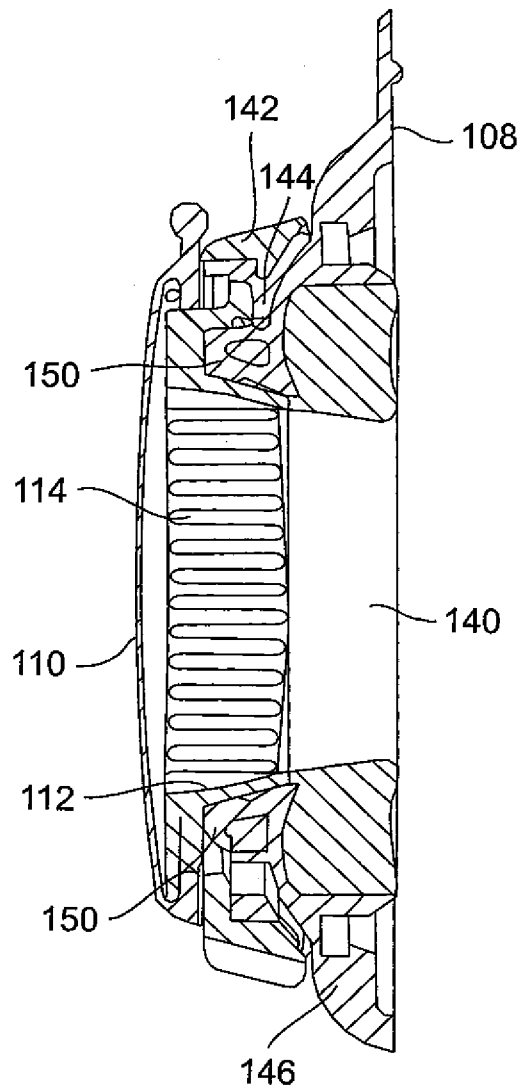


FIG. 4B

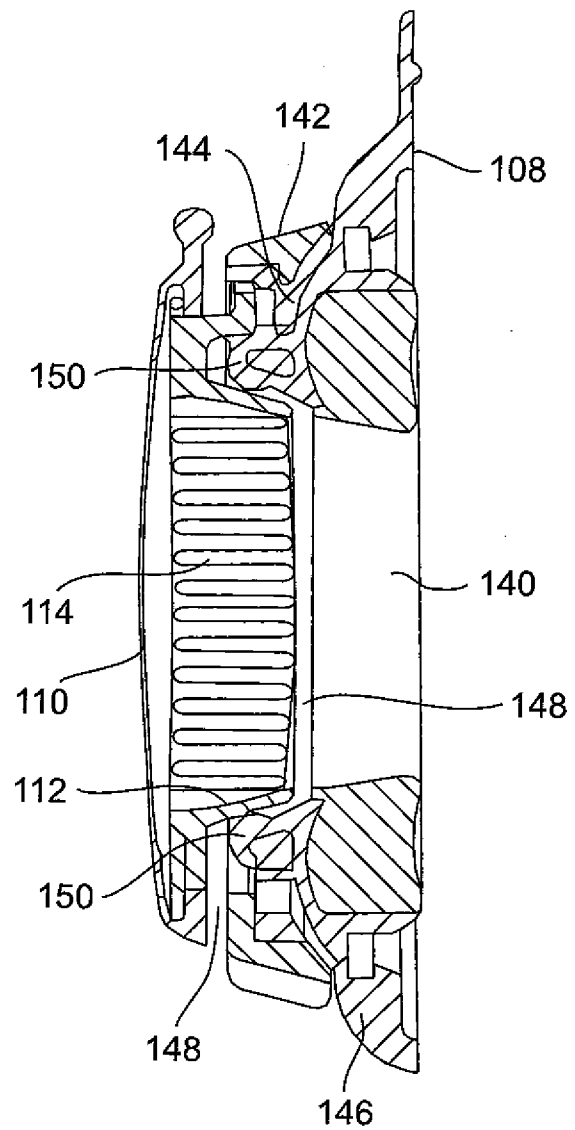


FIG. 4C

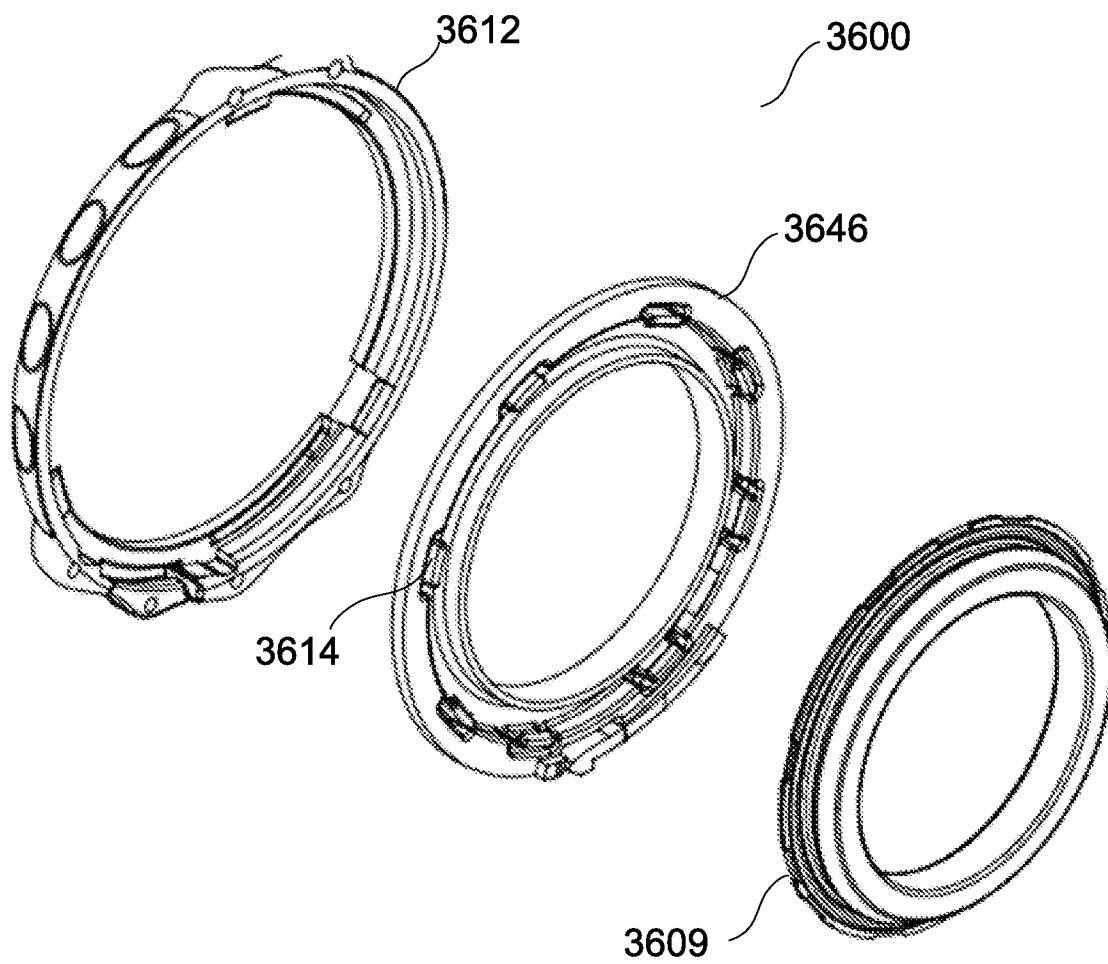


FIG. 4D

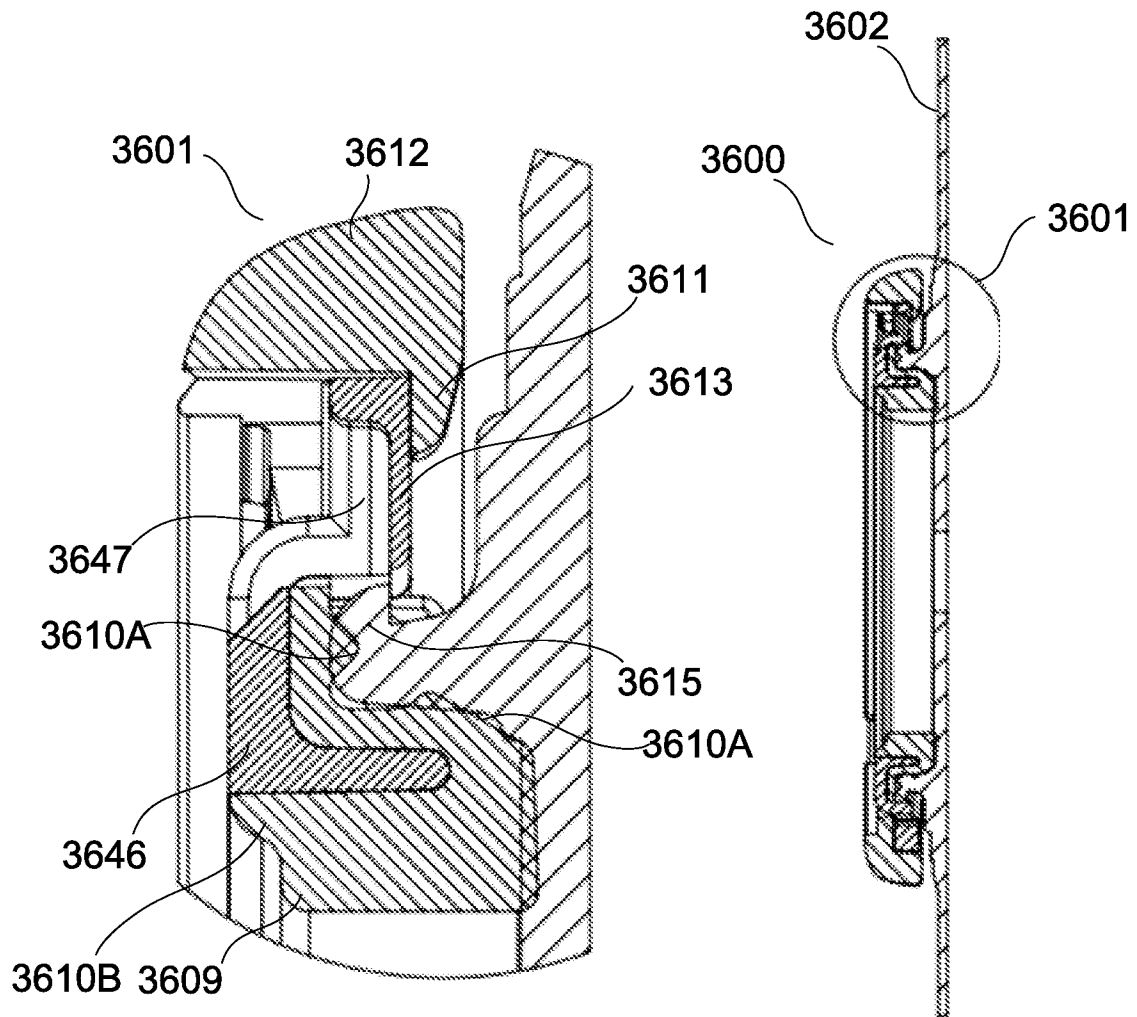


FIG. 4F

FIG. 4E

17/44

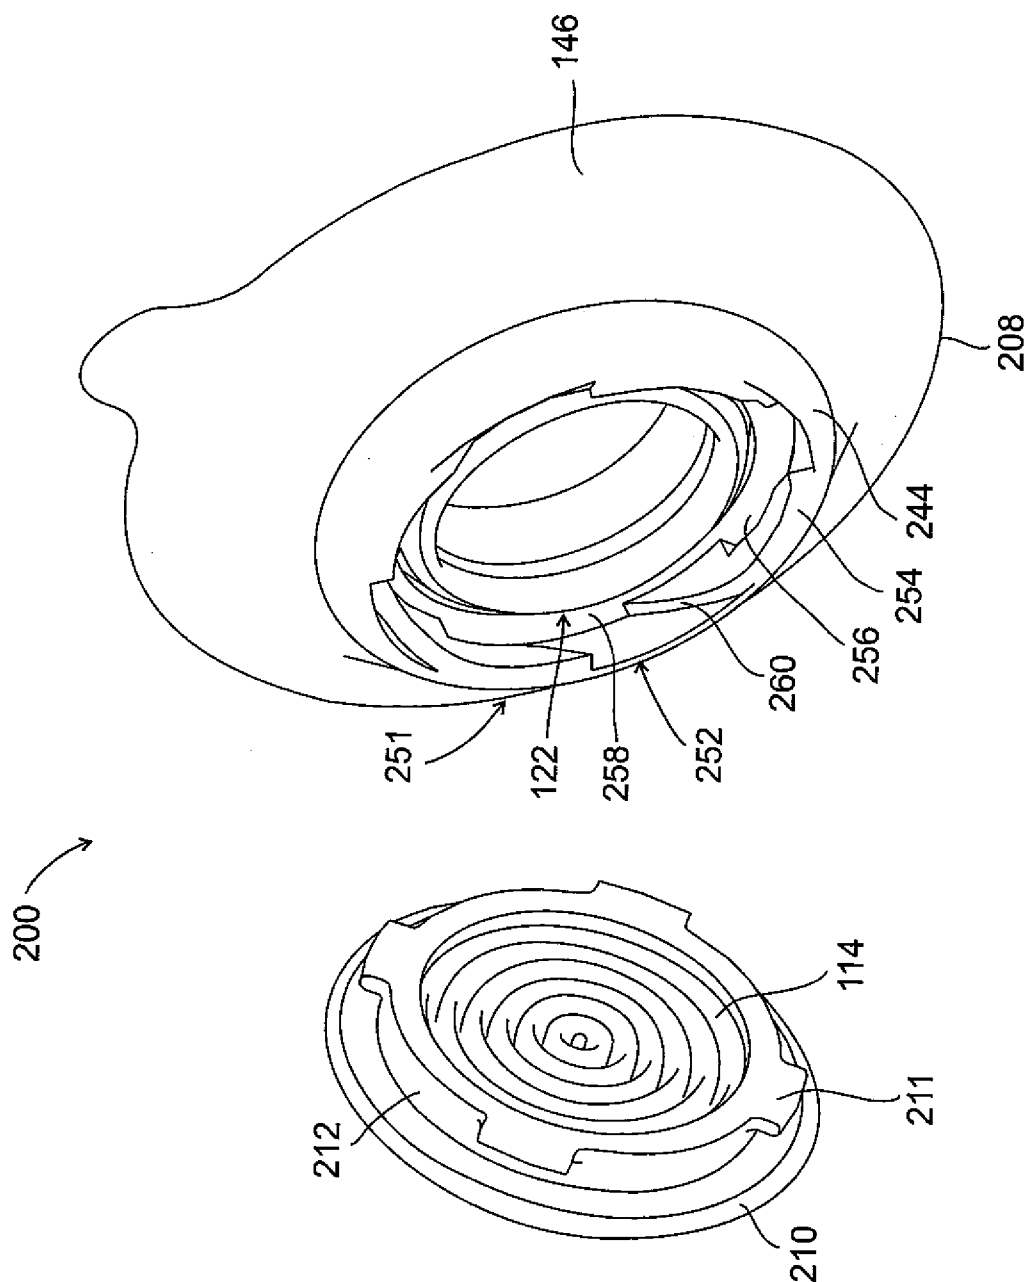


FIG. 5A

18/44

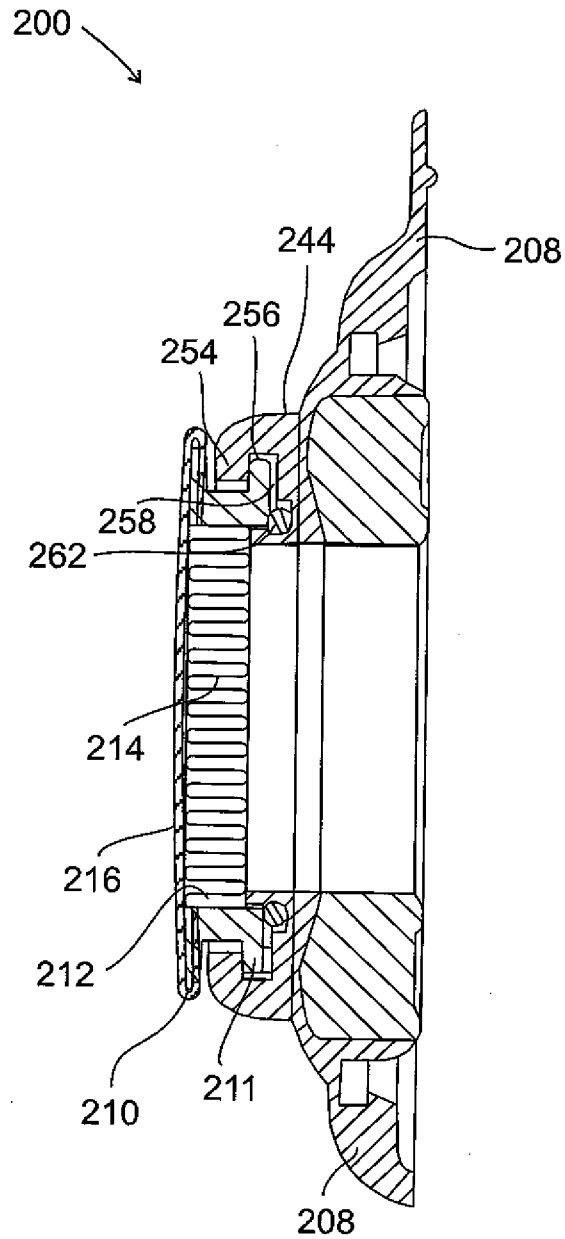


FIG. 5B

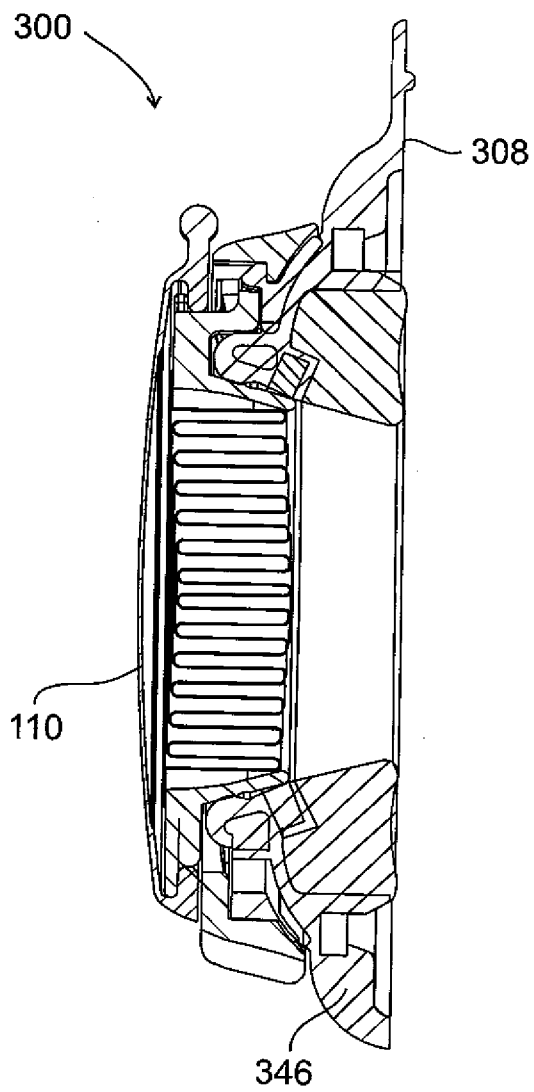


FIG. 6A

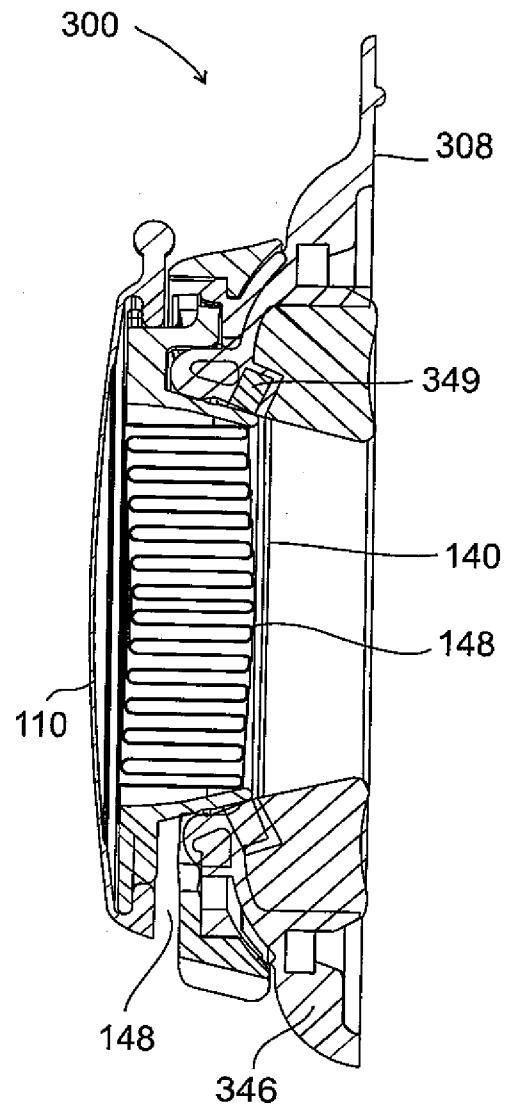


FIG. 6B

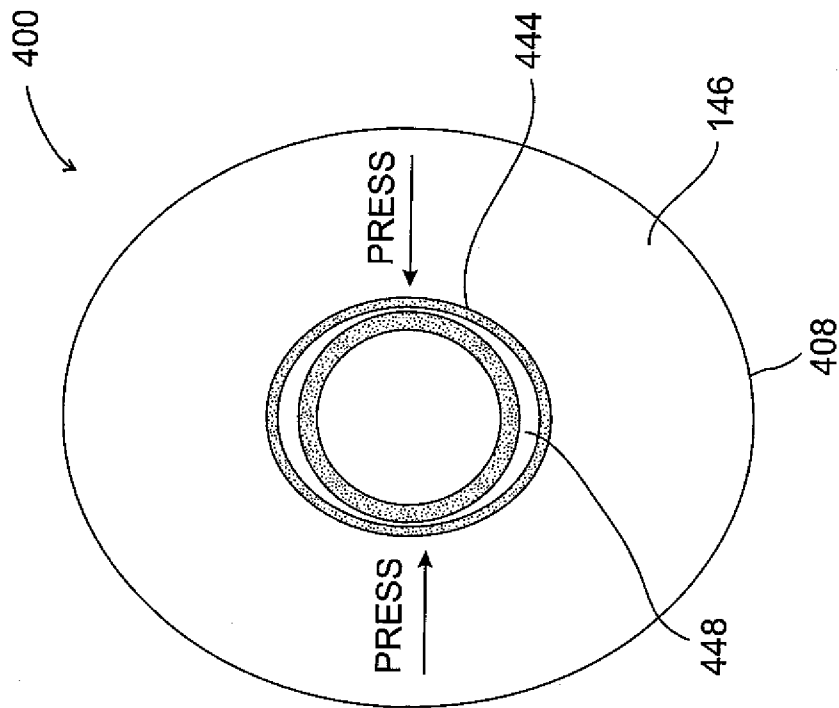


FIG. 7B

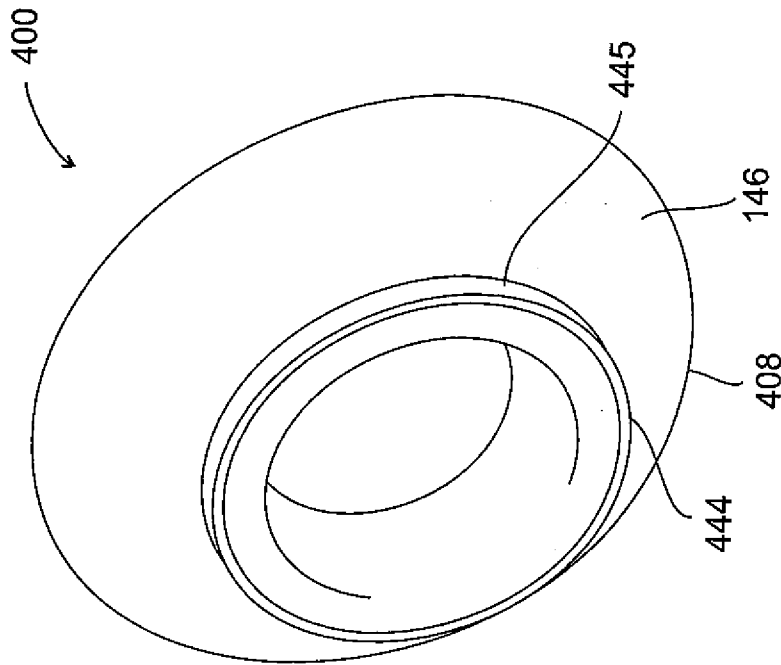


FIG. 7A

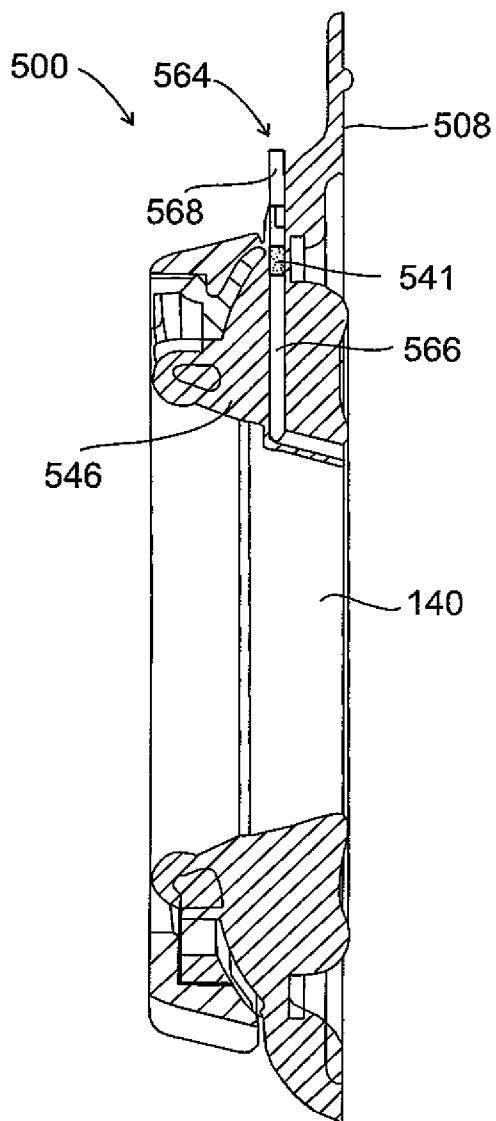


FIG. 8

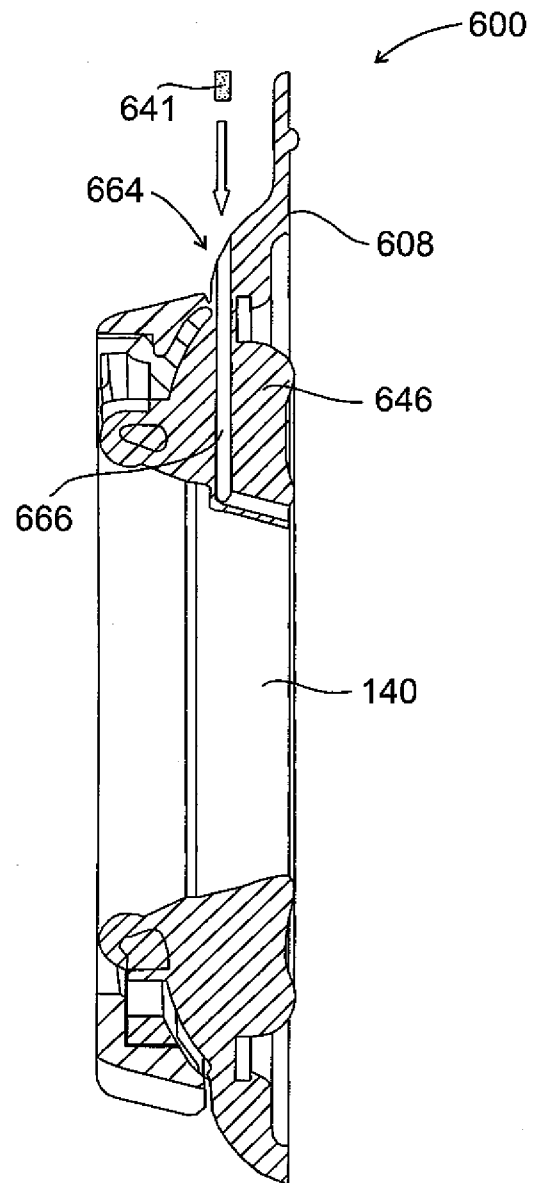


FIG. 9

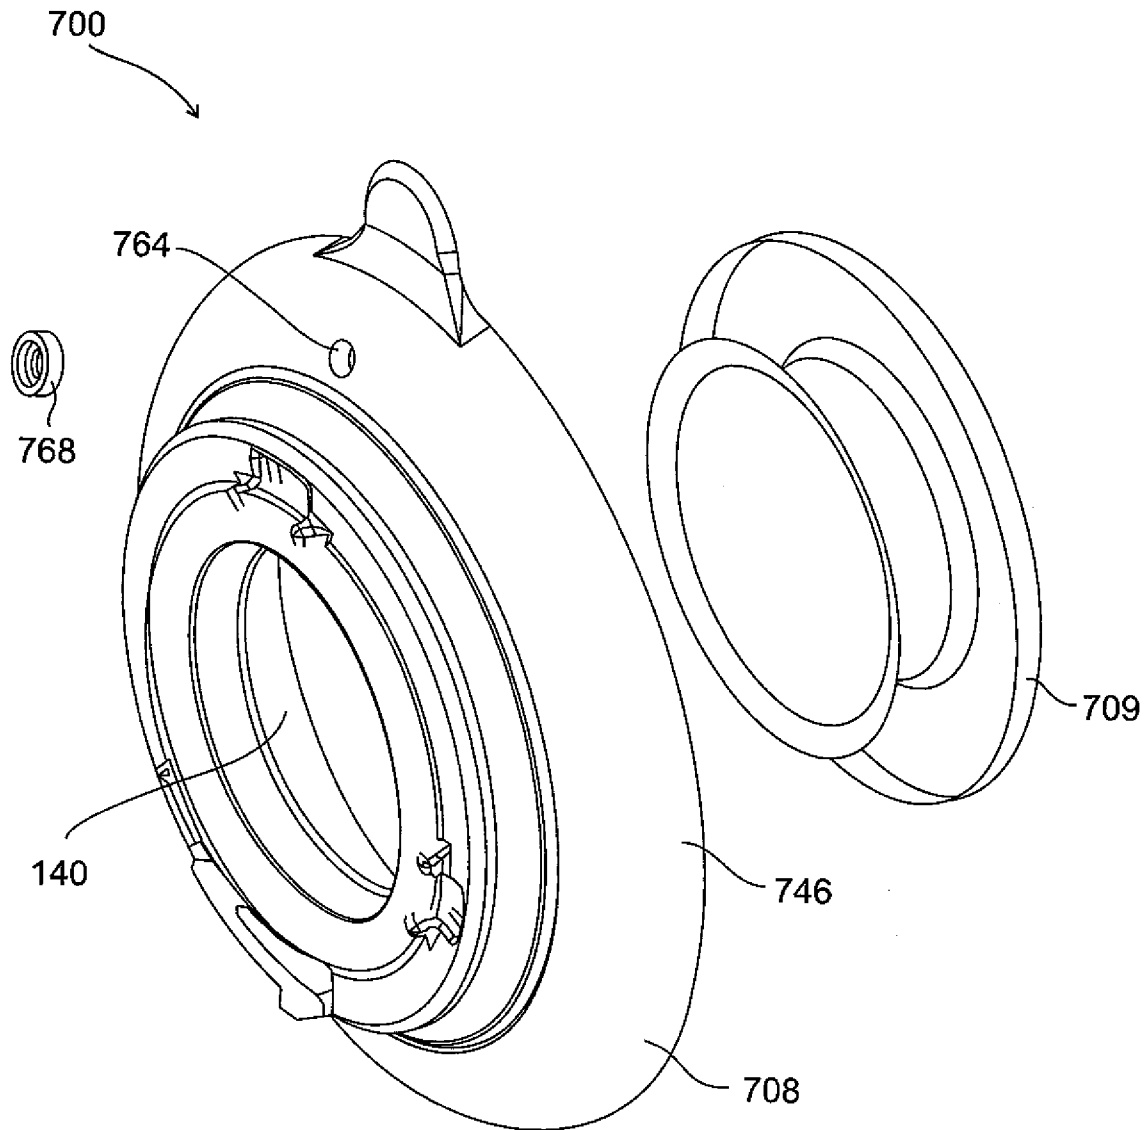


FIG. 10A

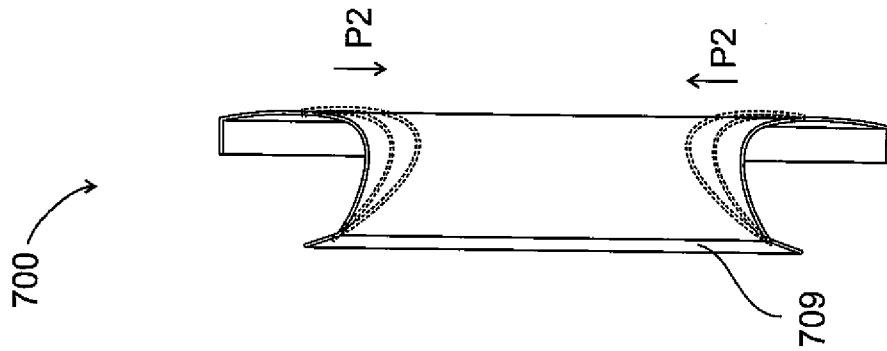


FIG. 10D

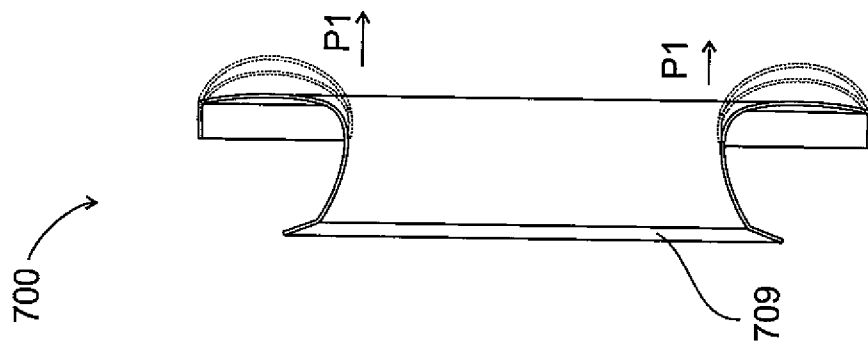


FIG. 10C

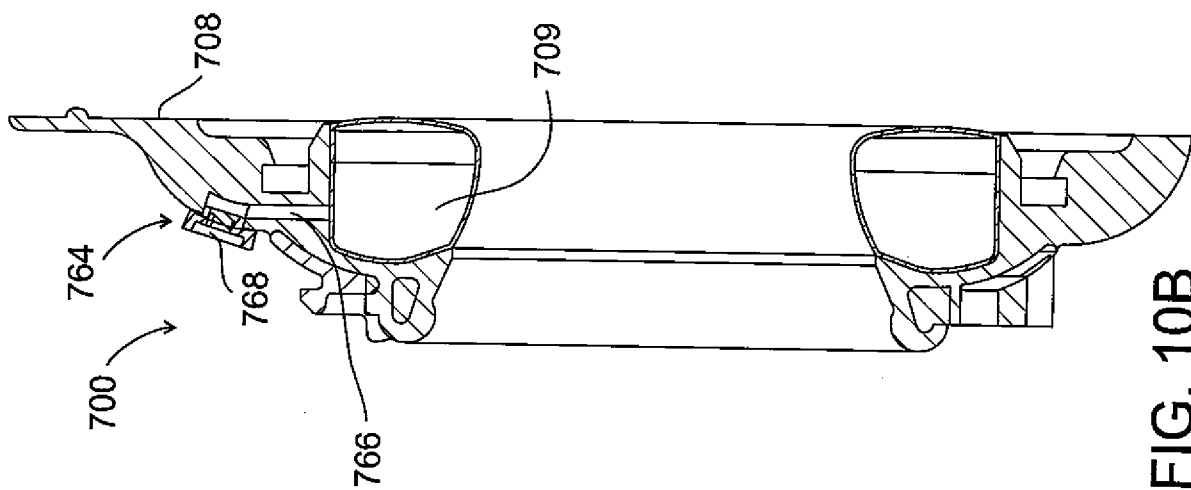


FIG. 10B

24/44

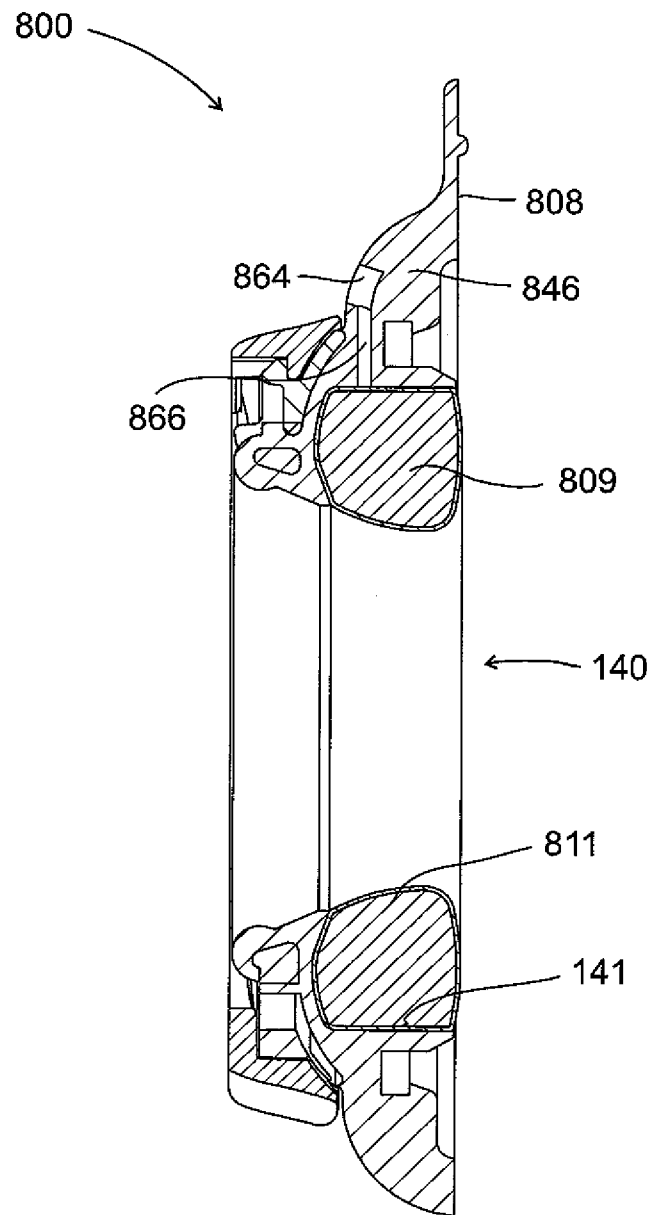


FIG. 11

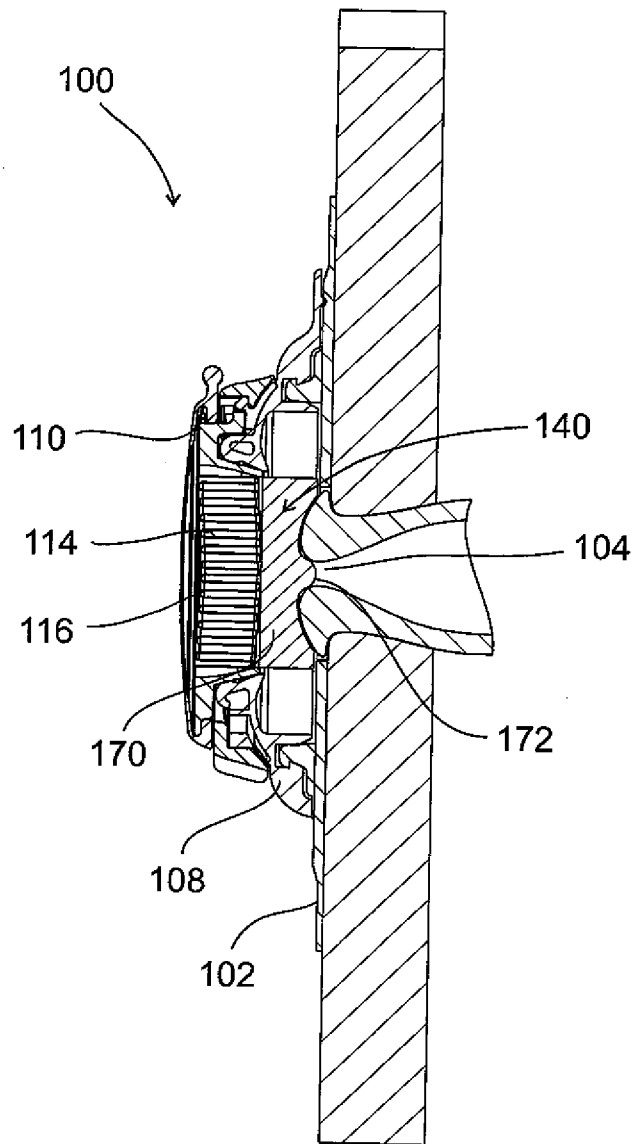


FIG. 12

26/44

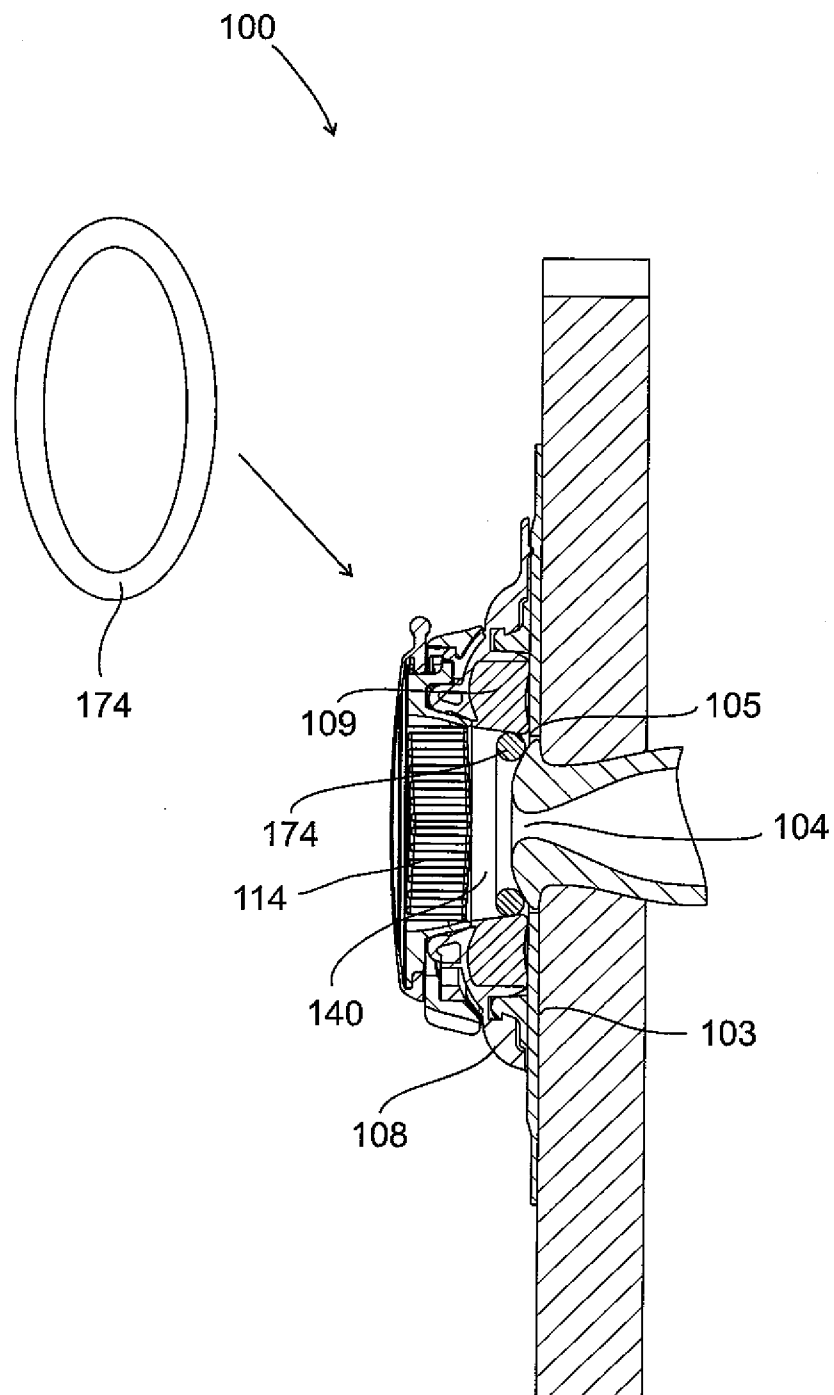


FIG. 13

27/44

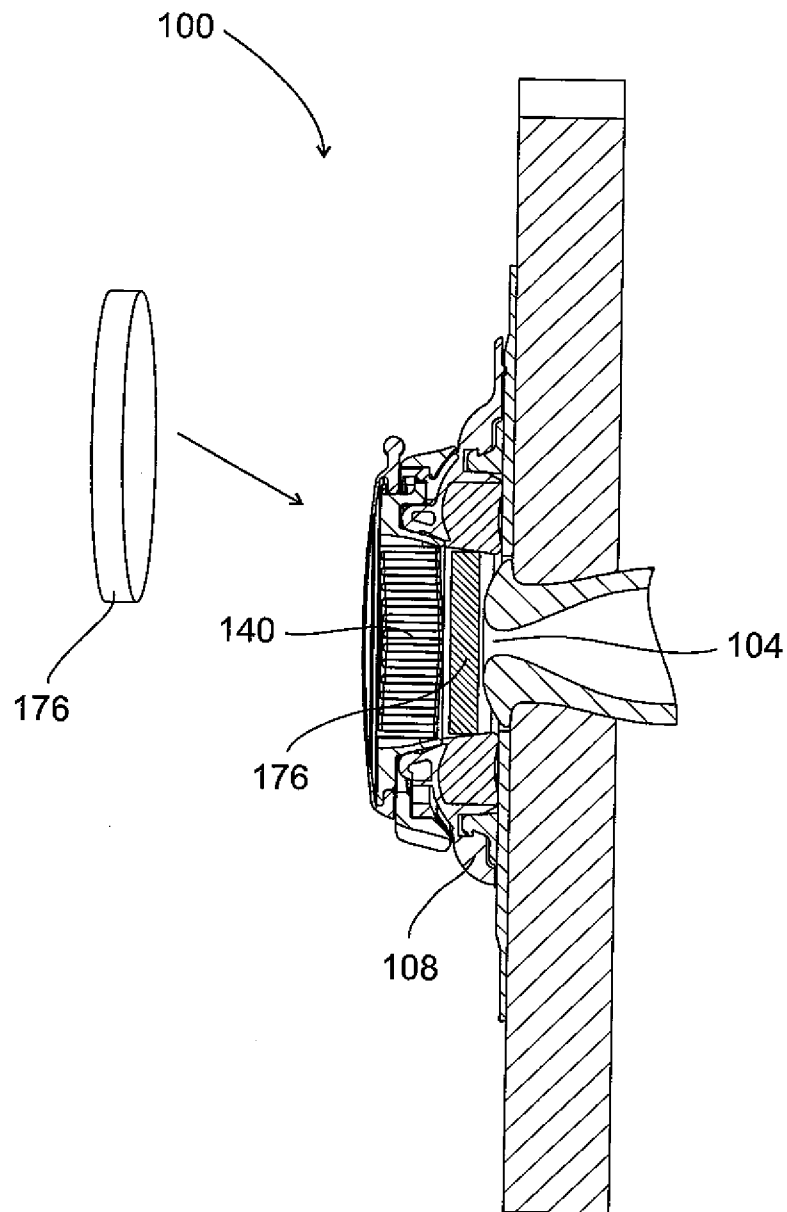


FIG. 14

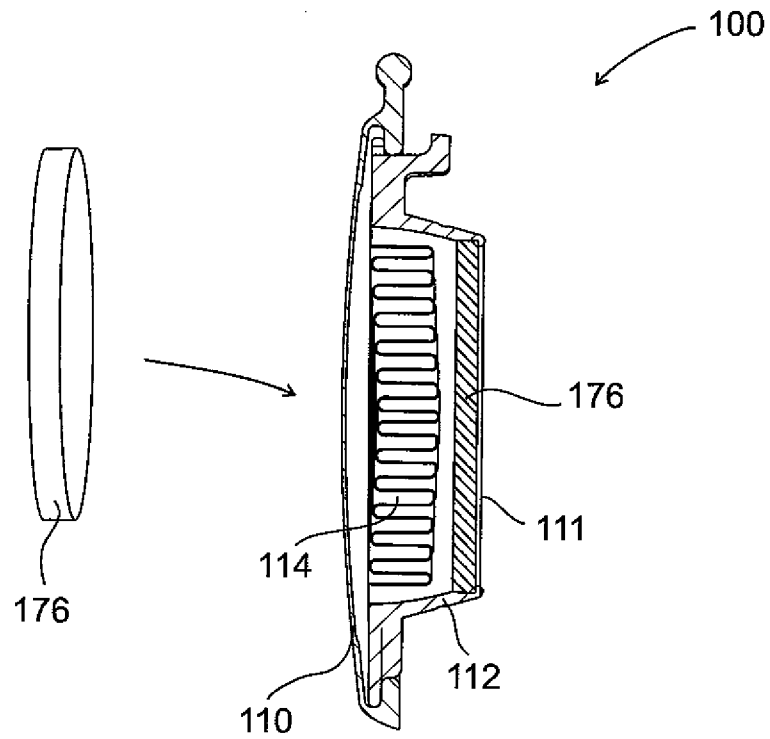


FIG. 15

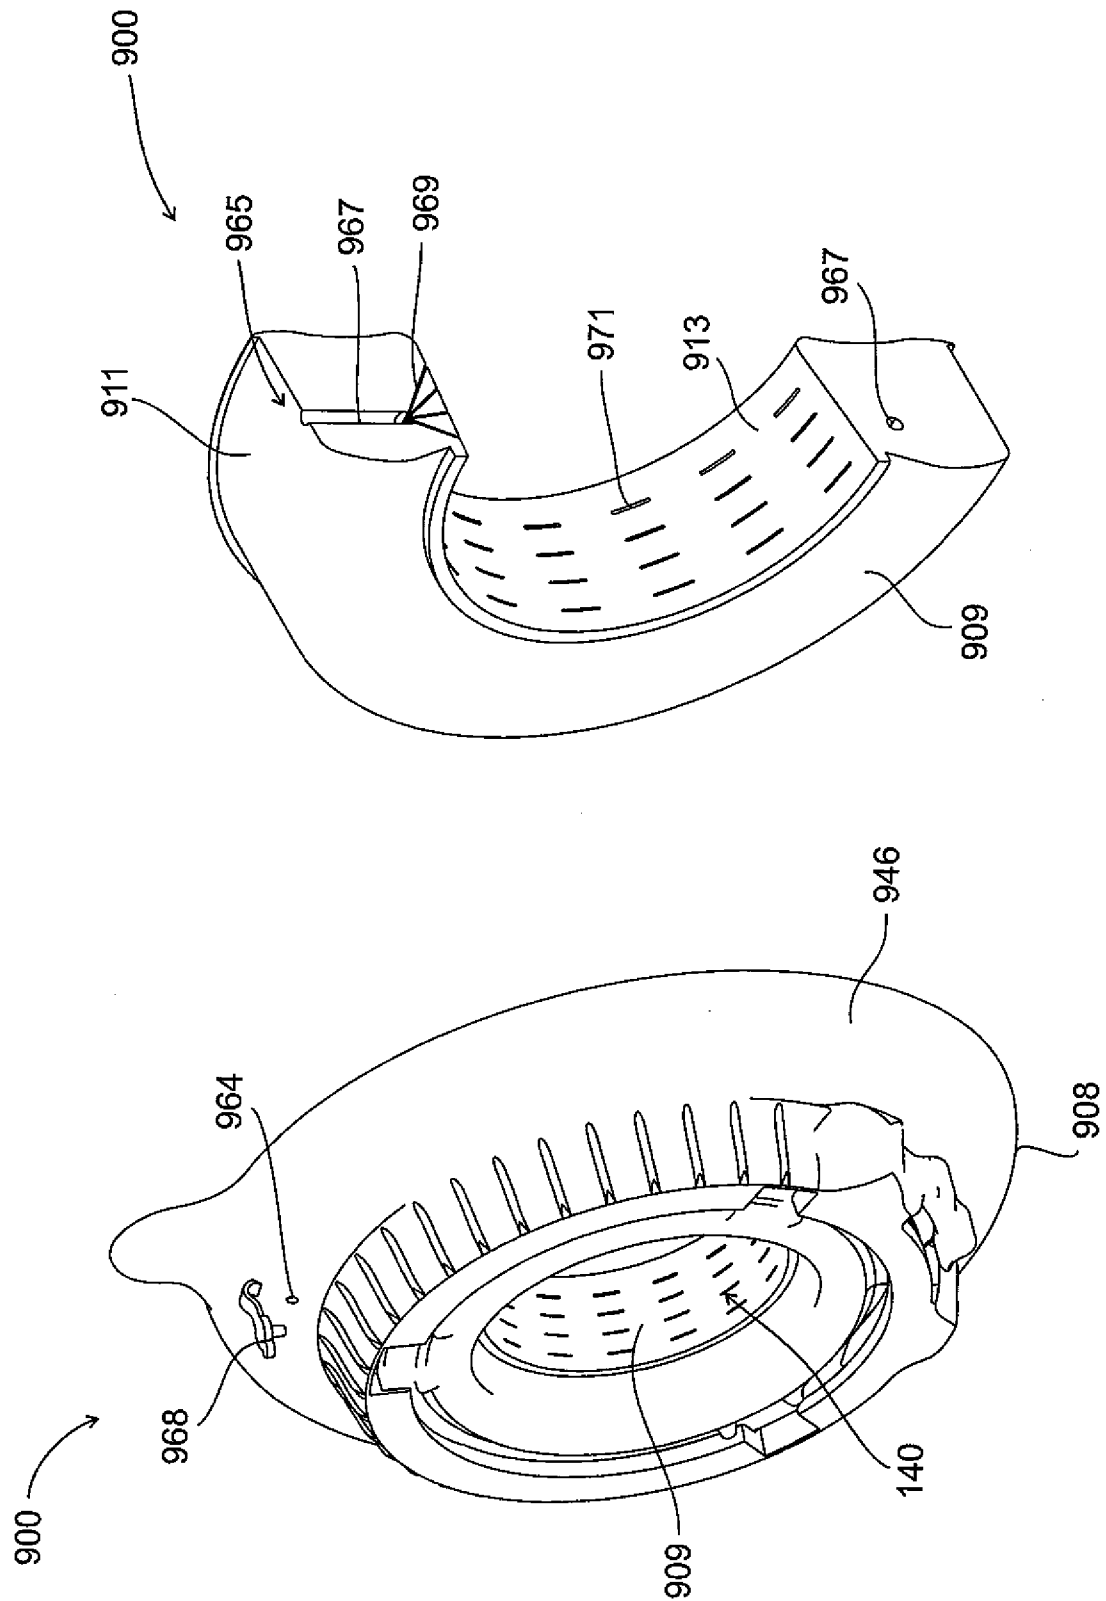


FIG. 16B

FIG. 16A

30/44

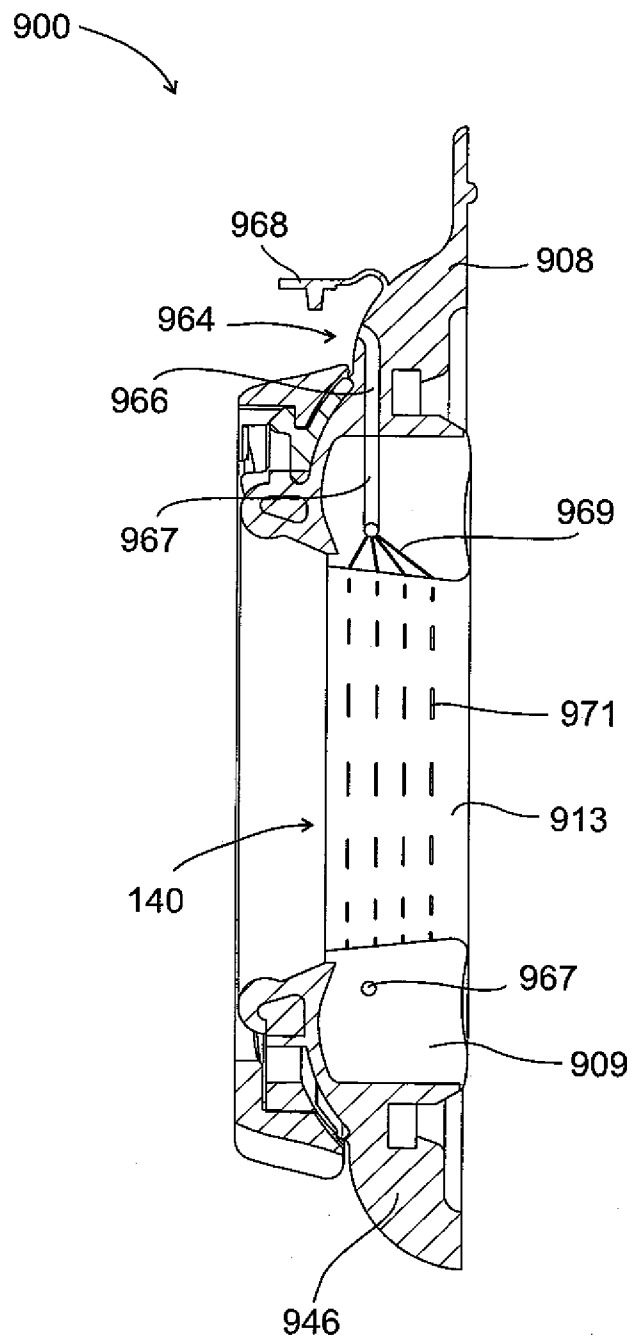


FIG. 16C

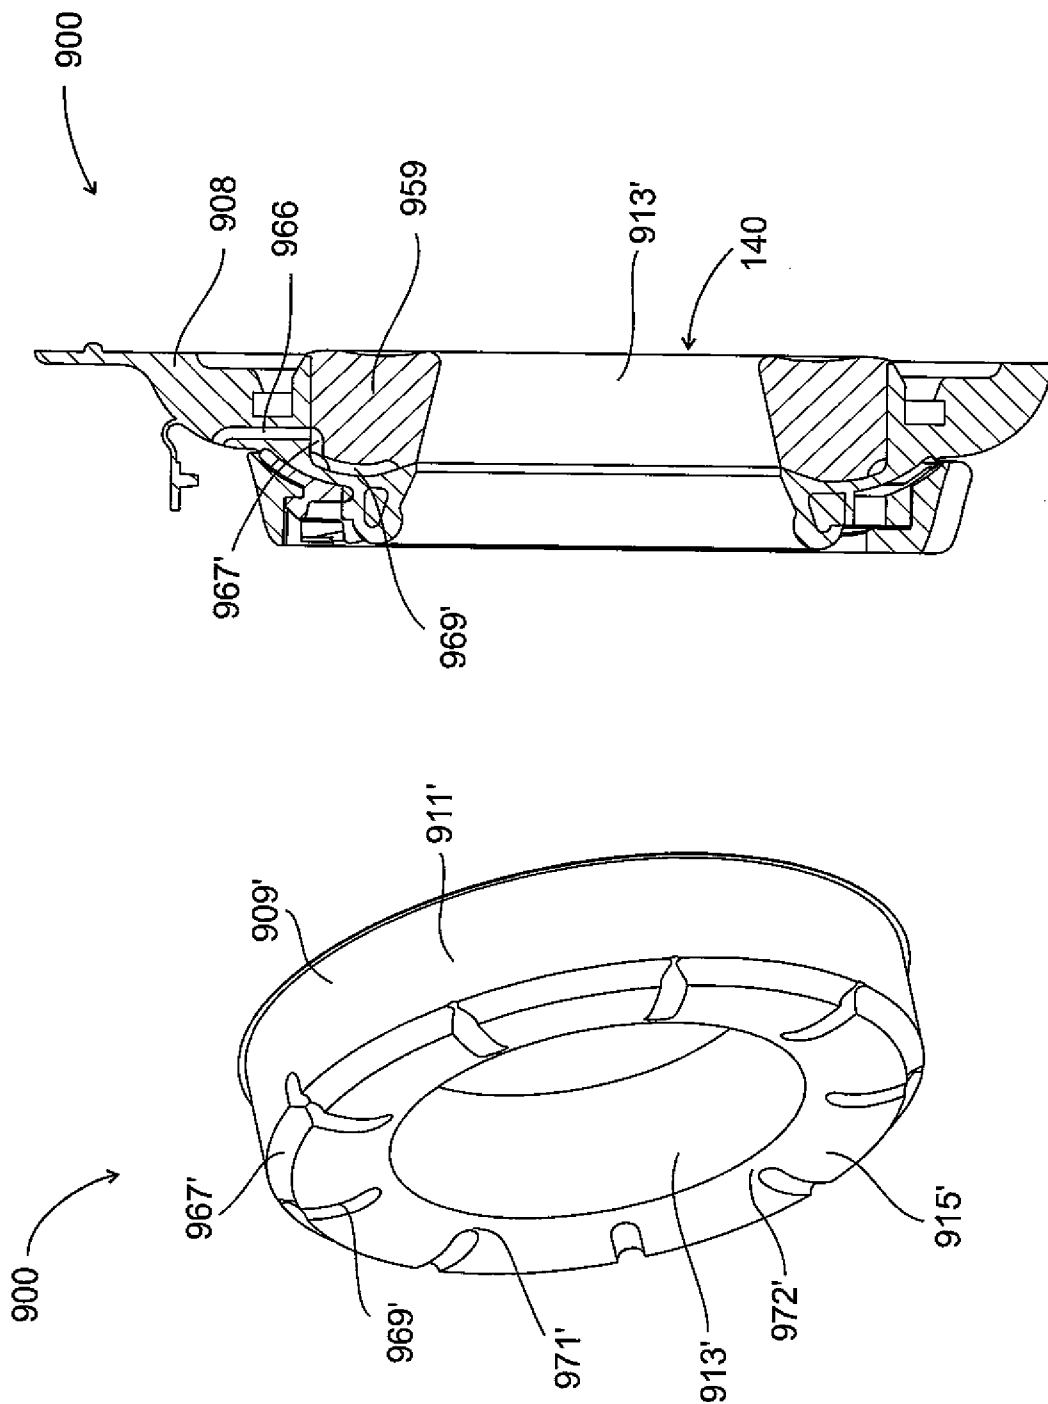


FIG. 17B

FIG. 17A

32/44

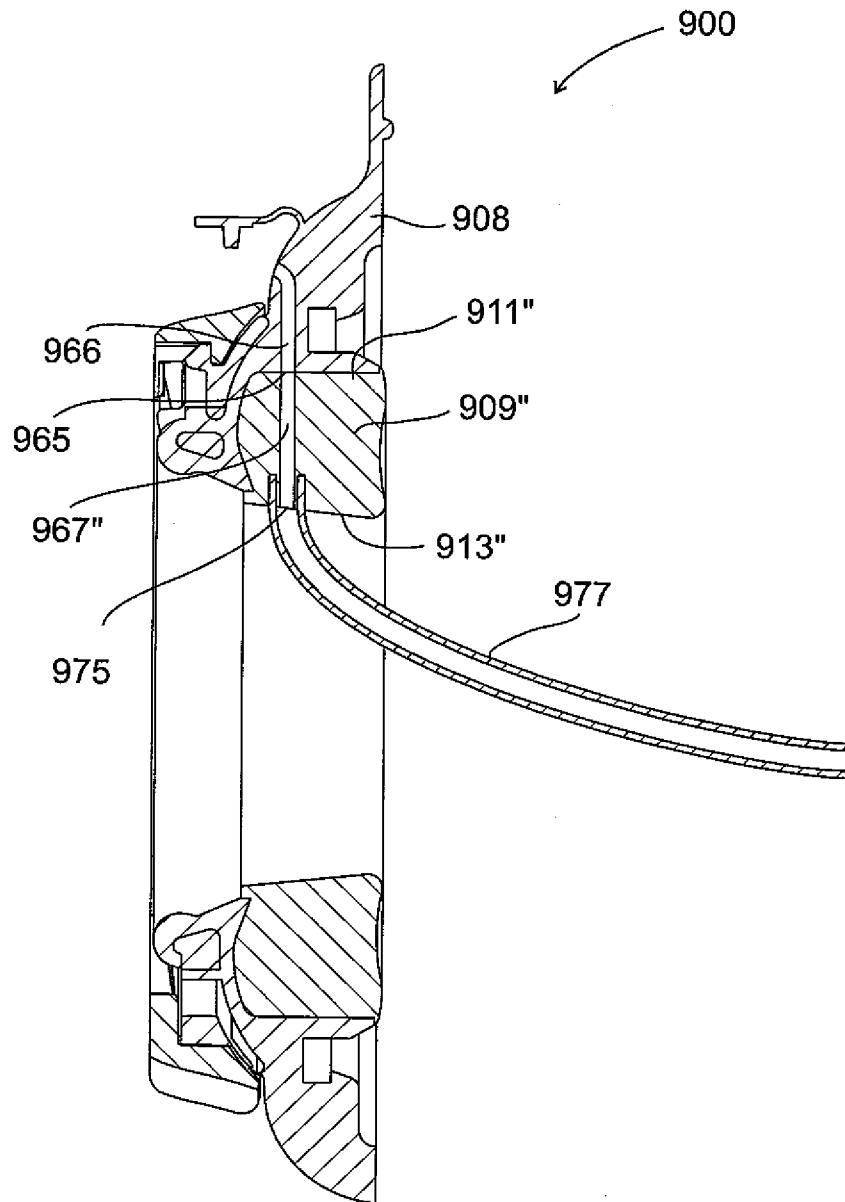


FIG. 18

33/44

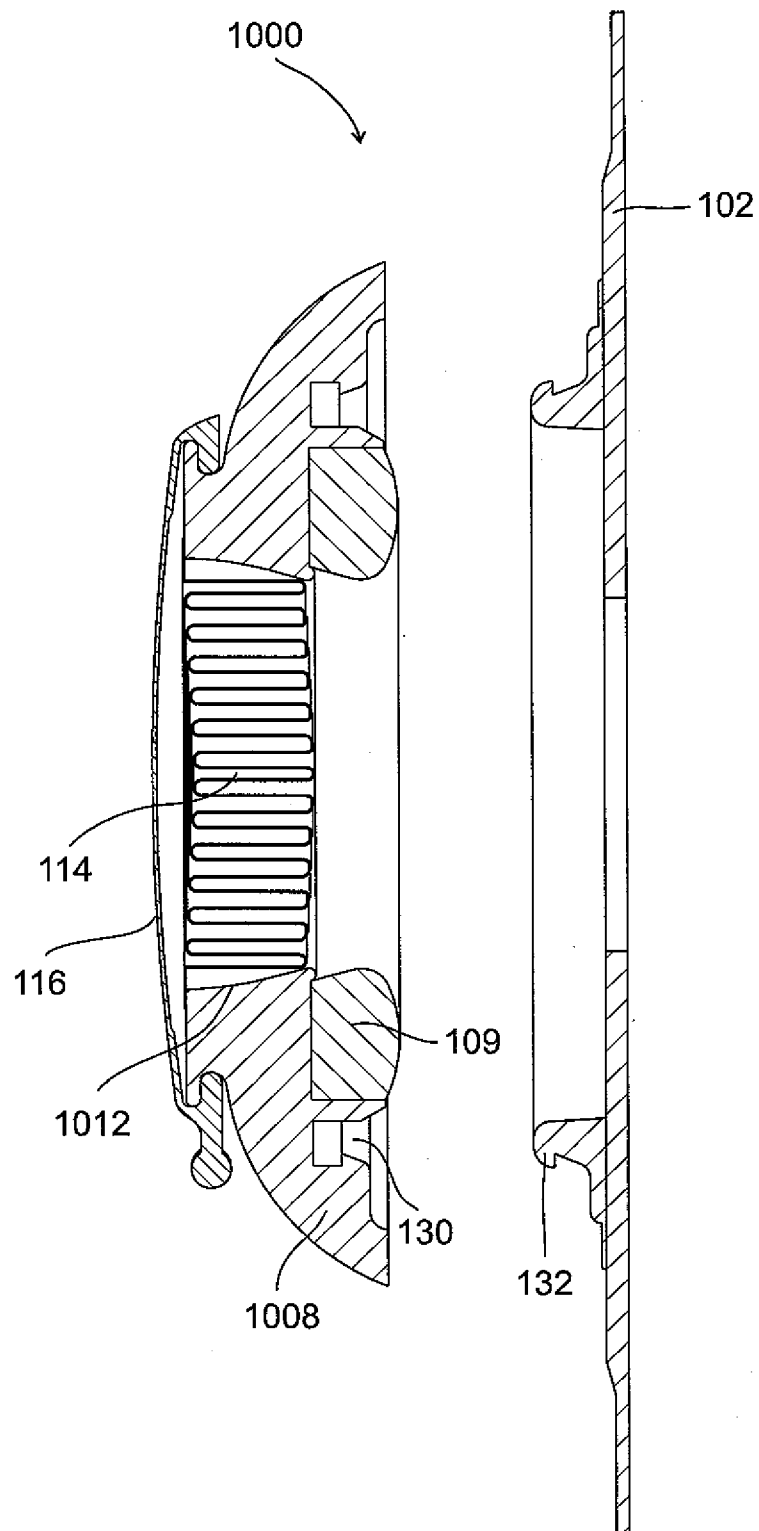


FIG. 19

34/44

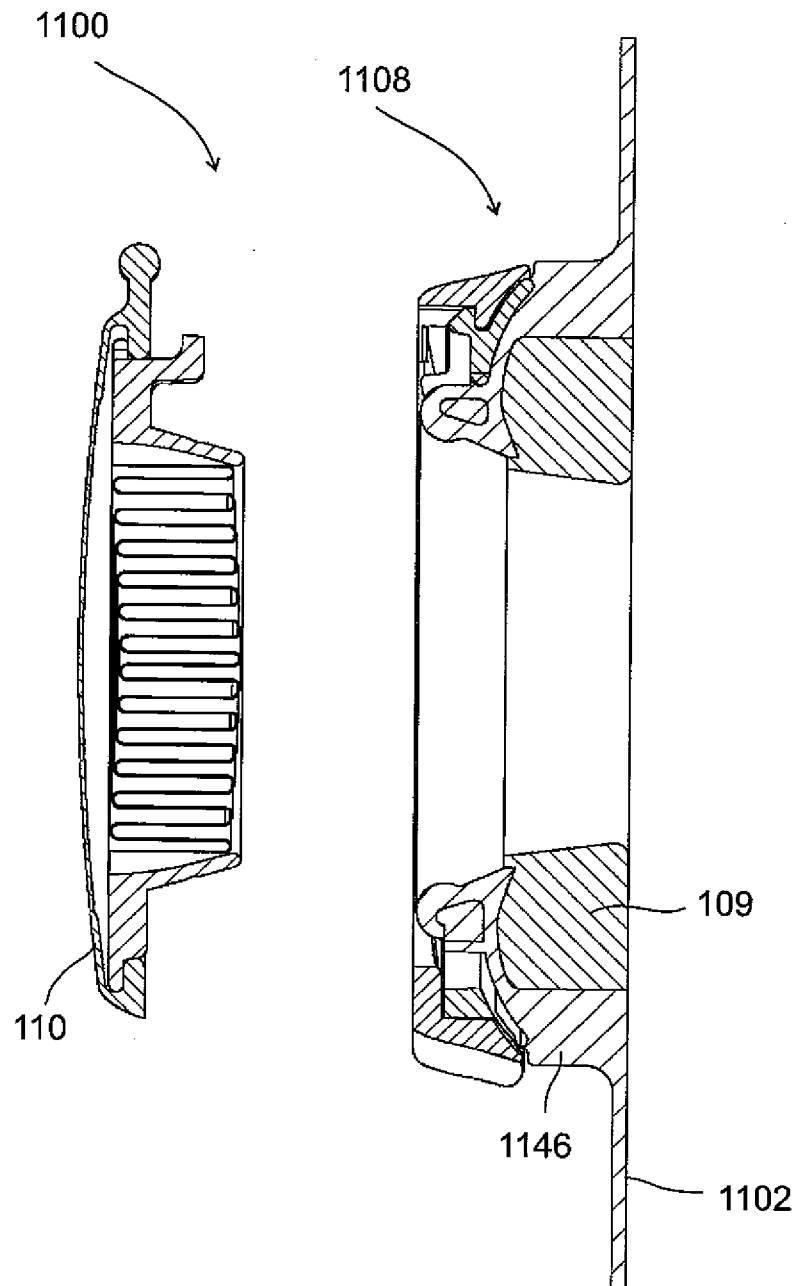


FIG. 20

35/44

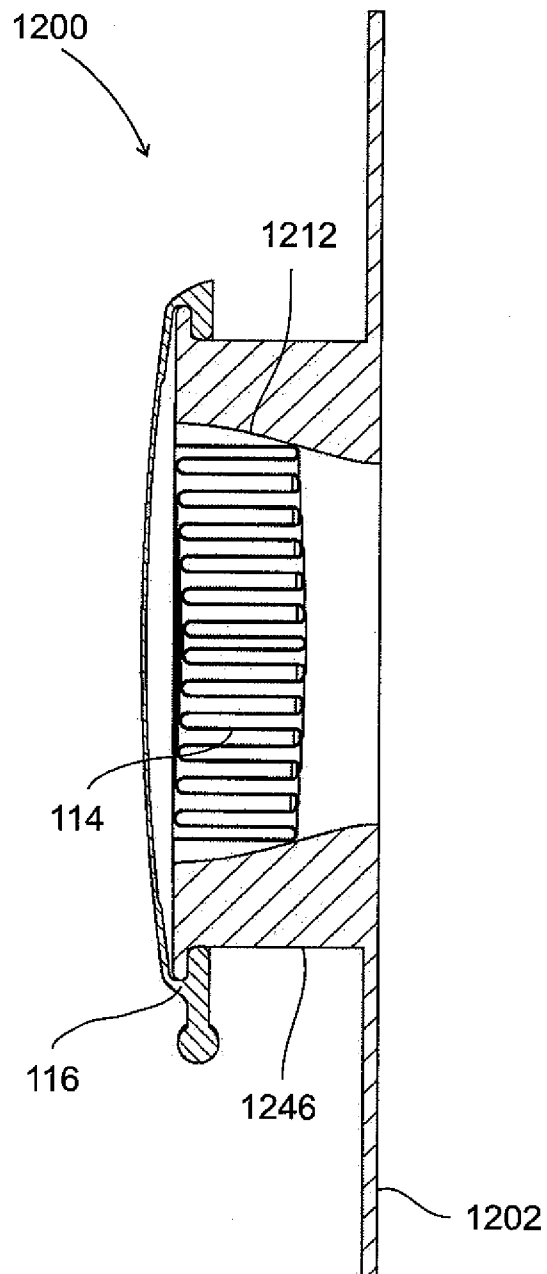


FIG. 21

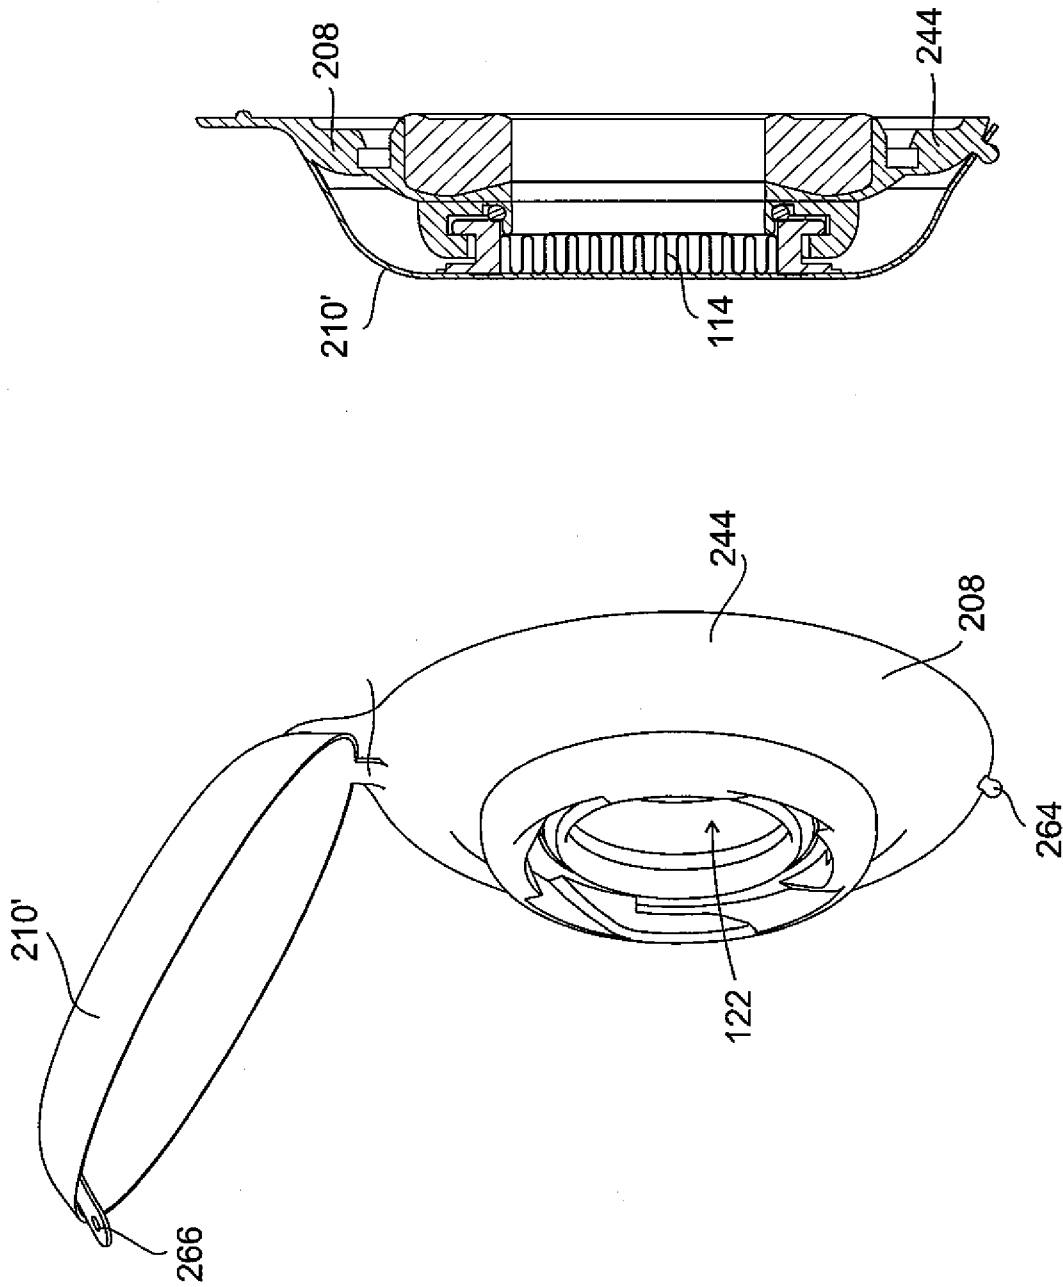


FIG. 22B

FIG. 22A

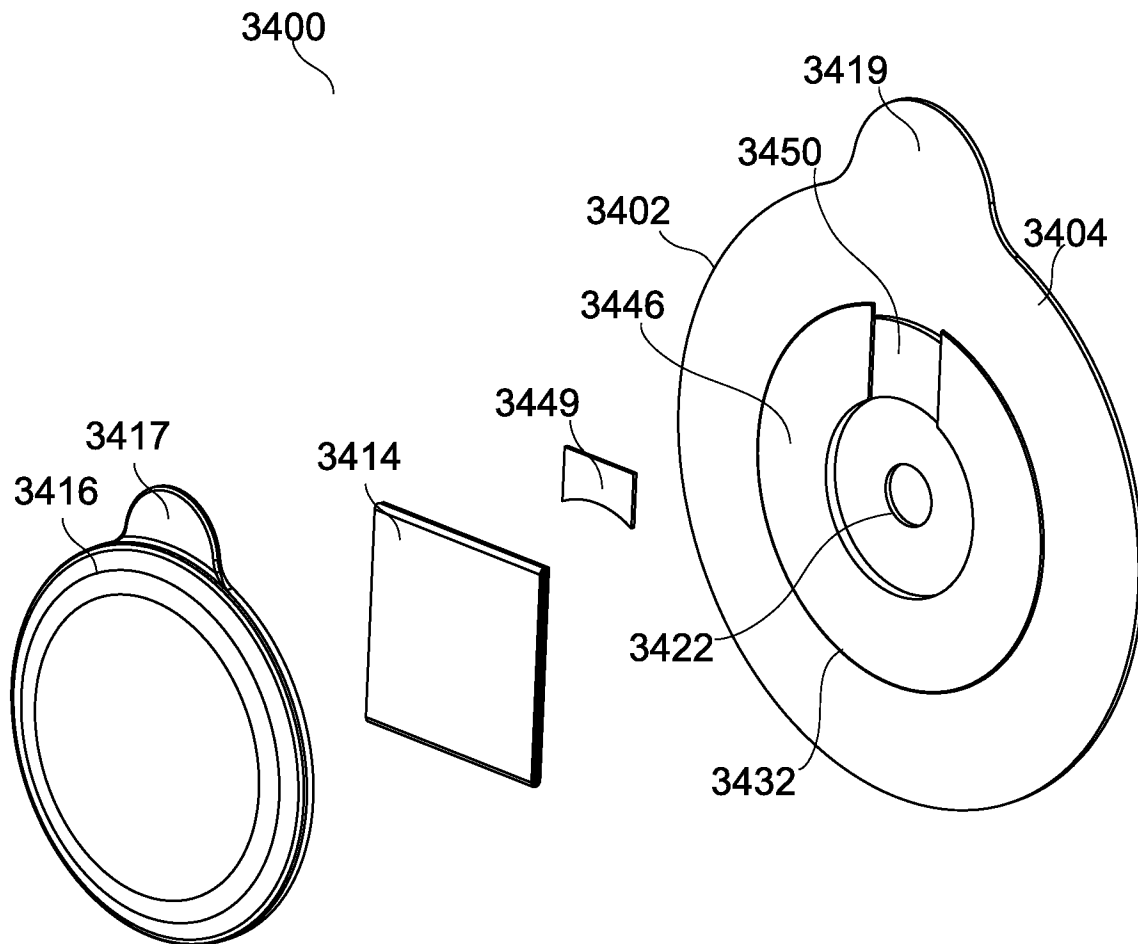


FIG. 22C


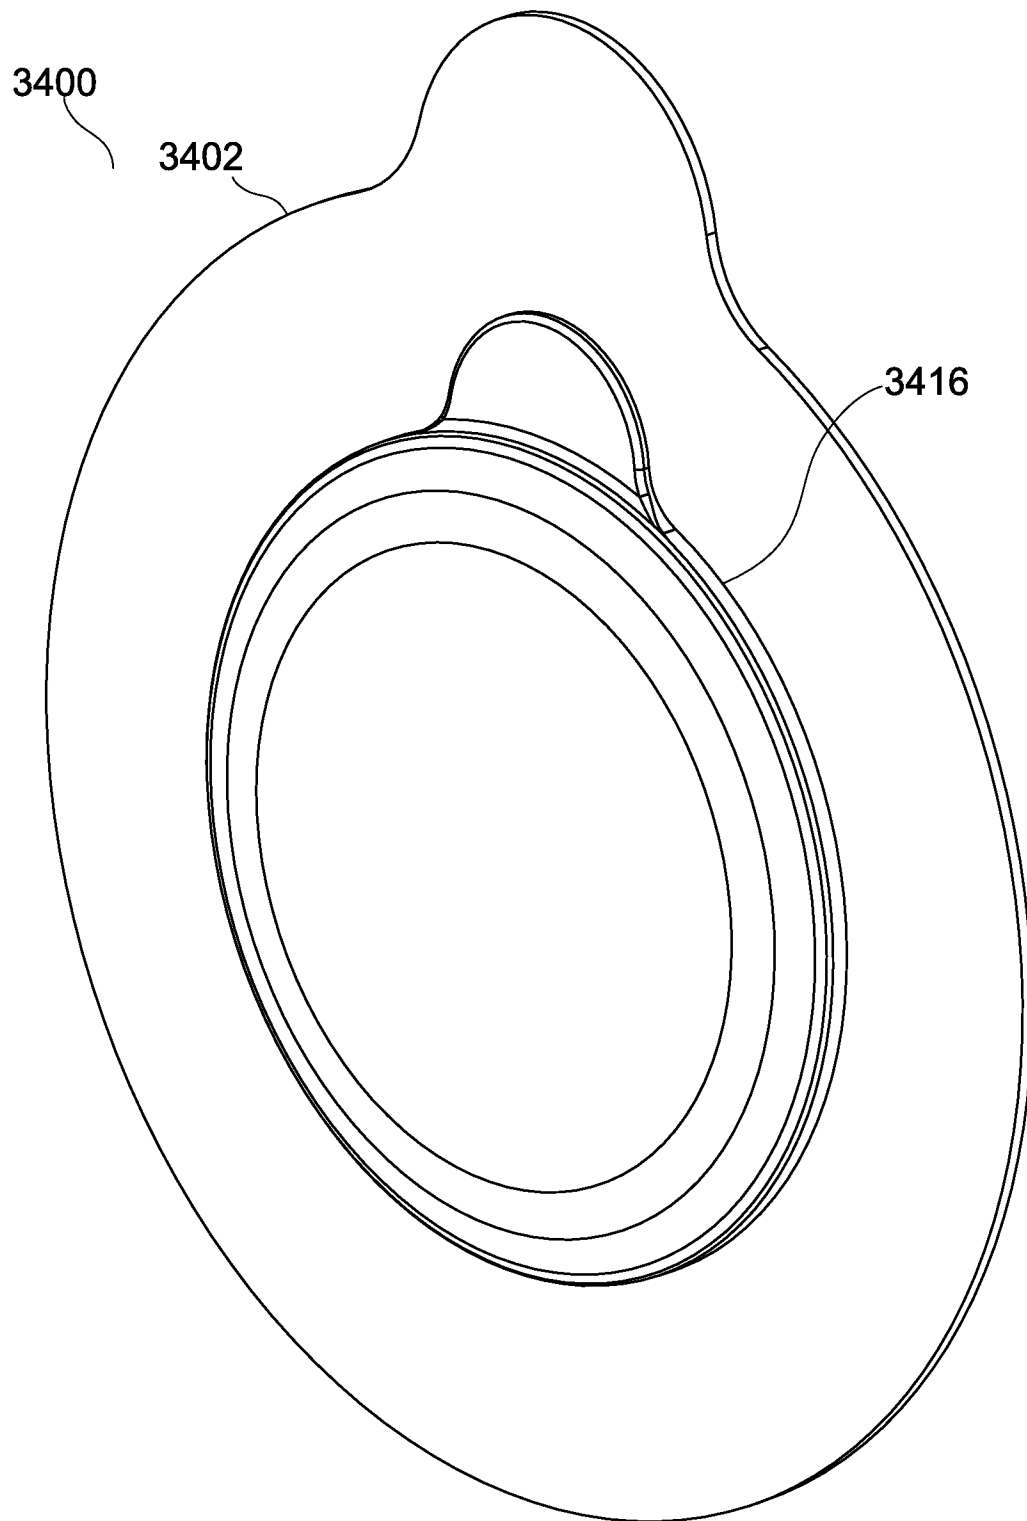


FIG. 22D

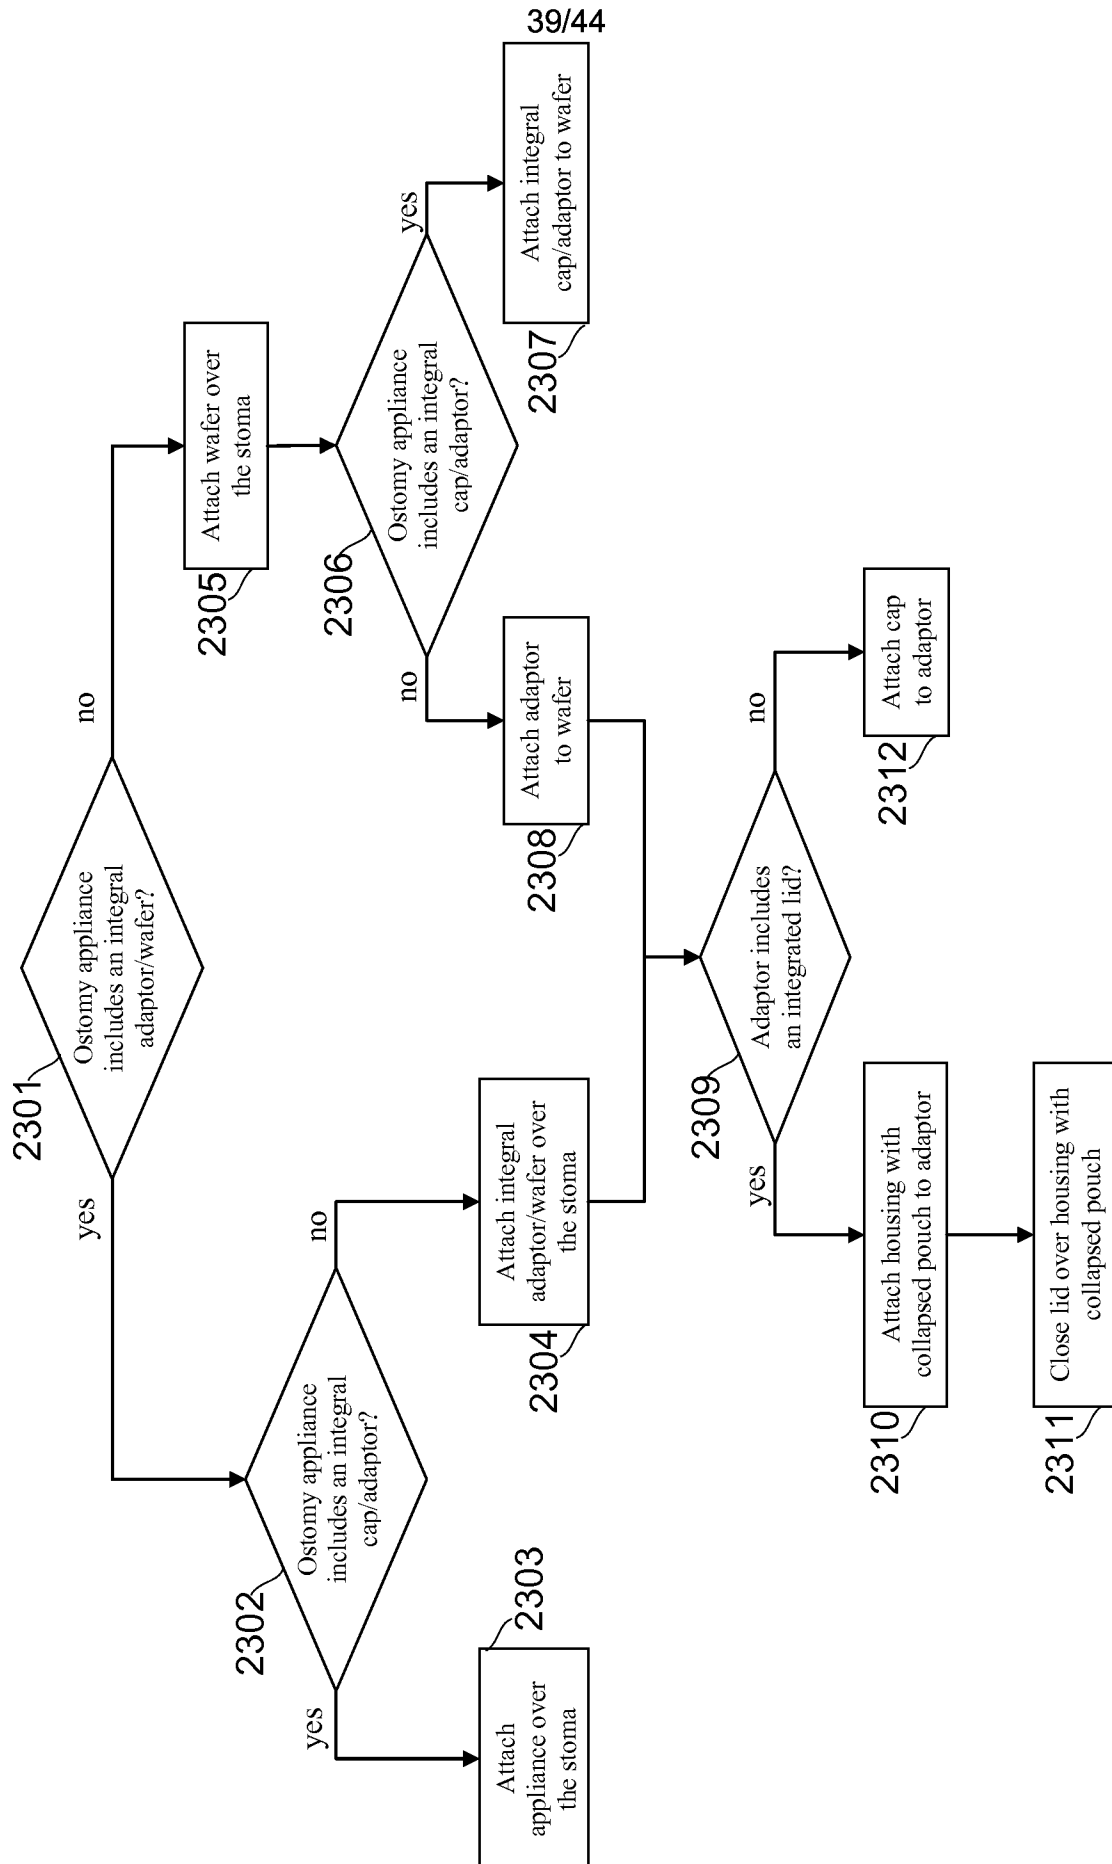

40/44

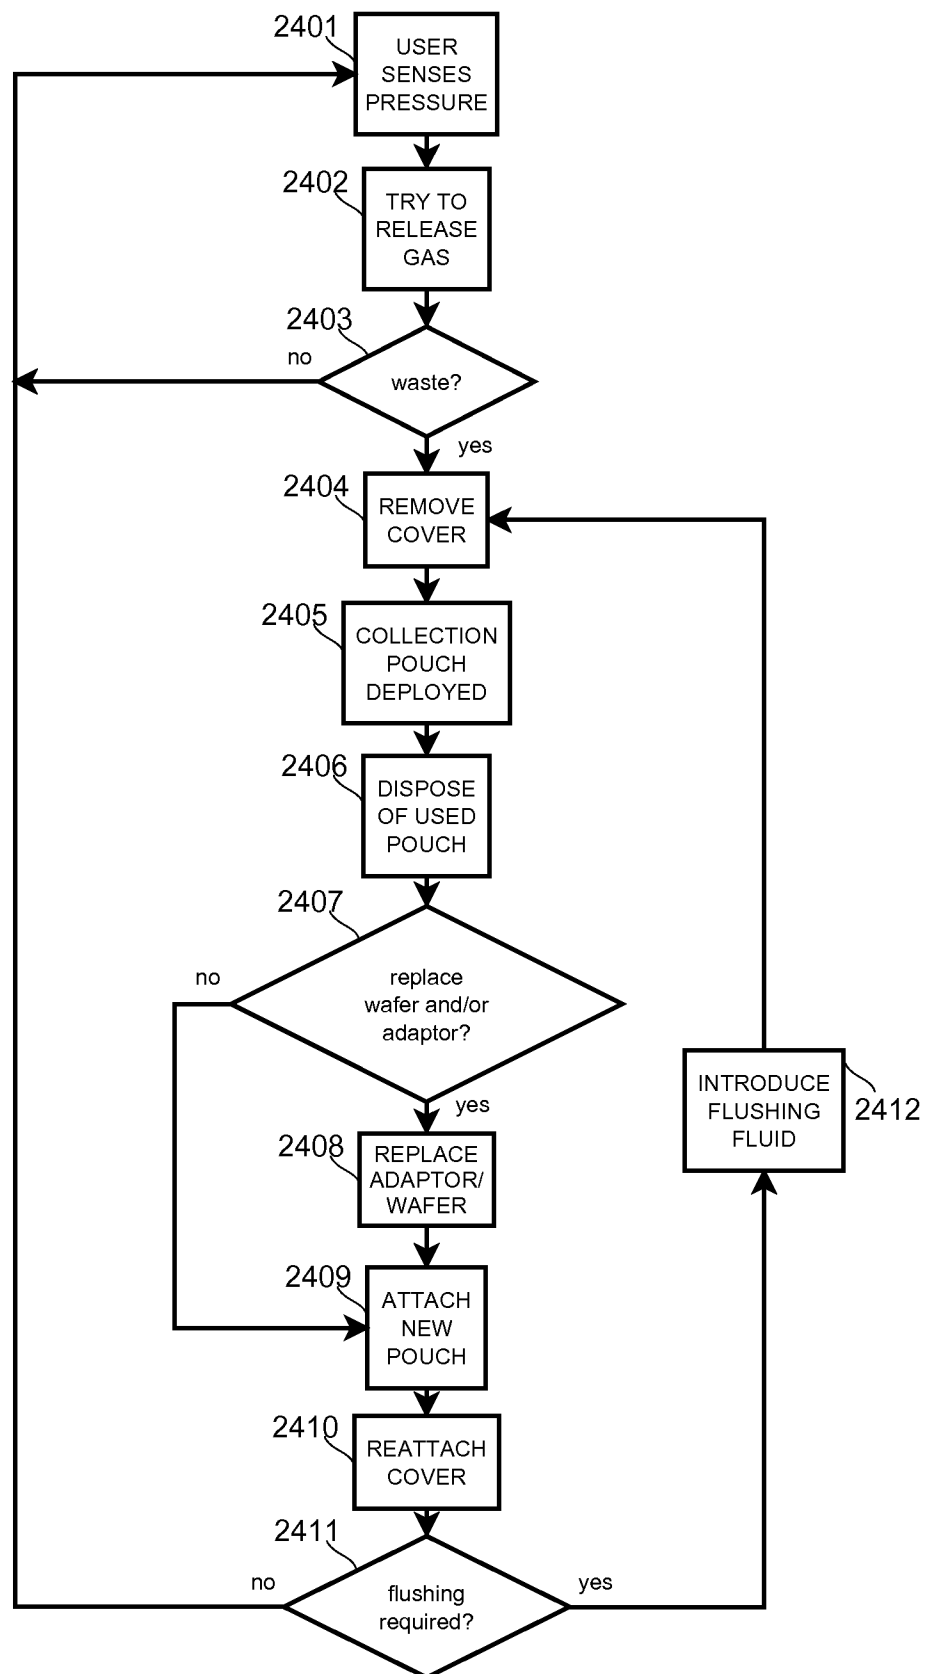


FIG. 24

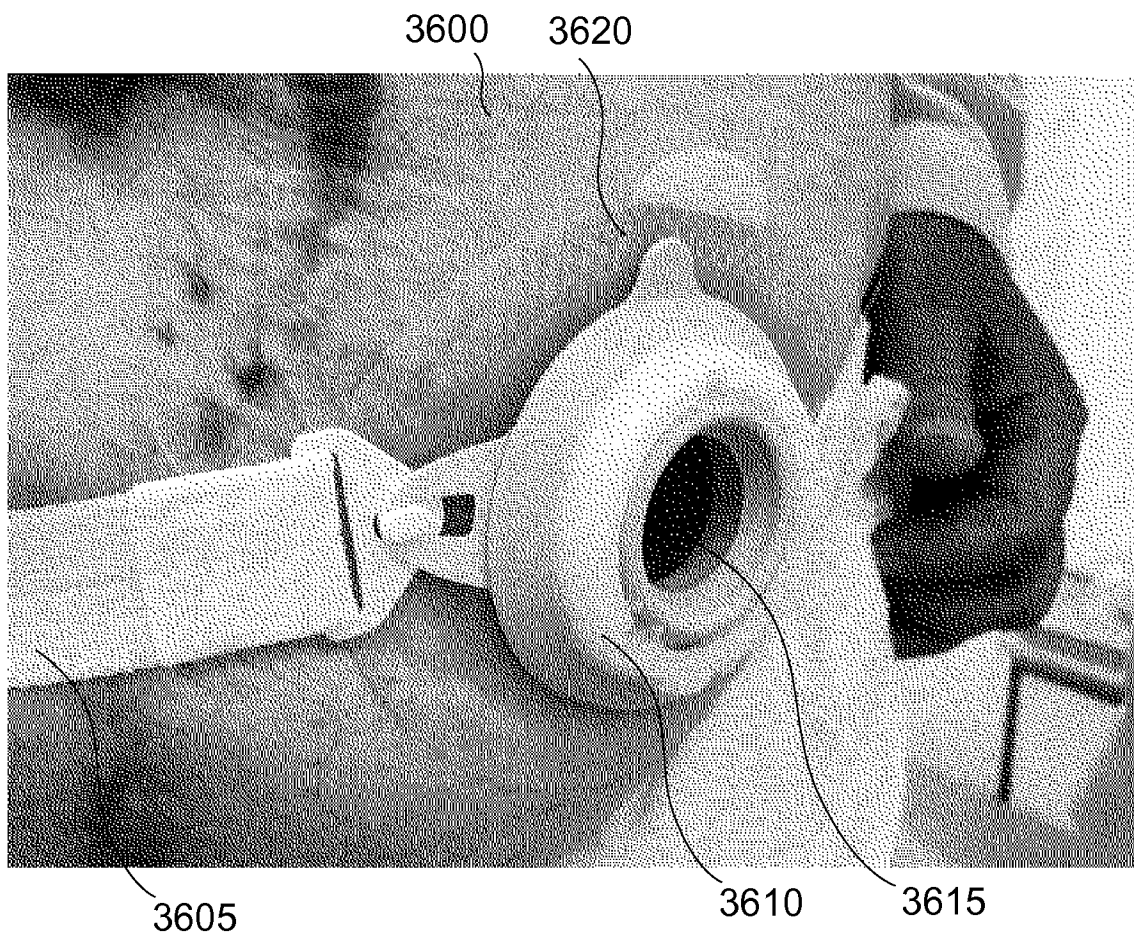


FIG. 25

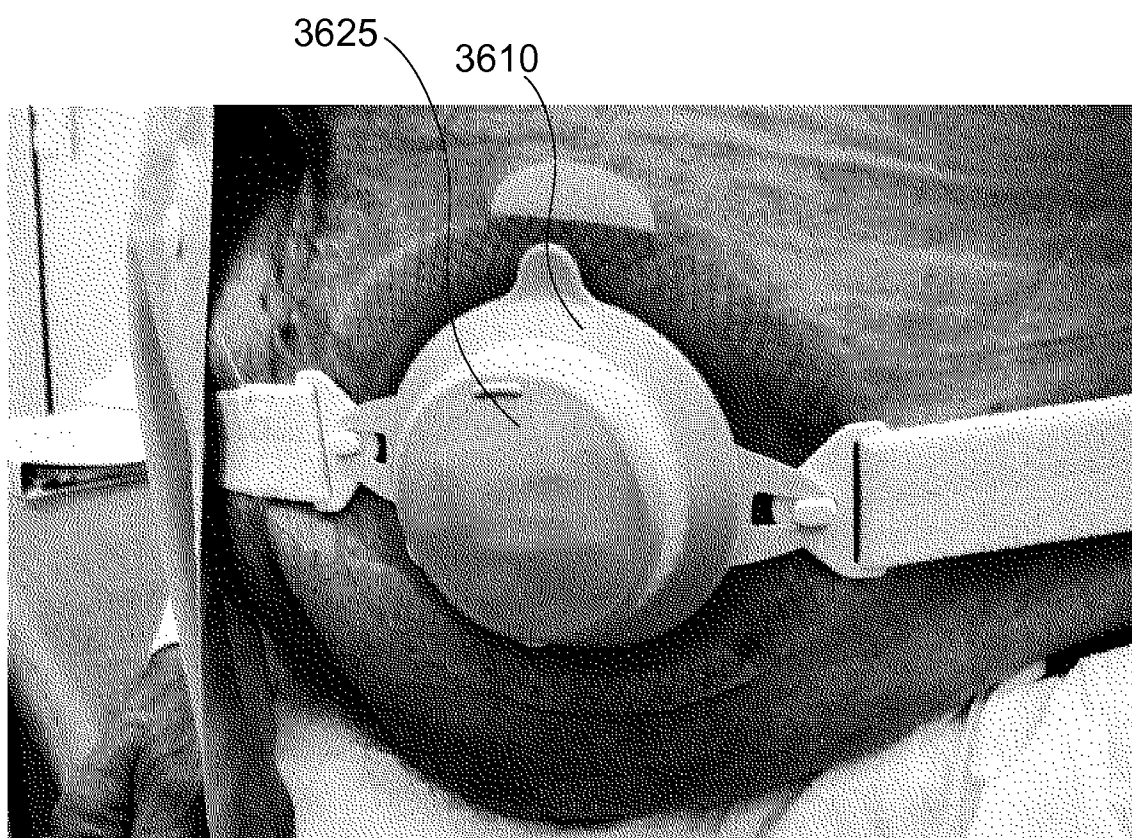


FIG. 26

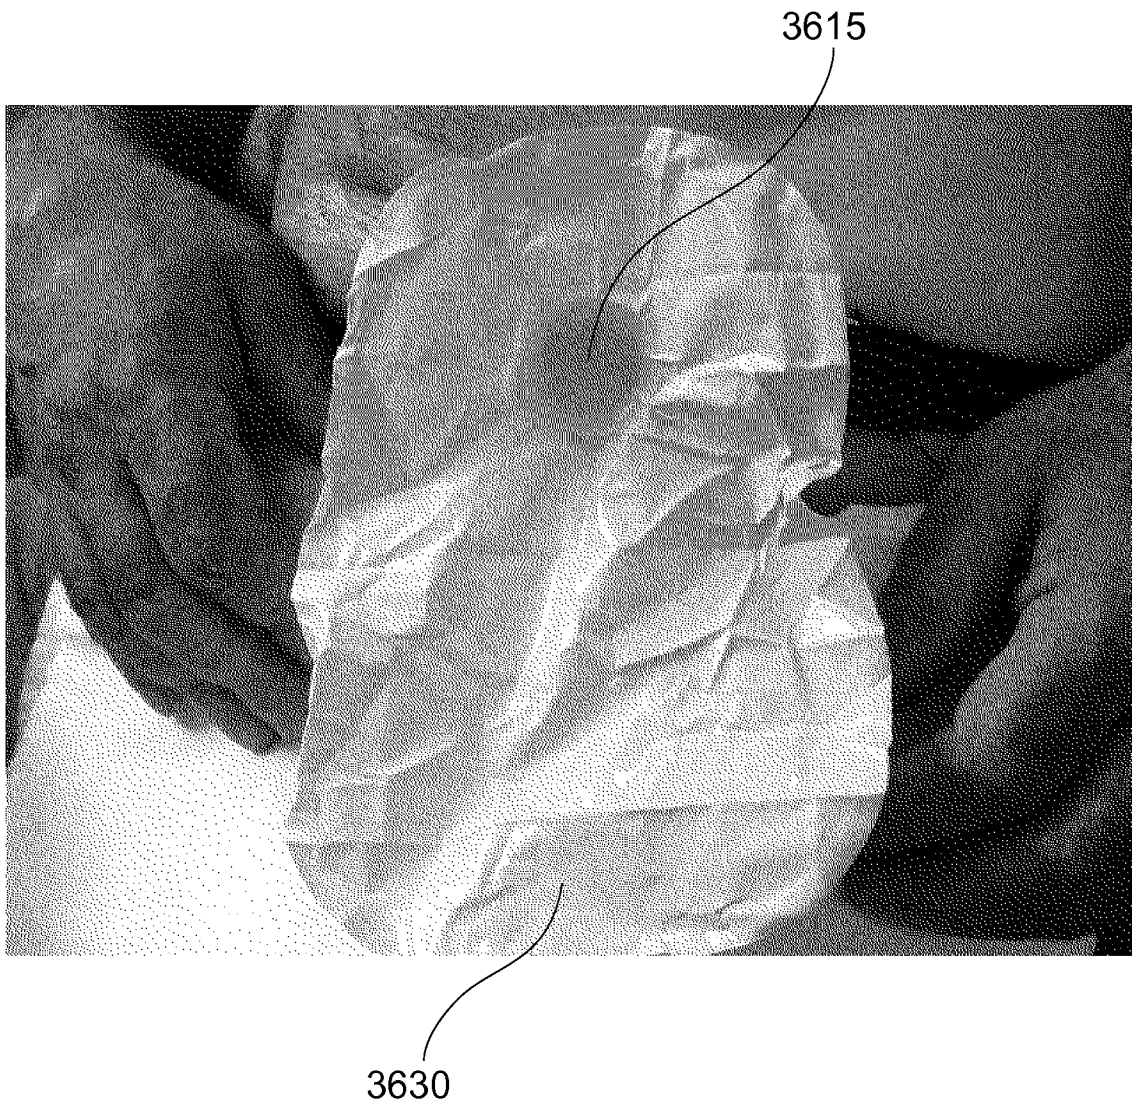


FIG. 27

44/44

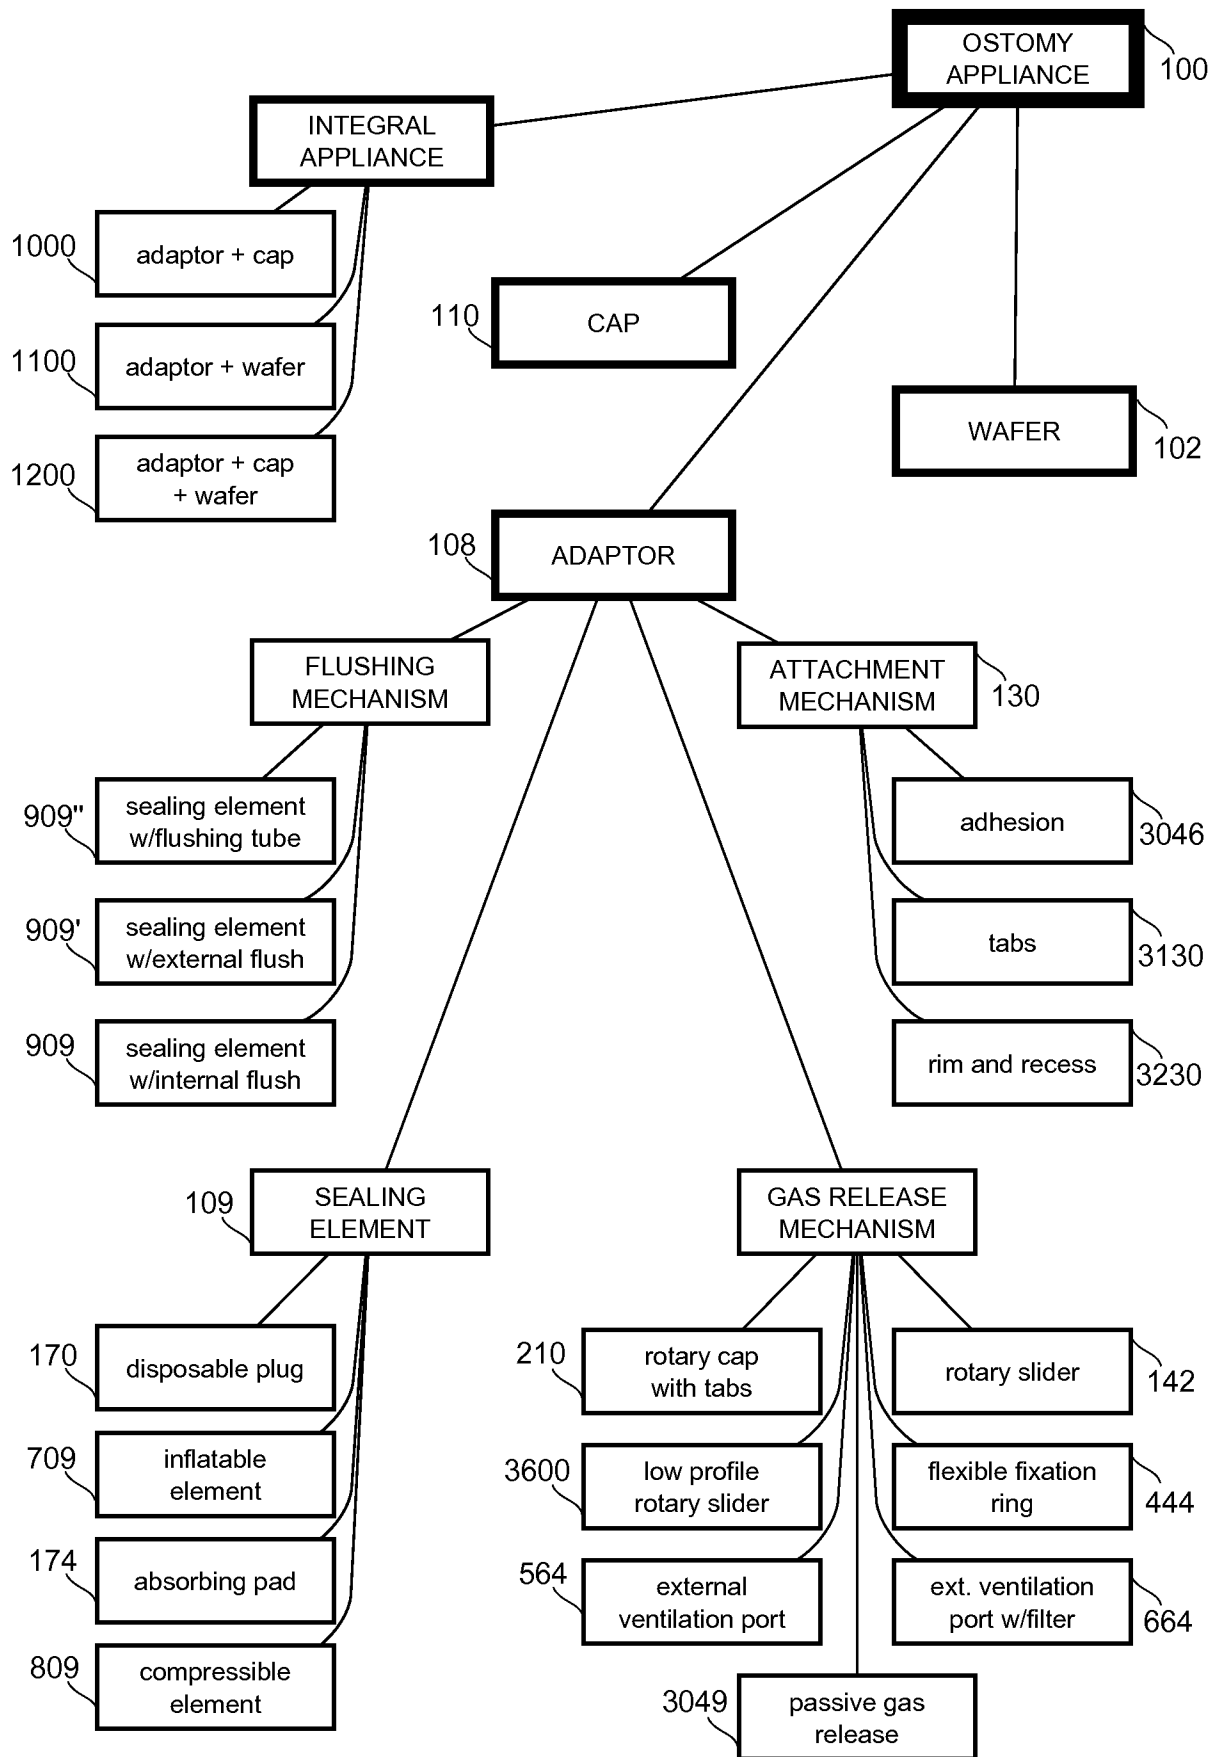


FIG. 28