

(19) **DANMARK**

(10) **DK/EP 2220902 T3**



(12)

Oversættelse af
europæisk patentskrift

Patent- og
Varemærkestyrelsen

-
- (51) Int.Cl.: **H 04 W 74/00 (2009.01)**
- (45) Oversættelsen bekendtgjort den: **2015-02-09**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2014-12-24**
- (86) Europæisk ansøgning nr.: **08767135.0**
- (86) Europæisk indleveringsdag: **2008-05-07**
- (87) Den europæiske ansøgnings publiceringsdag: **2010-08-25**
- (86) International ansøgning nr.: **SE2008050524**
- (87) Internationalt publikationsnr.: **WO2009075630**
- (30) Prioritet: **2007-12-10 US 12510 P**
- (84) Designerede stater: **AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT RO SE SI SK TR**
- (73) Patenthaver: **Telefonaktiebolaget L M Ericsson (publ), , 164 83 Stockholm, Sverige**
- (72) Opfinder: **PARKVALL, Stefan, Västmannagatan 53, S-113 25 Stockholm, Sverige**
ASTELY, David, Stobaeusvägen 22, S-168 56 Bromma, Sverige
- (74) Fuldmægtig i Danmark: **Zacco Denmark A/S, Arne Jacobsens Allé 15, 2300 København S, Danmark**
- (54) Benævnelse: **Forbedret planlægning i et cellulært system**
- (56) Fremdragne publikationer:
WO-A1-2006/107835
WO-A1-2007/083569
WO-A1-2008/074380
WO-A1-2008/081004
WO-A2-2008/115003
WO-A2-2008/137864
"3rd Generation Partnership Project; Technical Specification Group Radio Access Network; Evolved Universal Terrestrial Radio Access (E-UTRA); Physical Channels and Modulation (Release 8)", 3GPP STANDARD; 3GPP TS 36.211, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, no. V8.1.0, 1 November 2007 (2007-11-01), pages 1-54, XP050377533,

Description

TECHNICAL FIELD

[0001] The present invention discloses a method and a device for scheduling in a wireless cellular system.

BACKGROUND

[0002] In the cellular system known as E-UTRAN, Evolved Universal Terrestrial Radio Access Network, also known as the Long Term Evolution system, LTE, the downlink transmissions (i.e. transmissions from the controlling node of a cell to users in the cell) are based on Orthogonal Frequency Division Multiplexing, OFDM, with OFDM symbols which can extend over a number of subcarriers and which have a certain extension in time as well.

[0003] Due to this, the E-UTRAN physical downlink resource can be seen as a time-frequency grid, comprising a number of resource elements, with each resource element corresponding to one OFDM subcarrier in one OFDM symbol interval.

[0004] In time, the E-UTRAN downlink transmissions are organized into so called radio frames, each of which comprises ten so called subframes with an extension in time of 1 ms, so that an E-UTRAN radio frame has a total extension in time of 10 ms.

[0005] In E-UTRAN systems, so called L1/L2 control signalling is used for transmitting downlink scheduling assignments, which are required for the users ("terminals") to properly receive, demodulate and decode downlink data, as well as uplink scheduling grants informing the terminals about resources and transport format for the uplink transmissions, together with hybrid-ARQ acknowledgements in response to uplink data transmission.

[0006] In E-UTRAN, the downlink L1/L2 control channels are mapped to the first 1-3 OFDM symbols within a subframe. Thus, each E-UTRAN subframe can be said to be divided into a control region and a data region, with the control region being first in time.

[0007] The size of the E-UTRAN control region is always equal to an integer number of OFDM symbols (1, 2 or 3 OFDM symbols can be used for control signalling) and can be varied per subframe, which maximizes the spectral efficiency as the control signalling overhead can be adjusted to match the instantaneous traffic situation.

[0008] The location of the control signalling at the beginning of the subframe is advantageous, as it enables a terminal to decode the downlink scheduling assignment (DL-SCH) prior to the end of the subframe. Decoding of the DL-SCH can thus begin directly after the end of the subframe, without having to wait for the decoding of the L1/L2

control information, which minimizes the delay in the DL-SCH decoding and thus the overall downlink transmission delay.

[0009] The E-UTRAN downlink L1/L2 control signalling consists of three different physical channel types:

- PCFICH, the Physical Control Format Indicator Channel, which is used to inform the terminal of the number of OFDM symbols (1, 2, or 3) that are used for L1/L2 control signalling in the current subframe. At present, there is only one PCFICH in a cell.
- PDCCH, the Physical Downlink Control Channel, which is used to carry downlink scheduling assignments and uplink scheduling grants. In addition, it may also be used for power control of a group of terminals. Typically, there are multiple PDCCHs in a cell.
- PHICH, the Physical Hybrid-ARQ Indicator Channel, which is used to transmit ACK/NACK in response to reception of UL-SCH transmissions. Typically, there are multiple PHICHs in a cell.

[0010] A closer description of the PCFICH and PHICH control channels is as follows:

PCFICH - the Physical Control Format Indicator Channel

[0011] The PCFICH is used to indicate the number of OFDM symbols used for L1/L2 control signalling in the current subframe, or, equivalently, where in the subframe the data region starts. Reception of the PCFICH is thus essential to correct operation of the system. If the PCFICH is incorrectly decoded, the terminal will neither know where to find the control channels, nor where the data region starts, and will therefore lose any uplink scheduling grants transmitted, as well as any DL-SCH data transmission intended for the terminal.

[0012] At present, two bits of information, corresponding to a control region size of 1, 2, or 3 OFDM symbols, are coded into a 32-bit long sequence using a so called rate-1/16 simplex code. The coded bits are scrambled, QPSK-modulated, and mapped to 16 E-UTRAN OFDM resource elements. To be compatible with the different E-UTRAN transmit diversity schemes, which are specified in groups of 4 symbols, the 16 resource elements are grouped into 4 groups of 4 elements each. Such a group of 4 resource elements is sometimes referred to as a mini-CCE (Control Channel Element), also known as a resource-element group.

[0013] Frequency diversity is important for reliable PHICH reception. Therefore, the PCFICH is mapped to 4 mini-CCEs which are well separated in frequency. In the current 3GPP (3rd Generation Partnership Project) specifications, this is obtained by dividing the overall downlink system bandwidth into four equally-sized quarters with one mini-CCE in each quarter, so that the mini-CCEs used for PCFICH are equally spaced in frequency.

PHICH - the Physical Hybrid-ARQ Indicator Channel

[0014] The PHICH is used for transmitting hybrid-ARQ acknowledgements in response to UL-SCH transmission. There is one PHICH for each terminal which expects an acknowledgement in the subframe.

[0015] Each PHICH carries one bit which is repeated three times, modulated, spread with a spreading factor of four, and then mapped to 3 mini-CCEs. Multiple PHICHs form a so called PHICH group, and the PHICHs within a PHICH group are code-multiplexed using different orthogonal spreading sequences, and share the same set of resource elements.

[0016] In similarity to the PCFICH, frequency diversity is important for the PHICH. At present, the exact mapping of PCFICH in E-UTRAN has not been decided in 3GPP, but ideally the 3 mini-CCEs used for a PHICH should be spread over the full system bandwidth.

[0017] Typically, the PHICH is transmitted in the first OFDM symbol only. However, in some propagation environments, this would unnecessarily restrict the PHICH coverage. To alleviate this, it is possible to configure a PHICH duration of three OFDM symbols, in which case the control region will be three OFDM symbols long in all subframes.

[0018] Prior art is disclosed in 3GPP TS 36.211, v8.1.0, 2007-11, E-UTRA, physical channels and modulation, release 8.

[0019] At present, there is no specification in E-UTRAN for the PHICH mapping. However, to use the same approach as for the PCFICH, i.e. to space the mapping of the three PHICH mini-CCEs equally over the system bandwidth might cause problems, since this could result in the PHICH being mapped to the same set of resource elements as the PCFICH.

SUMMARY

[0020] Thus, as explained in the previous section, there is a need for a solution to the problem of scheduling or mapping the two control channels PCFICH and PHICH in an E-UTRAN subframe so that the risk of collisions is obviated. Ideally, such a solution should be possible to apply to virtually any two channels, not just two control channels, and should also not be restricted to downlink scheduling.

[0021] Such a solution is offered by the present invention in that it discloses a method for use in a wireless cellular communications system, in which system a controlling node controls the transmissions to and from users in a cell.

[0022] In a system in which the invention can be applied, transmissions are made in subframes with a certain extension in time and over a certain amount of subcarriers in

frequency. The subframes comprise a number of subelements, and the method of the invention is intended for scheduling a first and a second channel in one and the same subframe.

[0023] The method comprises the steps of:

- dividing the transmission resources needed for the first channel into a first set of resource groups,
- assigning the resource groups of the first set to subelements in the subframe in a predetermined fashion,
- assigning a symbol value to all subelements in the subframe which have not been assigned a resource groups of the first set,
- dividing the transmission resources needed for the second channel into a second set of resource groups,
- assigning, in a predetermined fashion, the resource groups of the second set to subelements in the subframe by means of said symbol values.

[0024] Thus, using the method of the invention, the resource groups of the second channel can only be assigned to subelements in the subframe which have not been assigned to resource groups of the first channel, which eliminates the risk of scheduling collisions.

[0025] In one embodiment of the invention, the resource groups of the second set are assigned to subelements in the subframe in such a manner that they are maximally spaced apart from each other in frequency, while, in another embodiment, the resource groups of the second set are assigned to subelements in the subframe in such a manner that they are spaced apart from each other in frequency in a predetermined fashion.

[0026] Suitably, the first and the second channel to which the invention is applied are control channels, although the invention is not restricted to being applied to control channels.

[0027] Also, in a preferred embodiment, the inventive scheduling is applied to downlink subframes, although it can also be applied to uplink subframes.

[0028] The invention also discloses a scheduling node for a system in which the invention is applied.

BRIEF DESCRIPTION OF THE DRAWINGS

[0029] The invention will be described in more detail in the following, with reference to the appended drawings, in which

Fig 1 shows an overview of a system in which the invention can be applied, and

Fig 2 shows downlink resources in the system of fig 1, and

Fig 3 shows a downlink subframe, and

Fig 4 shows a flow chart of a method of the invention, and

Fig 5 shows a block diagram of a scheduling node of the invention.

DETAILED DESCRIPTION

[0030] The invention will be described below with use of terminology from the E-UTRAN standards. However, it should be pointed out that this is merely in order to facilitate the reader's understanding of the invention, and is not intended to restrict the scope of protection sought for the invention, which can be applied other systems as well, where corresponding principles are used.

[0031] Fig 1 shows a schematic view of a part of a system 100 in which the invention may be applied. Thus, the system 100 is a wireless cellular system which comprises a number of cells, one of which is shown as 110 in fig 1. Each cell can hold a number of users, one of which, 120, is shown as an example, and a controlling node 130, in E-UTRAN known as eNodeB, controls traffic to and from users 120 in the cell 110. Traffic from the users, ("UE", user terminal), to the eNodeB is referred to as uplink traffic, UL, and traffic in the other direction is referred to as downlink traffic, DL.

[0032] The principle of OFDM which is used in E-UTRAN systems was described in the previous section, and fig 2 shows pictorially the same principle, i.e. the E-UTRAN physical downlink resource as a frequency-time grid, with a number of resource elements, each of which corresponds to one OFDM subcarrier frequency (Δf) over one OFDM symbol interval. One resource element is indicated as RE 210 in fig 2, in order to further clarify the notion of resource elements.

[0033] The principle of radio frames in E-UTRAN which are organized into subframes of 1 ms each was also explained above, and fig 3 shows one such E-UTRAN subframe 310. As indicated in fig 3, and as was also explained in the previous section, the E-UTRAN control signalling, i.e. the L1/L2 control channels, is placed at the beginning (time-wise) of the E-UTRAN subframes. In a subframe such as the one 310 of fig 3, there will also be a number of reference symbols, which do not directly pertain to the invention, but which are shown as RS in fig 3,

[0034] A purpose of the invention is to avoid scheduling collisions between control channels, in particular the PCFICH and the PHICH channel, i.e. the Physical Control Format Indicator Channel and the Physical Hybrid ARQ Indicator Channel.

[0035] The PCFICH uses sixteen E-UTRAN resource elements, grouped into four so

called mini-CCEs, Control Channel elements, while the PHICH uses a number of mini-CCEs which is a multiple of three; the exact number of PHICH mini-CCEs depends on the number of terminals that expect an ACK/NACK in the subframe.

[0036] The E-UTRAN standard specifies how the four PCFICH mini-CCEs are to be scheduled in the subframes: The overall downlink system bandwidth is divided into four equally-sized quarters with one PCFICH mini-CCE in each quarter. The mini-CCEs used for PCFICH are thus equally-spaced in the frequency domain.

[0037] Thus, since the scheduling of the PCFICH is specified in the E-UTRAN standard, the invention needs to focus on how the PHICH mini-CCEs should be scheduled in the subframes in order to avoid collisions with the PCFICH mini-CCEs.

[0038] One principle of the invention is to assign a symbol value such as, for example a number or a letter or a combination of those, to those mini-CCEs or subelements in the subframe which have not been assigned a PCFICH mini-CCE. The PHICH mini-CCEs are then assigned in a predetermined fashion to mini-CCEs in the subframe using these symbol values, which will lead to a subframe in which the PCFICH and the PHICH mini-CCEs will not be at risk of colliding.

[0039] As will be realized by the man skilled in the field, the exact manner in which the PHICH mini-CCEs are assigned to the subframe can be varied in a great many ways within the scope of the present invention; examples of principles which may be used are to either use an assignment method which assigns the PHICH mini-CCEs in such a manner that they are maximally spaced apart from each other in frequency and/or in time, or, alternatively, that they are spaced apart from each other in frequency and/or in time in some other predetermined fashion. However, other principles for this are also entirely possible within the scope of the present invention.

[0040] Two specific examples will now be given of how the principles of the invention may be applied:

Example 1

[0041]

1. Let N denote the number of not yet allocated mini-CCEs in the subframe. Initialize N to the total number of mini-CCEs in the system bandwidth,
2. Let k denote the number of PHICH groups to which resources have been allocated. Initialize k to 0,
3. Allocate mini-CCEs to PCFICH,
4. Set $N=N-4$ (since four mini-CCEs are used for the PCFICH),

5. Number the mini-CCEs which remain after step 3 from 0 to $N-1$,
6. Allocate mini-CCE number 0, $N/3$ and $2N/3$. If the divisions result in non-integer results, rounding can be used, e.g., through the "ceil" or "floor" operators,
7. Set $k=k+1$ (since one additional PHICH group has been allocated resources)
8. Set $N=N-3$ (three mini-CCEs used for the PHICH group)
9. If additional PHICH groups are to be allocated, go back to step 5, otherwise terminate the allocation.

Example 2

[0042] Another way of describing a mapping similar to that of example 1 is to specify the PHICH mapping relative to the PCFICH mapping. This could be done as follows:

1. Let N denote the number of not yet allocated mini-CCEs in the subframe. Initialize N to the total number of mini-CCEs in the system bandwidth,
2. Let k denote the number of PHICH groups to which resources has been allocated. Initialize k to 0. Allocate PCFICH resources. Let n_0 denote the number (in the frequency domain) of the first mini-CCE for PCFICH,
3. Allocate mini-CCEs number n_0+k , $n_0+N/3+k$ and $n_0+2N/3+k$ to PHICH group k . If either of these mini-CCEs collides with already allocated mini-CCEs, use the next higher mini-CCE number until no collision occurs (e.g. $n_0+N/3+k+1$, $n_0+N/3+k+2$, etc for the second mini-CCE of the PHICH group; similarly for the third mini-CCE in the group). If the divisions result in non-integer results, rounding can be used, e.g., through "ceil" or "floor" operators,
4. Set $k=k+1$ (one additional PHICH group has been allocated resources),
5. If additional PHICH groups are to be allocated, go back to step 4, otherwise terminate the allocation.

[0043] Fig 4 shows a schematic flow chart of a generalized method 400 of the invention. As has also emerged from the description above, the method 400 is intended for use in a wireless cellular communications system, and as indicated in step 405, according to the method 400, a controlling node such as an E-UTRAN eNodeB controls the transmissions to and from users in a cell.

[0044] Step 410 indicates that transmissions are made in subframes with a certain extension in time and over a certain amount of subcarriers in frequency, with the subframes comprising a number of subelements, and as shown in step 415, the method 400 is used for scheduling a first and a second channel in one and the same subframe.

[0045] The method 400 comprises the steps of:

- Dividing, step 420, the transmission resources needed for the first channel into a first set of resource groups,
- Assigning, step 425, the resource groups of the first set to subelements in the subframe in a predetermined fashion,
- Assigning, step 430, a symbol value to all subelements in the subframe which have not been assigned a resource groups of the first set,
- Dividing, step 435, the transmission resources needed for the second channel into a second set of resource groups ,
- Assigning, step 440, in a predetermined fashion, the resource groups of the second set to subelements 210 in the subframe by means of said symbol values.

[0046] As indicated in step 445, in one embodiment of the method, the resource groups of the second set are assigned to subelements in the subframe in such a manner that they are maximally spaced apart from each other in frequency, whilst, in another embodiment, as shown in step 450, the resource groups of the second set are assigned to subelements in the subframe in such a manner that they are spaced apart from each other in frequency in a predetermined fashion.

[0047] As indicated in step 455, in one embodiment of the invention, the first and the second channel are control channels.

[0048] Suitably, the method 400 is applied to a downlink subframe.

[0049] As shown in step 460, the method 400 may in one embodiment be applied to an E-UTRAN system, Long Term Evolution. In such an embodiment, the subelements are mini-CCEs, Control Channel Elements, also known as resource element groups, and the control channels are the PCFICH and PHICH channels, i.e. the Physical Control Format Indicator Channel and the Physical Hybrid ARQ Indicator Channel.

[0050] The invention also discloses a scheduling node for use in a cellular system in which the invention is applied. In a preferred embodiment, the inventive scheduling node is employed in a controlling node of the system, e.g. an eNodeB of an E-UTRAN system, although the scheduling node of the invention can of course also be employed in other nodes of the system.

[0051] The scheduling node of the invention will mainly be embodied in software, so that it will be stored in a memory from which it can be accessed and executed by a computer. For this reason, fig 5, which schematically shows an example of an embodiment 500 of a

scheduling node of the invention shows the scheduling node 500 inside an eNodeB, in a memory 510 and a processor 505 such as a microprocessor. It should however, again be emphasized that the location of the scheduling node 500 in an eNodeB of an E-UTRAN system as shown in fig 5, is merely an example of a device in which the inventive scheduling node 500 can be utilized.

[0052] As has also emerged from the description above, the scheduling node 500 of the invention is intended for use in a cellular communications system in which transmissions to and from users are made in subframes which have a certain extension in time and which extend over a certain amount of subcarriers (Δf) in frequency. The subframes comprise a number of subelements, and the scheduling node 500 is adapted to schedule a first and a second channel in one and the same subframe.

[0053] The scheduling of the node 500 comprises:

- dividing the transmission resources needed for the first channel into a first set of resource groups,
- assigning the resource groups of the first set to subelements in the subframe in a predetermined fashion,
- assigning a symbol value to all subelements in the subframe which have not been assigned a resource groups of the first set,
- dividing the transmission resources needed for the second channel into a second set of resource groups ,
- assigning, in a predetermined fashion, the resource groups of the second set to subelements in the subframe by means of said symbol values.

[0054] In one embodiment of the scheduling node 500, the resource groups of the second set are assigned to subelements in the subframe in such a manner that they are maximally spaced apart from each other in frequency, whilst, in another embodiment, the resource groups of the second set are assigned to subelements in the subframe in such a manner that they are spaced apart from each other in frequency in a predetermined fashion.

[0055] Suitably, the first and the second channel to which the scheduling is applied are control channels, and in one embodiment, the scheduling node the scheduling to one or more downlink subframes.

[0056] Preferably, the scheduling node 500 is employed in an E-UTRAN system, suitably in an eNodeB of an E-UTRAN system.

[0057] The invention is not limited to the examples of embodiments described above and shown in the drawings, but may be freely varied within the scope of the appended claims.

Patentkrav

- 5 1. Fremgangsmåde (400) til anvendelse i et trådløst cellulært kommunikationssystem (100), ifølge hvilken fremgangsmåde en styreknode (130) styrer (405) transmissionerne til og fra brugere (120) i en celle (110), og (100) transmissionerne sker (410) i underrammer (310) med en vis forlængelse i tid og over en vis mængde underbærere (Δf) i frekvens, hvor underrammerne (310) omfatter et antal delelementer (210), hvor fremgangsmåden anvendes til planlægning (415) af en første og anden kanal i en eller samme underramme, hvor fremgangsmåden omfatter følgende trin:
- 10 • inddele (420) de transmissionsressourcer, der er nødvendige for den første kanal, i et første sæt af ressourcegrupper,
- tildele (425) ressourcegrupperne af det første sæt til delelementer (210) i underrammen (310) på en forudbestemt måde,
- 15 • tildele (430) en symbolværdi til alle delelementer (210) i underrammen (310), som ikke er tildelt en ressourcegruppe af det første sæt,
- inddele (435) de transmissionsressourcer, der er nødvendige for den anden kanal, i et andet sæt af ressourcegrupper,
- 20 • tildele (440), på en forudbestemt måde, ressourcegrupperne af det andet sæt delelementer (210) i underrammen ved hjælp af symbolværdierne.
- 25 2. Fremgangsmåde (400, 445) ifølge krav 1, hvor ressourcegrupperne af det andet sæt tildeles til delelementer (210) i underrammen (310) på en sådan måde, at de er anbragt med maksimal indbyrdes afstand i frekvens.
- 30 3. Fremgangsmåde (400, 450) ifølge krav 1, hvor ressourcegrupperne af det andet sæt tildeles til delelementer (210) i underrammen (310) på en sådan måde, at de er anbragt med indbyrdes afstand i frekvens på en forudbestemt måde.
- 35 4. Fremgangsmåde (400, 455) ifølge et af kravene 1-3, hvor den første og anden kanal er styrekanaler.
5. Fremgangsmåde (400) ifølge et af de foregående krav, som anvendes på en downlink-underramme (310).

6. Fremgangsmåde (400, 460) ifølge et af de foregående krav, der anvendes på et E-UTRAN-system, Long Term Evolution.

5 **7.** Fremgangsmåde ifølge krav 6, hvor delelementerne er mini-CCEs, Control Channel Elements, dvs. grupper af fire E-UTRAN-ressource-elementer (210).

8. Fremgangsmåde (400) ifølge et af kravene 4-7, hvor styrekanalerne er PCFICH- og PHICH-kanalerne, dvs. Physical Control Format Indicator Channel og Physical Hybrid ARQ Indicator Channel.

10 **9.** Planlægningsknode (500) til anvendelse i et trådløst cellulært kommunikationssystem (100), hvor transmissionerne til og fra brugere sker i underrammer (310), som har en vis forlængelse i tid, og som strækker sig over en vis mængde underbærere (Δf) i frekvens, hvor underrammerne (310) omfatter et antal delelementer (210), hvor planlægningsknuden (500) er indrettet til at planlægge en første og anden kanal i en og samme underramme, hvor planlægningen omfatter:

- inddele de transmissionsressourcer, der er nødvendige for den første kanal, i et første sæt af ressourcegrupper,
- 20 • tildele ressourcegrupperne af det første sæt til delelementer (210) i underrammen (310) på en forudbestemt måde,
- tildele en symbolværdi til alle delelementer (210) i underrammen (310), som ikke er tildelt en ressourcegruppe af det første sæt,
- inddele de transmissionsressourcer, der er nødvendige for den anden kanal, i et andet sæt af ressourcegrupper,
- 25 • tildele, på en forudbestemt måde, ressourcegrupperne af det andet sæt delelementer (210) i underrammen ved hjælp af symbolværdierne.

30 **10.** Planlægningsknode ifølge krav 9, hvor ressourcegrupperne af det andet sæt tildeles til delelementer (210) i underrammen (310) på en sådan måde, at de er anbragt med maksimal indbyrdes afstand i frekvens.

35 **11.** Planlægningsknode ifølge krav 9, hvor ressourcegrupperne af det andet sæt tildeles til delelementer (210) i underrammen (310) på en sådan måde, at de er anbragt med indbyrdes afstand i frekvens på en forudbestemt måde.

12. Planlægningsknode ifølge et af kravene 9-11, hvor den første og anden kanal er styrekanaler.
- 5 13. Planlægningsknode ifølge et af kravene 9-12, som anvender planlægningen til en downlink-underramme (310).
14. Planlægningsknode ifølge et af kravene 9-13, som anvendes i et E-UTRAN-system, Long Term Evolution.
- 10 15. Planlægningsknode ifølge krav 14, som anvendes i en eNodeB i et E-UTRAN-system.
- 15 16. Planlægningsknode ifølge krav 14 eller 15, hvor delementerne er mini-CCEs, Control Channel Elements, dvs. grupper på fire E-UTRAN-ressourceelementer (210).
17. Planlægningsknode ifølge et af kravene 12-16, hvor styrekanalerne er PCFICH- og PHICH-kanalerne, dvs. Physical Control Format Indicator Channel og Physical Hybrid ARQ Indicator Channel.



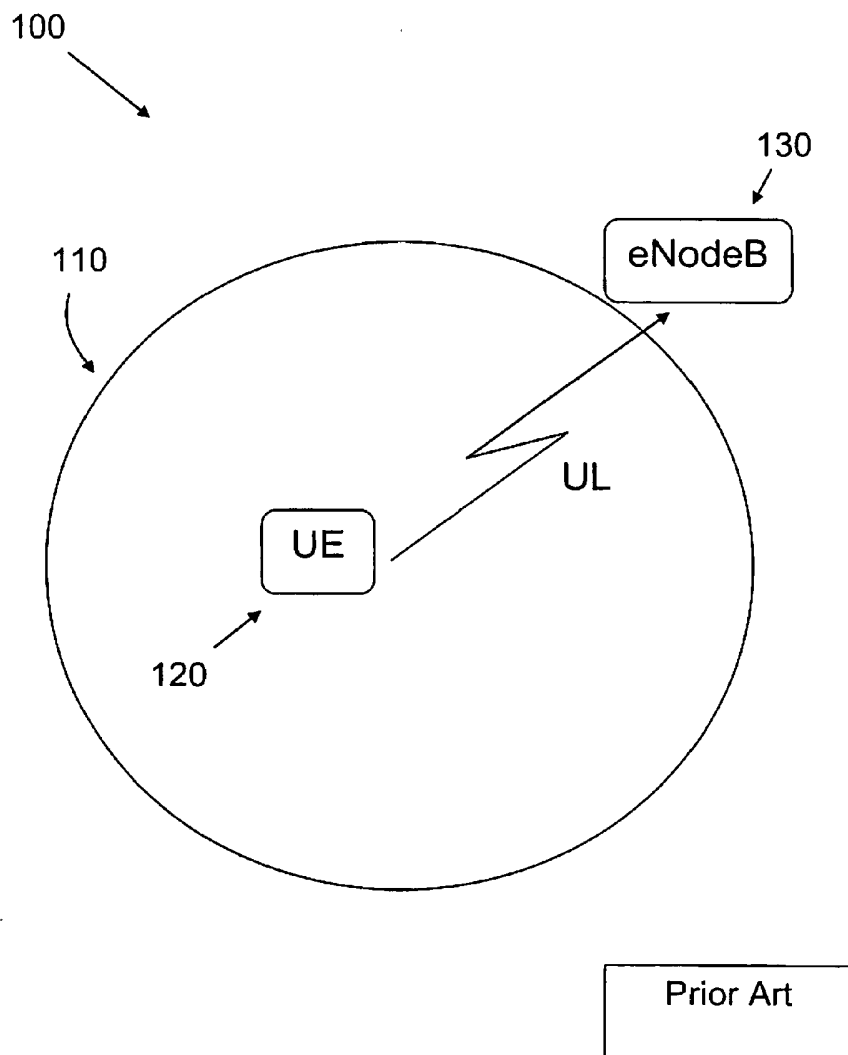


Fig 1

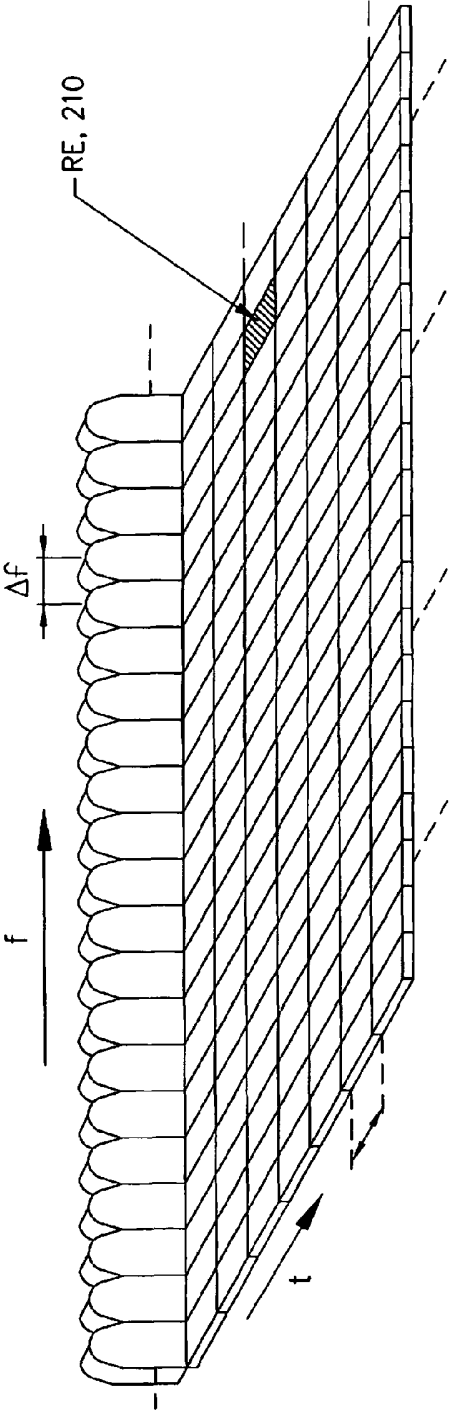

Prior Art

FIG. 2

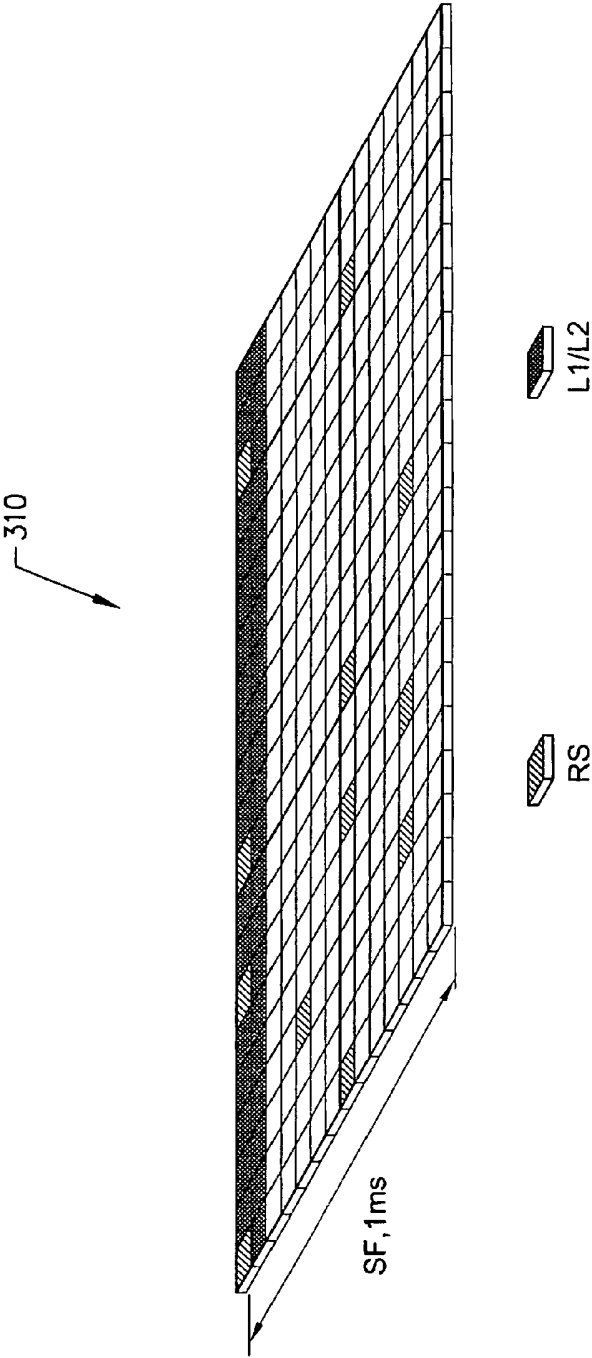

Prior Art

FIG. 3

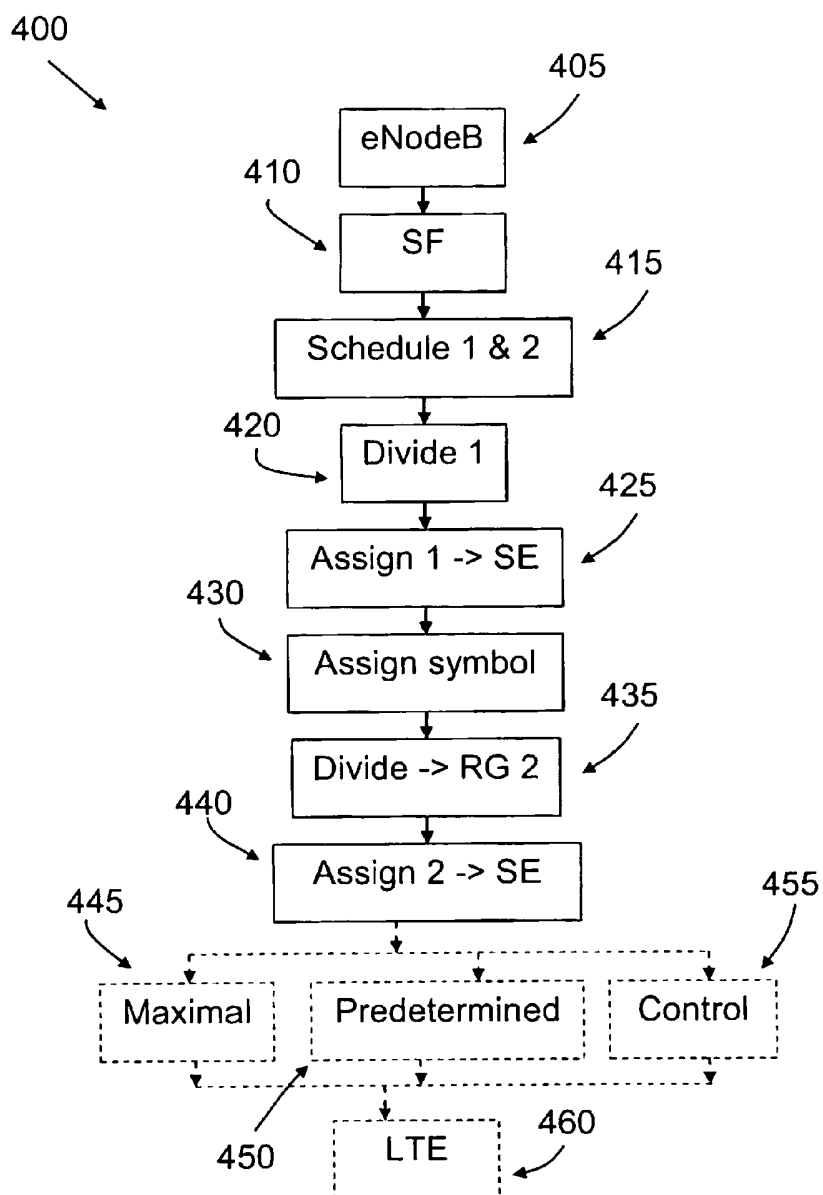


Fig 4

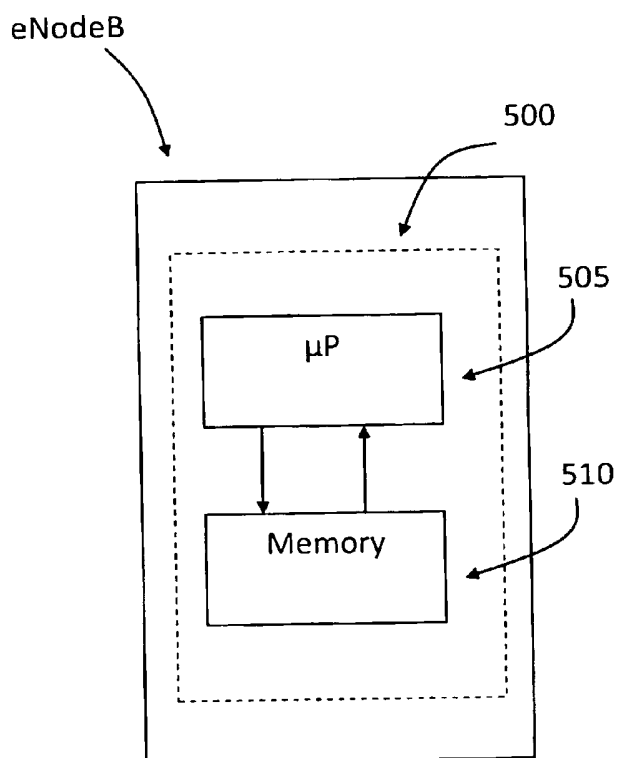


Fig 5