

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2002316546 B2**

(54) Title
Lossless intraframe encoding using golomb-rice

(51) International Patent Classification(s)
H04N 7/30 (2006.01) **H04N 7/26** (2006.01)
G06T 9/00 (2006.01) **G10L 19/00** (2006.01)
H03M 7/30 (2006.01)

(21) Application No: **2002316546** (22) Date of Filing: **2002.07.02**

(87) WIPO No: **WO03/005700**

(30) Priority Data

(31) Number	(32) Date	(33) Country
09/898,284	2001.07.02	US

(43) Publication Date: **2003.01.21**

(43) Publication Journal Date: **2003.05.22**

(44) Accepted Journal Date: **2008.04.24**

(71) Applicant(s)
Qualcomm Incorporated

(72) Inventor(s)
Thyagarajan, Kadayam

(74) Agent / Attorney
Madderns, 1st Floor 64 Hindmarsh Square, Adelaide, SA, 5000

(56) Related Art
US 6125348 A
US 5291282 A
US6272180 B1
US 5650861

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
16 January 2003 (16.01.2003)


PCT

(10) International Publication Number
WO 03/005700 A3

- (51) International Patent Classification⁷: **G06K 9/36** (74) Agents: WADSWORTH, Philip, R. et al.; Qualcomm Incorporated, 5775 Morehouse Drive, San Diego, CA 92121-1714 (US).
- (21) International Application Number: PCT/US02/21157
- (22) International Filing Date: 2 July 2002 (02.07.2002) (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/898,284 2 July 2001 (02.07.2001) US
- (71) Applicant: QUALCOMM INCORPORATED [US/US]; 5775 Morhouse Drive, San Diego, CA 92121-1714 (US). (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,
- (72) Inventor: THYAGARAJAN, Kadayam; 4782 Thurston Place, San Diego, CA 92130 (US).

[Continued on next page]

(54) Title: LOSSLESS INTRAFRAME ENCODING USING GOLOMB-RICE

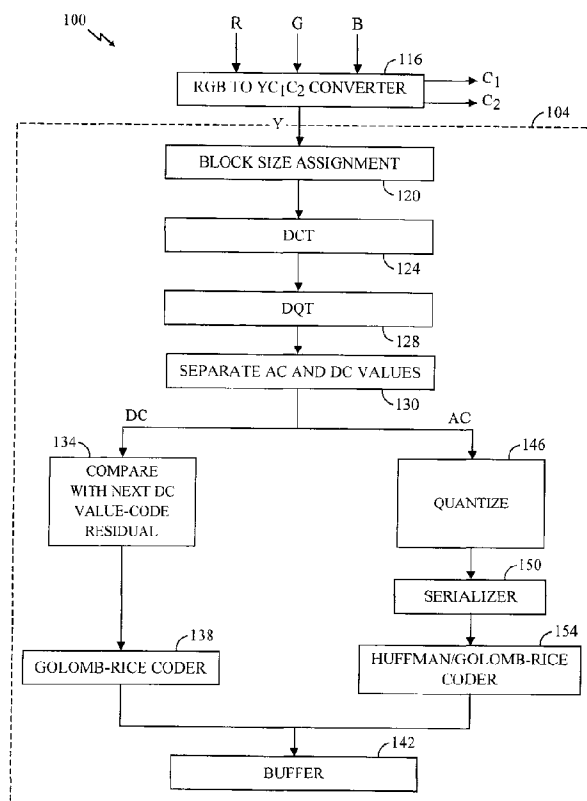

(57) Abstract: An apparatus and method of intraframe encoding of digital frequency-domain data. The data comprises a plurality of slices each having a plurality of blocks (120). Each block has a DC component and a plurality of AC components (130). A first DC component value of each slice is encoded. Each subsequent DC component value of each slice is represented as the difference between it and the DC component value proceeding it. For lossless encoding, the initial DC component value of each slice and the differences are encoding using Golomb-Rice (138).

WO 03/005700 A3



TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report:
24 April 2003

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

LOSSLESS INTRAFRAME ENCODING USING GOLOMB-RICE**BACKGROUND OF THE INVENTION****I. Field of the Invention**

[0001] The present invention relates to image processing and compression. More specifically, the present invention relates lossless coding of DC coefficients in the frequency domain using Golomb-Rice.

II. Description of the Related Art

[0002] Digital picture processing has a prominent position in the general discipline of digital signal processing. The importance of human visual perception has encouraged tremendous interest and advances in the art and science of digital picture processing. In the field of transmission and reception of video signals, such as those used for projecting films or movies, various improvements are being made to image compression techniques. Many of the current and proposed video systems make use of digital encoding techniques. Aspects of this field include image coding, image restoration, and image feature selection. Image coding represents the attempts to transmit pictures of digital communication channels in an efficient manner, making use of as few bits as possible to minimize the band width required, while at the same time, maintaining distortions within certain limits. Image restoration represents efforts to recover the true image of the object. The coded image being transmitted over a communication channel may have been distorted by various factors. Source of degradation may have arisen originally in creating the image from the object. Feature selection refers to the selection of certain attributes of the picture. Such attributes may be required in the recognition, classification, and decision in a wider context.

[0003] Digital encoding of video, such as that in digital cinema, is an area that benefits from improved image compression techniques. Digital image compression may be generally classified into two categories: loss-less and lossy methods. A loss-less image is recovered without any loss of information. A lossy method involves an irrecoverable

loss of some information, depending upon the compression ratio, the quality of the compression algorithm, and the implementation of the algorithm. Generally, lossy compression approaches are considered to obtain the compression ratios desired for a cost-effective digital cinema approach. To achieve digital cinema quality levels, the compression approach should provide a visually loss-less level of performance. As such, although there is a mathematical loss of information as a result of the compression process, the image distortion caused by this loss should be imperceptible to a viewer under normal viewing conditions.

[0004] Existing digital image compression technologies have been developed for other applications, namely for television systems. Such technologies have made design compromises appropriate for the intended application, but do not meet the quality requirements needed for cinema presentation.

[0005] Digital cinema compression technology should provide the visual quality that a moviegoer has previously experienced. Ideally, the visual quality of digital cinema should attempt to exceed that of a high-quality release print film. At the same time, the compression technique should have high coding efficiency to be practical. As defined herein, coding efficiency refers to the bit rate needed for the compressed image quality to meet a certain qualitative level. Moreover, the system and coding technique should have built-in flexibility to accommodate different formats and should be cost effective; that is, a small-sized and efficient decoder or encoder process.

[0006] Many compression techniques available offer significant levels of compression, but result in a degradation of the quality of the video signal. Typically, techniques for transferring compressed information require the compressed information to be transferred at a constant bit rate.

[0007] One compression technique capable of offering significant levels of compression while preserving the desired level of quality for video signals utilizes adaptively sized blocks and sub-blocks of encoded Discrete Cosine Transform (DCT) coefficient data. This technique will hereinafter be referred to as the Adaptive Block Size Discrete Cosine Transform (ABSDCT) method. This technique is disclosed in U. S. Patent No. 5,021,891, entitled "*Adaptive Block Size Image Compression Method And System*," assigned to the assignee of the present invention and incorporated herein by reference. DCT techniques are also disclosed in U. S. Patent No. 5,107,345, entitled "*Adaptive Block Size Image Compression Method And System*," assigned to the assignee of the

present invention and incorporated herein by reference. Further, the use of the ABSDCT technique in combination with a Differential Quadtree Transform technique is discussed in U. S. Patent No. 5,452,104, entitled "*Adaptive Block Size Image Compression Method And System*," also assigned to the assignee of the present invention and incorporated herein by reference. The systems disclosed in these patents utilize what is referred to as "intra-frame" encoding, where each frame of image data is encoded without regard to the content of any other frame. Using the ABSDCT technique, the achievable data rate may be reduced from around 1.5 billion bits per second to approximately 50 million bits per second without discernible degradation of the image quality.

[0008] The ABSDCT technique may be used to compress either a black and white or a color image or signal representing the image. The color input signal may be in a YIQ format, with Y being the luminance, or brightness, sample, and I and Q being the chrominance, or color, samples for each 4:4:4 or alternate format.. Other known formats such as the YUV, YC_bC_r or RGB formats may also be used. Because of the low spatial sensitivity of the eye to color, most research has shown that a sub-sample of the color components by a factor of four in the horizontal and vertical directions is reasonable. Accordingly, a video signal may be represented by four luminance components and two chrominance components.

[0009] Using ABSDCT, a video signal will generally be segmented into blocks of pixels for processing. For each block, the luminance and chrominance components are passed to a block interleaver. For example, a 16x16 (pixel) block may be presented to the block interleaver, which orders or organizes the image samples within each 16x16 block to produce blocks and composite sub-blocks of data for discrete cosine transform (DCT) analysis. The DCT operator is one method of converting a time and spatial sampled signal to a frequency representation of the same signal. By converting to a frequency representation, the DCT techniques have been shown to allow for very high levels of compression, as quantizers can be designed to take advantage of the frequency distribution characteristics of an image. In a preferred embodiment, one 16x16 DCT is applied to a first ordering, four 8x8 DCTs are applied to a second ordering, 16 4x4 DCTs are applied to a third ordering, and 64 2x2 DCTs are applied to a fourth ordering.

[0010] The DCT operation reduces the spatial redundancy inherent in the video source. After the DCT is performed, most of the video signal energy tends to be concentrated in a

few DCT coefficients. An additional transform, the Differential Quad-Tree Transform (DQT), may be used to reduce the redundancy among the DCT coefficients.

For the 16.times.16 block and each sub-block, the DCT coefficient values and the DQT value (if the DQT is used) are analyzed to determine the number of bits required to encode the block or sub-block. Then, the block or the combination of sub-blocks that requires the least number of bits to encode is chosen to represent the image segment. For example, two 8.times.8 sub-blocks, six 4.times.4 sub-blocks, and eight 2.times.2 sub-blocks may be chosen to represent the image segment.

The chosen block or combination of sub-blocks is then properly arranged in order into a 16.times.16 block. The DCT/DQT coefficient values may then undergo frequency weighting, quantization, and coding (such as variable length coding) in preparation for transmission. Although the ABSDCT technique described above performs remarkably well, it is computationally intensive.

Further, although use of the ABSDCT is visually lossless, it is sometimes desirable to recover data in the exact manner in which it was encoded. For example, mastering and archival purposes require to compress data in such a way as to be able to recover it exactly in its native domain.

SUMMARY OF THE INVENTION

According to a first aspect of the present invention, there is provided a method of lossless, intraframe encoding of digital frequency-domain data, the data including a plurality of slices each having a plurality of blocks, each block having a DC component and a plurality of AC components, the method including:

- receiving a first DC component value of a first slice;
- encoding the first DC component value of the first slice;
- receiving a second DC component value of the first slice;
- encoding the second DC component value of the first slice as a residual value,

where the residual value is a function of the difference between the first DC component value of the first slice and the second DC component value of the first slice and the sign of the difference between the first DC component value of the first slice and the second DC component value of the first slice.

According to a second aspect of the present invention, there is provided in a digital cinema system, a method of compressing a digital image, the image including pixel data, the pixel data separated into color components, the method including the acts of:

- reading groups of a color component of pixel data, each group comprising a DC value and a plurality of AC values;

- generating a block size assignment to divide the group of a color component of pixel into sub-blocks of pixel data;

- transforming the sub-blocks of pixel data into corresponding DC and AC frequency domain representations;

- scaling the AC frequency domain representations into an AC stream of data, wherein the act of scaling is based on a quality metric correlating with the quality of the image;

- serializing the AC stream of data;

- run-length coding the AC serialized data using an exponential distribution;
- encoding the first DC frequency domain representation; and

- encoding the second DC frequency domain representation as a residual value, where the residual value is the difference between the second DC frequency domain representation and the first DC frequency domain representation.

According to a third aspect of the present invention, an apparatus for lossless, intraframe encoding of digital frequency-domain data, the data including a plurality of slices each having a plurality of blocks, each block having a DC component and a plurality of AC components, the apparatus including:

- means for receiving a first DC component value of a first slice;

- means for encoding the first DC component value of the first slice;

- means for receiving a second DC component value of the first slice;

means for encoding the second DC component value of the first slice as a residual value, where the residual value is a function of the difference between the first DC component value of the first slice and the second DC component value of the first slice and the sign of the difference between the first DC component value of the first slice and the second DC component value of the first slice.

According to a fourth aspect of the present invention, In a digital cinema system, an apparatus for compressing a digital image, the image including pixel data, the pixel data separated into color components, the method including the acts of:

means for reading groups of a color component of pixel data, each group comprising a DC value and a plurality of AC values;

means for generating a block size assignment to divide the group of a color component of pixel into sub-blocks of pixel data;

means for transforming the sub-blocks of pixel data into corresponding DC and AC frequency domain representations;

means for scaling the AC frequency domain representations into an AC stream of data, wherein the act of scaling is based on a quality metric correlating with the quality of the image;

means for serializing the AC stream of data;

means for run-length coding the AC serialized data using an exponential distribution;

means for encoding the first DC frequency domain representation; and

means for encoding the second DC frequency domain representation as a residual value, where the residual value is the difference between the second DC frequency domain representation and the first DC frequency domain representation.

According to a fifth aspect of the present invention, an apparatus for lossless, intraframe encoding of digital frequency-domain data, the data comprising a plurality of blocks, each block having a DC component and a plurality of AC components, the apparatus including:

a receiver configured to receive successive DC component values for

successive slices; and

an encoder configured to encode the first DC component value of each slice and to encode successive DC component values as residual values, where each residual value is a function of the difference between the current DC component value of the first slice and the second DC component value of the first slice and the sign of the difference between the first DC component value of the first slice and the slice and the second DC component value of the first slice.

BRIEF DESCRIPTION OF THE DRAWINGS

- [0022] The features and advantages of the present invention will become more apparent from the detailed description set forth below when taken in conjunction with the drawings in which like reference characters identify correspondingly throughout and wherein:
- [0023] FIG. 1 is a block diagram of an encoder portion of an image compression and processing system;
- [0024] FIG. 2 is a block diagram of a decoder portion of an image compression and processing system;
- [0025] FIG. 3 is a flow diagram illustrating the processing steps involved in variance based block size assignment;
- [0026] FIG. 4a illustrates an exponential distribution of the Y component of zero run-lengths in a DCT coefficient matrix;
- [0027] FIG. 4b illustrates an exponential distribution of the C_b component of zero run-lengths in a DCT coefficient matrix;
- [0028] FIG. 4c illustrates an exponential distribution of the C_r component of zero run-lengths in a DCT coefficient matrix;
- [0029] FIG. 5a illustrates an exponential distribution of the Y component of amplitude size in a DCT coefficient matrix;
- [0030] FIG. 5b illustrates an exponential distribution of the C_b component of amplitude size in a DCT coefficient matrix;
- [0031] FIG. 5c illustrates an exponential distribution of the C_r component of amplitude size in a DCT coefficient matrix;
- [0032] FIG. 6 illustrates a Golomb-Rice encoding process;
- [0033] FIG. 7 illustrates an apparatus for Golomb-Rice encoding; and
- [0034] FIG. 8 illustrates a process of encoding DC component values.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0035] In order to facilitate digital transmission of digital signals and enjoy the corresponding benefits, it is generally necessary to employ some form of signal compression. To achieve high compression in a resulting image, it is also important that high quality of the image be maintained. Furthermore, computational efficiency is desired for compact hardware implementation, which is important in many applications.

[0036] Before one embodiment of the invention is explained in detail, it is to be understood that the invention is not limited in its application to the details of the construction and the arrangement of the components set forth in the following description or illustrated in the drawings. The invention is capable of other embodiments and are carried out in various ways. Also, it is understood that the phraseology and terminology used herein is for purpose of description and should not be regarded as limiting.

[0037] Image compression employed in an aspect of an embodiment is based on discrete cosine transform (DCT) techniques, such as that disclosed in co-pending U.S. Patent Application "*Contrast Sensitive Variance Based Adaptive Block Size DCT Image Compression*", Serial No. 09/436,085 filed on November 8, 1999, assigned to the assignee of the present application and incorporated herein by reference. Image Compression and Decompression systems utilizing the DCT are described in co-pending U.S. Patent Application "*Quality Based Image Compression*", Serial No. 09/494,192, filed on January, 28, 2000, assigned to the assignee of the present application and incorporated herein by reference. Generally, an image to be processed in the digital domain is composed of pixel data divided into an array of non-overlapping blocks, $N \times N$ in size. A two-dimensional DCT may be performed on each block. The two-dimensional DCT is defined by the following relationship:

$$X(k,l) = \frac{\alpha(k)\beta(l)}{\sqrt{N} * M} \sum_{m=0}^{N-1} \sum_{n=0}^{N-1} x(m,n) \cos\left[\frac{(2m+1)\pi k}{2N}\right] \cos\left[\frac{(2n+1)\pi l}{2N}\right], 0 \leq k, l \leq N-1$$

where $\alpha(k), \beta(k) = \begin{cases} 1, & \text{if } k = 0 \\ \sqrt{2}, & \text{if } k \neq 0 \end{cases}$, and

$x(m,n)$ is the pixel at location (m,n) within an $N \times M$ block, and

$X(k,l)$ is the corresponding DCT coefficient.

[0038] Since pixel values are non-negative, the DCT component $X(0,0)$ is always positive and usually has the most energy. In fact, for typical images, most of the transform energy is concentrated around the component $X(0,0)$. This energy compaction property is what makes the DCT technique such an attractive compression method.

[0039] The image compression technique utilizes contrast adaptive coding to achieve further bit rate reduction. It has been observed that most natural images are made up of relatively slow varying flat areas, and busy areas such as object boundaries and high-contrast texture. Contrast adaptive coding schemes take advantage of this factor by assigning more bits to the busy areas and less bits to the less busy areas.

[0040] Contrast adaptive methods utilize intraframe coding (spatial processing) instead of interframe coding (spatio-temporal processing). Interframe coding inherently requires multiple frame buffers in addition to more complex processing circuits. In many applications, reduced complexity is needed for actual implementation. Intraframe coding is also useful in a situation that can make a spatio-temporal coding scheme break down and perform poorly. For example, 24 frame per second movies can fall into this category since the integration time, due to the mechanical shutter, is relatively short. The short integration time allows a higher degree of temporal aliasing. The assumption of frame to frame correlation breaks down for rapid motion as it becomes jerky. Intraframe coding is also easier to standardize when both 50 Hz and 60 Hz power line frequencies are involved. Television currently transmits signals at either 50 Hz or 60 Hz. The use of an intraframe scheme, being a digital approach, can adapt to both 50 Hz and 60 Hz operation, or even to 24 frame per second movies by trading off frame rate versus spatial resolution.

[0041] For image processing purposes, the DCT operation is performed on pixel data that is divided into an array of non-overlapping blocks. Note that although block sizes are discussed herein as being $N \times N$ in size, it is envisioned that various block sizes may be used. For example, a $N \times M$ block size may be utilized where both N and M are integers with M being either greater than or less than N . Another important aspect is that the block is divisible into at least one level of sub-blocks, such as $N/i \times N/j$, $N/i \times M/j$, and etc. where i and j are integers. Furthermore, the exemplary block size as discussed herein is a 16×16 pixel block with corresponding block and sub-blocks of DCT

coefficients. It is further envisioned that various other integers such as both even or odd integer values may be used, e.g. 9x9.

[0042] FIGs. 1 and 2 illustrate an image processing system **100** incorporating the concept of configurable serializer. The image processing system **100** comprises an encoder **104** that compresses a received video signal. The compressed signal is transmitted using a transmission channel or a physical medium **108**, and received by a decoder **112**. The decoder **112** decodes the received encoded data into image samples, which may then be exhibited.

[0043] In general, an image is divided into blocks of pixels for processing. A color signal may be converted from RGB space to YC_1C_2 space using a RGB to YC_1C_2 converter **116**, where Y is the luminance, or brightness, component, and C_1 and C_2 are the chrominance, or color, components. Because of the low spatial sensitivity of the eye to color, many systems sub-sample the C_1 and C_2 components by a factor of four in the horizontal and vertical directions. However, the sub-sampling is not necessary. A full resolution image, known as 4:4:4 format, may be either very useful or necessary in some applications such as those referred to as covering "digital cinema." Two possible YC_1C_2 representations are, the YIQ representation and the YUV representation, both of which are well known in the art. It is also possible to employ a variation of the YUV representation known as YCbCr. This may be further broken into odd and even components. Accordingly, in an embodiment the representation Y-even, Y-odd, Cb-even, Cb-odd, Cr-even, Cr-odd is used.

[0044] In a preferred embodiment, each of the even and odd Y, Cb, and Cr components is processed without sub-sampling. Thus, an input of each of the six components of a 16x16 block of pixels is provided to the encoder **104**. For illustration purposes, the encoder **104** for the Y-even component is illustrated. Similar encoders are used for the Y-odd component, and even and odd Cb and Cr components. The encoder **104** comprises a block size assignment element **120**, which performs block size assignment in preparation for video compression. The block size assignment element **120** determines the block decomposition of the 16x16 block based on the perceptual characteristics of the image in the block. Block size assignment subdivides each 16x16 block into smaller blocks, such as 8x8, 4x4, and 2x2, in a quad-tree fashion depending on the activity within a 16x16 block. The block size assignment element **120** generates a quad-tree data, called the PQR data, whose length can be between 1 and 21 bits. Thus, if block size assignment

determines that a 16x16 block is to be divided, the R bit of the PQR data is set and is followed by four additional bits of Q data corresponding to the four divided 8x8 blocks. If block size assignment determines that any of the 8x8 blocks is to be subdivided, then four additional bits of P data for each 8x8 block subdivided are added.

[0045] Referring now to FIG. 3, a flow diagram showing details of the operation of the block size assignment element 120 is provided. The variance of a block is used as a metric in the decision to subdivide a block. Beginning at step 202, a 16x16 block of pixels is read. At step 204, the variance, $v16$, of the 16x16 block is computed. The variance is computed as follows:

$$\text{var} = \frac{1}{N^2} \sum_{i=0}^{N-1} \sum_{j=0}^{N-1} x_{i,j}^2 - \left(\frac{1}{N^2} \sum_{i=0}^{N-1} \sum_{j=0}^{N-1} x_{i,j} \right)^2$$

where $N=16$, and $x_{i,j}$ is the pixel in the i^{th} row, j^{th} column within the $N \times N$ block. At step 206, first the variance threshold $T16$ is modified to provide a new threshold $T'16$ if the mean value of the block is between two predetermined values, then the block variance is compared against the new threshold, $T'16$.

[0046] If the variance $v16$ is not greater than the threshold $T16$, then at step 208, the starting address of the 16x16 block is written into temporary storage, and the R bit of the PQR data is set to 0 to indicate that the 16x16 block is not subdivided. The algorithm then reads the next 16x16 block of pixels. If the variance $v16$ is greater than the threshold $T16$, then at step 210, the R bit of the PQR data is set to 1 to indicate that the 16x16 block is to be subdivided into four 8x8 blocks.

[0047] The four 8x8 blocks, $i=1:4$, are considered sequentially for further subdivision, as shown in step 212. For each 8x8 block, the variance, $v8_i$, is computed, at step 214. At step 216, first the variance threshold $T8$ is modified to provide a new threshold $T'8$ if the mean value of the block is between two predetermined values, then the block variance is compared to this new threshold.

[0048] If the variance $v8_i$ is not greater than the threshold $T8$, then at step 218, the starting address of the 8x8 block is written into temporary storage, and the corresponding Q bit, Q_i , is set to 0. The next 8x8 block is then processed. If the variance $v8_i$ is greater

than the threshold $T8$, then at step **220**, the corresponding Q bit, Q_i , is set to 1 to indicate that the 8x8 block is to be subdivided into four 4x4 blocks.

[0049] The four 4x4 blocks, $j_i=1:4$, are considered sequentially for further subdivision, as shown in step **222**. For each 4x4 block, the variance, $v4_{ij}$, is computed, at step **224**. At step **226**, first the variance threshold $T4$ is modified to provide a new threshold $T'4$ if the mean value of the block is between two predetermined values, then the block variance is compared to this new threshold.

[0050] If the variance $v4_{ij}$ is not greater than the threshold $T4$, then at step **228**, the address of the 4x4 block is written, and the corresponding P bit, P_{ij} , is set to 0. The next 4x4 block is then processed. If the variance $v4_{ij}$ is greater than the threshold $T4$, then at step **230**, the corresponding P bit, P_{ij} , is set to 1 to indicate that the 4x4 block is to be subdivided into four 2x2 blocks. In addition, the address of the 4 2x2 blocks are written into temporary storage.

[0051] The thresholds $T16$, $T8$, and $T4$ may be predetermined constants. This is known as the hard decision. Alternatively, an adaptive or soft decision may be implemented. For example, the soft decision varies the thresholds for the variances depending on the mean pixel value of the $2N \times 2N$ blocks, where N can be 8, 4, or 2. Thus, functions of the mean pixel values, may be used as the thresholds.

[0052] For purposes of illustration, consider the following example. Let the predetermined variance thresholds for the Y component be 50, 1100, and 880 for the 16x16, 8x8, and 4x4 blocks, respectively. In other words, $T16 = 50$, $T8 = 1100$, and $T4 = 880$. Let the range of mean values be 80 and 100. Suppose the computed variance for the 16x16 block is 60. Since 60 is greater than $T16$, and the mean value 90 is between 80 and 100, the 16x16 block is subdivided into four 8x8 sub-blocks. Suppose the computed variances for the 8x8 blocks are 1180, 935, 980, and 1210. Since two of the 8x8 blocks have variances that exceed $T8$, these two blocks are further subdivided to produce a total of eight 4x4 sub-blocks. Finally, suppose the variances of the eight 4x4 blocks are 620, 630, 670, 610, 590, 525, 930, and 690, with corresponding means values 90, 120, 110, 115. Since the mean value of the first 4x4 block falls in the range (80, 100), its threshold will be lowered to $T'4=200$ which is less than 880. So, this 4x4 block will be subdivided as well as the seventh 4x4 block.

- [0053] Note that a similar procedure is used to assign block sizes for the luminance component Y-odd and the color components, $C_{b\text{-even}}$, $C_{b\text{-odd}}$, $C_{r\text{-even}}$ and $C_{r\text{-odd}}$. The color components may be decimated horizontally, vertically, or both.
- [0054] Additionally, note that although block size assignment has been described as a top down approach, in which the largest block (16x16 in the present example) is evaluated first, a bottom up approach may instead be used. The bottom up approach will evaluate the smallest blocks (2x2 in the present example) first.
- [0055] Referring back to FIG. 1, the PQR data, along with the addresses of the selected blocks, are provided to a DCT element 124. The DCT element 124 uses the PQR data to perform discrete cosine transforms of the appropriate sizes on the selected blocks. Only the selected blocks need to undergo DCT processing.
- [0056] The image processing system 100 also comprises DQT element 128 for reducing the redundancy among the DC coefficients of the DCTs. A DC coefficient is encountered at the top left corner of each DCT block. The DC coefficients are, in general, large compared to the AC coefficients. The discrepancy in sizes makes it difficult to design an efficient variable length coder. Accordingly, it is advantageous to reduce the redundancy among the DC coefficients.
- [0057] The DQT element 128 performs 2-D DCTs on the DC coefficients, taken 2x2 at a time. Starting with 2x2 blocks within 4x4 blocks, a 2-D DCT is performed on the four DC coefficients. This 2x2 DCT is called the differential quad-tree transform, or DQT, of the four DC coefficients. Next, the DC coefficient of the DQT along with the three neighboring DC coefficients within an 8x8 block are used to compute the next level DQT. Finally, the DC coefficients of the four 8x8 blocks within a 16x16 block are used to compute the DQT. Thus, in a 16x16 block, there is one true DC coefficient and the rest are AC coefficients corresponding to the DCT and DQT.
- [0058] The transform coefficients (both DCT and DQT) are provided to a quantizer for quantization. In a preferred embodiment, the DCT coefficients are quantized using frequency weighting masks (FWMs) and a quantization scale factor. A FWM is a table of frequency weights of the same dimensions as the block of input DCT coefficients. The frequency weights apply different weights to the different DCT coefficients. The weights are designed to emphasize the input samples having frequency content that the human visual or optical system is more sensitive to, and to de-emphasize samples having

frequency content that the visual or optical system is less sensitive to. The weights may also be designed based on factors such as viewing distances, etc.

[0059] The weights are selected based on empirical data. A method for designing the weighting masks for 8x8 DCT coefficients is disclosed in ISO/IEC JTC1 CD 10918, "Digital compression and encoding of continuous-tone still images - part 1: Requirements and guidelines," International Standards Organization, 1994, which is incorporated herein by reference. In general, two FWMs are designed, one for the luminance component and one for the chrominance components. The FWM tables for block sizes 2x2, 4x4 are obtained by decimation and 16x16 by interpolation of that for the 8x8 block. The scale factor controls the quality and bit rate of the quantized coefficients.

[0060] Thus, each DCT coefficient is quantized according to the relationship:

$$DCT_q(i, j) = \left\lfloor \frac{8 * DCT(i, j)}{fwm(i, j) * q} \pm \frac{1}{2} \right\rfloor$$

where DCT(i,j) is the input DCT coefficient, fwm(i,j) is the frequency weighting mask, q is the scale factor, and DCT_q(i,j) is the quantized coefficient. Note that depending on the sign of the DCT coefficient, the first term inside the braces is rounded up or down. The DQT coefficients are also quantized using a suitable weighting mask. However, multiple tables or masks can be used, and applied to each of the Y, Cb, and Cr components.

[0061] AC values are then separated **130** from DC values and processed separately. For DC elements, a first DC component value of each slice is encoded. Each subsequent DC component value of each slice is then represented as the difference between it and the DC component value preceeding it, and encoded **134**. For lossless encoding, the initial DC component value of each slice and the differences are encoding **138** using Golomb-Rice, as described with respect to FIGs. **6** and **8**. Use of Golomb-Rice encoding for the differences between successive DC component values is advantageous in that the differentials of the DC component values tend to have a two-sided exponential distribution. The data may then be temporarily stored using a buffer **142**, and then transferred or transmitted to the decoder **112** through the transmission channel **108**.

[0062] FIG. **8** illustrates a process of encoding DC component values. The process is equally applicable for still image, video image (such as, but not limited to, motion

pictures or high-definition television) and audio. For a given slice of data **804**, a first DC component value of the slice is retrieved **808**. The first DC component value is then coded **812**. Unlike AC component values, the DC component values need not be quantized. In an embodiment, a single DC value for a 16x16 block is used regardless of the block size assignment breakdown. It is contemplated that any fixed sized block, such as 8x8 or 4x4, or any variable block size as defined by the block size assignment, may be used. The second, or next, DC component value of a given slice is then retrieved **816**. The second DC component value is then compared with the first DC component value, and the difference, or residual, is encoded **820**. Thus, the second DC component value need only be represented as the difference between it and the first value. This process is repeated for each DC component value of a slice. Thus, an inquiry **824** is made as to whether the end of the slice (last block and therefore last DC value) is reached. If not **828**, the next DC value of the slice is retrieved **816**, and the process repeats. If so **832**, the next slice is retrieved **804**, and the process repeats until all of the slices of a frame, and all of the frames of the file are processed.

[0063] An objective of lossless encoding of DC component values is to generate residueal values that tend to have a low variance. In using DCTs, the DC coefficient component value contributes the maximum pixel energy. Therefore, by not quantizing the DC component values, the variance of the residuals is reduced.

[0064] For AC elements, the block of data and frequency weighting masks are then scaled by a quantizer **146**, or a scale factor element. Quantization of the DCT coefficients reduces a large number of them to zero which results in compression. In a preferred embodiment, there are 32 scale factors corresponding to average bit rates. Unlike other compression methods such as MPEG2, the average bit rate is controlled based on the quality of the processed image, instead of target bit rate and buffer status.

[0065] To increase compression further, the quantized coefficients are provided to a scan serializer **150**. The serializer **150** scans the blocks of quantized coefficients to produce a serialized stream of quantized coefficients. Zig-zag scans, column scanning, or row scanning may be employed. A number of different zigzag scanning patterns, as well as patterns other than zigzag may also be chosen. A preferred technique employs 8x8 block sizes for the zigzag scanning. A zigzag scanning of the quantized coefficients improves the chances of encountering a large run of zero values. This zero run inherently has a decreasing probability, and may be efficiently encoded using Huffman codes.

[0066] The stream of serialized, quantized AC coefficients is provided to a variable length coder 154. The AC component values may be encoded either using Huffman encoding or Golomb-Rice encoding. For DC component values, Golomb-Rice encoding is utilized. A run-length coder separates the coefficients between the zero from the non-zero coefficients, and is described in detail with respect to FIG. 6. In an embodiment, Golomb-Rice coding is utilized. Golomb-Rice encoding is efficient in coding non-negative integers with an exponential distribution. Using Golomb codes is more optimal for compression in providing shorter length codes for exponentially distributed variables.

[0067] In Golomb encoding run-lengths, Golomb codes are parameterized by a non-negative integer m . For example, given a parameter m , the Golomb coding of a positive integer n is represented by the quotient of n/m in unary code followed by the remainder represented by a modified binary code, which is $\lfloor \log_2 m \rfloor$ bits long if the remainder is less than $2^{\lfloor \log_2 m \rfloor} - m$, otherwise, $\lfloor \log_2 m \rfloor$ bits long. Golomb-Rice coding is a special case of Golomb coding where the parameter m is expressed as $m = 2^k$. In such a case the quotient of n/m is obtained by shifting the binary representation of the integer n to the right by k bits, and the remainder of n/m is expressed by the least k bits of n . Thus, the Golomb-Rice code is the concatenation of the two. Golomb-Rice coding can be used to encode both positive and negative integers with a two-sided geometric (exponential) distribution as given by

$$p_{\alpha}(x) = c\alpha^{|x|} \quad (1)$$

[0068] In (1), α is a parameter that characterizes the decay of the probability of x , and c is a normalization constant. Since $p_{\alpha}(x)$ is monotonic, it can be seen that a sequence of integer values should satisfy

$$p_{\alpha}(x_i = 0) \geq p_{\alpha}(x_i = -1) \geq p_{\alpha}(x_i = +1) \geq p_{\alpha}(x_i = -2) \geq \dots \quad (2)$$

[0069] As illustrated in FIGS. 4a, 4b, 4c and 5a, 5b, 5c, both the zero-runs and amplitudes in a quantized DCT coefficient matrix have exponential distributions. The distributions illustrated in these figures are based on data from real images. FIG. 4a illustrates the Y component distribution 400 of zero run-lengths versus relative frequency. Similarly, FIGs. 4b and 4c illustrates the Cb and Cr component distribution,

of zero run-lengths versus relative frequency **410** and **420**, respectively. FIG. **5a** illustrates the Y component distribution **500** of amplitude size versus relative frequency. Similarly, FIGs. **5b** and **5c** illustrates the Cb and Cr component distribution of amplitude size versus relative frequency, **510** and **520**, respectively. Note that in FIGs. **5a**, **5b**, and **5c** the plots represent the distribution of the size of the DCT coefficients. Each size represents a range of coefficient values. For example, a size value of four has the range $\{-15, -14, \dots, -8, 8, \dots, 14, 15\}$, a total of 16 values. Similarly, a size value of ten has the range $\{-1023, -1022, \dots, -512, 512, \dots, 1022, 1023\}$, a total of 1024 values. It is seen from FIGs. **4a**, **4b**, **4c**, **5a**, **5b** and **5c** that both run-lengths and amplitude size have exponential distributions. The actual distribution of the amplitudes can be shown to fit the following equation (3):

$$p(X_{k,l}) = \frac{\sqrt{2\lambda}}{2} \exp\{-\sqrt{2\lambda}|X_{k,l}|\}, k, l \neq 0 \quad (3)$$

In (3), $X_{k,l}$ represents the DCT coefficient corresponding to frequency k and l in the vertical and horizontal dimensions, respectively, and the mean $\mu_x = \frac{1}{\sqrt{2\lambda}}$, variance $\sigma^2_x = \frac{1}{2\lambda}$. Accordingly, the use of Golomb-Rice coding in the manner described is more optimal in processing data in DCTs.

[0070] Although the following is described with respect to compression of image data, the embodiments are equally applicable to embodiments compressing audio data. In compressing image data, the image or video signal may be, for example, either in RGB, or YIQ, or YUV, or Y Cb Cr components with linear or log encoded pixel values.

[0071] FIG. **6** illustrates the process **600** of encoding zero and non-zero coefficients. As the DCT matrix is scanned, the zero and non-zero coefficients are processed separately and separated **604**. For zero data, the length of zero run is determined **608**. Note that run-lengths are positive integers. For example, if the run-length is found to be n , then a Golomb parameter m is determined **612**. In an embodiment, the Golomb parameter is determined as a function of the run length. In another embodiment, the Golomb parameter (m) is determined by the following equation (4)

17

$$m = \lceil \log_2 n \rceil \quad (4)$$

[0072] Optionally, the length of run-lengths and associated Golomb parameters are counted **616** by a counter or register. To encode the run length of zeros n , a quotient is encoded **620**. In an embodiment, the quotient is determined as a function of the run length of zeros and the Golomb parameter. In another embodiment, the quotient (Q) is determined by the following equation (5):

$$Q = \lfloor n / 2^m \rfloor \quad (5)$$

In an embodiment, the quotient Q is encoded in unary code, which requires $Q+1$ bits. Next, a remainder is encoded **624**. In an embodiment, the remainder is encoded as a function of the run length and the quotient. In another embodiment, the remainder (R) is determined using the following equation (6):

$$R = n - 2^m Q \quad (6)$$

In an embodiment, the remainder R is encoded in an m -bit binary code. After, the quotient Q and the remainder R are determined, the codes for Q and R are concatenated **628** to represent an overall code for the run length of zeros n .

[0073] Nonzero coefficients are also encoded using Golomb-Rice. Since the coefficient amplitude can be positive or negative, it is necessary to use a sign bit and to encode the absolute value of a given amplitude. Given the amplitude of the non-zero coefficient being x , the amplitude may be expressed as a function of the absolute value of the amplitude and the sign. Accordingly, the amplitude may be expressed as y using the following equation (7):

$$y = \begin{cases} 2x, & \text{if } x \geq 0 \\ 2|x| - 1, & \text{otherwise} \end{cases} \quad (7)$$

[0074] Accordingly, the value of a non-zero coefficient is optionally counted by a counter, or register, **632**. It is then determined **636** if the amplitude is greater than or equal to zero. If it is, the value is encoded **640** as twice the given value. If not, the value is encoded **644** as one less than twice the absolute value. It is contemplated that other mapping schemes may also be employed. The key is that an extra bit to distinguish the sign of the value is not needed.

[0075] Encoding amplitudes as expressed by equation (7) results in that positive values of x being even integers and negative values become odd integers. Further, this mapping preserves the probability assignment of x as in (2). An advantage of encoding as

illustrated in equation (7) allows one to avoid using a sign bit to represent positive and negative numbers. After the mapping is done, y is encoded in the same manner as was done for the zero-run. The procedure is continued until all coefficients have been scanned in the current block.

[0076] It is important to recognize that although embodiments of the invention are determine values of coefficients and run lengths as a function of equations (1) – (7), the exact equations (1)-(7) need not be used. It is the exploitation of the exponential distribution of Golomb-Rice encoding and of DCT coefficients that allows for more efficient compression of image and audio data.

[0077] Since a zero-run after encoding is not distinguishable from a non-zero amplitude, it may be necessary to use a special prefix code of fixed length to mark the occurrence of the first zero-run. It is common to encounter all zeros in a block after a non-zero amplitude has been encountered. In such cases, it may be more efficient to use a code referring to end-of-block (EOB) code rather than Golomb-Rice code. The EOB code is again, optionally, a special fixed length code.

[0078] According to equation (1) or (3), the probability distribution of the amplitude or run-length in the DCT coefficient matrix is parameterized by α or λ . The implication is that the coding efficiency may be improved if the context under which a particular DCT coefficient block arises. An appropriate Golomb-Rice parameter to encode the quantity of interest may then be used. In an embodiment, counters or registers are used for each run-length and amplitude size value to compute the respective cumulative values and the corresponding number of times that such a value occurs. For example, if the register to store the cumulative value and number of elements accumulated are R_{rl} and N_{rl} , respectively, the following equation (6) may be used as the Rice-Golomb parameter to encode the run-length:

$$\left\lceil \log_2 \frac{R_{rl}}{N_{rl}} \right\rceil \quad (6)$$

A similar procedure may be used for the amplitude.

[0079] Referring back to FIG. 1, the compressed image signal generated by the encoder 104 may be temporarily stored using a buffer 142, and then transmitted to the decoder 112 using the transmission channel 108. The transmission channel 108 may be a physical medium, such as a magnetic or optical storage device, or a wire-line or wireless

conveyance process or apparatus. The PQR data, which contains the block size assignment information, is also provided to the decoder **112** (FIG. 2). The decoder **112** comprises a buffer **164** and a variable length decoder **168**, which decodes the run-length values and the non-zero values. The variable length decoder **168** operates in a similar but opposite manner as that described in FIG. 6.

[0080] The output of the variable length decoder **168** is provided to an inverse serializer **172** that orders the coefficients according to the scan scheme employed. For example, if a mixture of zig-zag scanning, vertical scanning, and horizontal scanning were used, the inverse serializer **172** would appropriately re-order the coefficients with the knowledge of the type of scanning employed. The inverse serializer **172** receives the PQR data to assist in proper ordering of the coefficients into a composite coefficient block.

[0081] The composite block is provided to an inverse quantizer **174**, for undoing the processing due to the use of the quantizer scale factor and the frequency weighting masks.

[0082] The coefficient block is then provided to an IDQT element **186**, followed by an IDCT element **190**, if the Differential Quad-tree transform had been applied. Otherwise, the coefficient block is provided directly to the IDCT element **190**. The IDQT element **186** and the IDCT element **190** inverse transform the coefficients to produce a block of pixel data. The pixel data may then have to be interpolated, converted to RGB form, and then stored for future display.

[0083] FIG. 7 illustrates an apparatus for Golomb-Rice encoding **700**. The apparatus in FIG. 7 preferably implements a process as described with respect to FIG. 6. A determiner **704** determines a run length (n) and a Golomb parameter (m). Optionally, a counter or register **708** is used for each run-length and amplitude size value to compute the respective cumulative values and the corresponding number of times that such a value occurs. An encoder **712** encodes a quotient (Q) as a function of the run length and the Golomb parameter. The encoder **712** also encodes the remainder (R) as a function of the run length, Golomb parameter, and quotient. In an alternate embodiment, encoder **712** also encodes nonzero data as a function of the non-zero data value and the sign of the non-zero data value. A concatenator **716** is used to concatenate the Q value with the R value.

[0084] As examples, the various illustrative logical blocks, flowcharts, and steps described in connection with the embodiments disclosed herein may be implemented or

performed in hardware or software with an application-specific integrated circuit (ASIC), a programmable logic device, discrete gate or transistor logic, discrete hardware components, such as, e.g., registers and FIFO, a processor executing a set of firmware instructions, any conventional programmable software and a processor, or any combination thereof. The processor may advantageously be a microprocessor, but in the alternative, the processor may be any conventional processor, controller, microcontroller, or state machine. The software could reside in RAM memory, flash memory, ROM memory, registers, hard disk, a removable disk, a CD-ROM, a DVD-ROM or any other form of storage medium known in the art.

The previous description of the preferred embodiments is provided to enable any person skilled in the art to make or use the present invention. The various modifications to these embodiments will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments without the use of the inventive faculty. Thus, the present invention is not intended to be limited to the embodiments shown herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

It will be understood that the term "comprise" and any of its derivatives (eg. comprises, comprising) as used in this specification is to be taken to be inclusive of features to which it refers, and is not meant to exclude the presence of any additional features unless otherwise stated or implied.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A method of lossless, intraframe encoding of digital frequency-domain data, the data including a plurality of slices each having a plurality of blocks, each block having a DC component and a plurality of AC components, the method including:
 - receiving a first DC component value of a first slice;
 - encoding the first DC component value of the first slice;
 - receiving a second DC component value of the first slice;
 - encoding the second DC component value of the first slice as a residual value,
 where the residual value is a function of the difference between the first DC component value of the first slice and the second DC component value of the first slice and the sign of the difference between the first DC component value of the first slice and the second DC component value of the first slice.
2. The method set forth in claim 1, wherein the digital frequency domain data is image data.
3. The method set forth in claim 1, wherein the digital frequency domain data is audio data.
4. The method set forth in claim 1, wherein the encoding of the residual value utilizes Golomb-Rice encoding.
5. The method set forth in claim 1, wherein the encoding of the residual value is determined to be a value of y , using the equation

$$y = \begin{cases} 2x, & \text{if } x \geq 0 \\ 2|x| - 1, & \text{otherwise} \end{cases}$$

where x is the amplitude of the DC component value to be encoded.

6. In a digital cinema system, a method of compressing a digital image, the image including pixel data, the pixel data separated into color components, the method including the acts of:

reading groups of a color component of pixel data, each group comprising a DC value and a plurality of AC values;

generating a block size assignment to divide the group of a color component of pixel into sub-blocks of pixel data;

transforming the sub-blocks of pixel data into corresponding DC and AC frequency domain representations;

scaling the AC frequency domain representations into an AC stream of data, wherein the act of scaling is based on a quality metric correlating with the quality of the image;

serializing the AC stream of data;

run-length coding the AC serialized data using an exponential distribution;

encoding the first DC frequency domain representation; and

encoding the second DC frequency domain representation as a residual value, where the residual value is the difference between the second DC frequency domain representation and the first DC frequency domain representation.

7. The method set forth in claim 6, wherein the act of scaling further includes the act of providing a frequency weighted mask to said sub-blocks of pixel data, such that the frequency weighting mask provides emphasis to the portions of the image that the human visual system is more sensitive, and provides less emphasis to the portions of the image that the human visual system is less sensitive.

8. The method set forth in claim 6, wherein the act of transforming performs a Discrete Cosine Transform.

9. The method set forth in claim 8, wherein the act of transforming performs a Discrete Cosine Transform followed by a Differential Quad-tree Transform.

10. The method set forth in claim 6, wherein encoding the second DC frequency

domain representation is further a function of the sign of the residual value.

11. The method set forth in claim 10, wherein the encoding of the residual value is determined to be a value of y , using the equation

$$y = \begin{cases} 2x, & \text{if } x \geq 0 \\ 2|x| - 1, & \text{otherwise} \end{cases}$$

where x is amplitude of the DC component value to be encoded.

12. An apparatus for lossless, intraframe encoding of digital frequency-domain data, the data including a plurality of slices each having a plurality of blocks, each block having a DC component and a plurality of AC components, the apparatus including:

- means for receiving a first DC component value of a first slice;
- means for encoding the first DC component value of the first slice;
- means for receiving a second DC component value of the first slice;
- means for encoding the second DC component value of the first slice as a residual value, where the residual value is a function of the difference between the first DC component value of the first slice and the second DC component value of the first slice and the sign of the difference between the first DC component value of the first slice and the second DC component value of the first slice.

13. The apparatus set forth in claim 12, wherein the digital frequency domain data is image data.

14. The apparatus set forth in claim 12, wherein the digital frequency domain data is audio data.

15. The apparatus set forth in claim 12, wherein the encoding of the residual value utilizes Golomb-Rice encoding.

16. The apparatus set forth in claim 12, wherein the encoding of the residual value is determined to be a value of y , using the equation

$$y = \begin{cases} 2x, & \text{if } x \geq 0 \\ 2|x| - 1, & \text{otherwise} \end{cases}$$

where x is the amplitude of the DC component value to be encoded.

17. In a digital cinema system, an apparatus for compressing a digital image, the image including pixel data, the pixel data separated into color components, the method including the acts of:

means for reading groups of a color component of pixel data, each group comprising a DC value and a plurality of AC values;

means for generating a block size assignment to divide the group of a color component of pixel into sub-blocks of pixel data;

means for transforming the sub-blocks of pixel data into corresponding DC and AC frequency domain representations;

means for scaling the AC frequency domain representations into an AC stream of data, wherein the act of scaling is based on a quality metric correlating with the quality of the image;

means for serializing the AC stream of data;

means for run-length coding the AC serialized data using an exponential distribution;

means for encoding the first DC frequency domain representation; and

means for encoding the second DC frequency domain representation as a residual value, where the residual value is the difference between the second DC frequency domain representation and the first DC frequency domain representation.

18. The apparatus set forth in claim 17, wherein the act of scaling further includes the act of providing a frequency weighted mask to said sub-blocks of pixel data, such that the frequency weighting mask provides emphasis to the portions of the image that the human visual system is more sensitive, and provides less emphasis to the portions of the image that the human visual system is less sensitive.

19. The apparatus set forth in claim 17, wherein the act of transforming performs a Discrete Cosine Transform.
20. The apparatus set forth in claim 19, wherein the act of transforming performs a Discrete Cosine Transform followed by a Differential Quad-tree Transform.
21. The apparatus set forth in claim 17, wherein the means for encoding the second DC frequency domain representation is further a function of the sign of the residual value.
22. The apparatus set forth in claim 21, wherein the means for encoding of the residual value is determined to be a value of y , using the equation

$$y = \begin{cases} 2x, & \text{if } x \geq 0 \\ 2|x| - 1, & \text{otherwise} \end{cases}$$

where x is the amplitude of the DC component value to be encoded.

23. An apparatus for lossless, intraframe encoding of digital frequency-domain data, the data comprising a plurality of blocks, each block having a DC component and a plurality of AC components, the apparatus including:

a receiver configured to receive successive DC component values for successive slices; and

an encoder configured to encode the first DC component value of each slice and to encode successive DC component values as residual values, where each residual value is a function of the difference between the current DC component value of the first slice and the second DC component value of the first slice and the sign of the difference between the first DC component value of the first slice and the slice and the second DC component value of the first slice.

24. The apparatus set forth in claim 23, wherein the digital frequency domain data

is image data.

25. The apparatus set forth in claim 23, wherein the digital frequency domain data is audio data.

26. The apparatus set forth in claim 23, wherein the encoding of the residual value utilizes Golomb-Rice encoding.

27. The apparatus set forth in claim 23, wherein the encoding of the residual value is determined to be a value of y , using the equation

$$y = \begin{cases} 2x, & \text{if } x \geq 0 \\ 2|x| - 1, & \text{otherwise} \end{cases}$$

wherein x is the amplitude of the DC component value to be encoded.

28. A method of lossless, intraframe encoding of digital frequency domain data, as claimed in claim 1, substantially as herein described with reference to the accompanying drawings.

29. In a digital cinema system, a method of compressing a digital image, as claimed in claim 6, substantially as herein described with reference to the accompanying drawings.

30. An apparatus for lossless, intraframe encoding of digital frequency-domain data, as claimed in claim 12, substantially as herein described with reference to the accompanying drawings.

31. In a digital cinema system, an apparatus for compressing a digital image, as claimed in claim 17, substantially as herein described with reference to the accompanying drawings.

32. An apparatus for lossless, intraframe encoding of digital frequency-domain data, as claimed in claim 23, substantially as herein described with reference to the accompanying drawings.
33. A method of lossless, intraframe encoding of digital frequency-domain data, substantially as herein described with reference to the accompanying drawings.
34. In a digital cinema system, a method of compressing a digital image, substantially as herein described with reference to the accompanying drawings.
35. An apparatus for lossless, intraframe encoding of digital frequency-domain data, substantially as herein described with reference to the accompanying drawings.
36. In a digital cinema system, an apparatus for compressing a digital image, substantially as herein described with reference to the accompanying drawings.

Dated this 25th day of August 2005

Qualcomm Incorporated
By its Patent Attorneys
MADDERNS



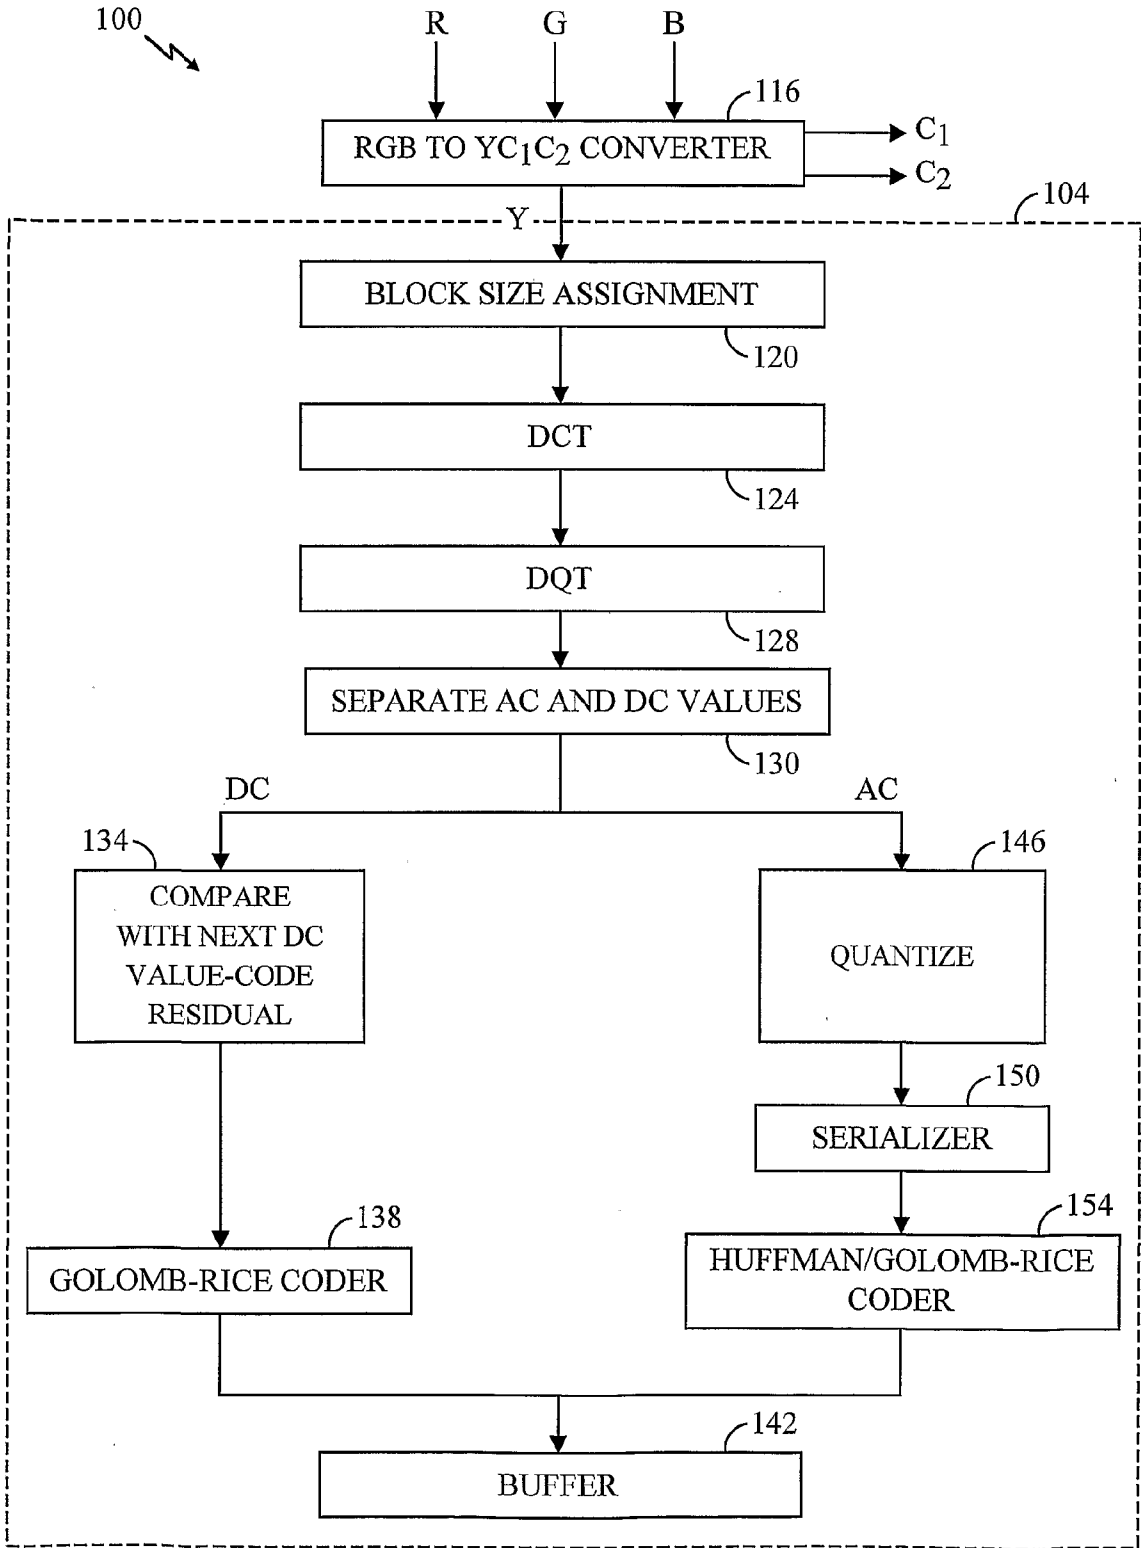


FIG. 1

2/11

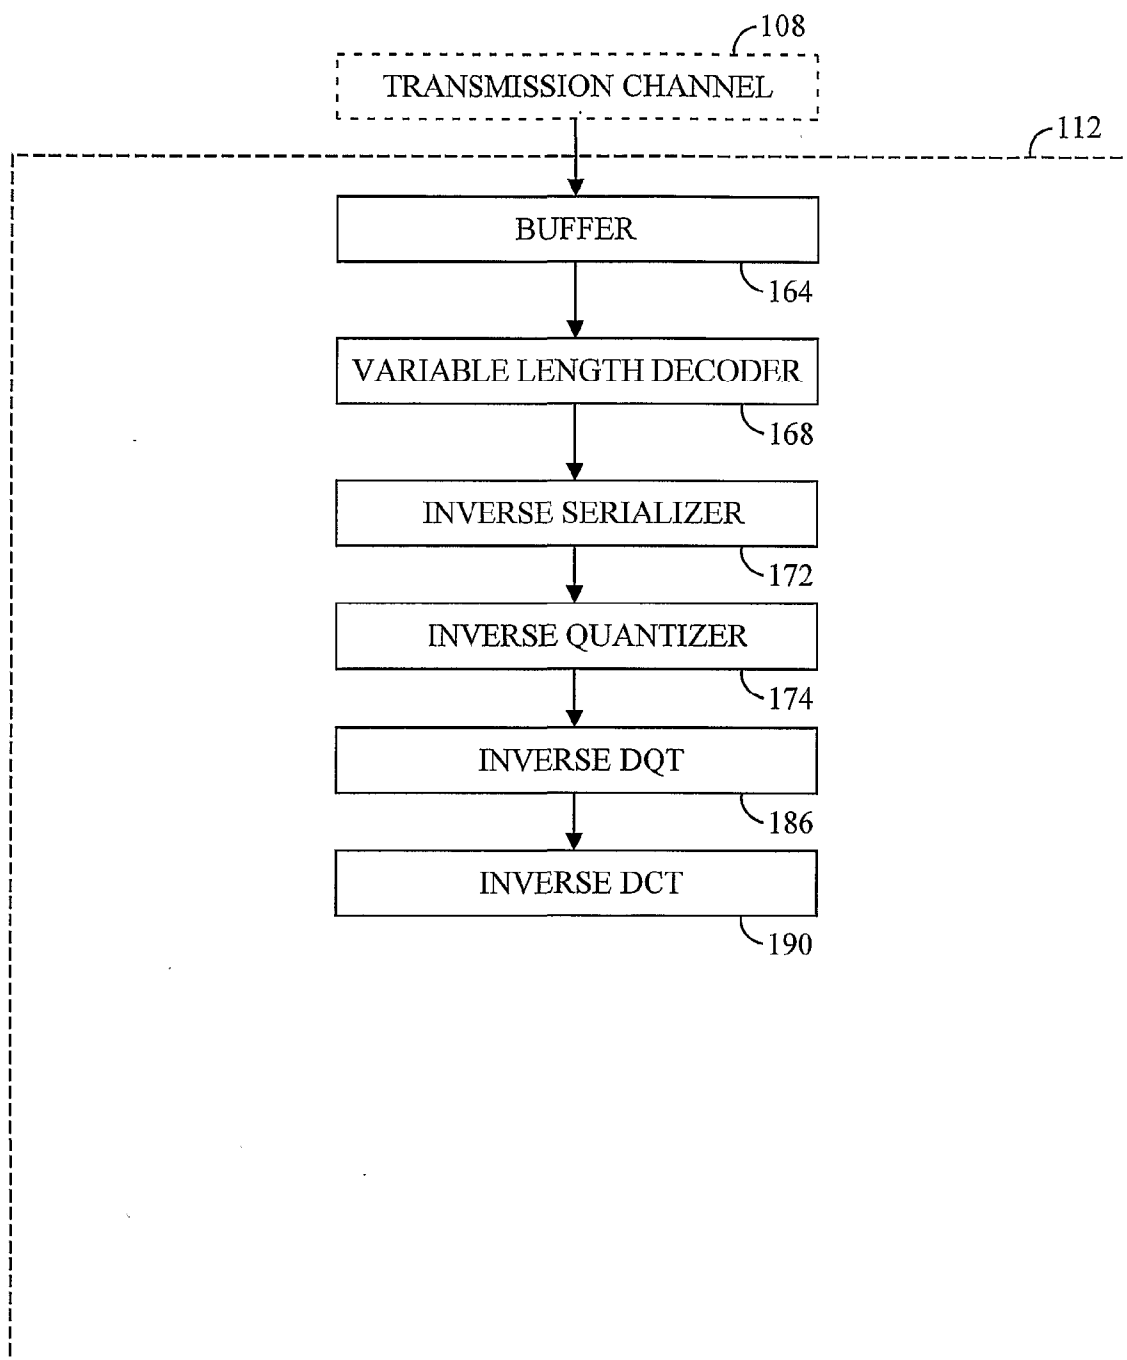


FIG. 2

3/11

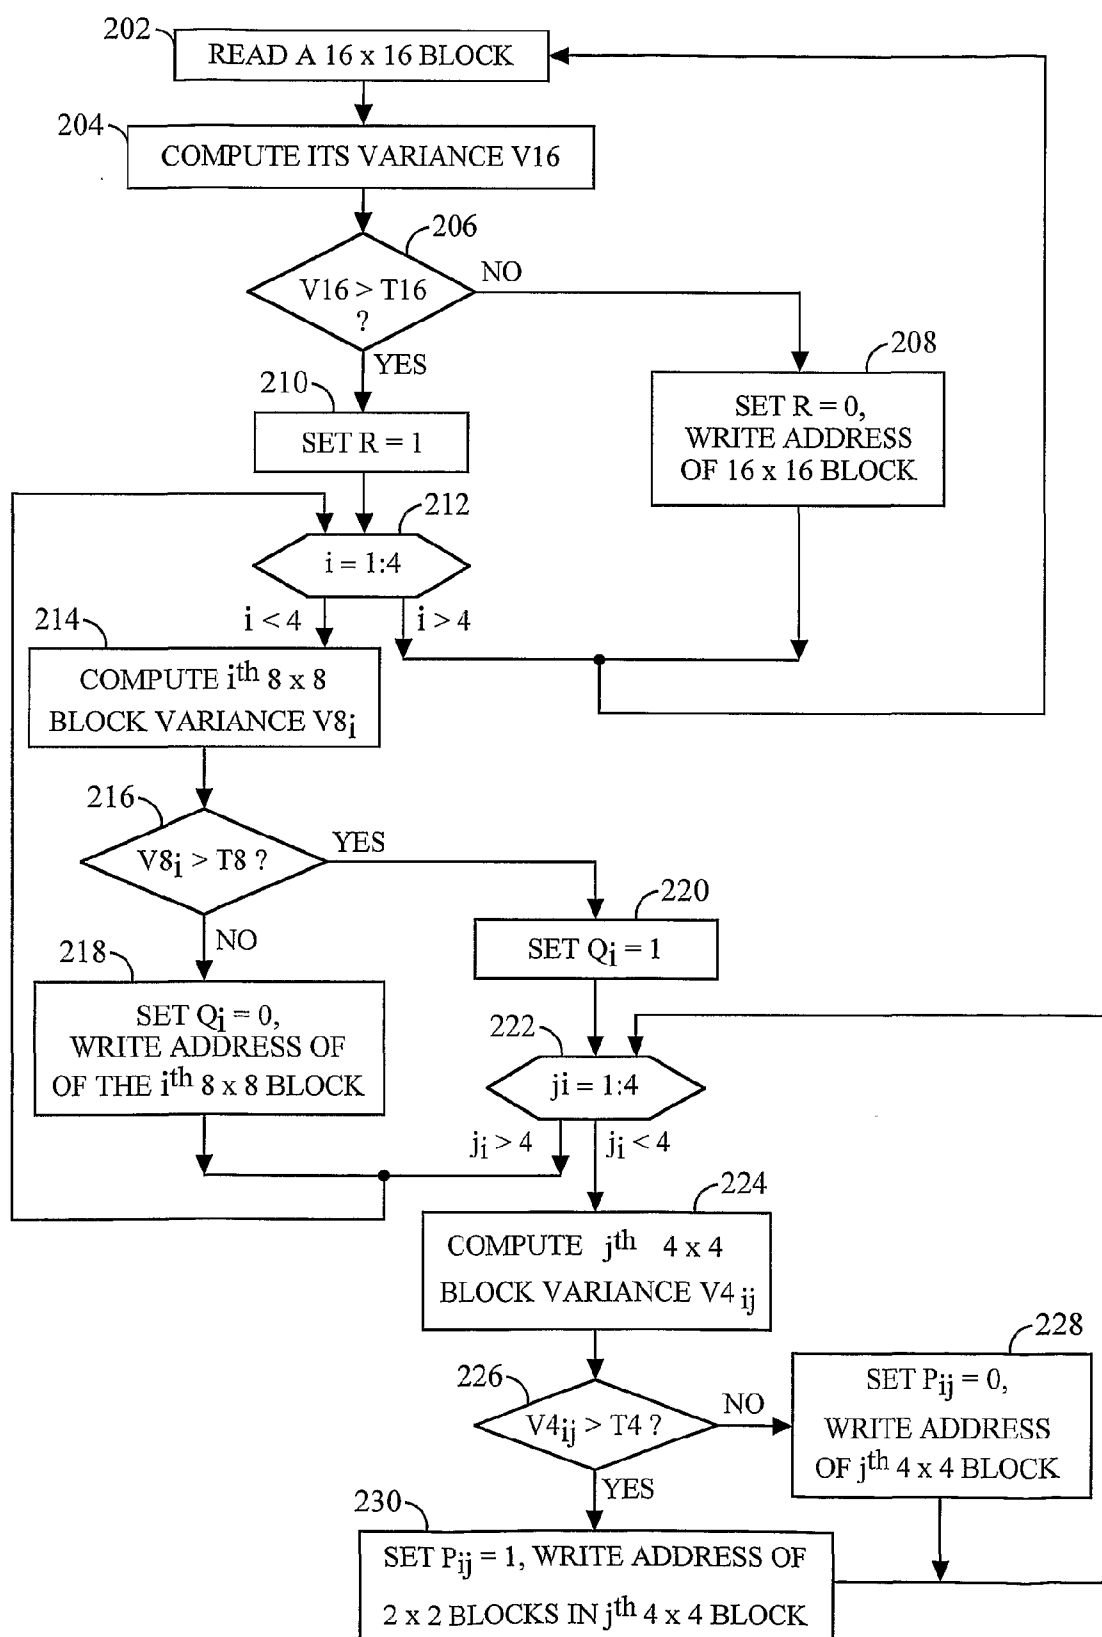


FIG. 3

4/11

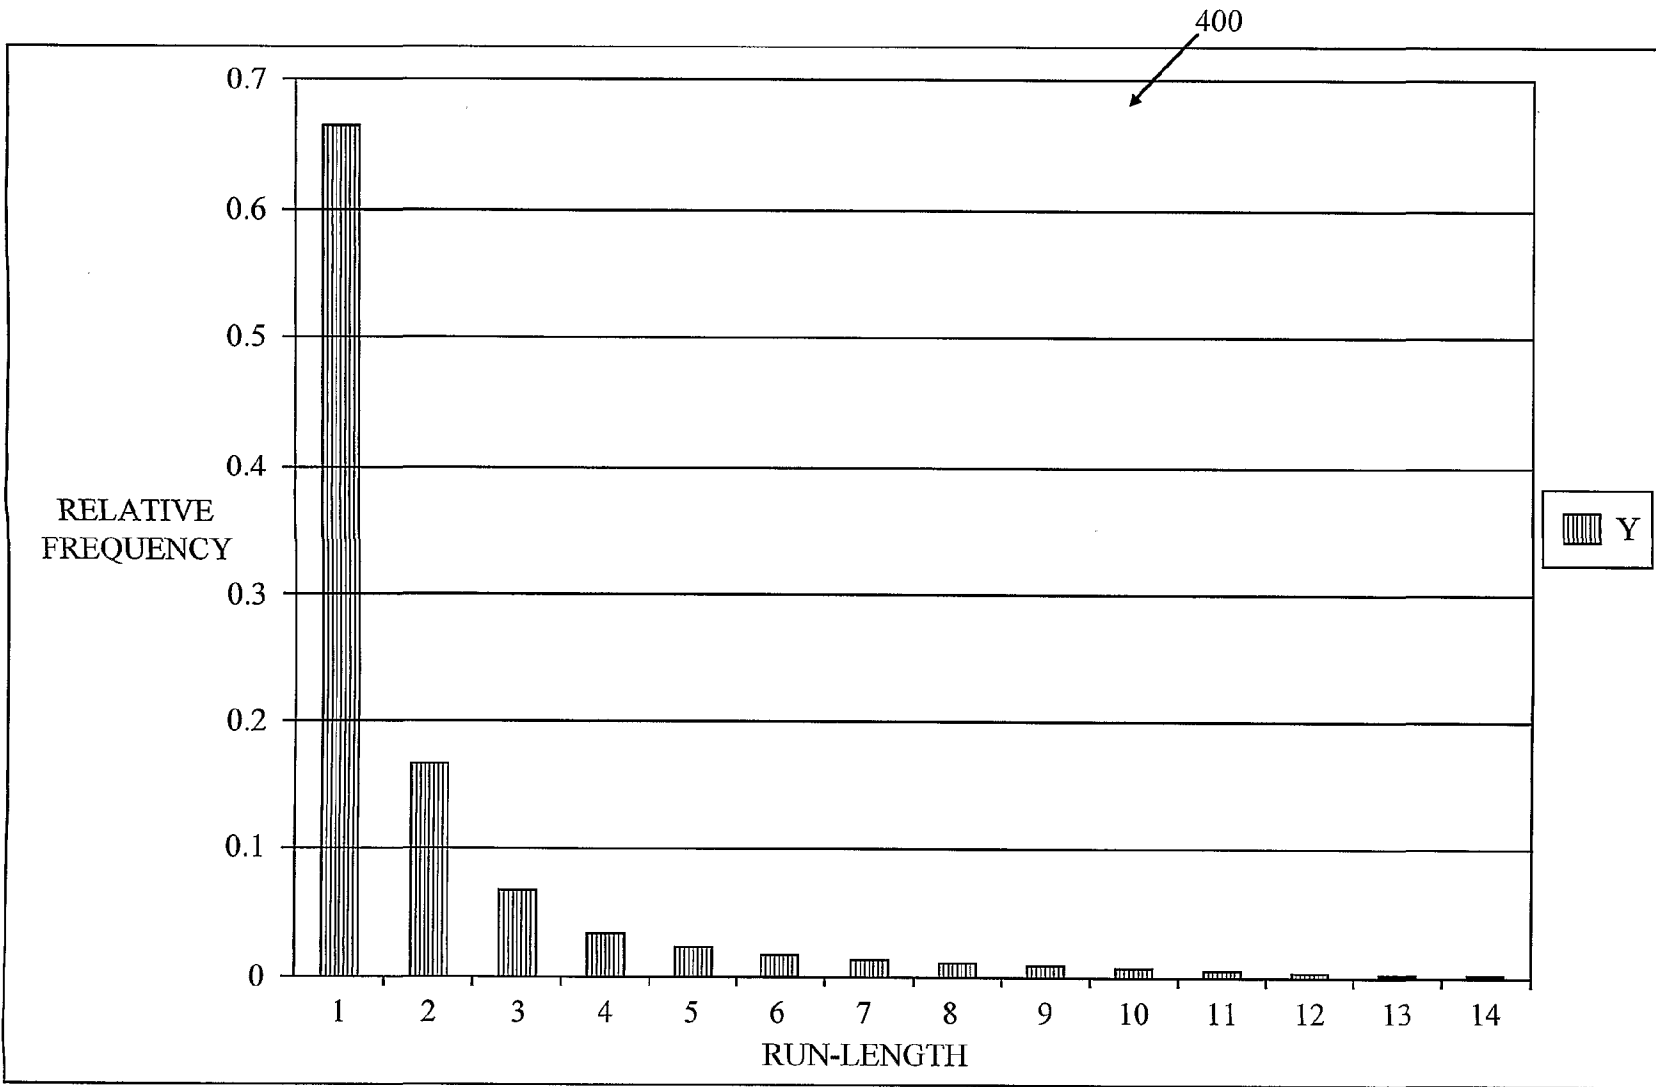


FIG. 4A

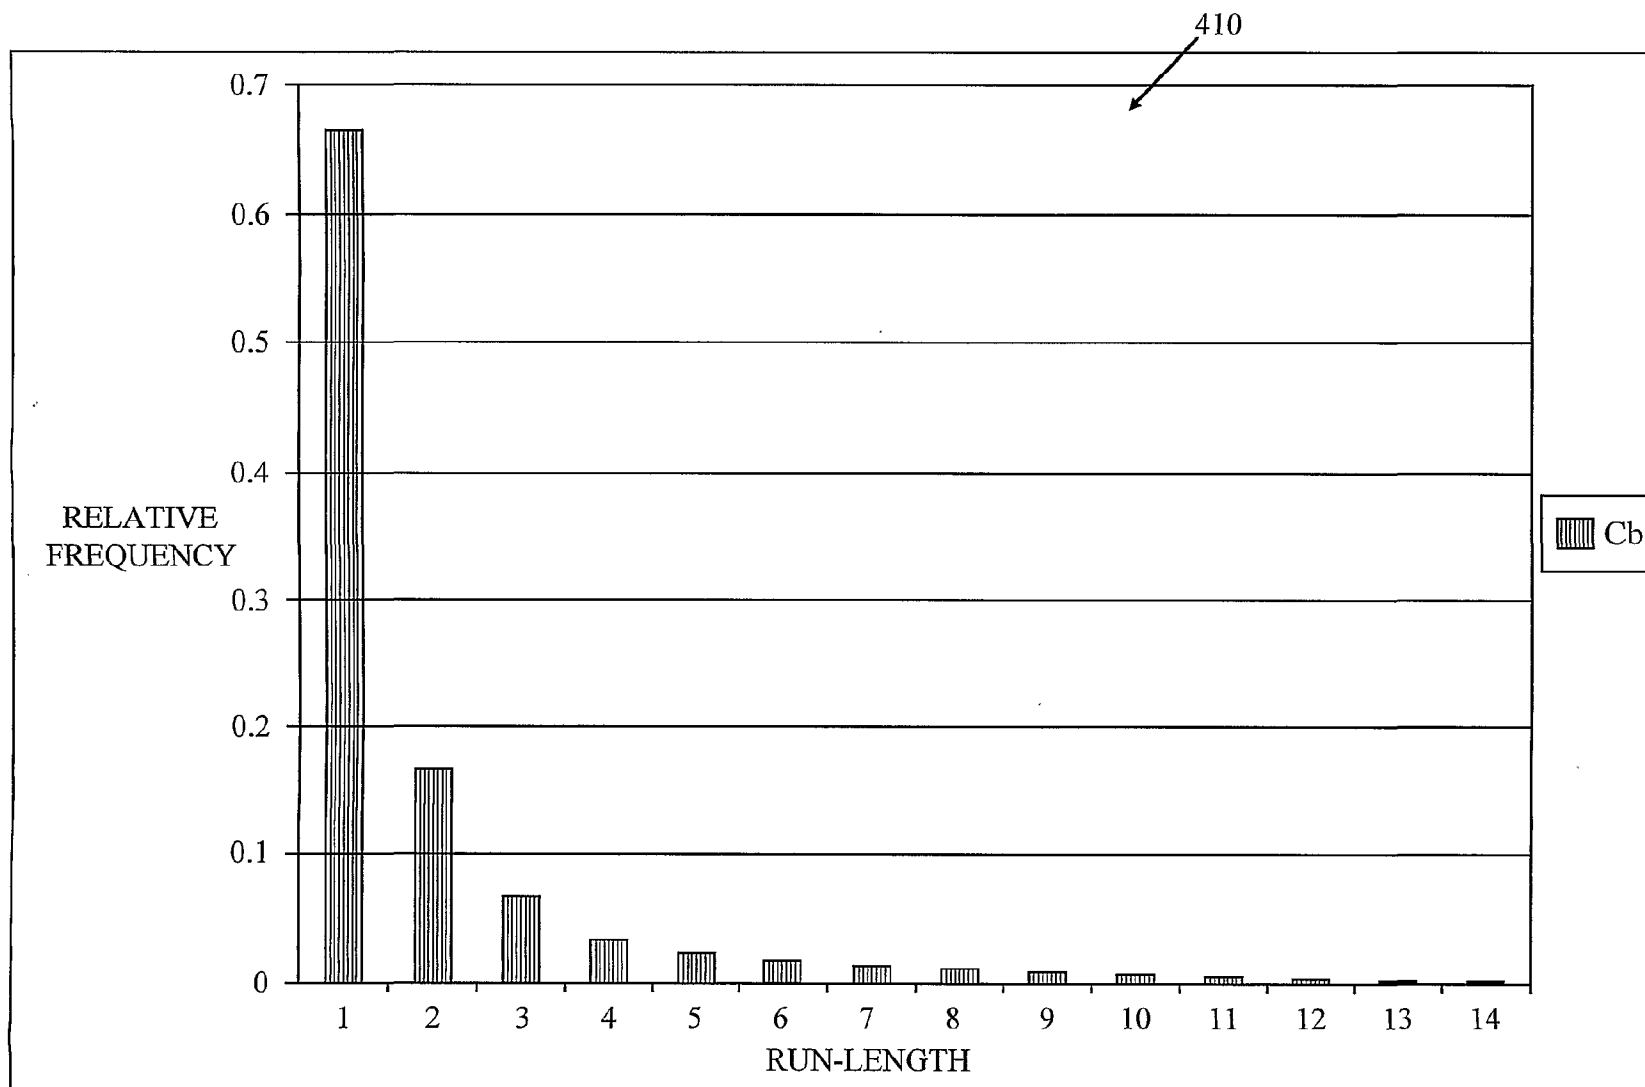


FIG. 4B

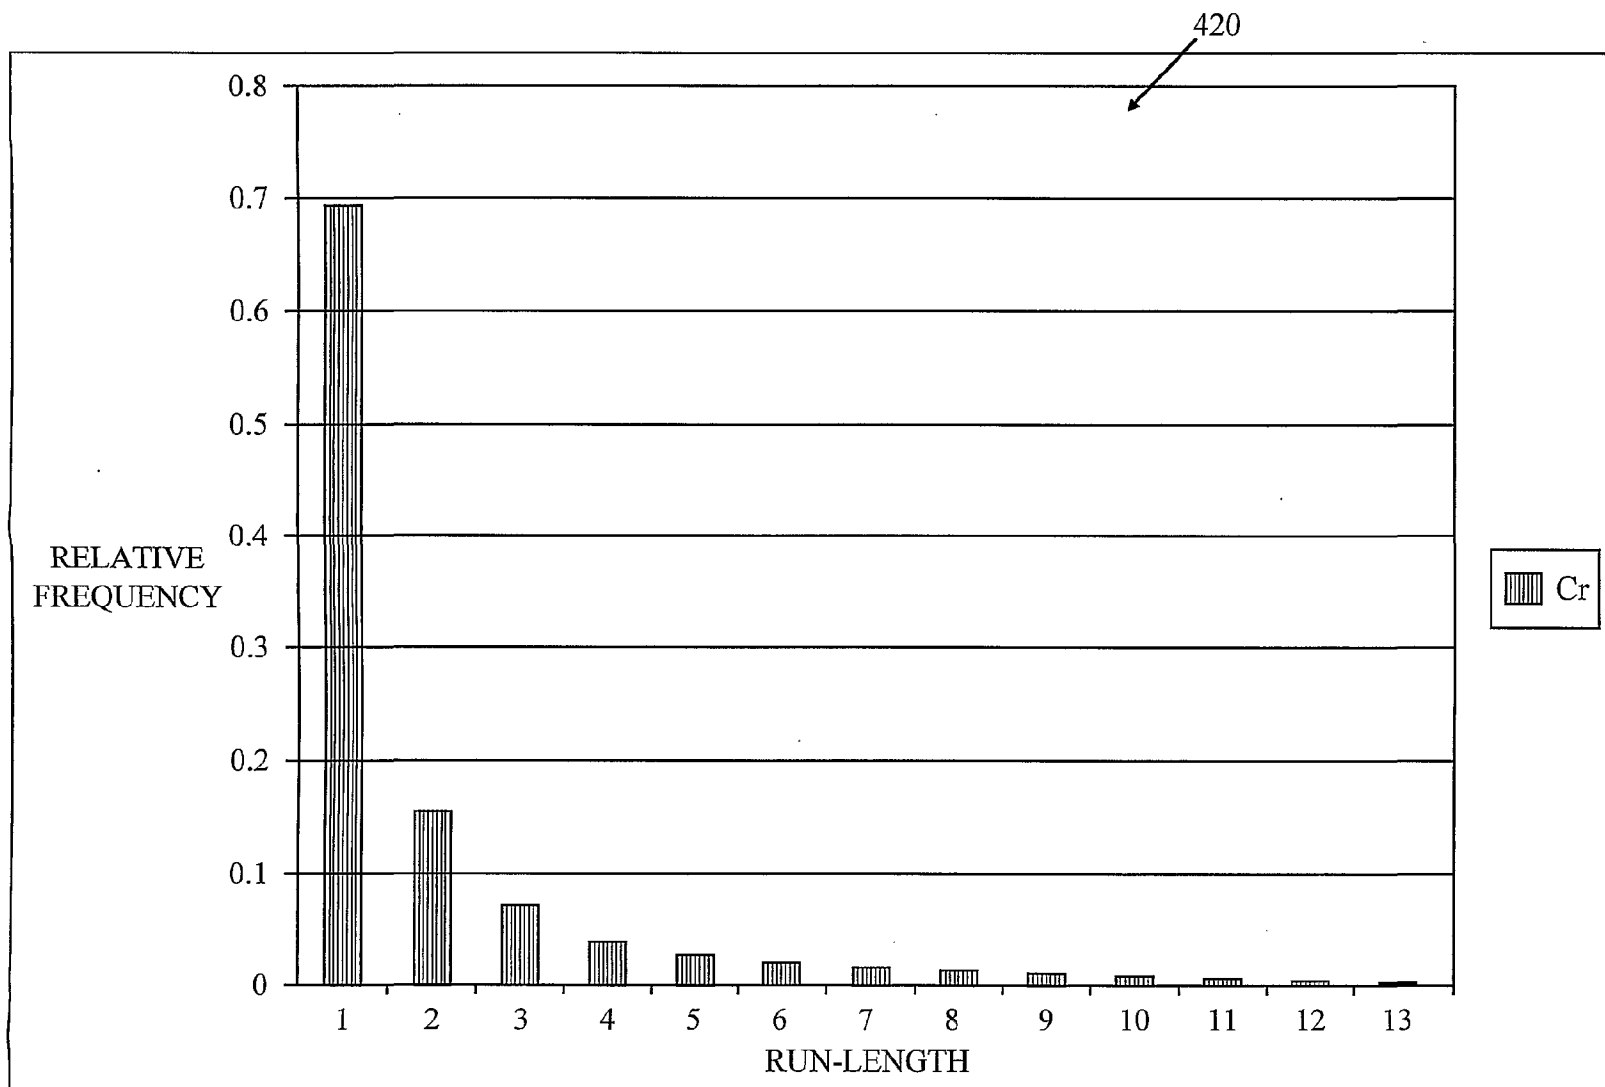


FIG. 4C

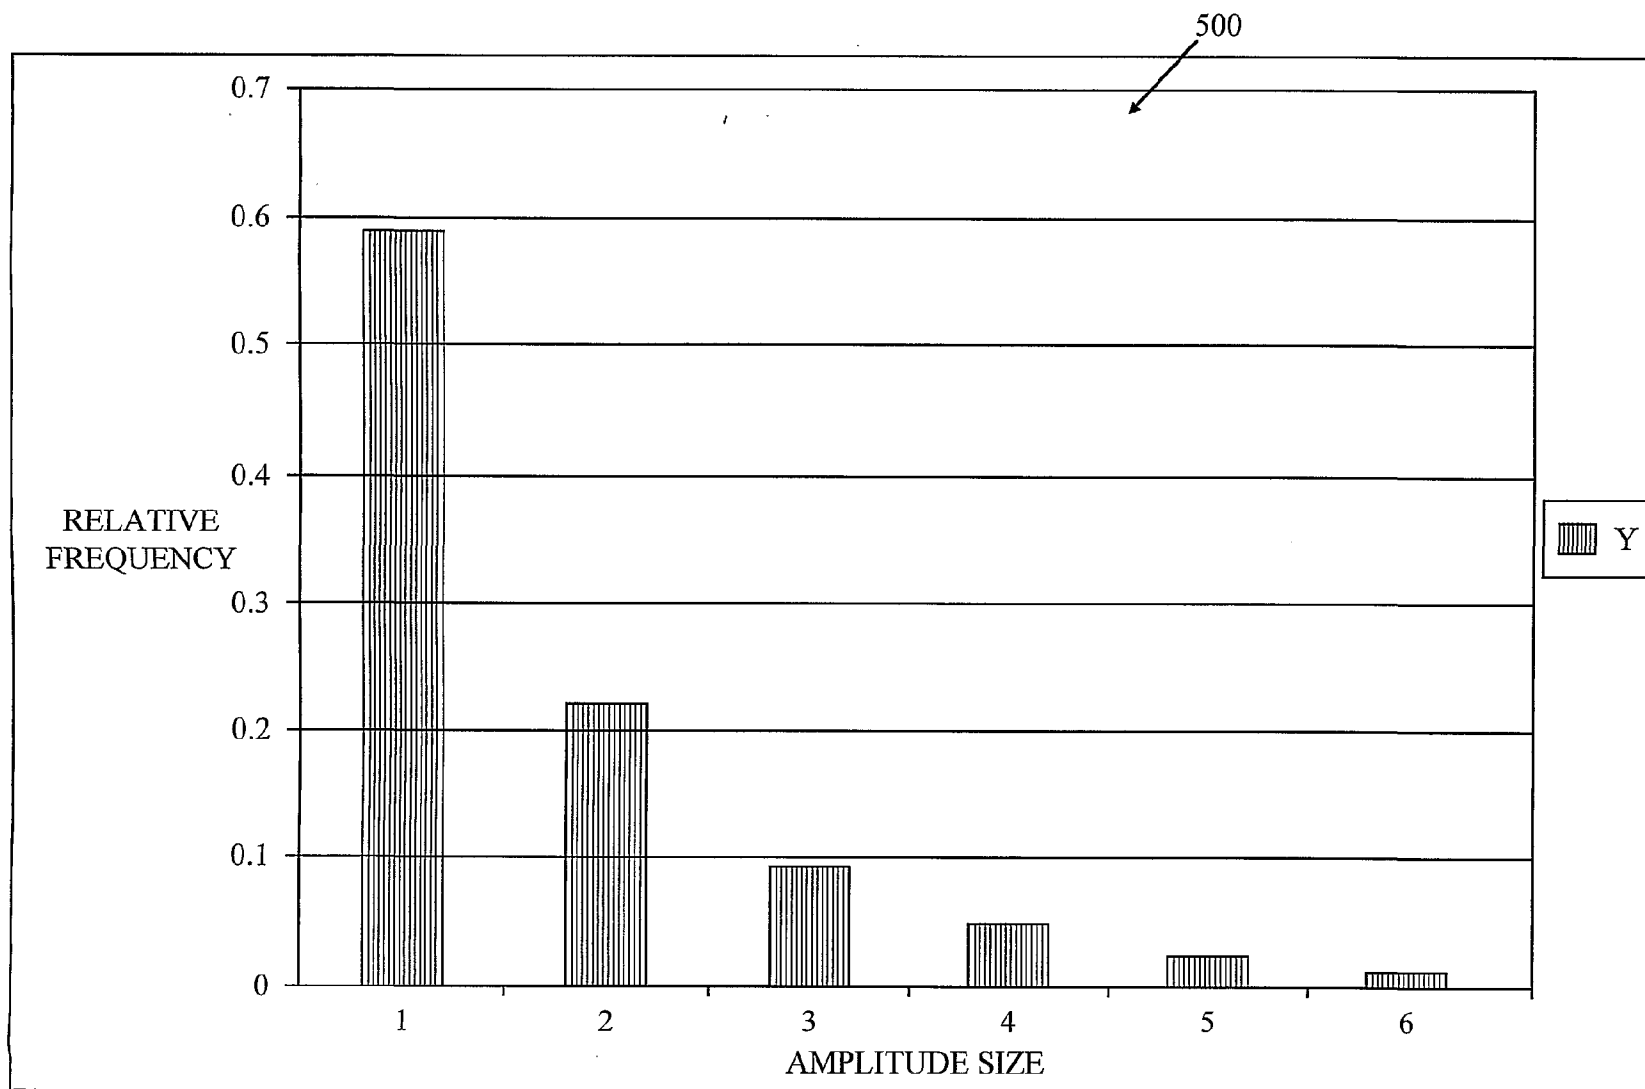


FIG. 5A

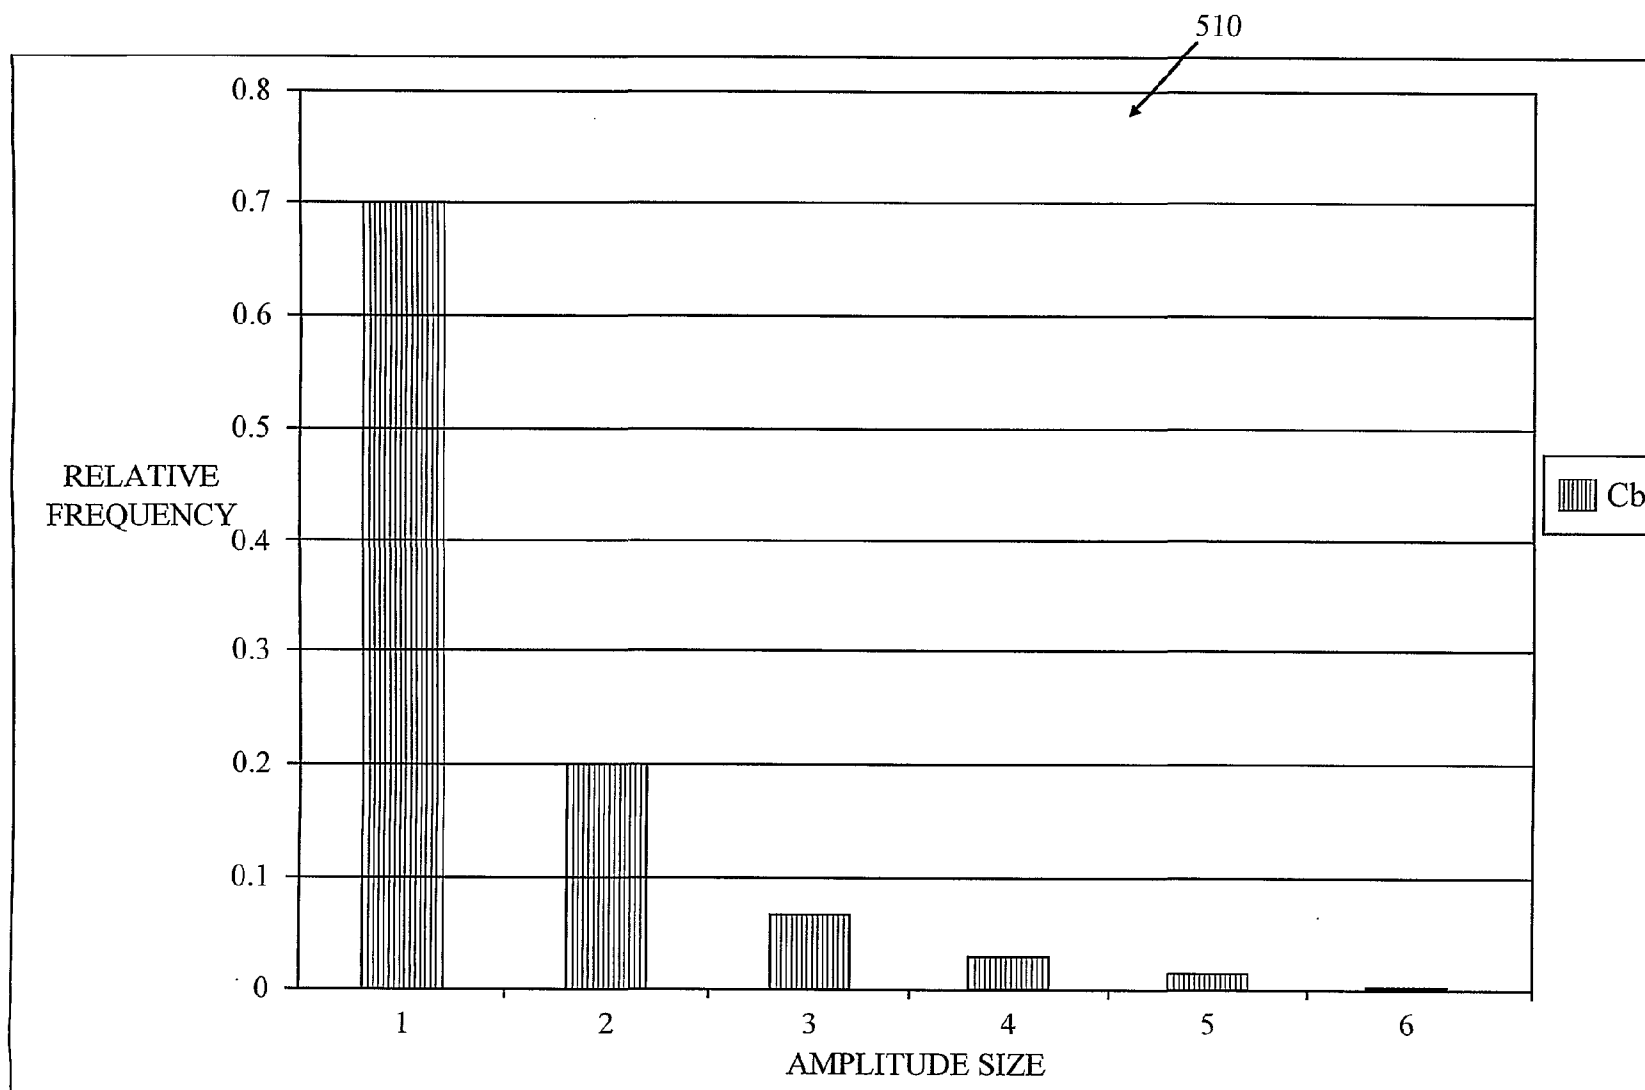


FIG. 5B

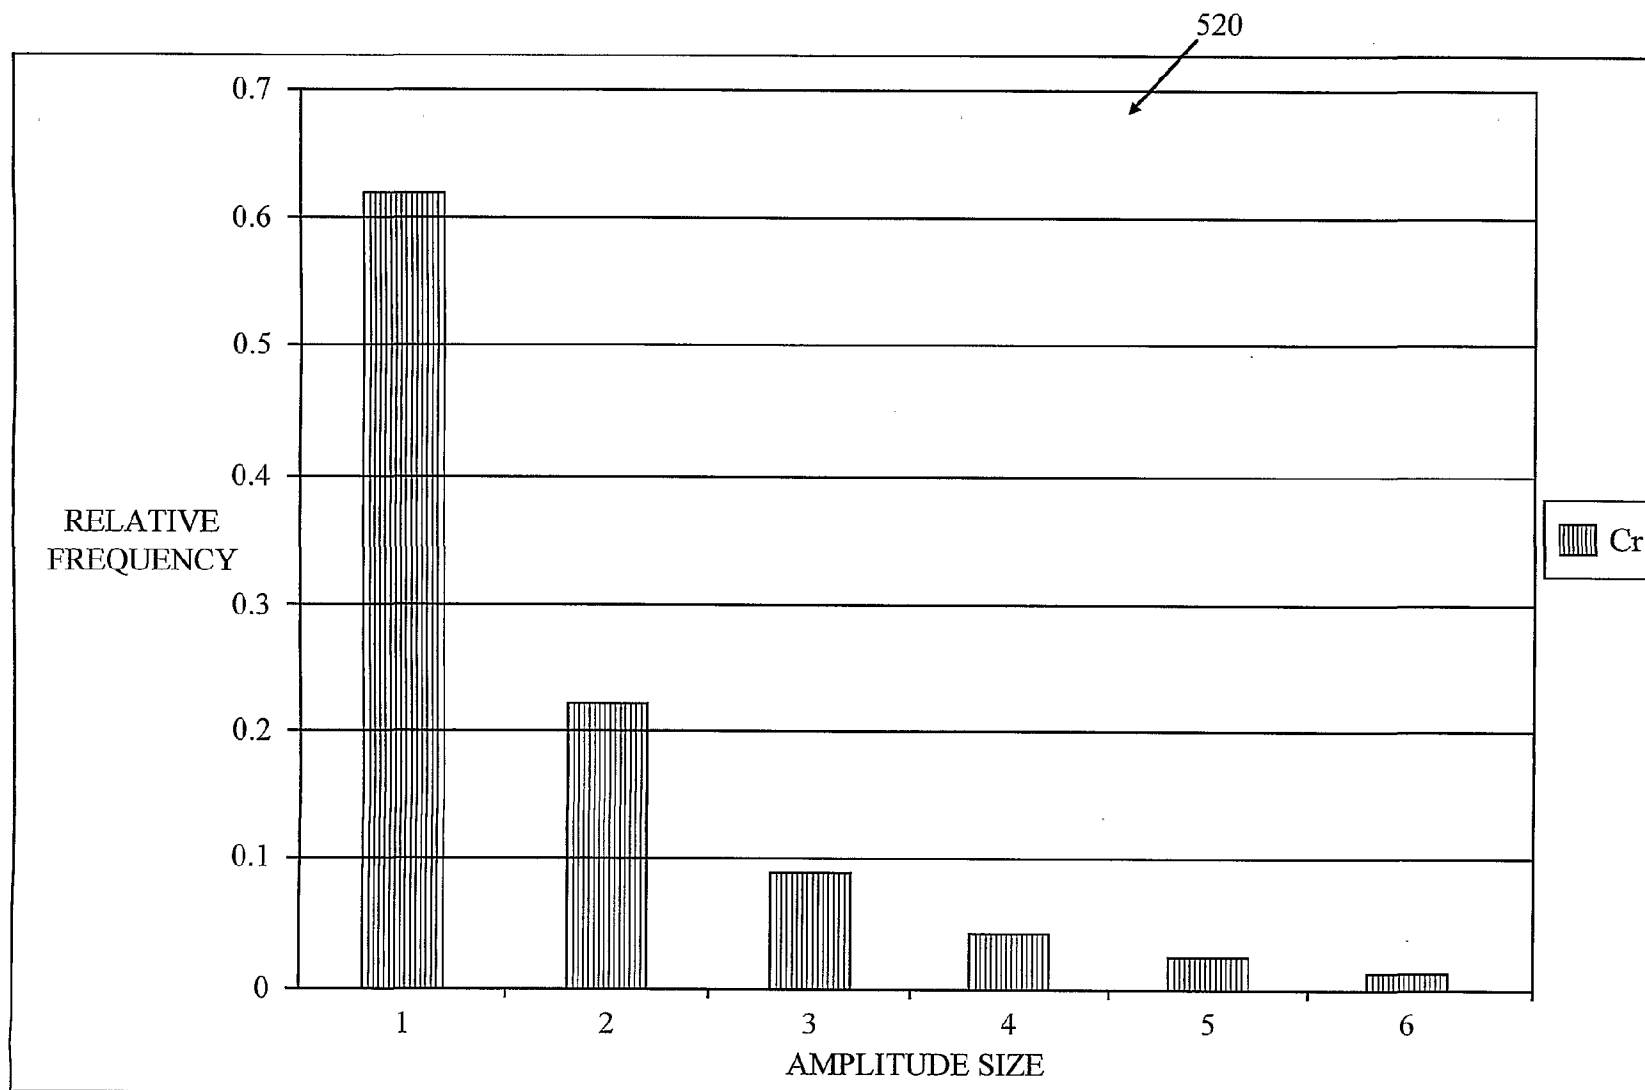


FIG. 5C

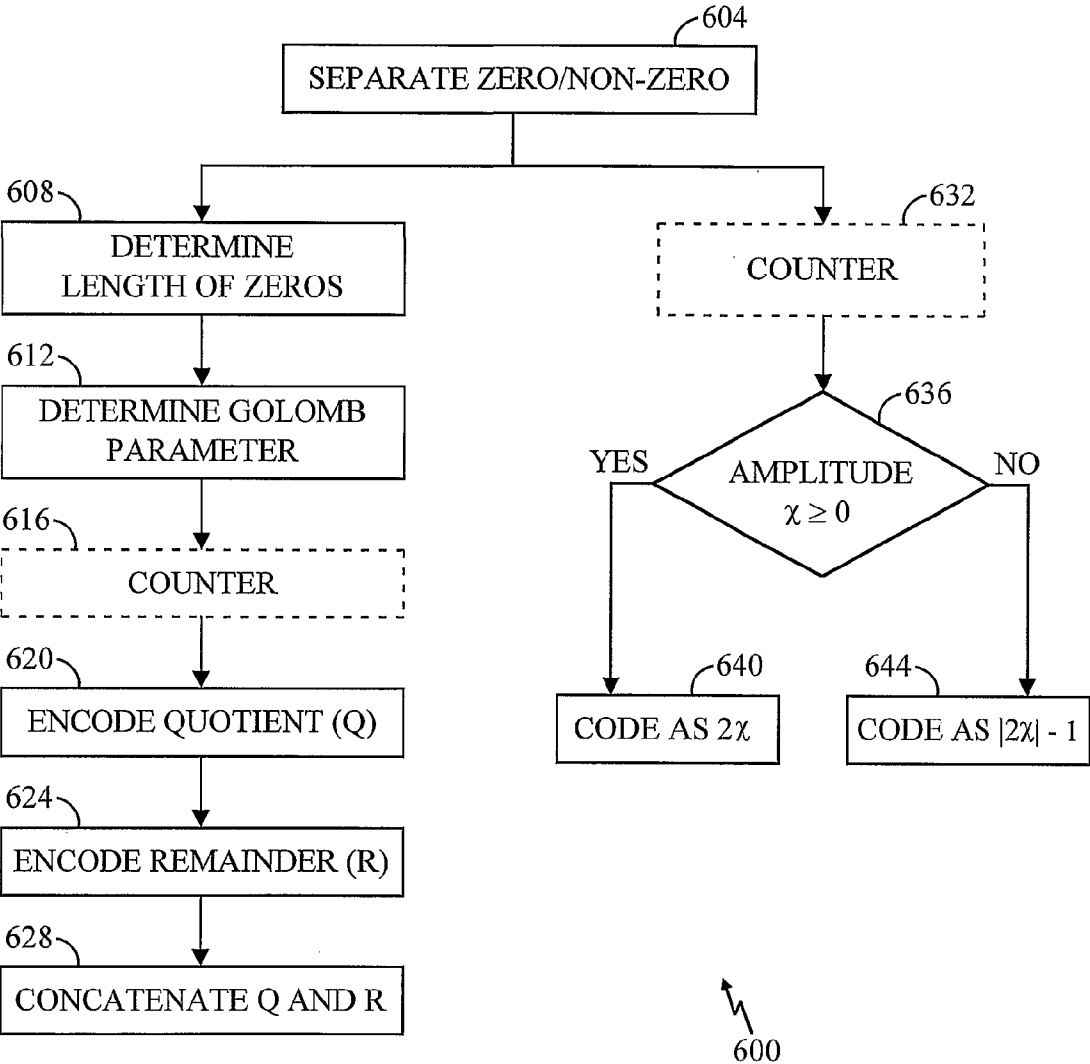


FIG. 6

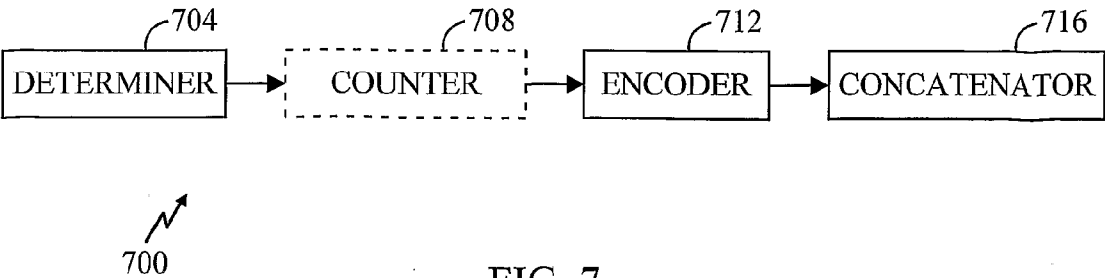


FIG. 7

11/11

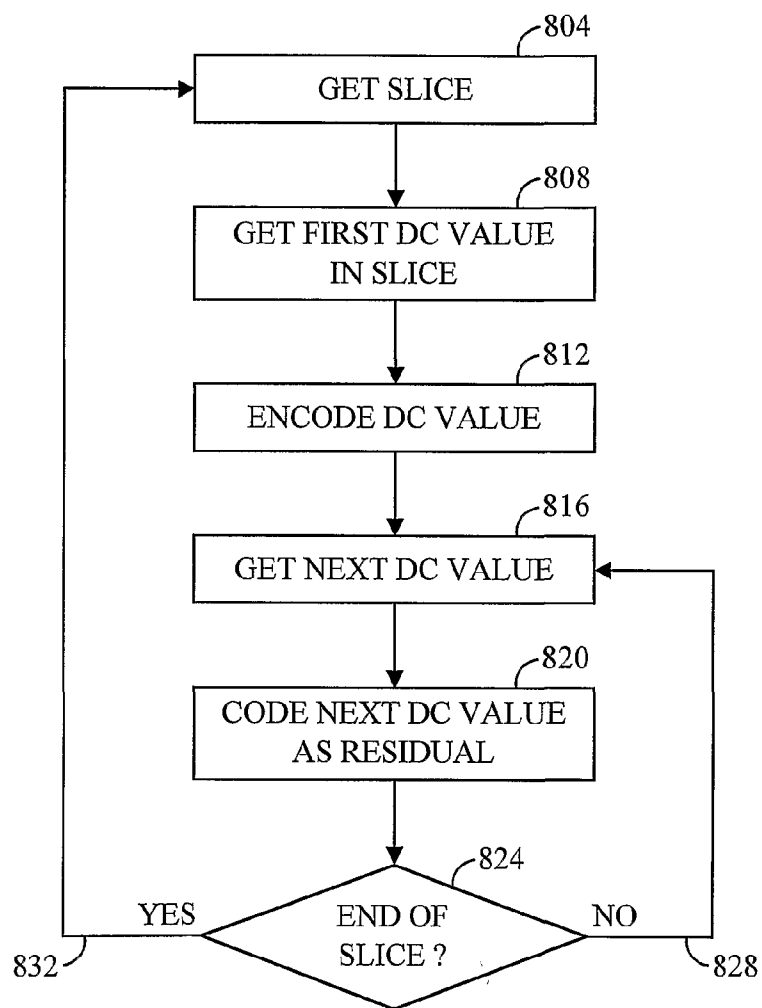


FIG. 8