




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A01K 1/00		A2	(11) International Publication Number: WO 95/05071
			(43) International Publication Date: 23 February 1995 (23.02.95)
(21) International Application Number: PCT/US94/09424		(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LT, LU, LV, MD, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD).	
(22) International Filing Date: 18 August 1994 (18.08.94)			
(30) Priority Data: 08/109,132 19 August 1993 (19.08.93) US 08/182,489 14 January 1994 (14.01.94) US			
(71) Applicant: INVISIBLE FENCE COMPANY, INC. [US/US]; 355 Phoenixville Pike, R.D. #6, Malvern, PA 19355-9603 (US).		Published Without international search report and to be republished upon receipt of that report.	
(72) Inventors: TOUCHTON, Scott, F.; DG-38 Williams Henry Apartments, Malvern, PA 19355 (US). PEINETTI, Donald, L.; 9727 Winter Gardens No. 96, Lakeside, CA 92040 (US). NEWELL, Michael, S.; 6864 Clover Lane, Upper Darby, PA 19082 (US).			
(74) Agents: PIPER, Donald, R., Jr. et al.; Dann, Dorfman, Herrell and Skillman, Suite 720, 1601 Market Street, Philadelphia, PA 19103-2307 (US).			

(54) Title: MULTI-CHANNEL ANIMAL CONTROL DEVICE WITH EXTERNAL DATA COMMUNICATION

(57) Abstract

A system for controlling an animal includes a radio signal receiver unit which is attached to the animal. The receiver includes an antenna assembly, a resonant filter, an amplifier, and a transducer for applying a motivational stimulus to the animal. A microcontroller selectively activates the components of the receiver according to a control sequence. The microcontroller performs a multi-stage authentication procedure in order to determine the presence of characteristic properties of the received signal prior to operating the transducer. The transducer includes a speaker circuit for applying audible stimulation, and a transformer circuit for applying electrical stimulation. The type of stimulation and the duration of stimulation may be selected according to control parameters used in conjunction with the control sequence. The control parameters can be initially selected and/or downloaded to the microcontroller from an external programming device. The microcontroller stores data pertaining to the operation of the receiver and can provide the stored data to an external device in response to an interrogation signal. The microcontroller selects the operating frequency of the receiver in order to avoid interference with similar nearby systems.

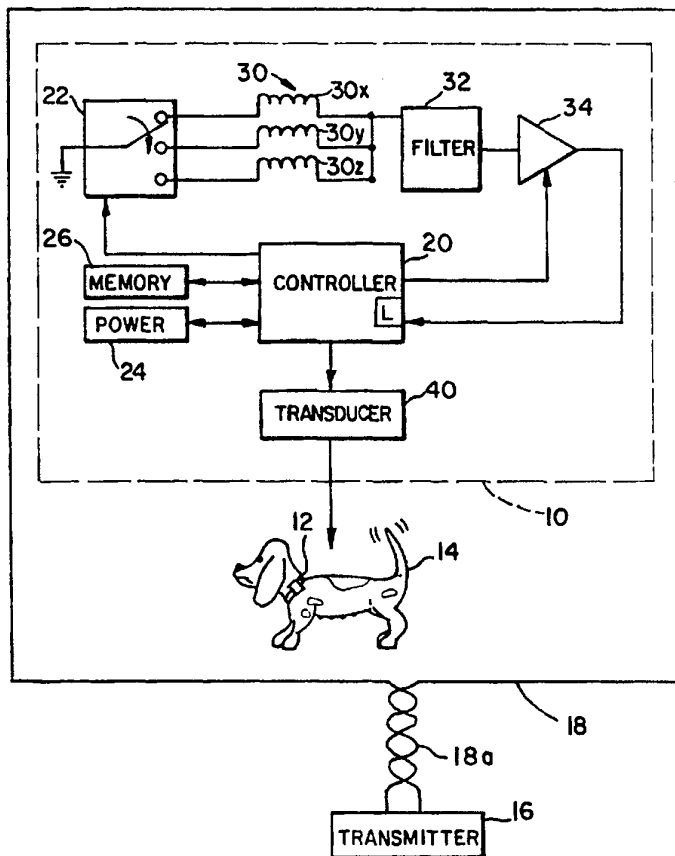

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

MULTI-CHANNEL ANIMAL CONTROL DEVICE
WITH EXTERNAL DATA COMMUNICATION

Field of the Invention

The present invention relates to a device for controlling the movement of an animal relative to a selected area. More particularly, the invention
5 relates to an electronic receiver device for applying a motivational stimulus to the animal in response to a characteristic radio signal emitted by a transmitter having an antenna defining the selected area.

10 Background of the Invention

Electronic animal control systems have been employed wherein a radio receiver is mounted upon an animal in order to detect a signal from a radio transmitter and to deliver a stimulus to the animal in
15 response to the received signal. It is desirable for such a radio receiver to be compact and to use as few parts as possible. Since such receivers usually operate on battery power, it is also desirable to reduce the amount of electrical power that is consumed
20 within the receiver. The use of orthogonal antennae within such receivers may be desirable to provide more uniform reception relative to receivers utilizing a single antenna. The use of multiple antennae, however, contributes to an increase in the number of
25 parts and to the electrical power consumed within the receiver.

Animals tend to respond poorly to behavioral reinforcement stimuli that are not consistently applied in well-defined circumstances. Electronic
30 animal control systems typically employ an electrical

shock as a motivational stimulus. The magnitude of the shock delivered to the animal often depends upon the positioning of the receiver upon the animal and upon other environmental factors such as the presence of moisture upon the skin of the animal. Such factors can detract from the delivery of a consistent shock to the animal. It would therefore be desirable to provide a system for delivering a consistent shock that is insensitive to such environmental conditions.

It would also be desirable to provide an animal control system wherein the type of stimulus applied to the animal is readily adaptable to the temperament of the particular animal to be controlled.

In order to avoid accidental application of stimuli in response to spurious or interfering radio signals, it would also be desirable to provide a system for verifying authentic transmitter signals. For this purpose, the detected radio signal may desirably be subjected to a plurality of verification tests to determine the presence within the received signal of a characteristic property of the authentic transmitter signal.

As electronic animal systems increase in popularity, there is an increased likelihood that two such systems would be employed within a relatively close proximity to each other, such as to confine animals to neighboring properties. In such a circumstance, super-position of the electromagnetic waves from the transmitting antennae can lead to undesirable peaks and/or nulls in the patterns of electromagnetic signal strength defining the respective boundaries of the two properties. It would therefore be desirable to provide an electronic animal confinement system that can easily be configured so as not to interfere with similar nearby systems.

In the mass production of such devices, it would be desirable to provide the ability to select the operating parameters of each device, such as the operating frequency or type of stimulation to be applied, either at the time of manufacture or when the device has been in use. In order to identify parameters that should be changed in the field to improve performance, it would be desirable to record information pertaining to the operational history of the device. Such information could then be retrieved and analyzed in order to determine whether the operating parameters of the animal control device should be altered to improve performance.

15 Summary of the Invention

According to the present invention, a radio signal receiver is provided in an electronic animal control system for controlling the movement of an animal relative to a predetermined area defined by a transmitting antenna that emits a characteristic radio signal. The signal receiver is mounted on the animal to apply a motivational stimulus to the animal in response to the characteristic radio signal emitted by the transmitting antenna in order to control the movement of the animal.

For controlling animal movement relative to a predetermined area, the signal receiver includes a transducer for applying the motivational stimulus to the animal. A resonator is employed having antenna means for converting the radio signal emitted by the transmitting antenna into an electrical signal. An amplifier is provided for amplifying the electrical signal from the resonator to produce an amplified signal. A controller is responsive to the amplified signal for detecting a selected characteristic of the

radio signal and for operating the transducer when the selected characteristic is detected. The controller has selection means for selectively activating the antenna means, the amplifier and the transducer to
5 control power consumption within the receiver.

In a specific embodiment, the signal receiver for the electronic animal control system may include a plurality of antennae disposed in different orientations. In order to simplify the receiver
10 circuitry when multiple antennae are employed, all of the antennae are connected with a single resonator which in turn is connected with a single amplifier. A controller generates signals for selectively activating the antennae and for selectively providing
15 power to the amplifier. The amplifier may be in the form of a thresholding amplifier having an input threshold that is selected by the controller. The controller operates according to a control sequence during which the antennae and amplifier are activated
20 only when needed so that electrical power is conserved.

The controller is responsive to the output from the amplifier in order to detect the presence of a received signal. The receiver includes a transducer
25 which may be operated by signals from the controller for applying a selected motivational stimulus to the animal. In order to prevent stimulation of the animal in response to false signals, the controller authenticates the detected signal in accordance with a
30 predetermined set of characteristics, such as the characteristic of a modulation envelope, indicative of an authentic transmitter signal.

The transducer may include audible and electrical stimulation components. When an authentic
35 signal is detected by the controller, the type of

stimulation to be applied to the animal may be selected according to a selected combination, or sequence, of audible and electrical stimuli appropriate to the particular animal to be controlled.

5 The controller may also function to record the number or duration of stimuli provided to the animal so that the controller may cease stimulation if a selected maximum number of stimulations has been applied while an authentic signal is present. The controller may

10 also record other data pertaining to the operation of the receiver so that such data may be retrieved and used to evaluate the behavior of the animal and/or the performance of the receiver. The control sequence and/or the stimulation sequence may be changed by the

15 user in response to such data.

In order to retrieve data from the controller, or to transmit data to the controller, the animal control device is provided with first and second connecting terminals that are connected with

20 one terminal of a removable battery. One of the connecting terminals is used to provide electrical power to the animal control device. The other connecting terminal is connected to the controller and is used thereby to (i) detect removal of the battery

25 and (ii) exchange digital data with an external device.

In order to provide a uniform and predictable performance from each of a large number of such devices, the resonator includes a damping

30 component that is selected at the time of manufacture in order to compensate for variations of the other components of the resonator. Furthermore, the resonant frequency of the resonator can be selected by the controller in accordance with a selected operating

35 parameter. Such frequency selection permits the use

of several similar animal control systems in adjacent areas while preventing electromagnetic interference between systems.

5 The electrical stimulation component of the transducer may be equipped with threshold voltage conduction devices in order to provide a consistent electrical stimulus to the animal. A first threshold device may be utilized to establish a minimum stimulation voltage to ensure that the animal receives
10 adequate stimulation. A second threshold device may also be utilized in order to establish a maximum stimulation voltage to protect the electrical stimulation component from damage due to the generation of excessive voltage.

15

Brief Description of the Drawings

The foregoing summary, as well as the following detailed description of the preferred embodiments of the present invention, will be better
20 understood when read in conjunction with the accompanying drawings, in which:

Fig. 1 is a schematic diagram of an electronic animal control system in accordance with the present invention;

25 Fig. 2 is a graph of a characteristic radio signal emitted by the transmitter of the control system of Fig. 1;

Figs. 3A-D are logical flow diagrams of procedures executed by the controller of the electronic receiver of the control system of Fig. 1;
30

Figs. 4A-C are schematic diagrams of the receiver circuit of the electronic receiver of the control system of Fig. 1;

35 Figs. 5A-B are schematic diagrams of an alternative embodiment of the receiver circuit of the

electronic receiver of the control system of Fig.1;
and

Fig. 6 is a logical flow diagram of a
procedure executed by the controller of the electronic
5 receiver of the control system of Fig. 1.

Detailed Description of the Preferred Embodiments

An electronic animal control system is shown
in Fig. 1 having a transmitting antenna, such as a
10 wire loop antenna 18, that defines the boundary of an
area relative to which the movement of an animal 14 is
to be controlled. The antenna 18 may define an area
in which the animal is to be confined or may
alternatively define an area from which the animal is
15 to be discouraged from entering.

The transmitting antenna 18 is connected
with a transmitter 16 which generates a characteristic
signal. Connection between the transmitter unit 16
and the antenna 18 may be made via a twisted pair
20 section 18a for confining electromagnetic emissions
from the twisted pair section 18a so that the antenna
18 may define an area remote from the transmitter 16.
The transmitter 16 is preferably of the type marketed
by Invisible Fence Company, Inc. of Malvern,
25 Pennsylvania.

An electronic receiver 10 is carried by the
animal 14, such as by mounting the receiver 10 upon a
collar 12. The receiver 10 includes a transducer 40
for applying a stimulus to the animal 14 when the
30 animal approaches the vicinity of the transmitting
antenna 18. Operation of the receiver 10 is governed
by a controller 20 which executes a sequence of
instructions which define the order and conditions
under which the controller activates components of the
35 receiver 10. A sequence of instructions executed by

the controller 20 and various parameters that define the actions of the receiver 10 may be stored within the controller 20 or within a non-volatile memory 26 with which the controller is operably connected.

5 The controller 20 is connected with a power supply system 24 so that the controller 20 may selectively provide power to and/or activate components of the receiver, such as a selector switch 22, an amplifier 34, and the transducer 40. The
10 ability of the controller to selectively provide power to the various components of the receiver 10 serves to reduce overall power consumption by the receiver 10 since each of the components of the receiver is activated only when needed.

15 The selector switch 22 is operated by the controller 20 to selectively activate three mutually orthogonal antennae 30 mounted within the receiver 10, such as inductors 30x, 30y, and 30z. The antennae 30 are connected with a tuned circuit, such as a resonant
20 amplifier or filter 32, so that the receiver is tuned to the desired transmitter signal. The filter 32 functions to filter out undesired signals from the desired transmitter signal.

 The amplifier 34 receives the signal, if
25 any, output from the filter 32 and produces an amplified signal which is provided to the controller 20. The controller 20 is connected with the output of the amplifier 34 to detect the presence of the amplified signal produced by the amplifier. The
30 controller 20 preferably incorporates a signal detection latch L or counter mechanism connected with the output of amplifier 34 so that the presence of an amplified signal from the amplifier 34 will be held or stored for a period of time sufficient for the

controller 20 to effect asynchronous detection, or sampling, of the amplified signal.

When the controller 20 detects the presence of the amplified signal, the signal is tested to
5 determine whether the signal possesses predetermined characteristics of the expected transmitter signal. If the signal is found to satisfy certain verification criteria, then the signal is authenticated and the controller 20 then operates the transducer 40 in order
10 to apply a motivational stimulus to the animal 14. The transducer 40 may include an electrical stimulator for providing an electrical shock to the animal 14. The transducer 40 may also include an audible stimulator for providing an audible stimulus.

15 The combination and/or sequence of audible signals and electrical shocks, which may included in the motivational stimulus, may be selected according to control parameters stored within the receiver, such as in the non-volatile memory 26. Thus, the receiver
20 unit 10 may be adapted to control animals of varying temperament according to the selection of appropriate control parameters within the memory that define the motivational stimulus. For example, a large, active breed of dog, such as a Siberian husky, may require a
25 greater degree of stimulation relative to a more trainable breed of dog, such as a basset hound, in order to be discouraged from approaching the transmitting antenna 18.

The controller 20 operates according to a
30 selected control procedure as shown in Fig. 3A. The controller may be programmed to count and/or record data such as the number of times that the animal has approached the transmitting antenna, the length of time that the receiver has been in service, and other

information relating to the operational history of the receiver.

Upon starting at step 60, the controller proceeds to step 62 wherein several registers such as event counters and time-out counters are initialized according to values stored within the memory 26.

Registers for containing operational control parameters may also be initialized during step 62. Such control parameters may define the maximum number of stimulations to be applied to the animal, the type of stimulation that is to be applied, and other control functions discussed hereinafter. The controller then proceeds to step 64 wherein the selector switch 22 is operated to activate at least one of the antennae 30. An antenna may be activated by the controller by causing the selector switch 22 to connect the selected antenna to ground. The non-selected antenna or antennae are provided with an open circuit condition by the selector switch 22. Antennae, or a single antenna, may be activated within step 64 according to a sequential scanning procedure, for example, wherein the scanning sequence is advanced with each successive execution of step 64. The sequence of antenna activation may be selected so that each of the three antennae is successively activated or the sequence may be changed so that certain antennae are activated more frequently than others.

After activation of a selected antenna in step 64, the controller then proceeds to step 66 wherein a determination is made as to whether or not a signal has been detected by the antenna selected in step 64. If no signal is detected in step 66, the controller returns to step 64 to activate the next antenna or antennae in the selected scanning sequence. If, in step 66, a signal is detected from the selected

activated antenna, then the controller proceeds to step 68 for signal authentication.

5 A more detailed procedure by which the signal detection step 66 may be implemented is shown in Fig. 3B. Beginning at step 66a, the controller 20
10 activates the amplifier 34 by providing power to the amplifier. The controller may also select a desired amplifier sensitivity, such as a selected gain or threshold level for the amplifier. The ability of the
15 controller to select the sensitivity of the amplifier allows the receiver to provide a motivational stimulus that can be varied in dependence upon the distance of the animal from the transmitting antenna 18. The selected amplifier sensitivity may, for example, be
20 varied in steps of increasing sensitivity during each antenna scan until either maximum sensitivity is reached or a signal is detected. Each of the sensitivity ranges may generally define a particular zone of distance from the transmitting antenna 18. The controller 20 may be programmed to utilize
selected control parameters pursuant to the selected amplifier sensitivity at which a signal is detected.

Proceeding to step 66b, the controller 20
25 executes a delay step during which any transient signals caused by activation of the selected antenna and the amplifier may be given sufficient time to dampen. Then, in step 66c, the latch L by which the controller samples the amplified signal is reset so
30 that the effect of any transient signal is cleared from the latch. The controller 20 is then prepared to detect the presence of a signal according to the latch becoming set. Each selected antenna in the sequence is preferably activated for a predetermined detection interval during which the signal, if any, received by
35 the activated antenna is supplied through filter 32 to

amplifier 34 so that the controller may detect the presence of an amplified signal from the amplifier. Proceeding to step 66d from step 66c, the controller 20 sets a loop counter which is a control parameter that determines the detection time interval.

Proceeding from step 66d, the controller 20 begins a detection loop in step 66e wherein the signal detection latch L is sampled to determine whether a signal has been detected. In embodiments wherein the detection latch L includes a counter, the test performed in step 66e may include examining the value of the counter in order to determine whether the latch has recorded a selected number of signal transitions received from the amplifier 34. If the test performed in step 66e indicates that no signal has been detected, then the controller proceeds to step 66f, wherein a time-out counter is decremented. Then, in step 66g, the time-out counter is examined to determine whether the detection interval has expired. If, in step 66g, the detection interval has expired, then the controller 20 returns to step 64 in order to activate the next antenna in the selected sequence. Otherwise, the controller 20 returns to step 66e. The controller will repeat steps 66e, 66f, and 66g until a signal is detected in step 66e or time-out is reached in step 66g. If a signal is detected during step 66e, then the controller 20 proceeds to step 68 as shown in Fig. 3a in order to authenticate the received signal.

In step 68, the controller 20 determines whether or not the detected signal possesses predetermined characteristics corresponding to an authentic signal from the transmitter 16. The transmitter signal 50 preferably possesses well-defined temporal characteristics, such as a particular carrier frequency and modulation frequency. As shown

in Fig. 2, the transmitter signal 50 is composed of a 10 kHz square wave modulated by a 30 Hz square wave. Such modulation results in a signal having an active interval 50a wherein the 10 kHz component is active for approximately 17 milliseconds. The active interval of the transmitter signal 50 is followed by an inactive interval 50b wherein the signal amplitude remains essentially 0 for approximately 17 milliseconds. Since the signal generated by the transmitter may vary according to the age of the transmitter, the tolerance of the transmitter components, and environmental conditions, the signal authentication step 68 incorporates tolerances which are wide enough to authenticate signals wherein the high frequency component may vary from approximately 9 to 11 kHz and the low frequency component, i.e., the modulation envelope of the carrier signal, may vary from about 25 Hz to about 35 Hz. In order to permit such a wide variation of the transmitted signal while still rejecting spurious signals, the signal authentication step 68 preferably includes a multi-stage verification procedure in which a particular temporal sequence of the transmitted signal including successive active and inactive intervals of the transmitted signal is detected.

A suitable signal authentication procedure corresponding to step 68 of Fig. 3a is shown in Fig. 3c. Upon entry from step 66 wherein a signal has been detected, a first time-out counter is set in step 68a. The first time-out counter, TIMEOUT1, controls a first verification loop which detects the onset of the inactive portion of the detected signal at any time within a 20 millisecond time-out interval. The 20 millisecond interval is selected to permit verification of a modulation signal having a frequency

of at least 25 Hz. The first verification loop proceeds from step 68a to step 68b wherein the signal detection latch L of the controller is set to 0. From step 68b, the controller 20 proceeds to step 68c
5 wherein execution is momentarily suspended, such as by a series of null operation instructions. From 68c, the verification loop proceeds to step 68d wherein the controller determines whether the signal detection latch L was set during step 68c. If, in step 68d, it
10 is determined that the signal detection latch L has been set, then the received signal is still active and the controller 20 proceeds to step 68e wherein the time-out counter is decremented. From step 68e, the controller 20 proceeds to step 68f wherein it is
15 determined whether the first time-out interval has elapsed. If the first time-out interval has not elapsed, then the controller 20 returns to step 68b. If, in step 68f, it is determined that the time-out interval has elapsed, then a signal has been detected
20 which has an active interval longer than 20 milliseconds. Since the authentic transmitter signal possesses an active interval which is at most 20 milliseconds long, then a time-out condition detected in step 68f is an indication that a false signal has
25 been detected. Upon detection of a false signal in step 68f, the controller 20 proceeds to step 68g wherein the failure to pass the first verification test may be recorded or added to a count of such false detected signals, and the amplifier may be turned off.
30 From step 68g, the controller 20 proceeds to step 74 to log any selected data about the false signal detected.

If, in step 68d, the signal detection latch L is not set, then the received signal has become
35 inactive during the first time-out interval and the

first verification step has been passed indicating that the modulation frequency of the detected signal is above 25 Hz. The controller 20 then proceeds to step 68h to begin a second verification loop wherein the detected signal is tested for a second time-out interval, such as 14 milliseconds, to determine whether the detected signal remains inactive for the second time-out interval. The second time-out interval is determined according to a time-out counter, TIMEOUT2, set in step 68h. From step 68h, the controller proceeds to step 68i wherein execution may be momentarily paused. The pause step 68i is optional during this second verification loop. During verification loops such as in 68a-f wherein the controller 20 is verifying an active phase of the detected signal, it may be desirable to include such a pause so that the detection latch L may be provided with sufficient time to become set or accumulate a count of the number of carrier signal oscillations detected during the pause. During verification loops such as in 68h-l wherein the controller 20 is verifying an inactive phase of the detected signal, such a pause may not be necessary since only a single detection oscillation may be sufficient to disqualify the detected signal. In an environment which poses significant radio interference, however, it may be desirable to verify inactive portions of the signal by determining that the number of detected oscillations is below a selected value determined according to the carrier frequency and the operating speed of the controller.

From step 68i, the controller 20 proceeds to step 68j wherein the detection latch L is examined to determine whether it has been set by a detected signal. If the latch has not been set, the controller

20 proceeds from step 68j to step 68k wherein TIMEOUT2 is decremented, and then to step 68l wherein it is determined whether the second time-out interval has elapsed. If the second time-out interval has not
5 elapsed, the controller 20 returns to step 68i. If, in step 68l, it is determined that the second time-out interval has elapsed, then the detected signal has remained inactive for 14 milliseconds, thus passing the second verification test thereby representing that
10 the modulation frequency of the detected signal is less than approximately 35 Hz. The controller 20 proceeds from step 68l to a third verification step 68m if the second time-out interval has expired. If, however, in step 68j, it is determined that the signal
15 has become active at any time during the 14 millisecond second verification interval, then the frequency of the modulation envelope exceeds 35 Hz and the controller 20 proceeds from step 68j to step 68p wherein the failure to pass a verification step beyond
20 the first verification step may be recorded in a false signal event counter.

The third verification loop, shown as a single decision step 68m in Fig. 3c, is structured similarly to the second verification loop 68h-l.
25 During the third verification test 68m, a time-out interval, TIMEOUT3, of 6 milliseconds is established during which a return to an active signal is detected. If, during step 68m, the detected signal does not return to an active condition during the 6 millisecond
30 third time interval, then the detected signal will have remained inactive for a total of at least 20 milliseconds comprising the 14 milliseconds from the second verification loop and an additional 6
35 milliseconds for this third verification loop and the controller 20 will proceed to step 68p to record a

false signal event. If, during step 68m, the detected signal does return to an active condition, then the third verification test is passed and the controller proceeds to step 68n for a fourth verification loop.

5 During step 68n, a fourth time-out interval, TIMEOUT4, of 14 milliseconds is established during which the signal detection latch L is cyclically reset and then tested to determine whether the latch remains in the reset condition. The fourth verification loop,
10 shown as a single decision step 68n in Fig. 3c, is structured similarly to the first verification loop 68a-f. If, at any time during the fourth time-out interval the detection latch L remains in the reset condition signifying that a signal is no longer being
15 detected, then the fourth verification test is failed and the controller proceeds to step 68p to record a false signal event. If, during step 68n, the detection latch L does not remain in the reset condition, then the fourth verification test is passed
20 and the controller proceeds to the fifth verification loop of step 68o.

 During step 68o, a fifth time-out interval, TIMEOUT5, of 6 milliseconds is established during which the detection latch is repeatedly reset and then
25 tested as to whether the detection latch remains in the reset condition during the fifth time-out interval thus indicating a return to the inactive portion of the expected transmitter signal. If, during step 68o, the detected signal does not return to an inactive
30 condition, then the controller proceeds to step 68p to record a false signal event. If, during step 68o, the detected signal does return to the inactive phase, then the controller proceeds to step 70 to apply a stimulus to the animal.

The multi-stage verification procedure of the type shown in Fig. 3c will produce an affirmative result upon detection of a received signal having, in sequence, an active portion of less than 20
5 milliseconds followed by an inactive portion ranging from just over 14 milliseconds to just under 20 milliseconds in duration, followed by an active portion ranging from just over 14 milliseconds to just under 20 milliseconds in duration. An additional
10 level of signal verification may be provided in embodiments wherein the detection latch L of the controller 20 incorporates a counter for counting the number of signal transitions produced by the amplifier. For example, during those portions of the
15 verification procedure wherein the received signal is tested for activity, such as in step 68d, it may be required that the latched count exceed a predetermined decision value rather than determining that the latch has merely been set. The decision value would be
20 determined by the length of the pause step 68c, the anticipated frequency of the transmitter signal, and the clock frequency of the controller.

Returning to Fig. 3a, it can be seen that if, in step 68, the signal has been determined to be
25 authentic, then the controller proceeds to step 70 wherein the selected antenna and the amplifier are deactivated and a motivational stimulus may be applied to the animal. The character of the initial stimulus is determined according to control parameters which
30 were initialized in step 62 and selected in accordance with the selected amplifier sensitivity. The controller 20 in step 70 may examine the contents of control registers which were initialized in step 62 to determine the stimulation that the animal is to
35 receive. For example, a stimulation control register

Fu

may contain a bit used to indicate that the animal is to receive an audible stimulus. Another bit in the stimulation control register may be used to indicate that the animal is to receive an electrical stimulus.

5 The stimulation control register may also include values indicating the number of stimulations or the duration of the stimulations which are to be applied to the animal in step 70. The controller determines the stimulus which is to be applied to the animal and

10 operates the transducer to apply the stimulus.

Proceeding from step 70 to step 72, the stimulation control registers may be modified according to values contained in other control registers. For example, the controller may, in step

15 72, increment a counter which counts the number of times that stimulation step 70 has been executed. If it is desired, for example, to apply a finite number of electrical shocks to the animal when the animal is within sufficient proximity to the transmitting

20 antenna to effect stimulation, then the stimulation modification step 72 may include a provision to reset the control bit for shocking the animal after the desired number of shocks have been applied. Then, the antenna and the amplifier are re-activated and the

25 controller proceeds to step 76 to determine whether a signal is still present. If the presence of a signal is detected, then the controller returns from step 76 to the signal verification step 68 in order to determine whether the animal is still within the

30 vicinity of the transmitting antenna.

If, in step 68, it is authenticated that the animal is still in proximity to the transmitting antenna, then the controller will again proceed to step 70 to stimulate the animal. If the stimulus

35 control register was altered during step 72 to reset

the shock control bit, the animal will not receive a shock in step 70.

By counting the number of stimuli which have been applied to the animal and by modifying the type of stimuli which the animal is to receive during successive applications or non-applications of the stimuli, the receiver circuit provides the ability to program a wide variety of motivational control sequences which may be adapted to animals of varying temperament. Additionally, the ability to count and modify the stimuli provides the ability to set an absolute maximum number of stimulations which are to be applied to the animal resulting in a fail-safe condition in the event that the animal should become trapped or otherwise physically restrained within sufficient proximity to the transmitting antenna to trigger the application of the motivational stimulus.

The receiver circuit may apply one or more electrical stimuli to the animal during the stimulation step 70. The number of stimuli that will be applied during step 70 is determined by a preselected value stored in the memory of the controller. The perceived strength of the stimulation received by the animal depends upon the frequency at which multiple stimuli are applied during step 70. In order to provide the ability to adapt the strength of the electrical stimulation to the temperament of the animal, the stimulation step 70 can include one or more delay loops that are executed conditionally in response to one or more preselected flags or loop values. For example, the stimulation step 70 may include a counting loop for causing a fixed time delay between electrical stimulations that is executed only if a predetermined flag has been set. Alternatively, or in addition thereto, the counting loop may be

controlled by an index value that may selected to provide a time delay between stimuli that is appropriate for the temperament of the animal to be confined.

5 The controller may keep a record of the number of fail-safe events as may occur during operation of the receiver so that the owner of the animal may be made aware of the relative tendency of the animal to remain in the vicinity of the
10 transmitting antenna. If the receiver unit logs a large number of fail-safe events, for example, the owner may take appropriate action such as selecting a greater degree of initial stimulation to more strongly discourage the animal from approaching the
15 transmitting antenna.

 The cycle of stimulation in step 70, modification of stimulation in step 72, and signal detection and verification in step 76 and 68 continues until, in step 76, a signal is no longer detected or,
20 in step 68, a valid signal is no longer detected. In such instances, the controller proceeds to step 74 wherein data accumulated since the last initialization step is recorded or updated. Such data may include the type of verification failure which was detected
25 during the verification step, the number of stimulations which have been applied to the animal, the number of fail-safe events, and the accumulated time that the receiver has been in service since the last initialization.

30 An embodiment of the circuitry for the receiver unit 10 is shown schematically in Figs. 4A-C. Representative values of the circuit components shown therein are listed in Table 1.

TABLE 1

	R1, R4, R6, R7	2 M Ω
	R2, R8	1 M Ω
	R3	560 k Ω
5	R9, R12	100 k Ω
	R10	620 k Ω
	R5	10 k Ω
	C5	220 μ F
10	C1, C6	100 μ F
	C3	.0068 μ F
	C4	220 pF
	C2, C2'	15 pF
15	L ₁	33 mH
	L ₅	1 mH
	X1	32.768 kHz
20	U1	PIC16C54 controller
	U2	S-8435BF regulator
	U3	93C46 EEPROM
	U4	MAX921 comparator
	U5	S-8435FF regulator
25		

Referring to Figs. 4A-C, the controller 20 may be a microcontroller U1 such as a PIC16C54 microcontroller U1 manufactured by Microchip Technology of Chandler, Arizona. The microcontroller U1 includes a plurality of tri-state bidirectional I/O connections which are logically configured to be addressed as register ports A and B. Register port A is employed to perform the function of the antenna selector switch 22. Three of the I/O pins of port A are used to generate the signals labelled ZAXIS, YAXIS, and XAXIS respectively. In order to selectively activate, for example, the Z-axis antenna, a single word may be written to port A by the microcontroller to drive the ZAXIS signal low while leaving the YAXIS and XAXIS signals in a disconnected state. The remaining I/O pin of port A is used to generate the signal 3VON which is employed for power

control purposes. I/O port B includes pins for generating signals RANGE1 and RANGE2 which may be used to establish the operating threshold of the receiver amplifier, HVENABLE which is used to control power to the transducer, PULSE1 which is used to activate the electrical shock component of the transducer 40, and TONE which is used to drive the audible signal component of the motivational transducer 40. The remaining I/O pins of port B are employed to communicate with the nonvolatile memory 26 which is preferably a 1 kbit 93C46 EEPROM U3 manufactured by Microchip Technology. The 93C46 EEPROM U3 utilizes serial input and serial output data communication and thus a single pin D of the microcontroller may be used for both input and output to and from the EEPROM U3 while two other pins of the microcontroller U1 are used to generate the chip select CS and clocking signals CK required to read from and write to the EEPROM. Since use of the EEPROM is not required during all procedures executed in the operation of the receiver, the power supply connection V+ of the EEPROM is connected with the 3VON signal of port A of the microcontroller. Thus, whenever it is desirable to read from or write to the EEPROM, the 3VON pin is activated prior to performing such a read or write so that the EEPROM may be turned off when it is not needed.

The signal detection latch L is provided by a real time clock counter at the RTCC input to the microcontroller U1. The RTCC input connects with a asynchronous latching and counting register that is internal to the microcontroller chip. Oscillator inputs OSC1 and OSC2 of the microcontroller are connected with a crystal oscillator circuit having an oscillation frequency of 32.768 kHz. Such an

operation frequency allows the microcontroller to easily keep track of actual time since each instruction cycle at this frequency is a convenient submultiple of a second.

5 The power supply system includes a battery B which is preferably a 3-volt lithium battery. A capacitor C6 may be connected in parallel with the battery to stabilize the battery voltage. An inductor L1 is connected between the control input C of a
10 voltage regulator 24a and the positive battery voltage, VBATT. The voltage regulator U2 is preferably an S-8435BF step-up CMOS switching regulator manufactured by Seiko Instruments Incorporated of Tokyo, Japan. The voltage regulator
15 24a provides a stable 3-volt regulated output at the terminal labelled +3V for battery voltages as low as .9 volts. Step-up regulation is achieved by the regulator 24a by an internal controlled oscillator which switches current within the inductor L1. The
20 resulting output voltage is fed back to the input voltage connection V+ for additional stability. In order to prevent electromagnetic emissions from the inductor L1 of the regulator circuit 24a from interfering with radio signal detection, the voltage
25 regulator is only operated intermittently during the control procedure and only when radio signal detection is not being performed. In order to operate the regulator, an on/off input ON of the regulator is connected with the 3VON signal from the
30 microcontroller U1.

A capacitor C1 is connected between the +3V output of the voltage regulator 24a and ground. Activation of the voltage regulator 24a charges the capacitor C1 which is capable of storing sufficient
35 charge for operating the microcontroller during the

signal detection and verification phases of the control procedure. After capacitor C1 is charged, the regulator 24a may be deactivated and the controller U1 may then operate using the capacitor voltage. A fresh
5 nominal 3-volt battery B will provide a voltage somewhat in excess of three volts. When a fresh battery is installed within the receiver, the step-up voltage regulator U2 will pass the actual battery voltage above 3 volts to the +3V output of the
10 regulator via inductor L1 and an internal diode so that the microcontroller U1 may begin operating.

The battery voltage VBATT is also connected via resistor R1 to the I/O terminal D of port B. I/O pin D is also used to communicate data with the memory
15 26. The resistor R1 is of a sufficiently high value that data communication between the microcontroller U1 and the memory 26 is not affected by the battery voltage. Such connection of the battery voltage to one of the I/O pins allows the microcontroller to
20 determine when the battery has been removed or when the battery voltage has dropped below the logic low threshold, nominally 1.5 volts, of the microcontroller. Upon detection of a low battery signal, the microcontroller U1 may be programmed to
25 dump accumulated operational data such as event counters and timer values into the nonvolatile memory 26 so that such data will not be lost if the receiver loses power.

The receiving antennae 30, resonant filter
30 31, and thresholding amplifier 34 are shown in Fig. 4B. The antenna assembly includes three mutually orthogonal inductors 30x, 30y, and 30z. The inductors are all connected to a common node at terminal 31 and to respective control signal lines XAXIS, YAXIS, and
35 ZAXIS at the other terminal of each inductor. A

capacitor C3 is connected between the terminal 31 and ground. The capacitor C3, in combination with whichever of the inductors is activated, forms an LC resonator tuned to the carrier frequency of the expected transmitter signal. The common connection terminal 31 of the antennae is also connected with the emitter of transistor Q1 which may be a 2N5089 NPN transistor. The base and collector of transistor Q1 are connected with the +3V power line via resistor R2 thus amplifying the resonant signal developed at the common connection terminal 31 of the antennae 30X, 30y, and 30z.

The collector and base of transistor Q1 are connected to the base of transistor Q2 which may also be a 2N5089 NPN transistor configured as a common emitter amplifier having its collector connected with the +3V power line via bias resistor R3. The collector of transistor Q2 is capacitively coupled via capacitor C4 to a noninverting input of thresholding amplifier U4. The thresholding amplifier U4 is preferably a MAX921 ultra-low power comparator manufactured by Maxim Integrated Products. The thresholding amplifier U4 serves to compare signals received upon the non-inverting input to an internal 1.18 volt reference and to produce a saturating output upon the RTCC signal line in response to input voltages exceeding the reference level. The comparison is performed according to an adjustable hysteresis range that is determined in part by resistor R5 which is connected between the hysteresis input of the amplifier U4 and the inverting input of the amplifier U4. Resistors R6 and R7, which are connected between the hysteresis input and respective signal lines RANGE1 and RANGE2, also serve to determine the hysteresis levels of the amplifier

depending upon whether RANGE1 or RANGE2 is asserted. Thus, the sensitivity of the thresholding amplifier U4 may be controlled via signal lines RANGE1 and RANGE2 to produce a saturating output on the RTCC line
5 according to a selected hysteresis level. In embodiments wherein multiple threshold levels is not desired, a single RANGE signal may be used to activate the amplifier threshold. The spare I/O pin thus
10 obtained may then be used to perform the battery testing functions of I/O pin D.

Each of the amplifier sensitivity settings determined by assertion of signals RANGE1 or RANGE2 may be associated with a different stimulus control register value. For example, the controller may be
15 programmed to apply only an audible signal when the amplifier is operated at a relatively low threshold in accordance with the associated low threshold control register value. In this manner, the type of stimulus applied to the animal may be selected in accordance
20 with the strength of the received signal so that the stimulus may be increased in character as the animal moves closer to the transmitting antenna. In order to provide a greater number of range settings, the signals RANGE1 and RANGE2 may alternatively be
25 connected with address inputs of a 2:4 demultiplexer. The output connections of the demultiplexer would then be connected with the hysteresis input of the amplifier via a set of resistors having a range of values. A still greater number of range settings may
30 be achieved via the use of a larger demultiplexer wherein the RANGE1 and RANGE2 inputs are used to clock a serial address into a shift register controlling the demultiplexer in order to activate a particular amplifier sensitivity range.

In Fig. 4C there is shown a schematic diagram of a motivational transducer 40. The transducer includes components for selectively producing audible and/or electrical stimulation. In order to allow the transducer components to produce sufficiently energetic stimulation to affect the behavior of the animal, a voltage regulator 24b is connected to provide power at a relatively high voltage, such as 12 volts, to the transducer components. The voltage regulator 24b is preferably an S-8435FF CMOS step-up switching regulator U5 manufactured by Seiko Instruments Incorporated of Tokyo, Japan. The regulator 24b is powered by the VBATT signal line and is controlled by an inductor L5 connected between a control input C of the regulator and VBATT. The regulator 24b may be switched on or off in response to the HVENABLE signal from the microcontroller U1 so that the regulator U5 is preferably activated only when a motivational stimulus is to be applied to the animal.

In order to cause the transducer 40 to produce an audible stimulus, the microcontroller U1 asserts the HVENABLE signal and then toggles the TONE signal at a rate which determines the frequency of the sound to be produced. The TONE signal line from the microcontroller is connected with the gate of field-effect transistor (FET) Q3. The drain connection of FET Q3 is grounded and the source connection of FET Q3 is connected with the HV output of the regulator U5 via resistor R9. The source terminal of FET Q3 is also connected with the gates of a complementary FET pair 65 comprising transistors Q4 and Q5. The complementary pair 65 is connected to drive a speaker, such as piezoelectric speaker S1, thus producing the desired audible signal.

In order to produce an electrical shock stimulus, the microcontroller U1 initiates the following sequence of operations. The HVENABLE signal is asserted, causing regulator U5 to produce a high-voltage output at the HV terminal. The high-voltage output of regulator U5 charges capacitor C5. The HVENABLE line remains asserted by the microcontroller U1 for a period of time sufficient to charge capacitor C5. When this charging delay has elapsed, the microcontroller turns off the HVENABLE line. With capacitor C5 charged, the electrical transducer 40 is prepared to apply an electrical shock stimulus to an animal. In order to cause the stimulus to be applied, the microcontroller asserts signal PULSE1. Signal PULSE1 is capacitatively coupled, via capacitor C4, to the gate of FET Q6. The gate of FET Q6 is also connected to ground via a pull-down resistor R10 to prevent accidental pulse triggering. The drain of FET Q6 is connected to ground and the source of FET Q6 is biased via resistor R12 which is connected to the HV output of regulator U5. The source of FET Q6 is also connected with the gates of a complementary FET pair 67 comprising FETs Q7 and Q8. The complementary pair 67 also provides a consistently sharp turn-on signal to FET Q9 which is connected between a primary terminal of transformer T1 and ground. The other primary terminal of transformer T1 is connected to the HV signal line. When FET Q9 has been turned on, capacitor C5 will begin to discharge through the primary coil of transformer T1. The microcontroller U1 then asserts signal PULSE1 in order to cause capacitor C5 to begin to discharge through the primary of transformer T1. The gate voltage of FET Q6 will be driven high by activation of PULSE1 and the voltage will then decay according to the time constant of R10

and C4. This decay time may be selected to correspond to the time required for maximum current to be developed within the primary coil of transformer T1. When FET Q6 is turned off by decay of the gate voltage, complementing pair 67 will switch off FET Q9 thus interrupting the current in the primary of the transformer. The interruption of current in the primary circuit of the transformer T1 due to switching off Q9 causes a high voltage, such as 1.2 Kv to be developed between the terminals 42 and 44 of the secondary coil of transformer T1. During stimulation applications wherein only an audible stimulus is applied, the capacitor C5 will also be charged. In order to protect capacitor C5 from damage due to self-discharge and to recover the unused charge, a resistor R8 may be connected between the HV line and the +3V line. The resistor R8 is of a sufficiently high value to allow capacitor C5 to discharge without significantly increasing the voltage on the +3V line. In alternative embodiments, the source of the complementary pair of FETS Q7 and Q8 may be connected via a resistor to the gate of FET Q6 in order to lock FET Q6 into an "on" condition when a pulse has been received via signal line PULSE1. The microcontroller may then pause for a sufficient period of time for maximum current to develop in the primary. After such a delay, the microcontroller U1 returns signal PULSE1 to a low condition thus causing a negative voltage spike to be transmitted to the base of transistor Q6 via capacitor C4. The negative voltage spike applied to the base of FET Q6 will cause the complementary pair 67 to rapidly switch FET Q9 to an "off" condition.

The secondary terminals 42 and 44 of transformer T1 are connected with a pair of contacts

which are held against the skin of the animal. Thus, the high voltage developed across the secondary terminals of transformer T1 will cause an unpleasant sensation, such a momentary muscle contraction, to be
5 felt by the animal.

It has been found that the effectiveness of electrical stimulation produced by transducer 40 can vary greatly depending upon environmental characteristics such as moisture on the animal's skin
10 in the area of the electrical contacts. Under normal, dry conditions, the electrical characteristic between two terminals placed against an animal's skin, such as upon a dog's neck, is of the "crowbar" type wherein a large voltage is developed between the terminals until
15 a threshold voltage is reached at which point a low-resistance path between the terminals is established by subcutaneous ionic conduction. Under moist conditions, however, a conduction path may be established upon the skin surface between the
20 electrical contacts which will prevent the subcutaneous threshold voltage from being reached. In order to reduce this undesirable effect, a threshold voltage conduction device, such as a spark gap 82, may be connected in series between one of the transformer
25 secondary terminals and one of the skin contacts. Such a series-connected threshold device preferably has a threshold voltage below the subcutaneous threshold yet sufficient to prevent conduction between the skin contact terminals before the subcutaneous
30 threshold has been reached.

Another undesirable effect associated with electrical shock production is that, if the skin contacts are disconnected from the animal or poorly connected to the animal, then the resulting high
35 resistance path between the secondary terminals of the

transformer may cause a voltage to be developed between the secondary transformer terminals that is high enough to damage the transformer. In order to prevent such damage to the transformer, FET Q9 may
5 include a threshold voltage conduction device between the drain and source terminals to clamp the primary voltage to a level that is low enough to prevent damage to the transformer. Alternatively, a second threshold voltage conduction device, such as a spark
10 gap 84, may be connected in parallel across the secondary terminals of the transformer. The parallel-connected threshold voltage conduction device preferably has a threshold voltage that is well in excess of the subcutaneous threshold voltage of the
15 animal so that the parallel threshold device serves to prevent damage to the secondary terminals of the transformer without detracting from the effectiveness of the electrical shocks to be applied to the animal.

Referring now to Fig. 3D, there is shown a
20 more detailed flow diagram showing how the stimulation step 70 and the stimulation modification step 72 may be controlled via the use of counters and other stimulation control registers. Step 70 is divided into steps 70a-d, and step 72 is divided into steps
25 72a-g.

Upon entry to step 70a from step 68, the controller 20 tests whether an audio control register, AUDIO_BIT, is set. If AUDIO_BIT is set, the controller proceeds to step 70b in which an audible
30 stimulus is generated. After the audible stimulus has been generated, or if AUDIO_BIT was not set during step 70a, the controller proceeds to step 70c. In step 70c, the controller determines whether an electrical control register, ZAP_BIT, is set. If
35 ZAP_BIT is set, the controller proceeds to step 70d

wherein an electrical stimulus is applied to the animal. After step 70d, or if ZAP_BIT was not set during step 70c, the controller proceeds to the stimulation modification step 72 beginning at step 5 72a. The initial values of AUDIO_BIT and ZAP_BIT registers may be retrieved from nonvolatile memory 26 and stored in a soft register when the controller 20 is initialized as in step 62. Additional control registers may be used to store loop counters to be 10 utilized in steps 70b and/or 70d if it is desired to apply a plurality of audible and/or electrical stimuli during each execution of step 70. As mentioned previously, such application of multiple stimuli can be further controlled by registers pertaining to the 15 time interval between applications of the stimulus to be controlled.

In step 72a, a register MAX_COUNT is decremented. MAX_COUNT may be initialized during step 62 to contain a predetermined number of maximum 20 stimuli which are to be applied to the animal so that fail safe operation is provided if the animal remains within the detection of the receiver for an extended period of time. If, in step 72a, MAX_COUNT is found to be zero, then the controller 20 proceeds to step 25 72i wherein the AUDIO_BIT and ZAP_BIT registers are reset so that no further stimulation will be applied to the animal if a valid signal is still present.

If, in step 72a, MAX_COUNT is not zero, then the controller 20 proceeds to step 72b wherein 30 MAX_COUNT is decremented. From step 72b, the controller proceeds to step 72c wherein another counter, COUNT_1, is tested to determine whether it is zero. COUNT_1 is a control register which determines the duration of the stimulation applied to the animal 35 or the number of times that step 70 is executed. If,

in step 72c, COUNT_1 is not equal to zero, then the controller proceeds to step 72d wherein COUNT_1 is decremented. Then, in step 72e, the control bits AUDIO_BIT and ZAP_BIT may be set and the controller
5 exits step 72 so that upon subsequent execution of step 70, audible and electrical stimulation will continue to be applied to the animal.

If, in steps 72c, COUNT_1 is equal to zero, then the controller proceeds to step 72f wherein a
10 counter, COUNT_2, is compared to zero. COUNT_2 may be used in conjunction with COUNT_1 to provide alternating intervals of stimulation and nonstimulation applied to the animal when the animal is in the vicinity of the transmitting antenna. If,
15 in step 72f, COUNT_2 is not equal to zero, then the controller proceeds to step 72g wherein COUNT_2 is decremented. From step 72g, the controller proceeds to step 72i wherein AUDIO_BIT and ZAP_BIT are reset so that subsequent execution of step 70 will result in no
20 stimulation applied to the animal. No stimulation will be applied for the period set by COUNT_2.

If, in step 72f, COUNT_2 is found to be equal to zero, then the controller may proceed to step 72h wherein COUNT_1 and COUNT_2 may be reinitialized
25 to predetermined values stored in the nonvolatile memory 26. Upon completion of step 72, the controller proceeds to step 76. Additional functions may be included in the execution of step 72 such as recording the number of stimulations applied to the animal and
30 reactivating the selected antenna and the amplifier prior to proceeding to step 76.

In a preferred embodiment, the values COUNT_1 and COUNT_2 are selected to provide alternating ten second intervals of stimulation and
35 nonstimulation. Additionally, the variable MAX_COUNT

is selected to limit the periods of stimulation to three successive ten second periods. Since the controller operates at a clock frequency that is an integral power of two, the instruction cycle of the controller and hence, the various counters as may be used in the execution of the control procedure, can be easily correlated with actual elapsed time.

When the receiver unit 10 is initially programmed, the sequence of operational instructions and the control parameters which define the type of motivation to be applied to the animal are loaded into the non-volatile memory or into an internal memory of the microcontroller. The receiver circuitry is then preferably hermetically sealed within an enclosure that can be mounted upon the animal. After the receiver has been in service, it may become desirable to retrieve accumulated data, alter the control parameters, or modify the control program itself. For example, the owner of an animal may wish to know how many motivational stimuli were applied to the animal during a given period of time. In addition, it may be desirable to retrieve the number of recorded false signal events in order to correct radio interference problems.

Retrieval of information from the receiver unit and alteration of information within the receiver unit may be accomplished in several ways. The simplest approach is to remove the memory and/or the microcontroller from the receiver unit and to use conventional electronic equipment to read and/or write to these components. However, it may be desirable to permanently seal the receiver circuit within a housing. In such instances, the receiver circuitry permits communication with external devices via the

transmitter, the battery connection VBATT, and/or the speaker S1.

In a first embodiment of a system for communicating information with the receiver circuit, a
5 second signal verification algorithm is incorporated into the control program in addition to the signal authentication procedure of step 68. This second signal verification procedure is designed to identify a characteristic programming or interrogation signal
10 that is distinct from the boundary-defining signal of the transmitter. The transmitter may be equipped with an additional device for generating such an interrogation signal upon demand. Upon receipt and identification of the interrogation signal, the
15 receiver unit may be further programmed to retrieve logged data, such as the number of motivational stimuli which have been applied to the animal, to arrange this data in serial form, and then to operate the audible signal transducer via the TONE and
20 HVENABLE lines to transmit the data in an encoded format such as frequency shift keying. The operator of the system is provided with a data retrieval device which includes a microphone for converting the encoded audible signal into an electronic signal and a
25 decoding circuit for decoding and displaying the encoded serial data so that the data is presented to the operator in an intelligible format, such as via an alphanumeric display.

In an alternative embodiment of a data
30 retrieval system, data may be retrieved by removing the battery from the unit and by inserting a data retrieval probe into the battery compartment. The transmitter may then be operated to generate the interrogation signal and the microcontroller may be
35 programmed, upon recognition of the interrogation

signal, to transmit serial data to the data retrieval probe via the VBATT signal connection to I/O pin D of the microcontroller U1. The microcontroller may further be programmed to download serial data via the VBATT signal line in response to detection of a predetermined programming signal from the transmitter.

In an alternative embodiment of a system for downloading data to the controller, the controller may be programmed to recognize a predetermined number of transitions on the VBATT line within a predetermined interval of time to signify that a data retrieval probe has been inserted into the battery compartment. The controller may then respond by communicating with the data retrieval probe to upload and/or download data as desired.

In other alternative embodiments, data may alternatively be downloaded to the receiver via the radio signal from a transmitter. The controller may be programmed to download encoded serial data via the detection latch L subsequent to receipt of a characteristic interrogation signal from the transmitter or other external device.

A potential difficulty in using the battery connection to communicate data between the controller and an external device in the embodiment shown in Fig. 4A is that the controller must operate during such communication using only the limited energy stored in capacitor C1 since the battery is removed during such communication. Additionally, the capacitor C6 and the resistor R1 can limit the rate at which data may be communicated via the battery connection. These and other difficulties can be overcome in alternative embodiments such as the one shown in Figs. 5A and 5B. It should be apparent that the circuitry of 5A and 5B can be substituted for the corresponding circuitry

shown in Figs. 4A and 4B. The features provided in such an alternative embodiment are discussed hereinafter with reference to Table II which lists the preferred values of the components shown in Figs. 5A and 5B that differ from those listed in Table I.

TABLE II

	R13	2M Ω
	R14	100k Ω
	R15	10k Ω
10	R16	12.4k Ω
	R17	1M Ω
	C7	.0068 μ F

Referring now to Fig. 5A, it can be seen that the positive terminal of the battery B is in electrical contact with terminals 80 and 82 of the receiver circuit. Terminal 80 is connected, via a current limiting resistor R14, to the I/O port B of the controller along the signal line designated BCHECK. Terminal 82 is connected to the signal line designated VBATT. A pull-up resistor R13 is connected between VBATT and the control terminal of the voltage regulator U2 so that the voltage regulator will be activated when a battery is initially connected as shown. After the controller begins to function, the control terminal of the voltage regulator is effectively controlled by the 3VON signal as previously described.

In order to establish communication with an external device and to record the passage of time, the controller regularly and periodically executes a subroutine such as is shown in Fig. 6. When this subroutine is invoked at step 90, the controller proceeds to step 92 wherein the 3VON signal is asserted in order to activate the voltage regulator U2 for a sufficient period of time to fully charge capacitor C1. Then, the controller proceeds to step

94 wherein the 3VON signal is deactivated. The controller then proceeds to step 96 wherein the BCHECK signal line is tested in order to determine whether the battery B is connected to terminal 80 of the receiver. If, in step 96, it is found that the battery is connected, then the controller proceeds to step 98 wherein one or more timing registers are incremented in order to maintain a record of the passage of time. Such timing registers can be used, for example, to record the number of days that the receiver unit has been operating. Then, the controller proceeds to step 100 in order to return to the main control procedure.

If, in step 96, it is determined that the battery B is disconnected from terminal 80, then the controller proceeds to step 102 wherein it is determined whether the VBATT signal is asserted. If, in step 102, it is found that VBATT is not asserted, then it is determined that the battery has been removed from the receiver for a sufficient period of time to allow the capacitor C6 to discharge below the positive logic threshold voltage. In such a circumstance, the controller proceeds to step 104 wherein any data stored within the controller's RAM is transferred into the EEPROM in order to avoid loss of such data. Then, the controller proceeds to step 106 wherein an idle loop is executed until either a battery is reconnected to terminals 80 and 82, or until the controller ceases to operate due to lack of power. When the controller detects removal of the battery in accordance with the foregoing, the controller may increment a count of battery removal events that is included with the other data maintained by the receiver unit. Such a count can be useful in, for example, determining whether the receiver unit has

been consuming an abnormal amount of current during life of the unit.

If, in step 102, it is found that VBATT is asserted, then the controller begins a timeout loop at
5 step 108 in order to determine whether VBATT remains asserted for a predetermined period of time that is significantly longer than the time needed for capacitor C6 to discharge. From step 108, the controller returns to step 102 repeatedly until such a
10 period of time has passed.

If, in step 108, it is determined that VBATT has remained asserted beyond the predetermined timeout interval, then such a condition is interpreted to signify that an external device has been connected to
15 terminals 80 and 82 and is capable of maintaining terminal 80 in a low logic condition while maintaining terminal 82 in a high logic condition. The controller then proceeds to step 110 wherein the controller pauses to receive a serially encoded digital signal
20 from the external device via the BCHECK signal line. The controller may be programmed to send a handshaking signal, such as a characteristic pulse, to the external device upon entry to step 110 in order to signify to the external device that the controller has
25 entered step 110 and is prepared to receive data. The signal received from the external device via the BCHECK line in step 110, if any, is then compared to a unique code signifying a request from the external device to download operating parameters or other data
30 to the controller. If, in step 110, such an input request is recognized, then the controller proceeds to step 112 to receive such operating parameters or other data in a predetermined serial sequence. As can be appreciated, the 3VON signal can be maintained in an
35 asserted condition during such a downloading procedure

in order to provide power to the EEPROM via the 3VON signal line. The external programming device must be configured to provide continuous power to the receiver unit via terminal 82 during the downloading operation. More specifically, the external device must be capable of maintaining a power connection to terminal 82 while providing a serial data stream to terminal 80. After having downloaded operating parameters and/or other such data in step 112, the controller proceeds to step 98.

If, in step 110, the received serial code, if any, does not match the unique input request code, then the controller proceeds to step 114 wherein the received code, if any, is compared with a unique code signifying a request made by the external device to receive operating parameters and/or other such data from the receiver. If, in step 114, the received code, if any, does not match the unique output request code, then the controller proceeds to step 98.

If, in step 114, the received code matches the unique output request code, then the controller proceeds to step 116 wherein the controller operates the BCHECK signal line to provide to the external device a serially-encoded data stream that includes the requested data in a predetermined sequential order.

During the downloading step 112 or the output step 116, communication with the external device is conducted along the BCHECK signal line of port B of the controller. Communication between the controller and the EEPROM is conducted along the signal line D of port B of the controller. A resistor R15 is connected between one of the serial data lines D1 or D0 of the EEPROM and the signal line D connected to the controller in order to prevent an undesirable

current loop from forming between the D1 and D0 terminals of the serial EEPROM during operation of the EEPROM.

Among the additional features provided in the alternative embodiment shown in Figs. 5A and 5B is the ability to select the operating frequency of the receiver circuit. For example, as shown in Fig. 5A, a signal line designated FREQ is connected with port B of the controller. In order to operate the receiver at a resonant frequency of 10kHz as has been described, the signal line FREQ is maintained in a high logic condition throughout the main operating procedure. In order to operate the receiver at a different resonant frequency, such as 7kHz, the signal line FREQ is maintained at a low logic level throughout the main operating procedure. The condition of the FREQ signal line that is to be maintained is determined according to a preselected flag register that can be initially programmed, or programmed during the downloading procedure, to cause the controller to operate in a selected one of two frequencies. A demultiplexer may also be used to produce additional channels of operation. A switch may also be used for continuous tuning.

The circuitry that allows the operating frequency of the receiver to be determined by the FREQ signal line is shown in Fig. 5B. As can be seen in Fig. 5B, the FREQ signal line is connected via a capacitor C7 to the common terminal 31 of inductors 30x, 30y, and 30z. When the FREQ signal line is maintained at a low level by the controller, the capacitor C7 is thus effectively connected to ground in parallel with capacitor C3. The parallel combination of capacitors C3 and C7 increases the effective capacitance between the common terminal 31

of the inductors and ground and thus decreases the resonant frequency of the receiver. Alternatively, when the FREQ signal line is maintained at a high logic condition, the capacitor C7 does not contribute to the effective capacitance between terminal 31 and ground, thus the resonant frequency of the receiver is increased.

As can be appreciated, the elimination of the RANGE 1 and RANGE 2 signal lines in favor of the BCHECK and FREQ signals in the circuitry shown in Fig. 5A is merely a limitation imposed by the pin count microcontroller used in the preferred embodiment. In such an embodiment, the hysteresis of the amplifier U4 can be set by resistors R16 and R17 as shown. In alternative embodiments, signal lines may be multiplexed or other controller devices may be used in order to retain all of the features described herein. In other alternative embodiments, the resonant frequency of the receiver may be selected by an appropriate switch or jumper or the like.

An important consideration in the mass production of electronic animal confinement devices is the desire to obtain relatively uniform and predictable behavior of each device. For example, it is desirable for each receiver unit to apply a correctional stimulus to an animal in a consistent and predictable manner. However, individual electronic components of a particular nominal value usually exhibit a deviation from the nominal value within a specified tolerance. Although high precision electronic components are available, the use of such precision components can significantly increase the manufacturing cost of an electronic apparatus. It is particularly difficult to obtain inductive components, such as the inductors 30X, 30Y and 30Z, with precisely

uniform resonance characteristics. During operation of the receiver circuit as shown in Fig. 4B, the magnitude of the resonance peak of the selected inductor, in combination with capacitor C3, will
5 determine the magnitude of the received electromagnetic wave that is sufficient to cause the receiver circuit to produce an electronic signal that is above the detection threshold. Additionally, the width of the resonance peak of the selected inductor
10 will determine the selectivity of the receiver. Variations between receiver units resulting from the resonance characteristics of the inductors can result in decreased uniformity in the behavior of the receiver units.

15 In order to reduce the influence of inductor variations upon the performance of individual receiver units, a selected damping resistor, R_d , can be connected between ground and the common terminal 31 of inductors 30X, 30Y, and 30Z. The value of the damping
20 resistor R_d is selected to be a dominant parameter of the resonance characteristic of the parallel RLC circuit thus formed between terminal 31 and ground when one of the inductive antennae is selected. During the manufacturing process, a large number of
25 inductors can first be tested and then sorted into groups according to their resonance characteristics. The three inductors that are to be installed in a single receiver unit are then chosen from a single sorted group so that each receiver unit is provided
30 with three inductors having similar resonance characteristics. In order to obtain relatively uniform behavior from a large number of receiver units, the damping resistor R_d is selected to be a relatively low value within receiver units employing
35 inductors with relatively sharp, or high Q, resonance

characteristics. Conversely, R_s can be selected to be a relatively high value, or effectively infinite, in receiver units employing inductors with relatively broad, or low Q , resonance characteristics. The
5 degree of damping provided by the damping resistor R_s can be selected to match the resonance characteristics of all of the receivers to a specified characteristic that is at least as broad as the resonance
10 characteristic of those units employing the least selective inductors deemed acceptable. The damping resistor may be provided in the form of a discrete component selected at the time of manufacture or, alternatively, the damping resistor may be one of several well-known types of trimmer resistors.

15 An additional advantage provided by the damping resistor R_s is a decrease in the settling time required for the controller to pause after an antenna is selected and before a signal is detected.

20 It will be recognized by those skilled in the art that changes or modifications may be made to the above-described embodiments without departing from the broad inventive concepts of the invention. It should therefore be understood that this invention is not limited to the particular embodiments described
25 herein, but is intended to include all changes and modifications that are within the scope and spirit of the invention as set forth in the claims.

30

What is claimed is:

1. A device for controlling the movement of an animal relative to a transmitting antenna emitting a signal having a predetermined modulation characteristic, the device comprising:

- (a) a receiving antenna for receiving the transmitted signal;
- (b) an amplifier for amplifying the signal received by the receiving antenna to produce an amplified signal;
- (c) authentication means for authenticating the presence of said modulation characteristic within said amplified signal; and
- (d) transducer means responsive to said authentication means for applying a selected stimulus to the animal when the presence of the modulation characteristic is authenticated by the authentication means.

20

2. A device for controlling the movement of an animal relative to a transmitting antenna emitting a characteristic signal, comprising:

- (a) a first receiving antenna for receiving the characteristic signal having a first terminal and a second terminal;
- (b) a second receiving antenna for receiving the characteristic signal having a first terminal and a second terminal;
- (c) a common connection terminal interconnecting the second terminal of the first antenna to the second terminal of the second antenna;
- (d) activating means connected with the first terminal of the first receiving antenna and the first terminal of the second receiving antenna for

35

selectively activating said first and second receiving antennae;

(e) detection means for detecting the presence of said characteristic signal at said common
5 connection terminal; and

(f) transducer means responsive to said detection means for applying a selected stimulus to the animal when the characteristic signal is detected at the common connection terminal by the detection
10 means.

3. An animal control device responsive to a transmitted signal comprising:

(a) at least a first antenna for receiving the
15 transmitted signal;

(b) a transducer for applying a selected stimulus to the animal; and

(c) control means for controlling operation of the transducer including:

20 (i) timing means for measuring a temporal characteristic of the signal received by the receiving antenna;

(ii) determining means for determining whether said temporal characteristic corresponds to a
25 predetermined characteristic; and

(iii) operating means for operating said transducer responsively to said determining means.

4. The animal control device in accordance with
30 claim 3 comprising:

(a) a filter for filtering the signal received by the first antenna to produce a filtered signal; and

(b) an amplifier for amplifying the filtered signal to produce an amplified signal; and wherein the

timing means measures the temporal characteristic of the amplified signal.

5 5. The animal control device in accordance with claim 4 wherein the control means includes sampling means for sampling the amplified signal and wherein said timing means measures the temporal characteristic of the sampled amplified signal.

10 6. The animal control device in accordance with claim 3 wherein the first antenna has an output terminal and wherein the device includes:

 (a) at least a second antenna for receiving the transmitted signal, the second antenna having an
15 output terminal; and

 (b) a common connection terminal interconnecting the output terminals of the first and second antennae; and

 wherein the control means includes antenna
20 selection means for selectively activating each of the first and second antennae to produce an output signal from a selected one of the first and second antennae at the common connection terminal and wherein the timing means measures the temporal characteristic of
25 the output signal.

 7. The device in accordance with claim 3 wherein the determining means includes first verification means for verifying whether a first temporal
30 characteristic corresponds to a first predetermined verifying parameter and second verification means for verifying whether a second temporal characteristic corresponds to a second predetermined verifying parameter.

35

8. The device in accordance with claim 7 wherein the first temporal characteristic includes duration of an active portion of a signal and the second temporal characteristic includes duration of a non-active
5 portion of the signal.

9. A device for controlling the movement of an animal relative to a transmitting antenna emitting a transmission signal having a selected characteristic,
10 comprising:

(a) a first receiving antenna for receiving the transmission signal;

(b) a second receiving antenna for receiving the transmission signal;

15 (c) activating means connected with the first and second receiving antennae for selectively activating one of said first and second receiving antennae to produce an output signal from the activated antenna;

20 (d) an amplifier for amplifying the output signal from the activated antenna to produce an amplified signal;

(e) detection means for detecting the presence of the selected characteristic in the amplified
25 signal; and

(f) a transducer responsive to said detection means for applying a selected stimulus to the animal when the characteristic is detected by the detection
means.

30

10. An animal control device responsive to a transmitted signal comprising:

(a) a plurality of antennae for receiving the transmitted signal, the antennae having a common
35 output terminal;

(b) antenna activation means for activating each of the antennae in a selected sequence to produce an output signal from said each activated antenna at the output terminal;

5 (c) a resonant filter responsive to the output signal for attenuating frequencies outside a predetermined range to produce a filtered signal;

(d) an amplifier for amplifying the filtered signal to produce an amplified signal;

10 (e) a comparator for comparing an amplitude of the amplified signal with a selected threshold and for producing a comparator output signal when the amplified signal corresponds to the selected threshold;

15 (f) threshold adjustment means for selectively adjusting the selected threshold of the comparator;

(g) authentication means for authenticating the presence of a modulation characteristic within the comparator output signal;

20 (h) power supply means for supplying electrical power, the power supply means including a voltage generator responsive to activation by the authentication means for selectively supplying a generated voltage; and

25 (i) transducer means responsive to the voltage generator and the authentication means for applying a selected stimulus to the animal when the selected modulation characteristic is authenticated by the authentication means after the authentication means
30 activates the voltage generator.

11. The device of claim 1 wherein said modulation characteristic authenticated by said authentication means includes alternating intervals of
35 activity and non-activity and wherein said

authentication means authenticates the presence of selected intervals of the activity and non-activity.

12. The device of claim 11 wherein said authentication means includes detection means responsive to said active interval of said amplified signal for providing an indication that said active interval has been detected.

13. The device of claim 1 wherein said transducer means includes:

(a) a transformer having a secondary coil for connection with said animal for delivering an electrical stimulus to the animal; and

(b) at least a first threshold voltage conduction device connected in series between said secondary coil and said animal for preventing application of said electrical stimulus below a first threshold voltage.

14. The device of claim 13 wherein said transducer means includes a second threshold voltage conduction device connected in parallel with said secondary coil for preventing application of said electrical stimulus above a second threshold voltage.

15. The device of claim 1 wherein said authentication means includes:

(a) counting means for counting the number of applications of the stimulus; and

(b) limiting means for preventing application of the stimulus to the animal when the number of applications of the stimulus exceeds a predetermined limit value.

16. The device of claim 15 wherein said authentication means includes output means for actuating said transducer means to produce an audible signal representative of said number of applications
5 of the stimulus.

17. The device of claim 1 comprising:

- (a) a first power supply for providing a first voltage to said authentication means; and
- 10 (b) a second power supply for providing a second voltage to said transducer means to activate the transducer means; and

wherein said authentication means includes enabling means for enabling said second power supply
15 to produce said second voltage when the presence of said modulation characteristic is authenticated.

18. The device of claim 17 wherein said transducer means comprises:

- 20 (a) a transformer having a primary coil and a secondary coil, said secondary coil for connection with the animal to provide an electrical stimulus to the animal;
- (b) a capacitor connected in parallel with said
25 primary coil and connected with said second power supply so that said capacitor is charged by said second power supply when said second power supply is enabled by said authentication means;
- (c) a switching device connected with said
30 primary coil for switching said primary coil; and
- (d) timing means connected with said switching device, said timing means responsive to said authentication means for activating said switching device for a predetermined time period during which
35 said capacitor discharges via said primary coil and

for deactivating said switching device at the end of said predetermined time period so that the electrical stimulus is produced by said secondary coil.

5 19. The device of claim 18 wherein said capacitor has a selected capacitance so that said capacitor substantially develops a maximum current within said primary coil during said predetermined time period.

10

20. The device of claim 1 comprising:

(a) a battery;

(b) a voltage regulator connected with said battery for providing electrical energy; and

15 (c) a capacitor connected with said voltage regulator for storing a portion of said energy from said regulator; and

 wherein said authentication means comprises regulator control means for deactivating said voltage
20 regulator while said modulation characteristic is being authenticated, said capacitor storing sufficient energy to operate said authentication means while said modulation characteristic is being authenticated.

25 21. The device of claim 2 wherein said transducer means includes:

(a) a transformer having a secondary coil for connection with said animal for delivering an electrical stimulus to the animal; and

30 (b) at least a first threshold voltage conduction device connected in series between said secondary coil and said animal for preventing application of said electrical stimulus below a first threshold voltage.

35

22. The device of claim 21 wherein said
transducer means includes a second threshold voltage
conduction device connected in parallel with said
secondary coil for preventing application of said
5 electrical stimulus above a second threshold voltage.

23. The device of claim 2 comprising:

- (a) a first power supply for providing a first
voltage to said detection means; and
 - 10 (b) a second power supply for providing a second
voltage to said transducer means; and
- wherein said detection means includes enabling
means for enabling said second power supply to produce
said second voltage when the presence of said
15 characteristic signal is detected.

24. The device of claim 23 wherein said
transducer means comprises:

- 20 (a) a transformer having a primary coil and a
secondary coil, said secondary coil for connection
with the animal to provide an electrical stimulus to
the animal;
- (b) a capacitor connected in parallel with said
primary coil and connected with said second power
25 supply so that said capacitor is charged by said
second power supply when said second power supply is
enabled by said enabling means of said detection
means;
- (c) a switching device connected with said
30 primary coil for switching said primary coil; and
- (d) timing means connected with said switching
device, said timing means responsive to said detection
means for activating said switching device for a
predetermined time period during which said capacitor
35 discharges via said primary coil and for deactivating

said switching device at the end of said predetermined time period so that the electrical stimulus is produced by said secondary coil.

- 5 25. The device of claim 2 comprising:
 (a) a battery;
 (b) a voltage regulator connected with said
battery for providing electrical energy; and
 (c) a capacitor connected with said voltage
10 regulator for storing a portion of said energy from
said regulator; and
 wherein said detection means comprises regulator
control means for deactivating said voltage regulator
while said characteristic signal is being detected,
15 said capacitor storing sufficient energy to operate
said detection means while said characteristic signal
is being detected.

- 20 26. The device of claim 3 comprising a second
antenna generally orthogonal to said first antenna for
receiving the transmitted signal and wherein said
control means comprises activating means for
selectively activating one of said first and second
antennae.

- 25 27. The device of claim 26 wherein said first
and second antennae each include a first terminal and
a second terminal and wherein the first terminal of
the first and second antennae are interconnected at a
30 common terminal and wherein said activating means
comprises grounding means for separately grounding the
second terminals of said first and second antennae to
selectively activate the respective first and second
antennae.

35

28. The device of claim 3 wherein said timing means comprises:

(a) a detection register for detecting the presence of the transmitted signal and for providing an indication of the detection of said transmitted signal; and

(b) a source of a timing signal for providing a timing interval associated with said temporal characteristic; and

wherein said determining means comprises indication-determining means for determining during said timing interval the presence of the indication at said detection register.

29. The device of claim 28 wherein said detection register includes counting means for counting selected signal oscillations and wherein said indication at the detection register includes a count of the selected oscillations of said transmitted signal during said timing interval.

30. The device of claim 28 wherein said determining means comprises reset means for repeatedly resetting the indication at the detection register during said timing interval to determine whether the temporal characteristic corresponds to the predetermined characteristic.

31. The device of claim 3 comprising first power supply means for operating said control means at a first voltage and second power supply means for providing power to said transducer at a second voltage to activate said transducer, and wherein said operating means is connected with said second power

supply means for enabling operation of said second power supply means to activate said transducer.

5 32. The device of claim 31 wherein said transducer comprises:

 (a) a transformer having a primary coil and a secondary coil, said secondary coil for connection with the animal to provide an electrical stimulus to the animal;

10 (b) a capacitor connected in parallel with said primary coil and connected with said second power supply means so that said capacitor is charged by said second power supply means when said second power supply means is enabled by said operating means;

15 (c) a switching device connected with said primary coil for switching said primary coil; and

 (d) timing means connected with said switching device, said timing means responsive to said operating means for activating said switching device for a predetermined time period during which said capacitor discharges via said primary coil and for deactivating said switching device at the end of said predetermined time period so that said electrical stimulus is produced by said secondary coil.

25

 33. The device of claim 3 wherein said control means comprises:

 (a) counting means for counting the number of applications of the stimulus; and

30 (b) limiting means for preventing application of the stimulus to the animal when the number of applications of the stimulus exceeds a predetermined limit value.

34. The device of claim 33 wherein said transducer includes an audible signal transducer and wherein said control means includes output means for providing an output to said audible signal transducer to produce an audible signal representative of said number of applications of the stimulus.

35. The device of claim 3 comprising:
(a) a battery;
10 (b) a voltage regulator connected with said battery for providing electrical energy; and
(c) a capacitor connected with said voltage regulator for storing a portion of said energy from said regulator; and
15 wherein said control means comprises antenna activation means for activating said antenna and power control means for deactivating said voltage regulator while said antenna is activated and wherein said capacitor stores sufficient energy to operate said control means at least during said measurement of the
20 temporal characteristic by said timing means.

36. The device of claim 4 wherein said timing means comprises:
25 (a) detecting means for detecting the amplified signal and for providing an indication that the amplified signal has been detected; and
(b) reset means for resetting the indication at the detecting means; and
30 wherein said determining means comprises indication-determining means for determining the presence of said indication at the detecting means at a predetermined time after said indication has been reset.

35

37. A receiver unit for an electronic animal control system, comprising:

a controller for controlling operation of the receiver unit in accordance with at least one control parameter;

a removable battery having a battery terminal;

a first connector for connecting said battery terminal with said controller and for supplying electrical power to said controller from said battery; and

a second connector for connecting said battery terminal with said controller for enabling said controller to determine whether said battery is removed.

38. The receiver unit of claim 37, comprising:

a resonator having a resonant frequency for producing an electronic signal in response to electromagnetic waves having said resonant frequency; and

an amplifier connected with said resonator for amplifying said electronic signal and for responsively providing an amplified signal to said controller; and

wherein said controller includes a frequency selector for selecting said resonant frequency of said resonator.

39. The receiver unit of claim 38, comprising:

damping means connected with said resonator for causing said resonator to produce said electronic signal in accordance with a selected resonance characteristic.

40. The receiver unit of claim 37, wherein said controller is responsive to said second connector for receiving serially-encoded data, including said control parameter.

5

41. A receiver unit for an electronic animal control system, comprising:

- 10 a controller for controlling operation of the receiver unit in accordance with at least one control parameter;
- a first connector for connecting a battery terminal of a removable battery with said controller for supplying electrical power to said controller from said battery;
- 15 a second connector for connecting said battery terminal with said controller for enabling said controller to determine whether said battery is removed; and
- an animal stimulator responsive to the controller for supplying a selected stimulation to the animal.

20

42. The receiver unit of claim 41, comprising:
- 25 a resonator having a resonant frequency for producing an electronic signal in response to electromagnetic waves having said resonant frequency;
 - an amplifier connected with said resonator for amplifying said electronic signal and for responsively providing an amplified signal
 - 30 to said controller; and
- wherein said controller is responsive to the amplified signal for supplying the selected stimulation to the animal and wherein said
- 35 controller includes a frequency selector for

selecting said resonant frequency of said resonator.

5 43. The receiver unit of claim 42, comprising:
damping means connected with said resonator for causing said resonator to produce said electronic signal in accordance with a selected resonance characteristic.

10 44. The receiver unit of claim 41, wherein said controller is responsive to said second connector for receiving serially-encoded data including said control parameter supplied through said second connector.

15 45. The receiver unit of claim 44 wherein said controller includes timing means for determining that said battery has been removed for a predetermined timing interval prior to receiving said serially-encoded data.

20 46. The receiver unit of claim 45 comprising:
a resonator having a selected resonant frequency for producing an electronic signal in response to electromagnetic waves having said resonant frequency,
25 and

wherein said controller is responsive to said control parameter for selecting said resonant frequency.

30 47. The receiver unit of claim 45 comprising:
a charge-storage timing device connected with said first connector, the charge-storage timing device having a characteristic discharge time; and

35 wherein said timing means includes a counter for counting a predetermined number of timing pulses

corresponding to said characteristic discharge time of said charge-storage timing device for determining that the battery has been removed for the predetermined timing interval.

5

48. The receiver unit of claim 41 comprising:
a charge-storage device connected with said first connector for supplying electrical power to said controller when said battery is removed.

10

49. The receiver unit of claim 41 comprising:
data-storage means operatively connected with said controller for storing data relative to the control of the animal; and

15

wherein said controller includes transmitting means for transmitting said data to an external device, via said second connector, when said battery is removed.

20

50. The receiver unit of claim 49 wherein said controller includes timing means for determining that said battery has been removed for a predetermined timing interval prior to transmitting said data.

25

51. The receiver unit of claim 50 comprising:
a charge-storage timing device connected with said first connector, the charge-storage device having a characteristic discharge time; and

30

wherein said timing means includes a counter for counting a predetermined number of timing pulses corresponding to said characteristic discharge time of said charge-storage timing device for determining that the battery has been removed for the predetermined timing interval.

35

52. A method of programming a portable battery-powered programmable device, comprising the steps of:
disconnecting a battery from a battery connector terminal within the portable battery-powered
5 programmable device;
connecting a programming device with the battery connector terminal; and
transmitting program data from the programming
device into the portable battery-powered programmable
10 device via the battery connector terminal.

53. The method of claim 52, comprising the step of waiting for a predetermined time interval after disconnection of the battery from the battery
15 connector terminal before transmitting program data.

54. The method of claim 52, comprising the step of providing electrical power to the portable battery-powered programmable device from the programming
20 device via the battery connector terminal while transmitting said program data.

55. The method of claim 52, comprising:
charging a charge-storage component within said
25 portable device prior to disconnecting the removable battery from the battery connector terminal; and
operating said portable device from said charge-storage component after disconnecting the battery from the battery connector terminal.

30

56. The method of claim 52, comprising the step of controlling the behavior of an animal in accordance with said program data.

57. A method of retrieving stored data from within a portable battery-powered device, comprising the steps of:

5 disconnecting a battery from a battery connector terminal within the portable device;

 detecting, within the portable device, that the battery has been disconnected;

 connecting a data retrieval device with said battery connector terminal; and

10 transmitting said stored data to said data retrieval device via said battery connector terminal.

58. The method of claim 57 wherein said detecting step includes waiting for a predetermined
15 time interval after disconnection of the battery from the battery connector terminal before determining that said battery has been removed.

59. The method of claim 57, comprising the steps
20 of:

 sending a request from said data retrieval device, via said battery connector terminal, to said portable device; and

25 detecting receipt of said request within said portable device prior to the step of transmitting said stored data to said data retrieval device.

60. The method of claim 57 wherein said transmitting step comprises encoding said stored data
30 as serial data.

61. A method of establishing data communication between a battery-powered animal control receiver carried by an animal to control movement of the animal
35 and an external device, comprising:

removing a removable battery from a battery
connector terminal within the receiver;
connecting the external device with the
battery connector terminal;
5 detecting within said receiver that said
external device is connected with the
battery connector terminal; and
receiving within said receiver a request from the
external device via said battery connector
10 terminal, said request specifying whether
the receiver is to transmit data to the
external device or to receive data from said
external device via the battery connector
terminal.

15

62. A method of establishing data communication
between a battery-powered animal control receiver
carried by an animal to control movement of the animal
and an external device, comprising:

20 removing a removable battery from a battery
connector terminal within the receiver;
connecting the external device with the
battery connector terminal;
detecting within said receiver that said
25 external device is connected with the
battery connector terminal; and
transmitting data between said external
device and the receiver via the battery
connector terminal.

30

63. The method of claim 62 comprising:
charging a charge-storage timing device
within said receiver prior to
disconnecting the battery, the charge-

storage timing device having a
predetermined discharge time; and
wherein said detecting step includes
determining that said battery has been
5 disconnected from said battery
connector terminal for a time
interval corresponding to said
predetermined discharge time prior to
transmitting data.

- 10 64. An animal control device, comprising:
a radio frequency detection circuit for detecting
a radio signal at a selected frequency;
verification means for determining the presence,
within said detected signal, of a predetermined
15 modulation characteristic;
transducer means, responsive to said verification
means, for applying a stimulus to the animal when said
modulation characteristic is determined to be present;
and
20 frequency selection means operatively connected
with said detection circuit for selecting said
selected frequency from at least two predetermined
frequencies.

- 25 65. The device of claim 64 wherein said radio
frequency detection circuit comprises:
a resonator and wherein said frequency selection
means comprises a controller for selecting the
resonant frequency of said resonator.

- 30 66. The device of claim 65 wherein said
resonator comprises:
an inductive component and a capacitive
component, and

wherein said controller is operative to connect an additional reactive component in parallel with one of said inductive and capacitive components.

- 5 67. An animal control device carried by animal to control the movement of the animal comprising:
 a radio frequency detection circuit for detecting a radio signal at a selected frequency, the frequency detection circuit including a resonator having a
10 selected resonant frequency for producing an electronic signal in response to a radio signal having said resonant frequency;
 transducer means responsive to the radio frequency detection circuit for applying a stimulus to
15 the animal in response to detection of the radio signal at the selected frequency; and
 frequency selection means operatively connected with the detection circuit for selecting the selected frequency from at least two predetermined
20 frequencies.

68. The device of claim 67 wherein said frequency selection means comprises a controller for selecting the resonant frequency of said resonator.

25

69. The device of claim 68 wherein said resonator comprises:

 an inductive component and a capacitive component, and

- 30 wherein said controller is operative to connect an additional reactive component in parallel with one of said inductive and capacitive components.

70. An animal control device carried by animal
35 to control the movement of the animal comprising:

a radio frequency detection circuit for detecting a radio signal at a selected frequency, the frequency detection circuit including a resonator having a selected resonant frequency for producing an
5 electronic signal in response to a radio signal having said resonant frequency;

transducer means responsive to the radio frequency detection circuit for applying a stimulus to the animal in response to detection of the radio
10 signal at the selected frequency; and

damping means connected with the resonator for causing said resonator to produce said electronic signal in accordance with a selected resonance characteristic.

15

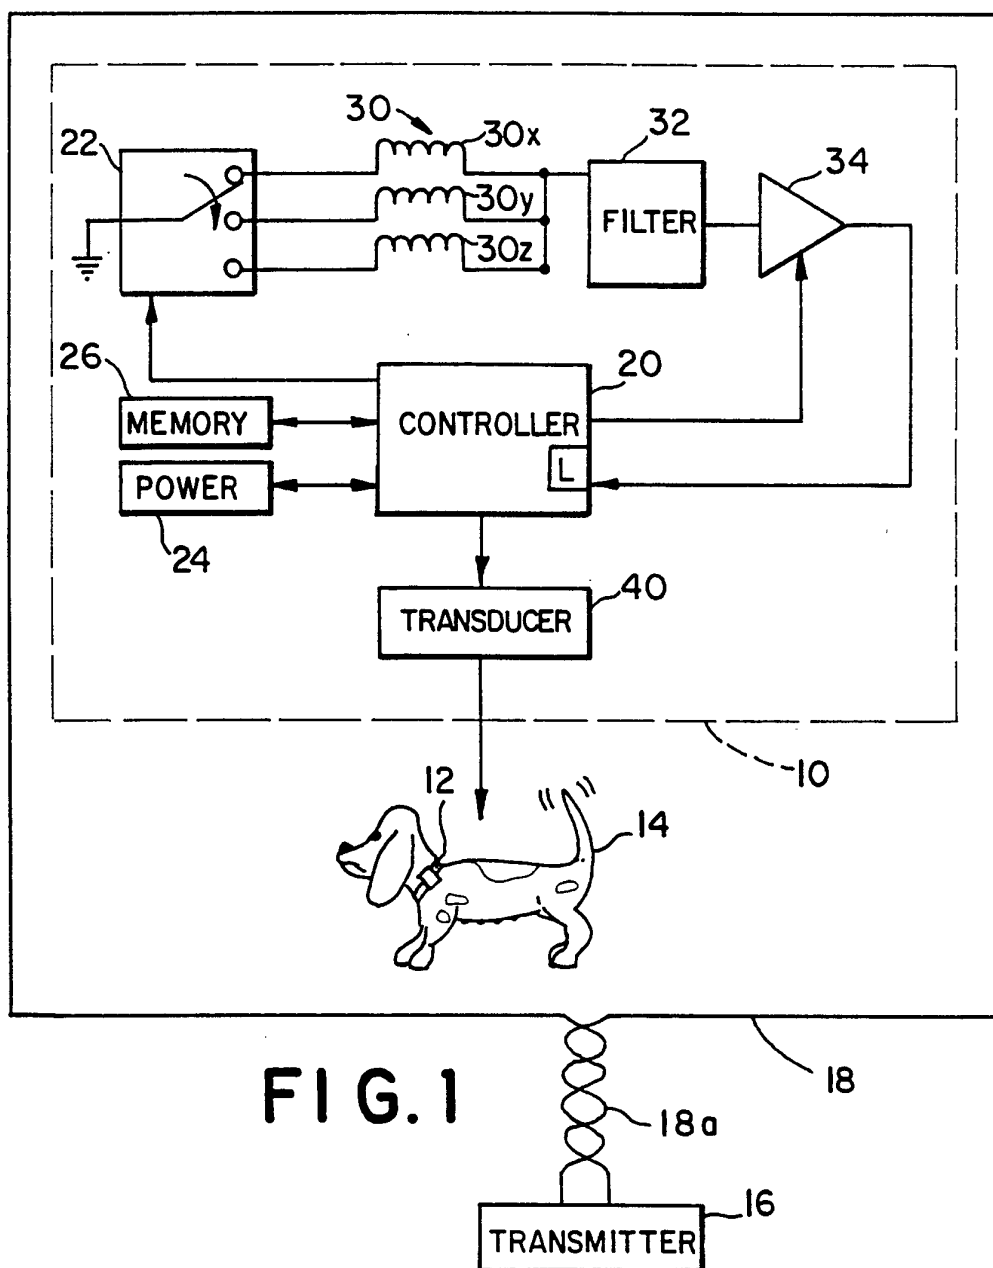


FIG. 1

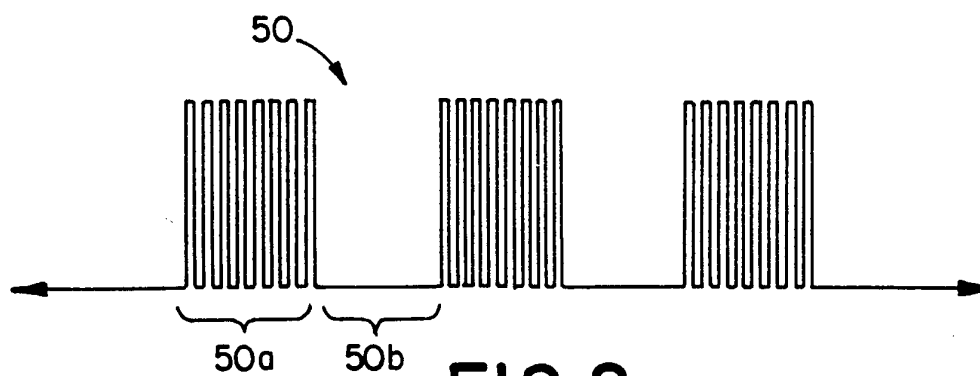


FIG. 2

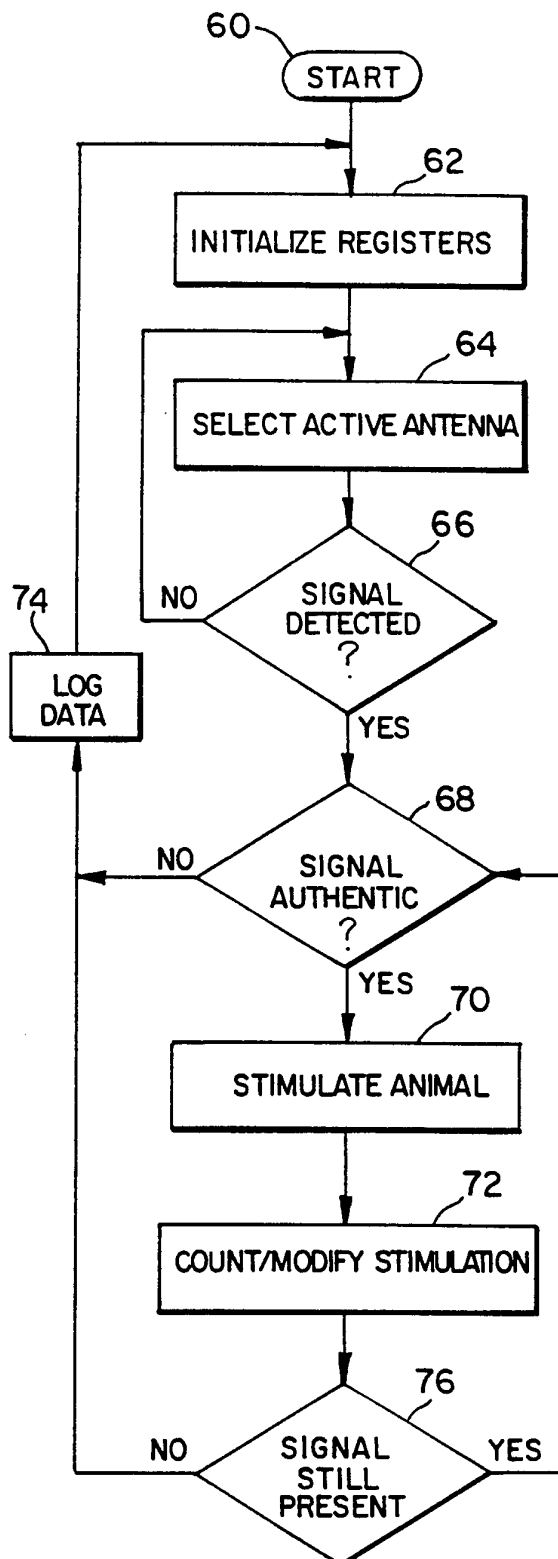


FIG. 3A

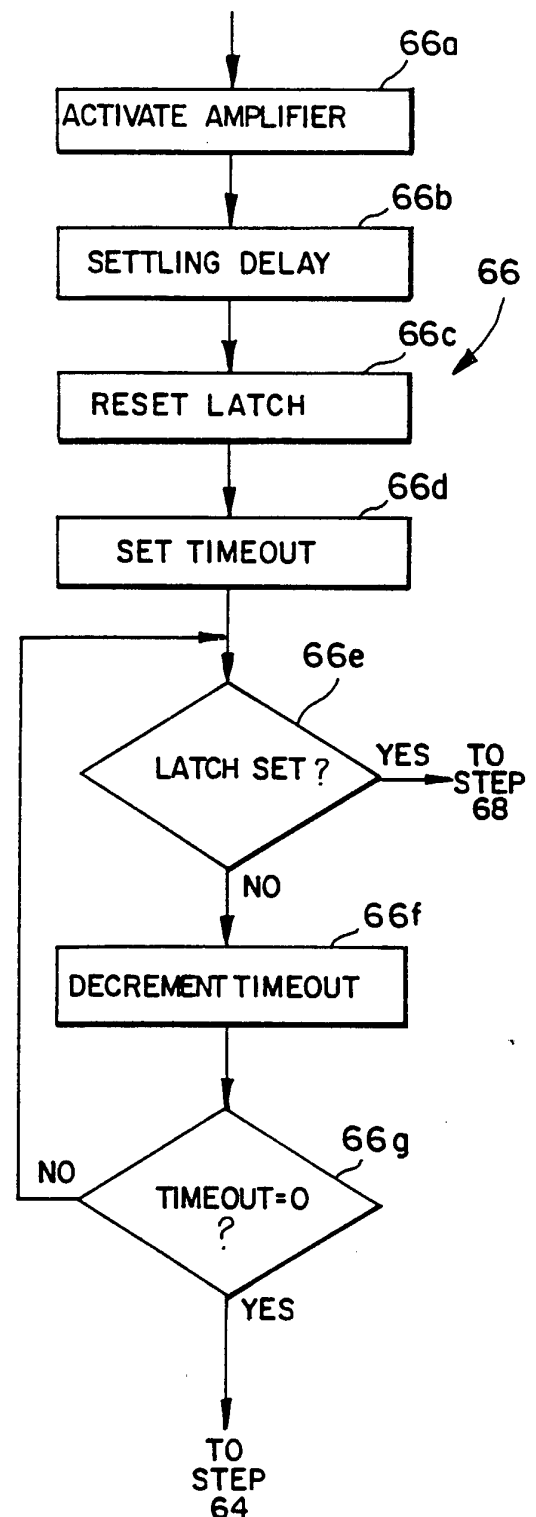


FIG. 3B


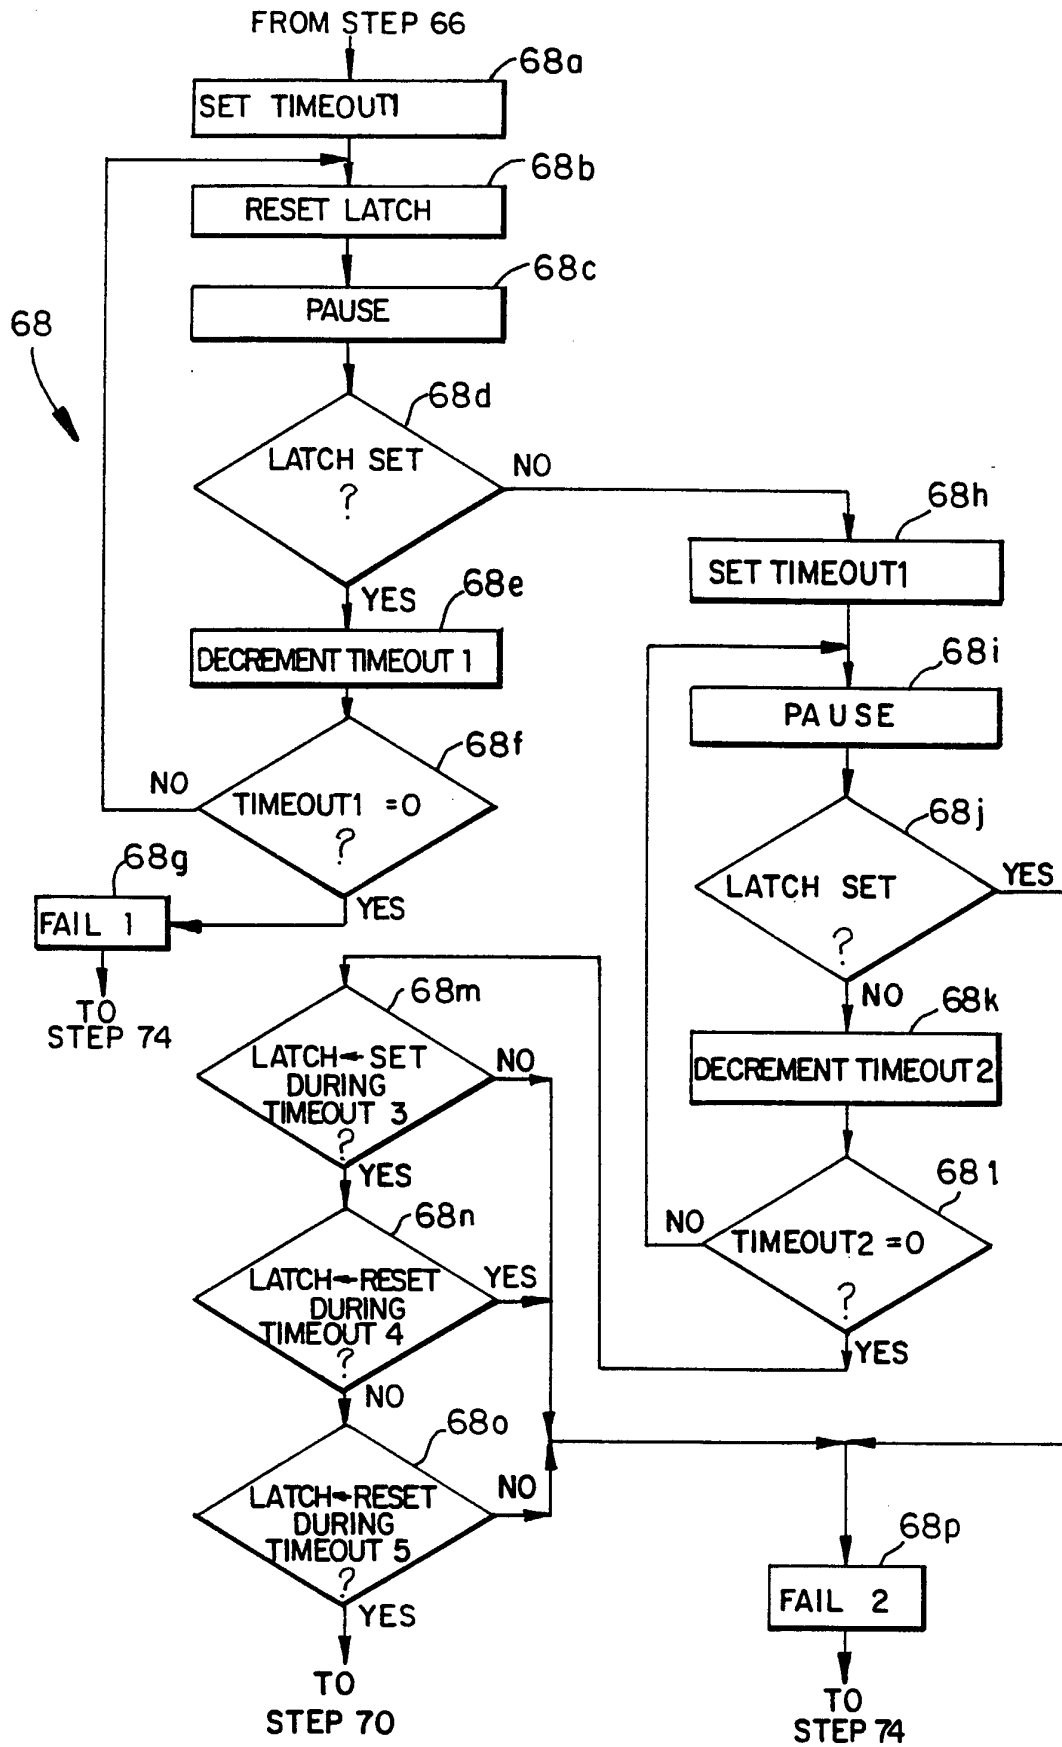


FIG. 3C

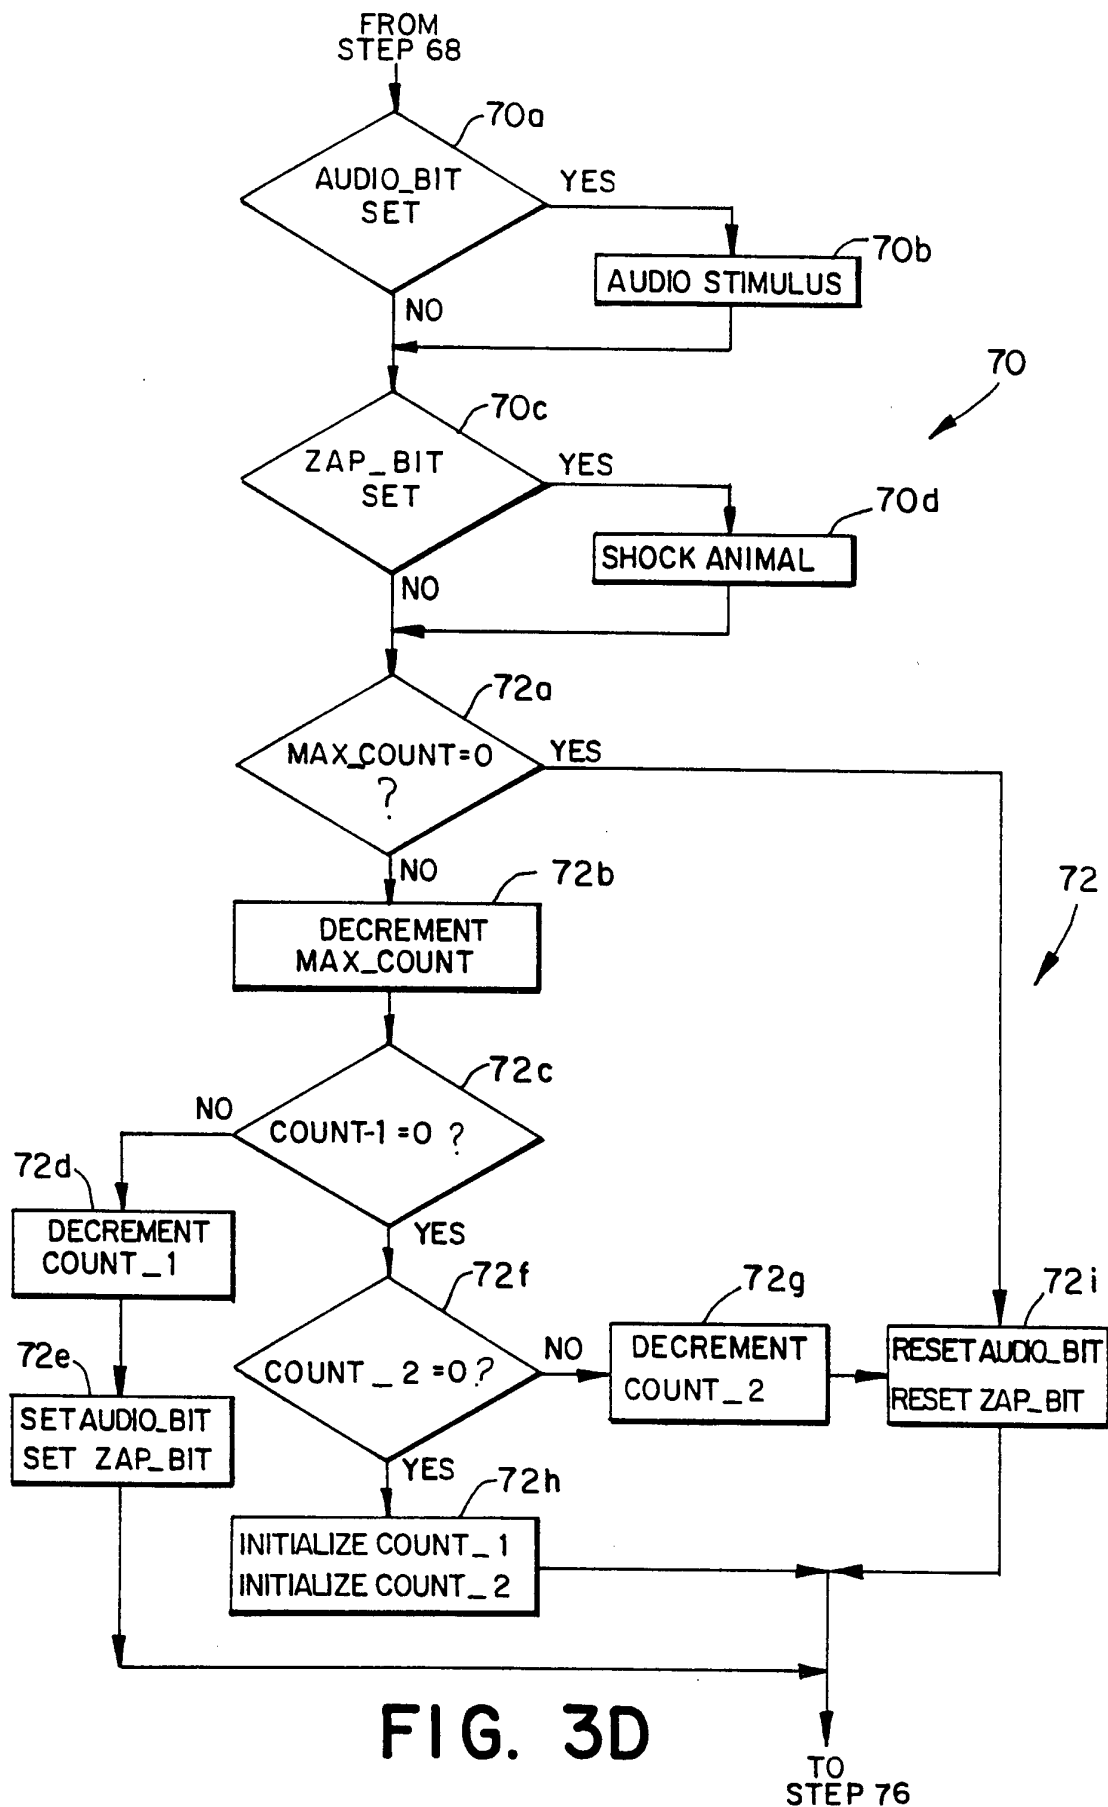

5

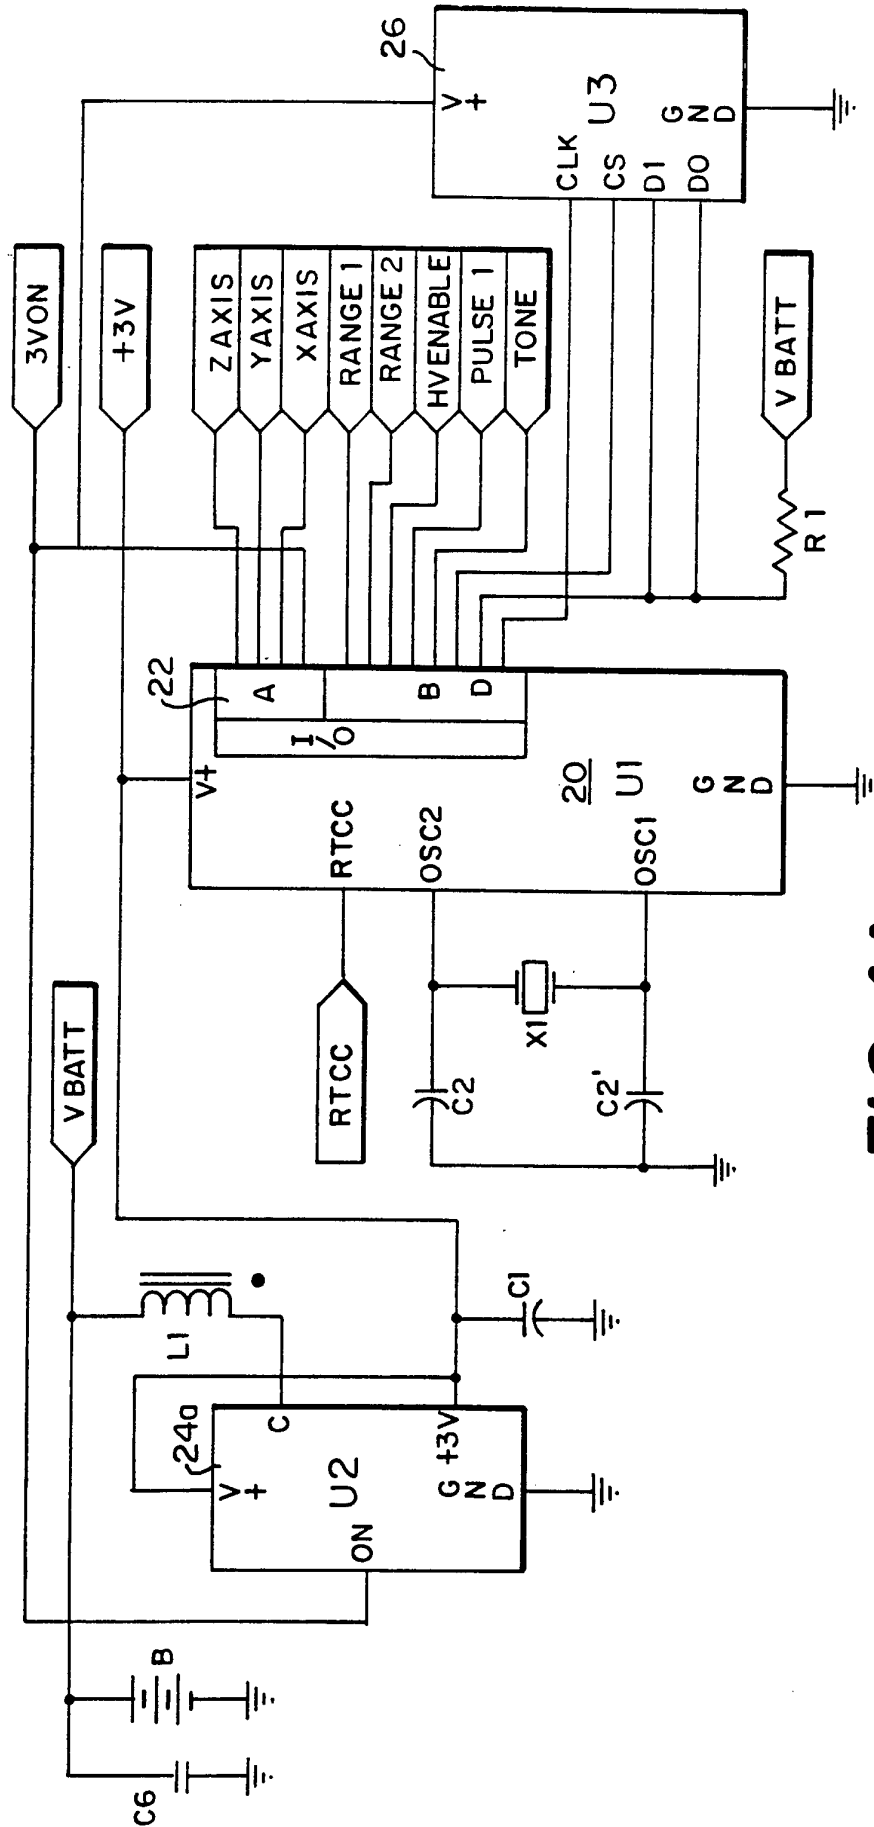


FIG. 4A

6

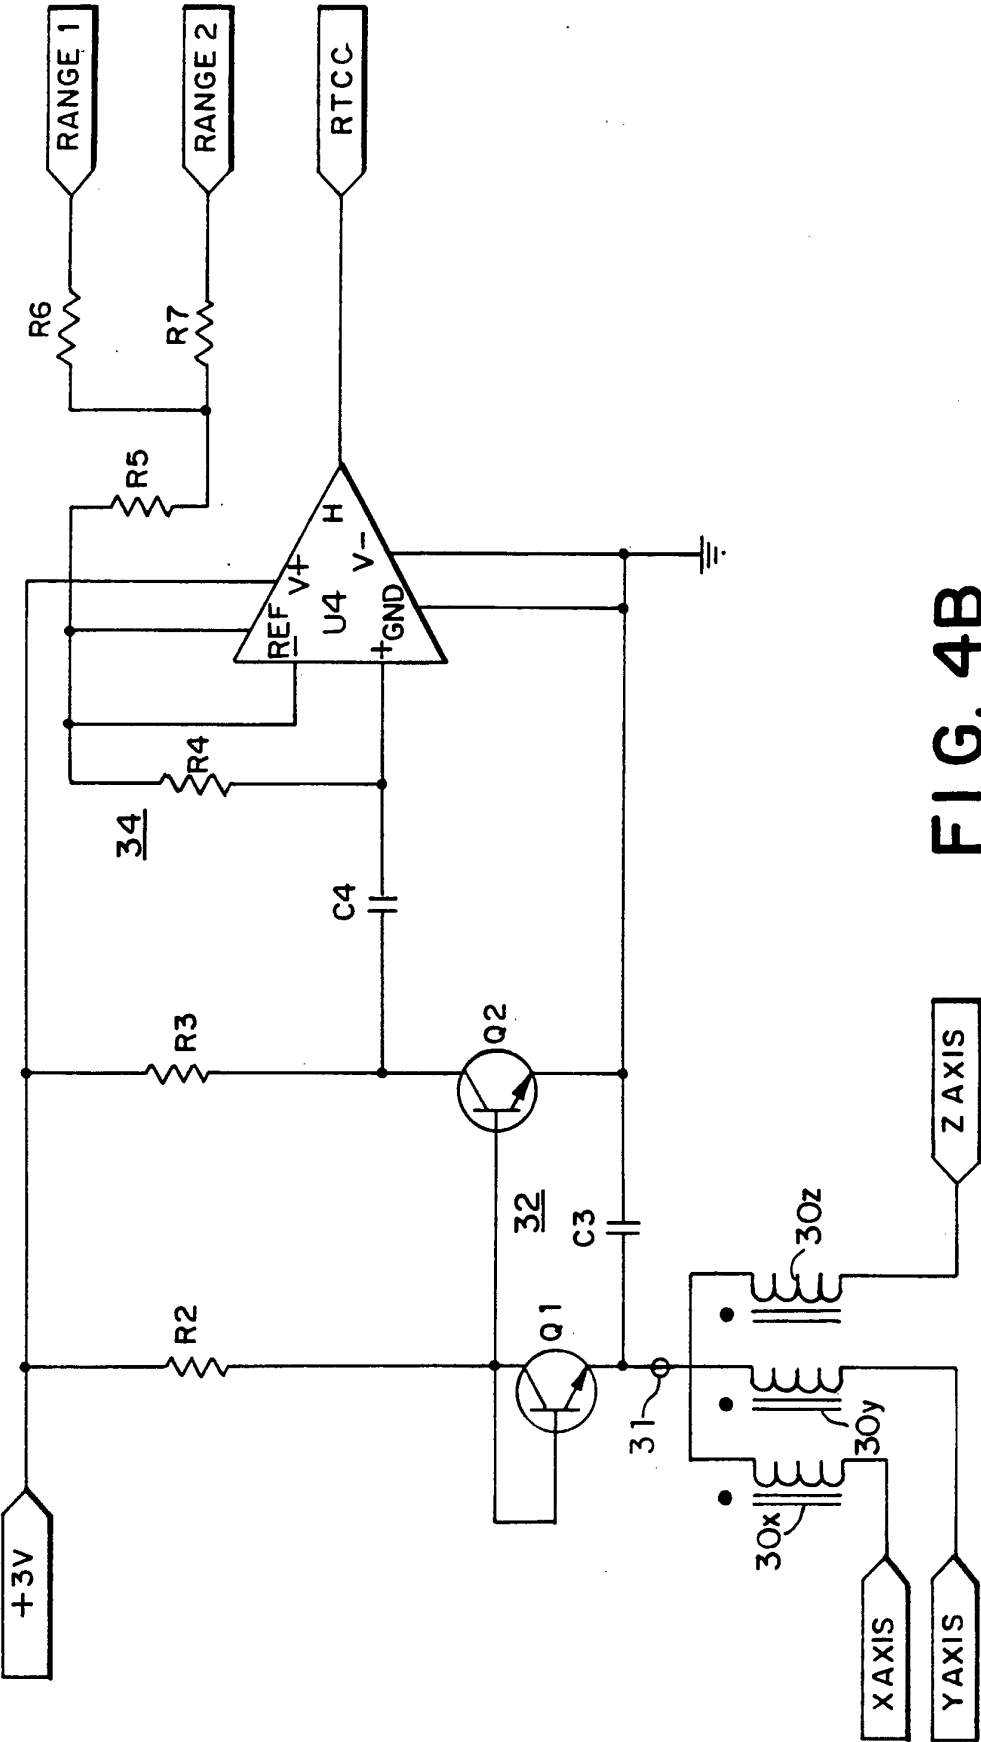


FIG. 4B

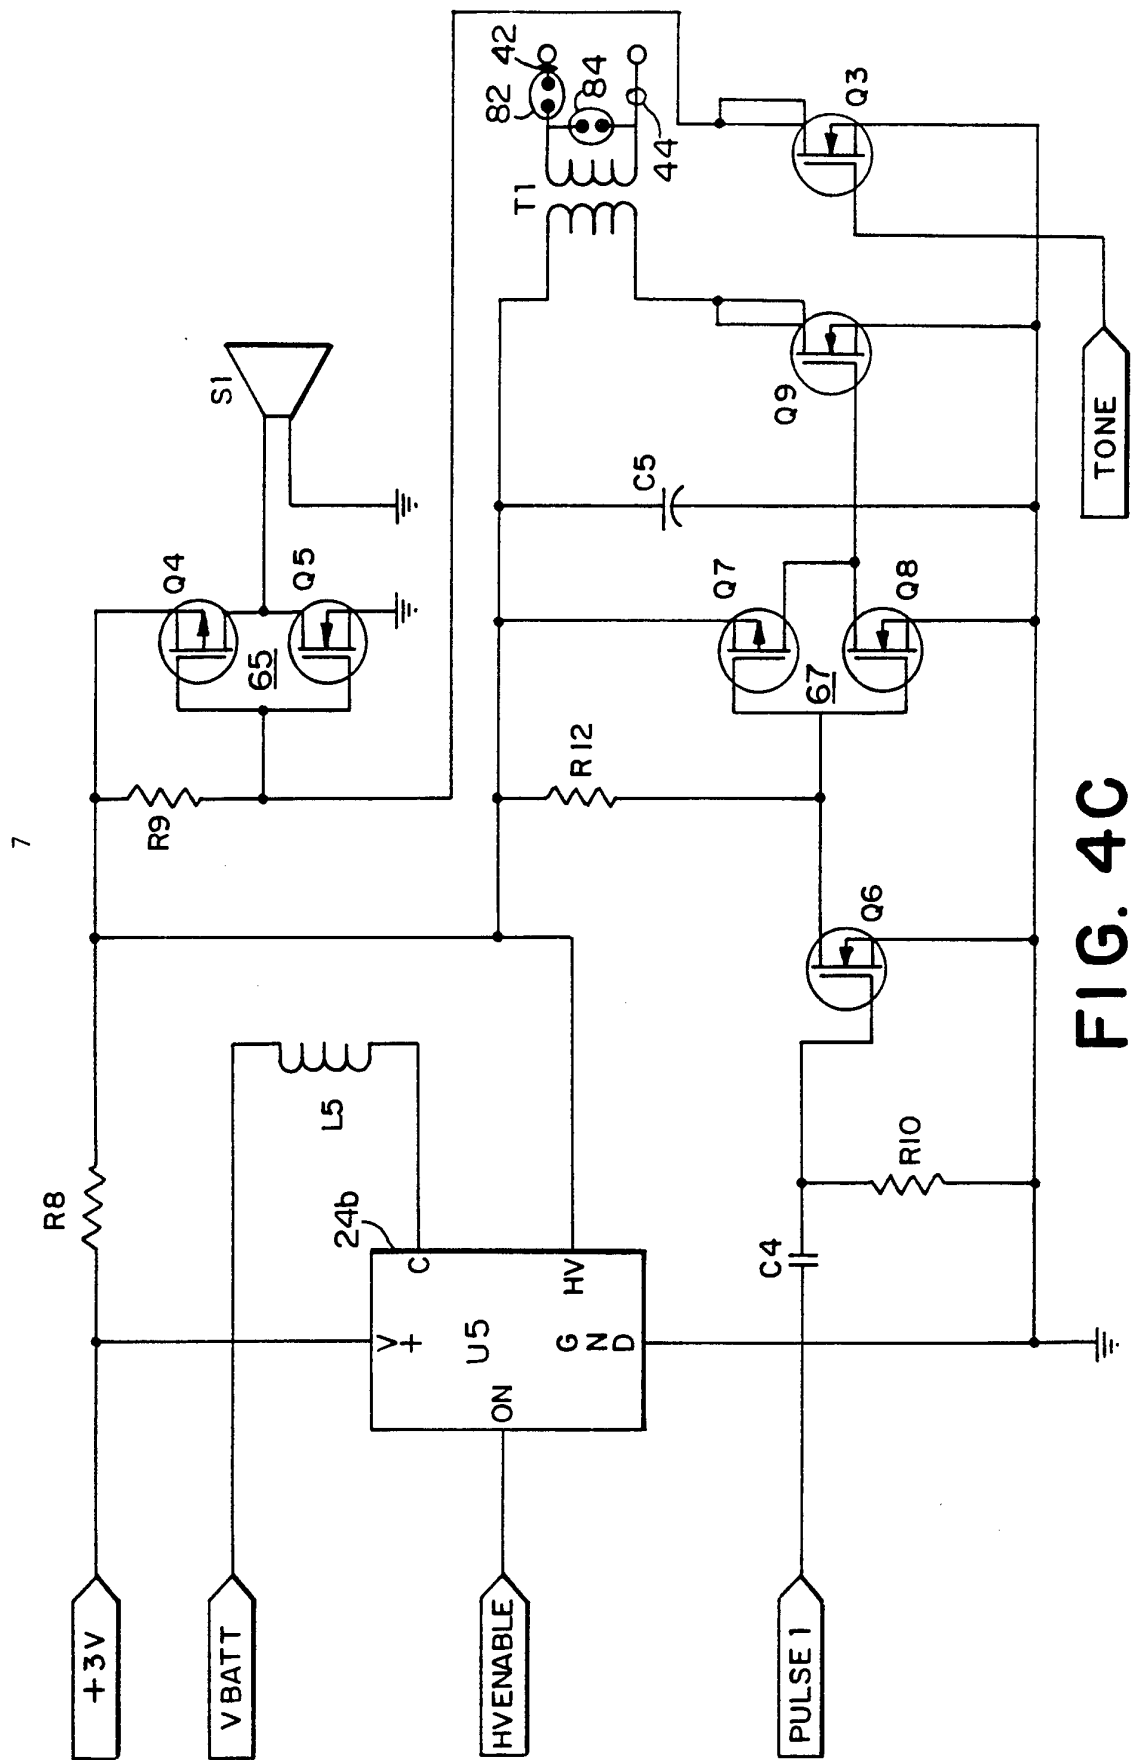


FIG. 4C

8

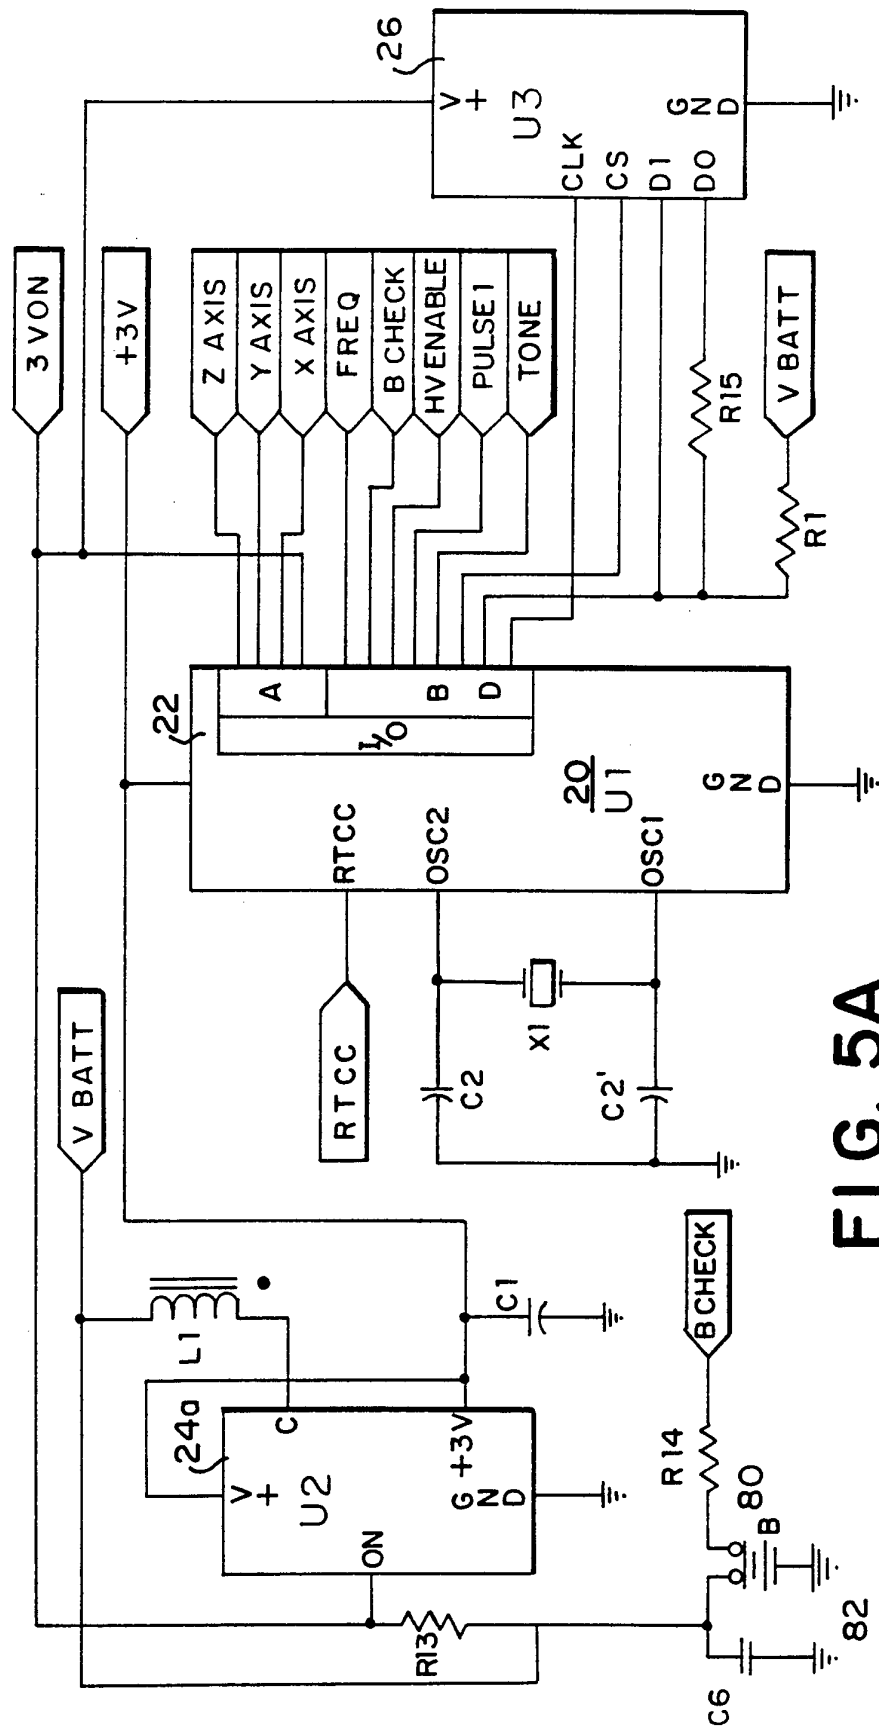


FIG. 5A

9

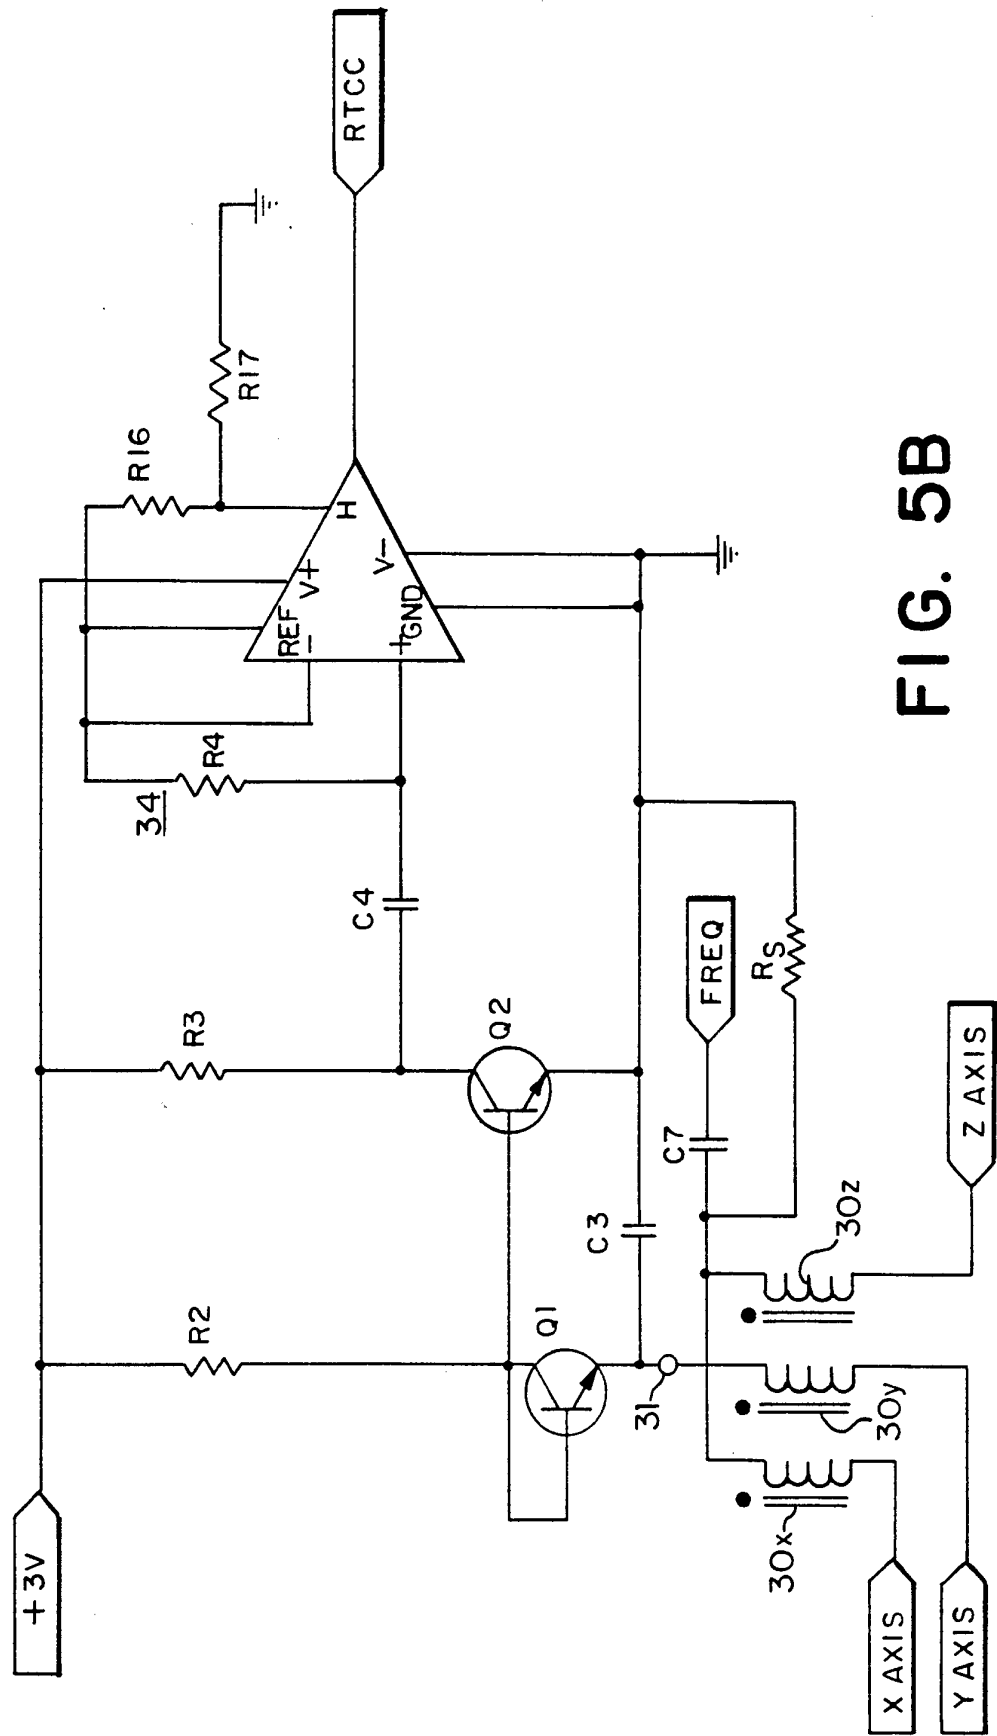


FIG. 5B

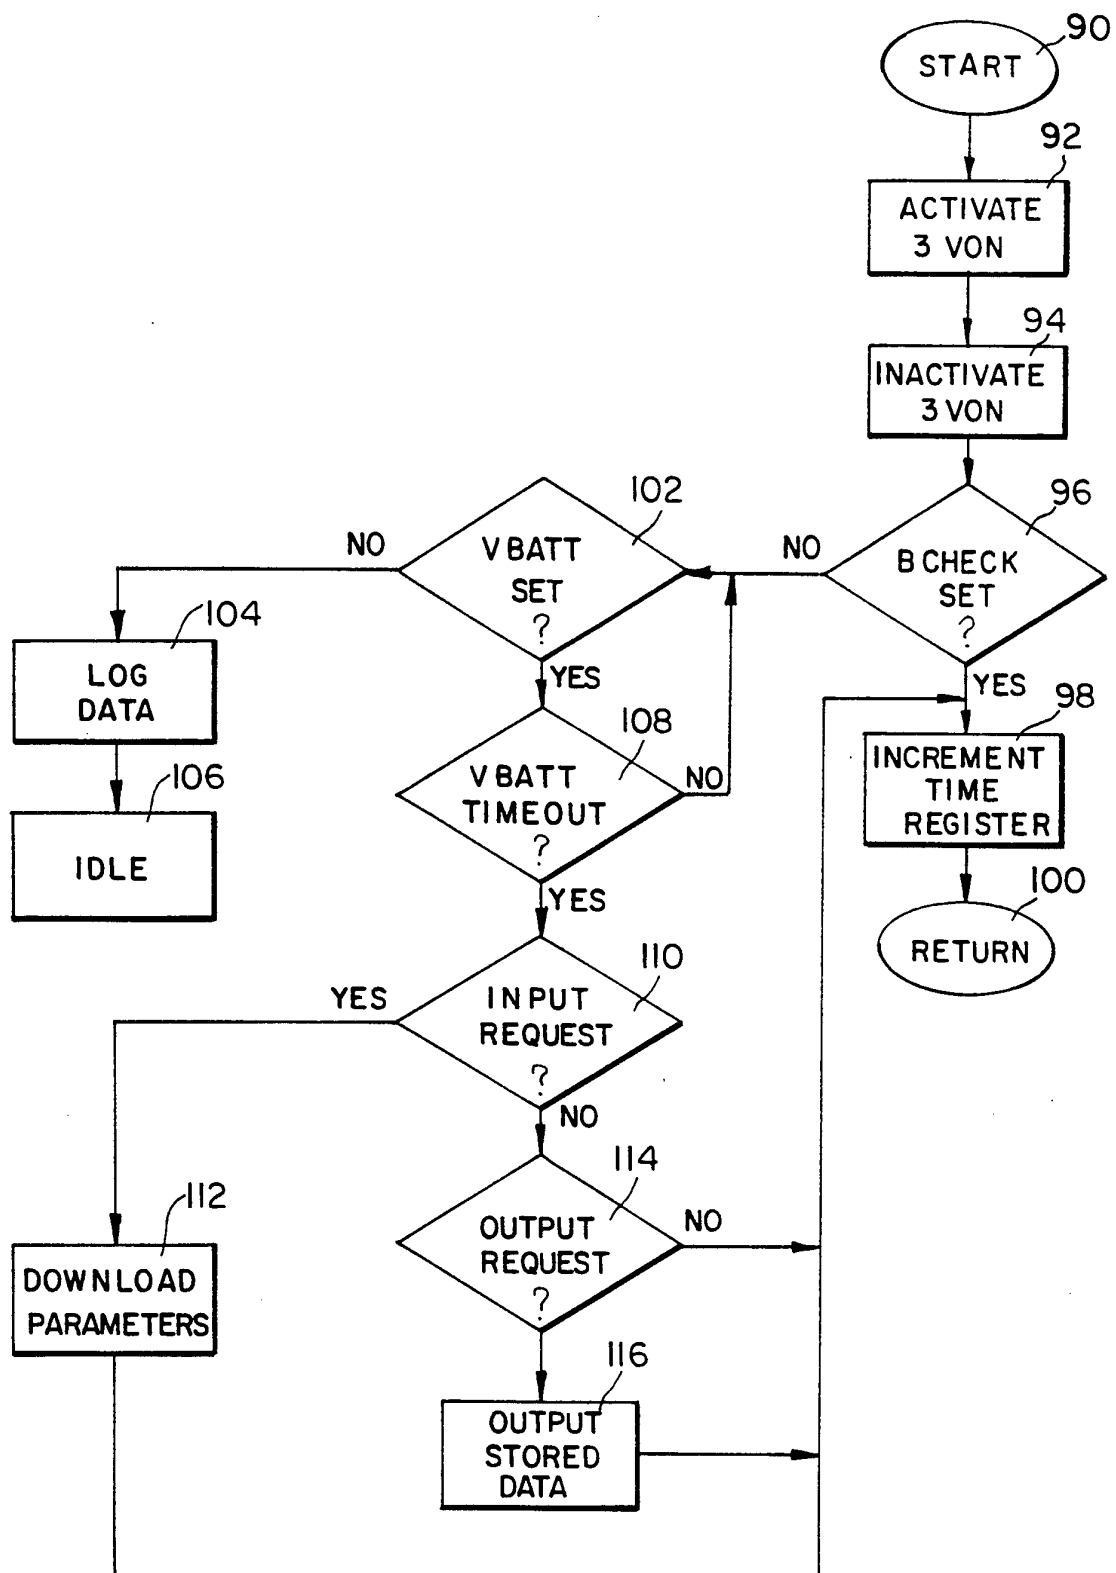


FIG. 6