

PCTWORLD INTELLECTUAL
PROPERTY ORGANIZATION

INTERNATIONAL APPLICATION PUBLISHING



WO 9604119A1

(51) International Patent Classification 6 :

B29C 41/14, 41/22, A61M 25/00

(43) International Publication Date: 15 February 1996 (15.02.96)

(21) International Application Number: PCT/US95/09825


(22) International Filing Date: 2 August 1995 (02.08.95)

(30) Priority Data:
08/285,026 2 August 1994 (02.08.94) US(71) Applicant: ROCHESTER MEDICAL CORPORATION
[US/US]; 1500 Second Avenue N.W., P.O. Box 188,
Stewartville, MN 55976 (US).(72) Inventors: CONWAY, Anthony, J.; 500 Prospect Street,
Chatfield, MN 55923 (US). CONWAY, Philip, J.; 420
Prospect Street, Chatfield, MN 55923 (US). FRYAR,
Richard, D., Jr.; 1031 - 36th Street S.W., Rochester, MN
55902 (US).(74) Agent: BRUESS, Steven, C.; Merchant, Gould, Smith, Edell,
Welter & Schmidt, P.A., 3100 Norwest Center, 90 South
Seventh Street, Minneapolis, MN 55402-4131 (US).(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH,
CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE,
KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN,
MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK,
TJ, TM, TT, UA, UG, UZ, VN, European patent (AT, BE,
CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT,
SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML,
MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ,
UG).**Published***With international search report.**Before the expiration of the time limit for amending the
claims and to be republished in the event of the receipt of
amendments.*

(54) Title: METHOD OF SHAPING STRUCTURES WITH AN OVERCOAT LAYER INCLUDING FEMALE URINARY CATHETER

(57) Abstract

A method of shaping polymeric structures by coating a support structure with a bond-preventing agent to attain a particular shape and subsequently coating the shaped structure of the bond-preventing agent with a polymeric bonding composition is provided. Such shaped polymeric structures can have one or more cavities (16) which can be fluid-filled or gel-filled. Also provided is a hand-actuating retention female urinary catheter (5) having an inner tube (12) and an outer overcoat layer (14) encircling the tube with an elastomeric collar (50) with a shroud (51). A cavity (16) containing a fluid (18) is interposed between the tube (12) and the overcoat layer (14). The cavity includes a balloon portion (24) and a reservoir portion (22). The shroud (51) encircles the reservoir section (22) to inhibit the ballooning of the reservoir section when the reservoir section is squeezed to force fluid (18) from the reservoir portion (22) to the balloon portion (24) through the sleeve portion (34) of the cavity. The overcoat layer (14) and the collar (50) with a shroud (51) are made of soft resilient material.

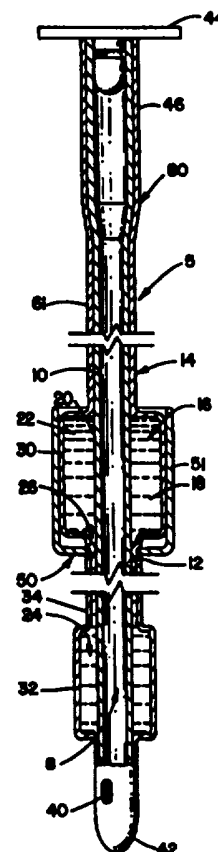

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

METHOD OF SHAPING STRUCTURES WITH
AN OVERCOAT LAYER INCLUDING
FEMALE URINARY CATHETER

5

CROSS-REFERENCE TO OTHER APPLICATIONS

The present application is a continuation-in-part application of co-pending U.S. Patent Application Serial No. 07/827,936, filed January, 29, 1992, which is a
10 continuation-in-part application of co-pending U.S. Patent Application Serial No. 07/809,281, filed December 13, 1991, which is a continuation-in-part of co-pending U.S. Patent Application Serial No. 07/489,462, filed March 6, 1990, which is a continuation-in-part application of co-pending
15 U.S. Patent Application Serial No. 07/487,422, filed March 1, 1990, which is a continuation-in-part application of co-pending U.S. Patent Application Serial No. 07/462,832, filed January 10, 1990, the disclosures of which are each incorporated herein by reference.

20

FIELD OF THE INVENTION

The present invention relates to methods of making shaped structures with an overcoat layer. The present invention also relates to making polymeric structures such
25 as cannulas and catheters. In addition, the present invention also relates to urinary catheters and most particularly to female urinary catheters.

BACKGROUND OF THE INVENTION

Many structures, for example, hoses, condoms, gloves, cannulas, catheters, and the like, are made of a polymeric material (e.g., latex, silicone). Such polymeric
5 structures may have various shapes, e.g., sections with different diameters, contours, etc. In addition, various cavities might be present in the structures, some of which might contain fluids of various types. A traditional way to form such structures is by adhesively affixing parts
10 together so that the outer coat can attain the desired shape. However, these traditional methods do not lend themselves to mass production and are labor intensive. Some shapes are extremely difficult if not impossible to make by traditional adhesive methods. likewise,
15 traditional methods of making shaped structures of nonpolymeric substances, such as inorganic materials, with cavities therein sometimes have similar difficulties.

An example of a shaped polymeric structure is a
20 catheter. Most catheters are cannulas or tube like devices which are inserted into a portion of a person's body in order to transport fluids, such as liquids, gases, and sometimes semisolid material, in or out of that particular portion of the body. For instances, urinary catheters are
25 used to transport urine collected in the bladder out of the body via the urinary tract. Other types of catheters such

as gastronomy devices, transport fluids into and out of various segments of the gastrointestinal system, primarily the stomach.

In order to provide a means of retaining the catheter within the body, inflatable bag catheters were introduced many years ago. Subsequently, Foley (U.S. Patent No. 3,409,016) taught an elongated catheter having a secondary lumen for inflating a retention balloon at a distal end of the catheter once the distal end is positioned within the body. Generally, the "distal end" is the end of the catheter that is first introduced into the body when the catheter is being positioned within the body and the "proximal end" is the end opposite the distal end. Such catheters are now generally referred to as "Foley" catheters out of respect for the contribution made by Dr. Foley. Because of the variation in needs of patients, improvements on Dr. Foley's contribution to the catheter art are continually being made. These improvements sometimes result in cannulas or catheters that have shapes quite different from that of the device originally designed by Dr. Foley.

Traditionally, Foley catheters are made by a process which includes slipping a band of cured rubber over a double lumen latex rubber tubing and affixing the band on the double lumen tubing by dipping the band and the tubing in a suspension of latex to form an outer layer. The cost

of manufacturing traditional Foley catheters has been influenced by the need to use a significant amount of hand labor to make the devices, especially the silicone rubber Foley catheters. Moreover, in many cases where a polymeric
5 structure such as a catheter is to have a cavity filled with fluid, traditional manufacturing methods can not be used. It will be appreciated that using such traditional methods to make catheters that have a variety of shapes and sizes of cavities between the tubing and the outer layer
10 would add significantly to the cost of production and pose limitations on the variety of catheters that can be made. Reducing the amount of hand labor in the manufacture of such devices may reduce the cost of such devices so as to provide a more affordable product to the consumer and to
15 render such a product more competitive in the market place.

The same problem of high labor cost and limitation of the variety of shapes is similarly encountered in the manufacture of other shaped structures such as gastronomy devices, condom, and hoses. The present invention provides
20 a method of making polymeric structures which offers substantial advantages over traditional manufacturing methods. In addition, the present invention provides a simple, easily applied, comfortable disposable catheter for incontinent females.

25

SUMMARY OF THE INVENTIONMethod of Making Polymeric Structures

The present invention relates to making a shaped structure by coating at least a portion of a shaped
5 structure of a bond-preventing agent with a liquid composition, e.g. a polymeric bonding composition such as one that contains uncured silicone rubber, to attain an overcoat layer of a desired shape. The shaped structure of a bond-preventing agent can be formed by coating over an
10 outer surface of a support structure, for example, a mandrel or a tube, to form a residual coating of a particular shape.

One embodiment of the present invention relates to dipping a mandrel in a liquid composition, such as
15 polymeric composition to form an inner piece (or structure) over a surface of a mandrel, applying and shaping a residual coating of a bond-preventing agent over the outer surface of the inner piece, and coating at least a portion of the structure resulting from the previous steps with a
20 liquid composition to form a shaped structure having an overcoat on an inner piece.

Another embodiment of the present invention relates to a method of making a polymeric structure in accordance with one of the above methods wherein a fluid-
25 filled cavity is formed between an inner polymeric layer and an outer polymeric layer.

Yet another embodiment of the present invention relates to a method of making a polymeric structure in accordance with one of the above methods wherein an outer polymeric layer only partially encapsulates an inner
5 polymeric layer such that only one end of the outer polymeric layer is attached to the polymeric structure. This method might be utilized to form a polymeric structure having an umbrella-like structure.

It will be appreciated that shaped structures of
10 varying shapes can be formed by the present invention. The shaped structures formed by the present invention might be hollow, liquid-filled, gel-filled, etc. and/or might include a solid piece as well as combinations thereof.

The coating of the bond-preventing agent can have
15 a varying thickness on different portions of an outer surface of the inner piece. The coating of the bond-preventing agent remaining on the inner piece before the coating of the liquid composition is herein referred to as the "residual coating." The shape of the overcoat layer
20 results from the varying thicknesses of the residual coating of the bond-preventing agent.

In one embodiment, the forming of residual coating of varying shapes can be done by coating portions of an outer surface of the inner piece with a bond-preventing
25 agent in a plurality of dipping steps by immersing the inner piece into the bond-preventing agent to a desired

depth for a desired length of time and subsequently removing the inner piece from the bond-preventing agent. The desired depth and the desired length of time for each of the plurality of dipping steps is selected so that a
5 residual coating of bond-preventing agent of desired thickness and shape remains on portions of the inner piece following the plurality of dipping steps. The residual coating has a specific shape as a result of the variation between the depth of any two of the plurality of dipping
10 steps, the number of dipping steps, the length of time between any two of the plurality of dipping steps, and the varying speeds of withdrawal from the liquids in dip tanks. By appropriate coating and stripping sequence, the bond-preventing agent can be sculpted to result in desired,
15 symmetrical shapes much as the shapes achievable using a lathe. The sculpted residual coating can have varying thickness, curves, and angles, and therefore a specific, desired shape. By subsequently coating the residual coating of bond-preventing agent, which coats the inner
20 piece, with a polymeric bonding composition, a shaped overcoat layer is formed wherein the shape of the overcoat layer results from the varying shapes of the residual coating. Also, other shaped structures, such as a bullet-shaped, molded, solid polymeric tip can be added to the
25 inner piece before the formation of the overcoat layer to attain a desirable shape for a particular part of the

shaped structure with the polymeric overcoat. As used herein, two structures of similar shapes but having unequal ratios of dimensions in the two structures are considered to have different shapes. For example, annular cylinders
5 with the same inside diameter and length but different outside diameters are not considered to have the same shape. As used herein, the residual coating is still considered "a residual coating" even if it is not continuous over two or more portions of the inner piece as
10 long as the coating is not radially separated into layers by a different intervening substance.

In one embodiment, the step of coating the inner piece with the bond-preventing agent can include a step of stripping the inner piece by immersing the inner piece in a
15 stripping fluid to a desired depth for a desired length of time following any of the plurality of dipping steps in order to remove at least a portion of the bond-preventing agent from the outer surface of the inner piece. After the stripping step, the inner piece can be dipped into the
20 bond-preventing agent again to form another coat of the bond-preventing agent on a selected portion of the inner piece if desired. The portion of the inner piece that has been stripped can be dipped in a bond-preventing agent to form a coating. If desired, to form a particular shape,
25 both the stripped portion of the inner piece and a portion of the bond-preventing agent coating that remains on the

inner piece can be dipped into the bond-preventing agent. The thickness of the bond-preventing agent coating can be increased by repeating the dipping and removal steps.

In one embodiment the inner piece might be a
5 simple cylindrical mandrel. Such a mandrel can be used for making, for example, a polymeric hose or tube. In another embodiment, the inner piece can be a polymeric tube. Such a polymeric tube can either be purchased or formed by a process that comprises dipping a mandrel in a polymeric
10 bonding composition. Such a polymeric tube typically can have a closed tip at one end.

In an alternate embodiment, a method of mass producing polymeric structures is provided. This method comprises providing a plurality of mandrels, each mandrel
15 having the aforementioned elements; coating portions of an outer surface of the mandrel with a bond-preventing agent in a plurality of dipping steps by immersing the mandrel into the bond-preventing agent to a desired depth for a desired length of time and removing therefrom, stripping
20 portions of the bond-preventing agent by dipping in a stripping agent, and alternately dipping and stripping to achieve the desired shape, and then coating the mandrel, now at least partially coated with the bond-preventing agent, with a polymeric bonding composition to form a
25 shaped overcoat layer.

The present invention enables the production of structures, such as polymeric structures, with a great reduction of hand labor, which not only is costly, but also contribute to inconsistent results. The present invention
5 can be adapted to produce structures of a wide variety of sizes and shapes by varying the thickness of the residual coating of the bond-preventing agent. The variation of the thickness of the residual coating of the bond-preventing agent can be designed to result in a structure with an
10 overcoat of a specific shape. Because of the variation of need for different types of structures, e.g., simple Foley balloon catheters for placement in the urinary tract, balloon catheters with cavities containing bactericidal agents, catheters with cylindrical sleeve with a lubricant,
15 and the like, a variety of shapes are needed for such structures.

The present invention also provides the advantage of obviating the need to machine a solid (such as metallic) mandrel of a specific shape for making a structure with
20 overcoat of that specific shape. Moreover, often such mandrels cannot be used to make overcoat layers of complex shapes. For example, once a polymeric overcoat layer is formed on a mandrel with a shape as that of the inner tube and the coating of bond-preventing agent shown in FIG. 11A,
25 it is very difficult to remove the overcoat layer from the mandrel. Although injection molding using very expensive

cavity molds may be used to make structures with overcoat layers, the resulting overcoat layer has "part lines" where the mold is opened to allow removal of the molded structure. Such shortcomings can be overcome by using the
5 method of the present invention.

In the making of polymeric structures using the method of the present invention, the outside dimensions (e.g. diameter) can be made with more consistency than in similar products made by traditional manufacturing methods,
10 such as affixing balloon portions to the outer surface of a tube by hand. The method of the present invention makes possible the highly automated process of fabricating polymeric structures with shaped gel-filled, liquid filled cavities, especially those with a soft, outer, elastomeric
15 layer that can conform to the contour of a surface in contact therewith.

Female Catheter

The present invention further relates to a female
20 catheter having an inner tube and an outer layer encircling the tube. In an embodiment of a female catheter of the present invention, a cavity is interposed between the tube and overcoat layer. A fluid is contained in the cavity. The cavity is enlarged at two spaced apart locations along
25 the inner tube so as to form a balloon portion and a reservoir portion connected by a sleeve section. The

sleeve portion is in fluid communication with the balloon and reservoir portions such that fluid is capable of flowing between these portions whereby the size of the balloon and reservoir portions can vary depending on the amount of fluid in each of the portions. The reservoir portion at a proximal end of the catheter is normally in an enlarged state although it is readily compressible into a compressed state. The overcoat has reservoir, sleeve, and balloon sections corresponding to the respective portions of the cavity.

In one embodiment of the invention, a collar encircles the sleeve section of the overcoat to restrict fluid flow between the various portions of the cavity through the sleeve portion and a shroud encircles the reservoir section of the overcoat to limit lateral ballooning thereof when the reservoir section is compressed by forces not completely enveloping the reservoir section.

In another embodiment of the invention, a female catheter as described above further includes a removable stiff plastic stylet inserted into the inner tube to facilitate insertion of the catheter.

The present invention provides a simple, comfortable, disposable female catheter which can be manually inserted by incontinent females and is hand-actuated to achieve retention in a body passageway.

In using one embodiment of the present invention, a distal end of the catheter is inserted into the urethral tract by exerting force on the stylet. Upon emergence into the bladder of the first balloon section at the distal end of the catheter, the fluid in the reservoir portion of the cavity can be forced through the sleeve portion into the balloon portion by compressing the reservoir section of the overcoat layer to inflate the balloon section, thus retaining the catheter in the body passageway. The sleeve section of the catheter can be made to conform to the urethral tract walls providing a leak proof fit. It will be appreciated, that the catheter can allow the inner drain tube to twist and move within the soft outer layer. An elastomeric shroud encircles the reservoir section of the overcoat to limit the lateral ballooning thereof. An elastomeric collar restricts the sleeve section to prevents fluid from being forced back from the balloon portion to the reservoir portion of the cavity during normal activities of the user.

This catheter has the advantage that a limited amount of fluid is confined in the cavity, and therefore the balloon cannot be overinflated. The utilization of a stylet facilitates the insertion of the catheter. The length of the catheter can be designed such that as the reservoir section of the catheter is proximate the outside entrance of the urethra, the balloon section is disposed in

the bladder proximate the entrance to the urethra effective to prevent fluid communication between the urethra and the bladder. The catheter can be made with soft material. Because the overcoat layer of the catheter gently conforms to the urethral wall, irritation to the body tissue is greatly reduced, thus lowering the risk of infection. Further, when the catheter is to be withdrawn, the restriction on the sleeve section can be easily removed by pulling the shroud and the collar from the catheter. Therefore, the retention catheter can be easily inserted, positioned, and withdrawn by the patient without the aid of a health professional.

In one embodiment, the fluid in the catheter is mineral oil. The mineral oil migrates to an outer surface of a silicone rubber outer layer to provide a lubricated, low friction surface.

The present invention, its advantages and other objects obtained by its use are also illustrated by the drawings, and the accompanying descriptive material, in which the preferred embodiments of the present invention are described.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings, in which like and primed reference numerals indicate corresponding parts throughout the several views,

FIG. 1 is a transverse schematic view of a retention catheter made in accordance with the present invention in cross-section;

FIG. 2 is a transverse schematic view of a tube in partial cross-section which can be used to make the retention catheter shown in FIG. 1;

FIG. 3 is a side view of a mandrel for making an embodiment of the retention catheter of the present invention;

FIG. 4 is a cross-sectional view of the mandrel shown in FIG. 3 when secured on a moveable pallet, and following the addition of a coating of a polymeric bonding composition to the mandrel;

FIG. 5 is a cross-sectional view similar to that shown in FIG. 4 but after the addition of a coating of a removable bond-preventing agent to a portion of the outer surface of the tube;

FIG. 6 is a view similar to that shown in FIG. 5, but after the addition of an additional thickness of the removable bond-preventing agent to the outer surface of the tube;

FIG. 7 is a transverse schematic view of the tube shown in FIG. 4-6, but showing only the removable bond-preventing agent in cross-section and only after a portion thereof has been removed from the outer surface of the tube;

FIG. 8 is a transverse schematic view similar to that shown in FIG. 7, but after an additional coating of removable bond-preventing agent has been added to the outer surface of the tube;

5 FIG. 9 is a transverse schematic view similar to that shown in FIG. 8, but after a further thickness of removable bond-preventing agent is added to the outer surface of the tube;

FIG. 10 is a transverse schematic view similar to
10 that shown in FIG. 9, but after a portion of the removable bond-preventing agent on the outer surface of the tube is removed;

FIG. 11A is a transverse schematic view similar to that shown in FIG. 10, but showing an overcoat layer on the
15 removable bond-preventing agent in cross-section on the outer surface of the tube;

FIG. 11B is a view similar to FIG. 11A except that the bond-preventing agent has been generally replaced by mineral oil;

20 FIG. 12 is a schematic illustration of apparatus used to automate the production of retention catheters in accordance with the present invention similar to that shown in FIG. 1;

FIGS. 13A, 13B and 13C are flow charts disclosing
25 steps of methods of manufacturing retention catheters in accordance with the present invention;

FIG. 14 is a schematic representation of the automated controls for the apparatus shown in FIG. 12, used to automate the production of retention catheters made in accordance with the present invention;

5 FIG. 15 is a transverse schematic view similar to that shown in FIG. 11B, but showing another embodiment with transition portions in the distal ends of balloon section and the reservoir section;

10 FIG. 16 is a transverse schematic view similar to that shown in FIG. 15, but showing another embodiment with transition portions in both proximal and distal ends of the balloon section and the reservoir section;

15 FIG. 17 is a transverse schematic view of showing a cross-section of a catheter of FIG. 1 when being inserted in an urethral tract of a patient, prior to the balloon section emerging into the bladder;

FIG. 18 is a view similar to that shown in FIG. 17, but showing the balloon section of the catheter having emerged into the bladder and is being inflated;

20 FIG. 19 is a transverse schematic view of another embodiment of an retention catheter in accordance of the present invention, similar to the view of FIG. 1;

FIG. 20 is a cross-sectional view of the retention catheter shown in FIG. 19 as seen generally from the line
25 20-20 thereof;

FIG. 21 is an isometric view of another embodiment of a shaped structure made by the method according to the present invention; and

FIG. 22 is a cross-sectional view of yet another
5 embodiment of a shaped structure made by the method according to the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present method can be used to make many different shaped structures with a shaped overcoat. Various structures, ranging from simple structures, such as hoses, balloons, and the like, to more complex-shaped structures, such as condoms, urinary catheters with many portions of different geometries, and the like, can be made in with the method of the present invention.

In a preferred embodiment, the method of shaping a structure having a polymeric overcoat layer can be accomplished by first shaping a structure of bond-preventing agent and then coating the shaped structure of a bond-preventing agent with a polymeric bonding composition to form a shaped overcoat layer. The shaped structure of a bond-preventing agent can be formed by coating the outer surface of an inner piece, such a mandrel or a tube with a bond-preventing agent to result in a residual coating with a desired shape. The coating of the bond-preventing agent can have a varying thickness on different portions of an outer surface of the inner piece, which results in a particular shape in the shaped structure having a polymeric overcoat. The inner piece, if it has a lumen, is preferably made by a dipping process. Similarly, the residual coating and the overcoat layer are preferably made by respective dipping steps in appropriate liquid materials.

An embodiment of a female urinary catheter in accordance with of the principle of the present invention is shown in FIG. 1. The catheter can be made with the above method or by other appropriate methods. This
5 catheter 5 has an inner lumen 8 defined by an inner surface 10 of a tube 12. An overcoat layer 14 encircles the tube 12 to define a cavity 16. The cavity 16 contains a fluid 18 and has a fluid reservoir portion (or simply "reservoir portion") 22 and a balloon portion 24 interconnected by a
10 catheter sleeve portion (or simply "sleeve portion") 26 such that fluid 18 can pass between the fluid reservoir portion 22 and the balloon portion 24 via the catheter sleeve portion 26.

Such a catheter is a "hand-actuated retention
15 catheter" and is useful in that a restriction means such as a restriction disc, clamp, elastomeric collar, or elastomeric collar 50 with a shroud 51, can be used to encircle the sleeve portion 26 to restrict fluid from flowing from the balloon portion 24 to the reservoir
20 portion 22 after the balloon portion has been expanded by squeezing the reservoir section of the overcoat (or "squeeze bulb") by hand, thus maintaining the balloon portion 24 in an expanded state to retain the catheter in the desired location in a body passageway. The restriction
25 means is preferably an elastomeric collar 50 with a shroud 51 for limiting the lateral bulging of the squeeze bulb

when the squeeze bulb 30 is compressed, for example, between the thumb and the index finger. The restriction means can be loosened or removed to allow fluid to flow from the balloon portion when desired, thus deflating the balloon portion 24 to facilitate removal of the catheter from the body passageway. Preferably, the catheter further includes a stylet for deploying the catheter in the urinary tract.

10 Method of Making Polymeric Shapes

To illustrate the application of the present method to forming a shaped, polymeric structure, the embodiment of making a female urinary catheter in accordance of the present invention is described in the following. This embodiment of a female urinary catheter (see FIG. 1) has various portions with different diameters. Referring now to FIG. 2, a resilient, polymeric tube 12 with a closed end, preferably a silicone rubber tube 12, is to be formed first. Although the preferred material for the tube 12 is medically acceptable, silicone rubber, it is to be appreciated that other suitable, medically acceptable polymeric materials may be used. A silicone rubber tube can be made by dipping a mandrel in a polymeric dispersion containing uncured silicone rubber to form a coating and then curing the coating. The uncured silicone rubber for

making the tubing is preferably one that will result in a silicone rubber of 50-70 durometer.

Referring now also to FIGS. 3-14, mandrels 62, preferably made of a metal or alloy such as stainless steel or aluminum, are used for forming the catheter of the present invention. The mandrels are preferably coated with a polymer having low surface energy, such as tetrafluoroethylene (e.g., TEFLON) so that the completed catheters can be readily removed from the mandrels. FIG. 12 provides a schematic representation of a preferred mechanized catheter production line 81 which is virtually fully automated. FIGS. 13A-C highlights various steps of the automated method which is described below. The mechanized production line 81 includes one or more pallets 64 having a plurality of elongated mandrels 62 each having a generally round or blunt end distal to the pallet. The mandrel 62 preferably has an enlarged section corresponding to a connector portion (or an end piece) 80 proximate the pallet. The end piece 80 can have a transition portion that provides a gradual transition from the wider, proximal end of the end piece to the narrower, inner tubing of the catheter if desired. The moveable pallet 64 is attached to a transport mechanism 82 which can move the pallet to a position over one of a plurality of dip tanks 84, 86, 88, 90, 92, 94, 96. Each of the respective dip tanks will contain a fluid in which mandrels 62 are immersed when

the respective dip tank is raised. By dipping in the fluids in these dip tanks, a polymeric tube, shaped residual coating of a bond-preventing agent, and a polymeric overcoat layer are formed on the mandrel to
5 result in a shaped, completed structure.

Movement of the pallet 64 is preferably controlled by an output from a computer control mechanism 83, illustrated schematically in FIG. 14, which are directed to the transport mechanism 82. Each of the respective dip
10 tanks 84,86,88,90,92,94,96 are raised and lowered by associated lift mechanisms. The lift mechanisms are also preferably controlled by outputs from the computer control mechanism 83. Each of the lift mechanisms includes a speed control capable of modulating the rate at which the
15 respective dip tank is raised and lowered so that the speed at which the respective mandrels are immersed into and withdrawn from the respective fluid within the respective dip tank can be varied, either continuously or
intermittently, and either during one dipping or between
20 different dippings. The computer control mechanism 83 also receives inputs from depth sensors within each of the respective dip tanks. The depth sensors, preferably ultrasonic depth sensors, are capable of providing an input to the computer control mechanism 83 which enables the
25 computer control mechanism to determine when the mandrels 62 are immersed to a desired depth in the respective dip

tank. Timers are also provided for each of the respective dip tanks in order to provide inputs to the computer control mechanism 83 so that the computer control mechanism 83 can determine when a desired period of time has elapsed.

5 A computer program is provided which moves the pallet along the mechanized production line 81 and raises and lowers the respective dip tanks at predetermined times, at predetermined rates of speed, and to predetermined locations and/or heights to enable the mechanized

10 production line 81 to produce a plurality of completed catheters 4 by dipping the mandrels in various dip tanks of fluids. In alternate embodiments, the mechanized production line 81 may have a series of pallets (not shown) which are moved along an alternate transport mechanism (not

15 shown) in series.

After a retention catheter is made, preferably, it is tested. During the testing of the completed retention catheter 5, a removable cylindrical support device 98 is secured around the catheter sleeve section 34 of the

20 overcoat layer 14 interposed between the balloon section 32 and the reservoir as shown in FIG. 11B, to minimize any potential expansion of the catheter sleeve section 34. During testing, the balloon section 32 is expanded and stretched. The step of testing the balloon section 32

25 helps to create a retention catheter which has a readily expandable balloon section, as opposed to the catheter

sleeve section 34 which does not expand as readily upon compression of the fluid reservoir section 30. In addition, the balloon section can be inherently more readily expandable than the sleeve section due to its preferably larger diameter. After testing, the elastomeric collar 50 with a shroud 51 connected thereto is secured onto the catheter 5 by slipping the distal end 42 of the catheter 5 through the collar 50 until the collar encircles the catheter 5 on the catheter sleeve section 34 of the overcoat layer 14 just distal to the squeeze bulb 30 and the shroud encircles the squeeze bulb. In this way, when the squeeze bulb 30 is squeezed by the user, the shroud prevent the squeeze bulb from significantly stretching the portion of the reservoir section of the overcoat not being compressed to cause lateral ballooning (or bulging) thereof.

If desired, the polymeric tube can also be provided by either forming from a suitable tubing (e.g. medically adaptable silicone rubber tubing) purchased or made by an extrusion process known to those skilled in the art. The tubing can be cut to length, have a tip secured thereon, and then be secured to support rods, which can be attached to the pallet. The tip can be affixed to the tube, for example, by using an appropriate adhesive.

In the Applicants' use of the preferred methods of the present invention, production can be almost completely

automated. Sets of polymeric structures such as catheters
5 can be manufactured simultaneously. In such preferred
automated manufacturing process, the preferred pallet 64
has 400 TEFLON-coated stainless steel mandrels 62 attached
5 to the pallet in 20 rows of 20 mandrels, wherein each of
the mandrel 62 is about 1 inch (2.54 cm) from each adjacent
mandrel.

Referring to FIGS 4-10, in a preferred embodiment
of the present method wherein the manufacturing process is
10 automated for mass production of catheters, 400 of TEFLON-
coated stainless steel mandrels are mounted vertically on a
moveable pallet 64. The pallet 64 is then moved via a
transport mechanism 82 (see FIG. 12) over a series of dip
tanks 84,86,88,92,94,96 as follows in one of these
15 embodiments:

(A) The pallet 64 is transported to over a first
tank 84, which contains a polymeric bonding composition
(e.g., an uncured silicone dispersion, for example, a
mixture of uncured silicone rubber in toluene that is
20 made by dispersing DOW CORNING Q7-4850 in the solvent
(i.e., toluene). The tank 84 is then raised to immerse
the mandrels in the uncured silicone dispersion to a
depth to cover substantially the whole length of the
mandrel such that the uncured silicone rubber
25 dispersion covers the mandrel up to the level of dash
line M. The dip tank 84 is then lowered and the outer

surface of the mandrel from the distal end up to the dash line M in FIGS. 3-4 is coated with a layer of the uncured silicone rubber dispersion, which is allowed to air-dry for the solvent to evaporate for about 8 minutes. The dipping step is repeated several times to obtain a desirable thickness of uncured silicone rubber coating corresponding to a desired cured silicone rubber thickness. The thickness of the inner tube is preferably about 0.89 mm (0.035 inch), plus or minus 0.1 mm (0.004 inch). The thickness of cured silicone rubber coating on the mandrel is selected such that the completed catheter can be deployed in the body by urging the catheter up the urethra (as shown in FIG. 17 below) with a stylet inserted in the inner tube of the catheter and bearing or biasing against the tip of the inner tube without puncturing the inner tube. When the tank is lowered for the last time, the coating is allowed to air-dry for several minutes, preferably 10 minutes.

(B) The pallet 64 is then advanced to a dip tank (not shown) containing hot USP petrolatum heated to about 210°F (99°C) and the uncured silicone rubber coating on the mandrel is cured by dipping in the hot petrolatum for about 0.5 hour and the removed therefrom. Preferably, the cured silicone rubber coating on the mandrel is subsequently dipped in a

volatile organic solvent such as toluene to remove all the petrolatum before the next dipping step.

Alternatively, the curing can be done by removing the coated mandrels from the transport mechanism and

5 placing them in a hot-air oven (220°F or 104°C) for about 0.5 hours to cure the uncured silicone rubber for forming an inner (or intermediate tube). After curing the silicone rubber, the pallet is again secured to the transport mechanism. "An intermediate tube" as used
10 herein refers to a polymeric tube which can be coated with coating of a bond-preventing agent and overcoat layer to form a catheter. Alternatively, the individual mandrels can be placed in the oven separately. Another alternative is to heat the pallet
15 with the mandrels and uncured silicone rubber coating in an oven designed for the whole pallet unit without removing the pallet from the transport mechanism in the production line.

(C) The pallet 64 is then moved and stopped over
20 a second tank 86, which contains a bond-preventing agent 66, such as a petroleum jelly or petrolatum, preferably a liquid petrolatum mixture at about 125°F (about 52°C). The mixture will include Perfecta™ Petrolatum USP (from Sonneborn Petrolatums, Sonneborn
25 Div., Witco Chemical Corp., New York, NY). The tank is raised so as to immerse the intermediate tubes 3 into

the petrolatum to such a depth (up to dashed line A shown in FIGS. 5 and 6) that the petrolatum coats the first, second, third and fourth portions 20a, 20b, 20c and 20d of the outer surface 20 of the intermediate tubes 3. The dip tank 84 is then lowered and these portions of the outer surface 20 are coated with a first coating 75 of petrolatum. The tubes 3 are allowed to air-dry and cool for about 30-60 seconds, and the dip tank is raised again and the tubes 3 are immersed again to the same depth. This is repeated 10-15 times until the first coating 75 is built up to a desired thickness (referred to as coating 76 in the drawing, see FIGS. 5 and 6). The desired thickness of the first coating 76 on the tube 3 corresponds to the desired thickness of the reservoir portion 22 of the cavity. Preferably, this thickness is about 1 cm to 2 cm (0.4 in to 0.8 inch) such that the resulting reservoir section of the completed catheter will not be inadvertently drawn into the urethra.

(D) The pallet 64 is then automatically advanced and stopped over a third dip tank 88 which contains hot USP petrolatum heated to about 180°F (about 82°C). The third dip tank 88 is raised so as to immerse the intermediate tubes 3 into the super-heated petrolatum for 1 minute so that the super-heated petrolatum comes up to dashed line B and into contact with the first

coating 76 on the second, third and fourth portions 20b, 20c and 20d of the outer surfaces 20 of the intermediate tubes 3 from the prior dipping step. The third dip tank 88 is then lowered. This dipping step causes the coating 76 of petrolatum from the prior dipping step to be largely removed (or stripped) from the second, third and fourth portions 20b, 20c and 20d of the outer surface 20 of the intermediate tubes 3, as shown in FIG. 7. Some residual petrolatum may remain on these portions of the outer surface 20. However, most of the petrolatum is removed from them. The time of dwelling and/or the rate of withdrawal of the mandrels from the stripping fluid can be varied to effect a gradual reduction of the diameter of the distal portion of the first coating 76 remaining on the mandrel, thereby forming a transition portion in the second portion. For example, the time of dwelling of the proximal part of the first coating 76 on the 20b portion of the surface 20 in the stripping fluid can be less than the time of dwelling of the more distal part of the same portion to allow more time to strip the distal portion. This can be accomplished, for example, by lowering the dip tank from the dash line B at a decreasing rate for a distance desired for the transition portion.

(E) The pallet 64 is then automatically advanced and stopped over a fourth dip tank 90 containing a liquid petrolatum mixture identical to that in the second dip tank 86, except that the temperature is about 135°F (about 57°C). The fourth dip tank 90 is then raised so as to immerse the intermediate tubes 3 into the petrolatum mixture to the same depth as they were immersed in the super-heated petrolatum in the third dip tank 88. In the case where there is a transition portion on the coating remaining on the intermediate tube after the stripping step, the tank is raised to a depth so as to just immerse the distal end of the transition portion. The tank 90 is then lowered, leaving a coating 77 (referred to as the second coating to distinguish from the first coating) of petrolatum on the second, third and fourth portions 20b, 20c and 20d of the outer surface 20, as shown in FIG. 8. If desired, this step can be repeated a few times to build up the thickness of the second coating to have an outside diameter generally corresponding to the diameter of the urethra. The tubes are then immersed again up to the dashed line C and a third coating 78 is created over the third and fourth portions 20c and 20d of the outer surface 20 (as shown in FIG. 9). Preferably, the dipping step is repeated to build up the the third coating 78 to that it is

somewhat thicker than the second coating 77 but thinner than the first coating 76.

(F) The pallet 64 is then automatically advanced and stopped over a fifth dip tank 92 containing hot USP petrolatum like that in the third dip tank 86. The fifth dip tank 92 is raised and the tubes 3 are immersed in the super-heated petrolatum up to the dashed line D for about 30 seconds. The fifth dip tank is then lowered and the third coating 78 of petrolatum is removed from the fourth portion 20d of the outer surface 20, as shown in FIG. 10. As before, if desired, a transition portion can be formed by lowering the dip tank 92 gradually or at a decreasing rate once the dip tank has been raised to the desired position. In addition, if desired, part of the residual coatings remaining on the intermediate tube can be further shaped by mechanically removing some of the coatings, for example, by using a knife-like device to sculpture specific shapes thereon.

(G) The pallet 64 is then automatically advanced and stopped over a sixth dip tank 94 containing a volatile organic solvent such as toluene, xylene, or the like, effective to remove all of the bond-preventing agent therefrom so that there will be no interference with the subsequent bonding of silicone rubber to the intermediate tube. The fifth tank 94 is

then raised to immerse the intermediate catheters 3 in the organic solvent up to dashed line D (or up to the distal end of the transition portion in the portion 20d below the dash line D if a transition portion is present) so as to remove any remaining petrolatum 66 on the fourth portion 20d of the outer surface 20. The intermediate catheter tubes 3 now have three bands 76, 77 and 78 of semi-solid petrolatum around the axial circumference of each of the intermediate tubes 3, as shown in FIG. 10.

(H) The tank 64 is then lowered, and the organic solvent is allowed to evaporate from the outer surface 20 for about 15 minutes. The pallet 64 is then automatically advanced to a seventh dip tank 96 containing a hexamethyl disiloxane silicone rubber dispersion which is effective to minimize any disruption of the integrity of the petrolatum coatings 76, 77 and 78 remaining on the intermediate tubes 3. Although the present retention catheter 5 can be constructed of any suitable, medically acceptable, polymeric material, medical grade silicone rubber is preferred. The silicone rubber of the sleeve overcoat preferably is soft, with a hardness of about 20 to 40 durometer, more preferably about 30 durometer. It will be appreciated that such a silicone rubber polymeric must be fully cured prior to sale or use. The overcoat

layer can have a thickness of about 0.1 mm to 1 mm, preferably about 0.35 mm plus or minus 0.06 mm (0.0175 inch plus or minus 0.0025 inch). The preferred uncured silicone rubber dispersion is a very soft uncured silicone rubber dissolved in weak solvent that will not attack petroleum jelly. An effective uncured silicone rubber dispersion for making the present invention is a 25-75 mixture of uncured silicone rubber in hexamethyl disiloxane. This mixture is made of GE 603015 LIQUID SILICONE RUBBER and hexamethyl disiloxane. Another example of such an uncured silicone rubber dispersion is Dow Corning Q7-4720 in hexamethyl disiloxane. The seventh dip tank 94 is then raised to immerse essentially the entire length of the intermediate tube 3 in the silicone mixture. This step is preferably subsequently repeated 4-6 times at 8-minute intervals to allow time for significant solvent evaporation. When the tank 96 is lowered for the last time, the overcoat layer 14 is allowed to dry and the solvent is allowed to evaporate for about 30 minutes, preferably about an hour. If transition portions are provided on the distal portions of the first coating (in second portion 20b) and the third coating (in fourth portion 20d) as described hereinabove, the resulting completed catheter will have features shown in FIG. 15, which shows a transition portion of a

balloon section and a transition portion of a reservoir section.

(I) In a preferred embodiment of the present method, the pallet 24 is advanced to yet another dip
5 tank (not shown) similar to the others, but containing hot USP petrolatum, heated to about 210°F (about 99°C). The tubes 3 are completely immersed in the hot petrolatum for 1 hr to cure the uncured silicone rubber and form the completed intermediate catheters 4 shown
10 in FIG. 11A, and the tank (not shown) is then lowered.

(J) The completed intermediate catheters 4 are then removed from the pallets and further cured in hot air at 220°F (about 104°C) for about an hour and a half (1.5 hrs).

(K) After the completion of the heat cure, the
15 intermediate catheters 4 are allowed to cool before forming an eyelet 40 each thereon to form the completed retention catheter 5. Preferably, the intermediate catheters are soaked in hot mineral oil at 250°F
20 (121°C) for 24-48 hours. The intermediate catheters 4 are then removed from the oil and preferably cleaned.

(L) The completed catheters 5 are finished by punching the fluid conduit access opening or eyelet 40 in the exterior surface 36 of each catheter such that
25 the opening communicates with the fluid conduit lumen 8 in a location below or distal to the balloon section

32. In a device not used for draining fluid, such is a device used for blocking a passageway, for example, for stopping fluid leakage therethrough, such an eyelet may not be needed.

5 (M) If not previously soaked in mineral oil, the completed catheters 5 are then soaked for preferably 24 to 48 hrs in a hot bath of mineral oil at 250°F (about 121°C). The mineral oil will generally replace the petrolatum 66 in the cavity 16 after this period of
10 time, and will remain a fluid 18 at room temperature. The mineral oil has a significantly lower viscosity than petrolatum at room temperature. A different fluid such as water, sterile saline, glycerin, polyethylene glycol, gas (e.g., air) and the like, or appropriate
15 mixtures thereof may also be substituted for the mineral oil/petrolatum fluid in alternate embodiments by removing most of the latter fluid, and then inserting the former by an appropriate means.

 (N) The expandable balloon section 32 is then
20 tested and stretched, and then an elastomeric collar 50 with a shroud 51 is put into place over the sleeve section 34 and the reservoir section 30 of the overcoat by slipping over the distal portion of the catheter from the distal end. The completed catheters 5 are
25 packaged and then sterilized prior to shipment.

The above process of shaping the preferred embodiment of a hand-actuated catheter is summarized in the flow diagrams in Figures 13A, 13B and 13C. The automated method that Applicants claim can permit completed catheters
5 5 to be manufactured at the rate of about 1,600 catheters per hour. Because little handwork is involved, the catheters 5 produced will be consistent, of very high quality, and less costly to produce than comparable prior art catheters. The exterior surface 36 is believed to be
10 smoother and softer than the exterior surface of hand-glued balloons.

The method of the present invention can be used to make structures having an overcoat layer encircling an inner piece wherein the size of the cavity and the number
15 of cavities can be different from the embodiments described hereinabove. The cavities can be isolated from each other or one or more of the cavities can be connected together to have fluid communication. For example, the cavity defined between an overcoat and the inner tube can have sections
20 with different sizes (such as fluid reservoirs, sleeve cavities, balloons as in the embodiment described hereinabove). Some of the cavities may also be linked by fluid communication means that is not defined between the overcoat layer and the inner tube. These variations
25 affects the shape of the final structure with the overcoat layer, e.g., a catheter. Also, any structure or object,

e.g. a conical tip, affixed to the inner piece, e.g., a tube, will also affect the shape of the final structure when the overcoat layer is shaped.

The method can be used to make structures having
5 transition portions on both ends. One embodiment of the process for making a transition portion gradually narrowing distally has been described hereinabove. Transition portions on the proximal ends can be made by immersing the inner piece, e.g., intermediate tube, to a lesser depth in
10 the bond-preventing agent in each succeeding, thickness-building dipping step during the multiple-dipping process in the formation of the residual coating (e.g. the first and the third coating of the bond-preventing agent of Fig. 10). By this method, the proximal ends of the first and
15 third coatings narrow gradually in the proximal direction. By providing such transition portions, structures with various portions of different size can be made to have gradual change rather than abrupt change in shape, for example, a female urinary catheter as shown in FIG. 16.

20 As previously stated, the present method can be used to make structures that contain a fluid, such as mineral oil. Furthermore, if desired, the completed shaped structure can be a hollow structure, such as a hollow or air-filled balloon. In this case, the inner piece can be
25 pulled from the overcoat layer and the bond-preventing agent or liquid (such as mineral oil) can be squeezed out

of the inside cavity of the completed shaped structure.
The inner piece can be pulled from the overcoat layer if
the inner piece is not in direct contact with the overcoat,
as in the case wherein a coating of bond-preventing agent
5 is disposed between the inner piece and the overcoat layer
over all the area of the overcoat layer. In another
embodiment, the inner piece is coated with a release layer
such as TEFLON so that an overcoat layer is not irremovably
bonded to it. If desired, the bond-preventing agent can be
10 left in the cavity enclosed by the overcoat layer. As
previously stated, the present method can be used to make a
simple structure such as a condom. This can be done by a
process which includes dipping a mandrel in a bond-
preventing for form the shaped structure of bond-preventing
15 agent and coating this structure with a polymeric bonding
composition. Depending on the polymeric composition used,
a curing step may or may not be necessary. The mandrel and
the bond-preventing agent can be removed from the completed
condom with appropriate methods.

20 Therefore, based on the present invention, one can
make structures, such as hoses, balloons, condoms,
cannulas, catheters, and the like, with one or more
sections with different diameters, lengths, or shapes. For
example, a hollow structure with a polymeric overcoat of a
25 shape shown in FIG. 21, which has a hollow disc 202
interconnecting and disposed between a first tubular

structure 204 and a second tubular structure 206 can be made. Another example is a generally umbrella-shaped polymeric structure as shown in FIG. 22. This generally umbrella-shaped structure 210 has, for example, a

5 cylindrical inner piece (or shaft) 212 (which can be a rod or a tube) and a bowl-shaped outer piece (or hood) 214 integrally connected to an end of the inner piece. The hood encircles the shaft at least partially (e.g., the distal portion or entire length) and defines a recess 216

10 in cooperation with the shaft at the distal end of the shaft. The periphery of the hood is not attached to the shaft. This structure can be made by a method that includes first forming a cylindrical polymeric inner piece (which can be made by injection molding or by coating a

15 mandrel to form a tube and filling the tube with polymeric material to form a rod), coating the cylindrical inner piece with a residual coating of bond-preventing agent, stripping away the distal portion of the residual coating of bond-preventing agent up to the end of the cylindrical

20 inner piece, and subsequently coating the distal portion of the cylindrical inner piece and the residual coating with a polymeric bonding composition without completely encapsulating or covering the proximal portion of the residual coating. By varying detailed steps of the method,

25 other structures with recesses of various shapes can be formed.

Female Urinary Catheter

The female urinary catheter of the present invention is a hand-actuated retention catheter which is similar to the hand-actuated retention catheter disclosed in U.S. Patent Application Ser. No. 07/827,936, filed January, 29, 1992, the method of making, characteristics, and use of which are incorporated by reference herein. The preferred embodiment (shown in FIG. 1) of the hand-actuated retention catheter 5 of the present invention comprises a tube 12 having outer surface 20 and inner surface 10 and an overcoat layer 14. The tube 12 has an inner lumen 8 which is defined by the inner surface 10 of the tube. The overcoat layer 14 encircles the tube 12 and has interior and exterior surfaces. A cavity 16 is interposed between the tube 12 and the overcoat layer 14. This cavity 16 also encircles the tube 12 and is defined by portions of the outer surface 20 of the tube 12 in cooperation with portions of the interior surface of the overcoat layer 14. This cavity 16 preferably contains a fluid 18, although it can contain a soft, moldable semisolid such as petroleum jelly, or the like, or a combination thereof instead. The overcoat layer 14 includes an expandable, resilient balloon section 32 proximate a distal end, a reservoir (or bulbous) section 30 proximal thereto, and a catheter sleeve section 34 disposed therebetween. The sleeve section 34

interconnects the balloon section 32 and the reservoir section 30. The overcoat layer 14 is joined to the outer surface 20 of the tube 12 at the distal and proximal ends of the cavity 16 (i.e., above and below the cavity) along the tube. The cavity 16 also includes a balloon portion 24, a reservoir portion 22, and a catheter sleeve portion 26 that interconnects the balloon portion and the reservoir portion. The catheter sleeve section 34 of the overcoat layer defines a narrowing in cavity through which fluid passes if made to flow between the balloon portion 24 to the reservoir portion 22. Each of the sections can be cylindrical in shape, or a transition portion that narrows gradually can be provided on one or both ends of the balloon section and/or the reservoir section to facilitate smooth insertion and withdraw of the catheter into the body. The balloon section of the overcoat and the balloon portion of the cavity are of a size such that when the balloon is expanded, it is effective to prevent withdrawal of the balloon section into the urethra in contact with the catheter. Disposed on the sleeve section 34 proximate the squeeze bulb 30 is an elastomeric collar 50 with a shroud 51, which encloses the squeeze bulb. The shroud 51 is preferably, but not necessarily, unitary and integral with the collar 50. The shroud 51 can be connected with the outer edge of the collar 50 such that they resemble a cylindrical cap with an end disc having an opening in the

center of the end disc. In another embodiment (not shown), the shroud can be separate from the collar and the shroud can have an ellipsoid shape with open ends which have diameters larger than that of the sleeve section 34 to
5 generally conform to the shape of the reservoir section 30.

The collar 50 presses radially inward on the sleeve so that fluid is prevented from flowing from the balloon portion of to the reservoir portion of the cavity during normal, everyday activities of the user. However,
10 when the catheter is being deployed, the fluid can be deliberately forced past the sleeve section of the cavity by squeezing the squeeze bulb, thus forcing the inside diameter of the collar to slightly increase. In this manner, the balloon section is expanded (i.e. inflated) to
15 retain the catheter in the body passageway.

Preferably, the collar 50 and shroud 51 are made of a material soft and resilient enough such that when desired, they can be readily pulled along the catheter over the reservoir section. Preferably, the shroud 51 is
20 generally cylindrical with an inside diameter of about the outside diameter of the squeeze bulb so that it can be readily slipped over the squeeze bulb 30 during assembly of the catheter. When a force is not being applied from an external source, as by compressing with a thumb and a
25 finger, preferably the shroud does not compress the squeeze bulb. Without the shroud 51, when the squeeze bulb 30 is

squeezed to force the fluid from the reservoir portion 22 to the balloon portion 24 through the sleeve portion 26 of the cavity, for example, as when being compress between the thumb and index finger of an user, because of the

5 resistance to fluid flow caused by the restricting collar, the squeeze bulb 30 has a tendency to balloon or bulge out in a direction perpendicular to the direction of the applied compression force, i.e. generally lateral to the axis of the catheter. This is because when compressing

10 forces are not applied in an enveloping manner on the squeeze bulb, the fluid in the squeeze tends to balloon out at the locations with the least compressing force. Such lateral ballooning in the squeeze bulb 30 decreases the efficiency of the squeezing action and make it relatively

15 difficult to expand the balloon portion 24 of the cavity. A shroud 51 encircling the squeeze bulb 30 inhibits he lateral ballooning of the squeeze bulg as it is being squeezed, thus directing the compressing force of the squeezing action to force the fluid to increase the inside

20 diameter of the collar. In this way, fluid is passed to expand the balloon portion 24. The shroud 51 is preferably constructed of a silicone rubber which is soft and pliable and has a thickness making it relatively less stretchable than the overcoat layer on the squeeze bulb 30 and the

25 balloon section 32 so that the shroud can inhibit the lateral ballooning of the squeeze bulb 30 when the squeeze

bulb is compressed to force fluid past the sleeve section restricted by the collar 50. The elastomeric collar and shroud can be made with the same silicone rubber material that is used for constructing the inner polymeric tube 12 or the overcoat layer 14. The elastomeric collar and shroud can be made with conventional methods such as injection-molding, or if preferred, with an overcoat-shaping method through dipping in a polymeric material similar to that described above.

10 The female urinary catheter described hereinabove can be used in the following fashion. Referring to FIGS. 17-18, first, an elongated, stiff, but slightly flexible stylet 104 is removably inserted into the catheter 5 through the opening at the connector or end piece 80. Such
15 a stylet is preferably made with plastic and has a diameter slightly smaller than the inside diameter of the inner tube of the catheter for easy insertion and withdrawal. The stylet preferably has a round or blunt distal end 106 and a proximal end having a generally flat end portion 108
20 generally perpendicular to the elongated part of the stylet. If desired, the flat end portion can extend with its plane parallel to the axis of the stylet. The proximal end portion 108 of the stylet can also be of a shape (e.g., bulb-shaped) for a person's hand to comfortably press
25 thereon to urge the stylet into the catheter and bear against the tip of the catheter. The length of the stylet

is slightly longer than the length of the catheter such that when inserted all the way inside a catheter with the distal end of the stylet bearing against the tip of the catheter, the proximal end portion 108 of the stylet 104 is
5 outside and proximal to the end piece 80 of the catheter 5.

The tip of the catheter is then inserted into the urethral tract 120. By generally pressing on the proximal end portion 108 of the stylet, the balloon section of the catheter is slowly urged into the urethral tract. The
10 catheter is slowly advanced into the urethra until the balloon section 32 reaches and emerges into the space inside the bladder 128 and the squeeze bulb (or reservoir section) 30 of the catheter reaches the external opening of the urethra.

15 Referring to Fig. 18, after the balloon section 32 emerges from the urethra, the squeeze bulb 30, encircled by the shroud 51, is squeezed, for example, between a thumb and an index finger, to force the fluid 18 from the reservoir portion 22 into the balloon portion 24 through
20 the sleeve portion 26. Strong enough forces are applied (the directions of application are shown by the arrows P and Q) to overcome the compression force by the collar 50 so that fluid can pass through the sleeve portion 26 to inflate the balloon section of the overcoat 32. The shroud
25 51 inhibits any significant ballooning of the squeeze bulb 30 in a direction perpendicular to the applied forces P and

Q. The collar 50 prevents fluid that has been previously forced out of the reservoir portion of the cavity from flowing back thereinto, thus maintaining the balloon portion 24 in an expanded state to retain the catheter in the desired location in a body passageway. The urethral (or sleeve) section 34 of the catheter can softly conform to the wall of urethral tract to provide a gentle leak-proof fit. The stylet 104 is then withdrawn from the catheter 5 by grasping the catheter to maintain it in place as the stylet is gently pulled out of the catheter. Alternatively, the stylet 104 can be withdrawn before the balloon portion 24 is expanded. The end piece 80 of the catheter is connected to a connector tube which leads to a bag for holding urine.

15 To remove the catheter from the body, the shroud 51 can be grasped by hand and gently pulled while the sleeve section 34 of the catheter is firmly held so that the collar 50 with shroud 51 is slipped proximally over the reservoir section 30. If the collar 50 and the shroud 51 are separate, the collar can be similarly removed by pulling. Subsequently, the sleeve portion 26 of the cavity, no longer being restricted by the collar 50, allows the fluid to freely return from the balloon portion 24 to the reservoir portion 22, thus deflating the balloon portion to facilitate the removal of the catheter from the body passageway.

The catheter of the present invention can be made so that the enclosed cylindrical sleeve cavity contains a lubricant. An example of lubricant effective for lubricating the sliding of the overcoat on the surface of inner tube and reduction of friction is petrolatum or liquid soap. The lubricant and the method of incorporating the lubricant into the cavity as disclosed in U.S. Patent 5,098,379 (Conway et al.) are incorporated by reference herein.

10 The female catheter can also include bactericidal agents. One embodiment is to incorporate the bactericidal agents into the polymeric matrix of at least a portion of the overcoat layer of the cannula or catheter. The polymeric matrix preferably includes cured silicon rubber.

15 The bactericidal agent and the method of incorporating such bactericidal agent into the matrix of the overcoat layer as disclosed in U.S. Patent 5,261,896 (Conway et al.) are incorporated by reference herein. Another method of providing bactericidal effect by the catheter is to

20 incorporate bactericidal agents in the substance, such as a lubricant, contained in the cavity defined by the overcoat layer and the inner tube with a means provided for the diffusion of the bactericidal agents out of the cavity.

25 The bactericidal agents and the method of incorporating these agents into the catheter as disclosed in U.S. Patent

5,269,770 (Conway et al.) are incorporated by reference herein.

Another embodiment is a catheter (as shown in FIGS. 19-20) having channel 27 in the wall of the inner tube that provides fluid communication between the balloon cavity 24" and the reservoir cavity 22" (the features of the primed numbers in FIGS. 19-20 correspond to the features of corresponding numbers in FIG. 1). The reservoir cavity 22" has a cylindrical narrow portion 26" distal thereto extending toward but not communicating with the reservoir cavity 22". The channel enters the balloon portion 24" of the cavity at an opening 25 and enters the cylindrical, narrow portion 26" of the reservoir cavity at an opening 23. Such an inner tube can be made by injection molding. Another embodiment is a catheter similar to the retention catheter described hereinabove in FIG. 1 with the differences that the balloon section of the catheter has a much larger geometry (i.e., diameter) than that shown in FIG. 1. If preferred, catheters with more than one cavity wherein the cavity has one or more portions of different diameters can be made with the method of the present invention.

A catheter of the present invention can also be packaged in a vapor barrier pack (such as metal foil or plastic) with a stylet inserted in the catheter to reduce

the loss of fluid. Such a package can be sold as a kit commercially.

It is to be understood that even though numerous characteristics and advantages of the present invention have been set forth in the foregoing description, together with details of the structure and function of the invention, the sequence or order of the specific steps, or the actual compositions, solvents, temperatures, environmental conditions and the like employed for each step, it will be appreciated the disclosure is illustrative only, and that changes may be made in detail, especially in matters of shape, size, arrangement of parts or sequence or elements of events within the principles and spirit of the invention. For example, in making a shaped structure with the method of the present invention, the liquid composition for forming the inner piece can be a nonpolymeric material such as a composition containing an inorganic dispersion such as clay or a molten metal such as lead. Likewise, the liquid composition for coating the bond-preventing agent need not be polymeric.

WHAT IS CLAIMED IS:

1. A method of shaping a structure having an overcoat layer, said method comprising:
 - (a) forming a shaped structure of a bond-preventing agent; and
 - (b) subsequently coating the shaped structure of a bond-preventing agent with a liquid composition to form a shaped overcoat layer, wherein the shape of the overcoat layer results from the shape of the shaped structure of a bond-preventing agent.
2. The method of claim 1 wherein the shaped structure includes a first section, a second section, and a third section, said second section interconnecting and disposed between said first and third sections, said second section having a larger transverse cross-sectional area than that of said first and that of said third section.
3. The method of claim 1 further comprising replacing the bond-preventing agent with a fluid after forming the overcoat layer so as to form a fluid-filled cavity encircled by said overcoat layer.
4. The method of claim 1 wherein the shaped structure of a bond-preventing agent is formed by providing an inner piece and shaping a residual coating of the bond-preventing agent

on an outer surface of the inner piece to a desired shape, wherein said coating of said bond-preventing agent has a varying thickness on different portions of an outer surface of said inner piece.

5. The method of claim 4 wherein the step of shaping a residual coating of a bond-preventing agent comprises coating portions of an outer surface of said inner piece with a bond-preventing agent in a plurality of dipping steps, wherein the inner piece is immersed into the bond-preventing agent to a desired depth for a desired length of time, and subsequently removed therefrom, wherein the desired depth and the desired length of time for each of the plurality of dipping steps is prescribed so that a residual coating of bond-preventing agent remains on portions of the inner piece following said plurality of dipping steps, said residual coating having varying thickness as a result of variation between the depth of any two of said plurality of dipping steps and the speed the bond-preventing agent is removed from the inner piece.

6. The method of claim 5 wherein the step of coating with a bond-preventing agent includes stripping the inner piece, wherein the inner piece is immersed in a stripping fluid to a desired depth for a desired length of time following any of said plurality of dipping steps in order to remove at

least a portion of the bond-preventing agent from the outer surface of the inner piece.

7. The method of claim 6 wherein the stripping fluid is removed from the inner piece at a varying speed in a dipping step effective to strip a portion of the bond-preventing agent to result in a gradually varying thickness in the coating of the bond-preventing agent on the inner piece.

8. The method of claim 4 wherein the step of subsequently coating includes dipping the inner piece and the residual coating of bond-preventing agent in the polymeric bonding composition.

9. The method of claim 4 wherein a portion of the shaped structure of a bond-preventing agent is not coated with the polymeric bonding composition to result in a polymeric structure having an inner piece integrally connected to an outer piece at one end of said inner piece, said outer piece encircling at least a portion of said inner piece to define a recess in cooperation with said inner piece at said attached end, wherein peripheral portion of the outer piece is not attached to the inner piece.

10. The method of claim 4 wherein the inner piece is made by dipping a mandrel in a liquid composition.

11. The method of claim 10 wherein the liquid composition is a polymeric bonding composition and the liquid composition for the step of subsequent coating is a polymeric bonding composition.

12. The method of claim 11 wherein the polymeric bonding compositions contain uncured silicone rubber.

13. A method of shaping a structure having an overcoat layer, said method comprising:

- (a) dipping a mandrel in a first liquid composition to result in a coating on the mandrel;
- (b) coating portions of an outer surface of said coating on the mandrel with a bond-preventing agent in a plurality of dipping steps to form a residual coating of a desired shape; and
- (c) subsequently coating the shaped residual coating of the bond-preventing agent with a second liquid composition to form a shaped overcoat layer, wherein the shape of the overcoat layer results from the shape of the shaped structure of a bond-preventing agent.

14. The method of claim 13, wherein the coating on the mandrel is immersed into the bond-preventing agent to a desired depth for a desired length of time, and subsequently removed therefrom, wherein the desired depth and the desired length of time for each of the plurality of dipping steps is prescribed so that a residual coating of bond-preventing agent remains on portions of the inner piece following said plurality of dipping steps, said residual coating having varying thickness as a result of variation between the depth of any two of said plurality of dipping steps and the speed the bond-preventing agent is removed from the inner piece.

15. The method of claim 13, wherein the first liquid composition is a polymeric bonding composition.

16. The method of claim 15, wherein the second liquid composition contains uncured silicone rubber.

17. The method of claim 13, wherein the second liquid composition is a polymeric bonding composition.

18. The method of claim 13 wherein the structure having an overcoat layer has multiple cavities encircled by the overcoat layer.

19. A method of shaping a structure having an overcoat layer on an inner structure with a lumen, said method comprising:

- (a) dipping a mandrel in a first polymeric bonding composition to result in a coating on the mandrel;
- (b) coating portions of an outer surface of said coating on the mandrel with a bond-preventing agent in a plurality of dipping steps to form a residual coating of a desired shape by immersing the coating on the mandrel into the bond-preventing agent to a desired depth for a desired length of time, and subsequently removed therefrom, wherein the desired depth and the desired length of time for each of the plurality of dipping steps is prescribed so that a residual coating of bond-preventing agent remains on portions of the inner piece following said plurality of dipping steps, said residual coating having a varying thickness as a result of variation between the depth of any two of said plurality of dipping steps and the speed the bond-preventing agent is removed from the inner piece;
- (c) subsequently coating at least a portion of the shaped residual coating of the bond-preventing agent with a second polymeric bonding composition to form a shaped overcoat layer, wherein the shape

of the overcoat layer results from the shape of the shaped structure of a bond-preventing agent; and

- (d) subsequently replacing the bond-preventing agent coated by the second polymeric bonding composition with a fluid.

20. The method of claim 19 wherein the fluid is mineral oil.

21. A hand-actuated retention catheter, comprising:

a tube having outer and inner surfaces, the inner surface defining an inner lumen, an overcoat layer encircling the tube, the overcoat layer having interior and exterior surfaces, a cavity interposed between the tube and the overcoat layer, said cavity encircling the tube and being defined by portions of the outer surface of the tube in cooperation with portions of the interior surface of the overcoat layer, a fluid within the cavity, a restriction means and a means for limiting the lateral ballooning of the reservoir section; wherein the overcoat layer includes an expandable, resilient balloon section proximate a distal end, a fluid reservoir section proximal thereto, and a catheter sleeve section interconnecting said balloon section and said reservoir section, each of the sections corresponds to a corresponding section of the catheter; the

cavity including a balloon portion, a fluid reservoir portion, and a catheter sleeve portion thereof interconnecting said balloon portion and said reservoir portion; the catheter sleeve section of the overcoat layer defines a narrowing in cavity through which fluid passing from the fluid reservoir portion and the balloon portion thereof must pass; the restriction means encircling the sleeve section to restrict the flow of fluid from the balloon portion to the reservoir portion of the cavity, and the means for limiting lateral ballooning encircling the reservoir section to limit the lateral ballooning thereof.

22. The catheter of claim 21 wherein the restricting means is a restrict collar and the means for limiting lateral ballooning is a cylindrical shroud.

23. The catheter of claim 22 wherein the collar and the shroud are unitarily and integrally connected.

24. The catheter of claim 22 wherein the collar and the shroud are made of silicone rubber.

25. The catheter of claim 21 wherein the restriction means and the means for limiting lateral ballooning are capable of being removed from the catheter by being pulled to slip along the catheter in the proximal direction.

26. The catheter of claim 21 wherein the tube and the overcoat are made with a silicone rubber.

27. The catheter of claim 26 wherein the silicone rubber overcoat has 20-40 durometer hardness and a wall thickness of 0.1-1 mm.

28. The catheter of claim 26 further comprising a stylet, a portion of which is removably disposed in the inner lumen of the tube for urging the catheter during deployment thereof.

29. A method of catheterizing a patient, comprising:

urging a hand-actuated retention catheter into a body passageway from a space exterior thereto, said catheter comprising a tube having outer and inner surfaces, the inner surface defining an inner lumen, an overcoat layer encircling the tube, the overcoat layer having interior and exterior surfaces, a cavity interposed between the tube and the overcoat layer, a fluid within the cavity, and a restriction collar with a shroud; said cavity encircling the tube and being defined by portions of the outer surface of the tube in cooperation with portions of the interior surface of the overcoat layer, wherein the overcoat layer includes an expandable, resilient balloon section, a fluid

reservoir section proximal thereto, and a catheter sleeve section interconnecting said balloon section and said reservoir section, each of such sections corresponds to a corresponding section of the catheter; the overcoat layer being joined to the outer surface of the tube at distal and proximal ends of the cavity; the cavity including a balloon portion, a fluid reservoir portion, and a catheter sleeve portion thereof interconnecting said balloon portion and said reservoir portion; wherein the catheter sleeve section of the overcoat layer defines a narrowing in cavity through which fluid passing from the fluid reservoir portion and the balloon portion thereof must pass; the collar being encircling the sleeve section to restrict flow in the sleeve portion of the cavity and the shroud encircling the reservoir section to limit the lateral ballooning thereof;


compressing the shroud-encircled reservoir section to force fluid through the sleeve portion to the balloon portion of the cavity; and

subsequently removing the collar with the shroud from the catheter to enable withdrawal of the catheter from the body passageway.

30. The method of claim 28 wherein the step of urging the catheter is a result of pushing a stylet inserted into the lumen of the inner tube.

1/15

FIG. 1

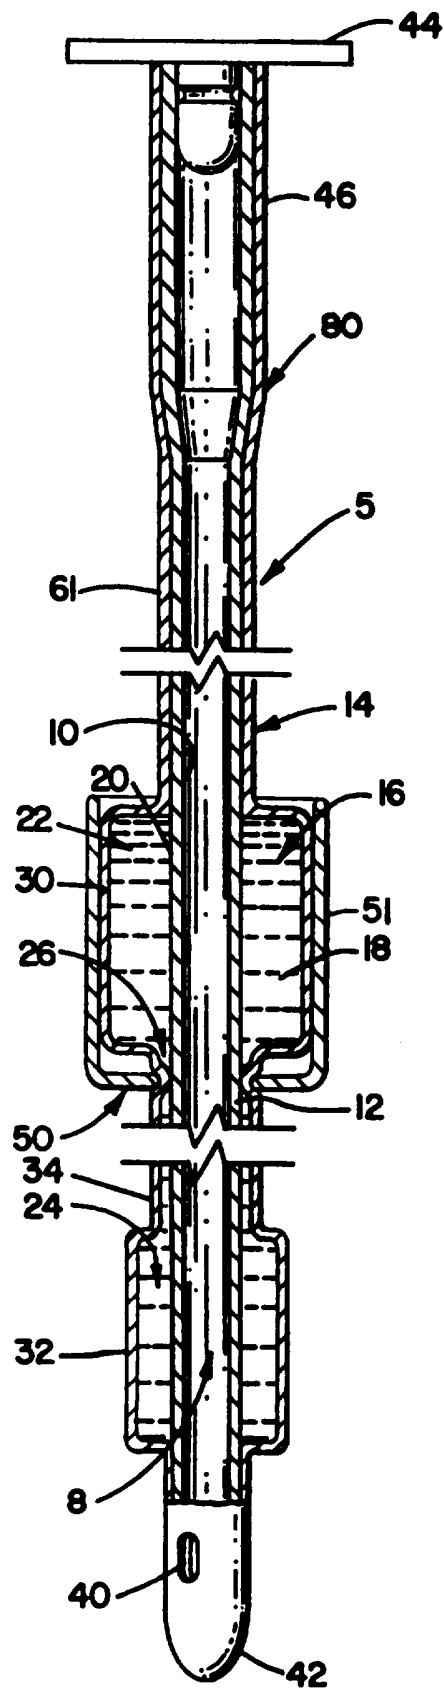

2/15

FIG. 2


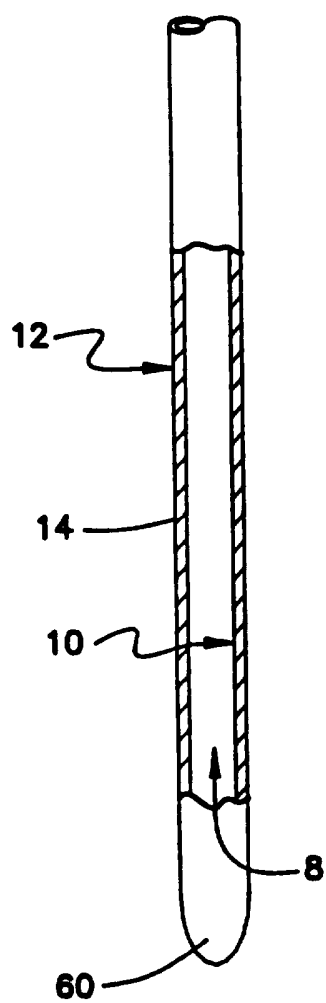


FIG. 3

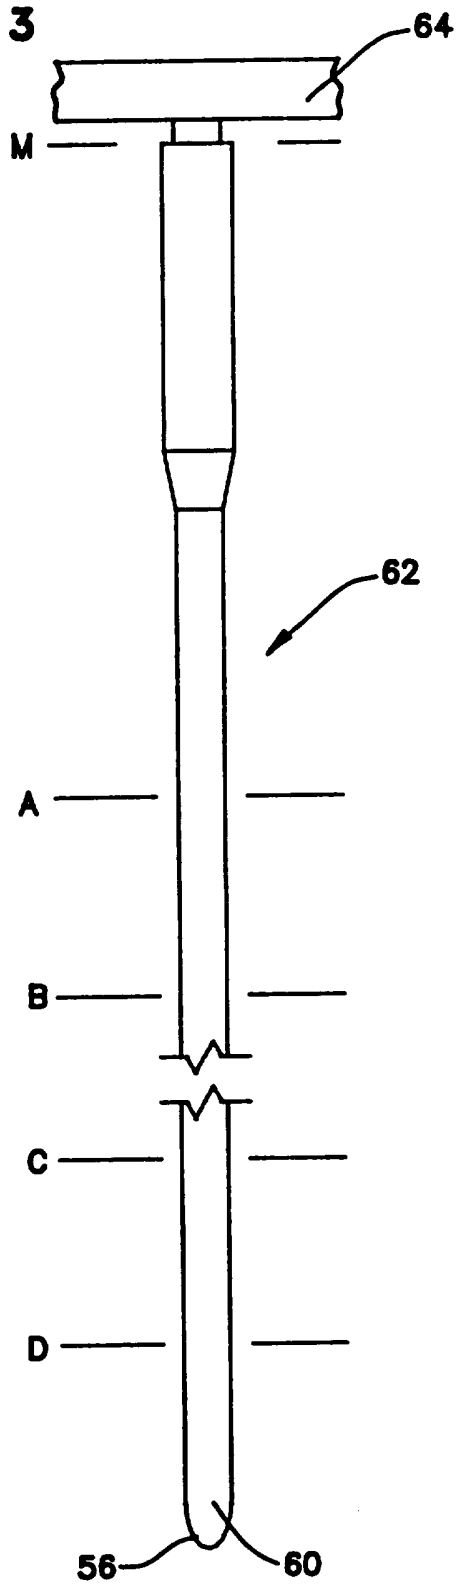

3/15

FIG. 4


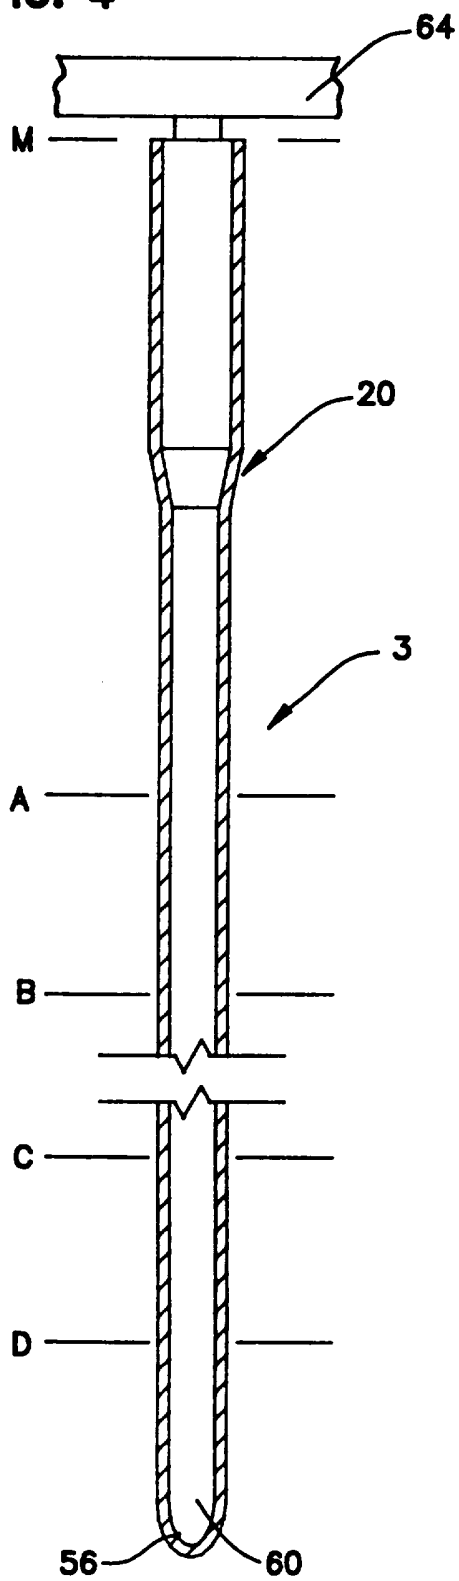


FIG. 5

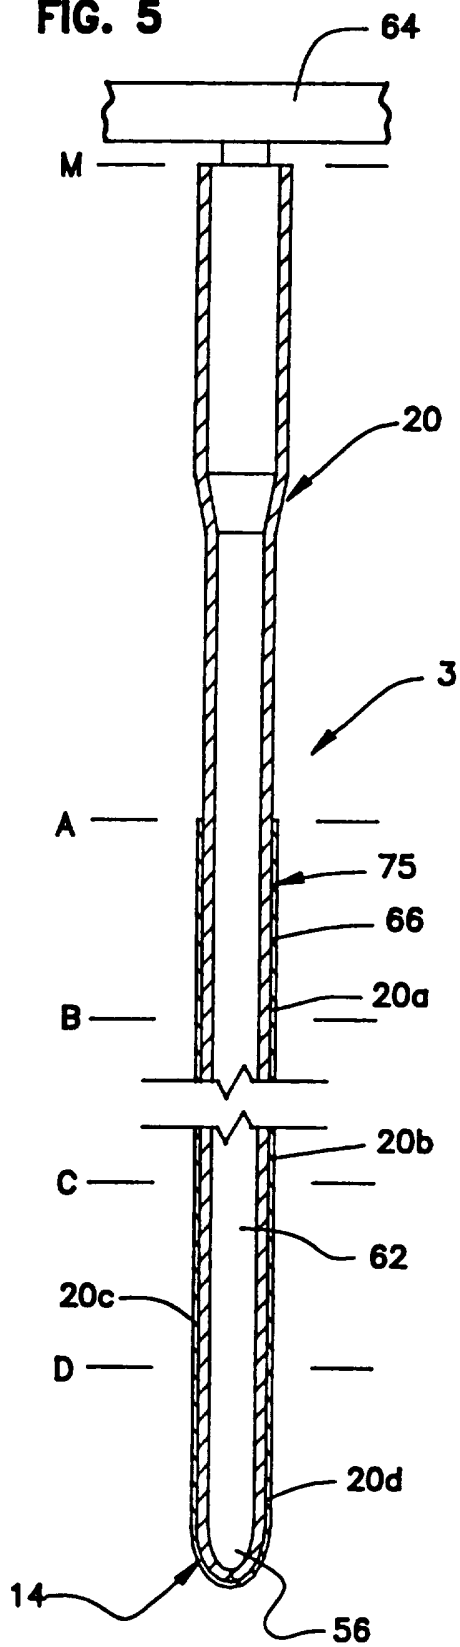

4/15

FIG. 6


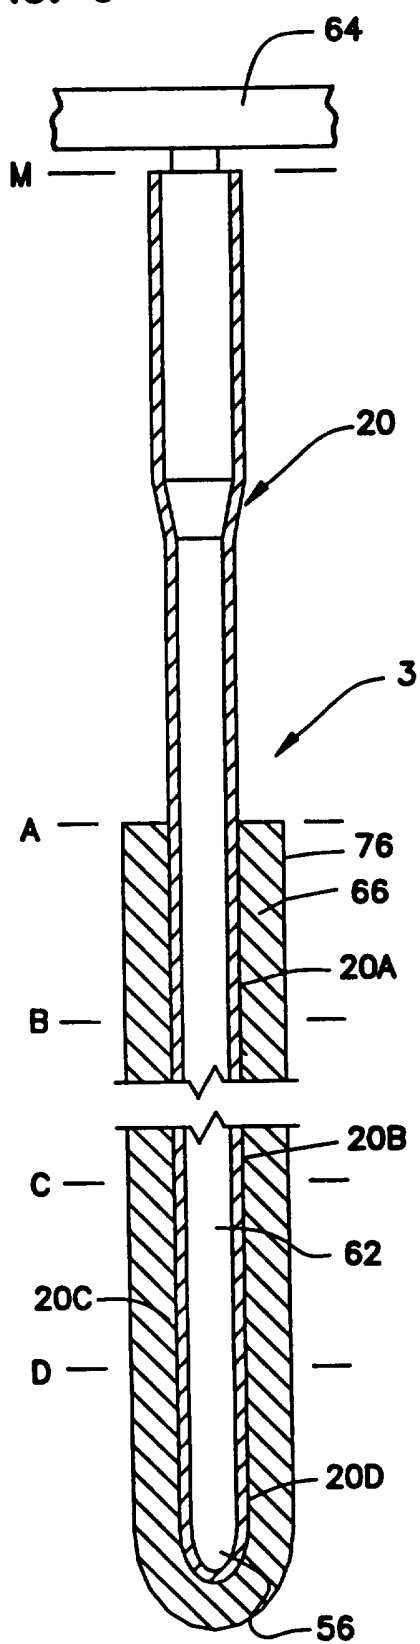


FIG. 7

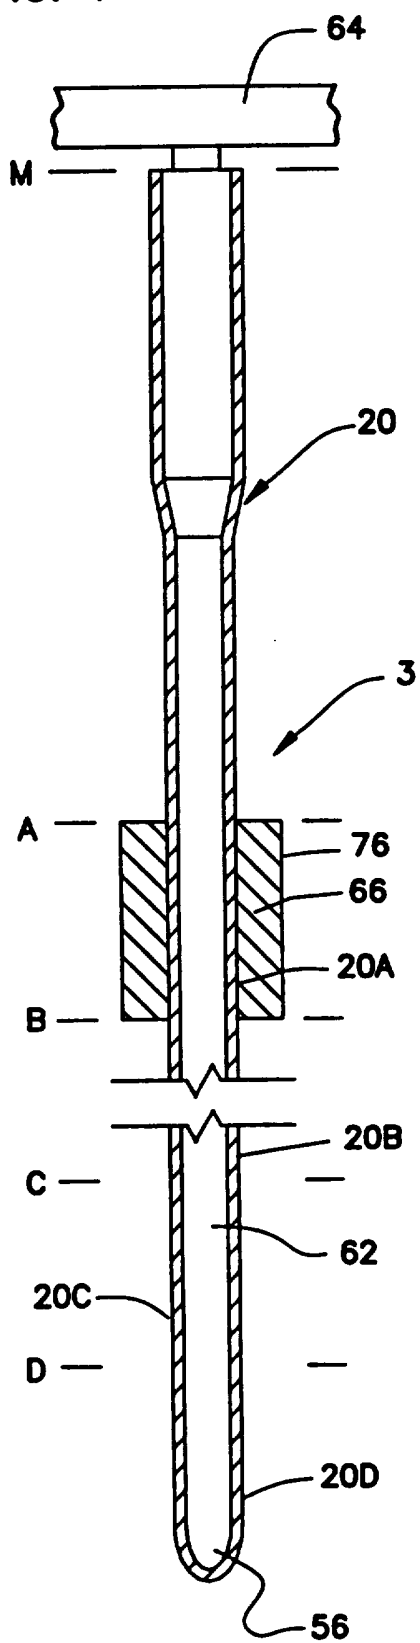

5/15

FIG. 8


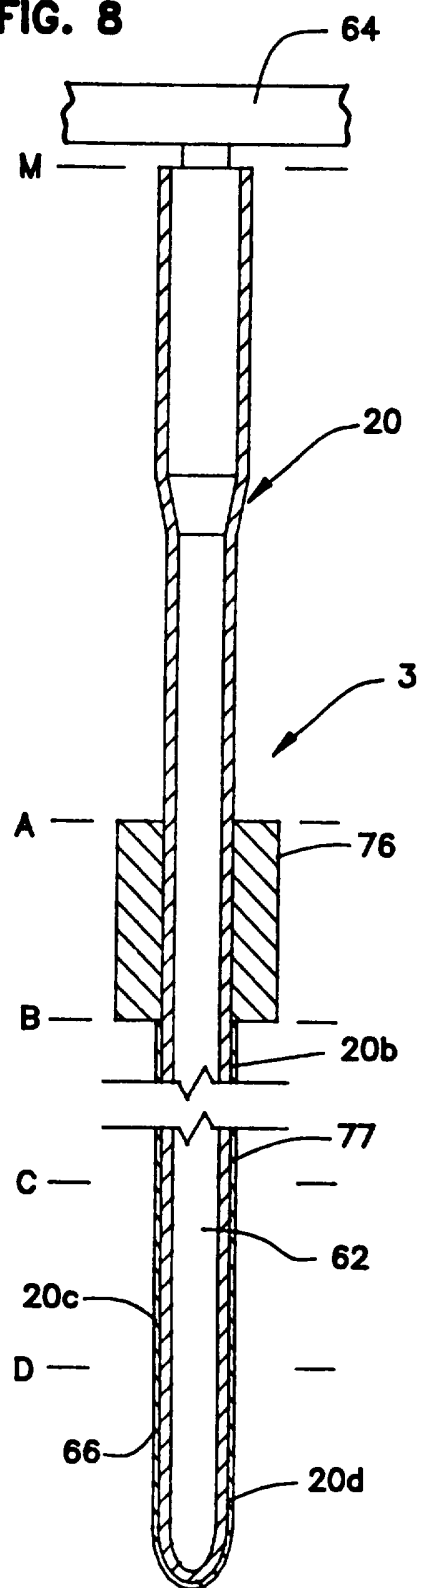


FIG. 9

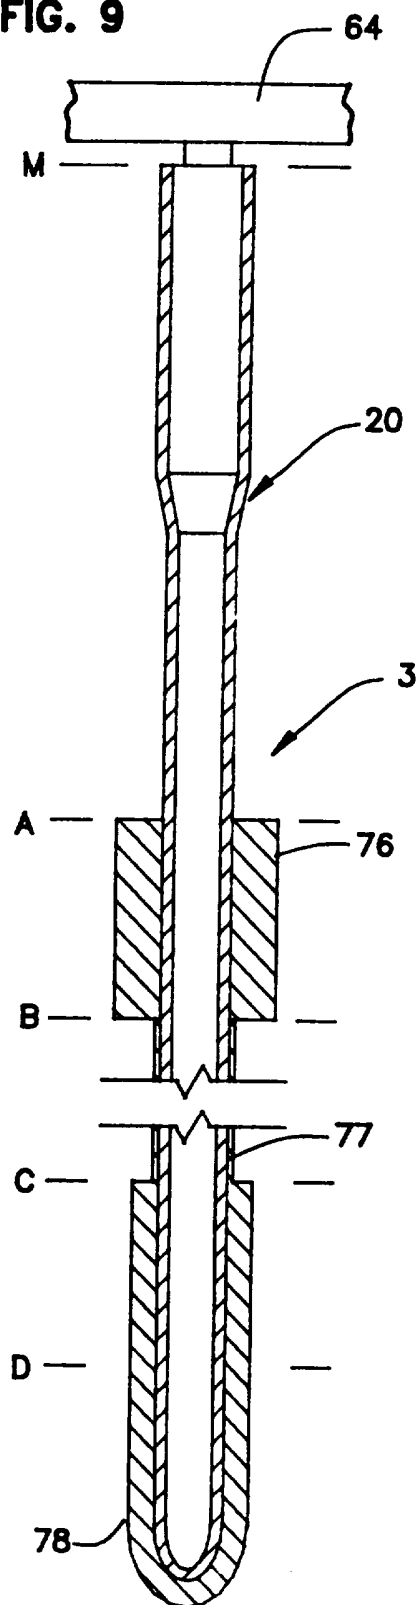

6/15

FIG. 10


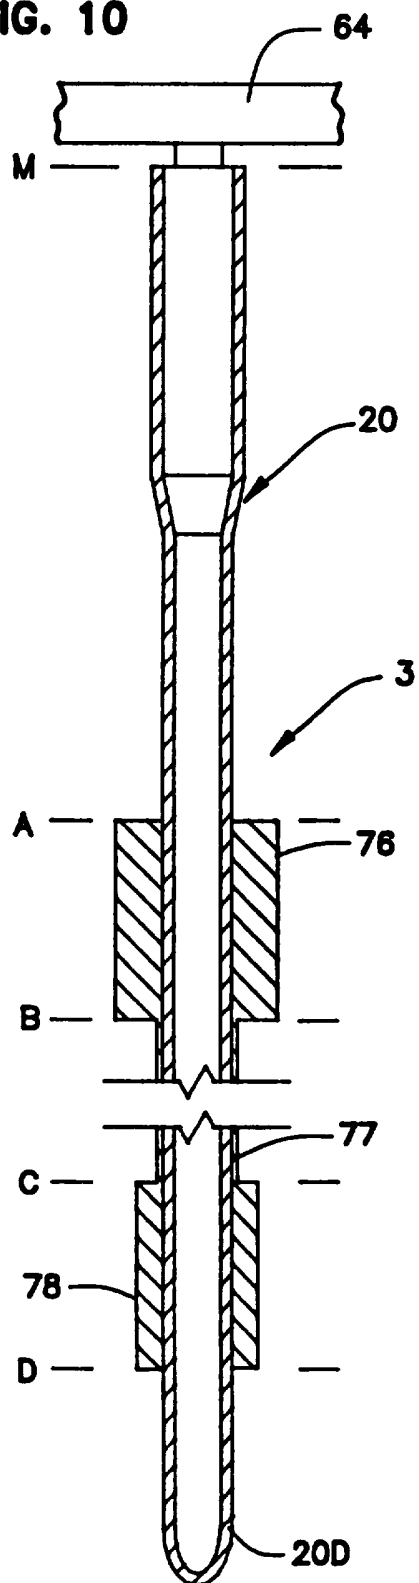


FIG. 11A

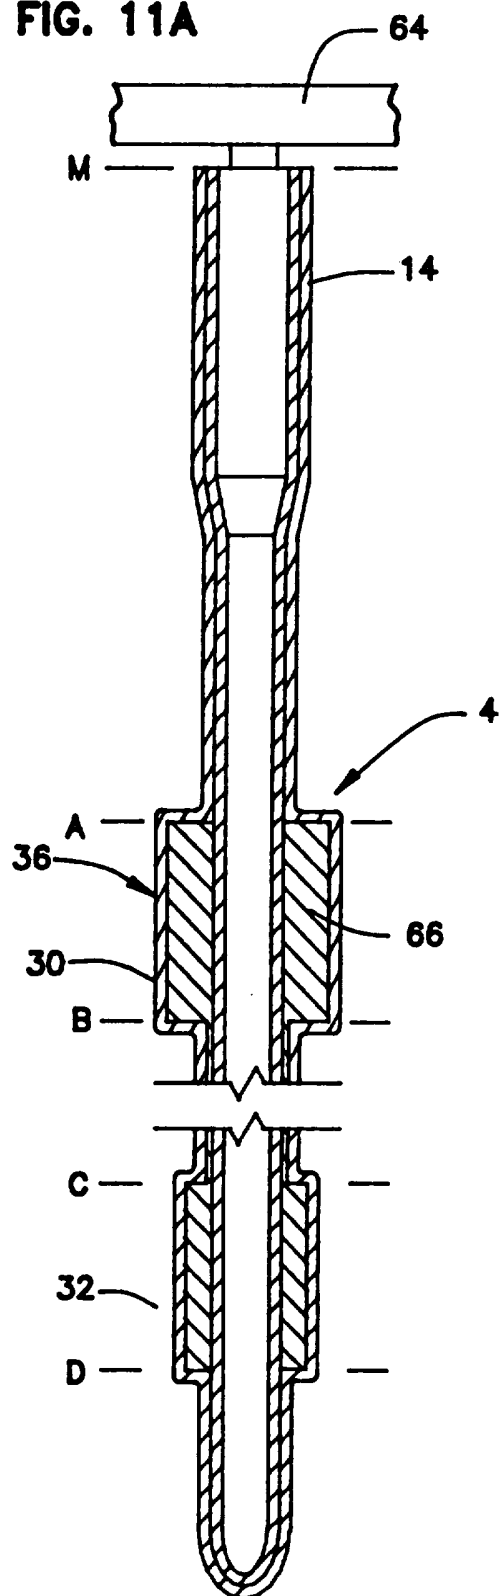

7/15

FIG. 11B

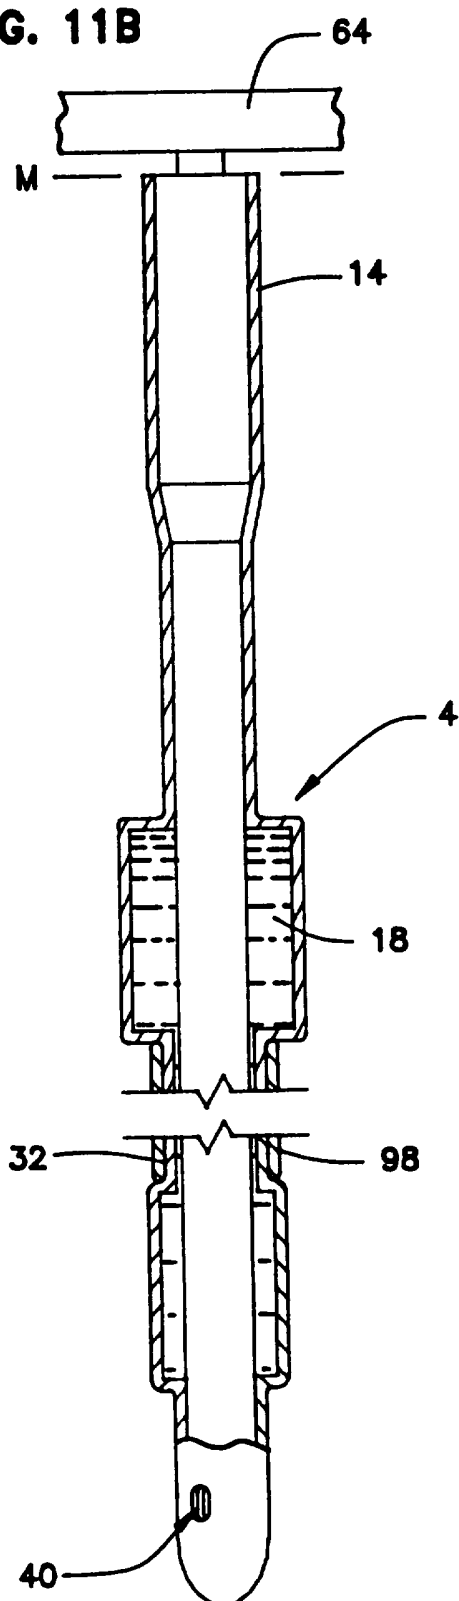
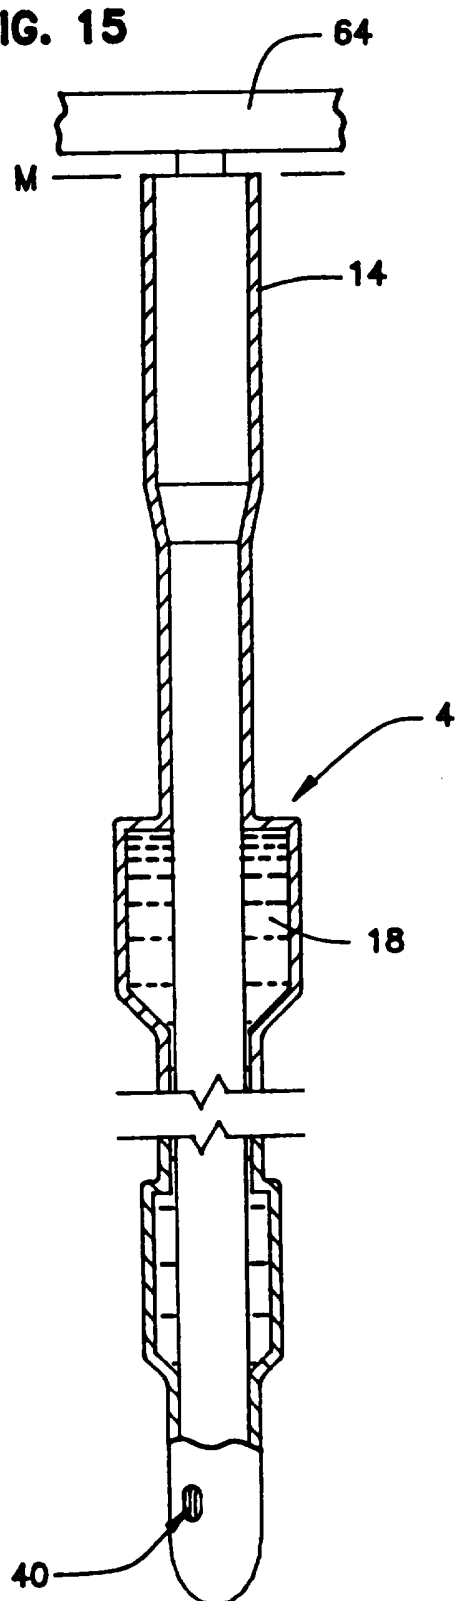
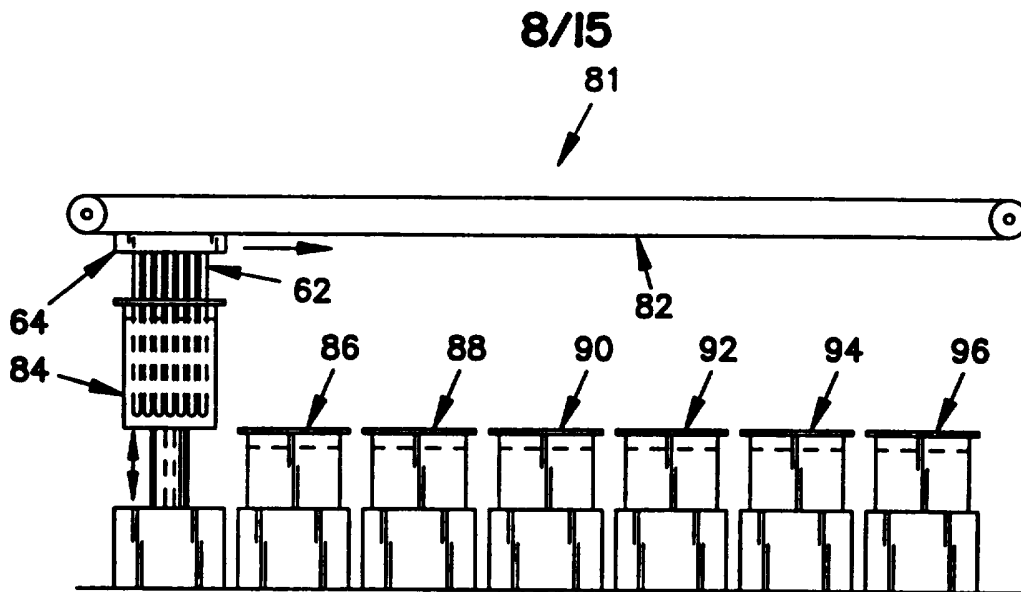
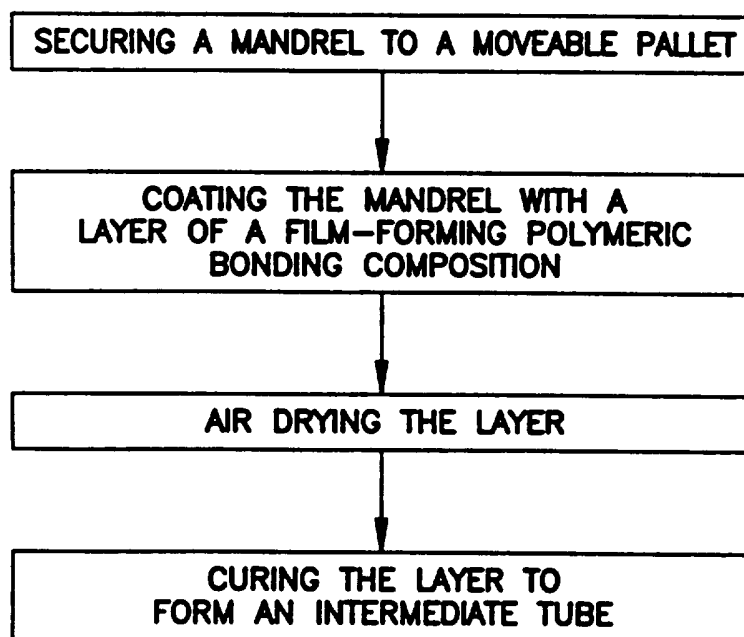


FIG. 15



**FIG. 12****FIG. 13A**

9/15

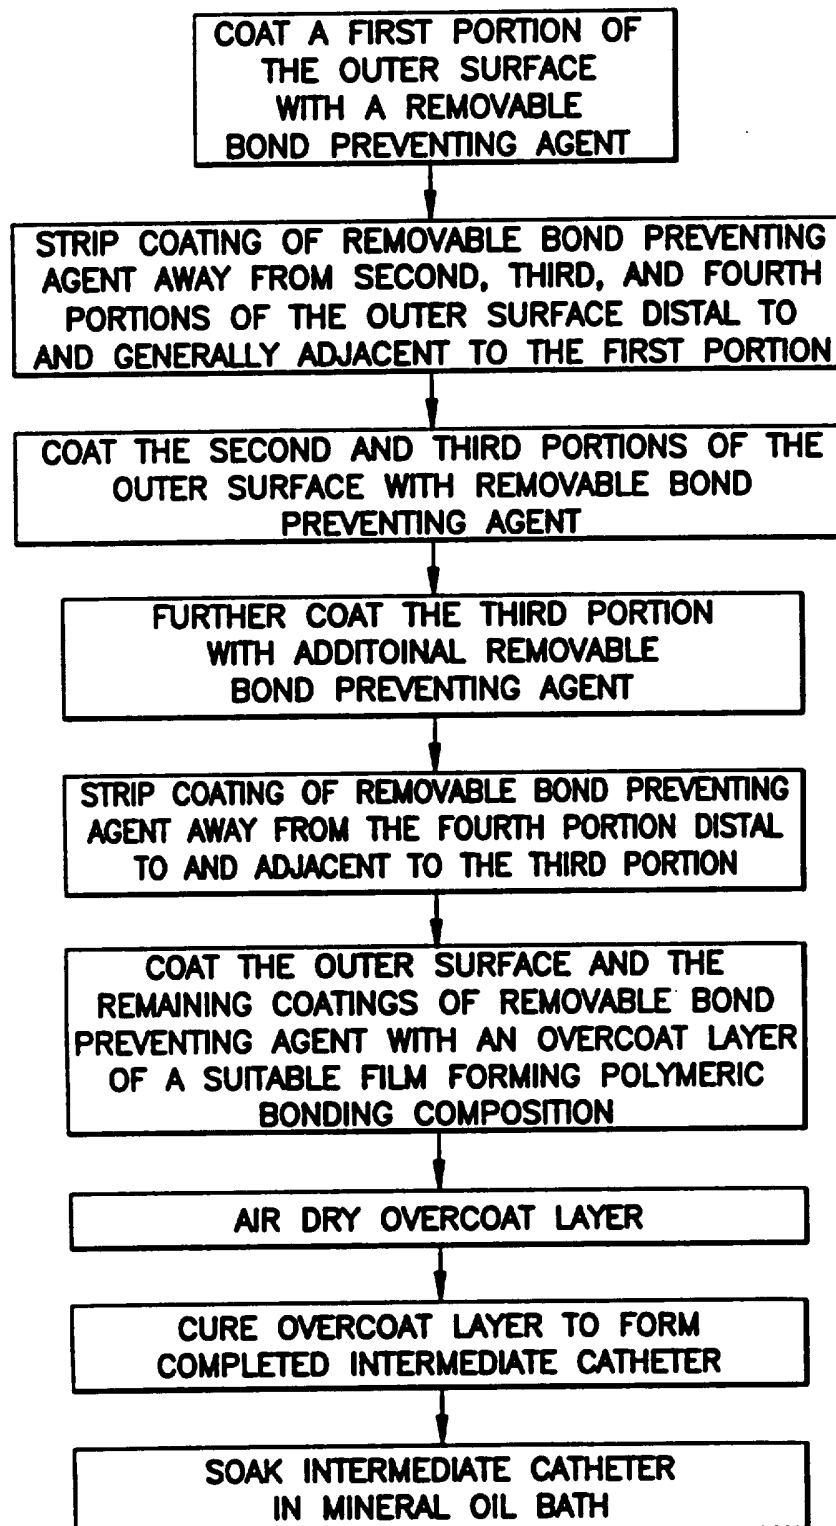


FIG. 13B

10/15

FIG. 16


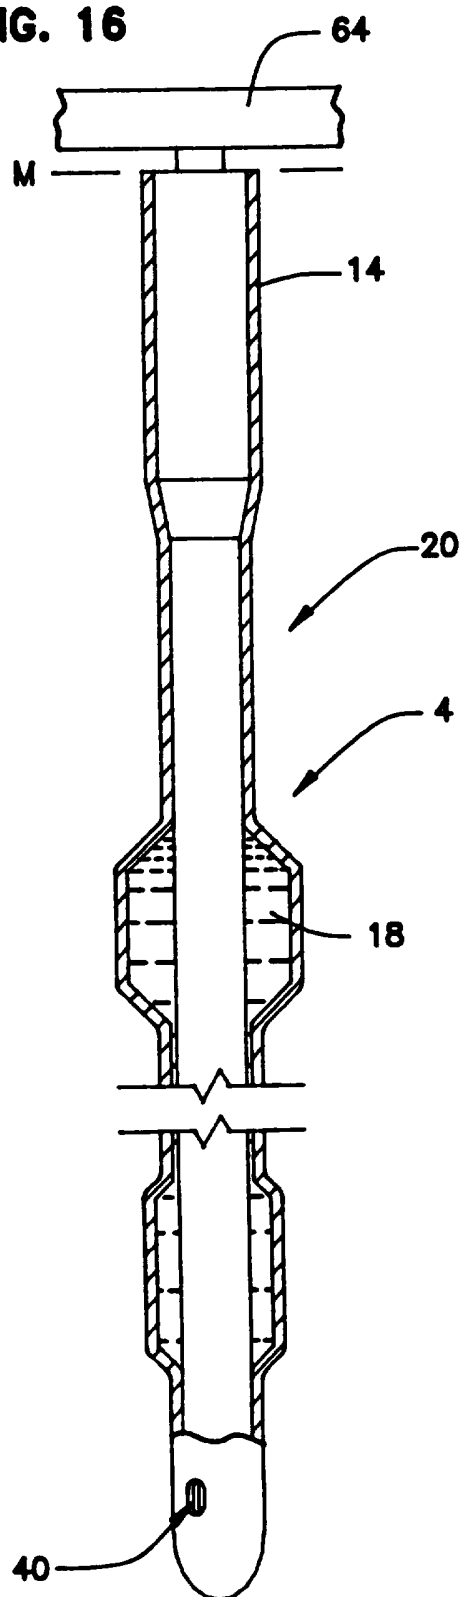


FIG. 21

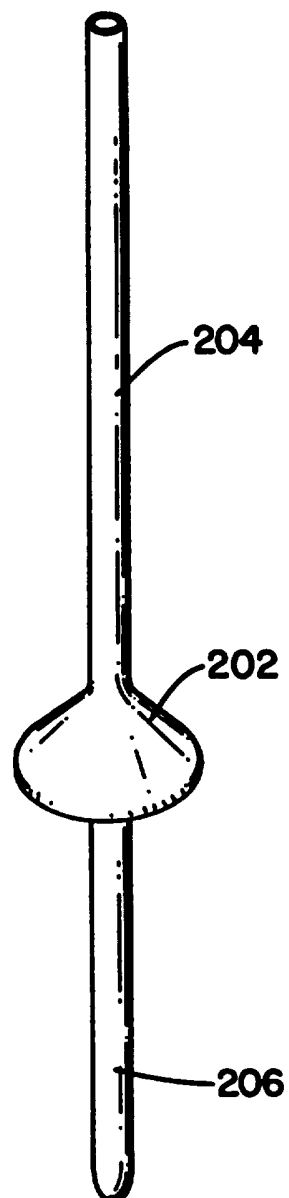

11/15

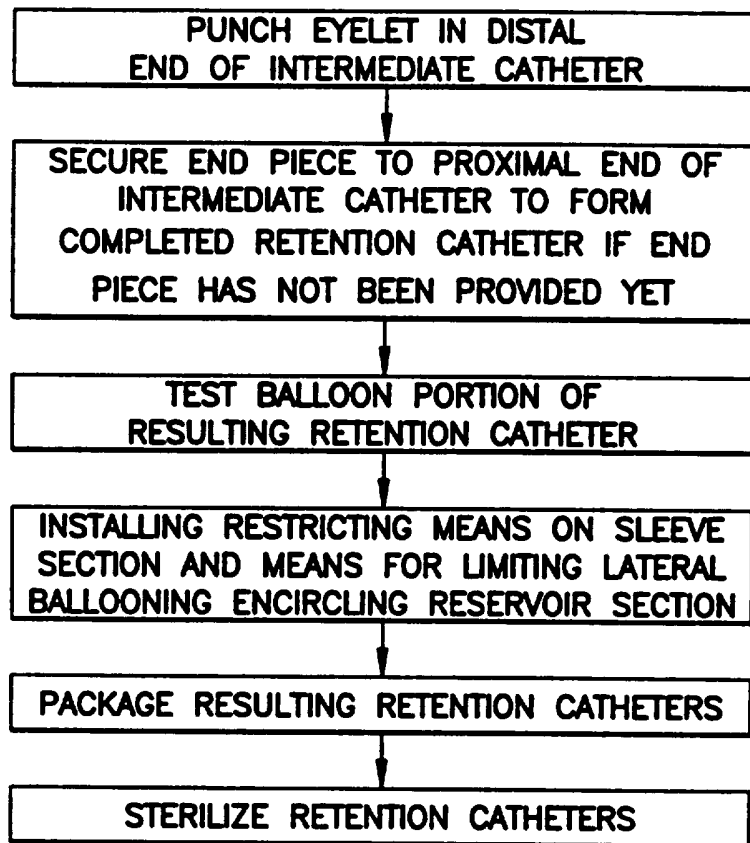


FIG. 13C


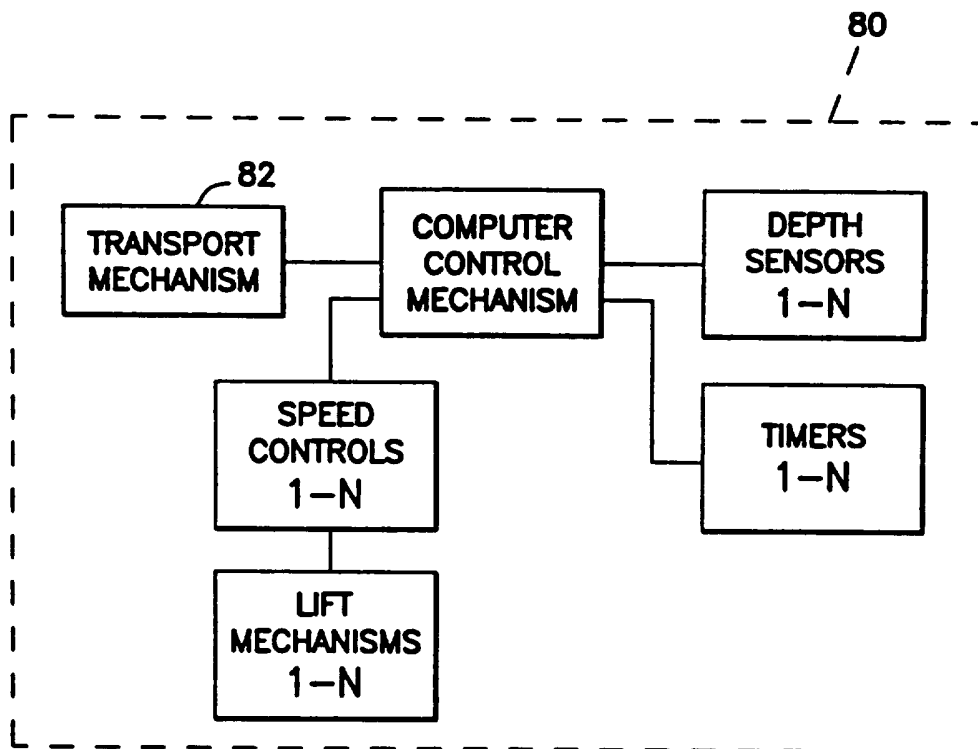


FIG. 14


12/15

FIG. 17

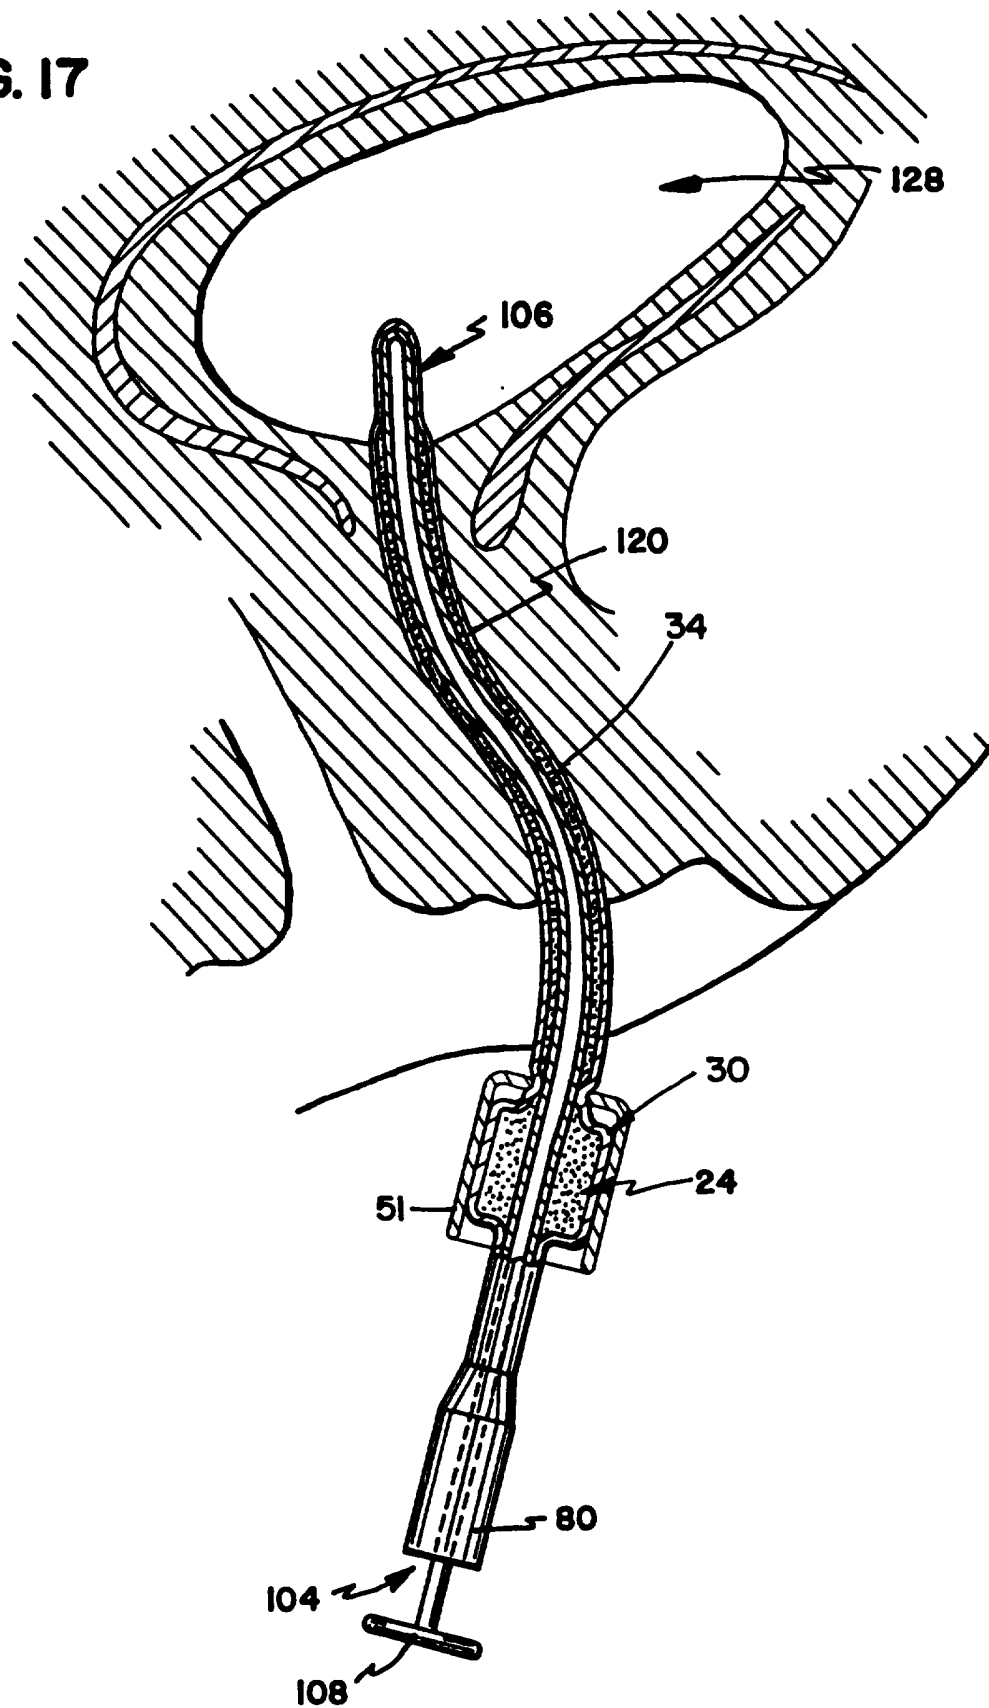

13/15

FIG. 18

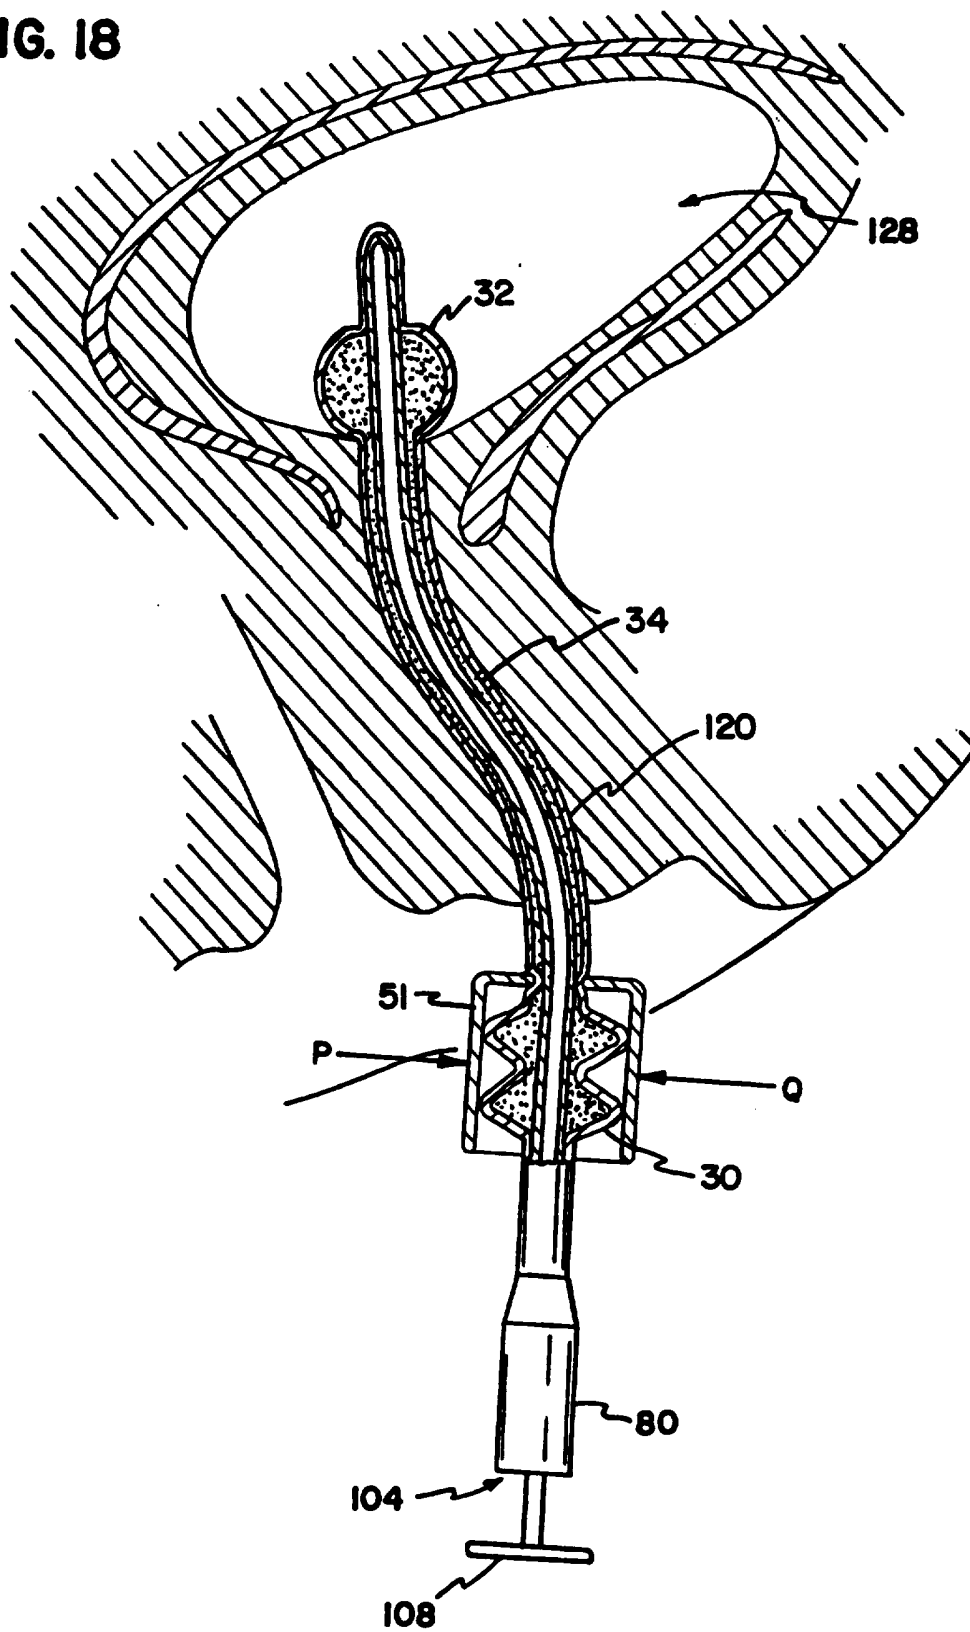

14/15

FIG. 19



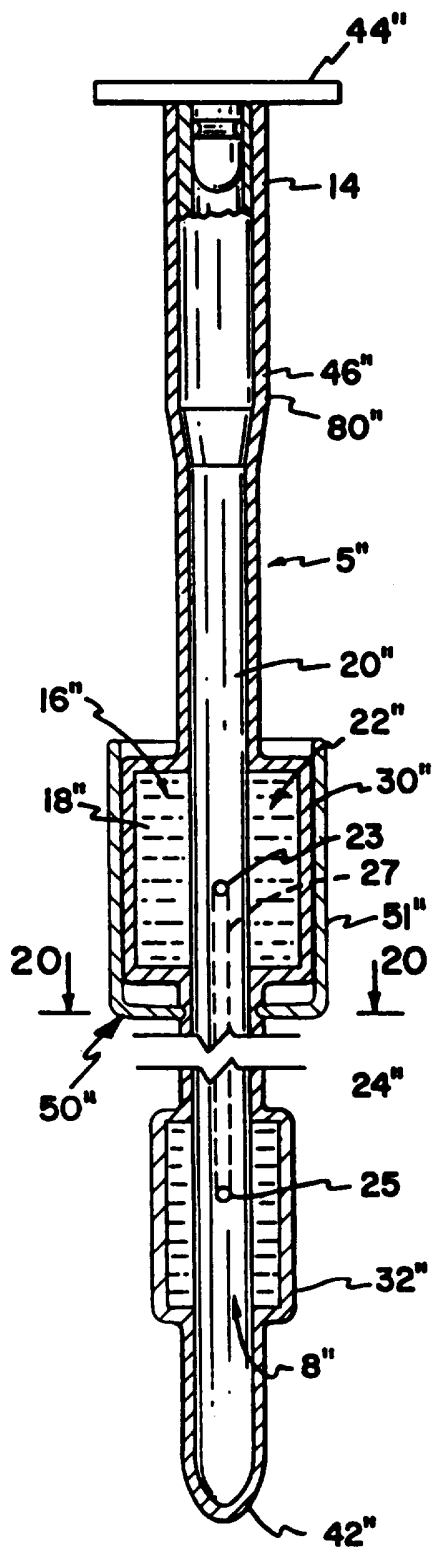


FIG. 20



15/15

FIG. 22

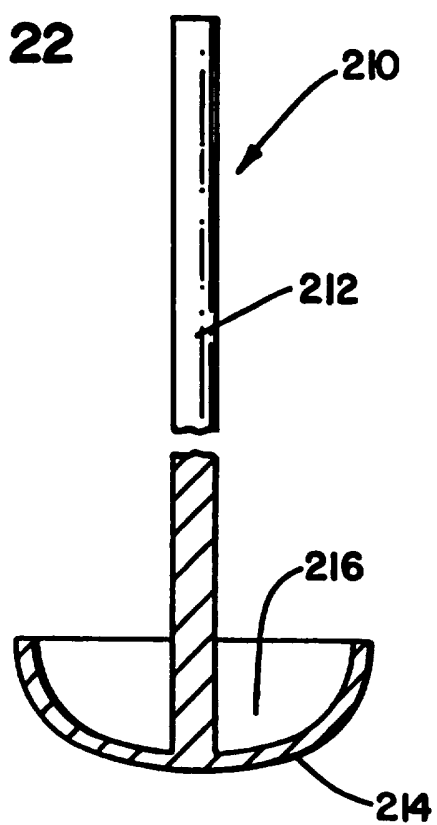

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 95/09825

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 B29C41/14 B29C41/22 A61M25/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 B29C A61M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO,A,91 10466 (ROCHESTER MEDICAL CORPORATION) 25 July 1991 cited in the application see the whole document ---	1-30
X	WO,A,93 14806 (ROCHESTER MEDICAL CORP) 5 August 1993 cited in the application see the whole document ---	1-30
P,X	US,A,5 360 402 (CONWAY ET AL.) 1 November 1994 cited in the application see the whole document --- -/--	1-30

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

5 December 1995

Date of mailing of the international search report

18.12.1995

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+ 31-70) 340-3016

Authorized officer

Mathey, X

INTERNATIONAL SEARCH REPORT

Inter. Application No.
PCT/US 95/09825

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US,A,5 261 896 (CONWAY ET AL.) 16 November 1993 cited in the application see the whole document ---	1-30
X	US,A,5 137 671 (CONWAY ET AL.) 11 August 1992 cited in the application see the whole document ---	1-30
X	WO,A,92 08426 (ROCHESTER MEDICAL CORPORATION) 29 May 1992 see claims 11-14 ---	1,4 2,3,5-30
A	GB,A,2 187 670 (INMED CORPORATION) 16 September 1987 see the whole document ---	1,13,19
A	EP,A,0 303 487 (C.R. BARD, INC.) 15 February 1989 see the whole document -----	1,4,10, 13,14, 19,21

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 95/09825

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9110466	25-07-91	US-A- 5137671	11-08-92
		US-A- 5098379	24-03-92
		AU-B- 651081	14-07-94
		AU-B- 7147991	05-08-91
		AU-B- 636203	22-04-93
		AU-B- 7233191	05-08-91
		AU-B- 7327491	05-08-91
		EP-A- 0514400	25-11-92
		EP-A- 0512041	11-11-92
		EP-A- 0515463	02-12-92
		JP-T- 5503444	10-06-93
		JP-T- 5503448	10-06-93
		JP-T- 5503231	03-06-93
		WO-A- 9110556	25-07-91
		WO-A- 9110467	25-07-91
		US-A- 5261896	16-11-93
		US-A- 5360402	01-11-94
		US-A- 5370899	06-12-94
		US-A- 5269770	14-12-93
WO-A-9314806	05-08-93	US-A- 5360402	01-11-94
		AU-B- 3599293	01-09-93
		CA-A- 2128886	05-08-93
		EP-A- 0680357	08-11-95
US-A-5360402	01-11-94	US-A- 5137671	11-08-92
		US-A- 5098379	24-03-92
		US-A- 5261896	16-11-93
		AU-B- 3599293	01-09-93
		CA-A- 2128886	05-08-93
		EP-A- 0680357	08-11-95
		WO-A- 9314806	05-08-93
		AU-B- 651081	14-07-94
		AU-B- 7147991	05-08-91
		AU-B- 636203	22-04-93
		AU-B- 7233191	05-08-91
		AU-B- 7327491	05-08-91
		EP-A- 0514400	25-11-92
		EP-A- 0512041	11-11-92
		EP-A- 0515463	02-12-92

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/US 95/09825

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-5360402		JP-T- 5503444	10-06-93
		JP-T- 5503448	10-06-93
		JP-T- 5503231	03-06-93
		WO-A- 9110556	25-07-91
		WO-A- 9110467	25-07-91
		WO-A- 9110466	25-07-91
		US-A- 5370899	06-12-94
		US-A- 5269770	14-12-93
		AU-B- 3323993	19-07-93
		EP-A- 0617631	05-10-94
	WO-A- 9311821	24-06-93	

US-A-5261896	16-11-93	US-A- 5137671	11-08-92
		US-A- 5098379	24-03-92
		AU-B- 3323993	19-07-93
		EP-A- 0617631	05-10-94
		WO-A- 9311821	24-06-93
		US-A- 5360402	01-11-94
		AU-B- 651081	14-07-94
		AU-B- 7147991	05-08-91
		AU-B- 636203	22-04-93
		AU-B- 7233191	05-08-91
		AU-B- 7327491	05-08-91
		EP-A- 0514400	25-11-92
		EP-A- 0512041	11-11-92
		EP-A- 0515463	02-12-92
		JP-T- 5503444	10-06-93
		JP-T- 5503448	10-06-93
		JP-T- 5503231	03-06-93
		WO-A- 9110556	25-07-91
		WO-A- 9110467	25-07-91
		WO-A- 9110466	25-07-91
		US-A- 5370899	06-12-94
		US-A- 5269770	14-12-93

US-A-5137671	11-08-92	AU-B- 651081	14-07-94
		AU-B- 7147991	05-08-91
		AU-B- 636203	22-04-93
		AU-B- 7233191	05-08-91
		AU-B- 7327491	05-08-91

INTERNATIONAL SEARCH REPORT

information on patent family members

Inter. nal Application No

PCT/US 95/09825

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
IIS-A-5137671		EP-A- 0514400	25-11-92
		EP-A- 0512041	11-11-92
		EP-A- 0515463	02-12-92
		JP-T- 5503444	10-06-93
		JP-T- 5503448	10-06-93
		JP-T- 5503231	03-06-93
		WO-A- 9110556	25-07-91
		WO-A- 9110467	25-07-91
		WO-A- 9110466	25-07-91
		US-A- 5098379	24-03-92
		US-A- 5261896	16-11-93
		US-A- 5360402	01-11-94
		US-A- 5370899	06-12-94
		US-A- 5269770	14-12-93

WO-A-9208426	29-05-92	AU-B- 659117	11-05-95
		AU-B- 9094091	11-06-92
		CA-A- 2095030	10-05-92
		DE-D- 69107470	23-03-95
		DE-T- 69107470	14-09-95
		EP-A- 0556325	25-08-93
		JP-T- 6501412	17-02-94
		US-A- 5376085	27-12-94
		US-A- 5334175	02-08-94
		US-A- 5176666	05-01-93

GB-A-2187670	16-09-87	NONE	

EP-A-303487	15-02-89	US-A- 4863442	05-09-89
		AU-B- 621548	19-03-92
		AU-B- 2067488	16-02-89
		JP-A- 1068276	14-03-89
		JP-B- 7002184	18-01-95
