



(86) Date de dépôt PCT/PCT Filing Date: 2005/09/07
(87) Date publication PCT/PCT Publication Date: 2006/03/16
(45) Date de délivrance/Issue Date: 2010/07/13
(85) Entrée phase nationale/National Entry: 2007/03/01
(86) N° demande PCT/PCT Application No.: US 2005/031659
(87) N° publication PCT/PCT Publication No.: 2006/029132
(30) Priorité/Priority: 2004/09/08 (US10/935,846)

(51) Cl.Int./Int.Cl. *B64C 13/26* (2006.01),
B64C 3/50 (2006.01), *B64C 9/14* (2006.01)


(72) Inventeurs/Inventors:
GITNES, SETH E., US;
VIJGEN, PAUL M., US;
GOOD, MARK S., US;
THOMAS, GLYNN M., US

(73) Propriétaire/Owner:
THE BOEING COMPANY, US

(74) Agent: SMART & BIGGAR

(54) Titre : SYSTEMES ET PROCEDES DESTINES A IMPRIMER UN MOUVEMENT DIFFERENTIEL A DES
DISPOSITIFS HYPERSUSTENTATEURS D'AILE

(54) Title: SYSTEMS AND METHODS FOR PROVIDING DIFFERENTIAL MOTION TO WING HIGH LIFT DEVICES

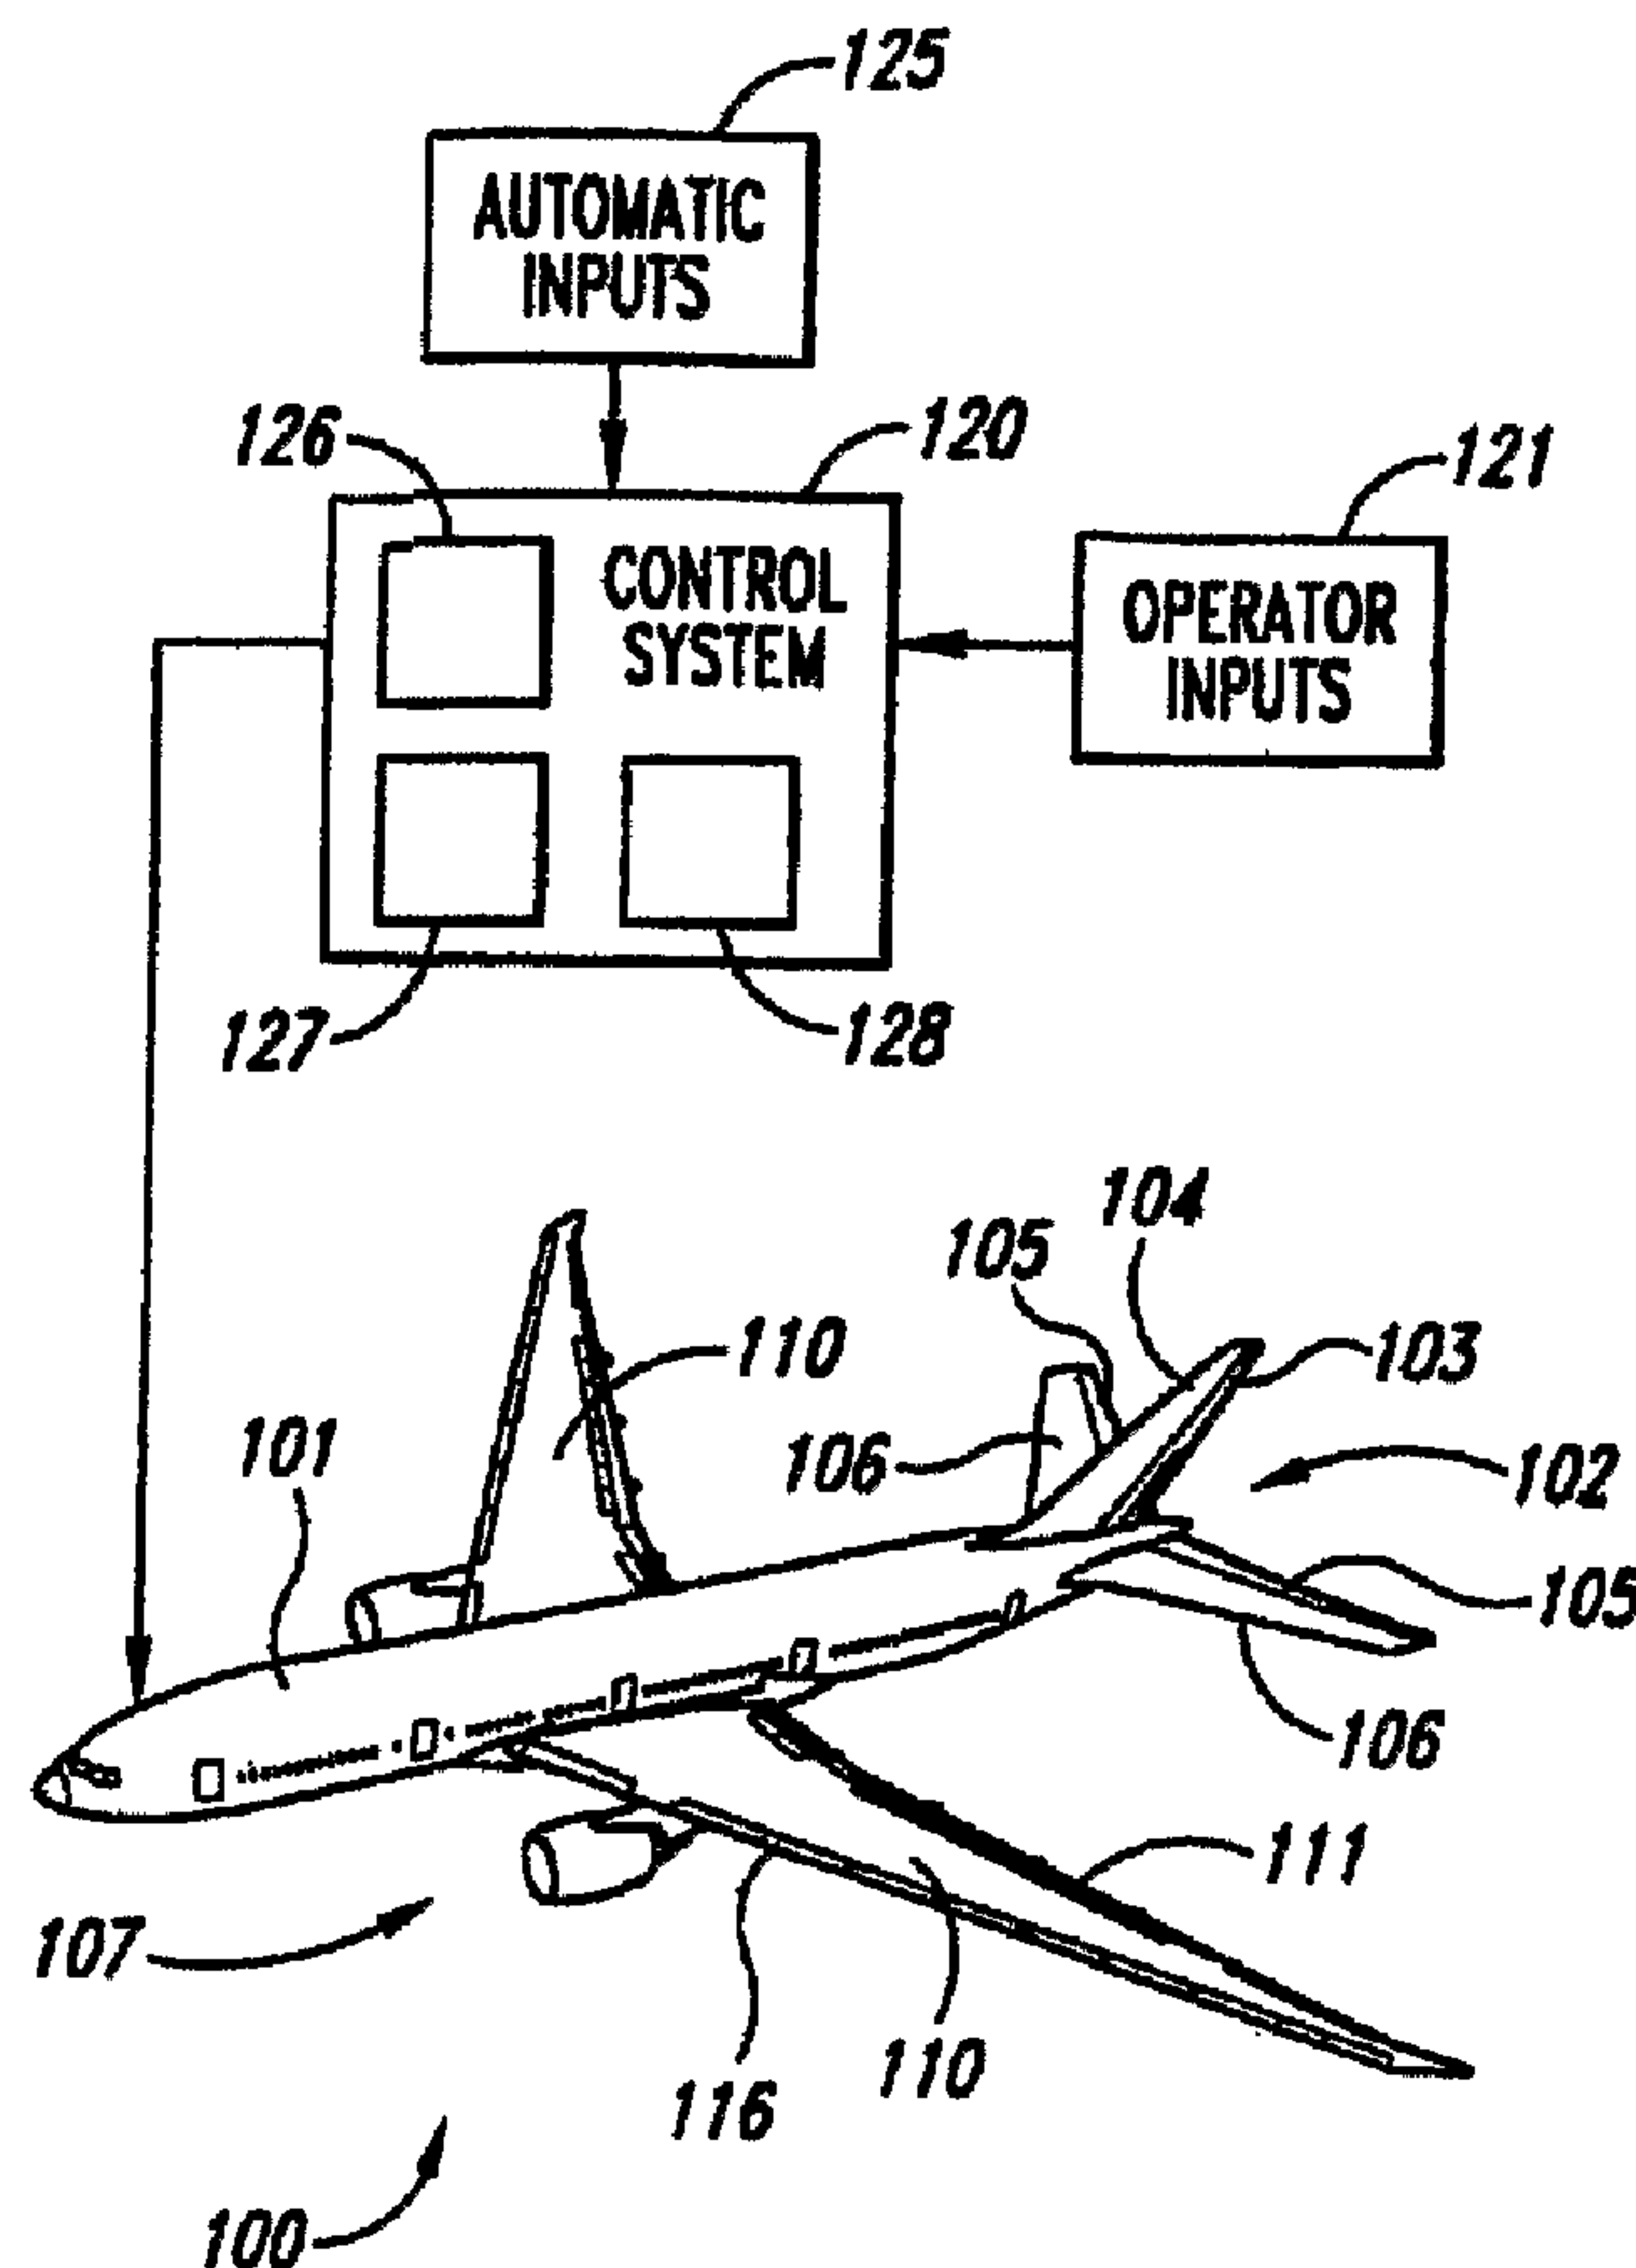

(57) Abrégé/Abstract:

Systems and methods for providing differential motion to wing high lift devices are disclosed. A system in accordance with one embodiment of the invention includes a wing (110) having a leading edge, a trailing edge, a first deployable lift device (212) with a



(57) Abrégé(suite)/Abstract(continued):

first spanwise location, and a second deployable lift device (213) with a second spanwise location different than the first. The wing system can further include a drive system (350) having a drive link (353) operatively coupleable to both the first and second deployable lift devices (212, 213), and a control system (320) operatively coupled to the drive system (350). The control system (320) can have a first configuration for which the drive link (353) is operatively coupled to the first and second deployable lift devices (212, 213), and activation of at least a portion of the drive link (353) moves the first and second deployable lift devices (212, 213) together. In a second configuration, the drive link (353) is operatively coupled to at least the first deployable lift device (212) and operatively decoupled from the second deployable lift device (213), so that actuation of at least a portion of the drive link (353) moves the first deployable lift device (212) relative to the second deployable lift device (213).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
16 March 2006 (16.03.2006)

PCT

(10) International Publication Number
WO 2006/029132 A1(51) International Patent Classification⁷: **B64C 13/26**,
9/14, 3/50(21) International Application Number:
PCT/US2005/031659(22) International Filing Date:
7 September 2005 (07.09.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/935,846 8 September 2004 (08.09.2004) US(71) Applicant (for all designated States except US): **THE BOEING COMPANY** [US/US]; 100 N. Riverside Plaza, Chicago, IL 60606 (US).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **GITNES, Seth, E.** [US/US]; 11928 53rd Ave. SE, Everett, WA 98208 (US).
VIJGEN, Paul, M. [US/US]; 4918 23rd Ave W., Everett,WA 98203 (US). **GOOD, Mark, S.** [US/US]; 6735 25th Ave NW, Seattle, WA 98117 (US). **THOMAS, Glynn, M.** [GB/US]; P.O. Box 3707, MC11XT, Seattle, WA 98124-2207 (US).(74) Agents: **WOO, Euclid** et al.; The Boeing Company, 15460 Lugana Canyon Road, MC 1650-7006, Irvine, CA 92618 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: SYSTEMS AND METHODS FOR PROVIDING DIFFERENTIAL MOTION TO WING HIGH LIFT DEVICES

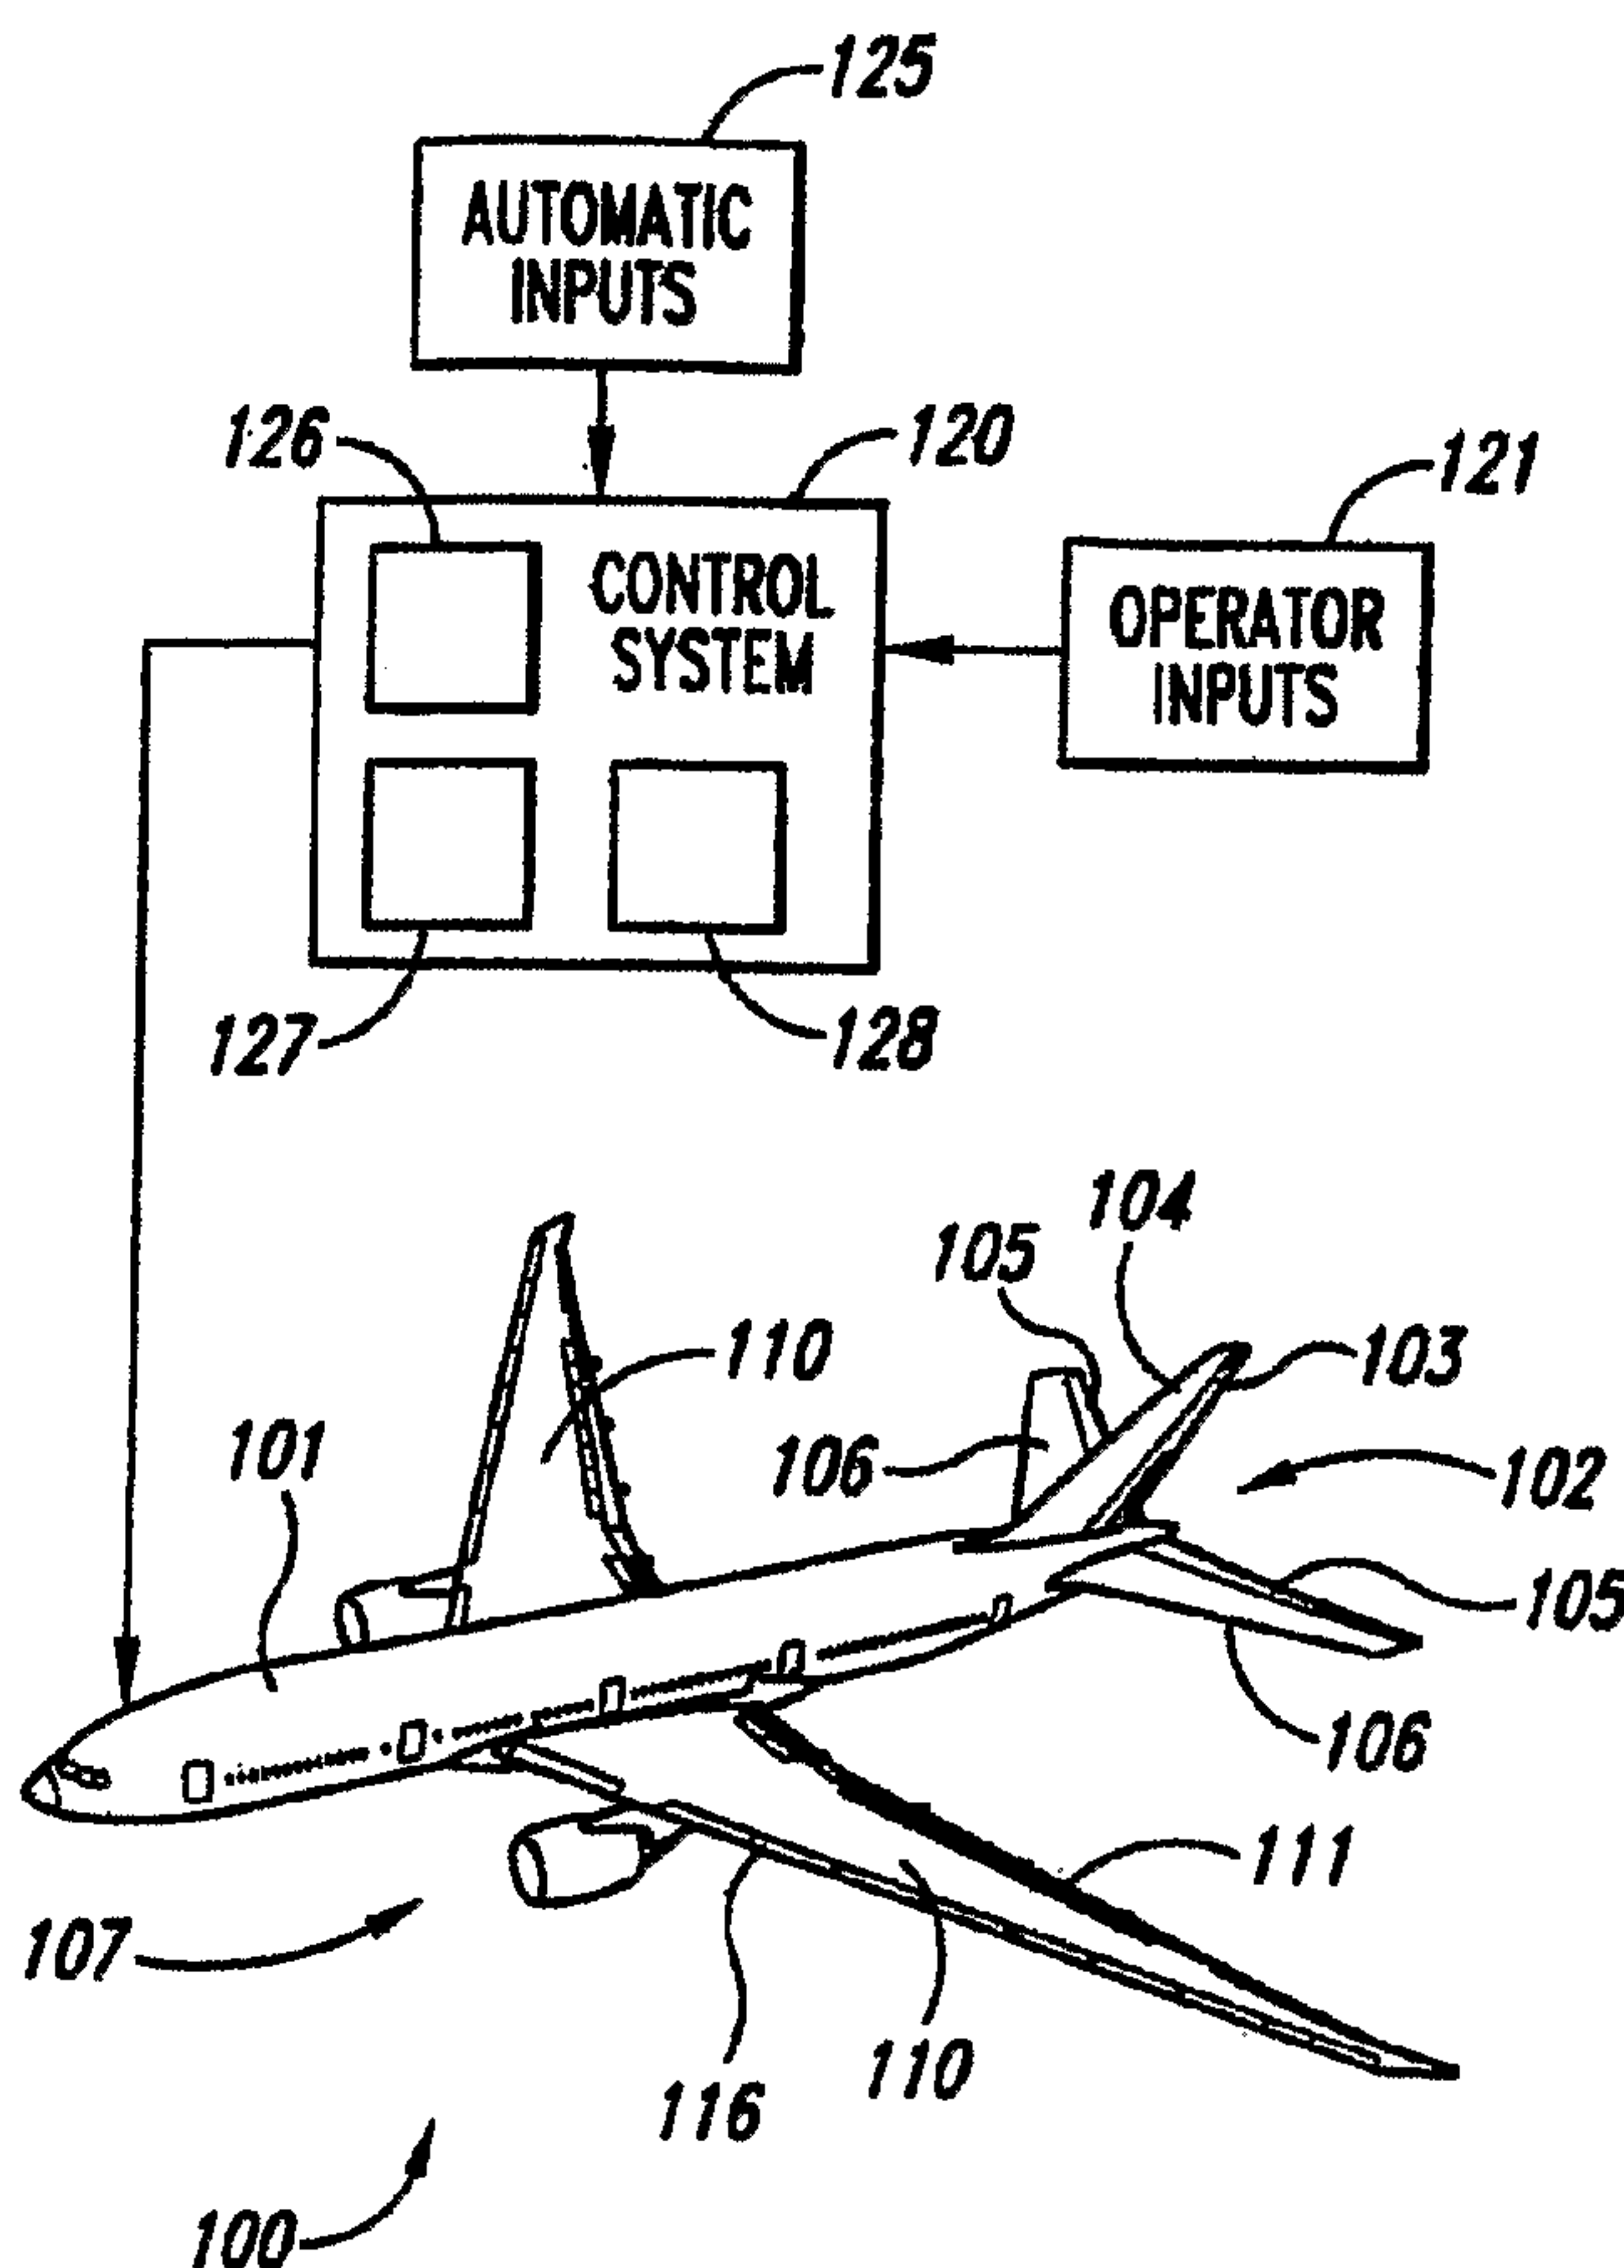

(57) Abstract: Systems and methods for providing differential motion to wing high lift devices are disclosed. A system in accordance with one embodiment of the invention includes a wing (110) having a leading edge, a trailing edge, a first deployable lift device (212) with a first spanwise location, and a second deployable lift device (213) with a second spanwise location different than the first. The wing system can further include a drive system (350) having a drive link (353) operatively coupleable to both the first and second deployable lift devices (212, 213), and a control system (320) operatively coupled to the drive system (350). The control system (320) can have a first configuration for which the drive link (353) is operatively coupled to the first and second deployable lift devices (212, 213), and activation of at least a portion of the drive link (353) moves the first and second deployable lift devices (212, 213) together. In a second configuration, the drive link (353) is operatively coupled to at least the first deployable lift device (212) and operatively decoupled from the second deployable lift device (213), so that actuation of at least a portion of the drive link (353) moves the first deployable lift device (212) relative to the second deployable lift device (213).

WO 2006/029132 A1

WO 2006/029132 A1



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

SYSTEMS AND METHODS FOR PROVIDING DIFFERENTIAL MOTION TO WING HIGH LIFT DEVICES

5

TECHNICAL FIELD

The present invention is directed generally toward systems and methods for providing differential motion to wing high lift devices, for example, to provide differential
10 camber to wings during high speed flight.

BACKGROUND

Modern commercial transport aircraft have wings that are designed to be very
15 efficient at high subsonic Mach numbers. Accordingly, the wings can provide relatively high fuel efficiency during cruise flight segments, which make up the bulk of a typical airliner flight plan, particularly for long range aircraft. These aircraft typically include other devices (e.g., leading edge devices, trailing edge devices, and spoilers) that change the shape of the aircraft wing during takeoff, descent, and/or landing. Accordingly, the shape
20 of the wing can be temporarily changed to increase the lift and/or drag of the wing during non-cruise flight segments.

Continued competitive pressure on airlines and manufacturers has made fuel efficiency an increasingly important aspect of aircraft operations. Increasing fuel prices have exacerbated this pressure. However, existing systems may not improve aircraft fuel
25 efficiency to desired levels, while still maintaining low costs for system development, manufacturing, operations, and maintenance, and while maintaining commonality with existing systems.

SUMMARY

30

The present invention is directed generally to systems and methods for providing differential motion to wing high lift devices. The differential motion can be used to tailor the spanwise camber distribution of the wing, thereby improving the aerodynamic efficiency of the wing, for example, at high aircraft speeds. An aircraft wing system in accordance with

one aspect of the invention includes a wing having a leading edge and a trailing edge, a first deployable lift device having a first spanwise location and a second deployable lift device having a second spanwise location different than the first. Each lift device can be movable relative to the wing from a stowed position to a deployed position. The wing system can further include a drive system having a drive link operatively coupleable to both the first and second lift devices. A control system is operatively coupled to the drive system and has a first configuration for which the drive link is operatively coupled to the first and second lift devices, and activation of at least a portion of the drive link moves the first and second lift devices together. The control system also has a second configuration for which the drive link is operatively coupled to the first lift device and operatively decoupled from the second lift device, and activation of at least a portion of the drive link moves the first lift device relative to the second lift device.

In further embodiments, the control system can have a third configuration for which the drive link is operatively coupled to the second lift device and operatively decoupled from the first lift device. Accordingly, activation of at least a portion of the drive link moves the second lift device relative to the first lift device. In still further embodiments, the drive link can include a mechanical drive shaft or a hydraulic link, and the first lift device can be located inboard or outboard of the second lift device.

A method for operating an aircraft wing system in accordance with another aspect of the invention includes coupling first and second deployable lift devices of a wing with a drive link, wherein the first and second deployable lift devices are located at different spanwise locations of the wing. The method can further include moving the first and second deployable lift devices together by activating the drive link, decoupling the second deployable lift device from the drive link, and moving the first deployable lift device relative to the second deployable lift device by activating the drive link while the second deployable lift device is decoupled from the drive link.

In further embodiments, the method can further comprise limiting a range of motion of the first lift device to have a first value when moving the first and second lift devices together, and limiting the range of motion of the first lift device to have a second value less than the first value when moving the first lift device relative to the second lift device.

Moving the first lift device relative to the second can include changing a spanwise camber distribution of the wing.

In accordance with one aspect of the invention, there is provided an aircraft wing system that includes a wing having a leading edge and a trailing edge. The system
5 further includes a first deployable lift device having a first spanwise location and being movable relative to the wing from a stowed position to at least one first deployed position. The system also includes a second deployable lift device having a second spanwise location different than the first and being movable relative to the wing from a stowed position to at least one second deployed position. The system also includes a drive
10 system having a drive link operatively coupleable to both the first and the second deployable lift devices, the drive system further including a first motor and a second motor selectively coupleable to the drive link, the second motor being an alternate or backup motor that is arranged to provide power to the first and second deployable lift devices in the event the first motor is unable to do so. The system also includes a control system
15 operatively coupled to the drive system. The control system has a first configuration for which the drive link is operatively coupled to the first and second deployable lift devices, and activation of at least a portion of the drive link moves the first and second deployable lift devices together and a second configuration for which the drive link is operatively coupled to the first deployable lift device and operatively decoupled from the second
20 deployable lift device, and activation of at least a portion of the drive link moves the first deployable lift device relative to the second deployable lift device.

In accordance with another aspect of the invention, there is provided an aircraft wing system that includes a wing having a leading edge and a trailing edge. The system further includes a first deployable lift device positioned proximate to the wing leading edge
25 or the wing trailing edge at a first spanwise location. The first deployable lift device is movable relative to the wing from a stowed position to at least one first deployed position. The system also includes a second deployable lift device positioned proximate to the wing leading edge or the wing trailing edge at a second spanwise location different than the first. The second deployable lift device is movable relative to the wing from a stowed
30 position to at least one second deployed position. The system further includes a drive system having a drive link operatively coupleable to both the first and the second deployable lift devices. The drive system also includes a first motor and a second motor.

The drive link is selectively coupleable to both the first motor and the second motor, and the second motor is an alternate or backup motor that is arranged to provide power to the first and second deployable devices in the event the first motor is unable to do so. The system also includes a control system operatively coupled to the drive link. The control
5 system includes a first configuration for which activation of at least a portion of the drive link moves the first and second deployable lift devices together and a second configuration for which activation of at least a portion of the drive link moves the first deployable lift device relative to the second deployable lift device. The control system further includes a third configuration for which activation of at least a portion of the drive
10 link moves the second deployable lift device relative to the first deployable lift device.

In accordance with another aspect of the invention there is provided an aircraft wing system that includes a wing having a leading edge and a trailing edge. The system further includes a first deployable lift device positioned proximate to the wing trailing edge at a first spanwise location. The first deployable lift device is movable
15 relative to the wing from a stowed position to at least one first deployed position. The system also includes a second deployable lift device positioned proximate to the wing trailing edge at a second spanwise location different than the first. The second deployable lift device is movable relative to the wing from a stowed position to at least one second deployed position. The system further includes a drive system having a drive link
20 operatively coupleable to both the first and the second deployable lift devices. The drive system further includes a first motor and a second motor, the drive link being selectively coupleable to both the first motor and the second motor. The second motor is an alternate or backup motor that is arranged to provide power to the first and second deployable devices in the event the first motor is unable to do so. The system also
25 includes a control system operatively coupled to the drive system. The control system has a first configuration for which activation of at least a portion of the drive link moves the first and second deployable lift devices together and a second configuration for which activation of at least a portion of the drive link moves the first deployable lift device relative to the second deployable lift device. The control system also has a differential coupled
30 among the drive link, the first deployable lift device, and the second deployable lift device and a first brake operatively coupled to the differential to couple the first and second deployable lift devices when the control system has the first configuration. The control

system also has a second brake operatively coupled to the second deployable lift device and engaged to at least restrict motion of the second deployable lift device when the control system has the second configuration.

5 In accordance with another aspect of the invention, there is provided an aircraft wing system that includes a wing having a leading edge and a trailing edge. The system also includes a first deployable lift device having a first spanwise location. The first deployable lift device is movable relative to the wing from a stowed position to at least one first deployed position. The system further includes a second deployable lift device having a second spanwise location different than the first. The second deployable lift
10 device is movable relative to the wing from a stowed position to at least one second deployed position. The system also includes drive means having link means operatively coupleable to both the first and the second deployable lift devices. The drive means further includes a first motor and a second motor and means for selectively coupling the first motor and the second motor to the drive link. The second motor is an alternate or
15 backup motor that is arranged to provide power to the first and second deployable devices in the event the first motor is unable to do so. The system also includes control means operatively coupled to the drive means. The control means has a first configuration for which the link means is operatively coupled to the first deployable lift device. Activation of at least a portion of the link means moves the first and second deployable lift devices as a
20 unit. The control system also has a second configuration for which the link means is operatively coupled to the first deployable lift device and operatively decoupled from the second deployable lift device. Activation of at least a portion of the link means moves the first deployable lift device relative to the second deployable lift device.

In accordance with another aspect of the invention, there is provided a method for
25 operating an aircraft wing system that involves coupling first and second deployable lift devices of a wing with a drive link. The drive link is selectively coupled to first and second motors and the second motor is an alternate or backup motor that is arranged to provide power to the first and second deployable lift devices in the event the first motor is unable to do so. The first and second deployable lift devices are located at different spanwise
30 locations of the wing. The method also involves moving the first and second deployable lift devices together by activating the drive link. The method also involves decoupling the second deployable lift device from the drive link and moving the first deployable lift device

relative to the second deployable lift device by activating the drive link while the second deployable lift device is decoupled from the drive link.

5 In accordance with another aspect of the invention there is provided a computer-readable medium encoded with codes for directing a programmable computer in an aircraft wing system to execute a method that involves coupling first and second deployable lift devices of a wing with a drive link. The drive link is selectively coupled to first and second motors and the second motor is an alternate or backup motor that is arranged to provide power to the first and second deployable lift devices in the event the first motor is unable to do so. The first and second deployable lift devices are located at
10 different spanwise locations of the wing. The method also involves moving the first and second deployable lift devices together by activating the drive link. The method also involves decoupling the second deployable lift device from the drive link and moving the first deployable lift device relative to the second deployable lift device by activating the drive link while the second deployable lift device is decoupled from the drive link.

15 In accordance with another aspect of the invention there is provided a method for operating an aircraft wing system. The method involves coupling first and second deployable lift devices of wing to a rotatable drive shaft. The rotatable drive shaft is selectively coupleable to first and second motors. The second motor is an alternate or backup motor that is arranged to provide power to the first and second deployable lift
20 devices in the event the first motor is unable to do so. The first and second deployable lift devices are located at different spanwise locations of the wing. The method further involves moving the first and second deployable lift devices together during low speed aircraft operations by rotating the drive shaft while both the first and second deployable lift devices are coupled to the drive shaft. The method also involves controlling a spanwise
25 camber distribution of the wing during high speed aircraft operations by decoupling the second deployable lift device from the drive shaft and moving the first deployable lift device independently of the second deployable lift device by rotating the drive shaft while the second deployable lift device is decoupled from the drive shaft. When moving the first deployable lift device independently of the second deployable lift device, the drive shaft is
30 selectively coupled to the second motor.

In accordance with another aspect of the invention there is provided a computer-readable medium encoded with codes for directing a programmable computer in an

aircraft wing system to execute a method for operating an aircraft wing system. The method involves coupling first and second deployable lift devices of wing to a rotatable drive shaft. The rotatable drive shaft is selectively coupleable to first and second motors. The second motor is an alternate or backup motor that is arranged to provide power to the
5 first and second deployable lift devices in the event the first motor is unable to do so. The first and second deployable lift devices are located at different spanwise locations of the wing. The method further involves moving the first and second deployable lift devices together during low speed aircraft operations by rotating the drive shaft while both the first and second deployable lift devices are coupled to the drive shaft. The method also
10 involves controlling a spanwise camber distribution of the wing during high speed aircraft operations by decoupling the second deployable lift device from the drive shaft and moving the first deployable lift device independently of the second deployable lift device by rotating the drive shaft while the second deployable lift device is decoupled from the drive shaft. When moving the first deployable lift device independently of the second
15 deployable lift device, the drive shaft is selectively coupled to the second motor.

In accordance with another aspect of the invention there is provided a method for outfitting an aircraft wing system. The method involves coupling a differential in a drive link between a first deployable lift device of an aircraft and a second deployable lift device of the aircraft. The method further involves coupling a control system to the differential,
20 wherein the control system has a first configuration for which activation of the drive link moves the first and second deployable high lift devices together, and a second configuration for which activation of the drive link moves the first deployable lift device relative to the second deployable lift device. The drive link is selectively coupleable to a first motor and a second motor. The second motor is an alternate or backup motor that is
25 arranged to provide power to the first and second deployable lift devices in the event the first motor is unable to do so.

In accordance with another aspect of the invention there is provided an aircraft wing system. The system includes a wing having a leading edge and a trailing edge and a first deployable lift device having a first spanwise location. The first deployable lift
30 device is movable relative to the wing from a stowed position to at least one first deployed position. The system further includes a second deployable lift device having a second spanwise location different than the first. The second deployable lift device is movable

relative to the wing from a stowed position to at least one second deployed position. The system also includes a drive system having a drive link operatively coupleable to both the first and the second deployable lift devices and a control system operatively coupled to the drive system. The control system has a first configuration for which the drive link is

5 operatively coupled to the first and second deployable lift devices, and activation of at least a portion of the drive link moves the first and second deployable lift devices together. The control system also has a second configuration for which the drive link is operatively coupled to the first deployable lift device and operatively decoupled from the second

10 deployable lift device, and activation of at least a portion of the drive link moves the first deployable lift device relative to the second deployable lift device. The control system further has a third configuration for which the drive link is operatively coupled to the second deployable lift device and operatively decoupled from the first deployable lift device, and wherein activation of at least a portion of the drive link moves the second

15 deployable lift device relative to the first deployable lift device, and wherein the drive link includes a drive shaft, and the drive system, includes a first motor, a second motor and a differential coupled among the drive shaft, the first deployable lift device, the second deployable lift device, the first motor and the second motor. The control system includes a first brake operatively coupled to the differential and engaged to move the first and second deployable lift devices when the control system has the first configuration. The

20 control system further includes a second brake operatively coupled to the second deployable lift device and engaged to at least resist motion of the second deployable lift device when the control system has the second configuration. The control system also includes a third brake operatively coupled to the first deployable lift device and engaged to at least resist motion of the first deployable lift device when the control system has the

25 third configuration. The first motor is operatively coupled to the first and second deployable lift devices and the second motor is operatively decoupled from the first and second deployable lift devices when the control system has the first configuration. The second motor is operatively coupled to the first deployable lift device and the first motor is operatively decoupled from the first and second deployable lift devices when the control

30 system has the second configuration. The second motor is operatively coupled to the second deployable lift device and the first motor is operatively decoupled from the first and second deployable lift devices when the control system has the third configuration.

In accordance with another aspect of the invention there is provided an aircraft wing system. The system includes a wing having a leading edge and a trailing edge. The system further includes a first deployable lift device positioned proximate to the wing leading edge or the wing trailing edge at a first spanwise location. The first deployable lift device is movable relative to the wing from a stowed position to at least one first deployed position. The system also includes a second deployable lift device positioned proximate to the wing leading edge or the wing trailing edge at a second spanwise location different than the first. The second deployable lift device is movable relative to the wing from a stowed position to at least one second deployed position. The system further includes a drive system having a drive link operatively coupleable to both the first and the second deployable lift devices and a control system operatively coupled to the drive link. The control system has a first configuration for which activation of at least a portion of the drive link moves the first and second deployable lift devices together and a second configuration for which activation of at least a portion of the drive link moves the first deployable lift device relative to the second deployable lift device. The control system also has a third configuration for which activation of at least a portion of the drive link moves the second deployable lift device relative to the first deployable lift device, wherein the drive link includes a drive shaft and wherein the drive system includes a first motor, a second motor, and differential coupled among the drive shaft, the first deployable lift device, the second deployable lift device, the first motor and the second motor. The control system further includes a first brake operatively coupled to the differential and engaged to move the first and second deployable lift devices when the control system has the first configuration. The control system also includes a second brake operatively coupled to the second deployable lift device and engaged to at least resist motion of the second deployable lift device when the control system has the second configuration. The control system further includes a third brake operatively coupled to the first deployable lift device and engaged to at least resist motion of the first deployable lift device when the control system has the third configuration. The first motor is operatively coupled to the first and second deployable lift devices and the second motor is operatively decoupled from the first and second deployable lift devices when the control system has the first configuration. The second motor is operatively coupled to the first deployable lift device and the first motor is operatively decoupled from the first and second deployable lift

devices when the control system has the second configuration. The second motor is operatively coupled to the second deployable lift device and the first motor is operatively decoupled from the first and second deployable lift devices when the control system has the third configuration.

5 In accordance with another aspect of the invention there is provided an aircraft wing system. The system includes a wing having a leading edge and a trailing edge. The system further includes a first deployable lift device having a first spanwise location. The first deployable lift device is movable relative to the wing from a stowed position to at least one first deployed position. The system also includes a second deployable lift device
10 having a second spanwise location different than the first. The second deployable lift device is movable relative to the wing from a stowed position to at least one second deployed position. The system further includes drive means having link means operatively coupleable to both the first and the second deployable lift devices and control means operatively coupled to the drive means. The control means has a first
15 configuration for which the link means is operatively coupled to the first deployable lift device and activation of at least a portion of the link means moves the first and second deployable lift devices as a unit. The control means also has a second configuration for which the link means is operatively coupled to the first deployable lift device and operatively decoupled from the second deployable lift device, and activation of at least a
20 portion of the link means moves the first deployable lift device relative to the second deployable lift device. The control means has a third configuration for which the link means is operatively coupled to the second deployable lift device and operatively decoupled from the first deployable lift device, and wherein activation of at least a portion of the link means moves the second deployable lift device relative to the first deployable
25 lift device. The link means includes a drive shaft, and the drive means includes a first motor, a second motor, and a differential coupled among the drive shaft, the first deployable lift device, the second deployable lift device, the first motor and the second motor. The control means includes a first brake operatively coupled to the differential and engaged to move the first and second deployable lift devices when the control means has
30 the first configuration. The control means further includes a second brake operatively coupled to the second deployable lift device and engaged to at least resist motion of the second deployable lift device when the control means has the second configuration. The

control means also includes a third brake operatively coupled to the first deployable lift device and engaged to at least resist motion of the first deployable lift device when the control means has the third configuration. The first motor is operatively coupled to the first and second deployable lift devices and the second motor is operatively decoupled from the first and second deployable lift devices when the control means has the first configuration. The second motor is operatively coupled to the first deployable lift device and the first motor is operatively decoupled from the first and second deployable lift devices when the control means has the second configuration. The second motor is operatively coupled to the second deployable lift device and the first motor is operatively decoupled from the first and second deployable lift devices when the control means has the third configuration.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a partially schematic, isometric illustration of an aircraft that includes high lift devices configured in accordance with an embodiment of the invention.

Figure 2A is a partially schematic, plan view of an aircraft wing having high lift devices configured in accordance with an embodiment of the invention.

Figure 2B is a partially schematic, cross-sectional illustration of the wing shown in Figure 2A.

Figure 2C is a flow chart illustrating a method for moving high lift devices in accordance with an embodiment of the invention.

Figures 3A-3E illustrate an arrangement for providing differential motion of wing trailing edge devices in accordance with an embodiment of the invention.

Figures 4A-4E illustrate an arrangement for providing differential motion of wing trailing edge devices in accordance with another embodiment of the invention.

Figure 5 illustrates a graph depicting predicted increases in aircraft performance resulting from differential trailing edge device motion, in accordance with an embodiment of the invention.

DETAILED DESCRIPTION

The following disclosure describes systems and methods for providing differential motion to wing high lift devices. Certain specific details are set forth in the following

description and in Figures 1-5 to provide a thorough understanding of various embodiments of the invention. Well-known structures, systems, and methods often associated with wing high lift devices have not been shown or described in detail below to avoid unnecessarily obscuring the description of the various embodiments of the invention. In addition, those of ordinary skill in the relevant art will understand that additional embodiments of the present invention may be practiced without several of the details described below.

Many embodiments of the invention described below may take the form of computer-executable instructions, such as routines executed by a programmable computer. Those skilled in the relevant art will appreciate that the invention can be practiced on other computer system configurations as well. The invention can be embodied in a special-purpose computer or data processor that is specifically programmed, configured or constructed to perform one or more of the computer-executable instructions described below. Accordingly, the term "computer" as generally used herein includes any processor and can include Internet appliances, hand-held devices (including palm-top computers, cellular or mobile phones, multiprocessor systems, processor-based or programmable consumer electronics, minicomputers and the like).

The invention can also be practiced in distributed computing environments, where tasks or modules are performed by remote processing devices that are linked with a communications network. In a distributed computing environment, program modules or subroutines may be located in both local and remote memory storage devices. Aspects of the invention described below may be stored or distributed on computer-readable media, including magnetic or optically readable computer disks (e.g., removable disks) as well as distributed electronically over networks. Data structures and transmissions of data particular to aspects of the invention are also encompassed within the scope of the invention. Information handled in accordance with aspects of the invention can be presented at displays or display media, for example, CRT screens, LCD screens, or other suitable devices.

Figure 1 is a partially schematic, isometric illustration of an aircraft 100 having a fuselage 101 carried by wings 110. The aircraft 100 can further include an empennage 102 carrying a rudder 103, a vertical stabilizer 104, horizontal stabilizers 106, and elevators 105. A propulsion system 107 can include one or more engines that are attached to the wings 110 (as shown in Figure 1), the fuselage 101, and/or the empennage 102.

The wings 110 can include leading edge devices 116 and trailing edge devices 111 that control the camber of the wing during one or more flight segments. The leading edge devices 116 and the trailing edge devices 111 can be coupled to a control system 120 that receives operator inputs 121 and automatic inputs 125 for controlling the operation of the leading edge devices 116 and the trailing edge devices 111. The control system 120 can

also control the operation of the propulsion system 107, the elevators 105, and the rudders 103. Accordingly, the control system 120 can include a computer having a processor 126 and a memory 127, and can be configured to read instructions from one or more computer-readable media 128.

5 Figure 2A is a partially schematic, plan view of one of the wings 110 described above with reference to Figure 1. The wing 110 can include multiple trailing edge devices 111, for example, an inboard flap 212, an outboard flap 213, an aileron 214, and a flaperon 215. The aileron 214 can be used to provide roll control to the aircraft during high speed
10 speed flight (e.g., takeoff and landing). Spoilers 222 can provide for aircraft deceleration and/or lift reduction. The inboard flap 212 and the outboard flap 213 can be operated to provide both high lift (during low speed flight) and variable wing camber (during high speed flight), as described in greater detail below.

 Figure 2B is a partially schematic, cross-sectional illustration of a portion of the wing
15 110 shown in Figure 2A, including one of the trailing edge devices 111 (e.g., the inboard flap 212 or the outboard flap 213) and the spoiler 222. During deceleration, the spoiler 222 can be deflected upwardly, as indicated in dashed lines in Figure 2B. During takeoff and landing, the trailing edge device 111 can be deflected downwardly through relatively large angles (depending upon factors that include whether the aircraft is taking off or landing, the
20 length of the airport runway, wind conditions, etc.).

 In a particular embodiment of the invention, the same trailing edge devices 111 that provide for high lift during low speed operations can also be deflected by relatively small amounts to tailor the lift distribution across the span of the wing 110. In other words, trailing edge devices 111 having different spanwise locations on the wing 110 can be
25 deflected by different amounts and/or in different directions to adjust the camber of the wing 110 at a plurality of spanwise locations and therefore tailor the lift distribution of the wing 110 to account for conditions that may vary in a spanwise direction. Accordingly, the trailing edge devices 111 can be deflected from a neutral position N to an upwardly deflected position U and/or to a downwardly deflected position D. In particular
30 embodiments, the deflections from the neutral position N can be on the order of a few degrees (e.g., plus or minus two degrees). In other embodiments, these deflections can

have other values. In any of these embodiments, the overall arrangement of the trailing edge devices 111 themselves can be the same as, or at least generally similar to, existing arrangements. The capability to operate the trailing edge devices 111 during high speed flight can be provided by additions to and/or replacements of the existing hardware and software used to control the operation of the existing trailing edge devices 111.

Figure 2C is a flow chart illustrating a process 270 for moving high lift devices in accordance with an embodiment of the invention. In process portion 271, the system is at rest. Accordingly, the high lift devices (e.g., inboard and outboard flaps 213) can be prevented from moving by one or more brakes. In process portion 272, the system receives a high lift command, e.g., a command from a pilot to increase the lift of the wing, generally at relatively low flight speeds, including take-off and landing. In process portion 273, the system moves the inboard and outboard flaps together to configure the wing for high lift.

In process portion 274, the system receives a variable camber command, e.g., an automatic or pilot-initiated command to adjust the camber of the wings in such a manner that the camber at inboard and outboard parts of the wing are different. Accordingly, in process portion 275, the system places the inboard and outboard flaps at different relative positions, typically at higher speed conditions, including cruise conditions. Further details of systems for performing these functions are described below with reference to Figures 3A-4E.

Figure 3A schematically illustrates portions of the wings 110, including first trailing edge devices (e.g., inboard flaps 212) and second trailing edge devices (e.g., outboard flaps 213). A drive system 350 moves the flaps 212, 213 to selected positions, and a control system 320 directs and coordinates the operation of the drive system 350 to provide unitary and differential motion to the inboard flaps 212 and the outboard flaps 213. The differential motion provides the wings 110 with an adjustable, spanwise varying camber. The control system 320 can include a controller 323 that receives operator inputs 324 and automatic inputs 325. In a particular embodiment, the operator inputs 324 can cause the controller 323 to direct the flaps 212, 213 to move in unison, for example, during normal takeoff and landing operations. The automatic inputs 325 can cause the controller

323 to direct differential motion of the inboard flaps 212 and the outboard flaps 213 to tailor the camber of the wings 110, for example, during high speed flight.

The drive system 350 can include a drive link 353 that delivers power to the flaps 212, 213. The drive link 353 can be coupled to both a primary motor 351 and an alternate or backup motor 352. The primary motor 351 can provide power to the flaps 212, 213 during normal operations, and the alternate motor 352 can provide power to the flaps 212, 213 in the event the primary motor 351 is unable to do so. As is also described in greater detail below, the primary motor 351 can provide power to the flaps 212, 213 when the flaps are moved during low speed flight segments, and the alternate motor 352 can provide power to the flaps 212, 213 during high speed flight segments. The drive link 353 can be coupled to a plurality of actuators 354, each of which provides power to the flaps 212, 213. In a particular embodiment, the drive link 353 can include a mechanical drive shaft (e.g., a torque tube) and in other embodiments, the drive link can include other types of links, including hydraulic links and electrical links.

The control system 320 can include one or more control devices that coordinate, direct, and control the manner in which power is provided to the flaps 212, 213, under the direction of the controller 323. In a particular embodiment, the control system 320 can include a central control device 330 that provides power to devices located in both wings 110, and a differential control device 340 located in each of the wings 110. The differential control devices 340, together with the central control device 330, can provide power differentially to the inboard flaps 212 and the outboard flaps 213.

The central control device 330 can include a primary brake 331 that brakes the primary motor 351, and an alternate brake 332 that brakes the alternate motor 352. The differential control devices 340 can each include a differential 341 that receives power from the drive link 353 and distributes the power to the corresponding inboard flap 212, or the outboard flap 213, or both. Accordingly, the differential 341 can include a planetary gear device or other suitable mechanical differential, or an equivalent hydraulic or electrical device, depending on the nature of the drive link 353. When a differential brake 342 is engaged with the differential 341, the differential 341 provides power to both the inboard flap 212 and the outboard flap 213. When an outboard brake 344 is engaged with the differential 341, only the inboard flap 212 moves. When the inboard flap 212 and/or the

outboard flap 213 is moved during high speed flight, a range limiter 343 can be engaged with the drive link 353 and/or the differential 341 to prevent unnecessarily high deflections of either of the flaps 212, 213. The range limiter 343 can include a mechanical device, electrical device and/or set of instructions based in a computer-readable medium. The system can also include a stop module (not shown) that limits the angular deflection difference between the inboard flap 212 and the outboard flap 213.

Operation of the control system 320 and the flaps 212, 213 is described below with reference to Figures 3B-3E. For purposes of illustration, active devices are generally shown in these Figures outlined in heavy lines. Brakes that are active resist motion of another component of the system, even though in some cases, the brake may resist motion when power is not applied to it, and may release when power is applied to it. Other components (e.g., motors and flaps) are generally moving when active.

Figure 3B schematically illustrates the wings 110 when the flaps 212, 213 are stationary. The primary brake 331 is engaged to prevent transmission of power by the primary motor 351, and the alternate brake 332 is engaged to prevent transmission of power by the alternate motor 352. The differential brakes 342 are engaged to prevent differential motion of the inboard flaps 212 relative to the outboard flaps 213, and the outboard brakes 344 are engaged to prevent motion of the outboard flaps 213. Accordingly, none of the flaps 212, 213 move when the system is in this configuration.

Figure 3C illustrates a configuration for which the inboard flaps 212 and the outboard flaps 213 move together through relatively large deflections, for example, during takeoff and/or landing. In this configuration, the primary motor 351 can provide power to the drive link 353, and the alternate brake 332 can disable the alternate motor 352, which is inactive. The differential brakes 342 are engaged with the differentials 341 so that power provided by the drive link 353 is provided to actuators 354 associated with both the inboard flaps 212 and the outboard flaps 213. Accordingly, the differentials 341 in this configuration can act as "pass-through" devices that provide power equally to the inboard flaps 212 and the outboard flaps 213.

Figure 3D illustrates the wings 110 and the control system 320 in another configuration for which the inboard flaps 212 and the outboard flaps 213 are moved together during high speed flight segments (e.g., cruise). In one aspect of this

embodiment, the primary brake 331 has engaged the primary motor 351 and the alternate brake 332 has been released. Accordingly, the alternate motor 352 provides power to the drive link 353. The differential brakes 342 are engaged so that power provided by the drive link 353 is delivered to both the inboard flaps 212 and the outboard flaps 213. The range
5 limiter 343 is also engaged to prevent large deflections of the inboard flaps 212 and the outboard flaps 213. For example, the motion of the flaps 212, 213 can be limited to plus or minus two degrees in one embodiment, and to other values that depend on aircraft flight speed, structural loading considerations and/or other factors in other embodiments. Both the inboard flaps 212 and the outboard flaps 213 can be moved together until the outboard
10 flaps 213 achieve the desired position.

Once the outboard flaps 213 have been moved to their target positions, the inboard flaps 212 can be moved relative to the outboard flaps 213, as shown in Figure 3E. In this configuration, the primary brake 331 remains engaged with the primary motor 351 so that the alternate motor 352 provides power to the drive link 353. The range limiters 343 also
15 remain engaged to prevent excessive motion of the inboard flap 212. The differential brakes 342 are released and the outboard brakes 344 are applied so that the differentials 341 provide power to the inboard flaps 212 but not the outboard flaps 213. The outboard flaps 213 are effectively decoupled from the drive link 335. Accordingly, the inboard flaps 212 can now be moved to their target positions. As a result, the inboard flaps 212 have a
20 different deflection than the outboard flaps 213. If it is desired to move only the inboard flaps 212, the system can be operated while in the configuration shown in Figure 3E, without first moving the inboard and outboard flaps together via the configuration shown in Figure 3D.

One feature of an embodiment of the system described above with reference to
25 Figures 3A-3E is that the inboard flaps 212 can be moved relative to the outboard flaps 213 during high speed flight segments. Accordingly, the camber of the wing 110 at a spanwise location aligned with the inboard flaps 212 can be different than the camber of the wing 110 at a spanwise location aligned with the outboard flaps 213. In this manner, the lift and drag characteristics of the wing 110 can be varied in a spanwise direction to account for
30 conditions that can make the "optimal" or nearly optimal camber of the wing 110 at different spanwise locations different. Such conditions can arise, for example, when fuel is used

more rapidly from inboard fuel tanks than outboard fuel tanks (or vice versa), which can reduce the need for lift at one section of the wing 110 more rapidly than at another section of the wing 110. In other embodiments, other external factors can create lift requirements that vary in a spanwise manner. Such factors include wind gusts that affect inboard and outboard portions of the wing 110 differently. The degree to which a differential camber is applied to the wing can be directed automatically via the automatic inputs 325

Another feature of an embodiment of the system described above with reference to Figures 3A-3E is that the range limiter 343 can prevent large deflections of both the inboard and outboard flaps 212, 213 when the aircraft is at a flight condition for which such motions are not appropriate. In particular, the range limiter 343 can automatically prevent such large deflections during aircraft operations above a given Mach number or indicated air speed. The range limiter 343 can automatically disengage when the aircraft falls below such speeds, to allow for large deflections which are appropriate for aircraft takeoff and landing. Whether or not the range limiter 343 is engaged can be controlled automatically via one of the automatic inputs 325 to the controller 323.

Yet another feature of an embodiment of the system described above with reference to Figures 3A-3E is that the alternate motor 352 can provide power to the drive link 353 when the flaps 212, 213 are moved through small deflection angles. In particular embodiments, the alternate motor 352 may not have the same rate capabilities as the primary motor 351 (e.g., it may be slower), and accordingly, its use can be particularly appropriate for moving the flaps 212, 213 by small amounts to optimize or at least improve the performance of the wing 110 during cruise or other relatively long flight segments (e.g., climb-out). A further advantage of this arrangement is that the alternate motor 352 is more likely to be used during a typical flight than it would be in a conventional arrangement, and as a result, the aircraft operator will know during the course of the flight whether or not the alternate motor 352 is available in case the primary motor 351 fails.

Figure 4A-4E illustrate a controller system 420 configured to direct the motion of the inboard flaps 212 and the outboard flaps 213 in accordance with another embodiment of the invention. Accordingly, the controller system 420 can include a controller 423 coupled to a central control device 430 and two differential control devices 440. A drive system 450 includes a drive link 453 that receives power from a primary motor 451 or an alternate

motor 452. A primary brake 431 halts motion of the primary motor 451, and an alternate brake 432 halts motion of the alternate motor 452. Each differential control device 450 can include a differential 441, a differential brake 442 and a range limiter 443, all of which operate in a manner generally similar to that described above with reference to Figure 3A.

5 Each differential control device 440 can also include a differential motor 455 that is coupled to the differential 441, and an outboard brake 444 that is coupled to an outboard segment of the drive link 453, in manners that differ from the arrangement described above with reference to Figure 3A. Further details of the controller system 420 and its operation are described below with reference to Figures 4B-4E.

10 Figure 4B illustrates the system at rest. The primary brake 431 prevents motion of the primary motor 451 and the alternate brake 432 prevents motion of the alternate motor 452. The differential brakes 442 are engaged to prevent differential power to the inboard flaps 212 relative to the outboard flaps 213, and the outboard brakes 444 prevent motion of the outboard flaps 213.

15 Figure 4C illustrates the system when it is configured to provide power to the inboard flaps 212 and the outboard flaps 213 during low speed flight conditions. The primary brake 431 is released, allowing the primary motor 451 to provide power to the drive link 453. The differential brake 442 remains engaged so that the differential 441 provides power to both the inboard flaps 212 and the outboard flaps 213. The outboard brakes 444
20 are released so that the outboard flaps 213 can move.

In Figure 4D, the system is configured to provide differential motion to the inboard flaps 212. Accordingly, both the primary brakes 431 and the alternate brakes 432 are released, and the outboard brakes 444 are engaged. The differential motors 455 are activated to provide motion to only the inboard flaps 212, via the differentials 441.
25 Accordingly, the outboard flaps 213 are effectively decoupled from the drive link 453. The range limiters 443 are also activated to prevent excessive motion of the inboard flaps 212. Accordingly, the inboard flaps 212 can be moved relative to the outboard flaps 213 by relatively small amounts to a desired setting (e.g., during cruise flight segments).

In Figure 4E, the system is configured to provide differential motion to the outboard
30 flaps 212, independently of the inboard flaps 212. The outboard brakes 444 are released, while the primary brakes 431 and alternate brakes 432 are engaged to prevent motion of

the inboard flap 212. The inboard flaps 212 are now decoupled from the drive link 453. Accordingly, when the differential motors 455 are activated, they each drive one of the outboard flaps 213 while the inboard flaps 212 remain in fixed positions.

In other embodiments, the arrangement described above with reference to Figures 4A-4E can be used in accordance with other methods. For example, the primary motor 451 can be operated simultaneously with the differential motors 455 to move the inboard and outboard flaps 212, 213 simultaneously, but in different manners. Accordingly, the inboard and outboard flaps 212, 213 can be moved simultaneously but at different speeds, or in different directions.

One feature of an arrangement described above with reference to Figures 4A-4E is that the inboard flaps 212 can be moved relative to the outboard flaps 213 (and vice versa) at high aircraft speeds. Accordingly, when it is desired to move only the outboard flaps 213, the inboard flaps 212 need not be moved at the same time and then independently moved back to their desired positions. Conversely, an advantage of the arrangement described above with reference to Figures 3A-3E is that it can make use of an existing alternate motor and does not require a separate differential motor. The particular arrangement installed on a given aircraft can be selected based on design criteria and other factors that may be unique to that aircraft. A common advantage of both arrangements, as discussed above, is that they can be used to tailor the spanwise lift distribution of the wing 110 to improve aircraft aerodynamic efficiency.

Figure 5 illustrates a graph depicting lift-to-drag ratios as a function of overall wing lift coefficient (CL), predicted for differential motion of trailing edge devices in accordance with any of the embodiments described above. Line 460 illustrates a baseline lift-to-drag curve for an aircraft that is not capable of manipulating wing camber at high speeds (e.g., cruise speeds). Line 461 illustrates predicted lift-to-drag characteristics for an aircraft wing wherein the trailing edge devices of the wing are actuated in a linked manner to change the camber by the same or a similar amount over the span of the wing. Line 462 illustrates predicted lift-to-drag characteristics when the spanwise camber distribution varies over the span of the wing so that the wing can have a different camber at one spanwise location than at another. As is shown in Figure 5, adjusting the camber of the wing at high speed

can provide for increased wing performance, and differentially adjusting the camber of the wing (e.g., in a spanwise varying manner) can even further increase the wing performance.

From the foregoing, it will be appreciated that specific embodiments of the invention have been described herein for purposes of illustration, but that various modifications may be made without deviating from the spirit and scope of the invention. For example, aspects of the invention described in the context of particular embodiments can be combined or eliminated in other embodiments. In many of the embodiments described above, high lift devices on one side of the aircraft longitudinal centerline are moved in concert with correspondingly-positioned high lift devices on the other side of the aircraft longitudinal centerline. In other embodiments, devices on opposite sides of the aircraft longitudinal centerline can be moved in different manners. In still further embodiments, the differentially movable high lift devices can be coupled to the wing leading edge, in addition to or in lieu of coupling differentially movable high lift devices to the wing trailing edge. While the wings illustrated in the Figures each include two high lift devices that are actuated to provide a variable camber, the wings can include more such high lift devices in other embodiments. Accordingly, the invention is not limited except as by the appended claims.

**THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**

1. An aircraft wing system, comprising:

a wing having a leading edge and a trailing edge;

5

a first deployable lift device having a first spanwise location and
being movable relative to the wing from a stowed position to at
least one first deployed position;

10

a second deployable lift device having a second spanwise
location different than the first and being movable relative to the
wing from a stowed position to at least one second deployed
position;

15

a drive system having a drive link operatively coupleable to both
the first and the second deployable lift devices, the drive system
further including a first motor and a second motor selectively
coupleable to the drive link, the second motor being an alternate
or backup motor that is arranged to provide power to the first
and second deployable lift devices in the event the first motor is
unable to do so; and

20

a control system operatively coupled to the drive system, the
control system having:

25

a first configuration for which the drive link is operatively
coupled to the first and second deployable lift devices,
and activation of at least a portion of the drive link moves
the first and second deployable lift devices together; and

30

- 5 a second configuration for which the drive link is
operatively coupled to the first deployable lift device and
operatively decoupled from the second deployable lift
device, and activation of at least a portion of the drive link
moves the first deployable lift device relative to the
second deployable lift device.
- 10 2. The system of claim 1 wherein the control system has a third
configuration for which the drive link is operatively coupled to the
second deployable lift device and operatively decoupled from the first
deployable lift device, and wherein activation of at least a portion of the
drive link moves the second deployable lift device relative to the first
deployable lift device.
- 15 3. The system of claim 1, further comprising a range limiter operatively
coupled to the first and second deployable lift devices to provide a first
range of motion when the control system has the first configuration,
and provide a second range of motion less than the first range of
motion when the control system has the second configuration.
- 20 4. The system of claim 1 wherein the drive link includes a mechanical
drive shaft.
5. The system of claim 1 wherein the first deployable lift device is inboard
of the second deployable lift device.
6. The system of claim 1 wherein the first deployable lift device is
outboard of the second deployable lift device.
- 25 7. The system of claim 1 wherein the drive link includes a hydraulic link.
8. The system of claim 1 wherein the control system has a third
configuration for which the drive link is operatively coupled to the

- second deployable lift device and operatively decoupled from the first deployable lift device, and wherein activation of at least a portion of the drive link moves the second deployable lift device relative to the first deployable lift device, and wherein the drive link includes a drive shaft and the drive system further includes a third motor, and wherein the control system includes:
- 5 a differential coupled among the drive shaft, the first deployable lift device, the second deployable lift device and the third motor;
- 10 a first brake operatively coupled to the differential and engaged to move the first and second deployable lift devices when the control system has the first configuration;
- 15 a second brake operatively coupled to the second deployable lift device and engaged to at least resist motion of the second deployable lift device when the control system has the second configuration; and
- 20 a third brake operatively coupled to the first deployable lift device and engaged to at least resist motion of the first deployable lift device when the control system has the third configuration; wherein
- 25 the first motor is operatively coupled to the first and second deployable lift devices and the third motor is operatively decoupled from the first and second deployable lift devices when the control system has the first configuration;
- 30 the third motor is operatively coupled to the first deployable lift device and the first motor is operatively decoupled from the first and second deployable lift devices when the control system has the second configuration; and

5 the third motor is operatively coupled to the second deployable lift device and the first motor is operatively decoupled from the first and second deployable lift devices when the control system has the third configuration.

9. The system of claim 1 wherein the drive link includes a drive shaft and wherein at least one of said first and second motors is coupled to said drive shaft and wherein the control system includes:

10 a differential coupled among the drive shaft, the first deployable lift device, and the second deployable lift device;

a first brake operatively coupled to the differential to couple the first and second deployable lift devices when the control system has the first configuration; and

15 a second brake operatively coupled to the second deployable lift device and engaged to resist motion of the second deployable lift device when the control system has the second configuration.

10. The system of claim 1, further comprising a fuselage coupled to the wing.

11. An aircraft wing system, comprising:

a wing having a leading edge and a trailing edge;

5 a first deployable lift device positioned proximate to the wing leading edge or the wing trailing edge at a first spanwise location, the first deployable lift device being movable relative to the wing from a stowed position to at least one first deployed position;

10 a second deployable lift device positioned proximate to the wing leading edge or the wing trailing edge at a second spanwise location different than the first, the second deployable lift device being movable relative to the wing from a stowed position to at least one second deployed position;

15 a drive system having a drive link operatively coupleable to both the first and the second deployable lift devices, the drive system further including a first motor and a second motor, the drive link being selectively coupleable to both the first motor and the second motor, the second motor being an alternate or backup motor that is arranged to provide power to the first and second deployable devices in the event the first motor is unable to do so; and

25 a control system operatively coupled to the drive link, the control system having:

a first configuration for which activation of at least a portion of the drive link moves the first and second deployable lift devices together;

5 a second configuration for which activation of at least a portion of the drive link moves the first deployable lift device relative to the second deployable lift device; and

10 a third configuration for which activation of at least a portion of the drive link moves the second deployable lift device relative to the first deployable lift device.

12. The system of claim 11 wherein the drive link includes a drive shaft and wherein the drive system further includes a third motor and wherein the control system includes:

15 a differential coupled among the drive shaft, the first deployable lift device, the second deployable lift device and the third motor;

20 a first brake operatively coupled to the differential and engaged to move the first and second deployable lift devices when the control system has the first configuration;

25 a second brake operatively coupled to the second deployable lift device and engaged to at least resist motion of the second deployable lift device when the control system has the second configuration; and

30 a third brake operatively coupled to the first deployable lift device and engaged to at least resist motion of the first deployable lift device when the control system has the third configuration; wherein

the first motor is operatively coupled to the first and second deployable lift devices and the third motor is operatively decoupled from the first and second deployable lift devices when the control system has the first configuration;

5

the third motor is operatively coupled to the first deployable lift device and the first motor is operatively decoupled from the first and second deployable lift devices when the control system has the second configuration; and

10

the third motor is operatively coupled to the second deployable lift device and the first motor is operatively decoupled from the first and second deployable lift devices when the control system has the third configuration.

15

13. The system of claim **11** wherein the drive link includes a mechanical drive shaft.

14. The system of claim **11** wherein the first deployable lift device is inboard of the second deployable lift device.

20

15. The system of claim **11** wherein the first deployable lift device is outboard of the second deployable lift device.

16. The system of claim **11** wherein the drive link includes a hydraulic link.

17. An aircraft wing system, comprising:

a wing having a leading edge and a trailing edge;

25

a first deployable lift device positioned proximate to the wing trailing edge at a first spanwise location, the first deployable lift

device being movable relative to the wing from a stowed position to at least one first deployed position;

5 a second deployable lift device positioned proximate to the wing trailing edge at a second spanwise location different than the first, the second deployable lift device being movable relative to the wing from a stowed position to at least one second deployed position;

10 a drive system having a drive link operatively coupleable to both the first and the second deployable lift devices, the drive system further including a first motor and a second motor, the drive link being selectively coupleable to both the first motor and the second motor, the second motor being an alternate or backup
15 motor that is arranged to provide power to the first and second deployable devices in the event the first motor is unable to do so; and

20 a control system operatively coupled to the drive system, the control system having:

a first configuration for which activation of at least a portion of the drive link moves the first and second deployable lift devices together;

25 a second configuration for which activation of at least a portion of the drive link moves the first deployable lift device relative to the second deployable lift device;

30 a differential coupled among the drive link, the first deployable lift device, and the second deployable lift device;

a first brake operatively coupled to the differential to couple the first and second deployable lift devices when the control system has the first configuration; and

5 a second brake operatively coupled to the second deployable lift device and engaged to at least restrict motion of the second deployable lift device when the control system has the second configuration.

18. The system of claim 17 wherein:

10

the first motor is coupled to the drive link when the control system has the first configuration and decoupled from the drive link when the control system has the second configuration; and

15

the second motor is coupled to the drive link when the control system has the second configuration and decoupled from the drive link when the control system has the first configuration.

19. The system of claim 17 wherein the first deployable lift device is inboard of the second deployable lift device.

20

20. The system of claim 17 wherein the first deployable lift device is outboard of the second deployable lift device.

21. An aircraft wing system, comprising:

a wing having a leading edge and a trailing edge;

25

a first deployable lift device having a first spanwise location, the first deployable lift device being movable relative to the wing from a stowed position to at least one first deployed position;

a second deployable lift device having a second spanwise location different than the first, the second deployable lift device being movable relative to the wing from a stowed position to at least one second deployed position;

5

drive means having link means operatively coupleable to both the first and the second deployable lift devices, said drive means further including a first motor and a second motor and means for selectively coupling the first motor and the second motor to the drive link, the second motor being an alternate or backup motor that is arranged to provide power to the first and second deployable devices in the event the first motor is unable to do so; and

10

15

control means operatively coupled to the drive means, the control means having:

20

a first configuration for which the link means is operatively coupled to the first deployable lift device and activation of at least a portion of the link means moves the first and second deployable lift devices as a unit; and

25

a second configuration for which the link means is operatively coupled to the first deployable lift device and operatively decoupled from the second deployable lift device, and activation of at least a portion of the link means moves the first deployable lift device relative to the second deployable lift device.

30

- 22.** The system of claim **21** wherein the control means has a third configuration for which the link means is operatively coupled to the second deployable lift device and operatively decoupled from the first deployable lift device, and wherein activation of at least a portion of the

link means moves the second deployable lift device relative to the first deployable lift device.

- 5 **23.** The system of claim **21** wherein the first and second deployable lift devices have a first range of motion when the control means has the first configuration, and wherein the first deployable lift device has a second range of motion less than the first range of motion when the control means has the second configuration.
- 24.** The system of claim **21** wherein the link means includes a mechanical drive shaft.
- 10 **25.** The system of claim **21** wherein the first deployable lift device is inboard of the second deployable lift device.
- 26.** The system of claim **21** wherein the first deployable lift device is outboard of the second deployable lift device.
- 15 **27.** The system of claim **21** wherein the link means includes a hydraulic link.
- 28.** The system of claim **21** wherein the control means has a third configuration for which the link means is operatively coupled to the second deployable lift device and operatively decoupled from the first deployable lift device, and wherein activation of at least a portion of the link means moves the second deployable lift device relative to the first deployable lift device, and wherein the link means includes a drive shaft and the drive means further includes a third motor, and wherein the control means includes:
- 20 a differential coupled among the drive shaft, the first deployable lift device, the second deployable lift device and the third motor;
- 25

a first brake operatively coupled to the differential and engaged to move the first and second deployable lift devices when the control means has the first configuration;

5 a second brake operatively coupled to the second deployable lift device and engaged to at least resist motion of the second deployable lift device when the control means has the second configuration; and

10 a third brake operatively coupled to the first deployable lift device and engaged to at least resist motion of the first deployable lift device when the control means has the third configuration; wherein

15 the first motor is operatively coupled to the first and second deployable lift devices and the third motor is operatively decoupled from the first and second deployable lift devices when the control means has the first configuration;

20 the third motor is operatively coupled to the first deployable lift device and the first motor is operatively decoupled from the first and second deployable lift devices when the control means has the second configuration; and

25 the third motor is operatively coupled to the second deployable lift device and the first motor is operatively decoupled from the first and second deployable lift devices when the control means has the third configuration.

29. The system of claim 21 wherein the link means includes a drive shaft
30 and wherein the means for selectively coupling is operably configured to selectively couple at least one of said first and second motors to the drive shaft and wherein the control means includes:

a differential coupled among the drive shaft, the first deployable lift device, and the second deployable lift device;

5 a first brake operatively coupled to the differential to couple the first and second deployable lift devices when the control means has the first configuration; and

10 a second brake operatively coupled to the second deployable lift device and engaged to resist motion of the first deployable lift device when the control means has the second configuration.

30. A method for operating an aircraft wing system, comprising:

15 coupling first and second deployable lift devices of a wing with a drive link selectively coupled to first and second motors, the second motor being an alternate or backup motor that is arranged to provide power to the first and second deployable lift devices in the event the first motor is unable to do so, the first and second deployable lift devices being located at different spanwise locations of the wing;

moving the first and second deployable lift devices together by activating the drive link;

25 decoupling the second deployable lift device from the drive link; and

30 moving the first deployable lift device relative to the second deployable lift device by activating the drive link while the second deployable lift device is decoupled from the drive link.

31. The method of claim **30** wherein moving the first deployable lift device relative to the second deployable lift device includes moving the first deployable lift device in a different direction than the second deployable lift device.
- 5 32. The method of claim **30** wherein moving the first deployable lift device relative to the second deployable lift device includes moving the first deployable lift device at a different rate than the second deployable lift device.
- 10 33. The method of claim **30** wherein moving the first deployable lift device relative to the second deployable lift device includes moving the first deployable lift device while the second deployable lift device is at least approximately fixed relative to the wing.
34. The method of claim **30**, further comprising:
- 15 coupling the second deployable lift device to the drive link;
- decoupling the first deployable lift device from the drive link; and
- moving the second deployable lift device relative to the first
20 deployable lift device by activating the drive link while the first
 deployable lift device is decoupled from the drive link.
- 25 35. The method of claim **30**, further comprising limiting a range of motion of the first deployable lift device to have first value when moving the first and second deployable lift devices together, and limiting the range of motion of the first deployable lift device to have a second value less than the first value when moving the first deployable lift device relative to the second deployable lift device.

36. The method of claim 30 wherein activating the drive link includes activating a mechanical drive shaft.
37. The method of claim 30 wherein moving the first deployable lift device includes moving a first deployable lift device that is inboard of the second deployable lift device.
38. The method of claim 30 wherein moving the first deployable lift device includes moving a first deployable lift device that is outboard of the second deployable lift device.
39. The method of claim 30 wherein activating the drive link includes activating a hydraulic link.
40. The method of claim 30 wherein moving the first deployable lift device relative to the second deployable lift device includes providing the wing with a first camber at a section of the wing aligned with the first deployable lift device, and providing the wing with a second camber different than the first camber at a section of the wing aligned with the second deployable lift device.
41. The method of claim 30 wherein moving the first and second deployable lift devices together includes moving the first and second deployable lift devices with the first motor, and wherein moving the first deployable lift device relative to the second deployable lift device includes moving the first deployable lift device with the second motor.
42. The method of claim 30 wherein moving the first and second deployable lift devices together includes moving the first and second deployable lift devices while a differential that is operatively coupled to the first and second deployable lift devices has a first setting, and wherein moving the first deployable lift device relative to the second

deployable lift device includes moving the first deployable lift device while the differential has a second setting different than the first setting.

5 **43.** A computer-readable medium encoded with codes for directing a programmable computer in the aircraft wing system of any one of claims **30** to **42** to execute the methods of any one of claims **30** to **42**.

44. A method for operating an aircraft wing system, comprising:

10 coupling first and second deployable lift devices of wing to a rotatable drive shaft, which is selectively coupleable to first and second motors, the second motor being an alternate or backup motor that is arranged to provide power to the first and second deployable lift devices in the event the first motor is unable to do so, the first and second deployable lift devices being located at different spanwise locations of the wing;

15 moving the first and second deployable lift devices together during low speed aircraft operations by rotating the drive shaft while both the first and second deployable lift devices are coupled to the drive shaft;

20 controlling a spanwise camber distribution of the wing during high speed aircraft operations by:

 decoupling the second deployable lift device from the drive shaft; and

25 moving the first deployable lift device independently of the second deployable lift device by rotating the drive shaft while the second deployable lift device is decoupled from the drive shaft;

30

wherein when moving the first deployable lift device independently of the second deployable lift device, the drive shaft is selectively coupled to the second motor.

- 5 **45.** The method of claim **44** wherein controlling a spanwise camber distribution further includes:

decoupling the first deployable lift device from the drive shaft and coupling the second deployable lift device with the drive shaft; and

- 10 moving the second deployable lift device independently of the first deployable lift device by rotating the drive shaft while the first deployable lift device is decoupled from the drive shaft.

- 15 **46.** The method of claim **44** wherein moving the first deployable lift device independently of the second deployable lift device includes moving the first deployable lift device in a different direction than the second deployable lift device.

- 20 **47.** The method of claim **44** wherein moving the first deployable lift device independently of the second deployable lift device includes moving the first deployable lift device at a different rate than the second deployable lift device.

- 48.** The method of claim **44** wherein moving the first deployable lift device independently of the second deployable lift device includes moving the first deployable lift device while the second deployable lift device is at least approximately fixed relative to the wing.

- 25 **49.** The method of claim **44**, further comprising limiting a range of motion of the first deployable lift device to have first value when moving the first and second deployable lift devices together, and limiting the range of

motion of the first deployable lift device to have a second value less than the first value when moving the first deployable lift device independently of the second deployable lift device.

50. The method of claim **44** wherein moving the first deployable lift device includes moving a first deployable lift device that is inboard of the second deployable lift device.
51. The method of claim **44** wherein moving the first deployable lift device includes moving a first deployable lift device that is outboard of the second deployable lift device.
52. The method of claim **44** wherein moving the first and second deployable lift devices together includes moving the first and second deployable lift devices with the first motor, and wherein moving the first deployable lift device independently of the second deployable lift device includes moving the first deployable lift device with the second motor.
53. The method of claim **44** wherein moving the first and second deployable lift devices together includes moving the first and second deployable lift devices while a differential that is operatively coupled to the first and second deployable lift devices has a first setting, and wherein moving the first deployable lift device independently of the second deployable lift device includes moving the first deployable lift device while the differential has a second setting different than the first setting.
54. A computer-readable medium encoded with codes for directing a programmable computer in the aircraft wing system of any one of claims **44** to **53** to execute the methods of any one of claims **44** to **53**.

55. A method for outfitting an aircraft wing system, comprising

coupling a differential in a drive link between a first deployable lift device of an aircraft and a second deployable lift device of the aircraft; and

5

coupling a control system to the differential, wherein the control system has a first configuration for which activation of the drive link moves the first and second deployable high lift devices together, and a second configuration for which activation of the drive link moves the first deployable lift device relative to the second deployable lift device;

10

wherein the drive link is selectively coupleable to a first motor and a second motor, the second motor being an alternate or backup motor that is arranged to provide power to the first and second deployable lift devices in the event the first motor is unable to do so.

15

56. The method of claim **55**, further comprising coupling a range limiter to the differential to control a range of motion of the first deployable lift device to have a first value when the control system has the first configuration, and a second value less than the first value when the control system has the second configuration.

20

57. An aircraft wing system, comprising:

25

a wing having a leading edge and a trailing edge;

a first deployable lift device having a first spanwise location and being movable relative to the wing from a stowed position to at least one first deployed position;

30

a second deployable lift device having a second spanwise location different than the first and being movable relative to the wing from a stowed position to at least one second deployed position;

5

a drive system having a drive link operatively coupleable to both the first and the second deployable lift devices; and

10

a control system operatively coupled to the drive system, the control system having:

15

a first configuration for which the drive link is operatively coupled to the first and second deployable lift devices, and activation of at least a portion of the drive link moves the first and second deployable lift devices together;

20

a second configuration for which the drive link is operatively coupled to the first deployable lift device and operatively decoupled from the second deployable lift device, and activation of at least a portion of the drive link moves the first deployable lift device relative to the second deployable lift device; and

25

a third configuration for which the drive link is operatively coupled to the second deployable lift device and operatively decoupled from the first deployable lift device, and wherein activation of at least a portion of the drive link moves the second deployable lift device relative to the first deployable lift device, and wherein the drive link includes a drive shaft, and the drive system, includes a first motor, a second motor and a differential coupled among the drive shaft, the first deployable lift device, the

30

second deployable lift device, the first motor and the second motor, and wherein the control system includes:

5

a first brake operatively coupled to the differential and engaged to move the first and second deployable lift devices when the control system has the first configuration;

10

a second brake operatively coupled to the second deployable lift device and engaged to at least resist motion of the second deployable lift device when the control system has the second configuration; and

15

a third brake operatively coupled to the first deployable lift device and engaged to at least resist motion of the first deployable lift device when the control system has the third configuration; wherein

20

the first motor is operatively coupled to the first and second deployable lift devices and the second motor is operatively decoupled from the first and second deployable lift devices when the control system has the first configuration;

25

30

the second motor is operatively coupled to the first deployable lift device and the first motor is operatively decoupled from the first and second deployable lift devices when the control system has the second configuration; and

the second motor is operatively coupled to the second deployable lift device and the first motor is operatively decoupled from the first and second deployable lift devices when the control system has the third configuration.

5

58. The system of claim 57, further comprising a range limiter operatively coupled to the first and second deployable lift devices to provide a first range of motion when the control system has the first configuration, and provide a second range of motion less than the first range of motion when the control system has the second configuration.

10

59. The system of claim 57 wherein the drive link includes a mechanical drive shaft.

15

60. The system of claim 57 wherein the first deployable lift device is inboard of the second deployable lift device.

61. The system of claim 57 wherein the first deployable lift device is outboard of the second deployable lift device.

20

62. The system at claim 57, further comprising a fuselage coupled to the wing.

63. The system of claim 57 wherein the control system includes a computer having a computer-readable medium with instructions for changing between the first and second configurations.

25

64. An aircraft wing system, comprising:

30

a wing having a leading edge and a trailing edge;

5

a first deployable lift device positioned proximate to the wing leading edge or the wing trailing edge at a first spanwise location, the first deployable lift device being movable relative to the wing from a stowed position to at least one first deployed position;

10

a second deployable lift device positioned proximate to the wing leading edge or the wing trailing edge at a second spanwise location different than the first, the second deployable lift device being movable relative to the wing from a stowed position to at least one second deployed position;

15

a drive system having a drive link operatively coupleable to both the first and the second deployable lift devices; and

20

a control system operatively coupled to the drive link, the control system having:

a first configuration for which activation of at least a portion of the drive link moves the first and second deployable lift devices together;

25

a second configuration for which activation of at least a portion of the drive link moves the first deployable lift device relative to the second deployable lift device; and

30

a third configuration for which activation of at least a portion of the drive link moves the second deployable lift device relative to the first deployable lift device, wherein the drive link includes a drive shaft and wherein the drive system includes a first motor, a second motor, and differential coupled among the drive shaft, the first deployable lift device, the second deployable lift device,

the first motor and the second motor; and wherein the control system further includes:

5

a first brake operatively coupled to the differential and engaged to move the first and second deployable lift devices when the control system has the first configuration;

10

a second brake operatively coupled to the second deployable lift device and engaged to at least resist motion of the second deployable lift device when the control system has the second configuration; and

15

a third brake operatively coupled to the first deployable lift device and engaged to at least resist motion of the first deployable lift device when the control system has the third configuration; wherein

20

the first motor is operatively coupled to the first and second deployable lift devices and the second motor is operatively decoupled from the first and second deployable lift devices when the control system has the first configuration;

25

30

the second motor is operatively coupled to the first deployable lift device and the first motor is operatively decoupled from the first and second deployable lift devices when the control system has the second configuration; and

5

the second motor is operatively coupled to the second deployable lift device and the first motor is operatively decoupled from the first and second deployable lift devices when the control system has the third configuration.

10

65. The system of claim **64** wherein the drive link includes a mechanical drive shaft.

66. The system of claim **64** wherein the first deployable lift device is inboard of the second deployable lift device.

67. The system of claim **64** wherein the first deployable lift device is outboard of the second deployable lift device.

15

68. An aircraft wing system, comprising:

a wing having a leading edge and a trailing edge;

20

a first deployable lift device having a first spanwise location, the first deployable lift device being movable relative to the wing from a stowed position to at least one first deployed position;

25

a second deployable lift device having a second spanwise location different than the first, the second deployable lift device being movable relative to the wing from a stowed position to at least one second deployed position;

30

drive means having link means operatively coupleable to both the first and the second deployable lift devices;

and control means operatively coupled to the drive means, the control means having:

5 a first configuration for which the link means is operatively coupled to the first deployable lift device and activation of at least a portion of the link means moves the first and second deployable lift devices as a unit; and a

10 second configuration for which the link means is operatively coupled to the first deployable lift device and operatively decoupled from the second deployable lift device, and activation of at least a portion of the link means moves the first deployable lift device relative to the second deployable lift device, wherein the control means has a third configuration for which the link means is operatively coupled to the second deployable lift device and operatively decoupled from the first deployable lift device, and wherein activation of at least a portion of the link means moves the second deployable lift device relative to the first deployable lift device, and wherein the link means includes a drive shaft, and the drive means includes a first motor, a second motor, and a differential coupled among the drive shaft, the first deployable lift device, the second deployable lift device, the first motor and the second motor, and wherein the control means includes:

25 a first brake operatively coupled to the differential and engaged to move the first and second deployable lift devices when the control means has the first configuration;

30 a second brake operatively coupled to the second deployable lift device and engaged to at least resist motion of the second deployable lift device

when the control means has the second configuration; and

5 a third brake operatively coupled to the first deployable lift device and engaged to at least resist motion of the first deployable lift device when the control means has the third configuration; wherein

10 the first motor is operatively coupled to the first and second deployable lift devices and the second motor is operatively decoupled from the first and second deployable lift devices when the control means has the first configuration;

15 the second motor is operatively coupled to the first deployable lift device and the first motor is operatively decoupled from the first and second deployable lift devices when the control means has the second configuration; and

20

the second motor is operatively coupled to the second deployable lift device and the first motor is operatively decoupled from the first and second deployable lift devices when the control means has the third configuration.



25

69. The system of claim 68 wherein the first and second deployable lift devices have a first range of motion when the control means has the first configuration, and wherein the first deployable lift device has a second range of motion less than the first range of motion when the control means has the second configuration.



30

- 5
70. The system of claim 68 wherein the link means includes a mechanical drive shaft.
71. The system of claim 68 wherein the first deployable lift device is inboard of the second deployable lift device.
72. The system of claim 68 wherein the first deployable lift device is outboard of the second deployable lift device.

10

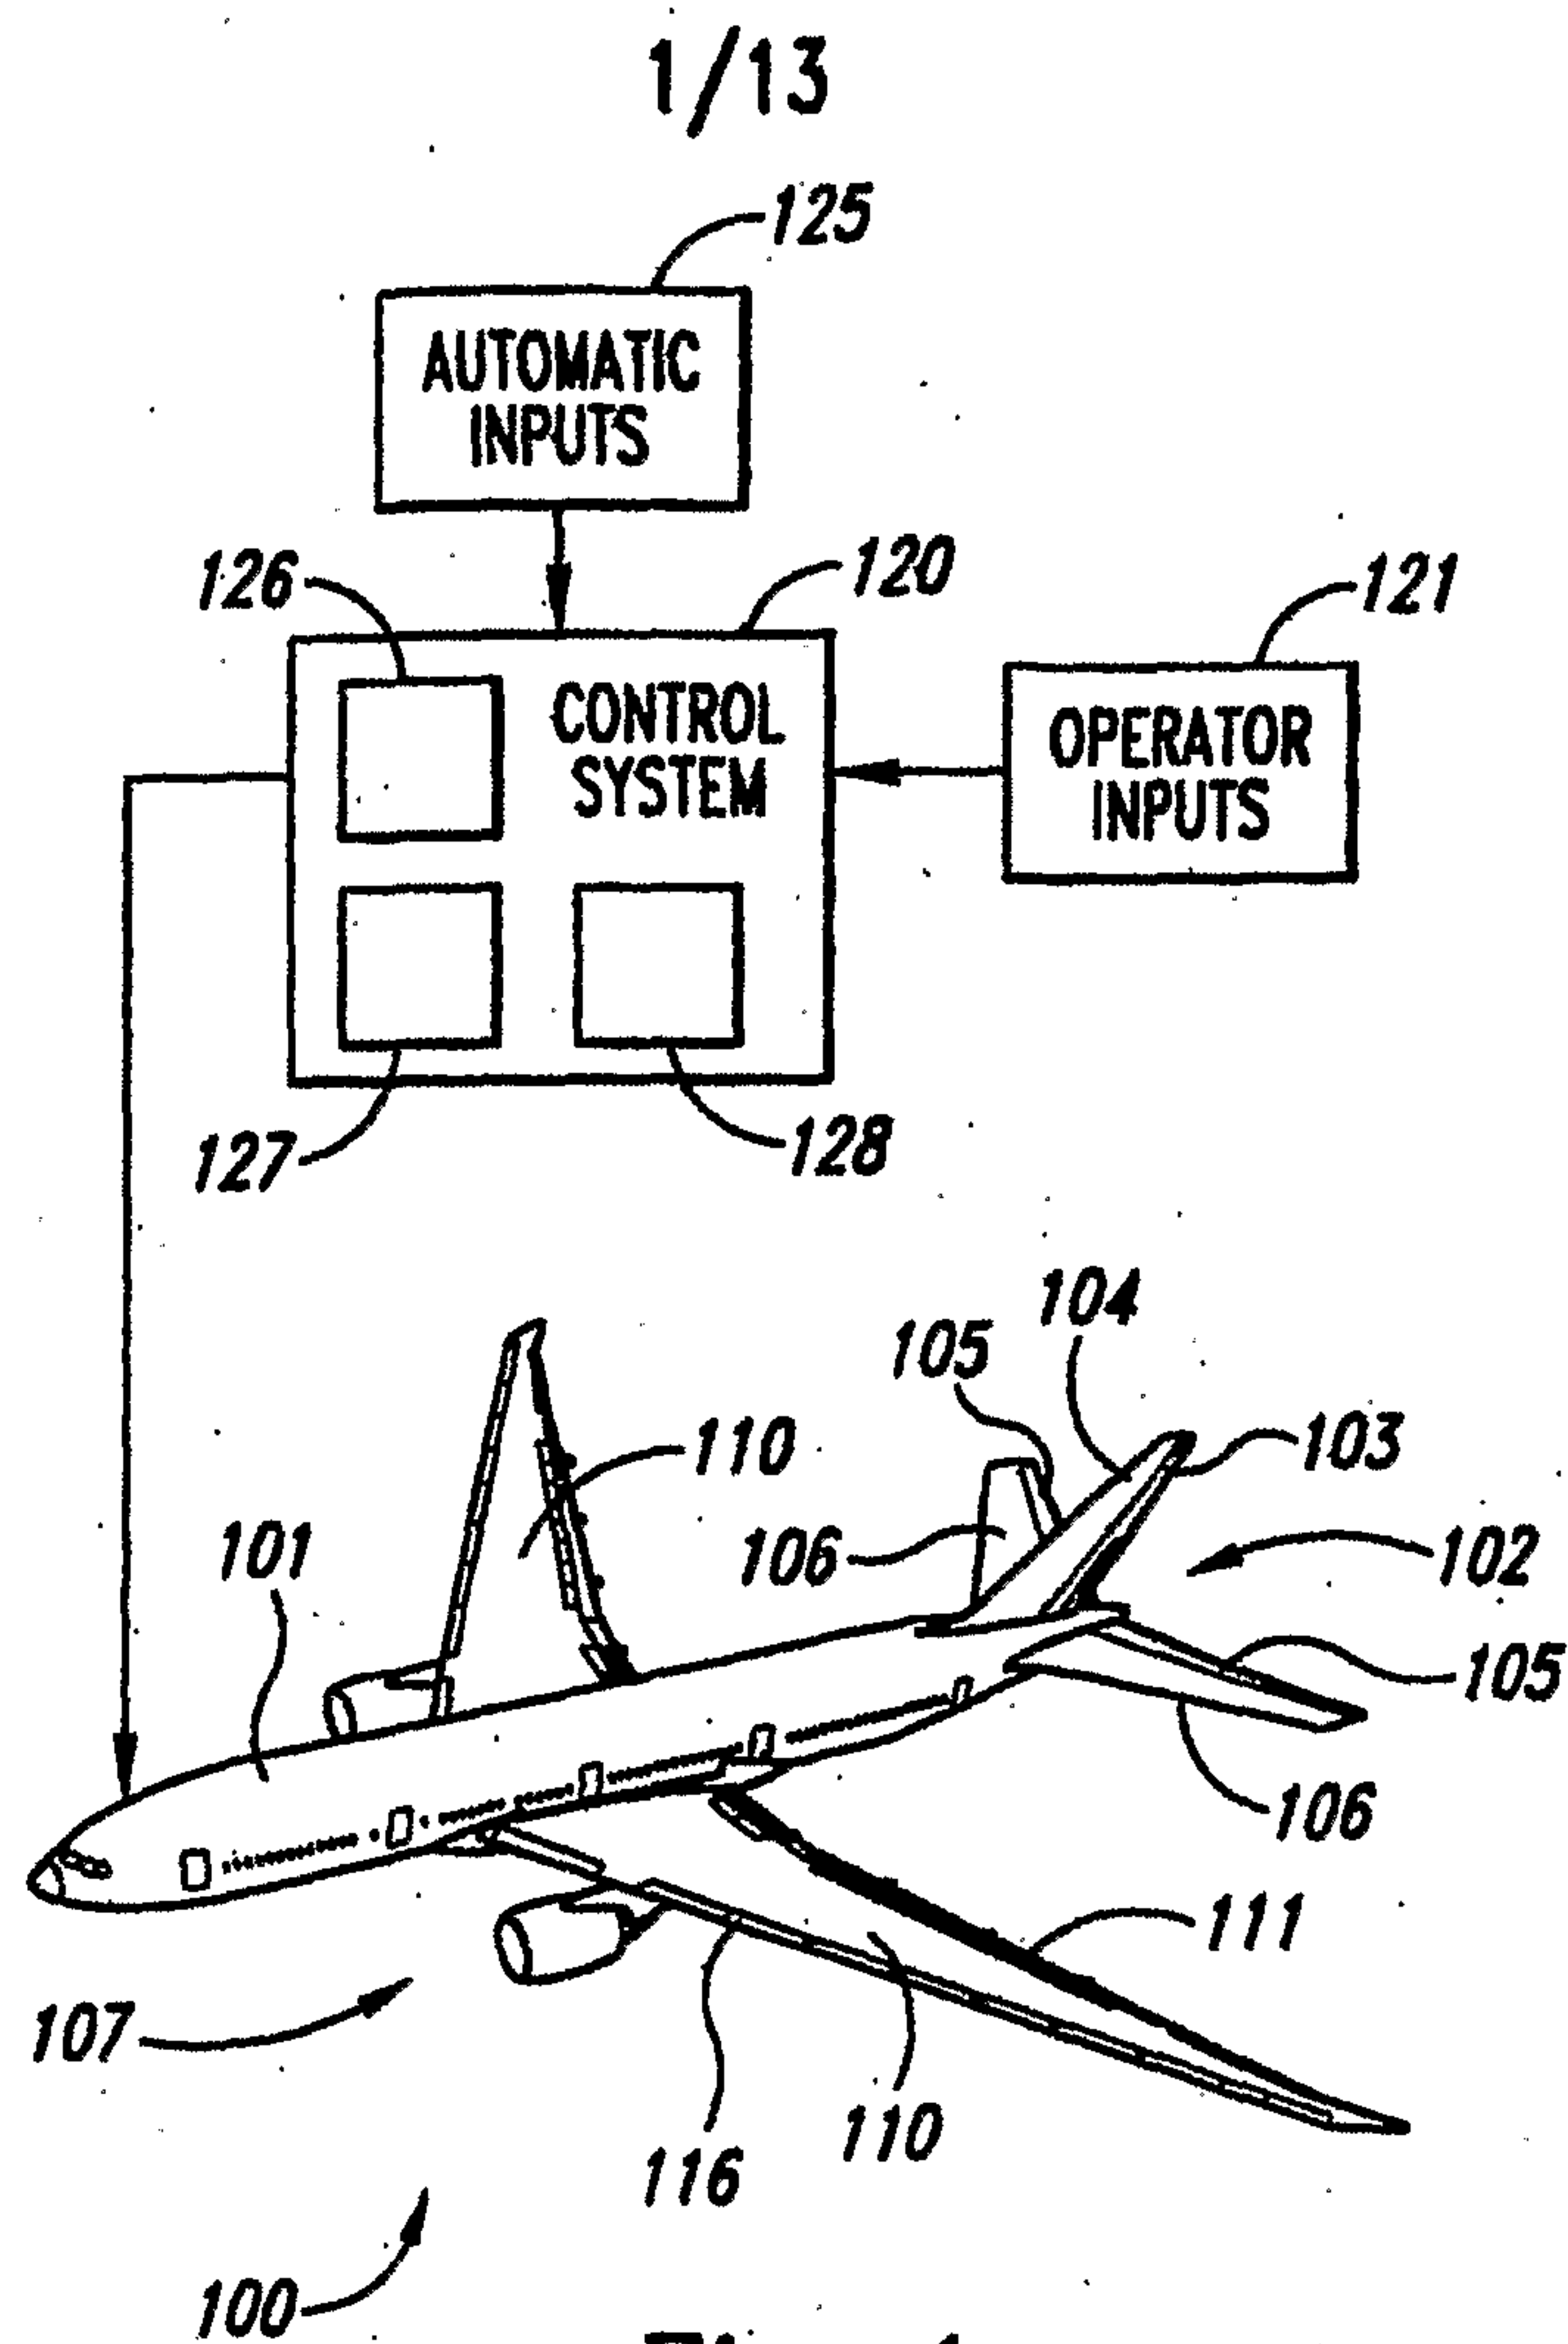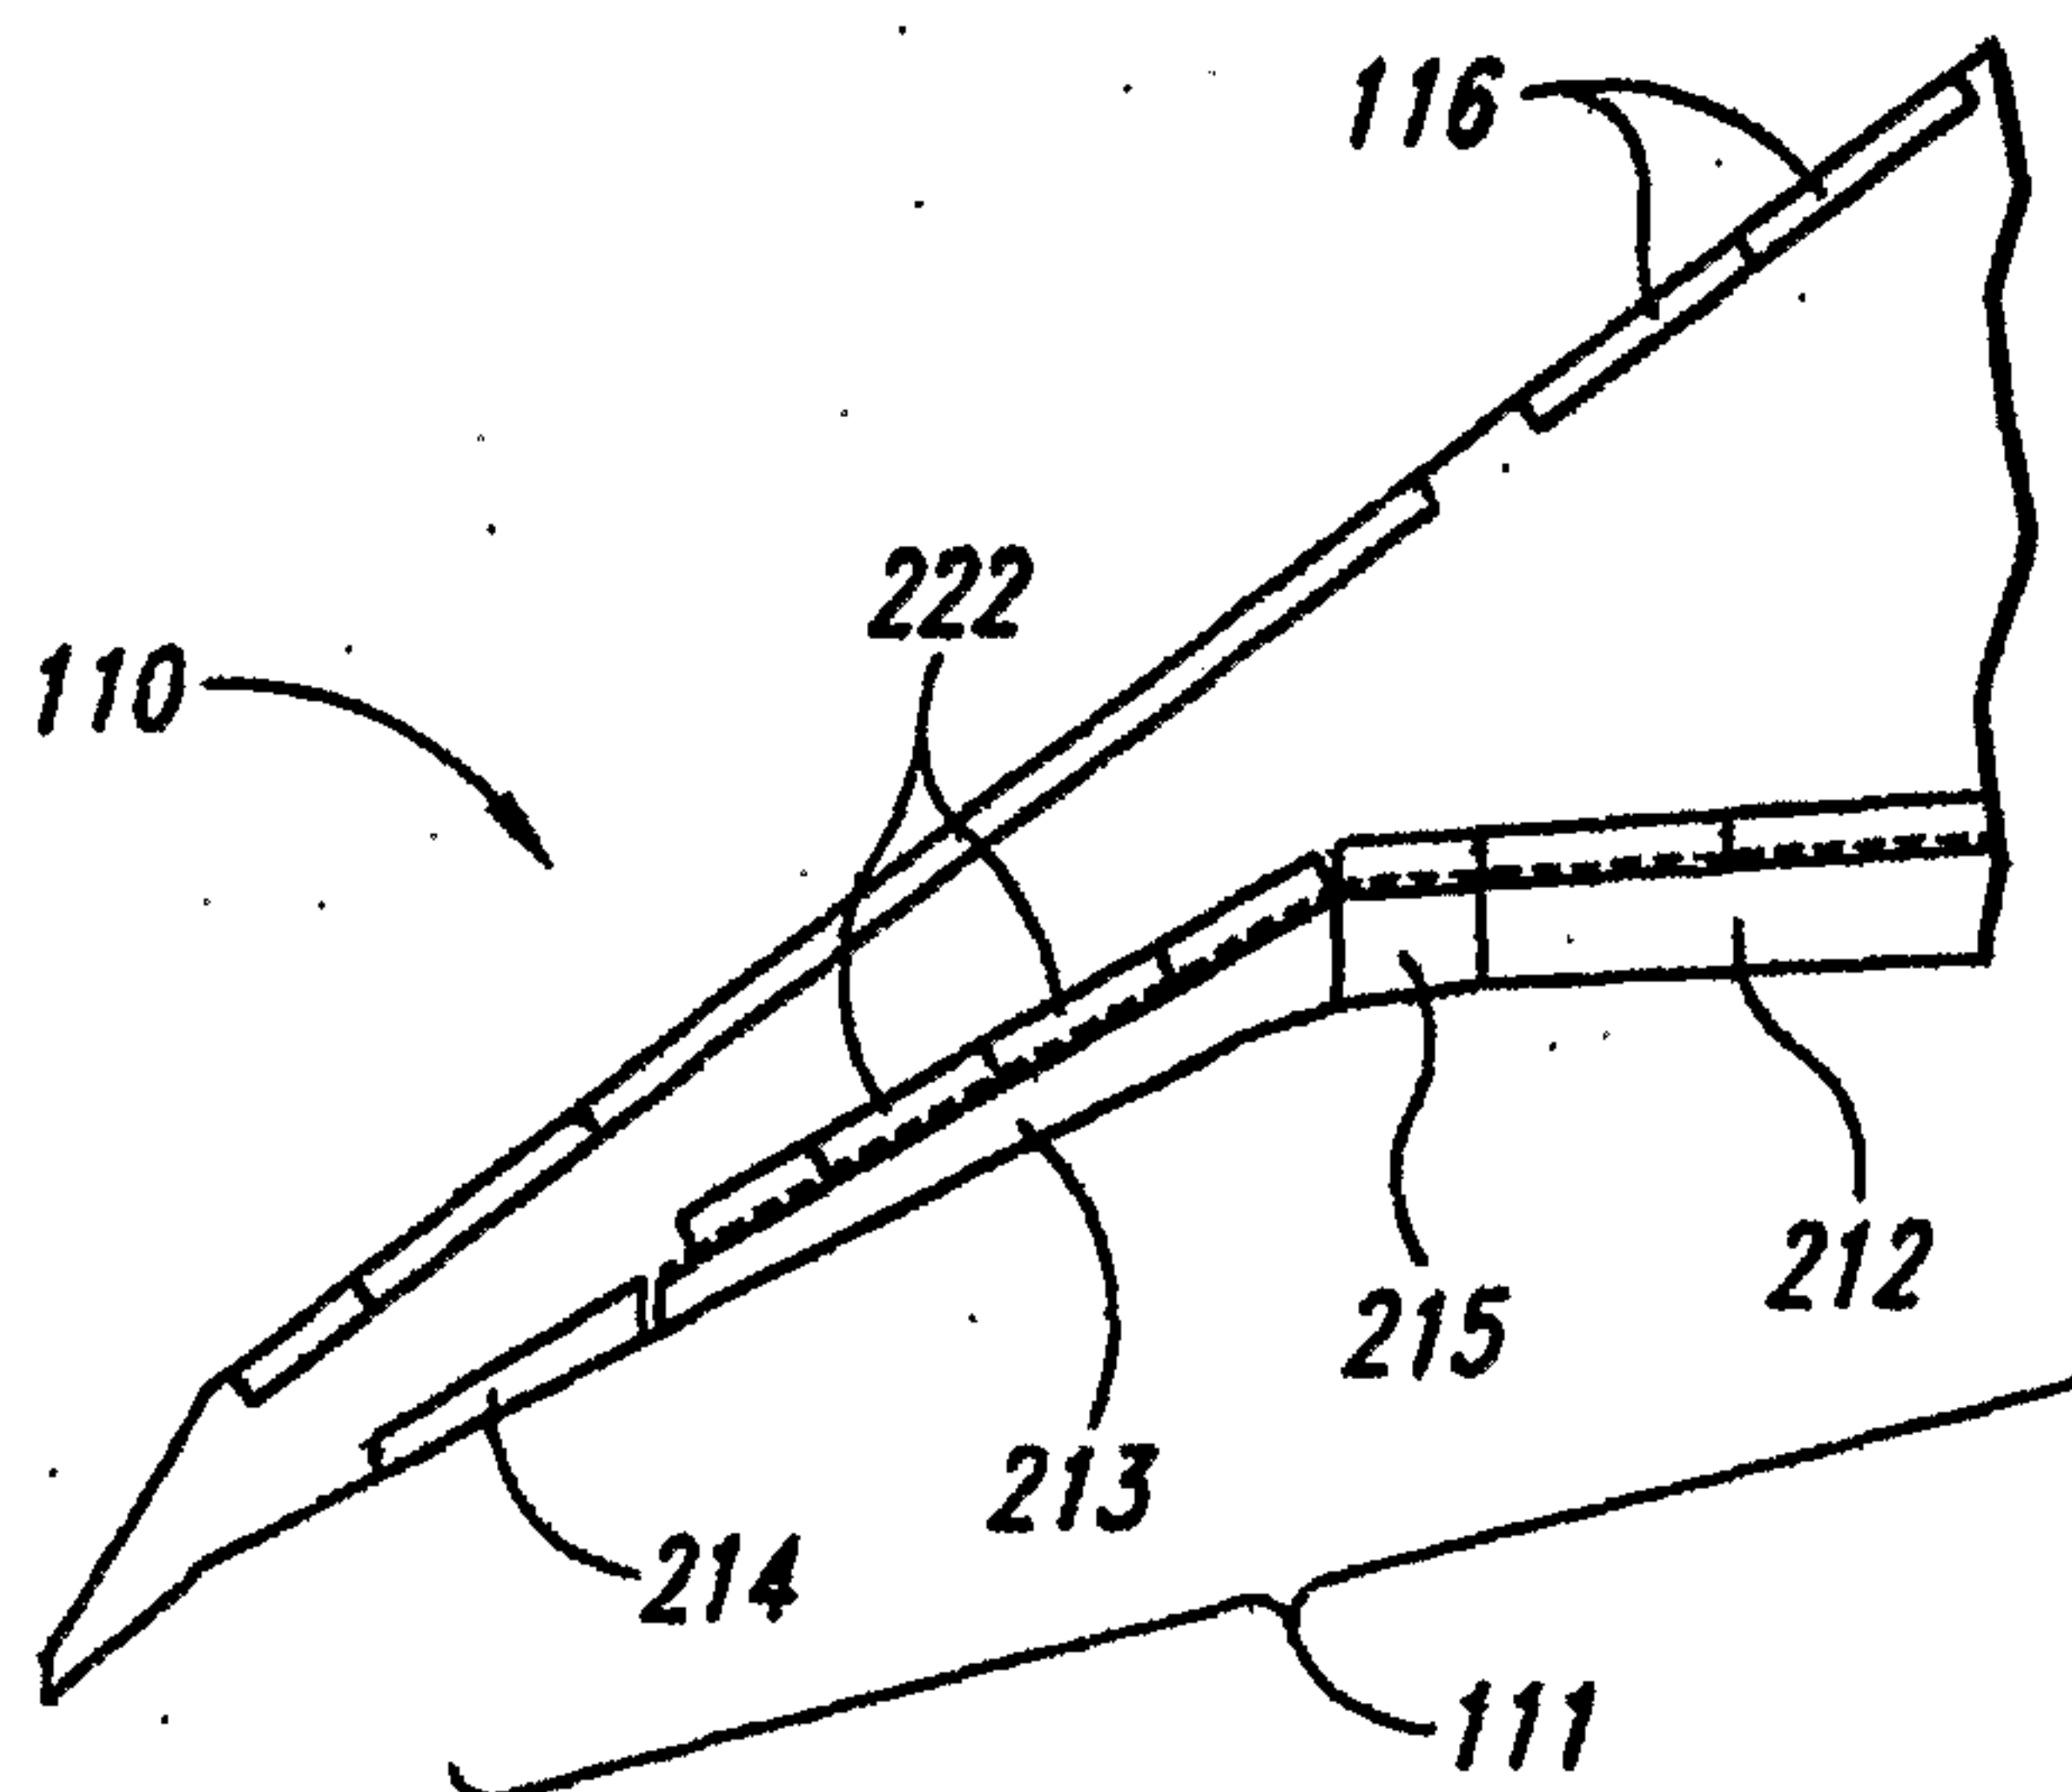*Fig. 1**Fig. 2A*

2/13

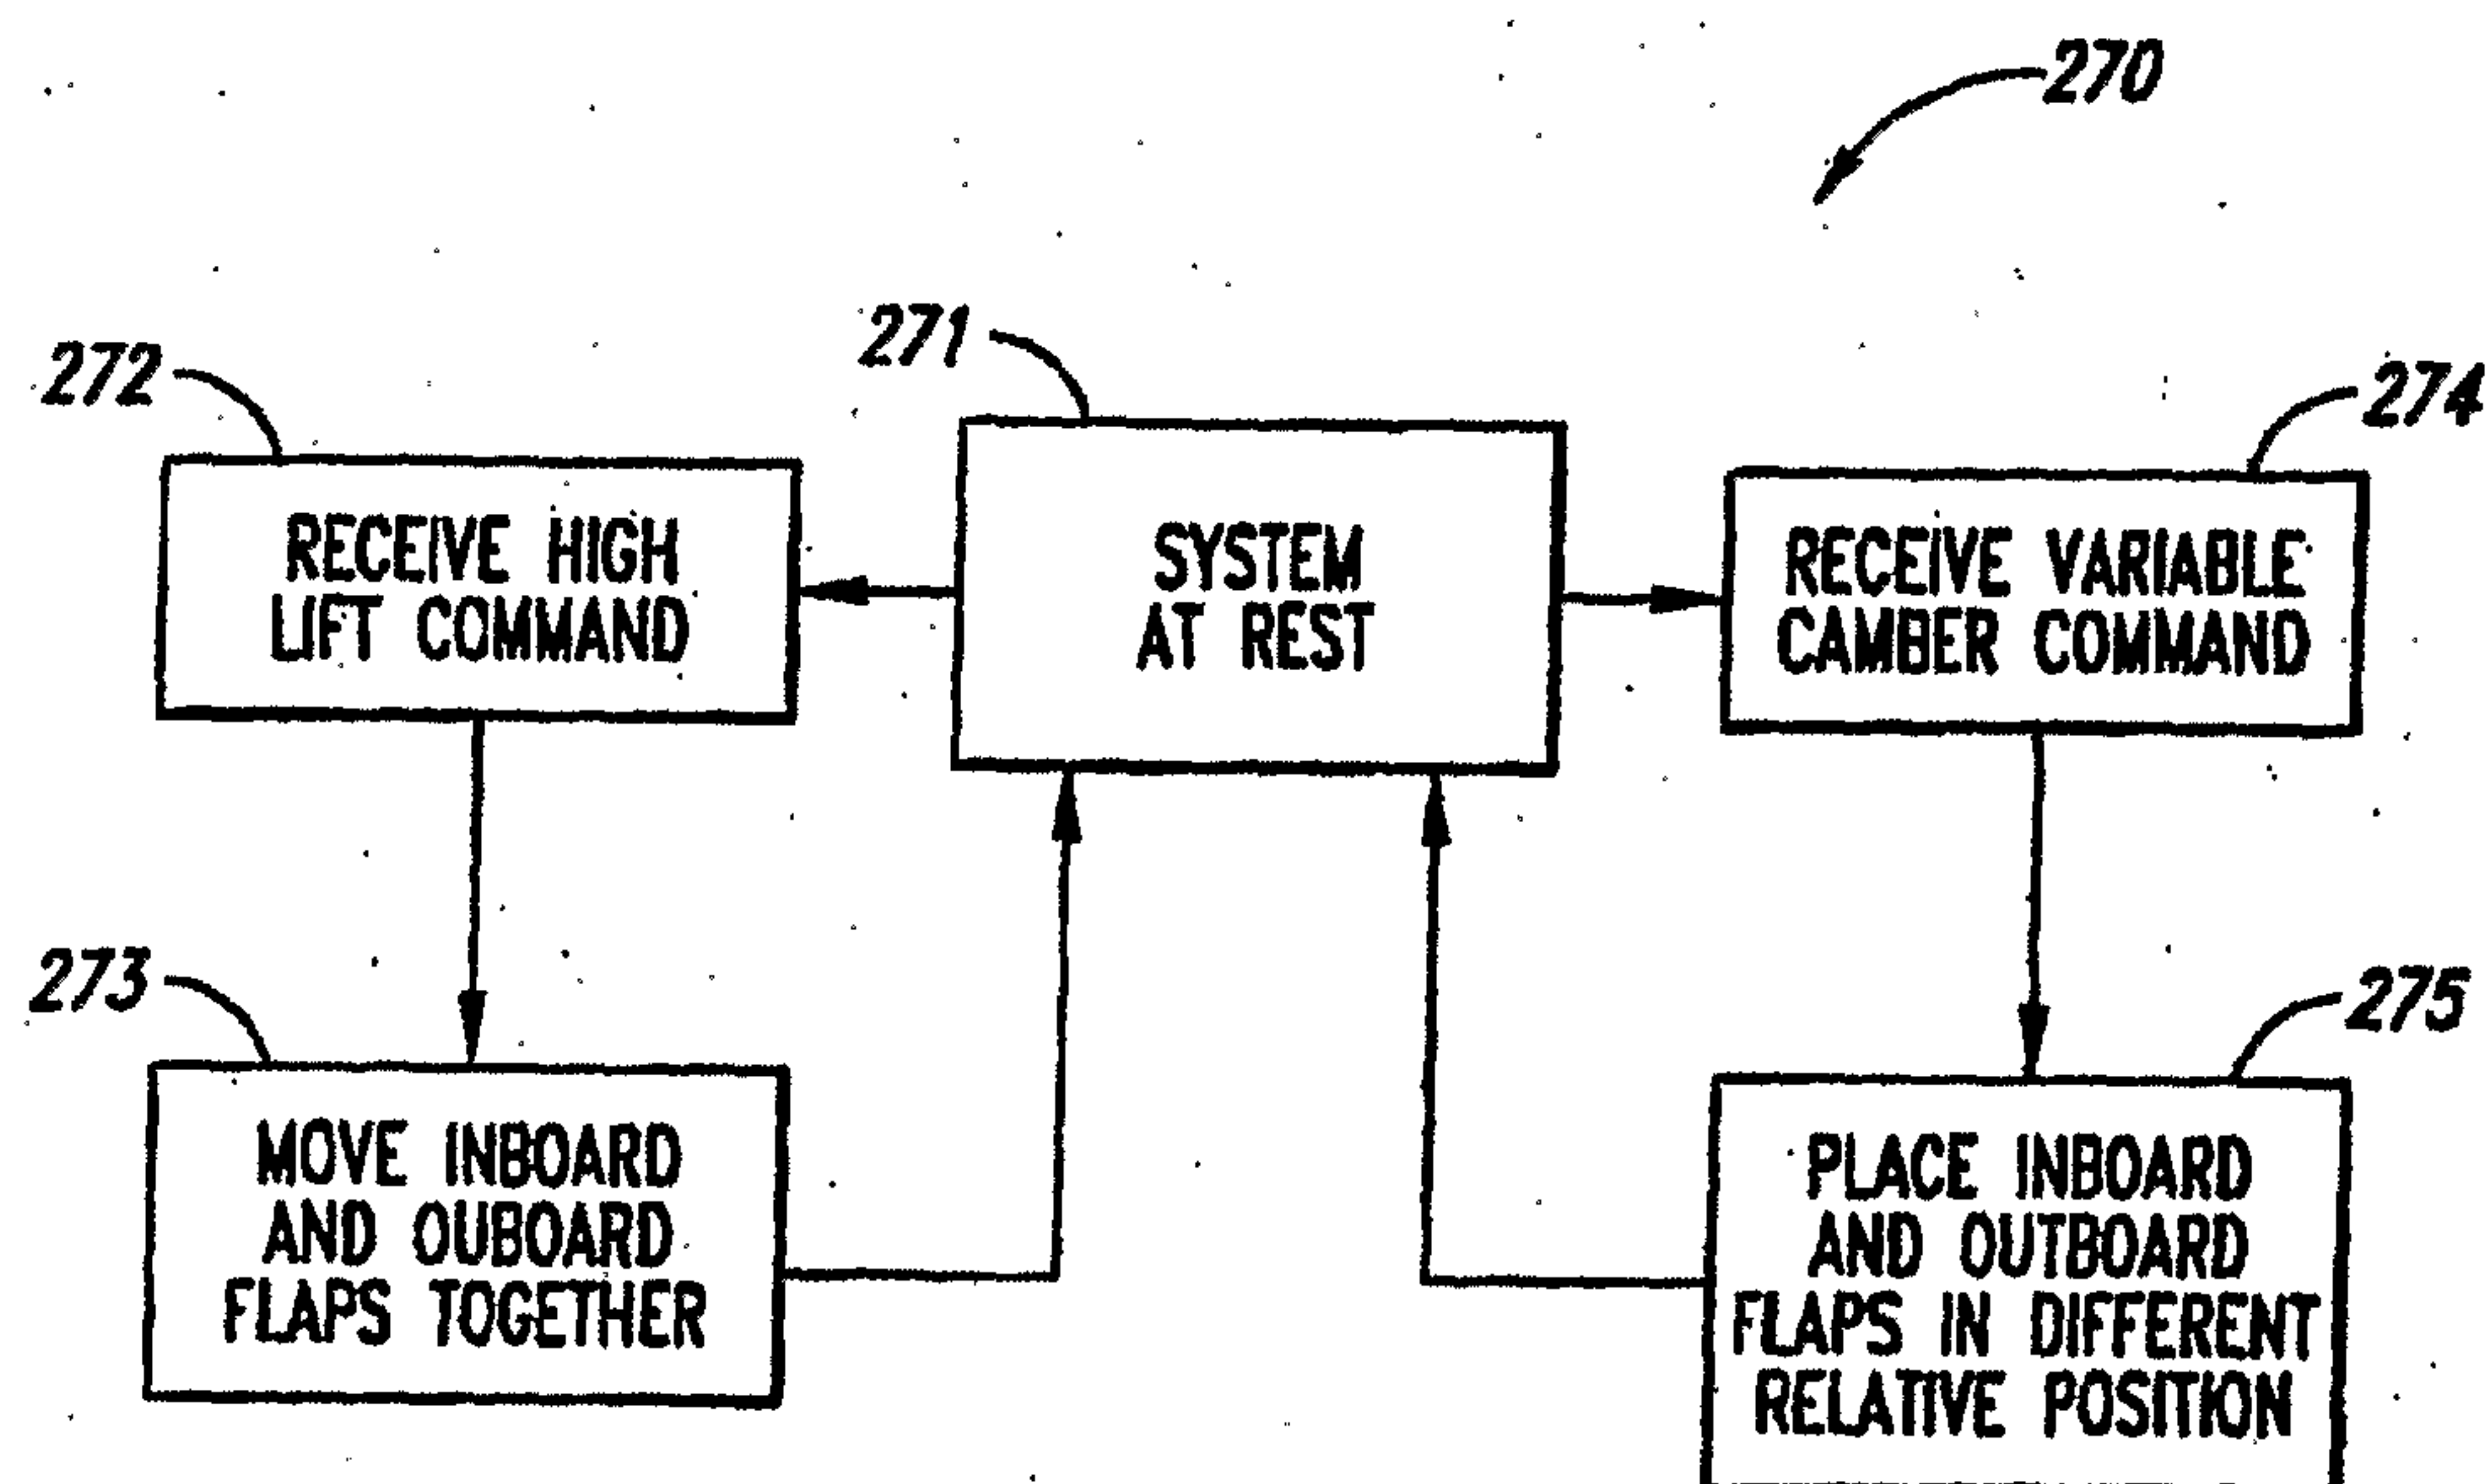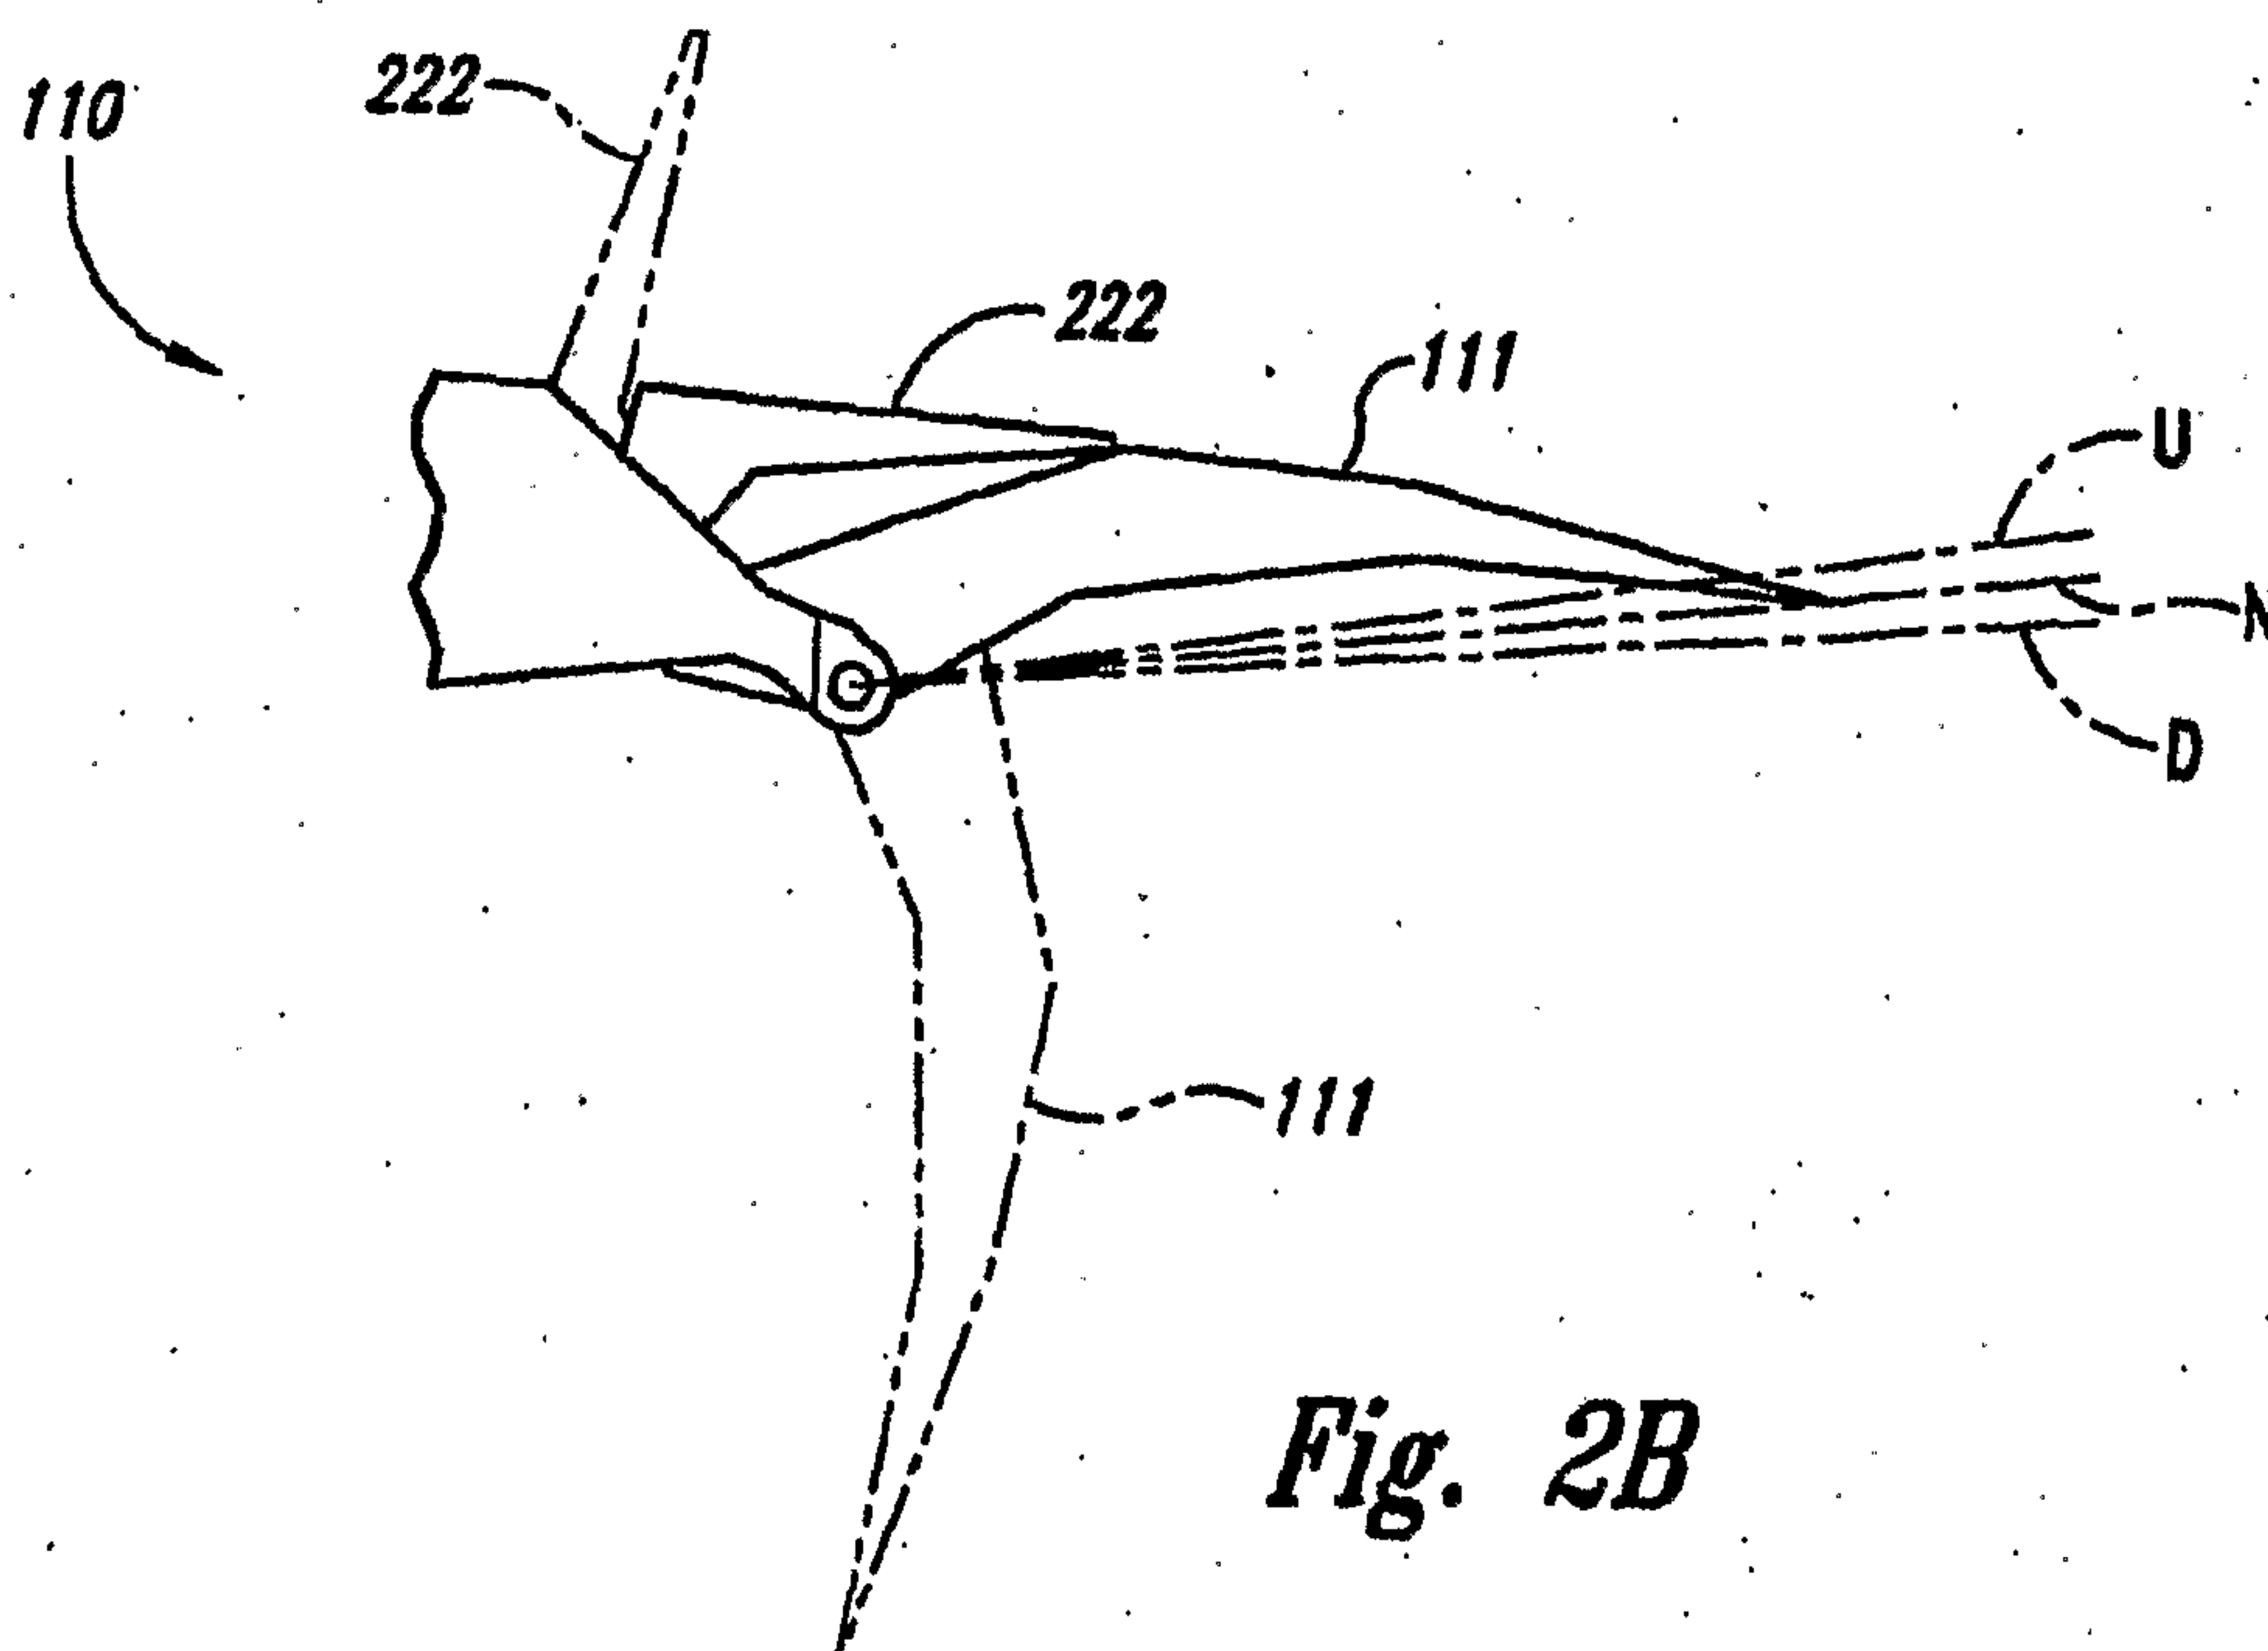

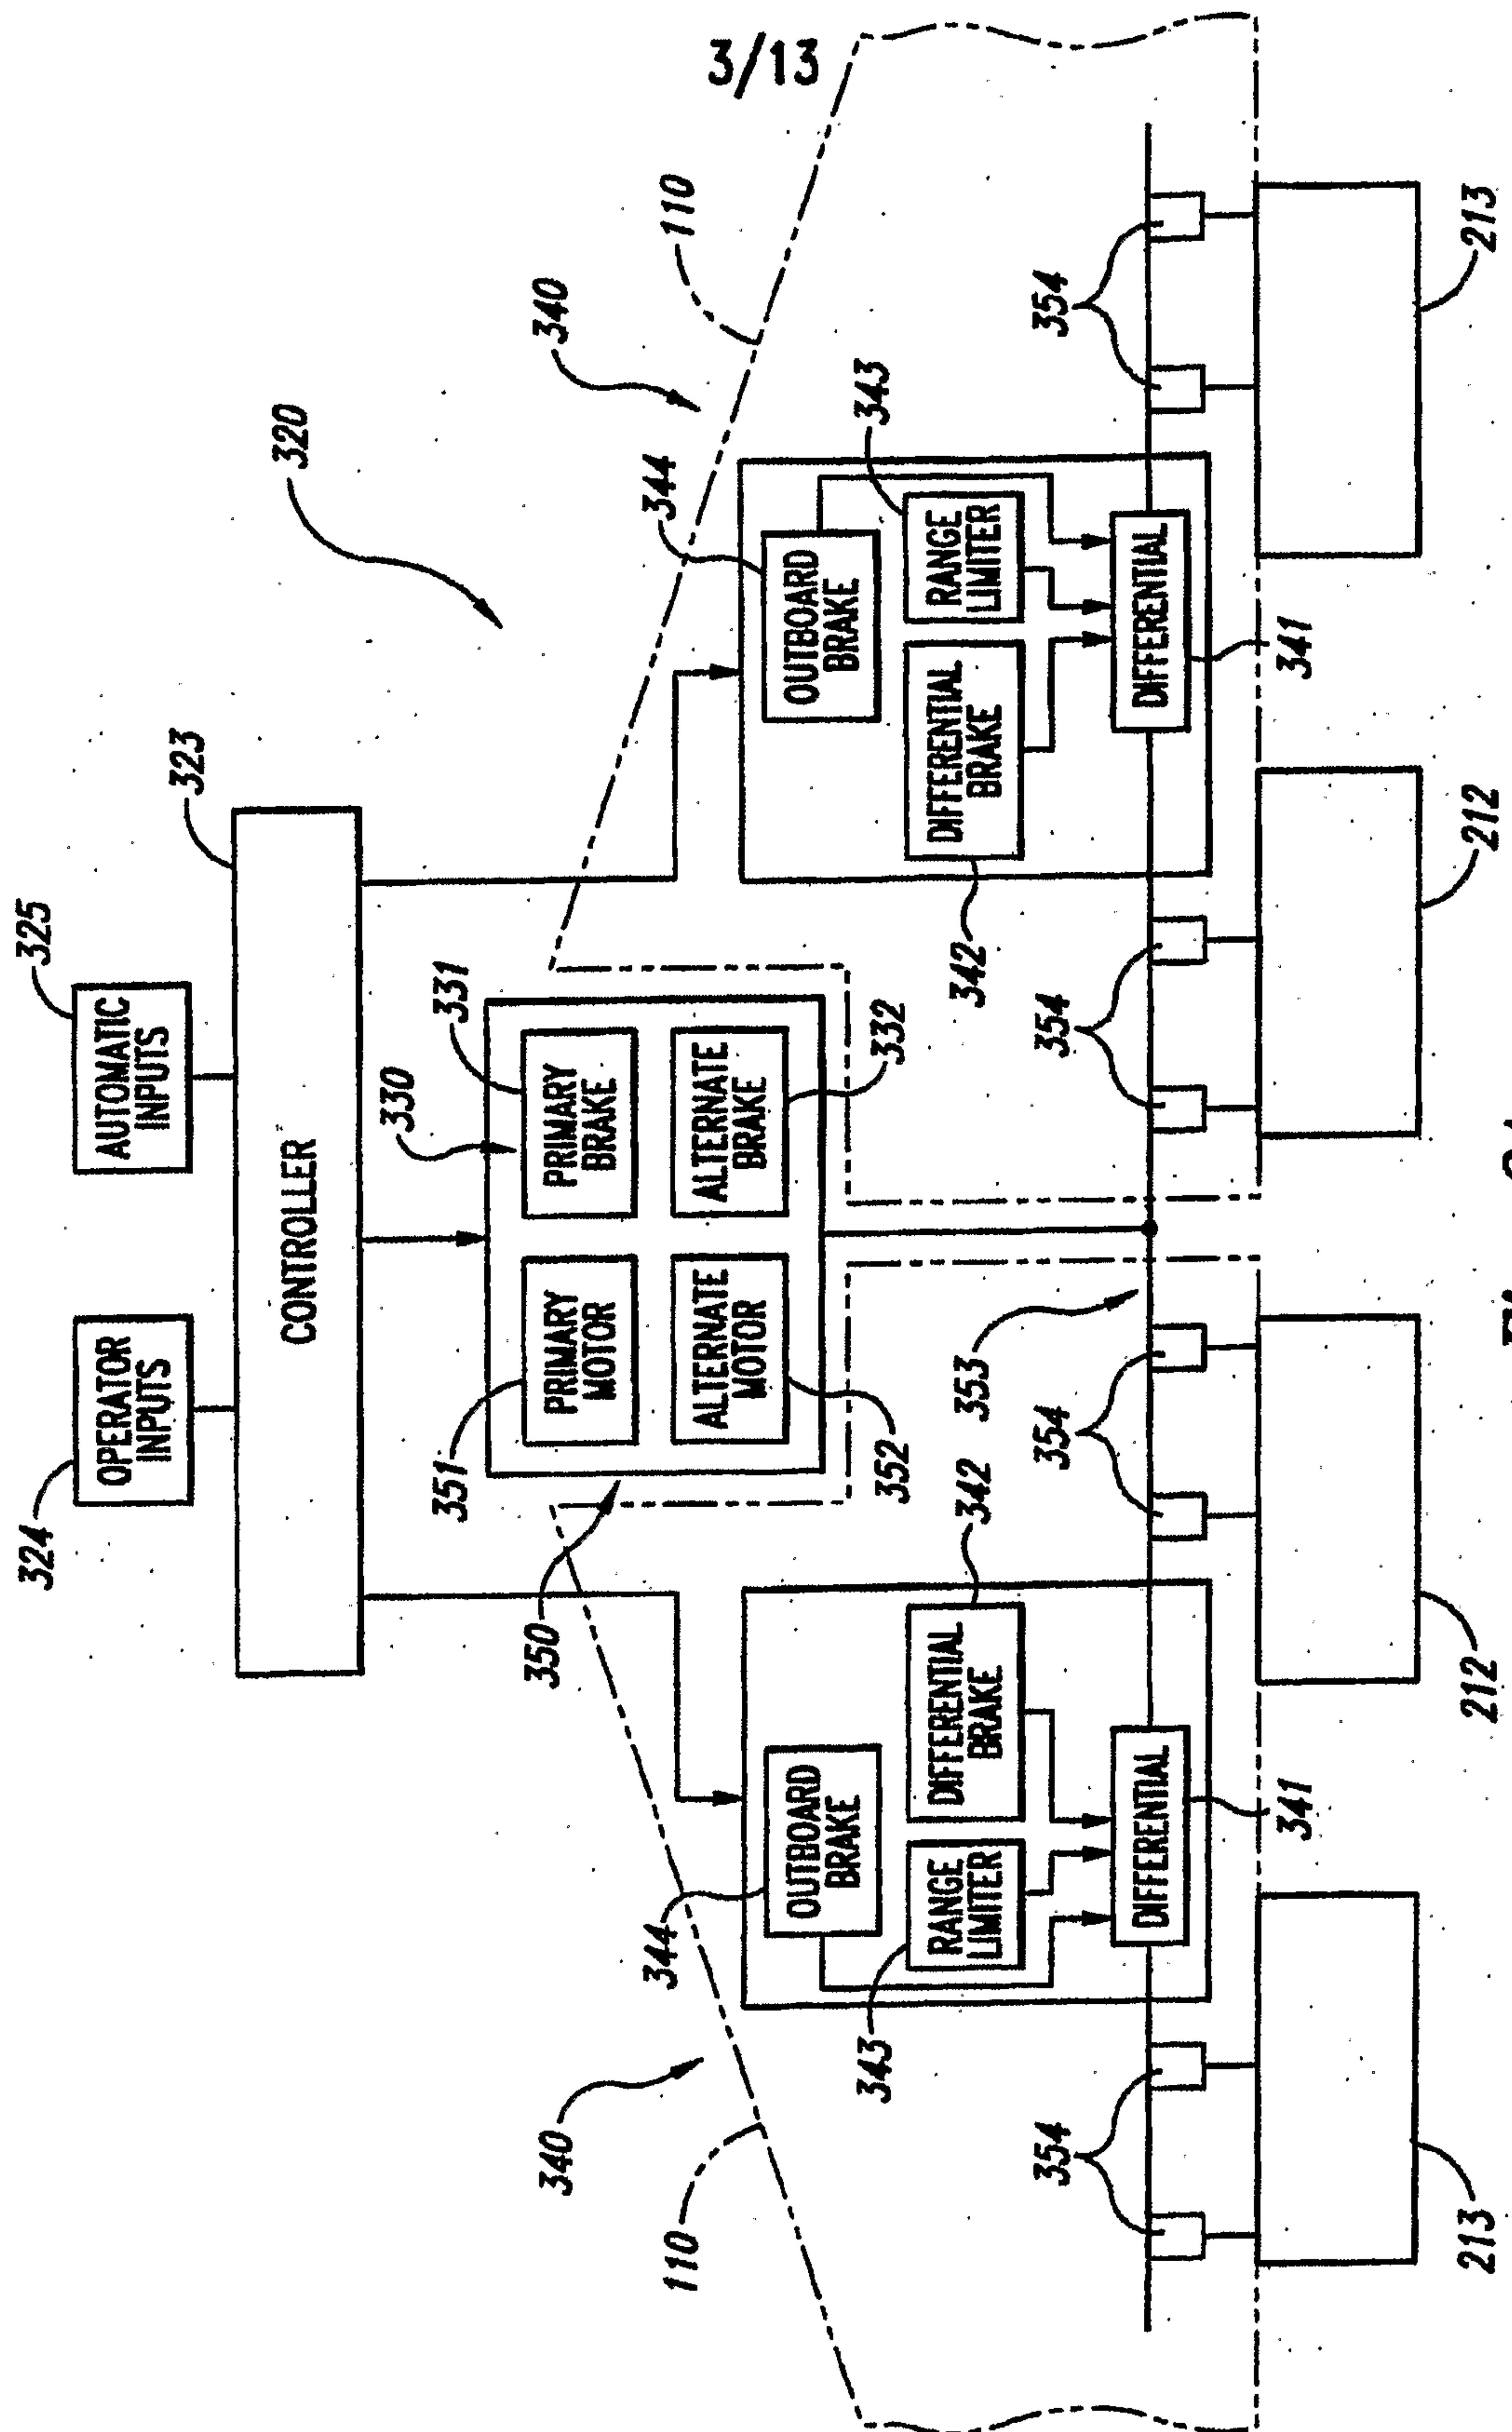


Fig. 3A

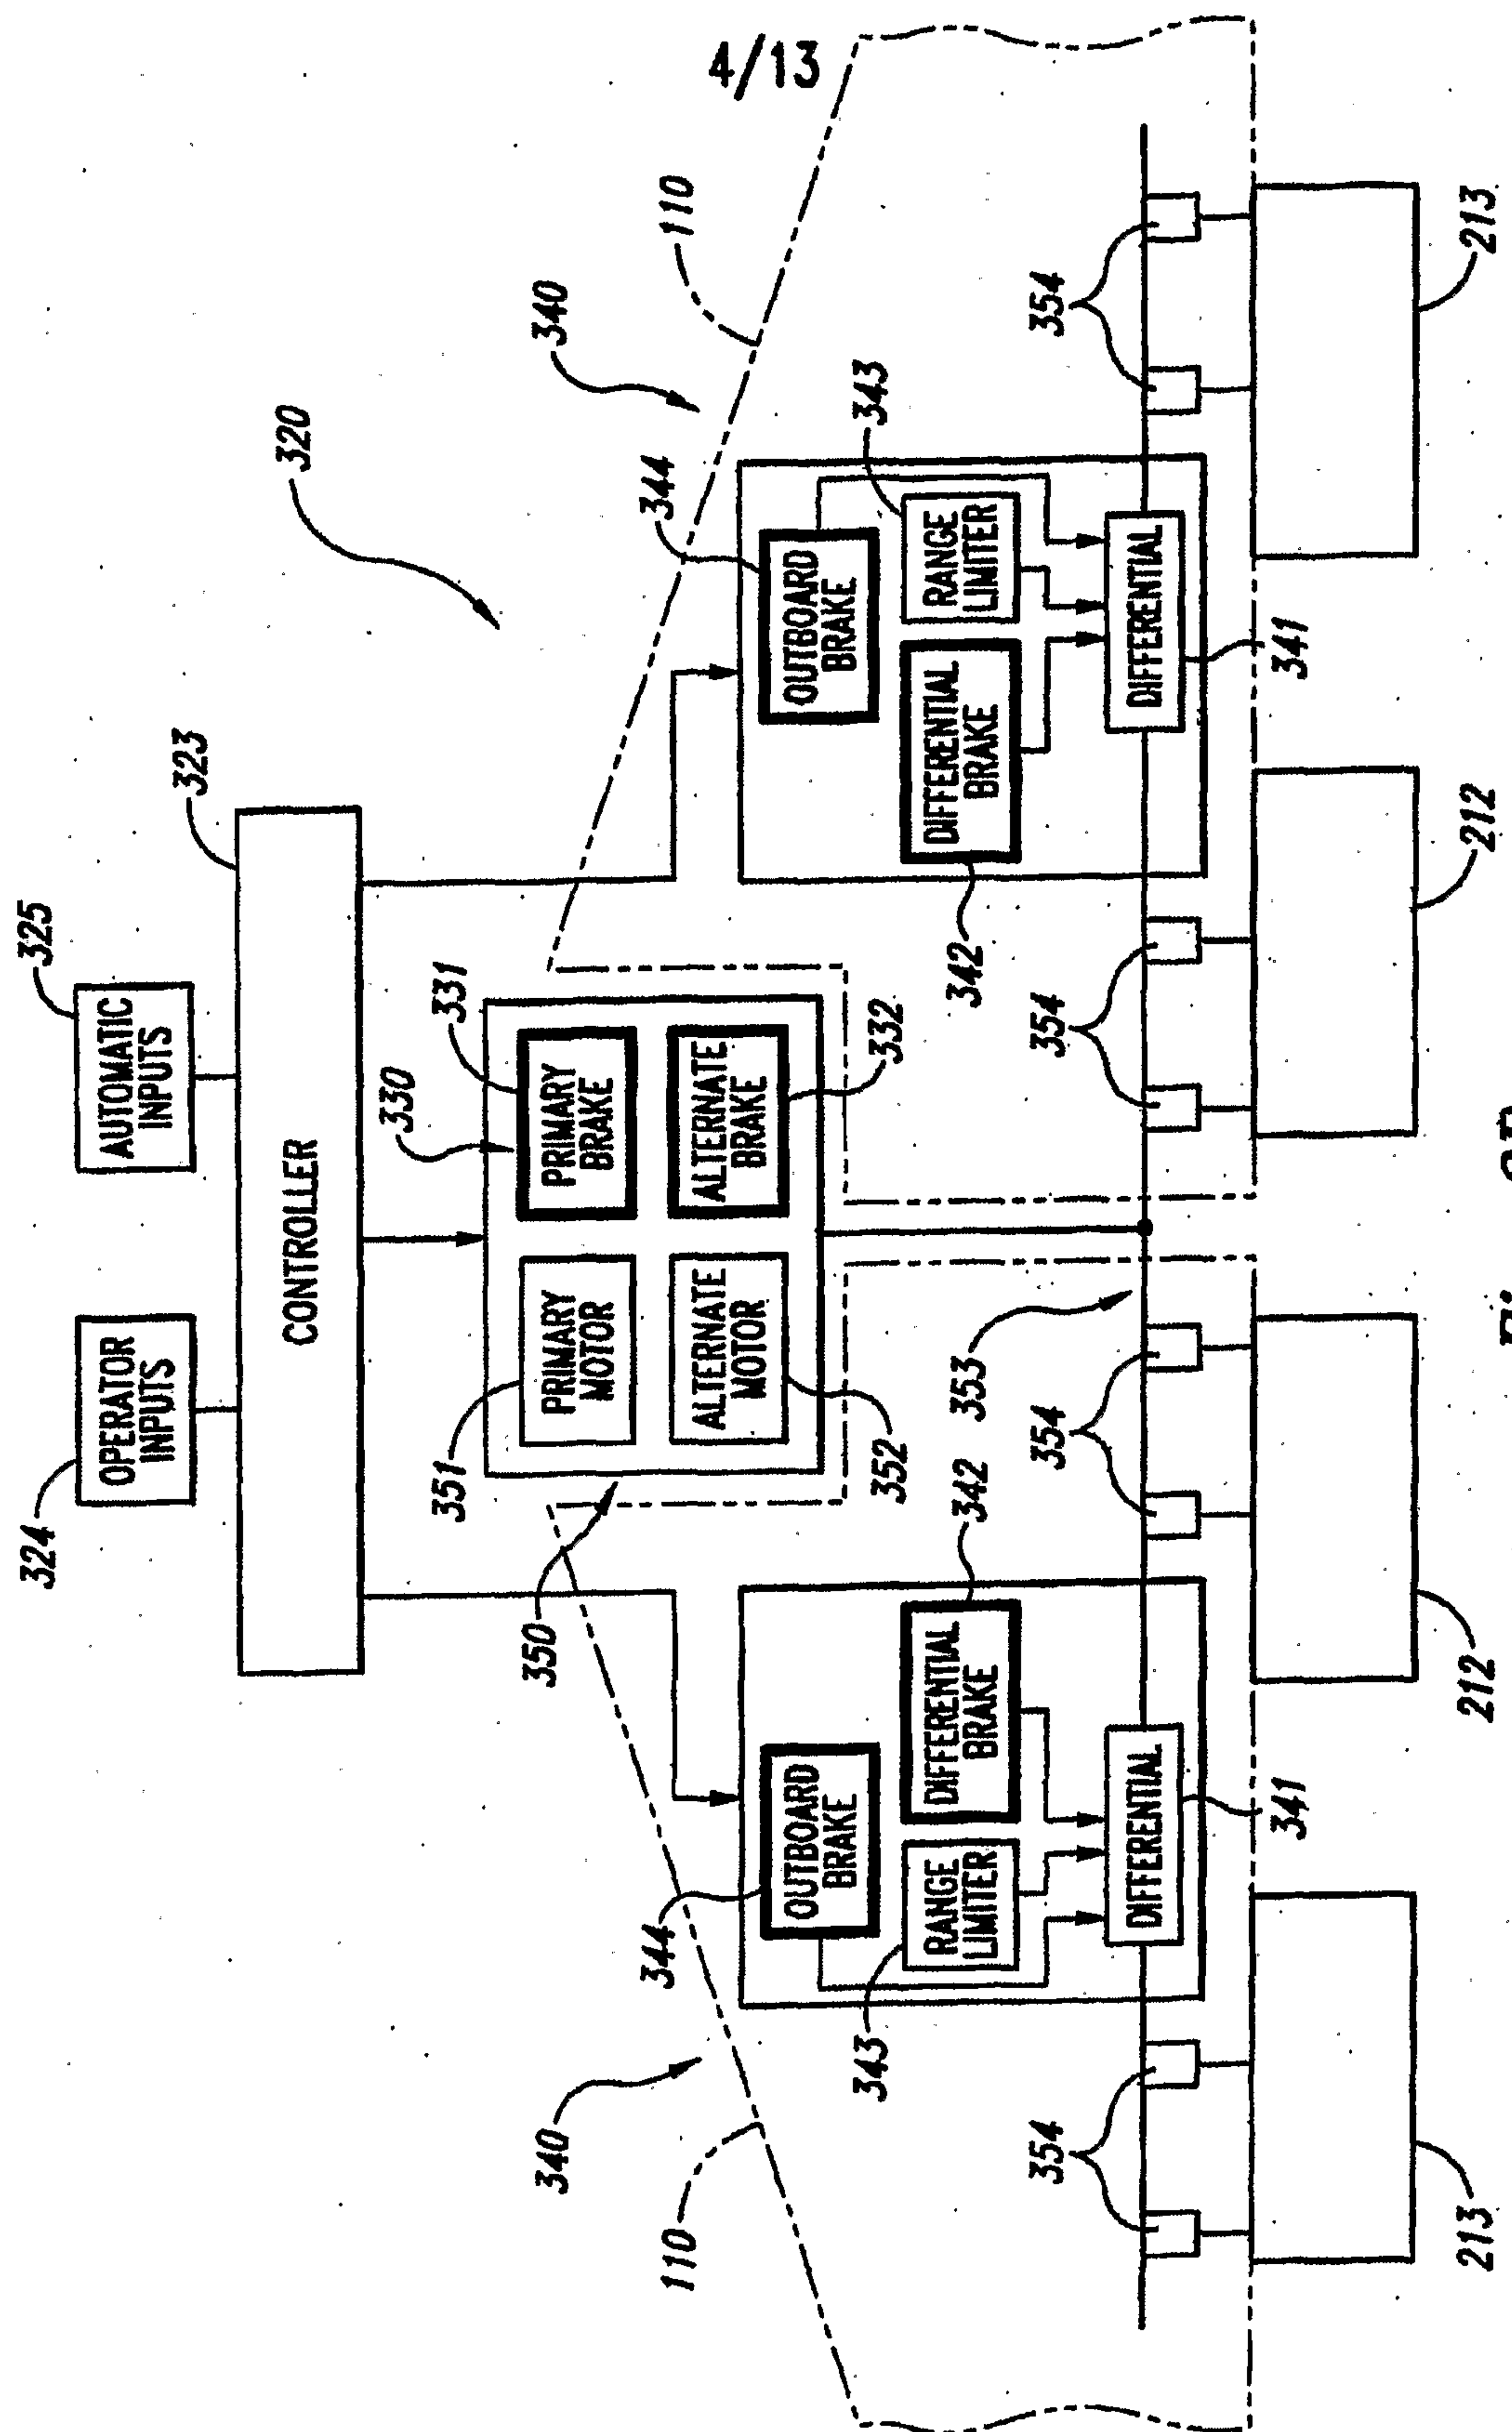
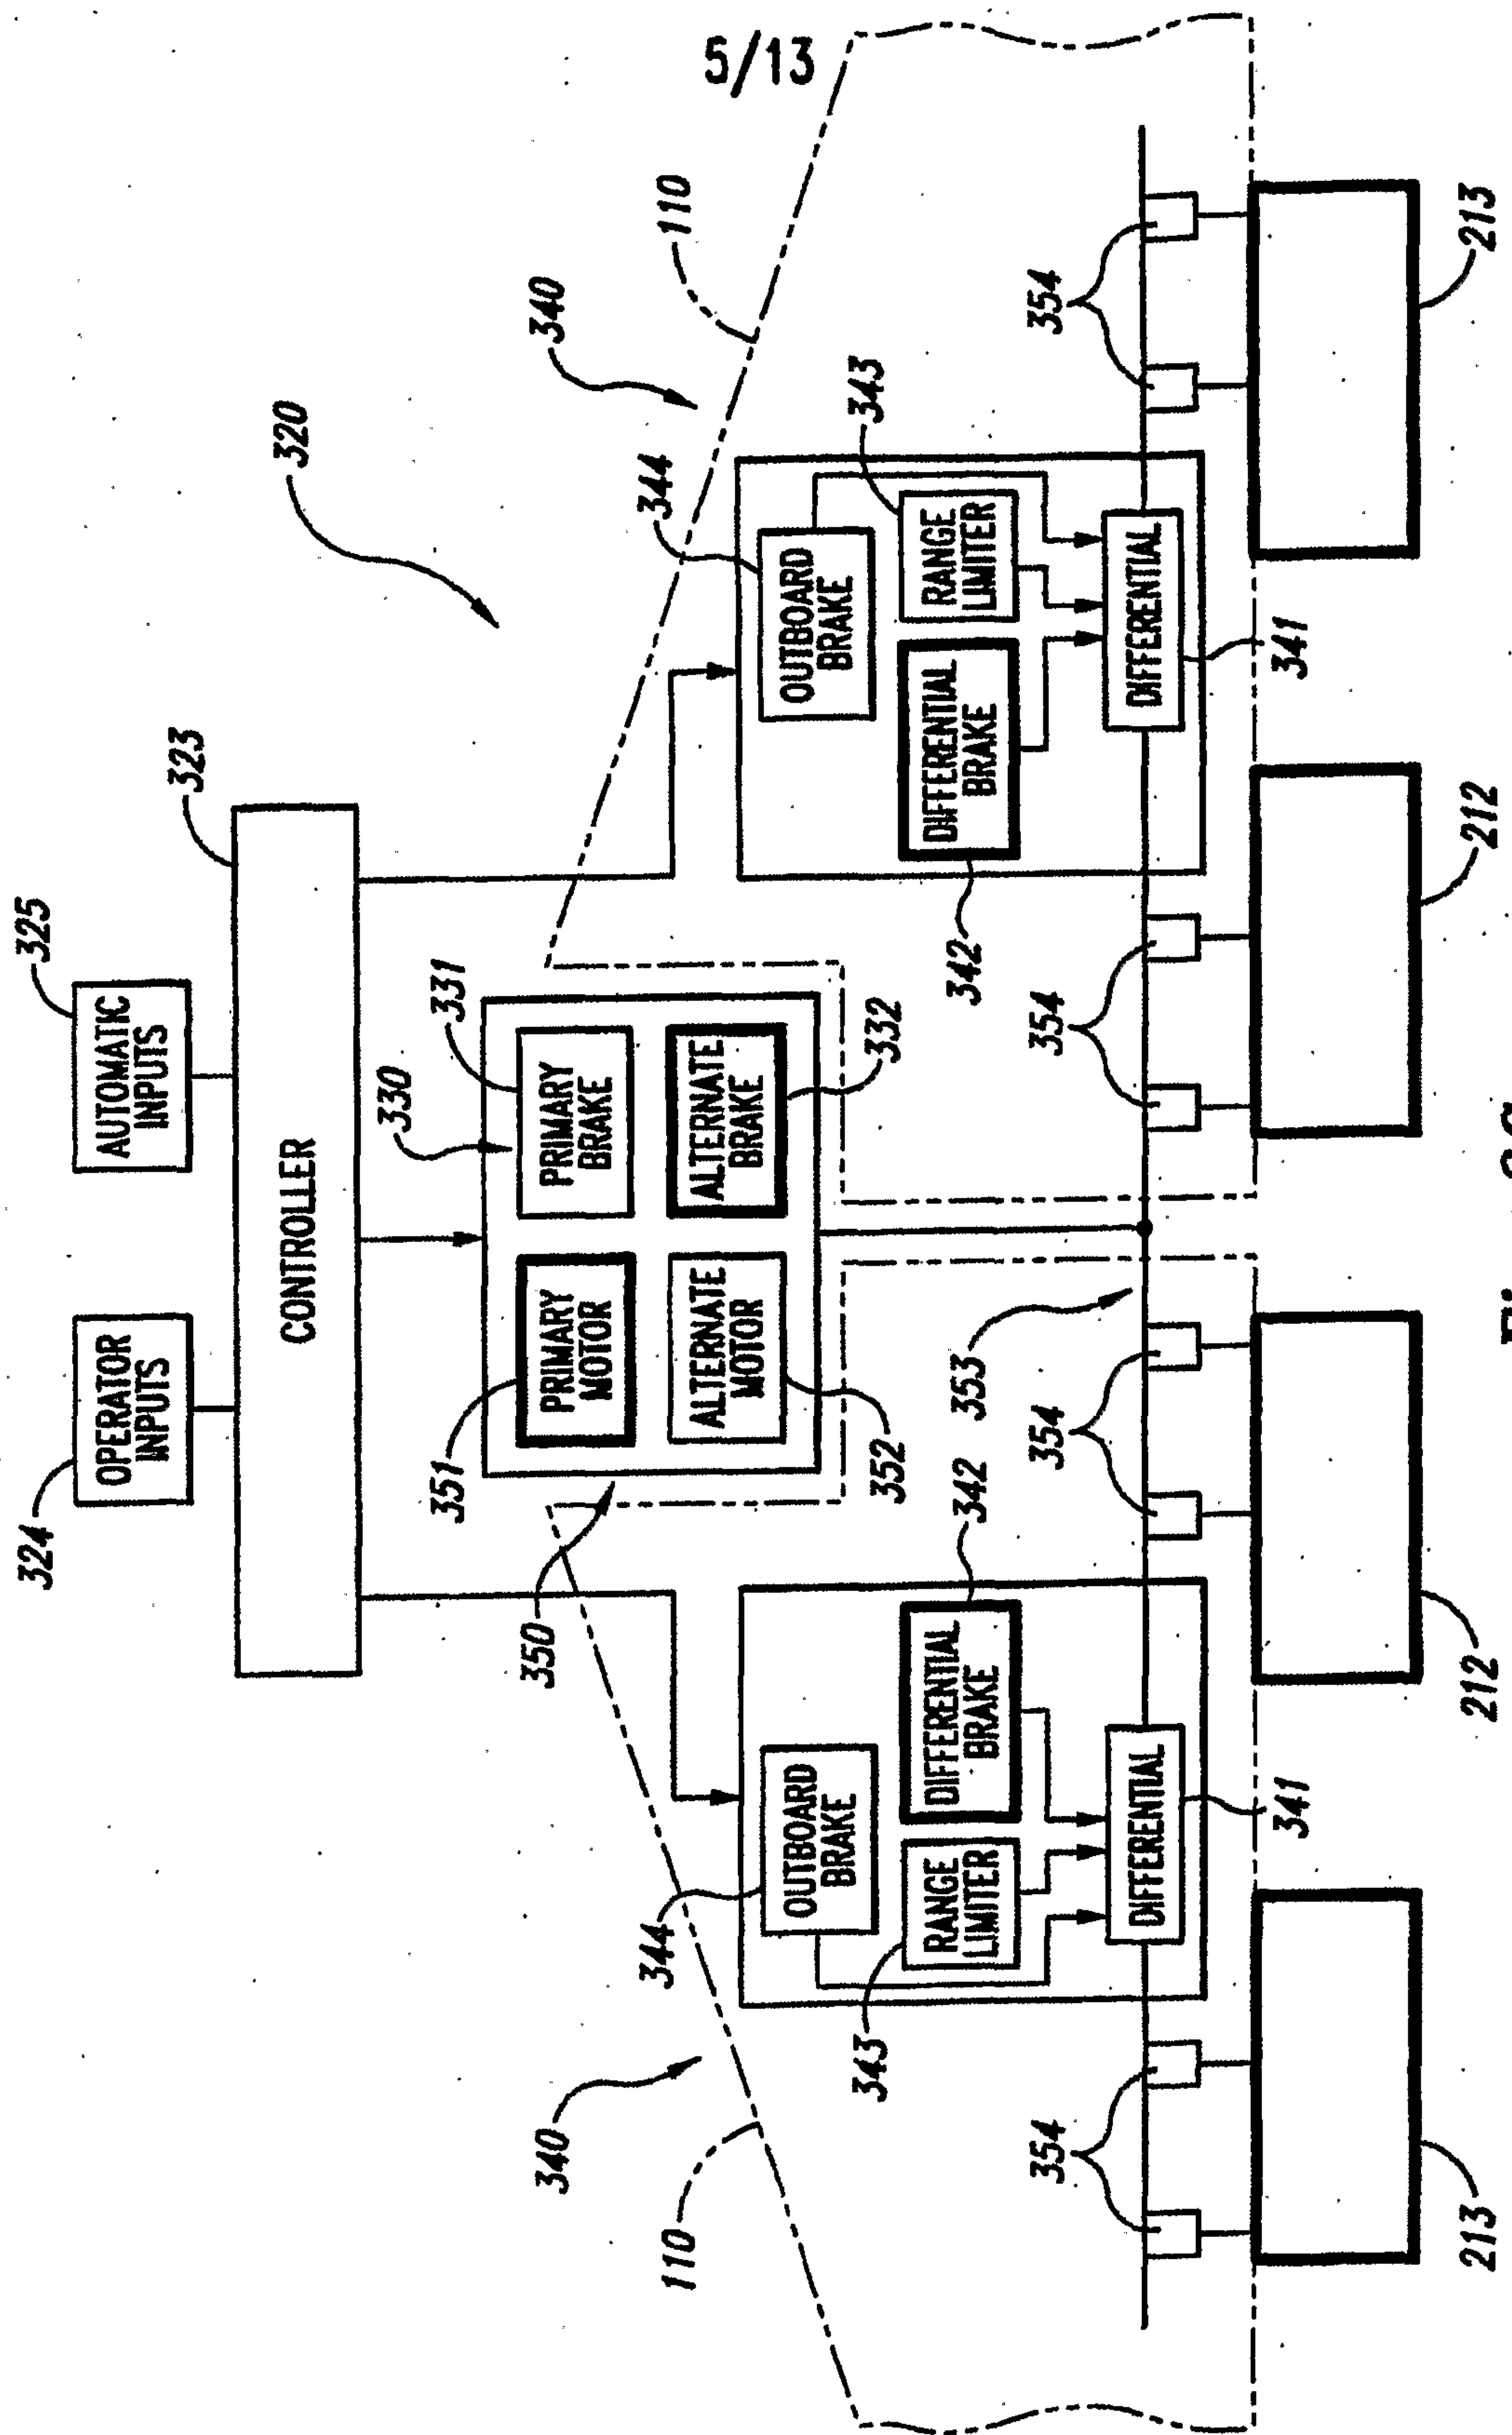


Fig. 3B



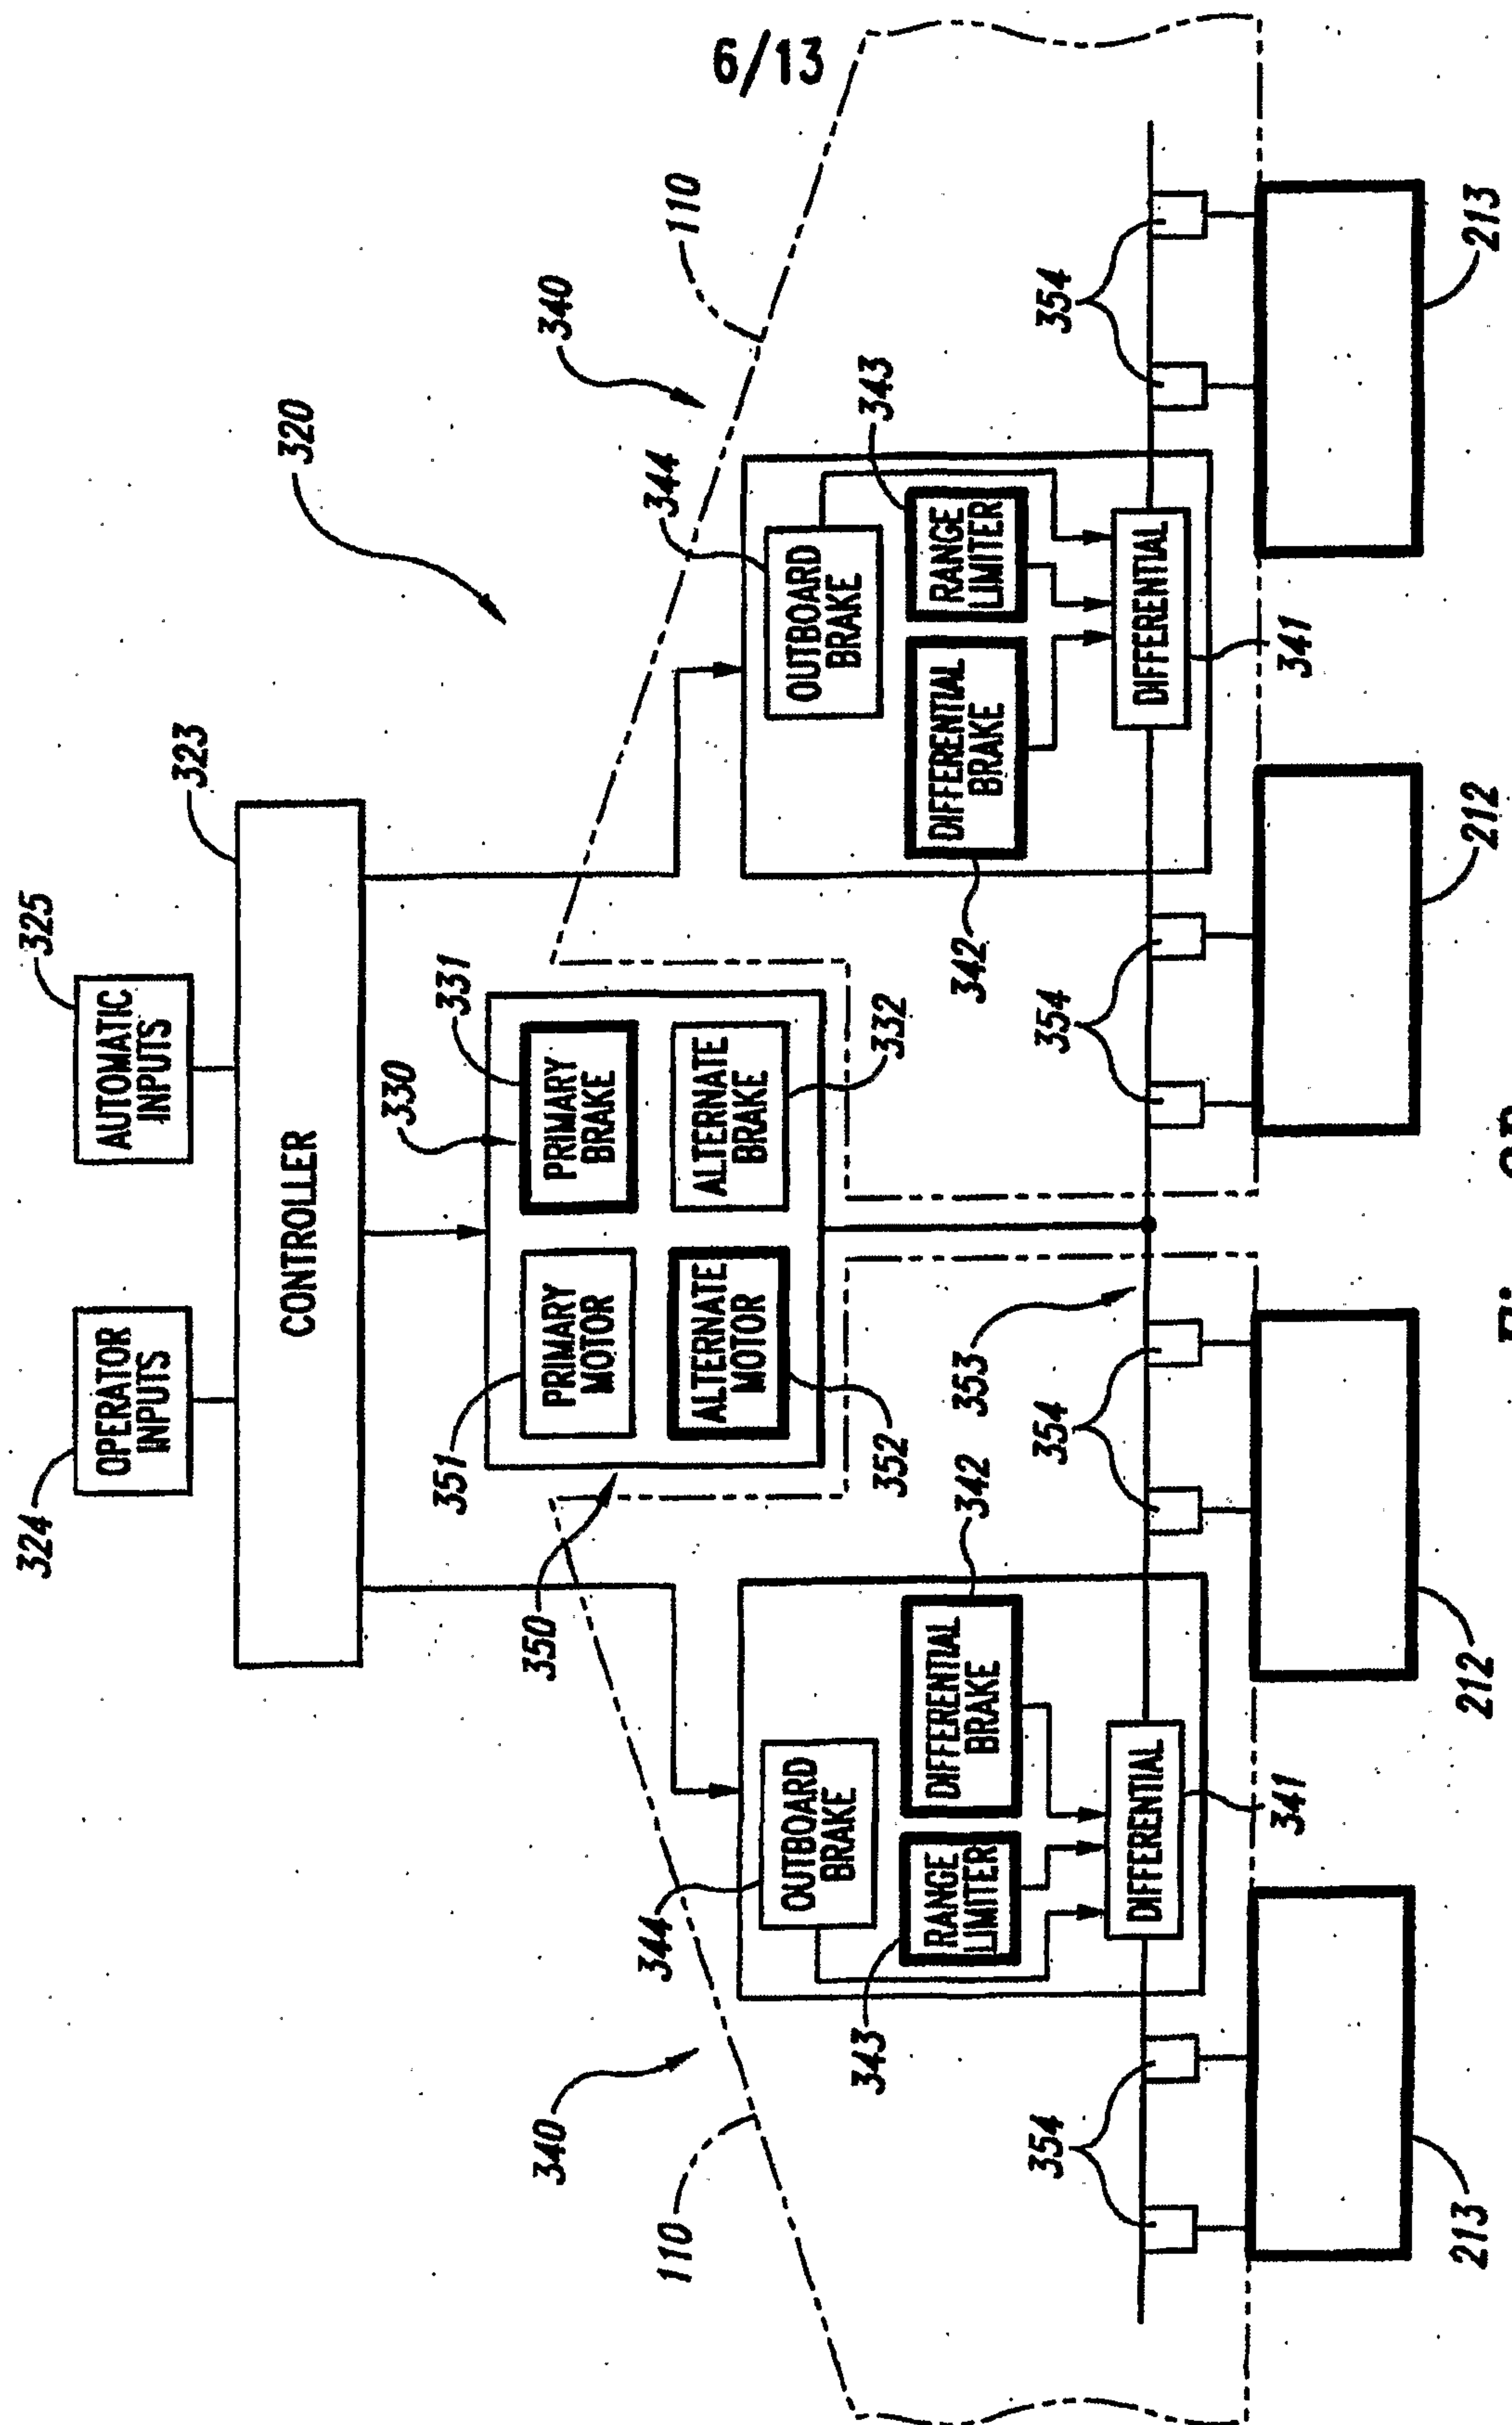


Fig. 3D

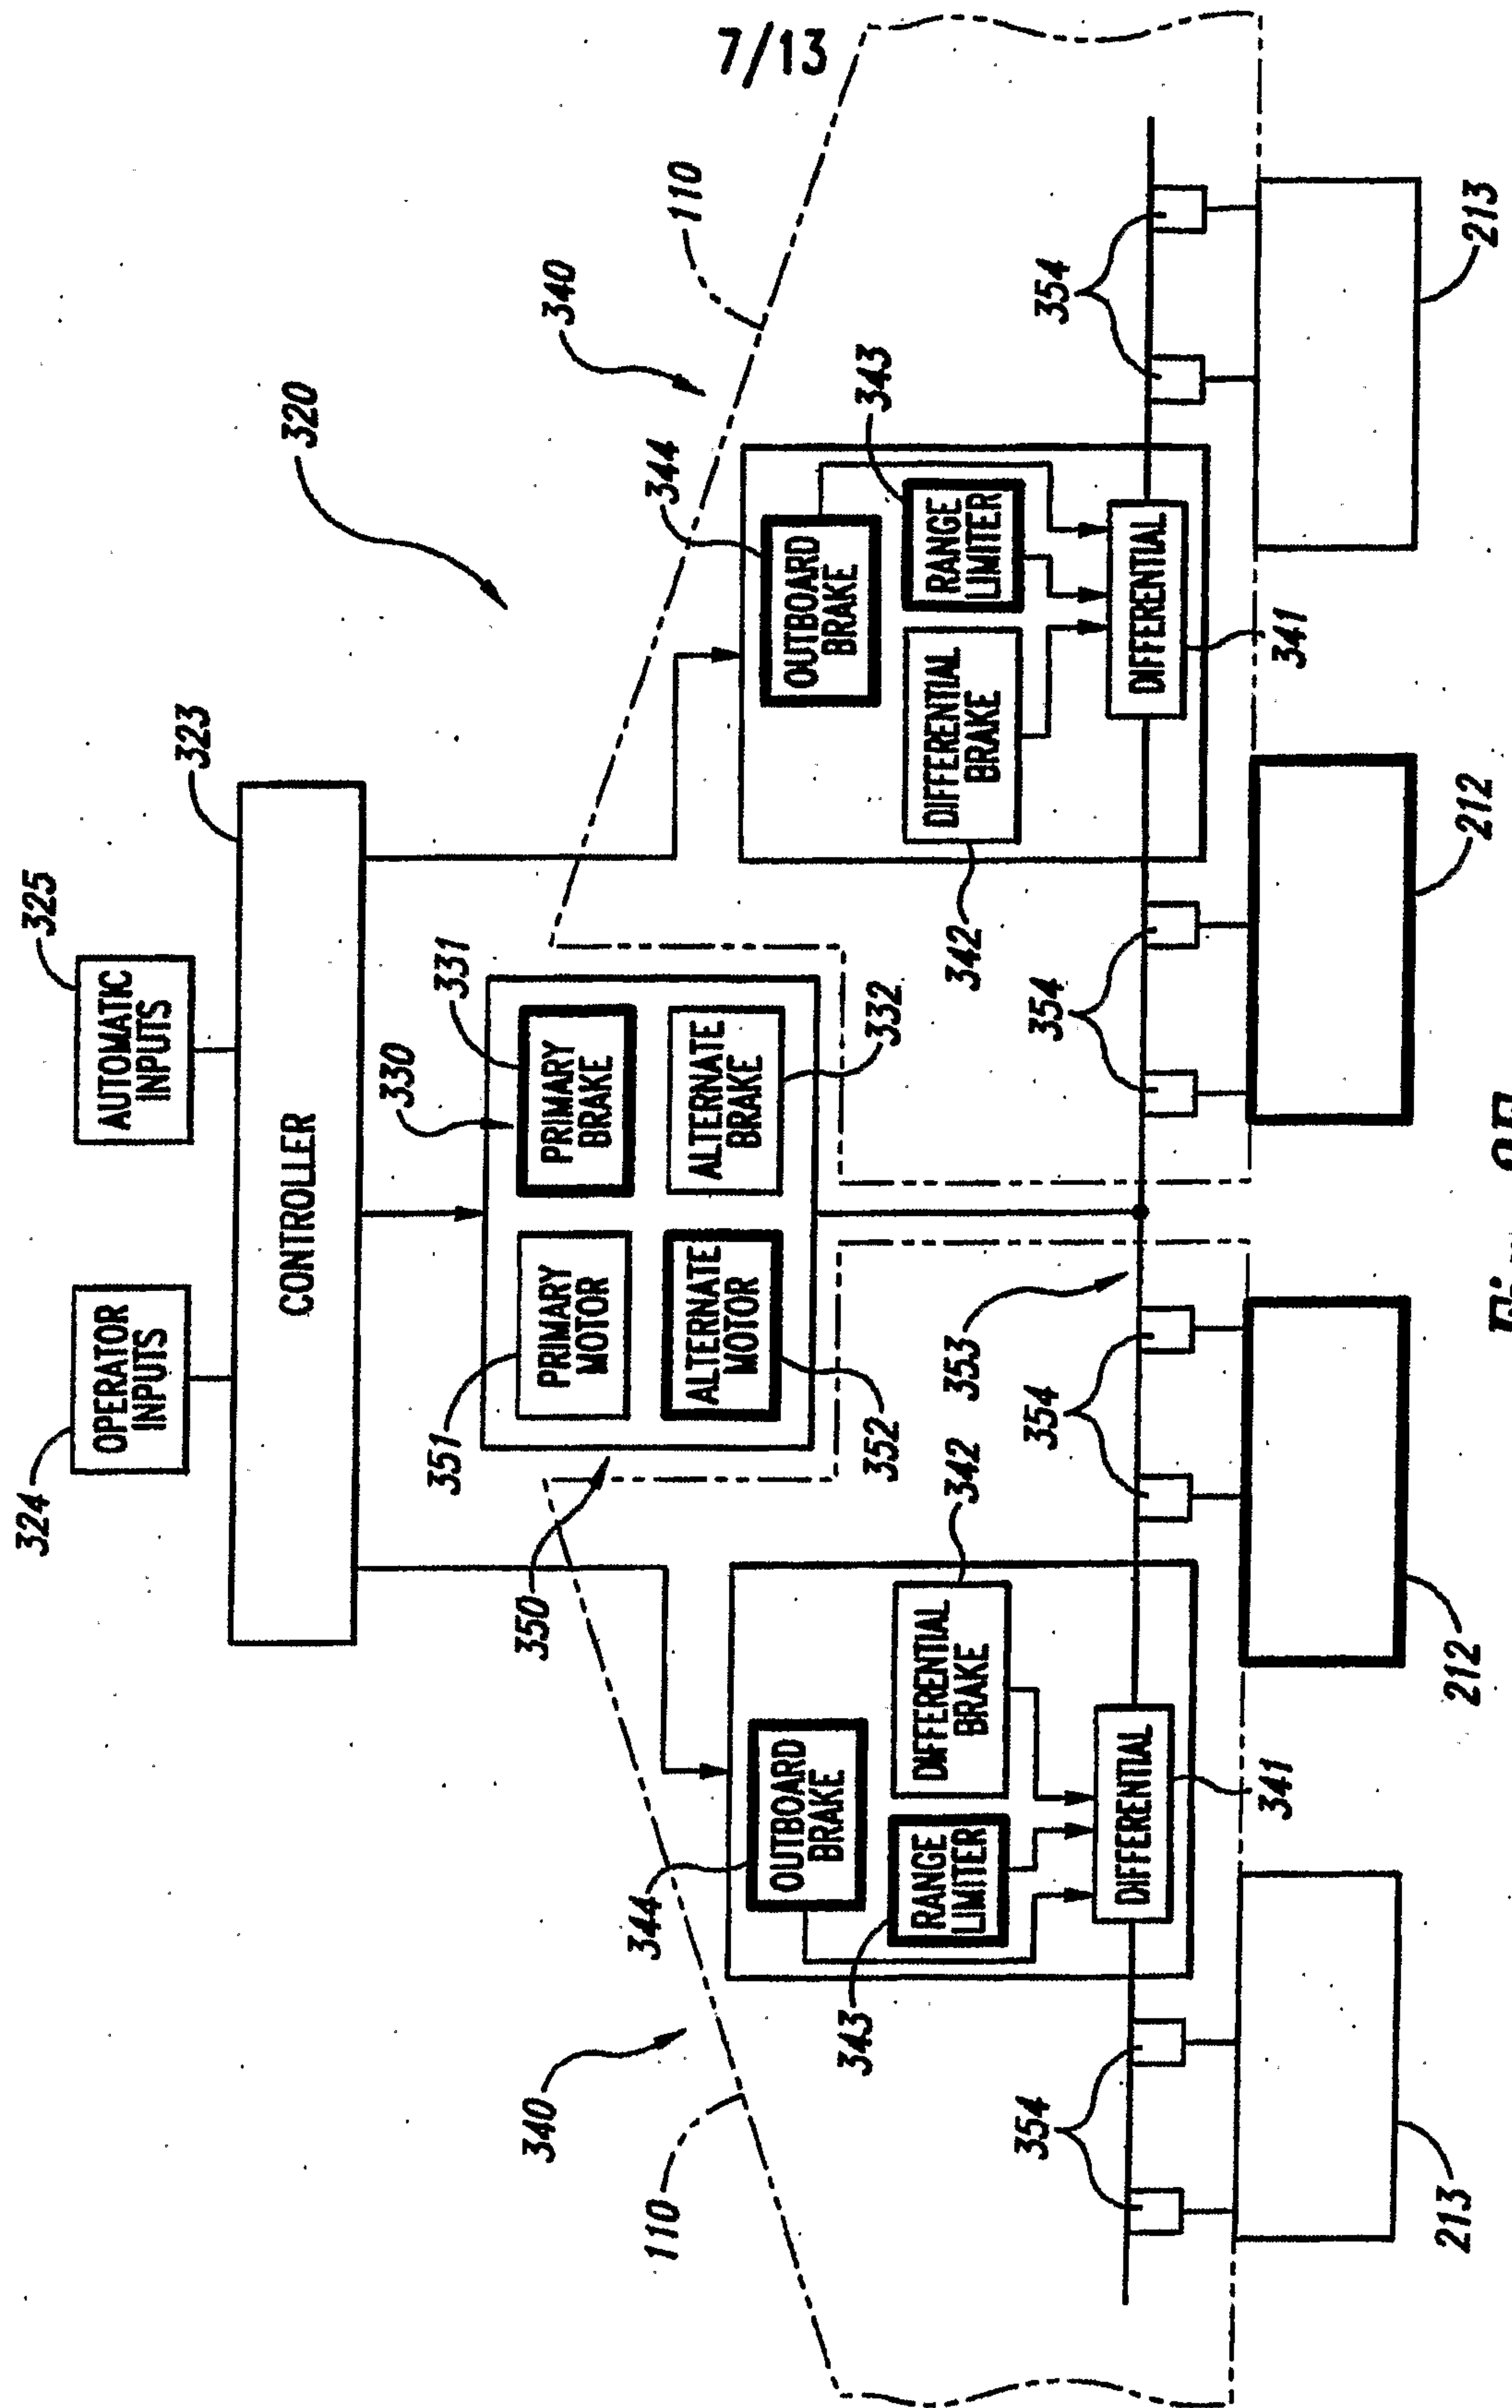


Fig. 3E

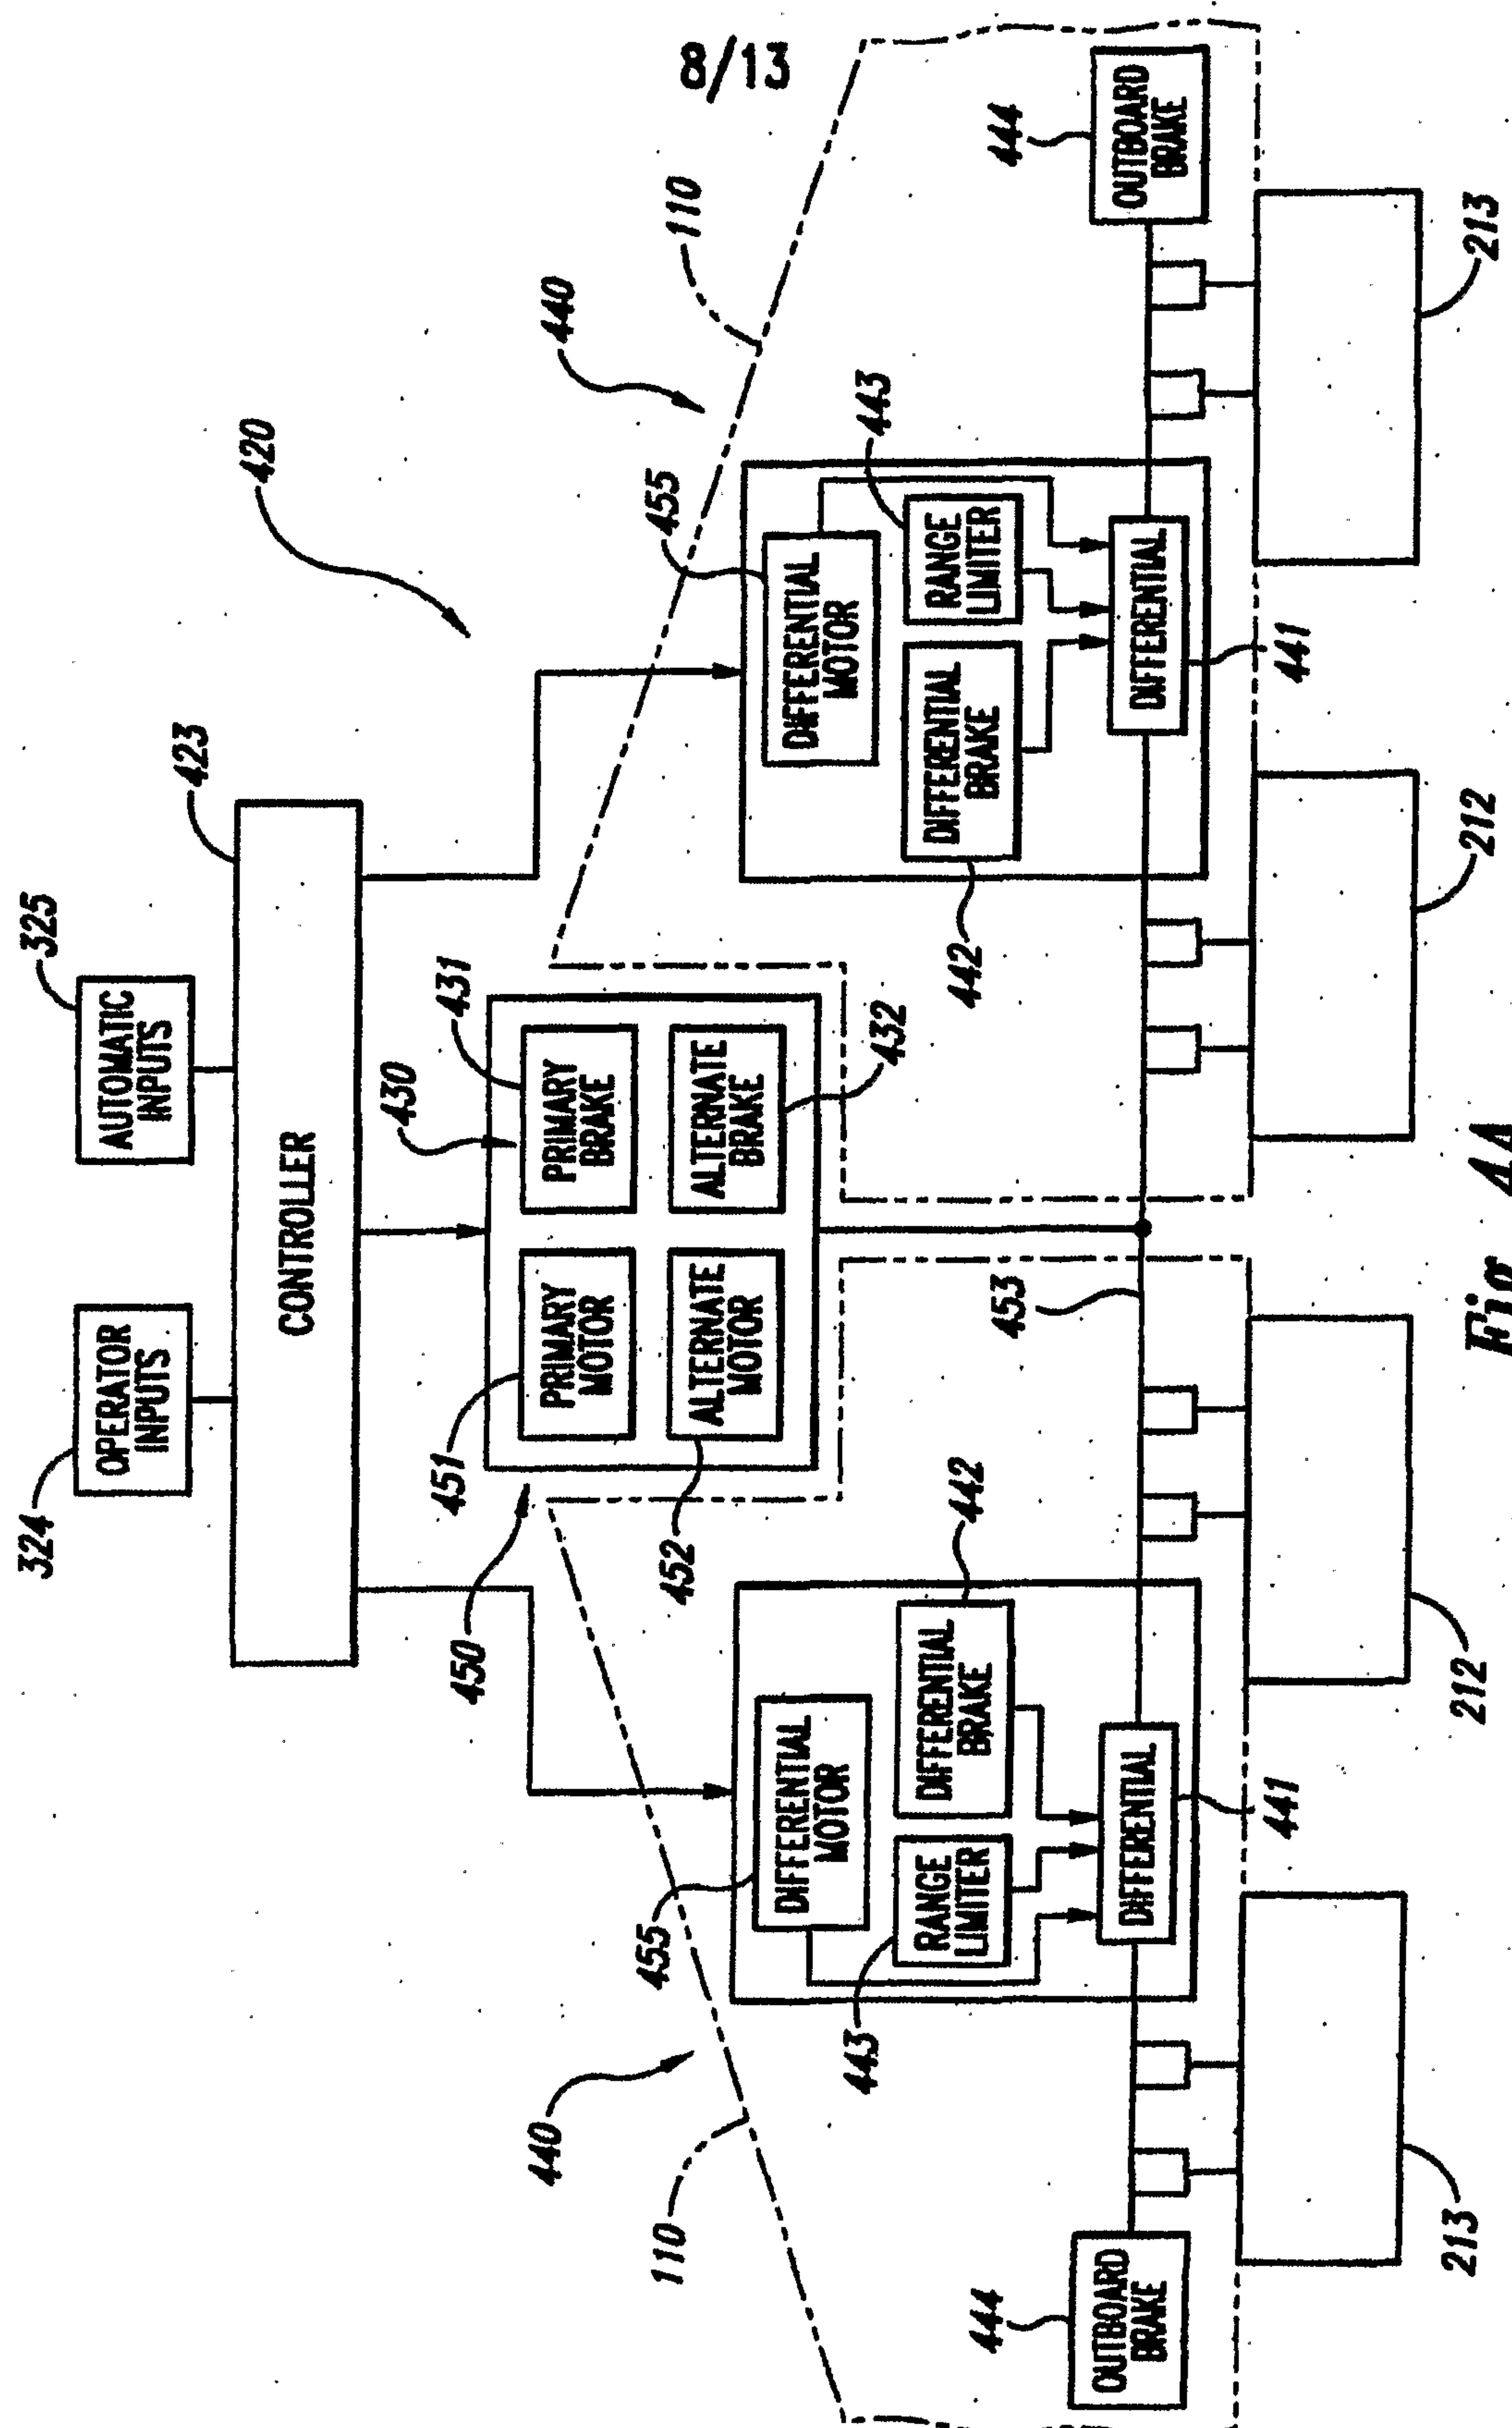


Fig. 4A

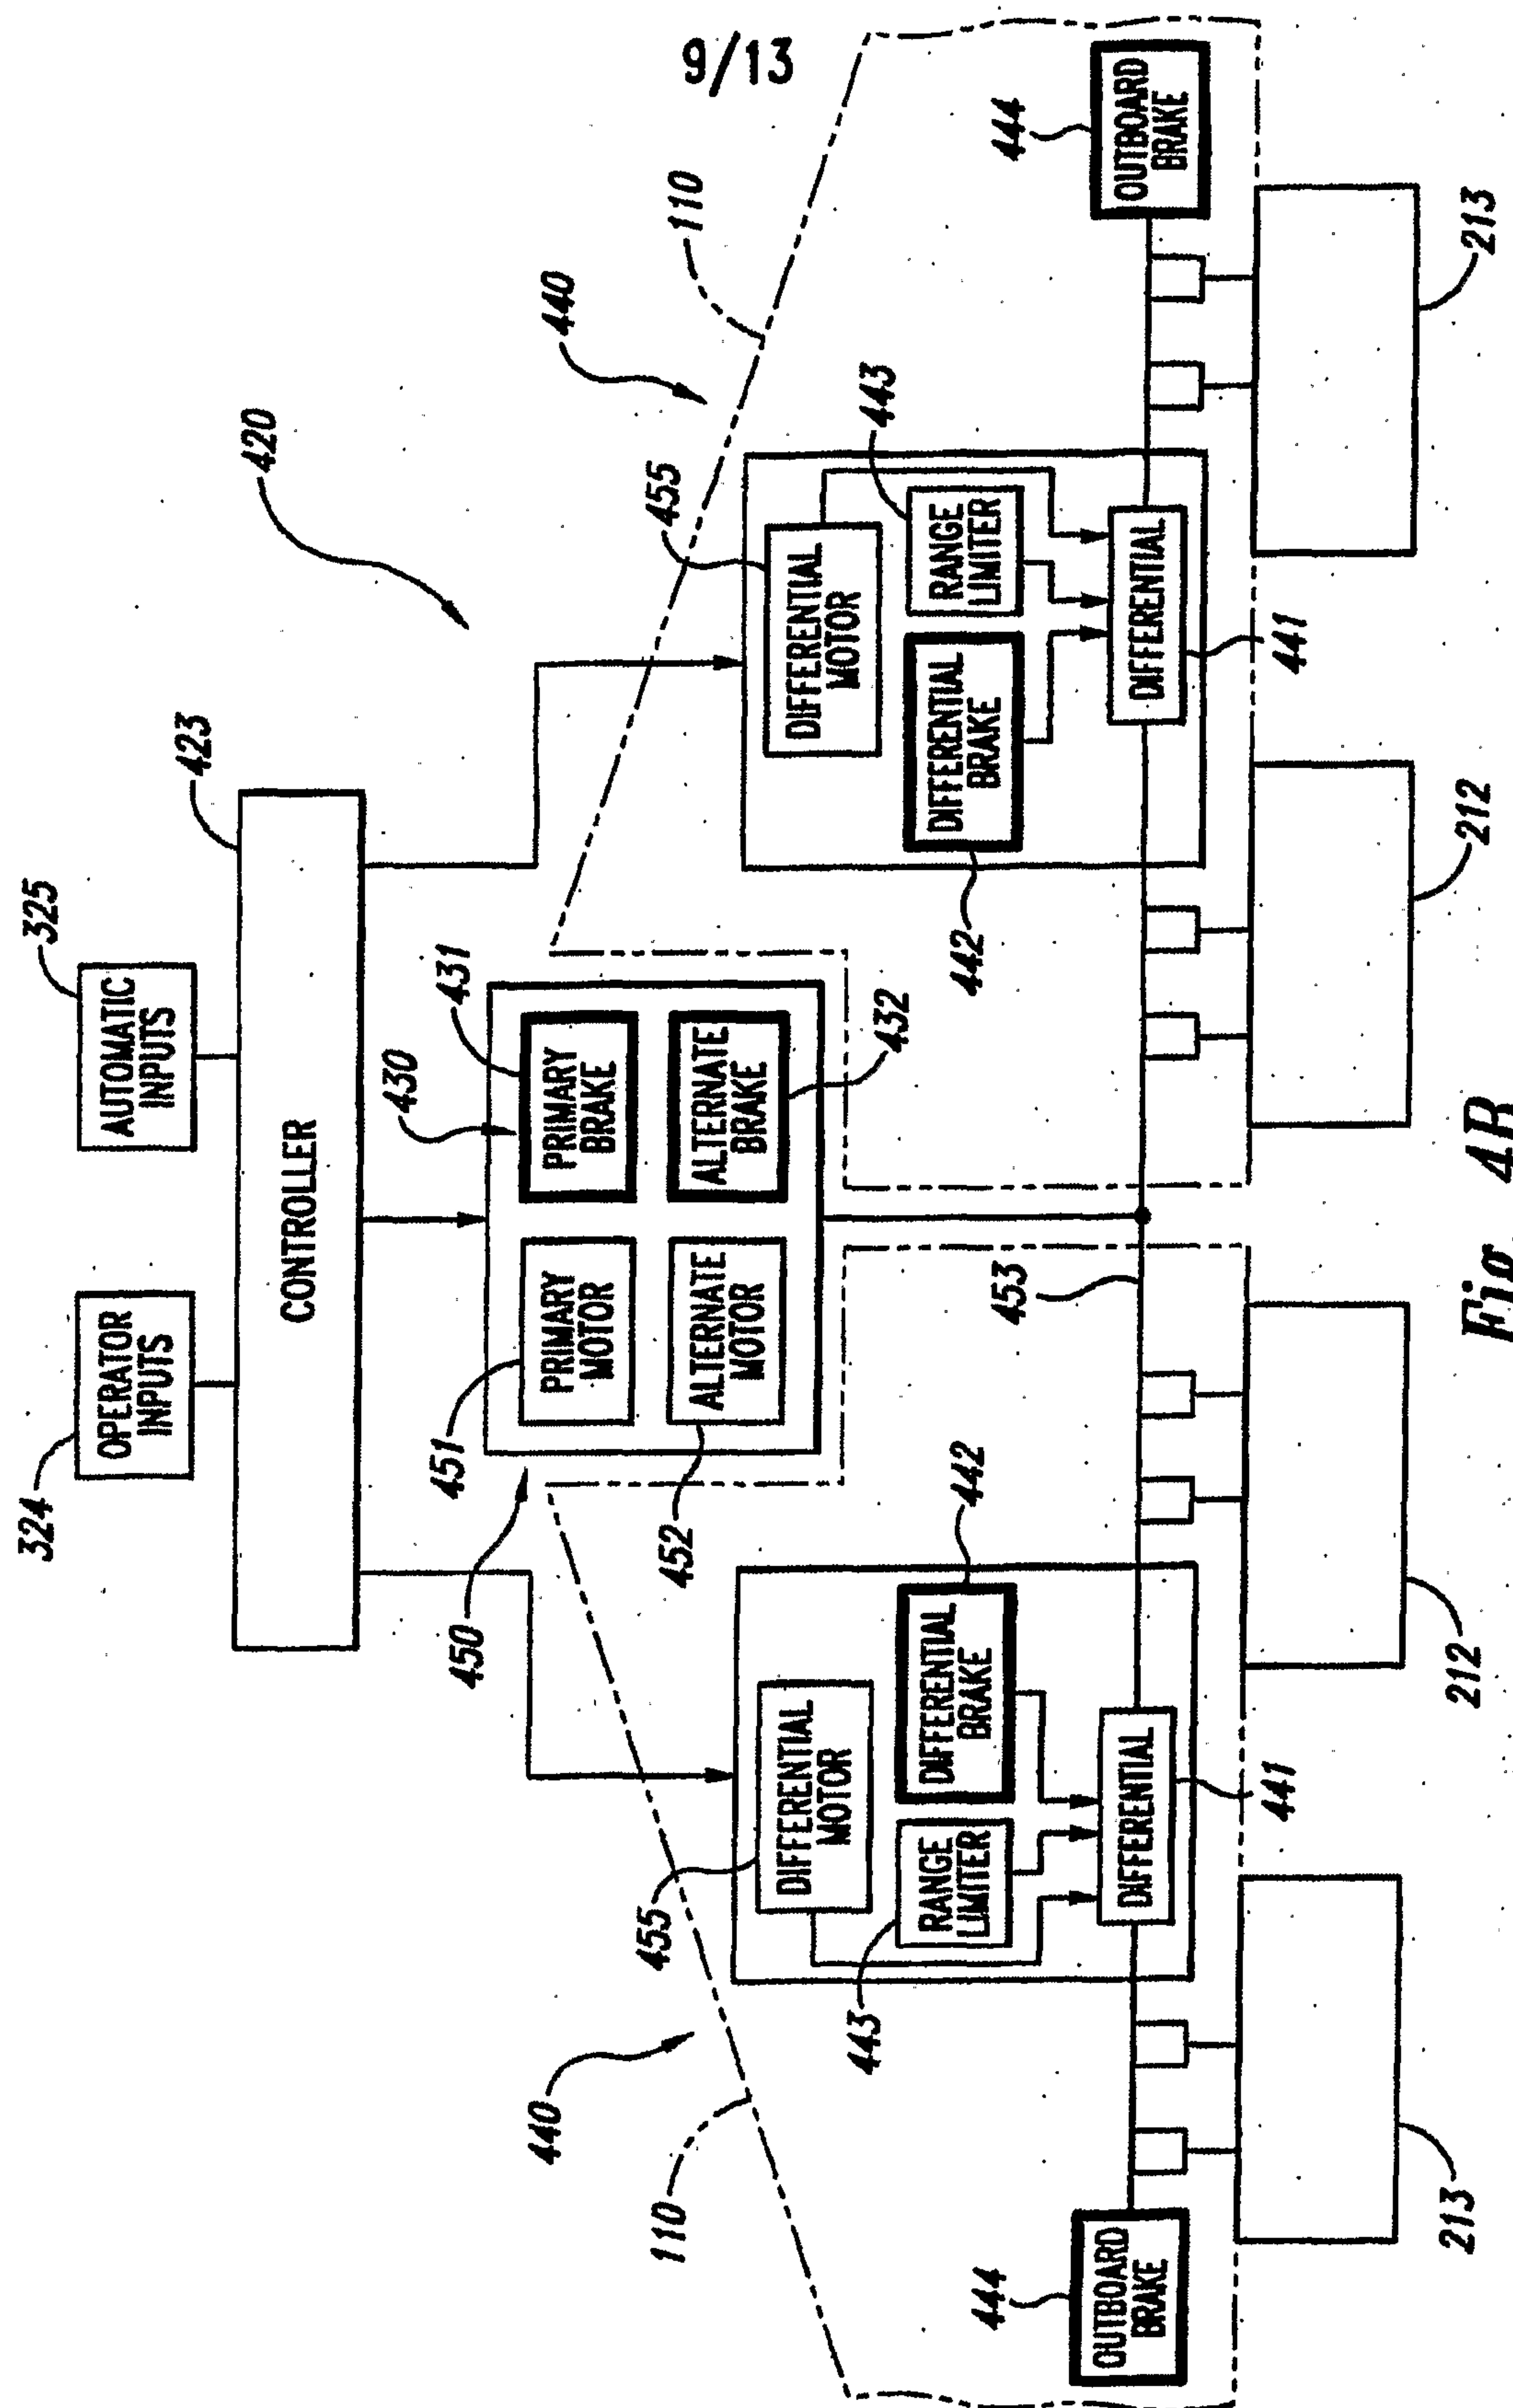


Fig. 4B

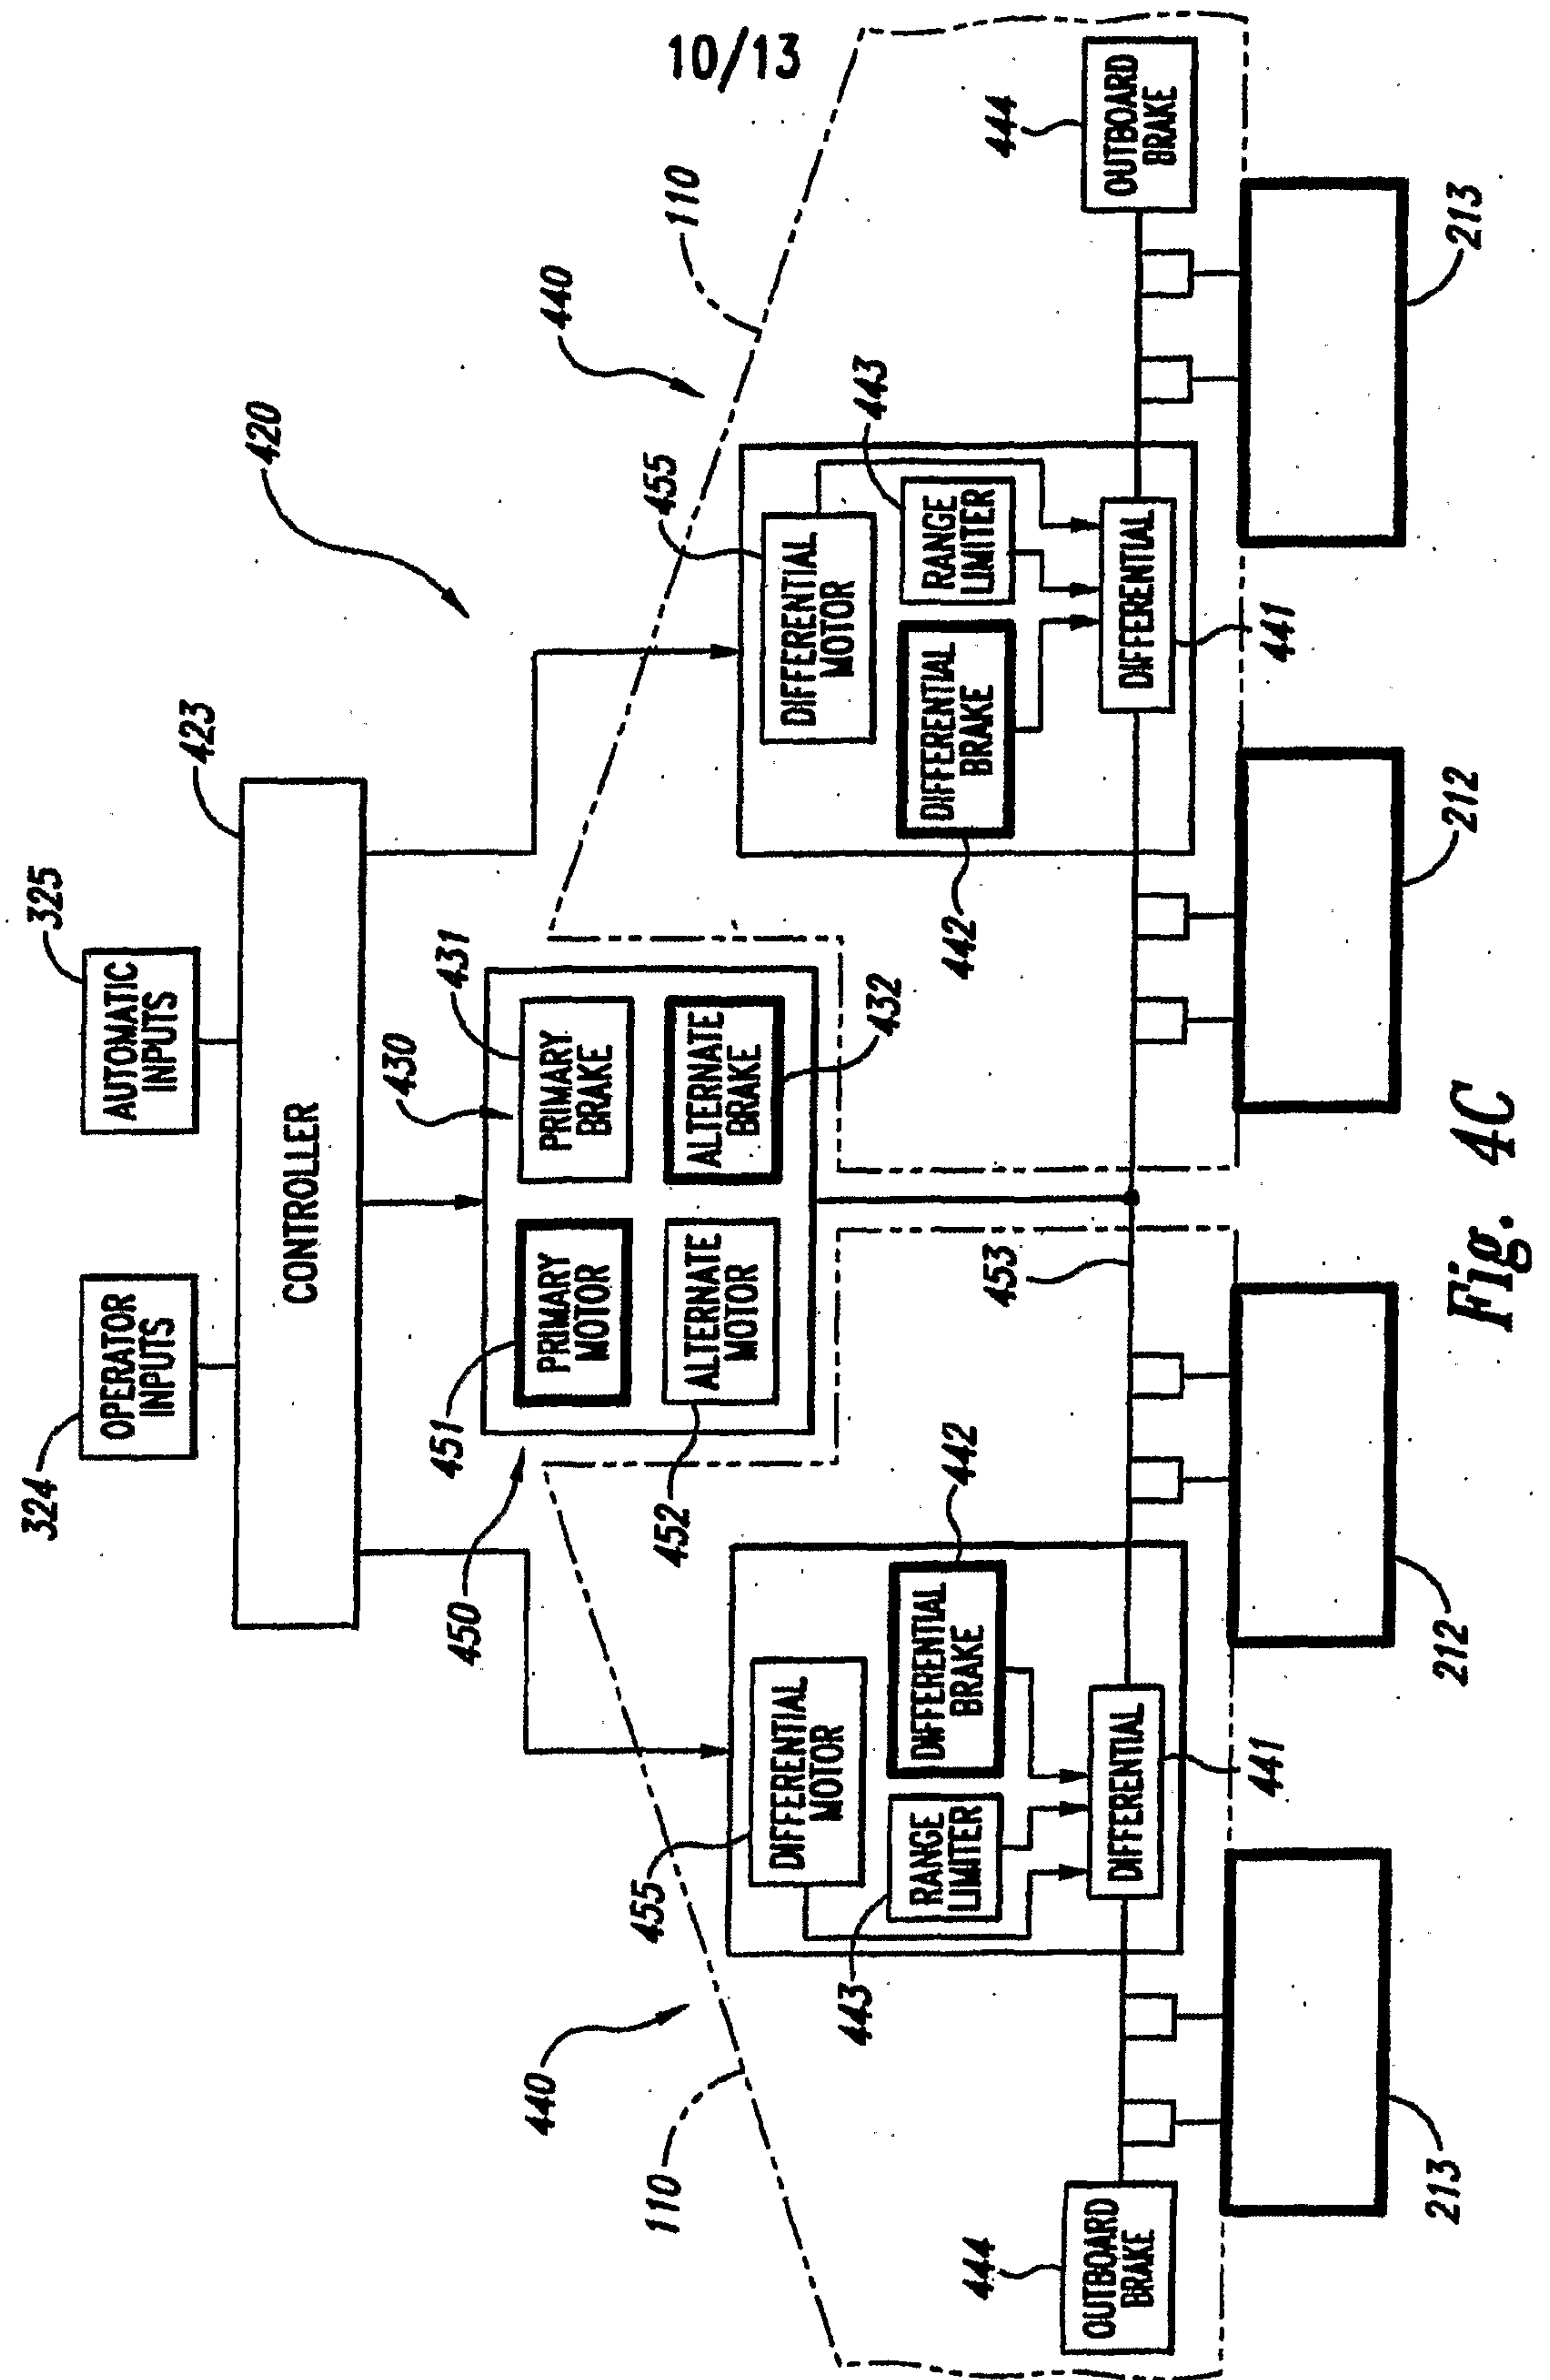
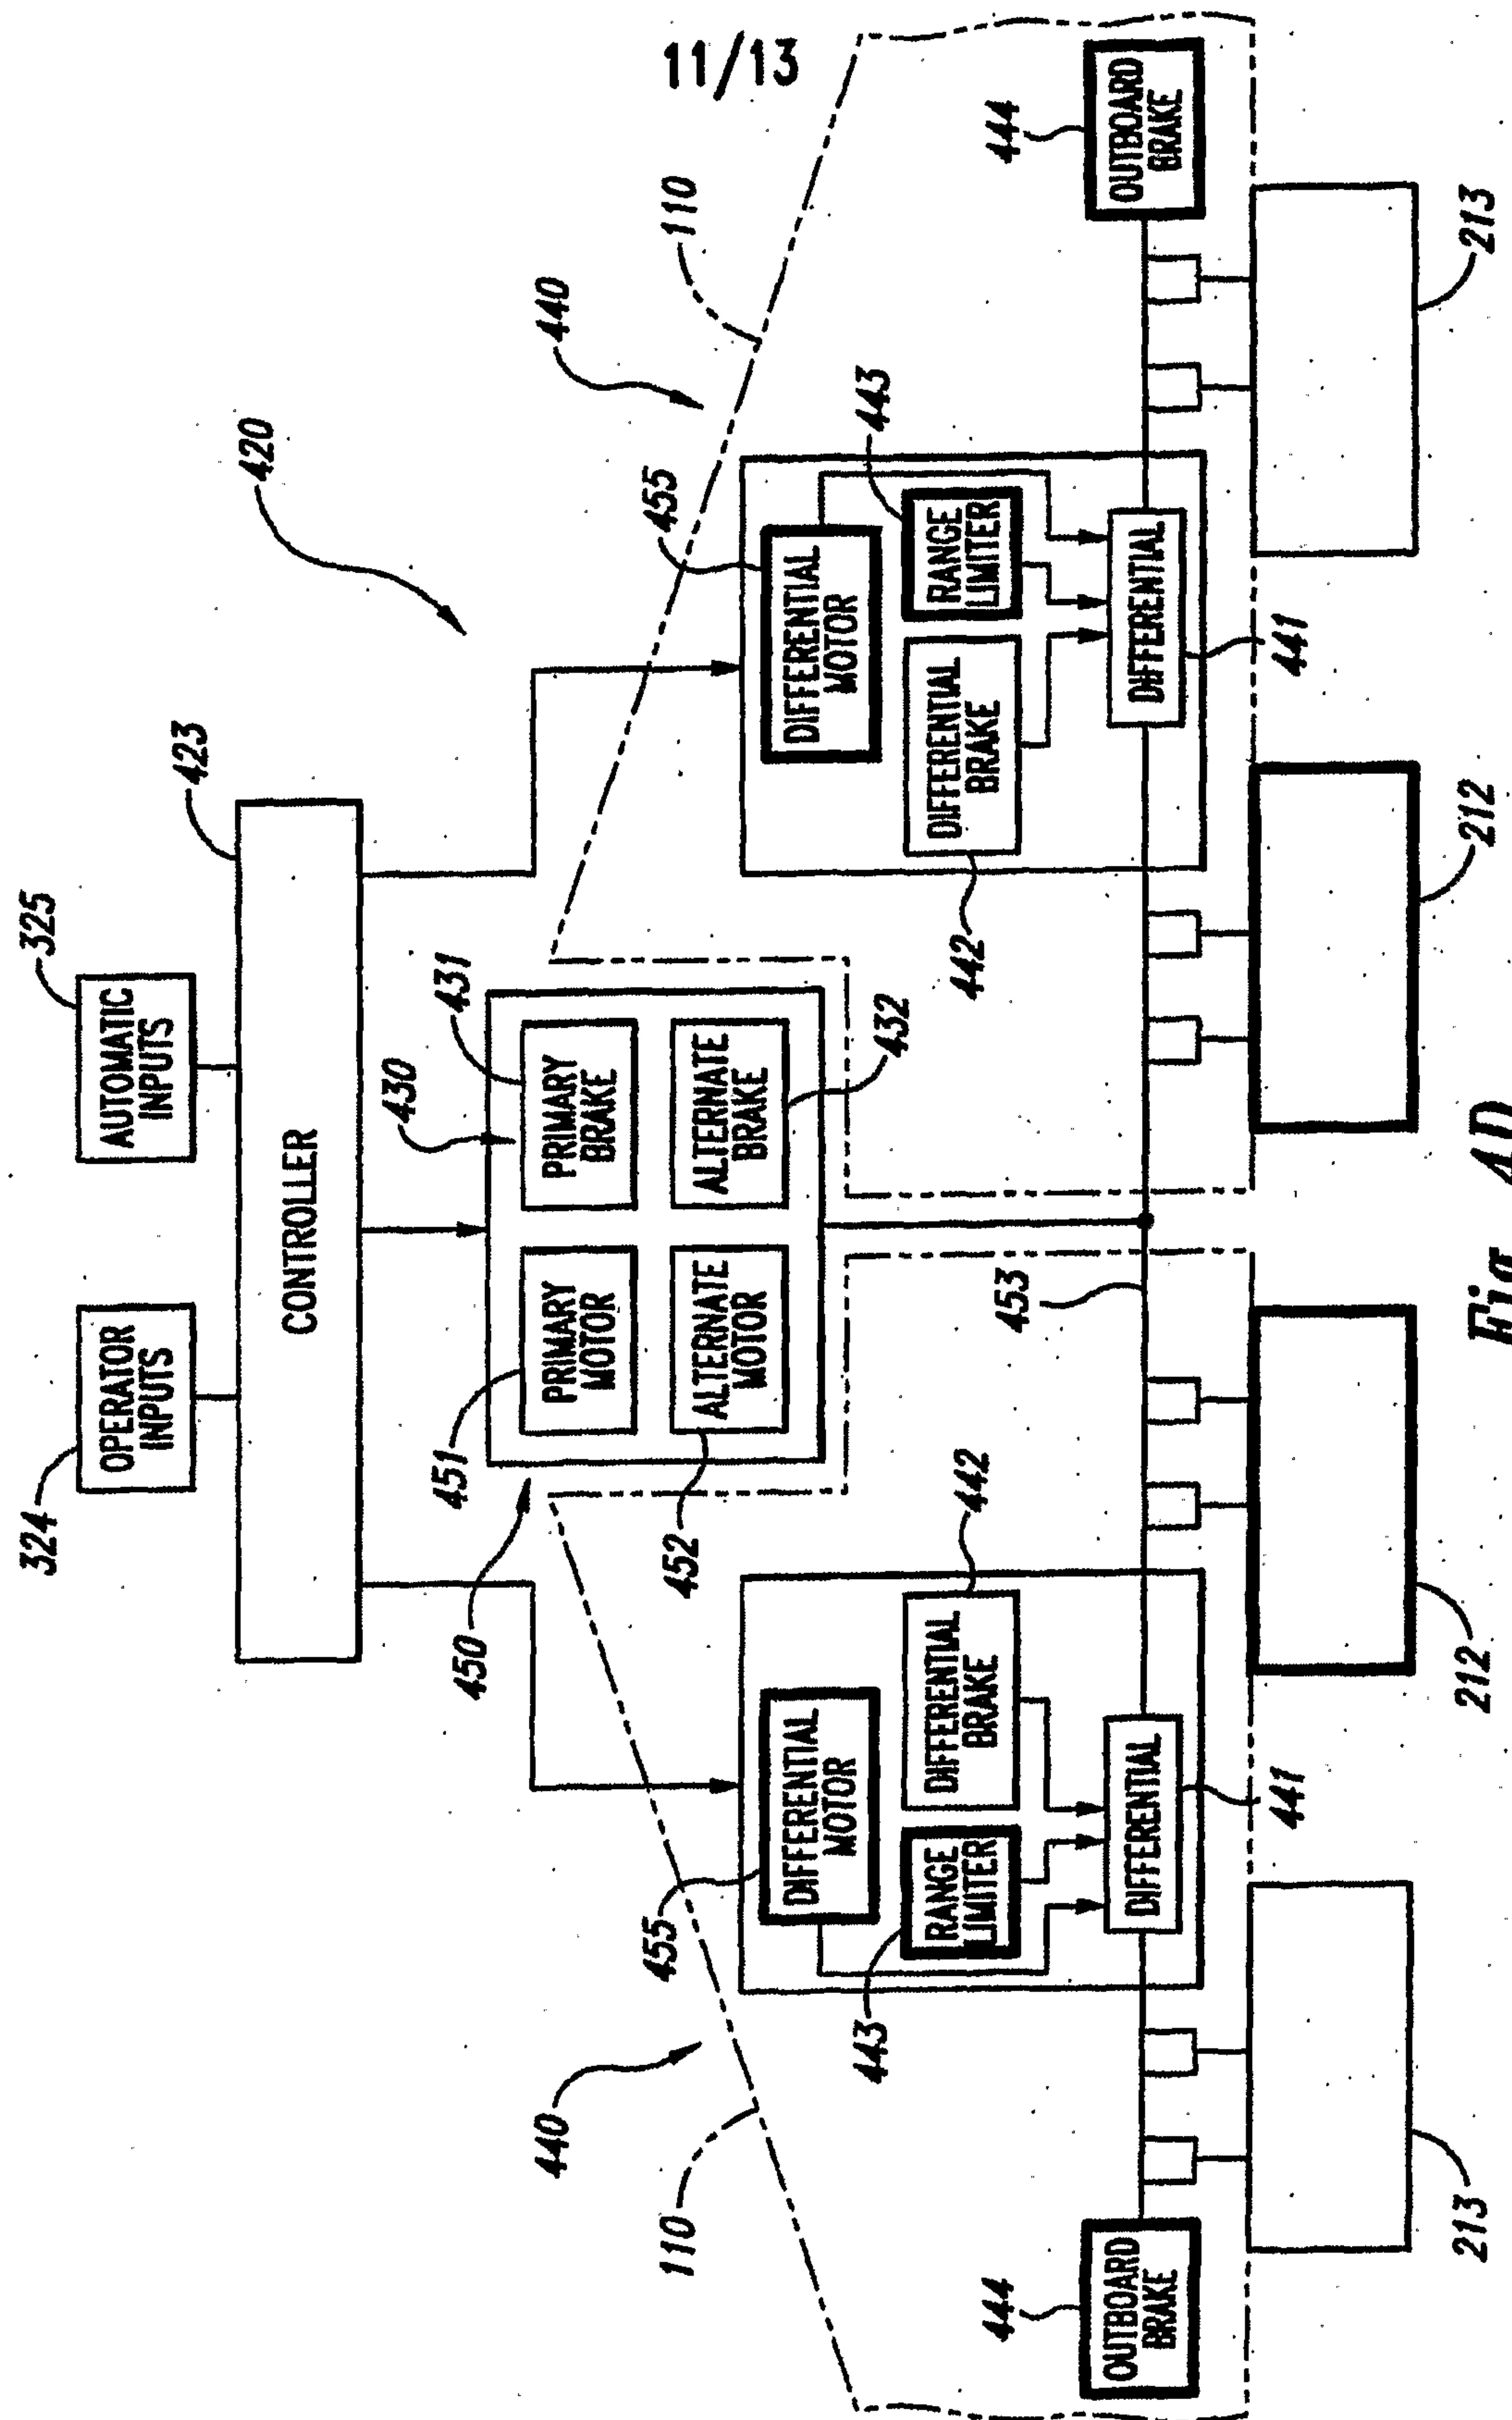


Fig. 4C




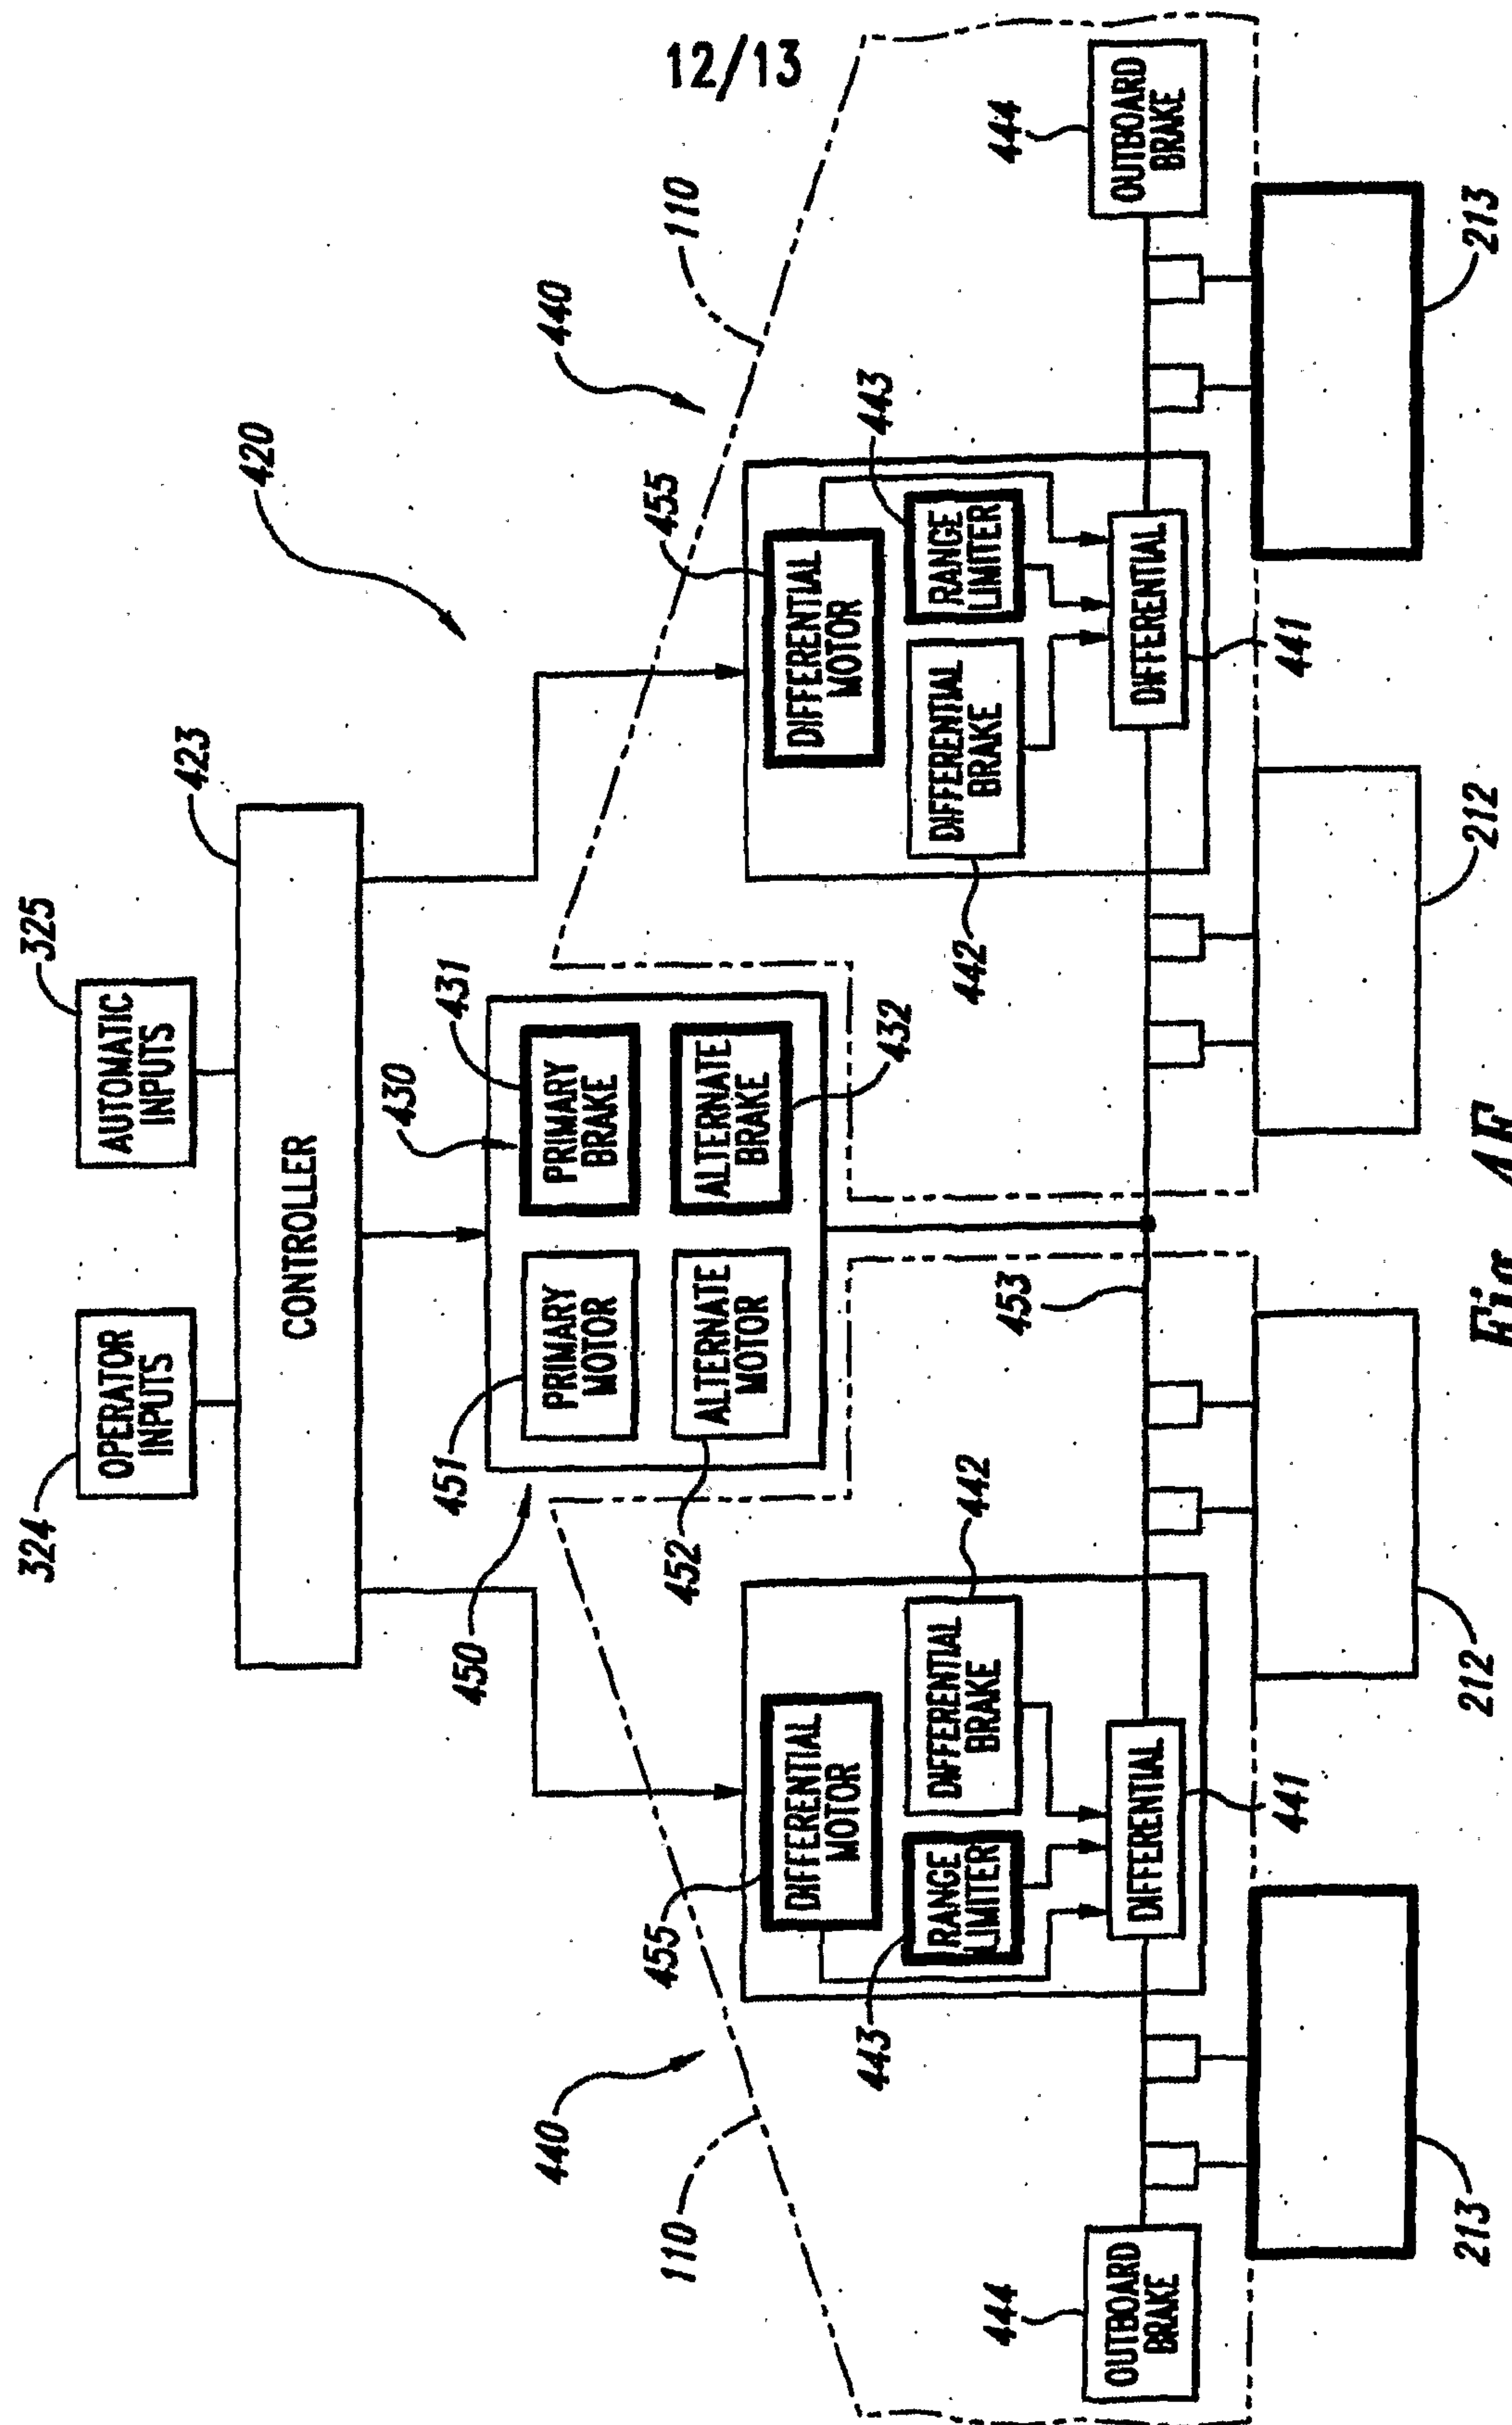


Fig. 4E

13/13

*Fig. 5*

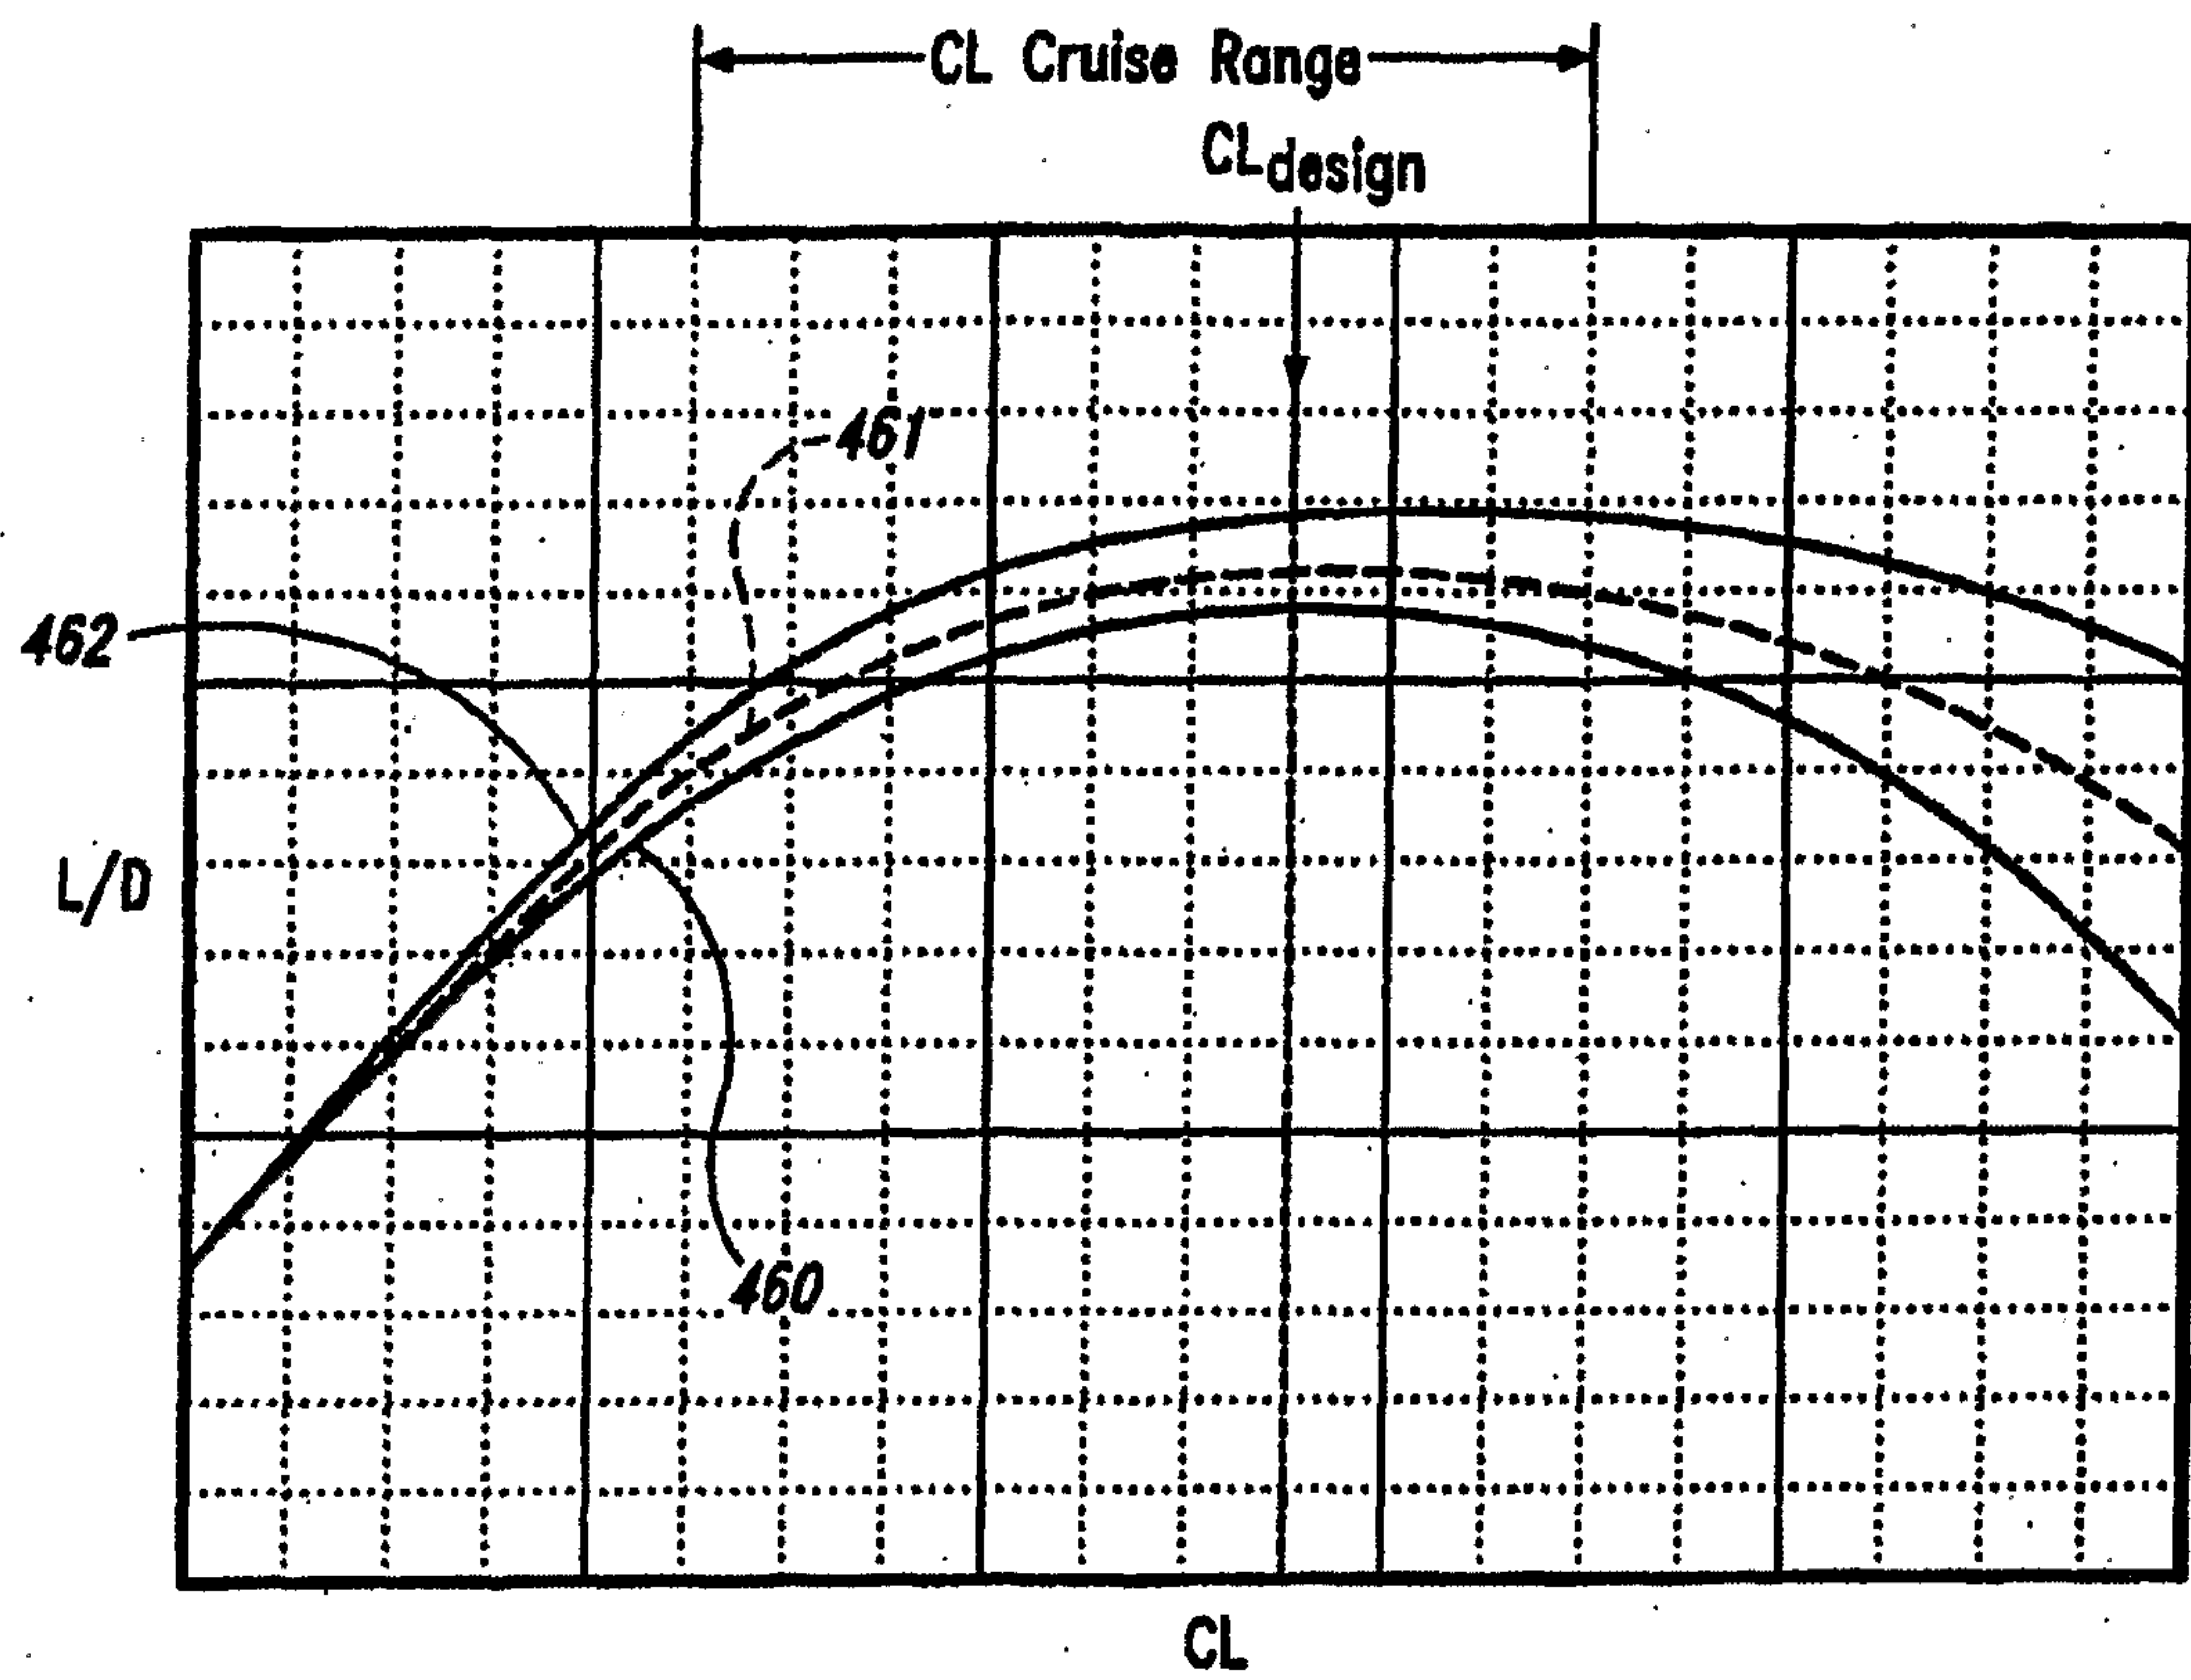