



(51) International Patent Classification:

G06F 3/01 (2006.01) **G06F 3/048** (2006.01)
G09B 21/00 (2006.01) **G06F 17/21** (2006.01)
H04N 5/445 (2011.01)

(21) International Application Number:

PCT/US2010/061425

(22) International Filing Date:

21 December 2010 (21.12.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

12/645,557 23 December 2009 (23.12.2009) US

(71) Applicant (for all designated States except US): **MO-TOROLA MOBILITY, INC.** [US/US]; 600 North US Highway 45, Libertyville, Illinois 60048 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **ALBERTH, William P.** [US/US]; 2715 Crystal Way, Prairie Grove, Illinois 60012 (US).

(74) Agents: **CHEN, Sylvia Y.** et al.; 600 North US Highway 45, Libertyville, Illinois 60048 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD AND DEVICE FOR VISUAL COMPENSATION

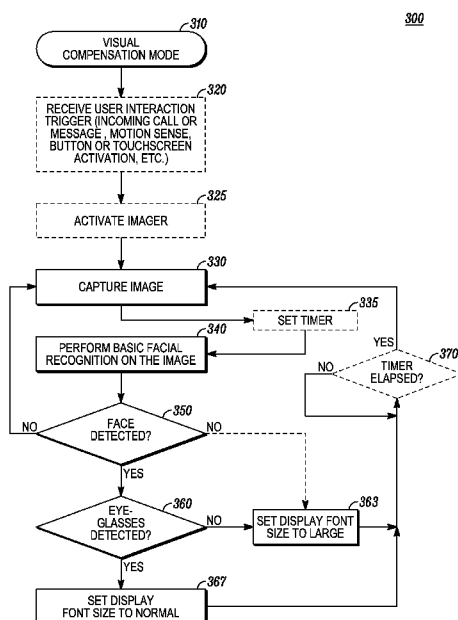


FIG. 3

(57) Abstract: A method 300 and device for visual compensation captures 330 an image using an imager, detects 360 whether eyeglasses are present in the image, and sets 363 an electronic visual display to a larger font size, if eyeglasses are not detected as present in the image. If eyeglasses are detected as present in the image, the electronic visual display is set 367 to a normal font size. The method and device can be triggered 320 (for example) by an incoming call or message, by a touch screen activation, a key press, or by a sensed motion of the device. The method can be repeated from time to time to detect whether a user has put on eyeglasses (or taken off eyeglasses) after the first image capture. The method and device compensates for users with presbyopia (and some other types of visual impairments) who intermittently wear glasses.



Published:

— *with international search report (Art. 21(3))*

METHOD AND DEVICE FOR VISUAL COMPENSATION

FIELD

[0001] This invention relates generally to devices with electronic visual
5 displays, and more particularly to displaying text and images for users who
occasionally wear glasses.

BACKGROUND

[0002] Some users of devices with electronic visual displays suffer from
10 presbyopia, which results in difficulty focusing on nearby objects. This can
produce eyestrain when reading text or viewing images at close range.
Generally presbyopia is treated using corrective lenses such as reading
glasses. Often, these reading glasses are worn intermittently. If a user
unexpectedly needs to view an electronic visual display, reading glasses may
15 not be conveniently available. For example, a mobile phone rings and a user
would like to read the caller ID but her reading glasses are in another room or
in a purse.

[0003] Although many devices with electronic visual displays have
settings that can be adjusted to display text using larger font sizes, often a
20 user must first navigate through a menu that is displayed using “normal” font
sizes. Thus, ironically, the process of increasing font sizes to address reading
difficulties becomes burdensome.

[0004] Further complications result when a user sometimes would like
larger font sizes and sometimes would like smaller font sizes. Thus, there is
25 an opportunity to accommodate users with presbyopia such that electronic
visual displays are easier to read.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] The accompanying figures, where like reference numerals refer to identical or functionally similar elements throughout the separate views, together with the detailed description below, are incorporated in and form
5 part of the specification, and serve to further illustrate embodiments of concepts that include the claimed invention, and explain various principles and advantages of those embodiments.

[0006] FIGs. 1-2 show use of a device for visual compensation in accordance with an embodiment.

10 [0007] FIG. 3 shows a flow chart for a method of visual compensation in accordance with an embodiment.

[0008] FIG. 4 shows a basic schematic for the device shown in FIGs. 1-2.

[0009] Skilled artisans will appreciate that elements in the figures are illustrated for simplicity and clarity and have not necessarily been drawn to
15 scale. For example, the dimensions of some of the elements in the figures may be exaggerated relative to other elements to help to improve understanding of embodiments of the present invention.

[0010] The apparatus and method components have been represented where appropriate by conventional symbols in the drawings, showing only
20 those specific details that are pertinent to understanding the embodiments of the present invention so as not to obscure the disclosure with details that will be readily apparent to those of ordinary skill in the art having the benefit of the description herein.

25 DETAILED DESCRIPTION

[0011] A method and device for visual compensation uses a digital camera to capture an image of a user of the device. A facial recognition engine in the device detects whether a face is present in the image and whether eyeglasses are present or absent. If eyeglasses are absent in the image, an

electronic visual display of the device uses a larger font size than if eyeglasses were detected. The method and device helps to compensate visually for a user with presbyopia who occasionally wears glasses. If the user is wearing reading glasses as detected in the image, then the display uses a normal font size. If, however, reading glasses are absent from the image, then the display uses a larger font size to assist the user in reading text.

[0012] This method and device may also be helpful for a user who has severe myopia. In another situation, a user who generally wears glasses puts the mobile phone on a nightstand for use as a clock. When the user awakens in the middle of the night and touches the mobile phone to cause a user interaction trigger, the method and device captures an image (in the dark; probably resulting in underexposure), fails to detect that the user is wearing glasses, and increases the font size of the clock display to improve the readability of the time shown.

[0013] FIGs. 1-2 show use of a device 100 for visual compensation in accordance with an embodiment. The device 100 of FIGs. 1-2 is shown as a mobile telephone, however, the device may be any number of devices with an electronic visual display 110 including computers (desktop or laptop), electronic books, personal digital assistants or organizers, or other devices with electronic visual displays intended for viewing at arm's length (i.e., 1 meter) or less.

[0014] The device 100 includes a digital camera 120 or other type of imager directed in substantially the same direction as the display 110. In some implementations, the imager may be integrated into the display itself or situated behind the display (toward the interior of the device 100). The camera captures an image when it receives a user interaction trigger. The user interaction trigger can be (for example) an incoming call or message, a touch screen interaction or key press, or a detected motion of the device 100. As devices increase in sophistication, other user interaction triggers may be developed. Generally, a user interaction trigger is any signal that would cause

the display to be active and thus anticipate visual interaction between the device and the user.

[0015] Hopefully, at the time the camera 120 is capturing the image, the user is in front of the display 110 and the image will include an acceptable depiction of the face of the user. A processor (not shown) with a simple facial recognition engine detects whether a face is present in the image. If the facial recognition engine cannot detect a face at all, the processor may seek to capture a replacement image. If the facial recognition detects a face, it determines whether eyeglasses are present. In FIG. 1, the user 190 is not wearing glasses. In this situation, the facial recognition engine has detected a face without eyeglasses. In response, the processor sets the font size of displayed text on the electronic visual display 110 to a large font size. The specific font size may be previously selected by the user.

[0016] In FIG. 2, the user 190 is wearing eyeglasses 195. In this situation, the facial recognition engine detects the face with glasses, and the displayed text on the electronic visual display 110 is set to a normal font size as previously selected by the user or predetermined by a manufacturer or software application.

[0017] The image capture, image analysis, and font size setting process can be repeated from time to time. If an initial user interaction trigger results in capture of an image of a face without glasses, the displayed font size will be set larger than normal. The user may subsequently put on glasses, and a later image capture, image analysis, and font setting process would result in a normal font size on the display. The repetition may be based on time (e.g., every 60 seconds) while the display is active, may be based on further user interaction triggers, or may be based on a combination of both time and further user interaction triggers. The repetition time may vary (e.g., from 15 seconds to 30 seconds to 60 seconds) and/or halt (e.g., after repeating for 5 minutes, the process stops and the font size stays constant).

[0018] The device 100 shown includes other components generally found in mobile telephones, such as an audio speaker 150, a keypad 130, and a microphone 140. Of course, other components may be implemented in other versions of the device.

5 [0019] FIG. 3 shows a flow chart 300 for a method of visual compensation in accordance with an embodiment. Initially, a device for visual compensation (such as the device 100 in FIGs. 1-2) is set to a visual compensation mode 310. The visual compensation mode was originally developed for users with presbyopia, but may also be appropriate for users
10 with other types of visual problems (such as severe myopia) when the user sometimes wears glasses and sometimes does not wear glasses. In any event, the user may activate the mode as a device setting and the device will continue in that mode until the visual compensation mode is inactivated.

[0020] When the device receives 320 a user interaction trigger, the
15 imager in the device is activated 325 (if it was not previously active) and captures 330 an image. A user interaction trigger can be any signal that would cause the display to be active. Examples of user interaction triggers are: incoming call or message signals, touch screen interactions, key presses, or detected motion of the device using an accelerometer. In some situations, the
20 steps of receiving 320 and activating 325 are optional, because the step of capturing 330 is automatic upon entering the visual compensation mode 310. In a mobile telephone implementation, however, power savings can be achieved by only capturing 330 images under certain circumstances.

[0021] After an image is captured, a facial recognition engine
25 implemented in a processor of the device performs 340 a basic facial recognition algorithm on the image. The facial recognition engine determines 350 if a face is detected in the image. If no face is present (or no face can be detected), the flow returns to the step of capturing 330 an image to obtain a replacement image. If a face is present, the facial recognition engine
30 determines 360 whether eyeglasses are detected on the face. If no eyeglasses

are detected, the processor sets 363 the display font size to a large font size. This is beneficial when a user with presbyopia has received an incoming phone call or message, and has picked up the device without first putting on glasses. Note that, if no face was detected 350, the flow may go directly to setting 363 the display font size to large. This alternate path may be useful in situations where the image is too dark (or too bright or too blurry) to detect a face, or the camera has captured an image before the user is positioned to look at the display. In such situations, the device defaults to a large font size and may later be changed to a normal font size during a subsequent iteration through the flow chart 300 or via a specific user command.

[0022] If the user is wearing glasses at the time the image is taken, the processor sets 367 the display font size to a normal font size. After the display font size is set 363, 367, an optional timer is checked. The timer is set 335 right after capturing 330 the image. The timer may be constant (e.g., 60 seconds) or variable (first 15 seconds, next 30 seconds, next 30 seconds, next 60 seconds, etc.). After the timer elapses 370, the flow returns to capturing 330 an image and the process repeats as necessary. Thus, as a user puts on or removes reading glasses, the font size may change dynamically based on whether images captured at various times are detected to include faces wearing eyeglasses.

[0023] Some implementations may assume that, after eyeglasses are put on, the user will not remove them. In this case, the process may end after setting 367 the display font size to normal. Some implementations may assume that, if no change in the results of the image capture and image analysis have occurred in a predetermined number of iterations (e.g., 10 iterations) or after a predetermined period of time (e.g., 10 minutes), no further change is expected. In that case, the process may end after the predetermined number of iterations or predetermined time period lapses.

[0024] FIG. 4 shows a basic schematic for the device 100 shown in FIGs. 1-2 which is capable of implementing the flow chart shown in FIG. 3. As

mentioned previously, the implementation shown is for a mobile telephone, and thus the device 100 includes an antenna 495 and at least one transceiver 490 for receiving and transmitting wireless signals. The device also includes at least one processor 460 electrically coupled to the transceiver 490 for receiving
5 (among other things) incoming call signals and incoming message signals. The processor 460 is electrically coupled to a memory 480, which can be read-only memory, random-access memory, and/or other types of memory for storing operating systems and software applications as well as user-level data. A power supply 475 supports the processor 460 (and other components in the
10 device 100) as needed.

[0025] An electronic visual display 410 is coupled to the processor 460, and the processor controls the output of the display. The display can be an output-only display or it can be a touch screen or other type of display that also accepts inputs. An imager 420 is also coupled to the processor 460. The
15 imager can be a digital camera facing the same direction as the display for capturing an image of a user looking at the display. A facial recognition engine 465 implemented in the processor 460 analyzes the captured image for a face and whether the face is wearing eyeglasses.

[0026] An accelerometer 470 is useful for detecting user interaction
20 with the device 100. If a user picks up the device in anticipation of dialing a phone number or creating a message, the accelerometer may detect the movement and trigger the process outlined in FIG. 3. Other sensors or input components, (such as keys of a keypad 430, the touch sensor of a touch screen or touch pad, or even the activation of a microphone 440 or audio speaker
25 450) may also be used to trigger the flow chart 300 of FIG. 3.

[0027] The method and device for visual compensation provides a handy way to dynamically switch font sizes, which is helpful for users with presbyopia and some other types of visual impairments. With a digital camera and a simple facial recognition engine, faces with or without glasses
30 can be detected by the device. If the device detects a face wearing glasses,

corrected vision is assumed and the display uses a normal font. If the device detects a face not wearing glasses (or cannot detect a face at all), uncorrected vision is assumed and the display uses a larger font. The process of image capture and image analysis can be repeated from time to time to dynamically
5 change font size as glasses are put on (or taken off).

[0028] In the foregoing specification, specific embodiments have been described. However, one of ordinary skill in the art appreciates that various modifications and changes can be made without departing from the scope of the invention as set forth in the claims below. Accordingly, the specification
10 and figures are to be regarded in an illustrative rather than a restrictive sense, and all such modifications are intended to be included within the scope of present teachings.

[0029] The benefits, advantages, solutions to problems, and any element(s) that may cause any benefit, advantage, or solution to occur or
15 become more pronounced are not to be construed as a critical, required, or essential features or elements of any or all the claims. The invention is defined solely by the appended claims including any amendments made during the pendency of this application and all equivalents of those claims as issued.

[0030] The terms "comprises," "comprising," "has," "having,"
20 "includes," "including," "contains," "containing" or any other variation thereof, are intended to cover a non-exclusive inclusion, such that a process, method, article, or apparatus that comprises, has, includes, contains a list of elements does not include only those elements but may include other elements not expressly listed or inherent to such process, method, article, or
25 apparatus. An element preceded by "comprises ...a", "has ...a", "includes ...a", "contains ...a" does not, without more constraints, preclude the existence of additional identical elements in the process, method, article, or apparatus that comprises, has, includes, contains the element. The terms "a" and "an" are defined as one or more unless explicitly stated otherwise herein.

The terms “substantially”, “essentially”, “approximately”, “about” or any other version thereof, are defined as being close to as understood by one of ordinary skill in the art, and in one non-limiting embodiment the term is defined to be within 10%, in another embodiment within 5%, in another embodiment within 1% and in another embodiment within 0.5%. The term “coupled” as used herein is defined as connected, although not necessarily directly and not necessarily mechanically. A device or structure that is “configured” in a certain way is configured in at least that way, but may also be configured in ways that are not listed.

- 10 [0031] It will be appreciated that some embodiments may be comprised of one or more generic or specialized processors (or “processing devices”) such as microprocessors, digital signal processors, customized processors and field programmable gate arrays (FPGAs) and unique stored program instructions (including both software and firmware) that control the
- 15 one or more processors to implement, in conjunction with certain non-processor circuits, some, most, or all of the functions of the method and/or apparatus described herein. Alternatively, some or all functions could be implemented by a state machine that has no stored program instructions, or in one or more application specific integrated circuits (ASICs), in which each
- 20 function or some combinations of certain of the functions are implemented as custom logic. Of course, a combination of the two approaches could be used.

- [0032] Moreover, an embodiment can be implemented as a computer-readable storage medium having computer readable code stored thereon for programming a computer (e.g., comprising a processor) to perform a method as described and claimed herein. Examples of such computer-readable storage
- 25 mediums include, but are not limited to, a hard disk, a CD-ROM, an optical storage device, a magnetic storage device, a ROM (Read Only Memory), a PROM (Programmable Read Only Memory), an EPROM (Erasable Programmable Read Only Memory), an EEPROM (Electrically Erasable

Programmable Read Only Memory) and a Flash memory. Further, it is expected that one of ordinary skill, notwithstanding possibly significant effort and many design choices motivated by, for example, available time, current technology, and economic considerations, when guided by the concepts and principles disclosed herein will be readily capable of generating such software instructions and programs and ICs with minimal experimentation.

[0033] The Abstract of the Disclosure is provided to allow the reader to quickly ascertain the nature of the technical disclosure. It is submitted with the understanding that it will not be used to interpret or limit the scope or meaning of the claims. In addition, in the foregoing Detailed Description, it can be seen that various features are grouped together in various embodiments for the purpose of streamlining the disclosure. This method of disclosure is not to be interpreted as reflecting an intention that the claimed embodiments require more features than are expressly recited in each claim. Rather, as the following claims reflect, inventive subject matter lies in less than all features of a single disclosed embodiment. Thus the following claims are hereby incorporated into the Detailed Description, with each claim standing on its own as a separately claimed subject matter.

CLAIMS

I claim:

1. A method for visual compensation comprising:
5 capturing an image using an imager;
detecting whether eyeglasses are present in the image; and
setting an electronic visual display to a larger font size, if eyeglasses are
not detected as present in the image.
- 10 2. A method according to claim 1 further comprising:
setting the electronic visual display to a normal font size, if eyeglasses
are detected as present in the image.
3. A method according to claim 1 further comprising:
15 receiving a user interaction trigger prior to the capturing.
4. A method according to claim 3 wherein the user interaction trigger is
an incoming call or message.
- 20 5. A method according to claim 3 wherein the user interaction trigger is a
touch screen activation.
6. A method according to claim 5 wherein the touch screen activation is
an unlock command.
25
7. A method according to claim 3 wherein the user interaction trigger is a
detection of acceleration of the electronic visual display.
8. A method according to claim 3 wherein the user interaction trigger is a
30 detection of a key press.

9. A method according to claim 1 further comprising:
activating a digital imager prior to the capturing.
- 5 10. A method according to claim 1 further comprising:
aligning the imager to face the same direction as the electronic visual
display, prior to the capturing.
11. A device for visual compensation comprising:
10 an imager, for capturing an image;
a processor, coupled to the imager, for:
detecting if eyeglasses are in the image, and
setting a font size to “large” if eyeglasses are not detected in the
image;
15 an electronic visual display, coupled to the processor, for displaying
using the font size.
12. A device according to claim 11 wherein the processor is also for:
setting the font size to “normal” if eyeglasses are detected in the image.
20
13. A device according to claim 11 further comprising:
a receiver, coupled to the processor, for receiving an incoming call or
message signal.
- 25 14. A device according to claim 11 further comprising:
an accelerometer, coupled to the processor, for detecting a movement
of the device.
15. A device according to claim 11 further comprising:

a memory, coupled to the processor, for storing the font size setting of “large”.

16. A device according to claim 15 wherein the memory also stores the font
5 size setting of “normal”.

17. A device according to claim 11 further wherein the processor
comprises:

a facial recognition engine for the detecting.

10

18. A device according to claim 11 further comprising:
a key.

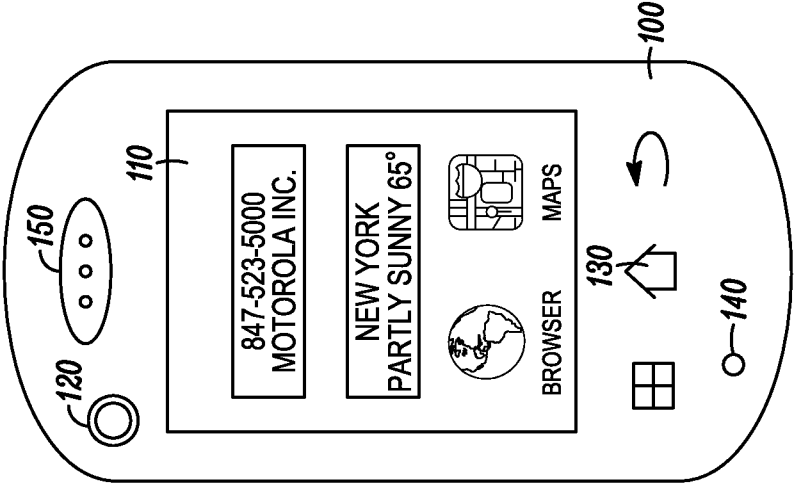


FIG. 1

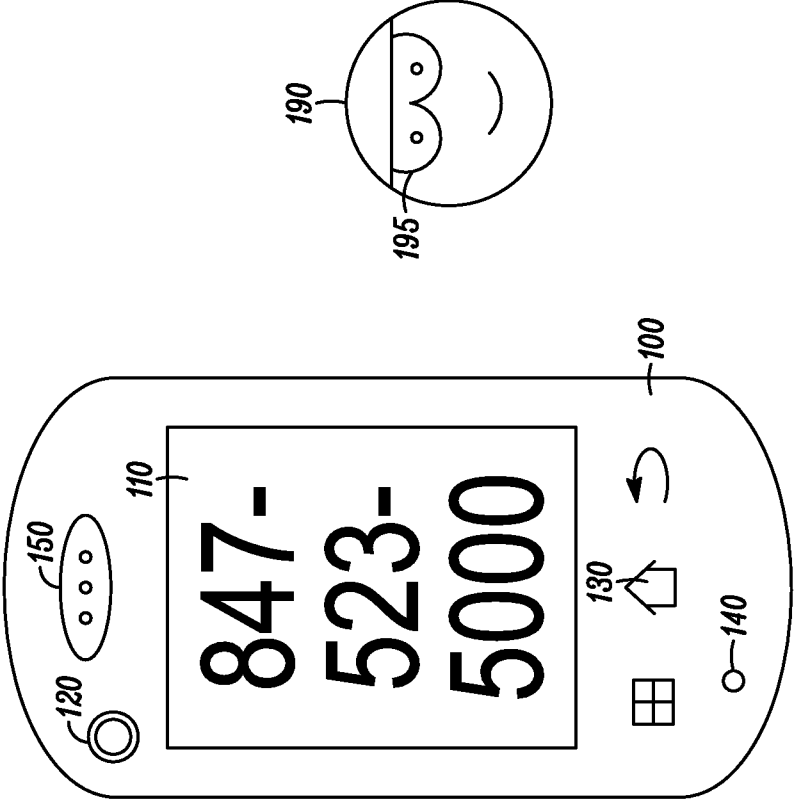


FIG. 2

2/3

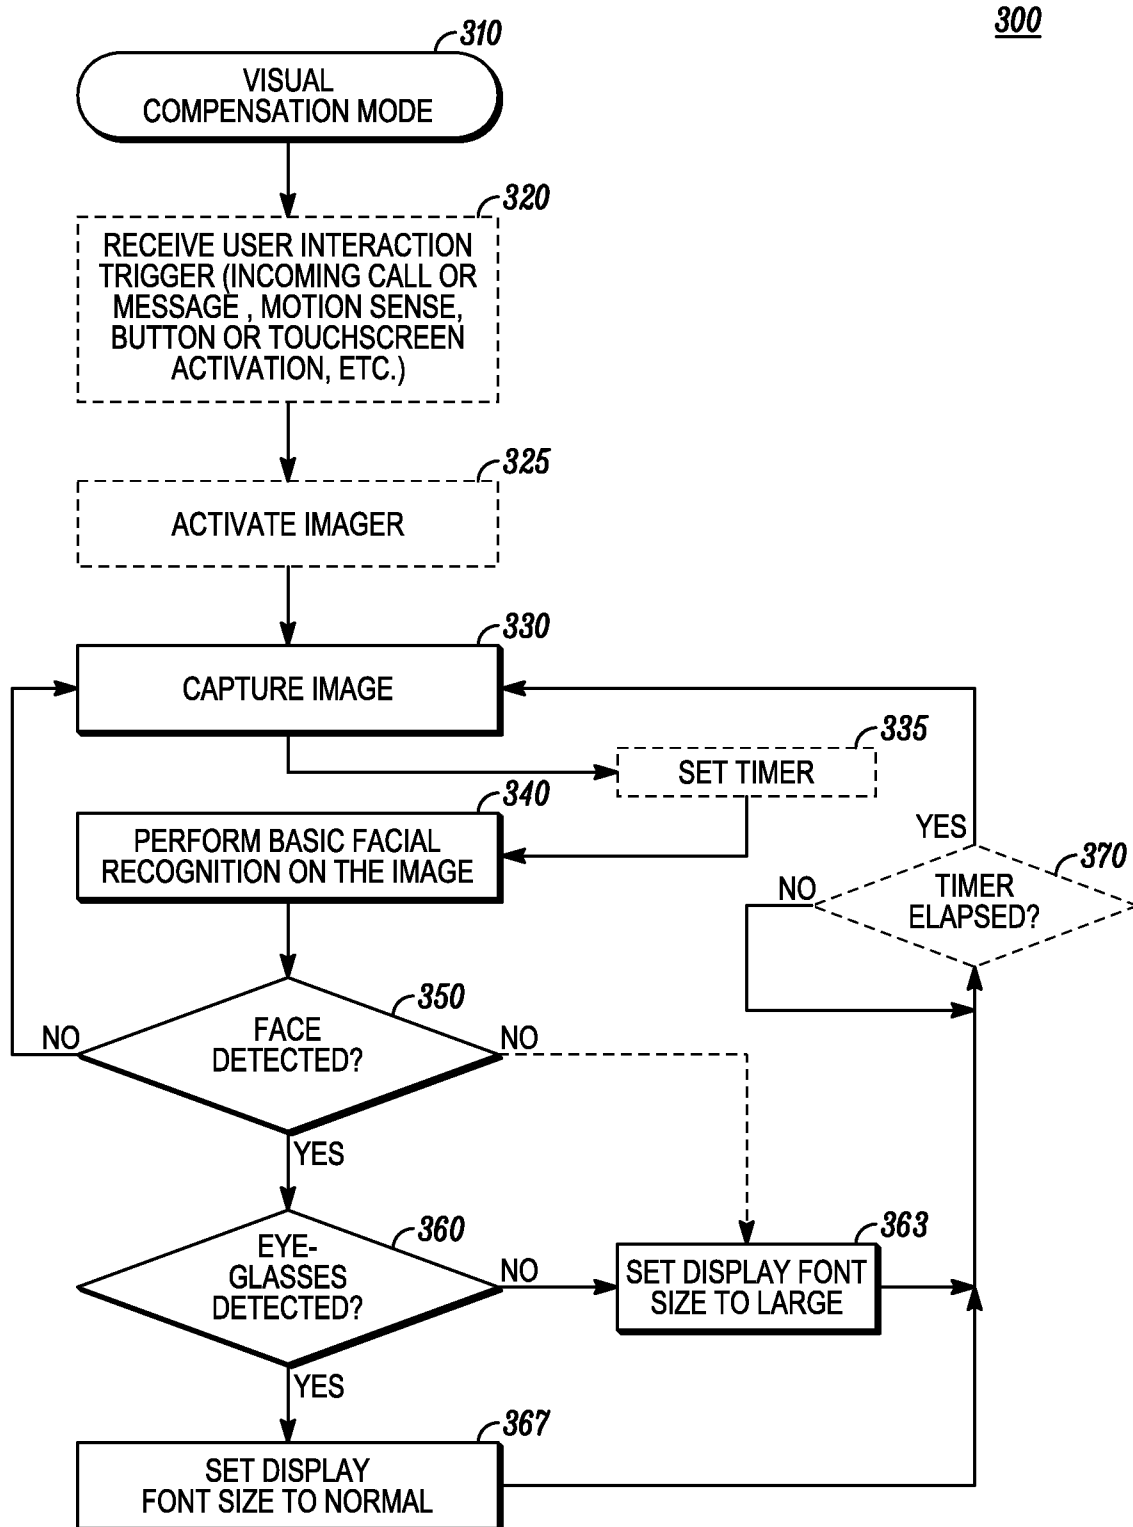


FIG. 3

100

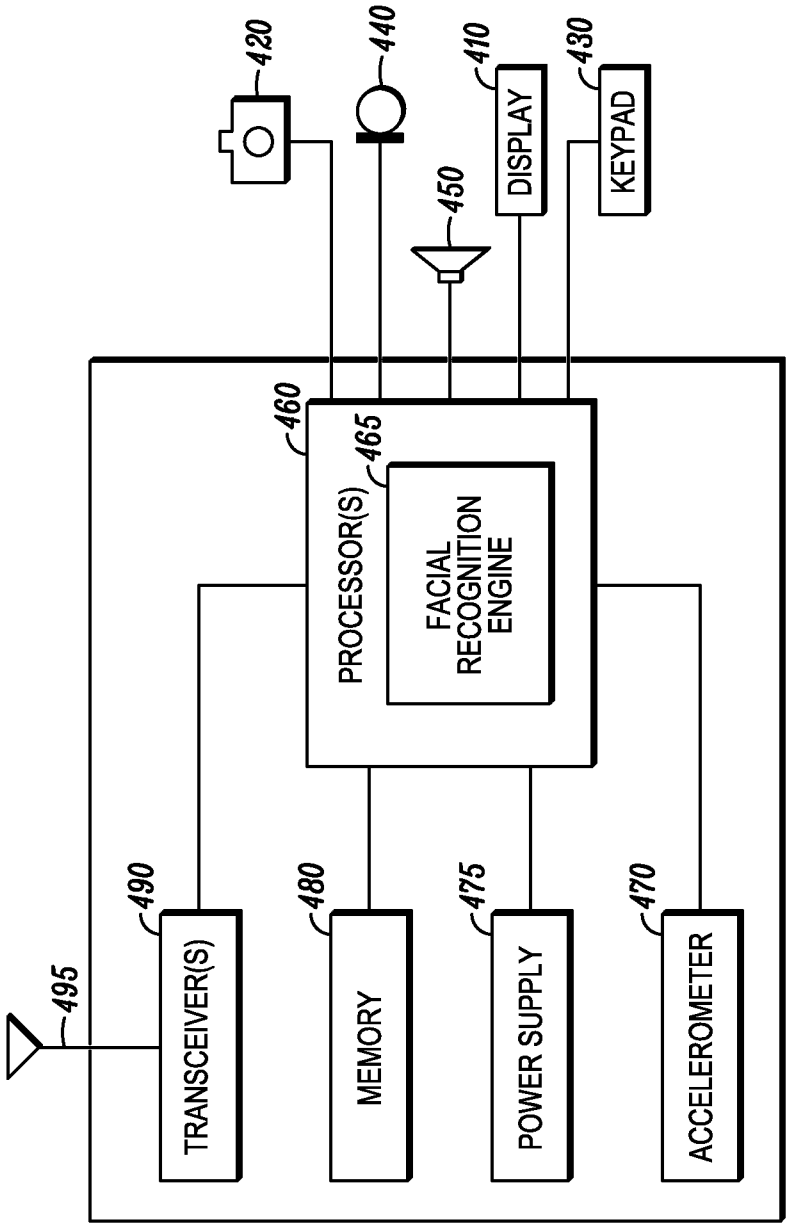


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2010/061425

A. CLASSIFICATION OF SUBJECT MATTER

INV. G06F3/01 G09B21/00 H04N5/445 G06F3/048 G06F17/21
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G06F G09B H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2009/081239 A1 (SONY ERICSSON MOBILE COMM AB [SE]; THORN KARL OLA [SE]) 2 July 2009 (2009-07-02) page 1, line 26 - page 2, line 2 page 10, line 8 - line 16 -----	1-18
A	EP 1 939 582 A1 (AISIN SEIKI [JP]; TOYOTA MOTOR CO LTD [JP]) 2 July 2008 (2008-07-02) paragraph [0005] - paragraph [0006] paragraph [0053] -----	1-18
A	EP 1 426 919 A1 (SONY INT EUROP GMBH [DE]) 9 June 2004 (2004-06-09) the whole document -----	1-18



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

22 March 2011

Date of mailing of the international search report

29/03/2011

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Most, Stefanie

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2010/061425

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2009081239 A1	02-07-2009	EP 2220548 A1 US 2009164896 A1	25-08-2010 25-06-2009
EP 1939582 A1	02-07-2008	CN 101310161 A JP 4445454 B2 JP 2007114029 A WO 2007046477 A1 US 2009279786 A1	19-11-2008 07-04-2010 10-05-2007 26-04-2007 12-11-2009
EP 1426919 A1	09-06-2004	JP 2004185007 A US 2004160386 A1	02-07-2004 19-08-2004