

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 September 2004 (10.09.2004)

PCT

(10) International Publication Number
WO 2004/077806 A1

(51) International Patent Classification⁷: **H04M 9/08**, 1/60

(74) Agent: AROS PATENT AB; P.O. Box 1544, S-751 45 Uppsala (SE).

(21) International Application Number:

PCT/SE2004/000261

(22) International Filing Date: 25 February 2004 (25.02.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/449,879 27 February 2003 (27.02.2003) US

(71) Applicant (for all designated States except US): TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).

(72) Inventors; and


(75) Inventors/Applicants (for US only): TRUMP, Tönu [EE/SE]; Bäverbäcksgränd 95, S-124 62 Bandhagen (SE). ERIKSSON, Anders [SE/SE]; Smålandsvägen 2, S-757 58 Uppsala (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: AUDIBILITY ENHANCEMENT

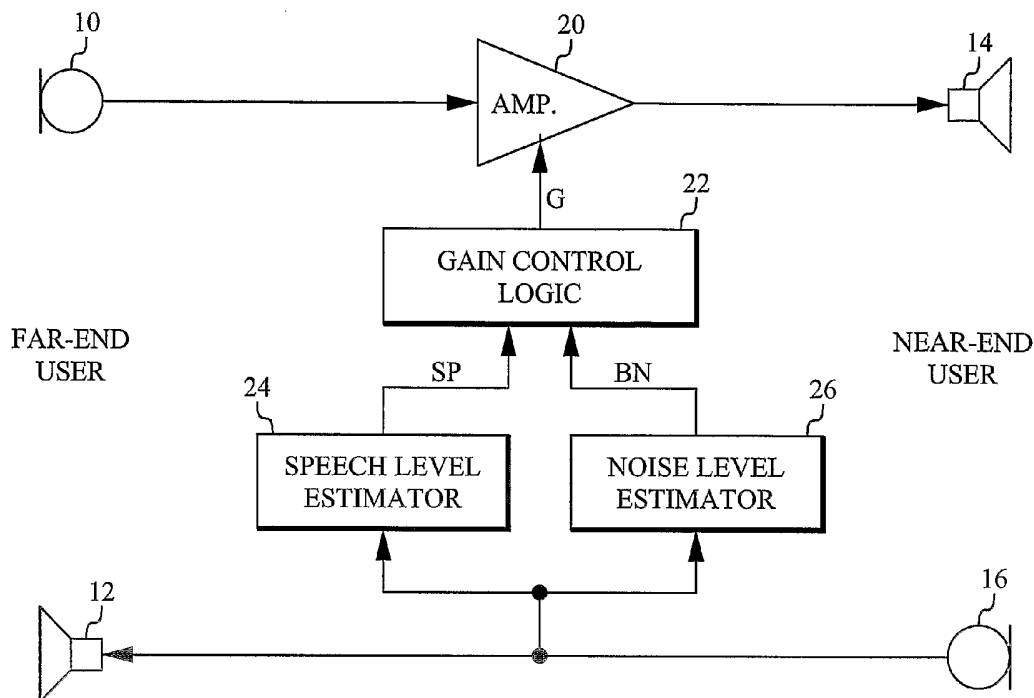

(57) Abstract: An apparatus for enhancing audibility of a far-end speech signal from a far-end user to a near-end user in a telephony system includes a near-end back-ground noise signal level estimator (26) at the near-end user. A near-end speech signal level estimator (24) is also provided at the near-end user. A gain control logic (22) determines a gain (G) for amplification of the far-end speech signal based on both estimated speech and background noise signal levels.



Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

AUDIBILITY ENHANCEMENT

TECHNICAL FIELD

This invention relates to audibility enhancement by controlling the level of the loudspeaker signal in a terminal, for example a mobile handset, in a telephone system when used in a noisy environment.

BACKGROUND

When making a telephone call in a noisy environment the audibility of the far-end speech may at times be low, since the loudspeaker signal may be drowned by the background noise at the near-end. At such occasions, it would be beneficial to increase the loudness of the far-end speech signal in order to improve the audibility.

Most mobile terminals used today include a manual volume control that can be used for increasing the loudspeaker volume. However, this may not always solve the problem of enhancing the audibility, and that mainly depends on the so-called side-tone that most often is included in a mobile terminal. The side-tone adds a portion of the talkers voice to the loudspeaker in order to make the terminal sound "more alive". Typically, the side-tone is at a level of approximately 10-20 dB below the microphone level, see [1]. The perception of the side-tone is very sensitive to the time-delay between the side-tone and the talkers voice. This time-delay should preferably be short, hence the side-tone has traditionally been implemented as an attenuated (by 10-20 dB) version of the microphone signal.

Although the side-tone is intended to add the talkers voice to the loudspeaker, any background environmental noise may also be added to the loudspeaker via the side-tone, thus causing the far-end voice to be contaminated by near-end noise. If the near-end background environmental noise is very high, this may cause the audibility of the far-end speech to be reduced

due to a low signal-to-noise ratio. In this situation it is desirable for the user to increase the level of the far-end speech. Depending on the implementation of the volume control in the terminal, this may or may not increase the audibility. If the volume control is implemented (digitally) on the down-link signal and the side-tone level is not connected to the volume level, then the signal-to-noise ratio of the far-end speaker will be increased by this action. Should, however, the volume control be implemented as an analogue amplification of the loudspeaker signal, or the side-tone level is dependent on the volume setting of the phone, then the mobile terminal user is not helped by any manual volume control in the handset, since this will amplify both the far-end speech and the near-end noise stemming from the side-tone, and the signal-to-noise ratio will remain at a constant value regardless of the loudspeaker volume level.

The problem of increasing the audibility has been addressed in [2] by including a processing function in the network that amplifies the far-end signal based on the noise level present at the mobile user side. Since this amplification only affects the far-end signal and not the noise signal added locally in the terminal via the side-tone, this approach will increase the signal to noise ratio.

The solution described in [2] amplifies the far-end signal based on the noise level from the near-end. This solution is based on the assumption that whenever a user is present in an environment with a high background noise level, the user will benefit from an increased level of the far-end signal.

This assumption may be valid if the user is using a mobile terminal with a traditional design, i.e. a mobile handset where the side-tone is implemented as an attenuated replica of the microphone signal. However, with the increased diversity in the design of mobile terminals, there may be several situations when the user does not have any problem with the audibility of the far-end speaker, although the user is positioned in an environment with a high background noise. Examples of terminal equipment where there pos-

sibly are no problems with the audibility although used in a noise environment are:

1. Handsets with volume control that does not affect the side-tone level or with more advanced side-tone implementations (including noise suppressing techniques in the side-tone).
2. Hands-free accessories designed for noisy conditions (such as car hands-free kits with loudspeaker volume and frequency characteristics dependent on the environmental noise) and for which there are no side-tones added to the loudspeaker.
3. Headsets or ear-plugs which reduce the perceived environmental noise level.
4. Handsets with active noise control.

This should not be seen as an exclusive list, but serve as examples of terminal equipment that are designed to operate properly in environments with a high acoustical background noise.

In situations where the terminal equipment has been designed to operate in noisy conditions, any level adjustment made in the network may degrade the overall perceived quality of the conversation. Firstly, raising the level of the far-end speech may cause the terminal equipment at the near-end to not function as designed. Secondly, and perhaps most important, the speech and talker levels in a conversation is coupled via the human perception of speech levels. As outlined in the following, any amplification of the signal in the network may influence the speech levels in a non-desired way if implemented without specific knowledge of the situation.

In a conversation, a talker tends to adjust the level of the voice to the level of the other party and also to the background noise. Similarly, when exposed to

speech in a telephone conversation via a loudspeaker (either in a handset, hands-free or headset), a talker tends to adjust the voice level to a similar level as perceived from the loudspeaker. Thus, if the level of the far-end speech is raised the near-end user is also likely to unconsciously increase the voice level. If the terminal equipment at the near-end has been designed to work properly even in an environment with a high background noise, this increase of the voice level is affecting the user in a negative way (e.g. more strain to the voice) without adding any benefit of increased audibility.

An example of the problem described in the previous section is when using a headset in a noisy environment. With a proper design of the headset, the user is likely to have no problems hearing the far-end talker at nominal signal levels and is likely to talk at a comfortable and natural speech level. Should, however, the level of the far-end talker be increased by any network equipment (due to the measurement of a high background noise level from the near-end), the near-end talker may unconsciously also increase the voice level with more strain to the voice and less privacy as an effect.

In the example above it should be noted that with a headset the user is less exposed to the background noise and the voice is not raised due to the high level of the background noise, as would be the case if using an ordinary handset. When using an ordinary handset in a noisy environment and being fully exposed to the background noise and having a side-tone in the handset with a high noise level, the near-end user would benefit from having an increased far-end speech level, as outlined in the previous section.

Thus, there is a need for an improved method for enhancing the audibility for users of ordinary mobile handset without degrading the overall performance in situations with terminal equipment designed for environments with high near-end background noise.

SUMMARY

An object of the present invention is to selectively adjust the far-end signal level in situations when this increases audibility and to leave the far-end signal essentially unaltered when it does not.

Briefly, the solution to the described problem is based on adjusting the signal level of the far-end speaker as a function varying in both the near-end background noise level and the near-end speech level.

This solution is based on the assumptions that if the terminal equipment at the near-end side is designed to operate in a noisy environment, it is likely that the near-end user will have a speech level close to the nominal level. Similarly, if the near-end user is in a situation where there is a high likelihood of experiencing problems with the audibility of the far-end, the near-end speech level is likely to be high due to a raised voice level as an effect of the high background noise. The invention provides the advantage of increasing the audibility of the far-end speech for terminal users in noisy environments without degrading the performance for users with terminals designed for noisy conditions.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention, together with further objects and advantages thereof, may best be understood by making reference to the following description taken together with the accompanying drawings, in which:

FIG. 1 is a diagram illustrating the background of the present invention;

FIG. 2 is a block diagram of a first exemplary embodiment of an apparatus in accordance with the present invention;

FIG. 3 is a flow chart of an exemplary embodiment of the method in accordance with the present invention;

FIG. 4 is a block diagram of a second exemplary embodiment of an apparatus in accordance with the present invention;

FIG. 5 is a block diagram of a third exemplary embodiment of an apparatus in accordance with the present invention; and

FIG. 6 is a block diagram of a fourth exemplary embodiment of an apparatus in accordance with the present invention.

DETAILED DESCRIPTION

In the following description the same reference designations will be used for the same or similar elements throughout the figures of the drawings. Furthermore, in order to avoid cluttering of the figures, only elements necessary to explain the invention are shown in the drawings. Thus, elements such as radio equipment, speech coders/decoders, etc. have been omitted.

The problem at hand and the terminology used in this document is described in Fig. 1. A far-end or sending user provided with a telephone set having a microphone 10 and a loudspeaker 12 sends speech signals over a telephone network to a near-end or receiving user provided with a terminal having a loudspeaker 14 and a microphone 16. The terminal equipment at the near-end picks up near-end speech and near-end background noise in microphone 16. In some embodiments of the terminal equipment a portion of this noise is added to the received far-end signal as a side-tone before the combined signal reaches near-end loudspeaker 14. As noted above, this side tone may or may not influence the audibility of the received far-end speech signal. In a noisy near-end environment audibility may be enhanced by the network, for example by amplifying the far-end signal as described in [2]. However, as was also described above, this may not always be desirable. Thus, a more flexible method that can cope with different needs would be desirable. Such a method is an object of the present invention.

Fig. 2 is a block diagram of a first exemplary embodiment of an apparatus in accordance with the present invention. The far-end signal is amplified by an amplifier 10 having a gain G controlled by a gain control logic 22. Gain control logic 22 controls the gain by using level estimates SP and BN of both the near-

end speech signal and the near-end background noise. These are derived from the near-end signal in accordance with, for example, the methods described in APPENDIX 1 and APPENDIX 2, respectively. These estimations are performed by estimators 24 and 28, respectively

Fig. 3 is a flow chart of an exemplary embodiment of the gain control method in accordance with the present invention. Step S1 estimates the current near-end speech level SP , for example in accordance with the method described in APPENDIX 1. Step S2 estimates the current near-end background noise level BN , for example in accordance with the method described in APPENDIX 2. Step S3 tests whether the signal-to-noise ratio SP/BN exceeds a threshold TH , which typically lies in the interval 5-15 dB, for example it may be equal to 9 dB. If SP/BN does not exceed threshold TH , the gain G is set to 0 dB (gain=1) in step S4.

If SP/BN does exceed threshold TH , the procedure performs step S5, which tests whether the determined speech level SP exceeds a predetermined minimum speech level $SP0$, which typically lies in the interval -35 - -15 dBm0, for example it may be equal to -25 dBm0. If SP does not exceed this minimum level, step S6 sets the speech contribution GS of the total gain G to 0 (dB). Otherwise step S7 sets the speech contribution GS of the total gain G to

$$GS = \min(MaxGS, CS(SP - SP0))$$

where $MaxGS$ is the largest allowed value of GS and CS is a speech gain scaling factor. $MaxGS$ typically lies in the interval 2-8 dB, for example it may be equal to 5 dB. Scaling factor CS typically lies in the interval 0.1-1, for example it may be equal to 0.5.

Next, step S8 tests whether the determined background noise level BN exceeds a predetermined minimum background noise level $BN0$, which typically lies in the interval -50 - -30 dBm0, for example it may be equal to -40 dBm0. If BN does not exceed this minimum level, step S9 sets the background noise con-

tribution GN of the total gain G to 0 (dB). Otherwise step S10 sets the background noise contribution GN of the total gain G to

$$GN = \min(MaxGN, CN(BN - BN0))$$

where $MaxGN$ is the largest allowed value of GN and CN is a background noise scaling factor. $MaxGN$ typically lies in the interval 2-8 dB, for example it may be equal to 5 dB. Scaling factor CN typically lies in the interval 0.1-1, for example it may be equal to 0.5.

Finally, step S11 determines the total gain G in accordance with

$$G = \min(MaxG, GS + GN)$$

where $MaxG$ is the largest allowable total gain, which typically lies in the interval 5-15 dB, for example it may be equal to 10 dB.

In order to guarantee stability of the communication loop, the total loop gain must be less than unity. As the audibility enhancement function can increase the gain in one direction of transmission and thereby the total loop gain, there is a risk that loop stability may be lost. To avoid this from happening, the echo return losses (ERL) at one or both sides of the function may be estimated and the results may be accounted for when determining the gain G . The ERL values characterize attenuation at the corresponding ends of the loop. If the audibility enhancement function is integrated with other speech enhancement functions, the echo return loss estimates at the far and near ends can be obtained from a network echo canceller (EC) 28 and an acoustic echo canceller (AEC) 30, respectively, as illustrated in the second exemplary embodiment in Fig. 4. With these $MaxG$ may be made dependent on the echo return losses ERL_{NEAR} and ERL_{FAR} in accordance with

$$MaxG = \min(MaxGL, ERL_{NEAR} + ERL_{FAR} - M_S)$$

where $MaxGL$ is a constant largest gain limit, which typically lies in the interval 5-15 dB, for example it may be equal to 10 dB, and M_S is stability margin, which in a preferred embodiment lies in the interval 3-6 dB.

The audibility enhancement function may also include a peak level detector of the far-end signal. The information from this detector is used to guarantee that the amplified signal remains inside the dynamic range of the PCM codec i.e. to avoid peak saturation of the output signal. An embodiment having such a peak level detector 32 for determining a far-end peak level estimate L_y is illustrated in Fig. 5. The estimate L_y may, for example, be determined in accordance with the method described in APPENDIX 3. In this embodiment the largest allowable total gain $MaxG$ may be determined as

$$MaxG = \min\left(MaxGL, L_{SAT} - M_{SAT} - L_y\right)$$

where L_{SAT} is the saturation level of PCM code and M_{SAT} is a saturation margin in the interval 3-10 dB, for example it may be equal to 6 dB.

Fig. 6 is a block diagram of a fourth exemplary embodiment of an apparatus in accordance with the present invention. This embodiment combines the features of the embodiments of Fig. 2, 4 and 5. In this embodiment the largest allowable total gain $MaxG$ may be determined as

$$MaxG = \min\left(MaxGL, ERL_{NEAR} + ERL_{FAR} - M_S, L_{SAT} - M_{SAT} - L_y\right)$$

The actual gain applied to the far-end signal is preferably a low-pass filtered version of the determined gain G . The low-pass filter is preferably selected such that the rate-of-change of the applied signal gain is limited to the interval 5-15 dB/s, for example it may be equal to 10 dB/s.

The various blocks in the described embodiments of the present invention are typically implemented by a microprocessor, a digital signal processor or a micro/signal processor combination and corresponding software, However an ASIC (Application Specific Integrated Circuit) is also feasible.

Furthermore, the described audibility enhancement principles are applicable to both mobile and stationary terminals.

It will be understood by those skilled in the art that various modifications and changes may be made to the present invention without departure from the scope thereof, which is defined by the appended claims.

APPENDIX 1 - SPEECH LEVEL ESTIMATION

There are several known ways to estimate speech level SP , see e.g. [3]. The preferred embodiment uses a modified version of method B of recommendation P.56 (called "P,56" below) described in [3] that measures the so called active speech level.

For the purposes of this application it is desirable that the method is able to follow changes in speech level. One possibility to accomplish this is to divide the far-end signal into blocks of certain duration e.g. 10 seconds (possibly with some overlap) and compute the active speech level each time a new block is filled with signal samples. The drawback of this straightforward approach is that for blocks with no or little speech activity the method will output noise level. To avoid this from happening, an external voice activity detector may be used.

Instead of including an external voice activity detector, the decision whether the signal comprises speech and noise or noise only can be made by using internal variables used in the P.56 level measurement device. In the following, the P.56 level measurement method is described and then it is shown how its internal variables can be used to select relevant measurement intervals for which the output of the P.56 method is the active speech level and not the background noise level.

The P.56 level measurement device computes the envelope $q(t)$ of the signal by two-stage exponential averaging of the rectified signal values in accordance with:

$$\begin{aligned} p(t) &= g \cdot p(t-1) + (1-g) \cdot |x(t)|, \\ q(t) &= g \cdot q(t-1) + (1-g) \cdot |p(t)|, \end{aligned}$$

where $x(t)$ is the down-sampled (by 10) input signal and g is a predetermined constant $g = 0.9592$, $p(0) = 0$, $q(0) = 0$. Then a series of threshold values α

are applied to the envelope. The threshold values are spaced in geometric progression, at intervals of not more than 2:1 (6.02 dB) covering the dynamic range of the signal. Let the threshold values be numbered in the order of increasing levels i.e. c_0 corresponds to the lowest threshold level. The series of activity counts, a_j , and corresponding hangover counts, h_j , are then found by comparing the envelope to the thresholds as follows:

For each value of j :

If $q(t) \geq c_j$, then $a_j = a_j + 1$ and $h_j = 0$;

If $q(t) < c_j$ and $h_j < I$, then $a_j = a_j + 1$ and $h_j = h_j + 1$

If $q(t) < c_j$ and $h_j = I$, then do nothing.

In the first case, the envelope is at or above the j th threshold, so that the speech is considered active as judged by that threshold level. In the second case, the envelope is below the threshold, but the speech is still considered active because the corresponding hangover has not yet expired. In the third case, the speech is inactive as judged by the threshold level in question. $I = 160$ is a constant.

Additionally the P.56 level measurement device computes the sum of squares of the down-sampled input signal over the measurement interval of length n in accordance with:

$$sq = \sum_{t=0}^{n-1} x^2(t)$$

The active speech level estimate is computed for each j as:

$$A_j = \frac{sq}{a_j}.$$

Finally, the level A_j which is closest to its corresponding threshold c_j times a margin m (15.9 dB) is selected as the active speech level SP . For the result to

be valid the measurement interval should be selected such that it mostly contains active speech.

Since the value of the lowest threshold c_0 is lower than most background noise levels, it follows that the activity count for lowest the threshold a_0 is increased by one with (almost) every incoming sample. Similarly, if the input signal comprises speech and background noise, all the activity counts below the noise level are increased by one with every incoming sample. It also follows, that:

$$a_i \leq a_j \text{ if } i > j.$$

These observations lead to a simple way to decide whether the current block of data mostly consists of speech or noise samples. The procedure is as follows:

With each incoming sample and after updating the activity counts, find the first activity count a_m having a value that is less than 75% of the activity count corresponding to the lowest threshold a_0 . The search should start from a_0 and proceed towards higher threshold values.

The above is equivalent to finding:

$$m = \min_i (a_i < 0.75a_0).$$

Then check if a_m has reached a predetermined value d_1 (preferred $d_1 = 2000$, which corresponds to approximately 2.5 seconds of active speech). If yes, then use the current block for computation of the active speech level and start a new measurement interval. Otherwise, check if the block length, n , is larger than a second predetermined value d_2 (preferred $d_2 = 4d_1$). If this is the case, drop the current block as it consists mostly of noise only samples and start a new measurement interval. If none of the above is the case, then continue collecting data into the current measurement interval.

To obtain more reliable results it is preferred to add the activity counts and the sums of squared input samples from several most recent valid measurement intervals (preferred 3) before computing the active speech level.

APPENDIX 2 - NOISE LEVEL ESTIMATION

The near-end background noise level BN can be estimated using well-known techniques. For example, an estimate of the noise level can be obtained by first low pass filtering squared samples of the signal in accordance with:

$$P_x(t) = \rho_x \cdot P_x(t-1) + (1 - \rho_x) \cdot x^2(t)$$

and then selecting the minimum value of the result over a proper observation interval. In the above equation $P_x(t)$ is the short-term power estimate of signal x at time t and $0 \leq \rho_x \leq 1$ is a constant, for example equal to 0.01. The observation interval should be selected long enough to guarantee that some part of the signal in the observation interval comprises noise only. On the other hand the interval should be short enough to allow the estimate to follow changes in background noise. The interval is typically selected in the range 5-15 seconds, for example 10 seconds.

Alternatively, if the audibility enhancement function is integrated with other voice enhancement functions, the acoustic echo control function may provide the background noise level estimate.

APPENDIX 3 – PEAK LEVEL DETECTOR

The peak level detector can be implemented by first computing a short-term power estimate of the far-end signal in accordance with:

$$P_y(t) = \rho_y \cdot P_y(t-1) + (1 - \rho_y) \cdot y^2(t).$$

where $0 \leq \rho_y \leq 1$ is a constant, for example equal to 0.01. The far-end peak level estimate L_y can then be obtained by following calculations:

$$\begin{aligned} &\text{If } L_y(t) \leq P_y(t), \text{ then } L_y(t) = P_y(t), \\ &\text{else } L_y(t) = \beta L_y(t-1), \end{aligned}$$

where β is a predetermined constant, selected to be close to but less than unity. For example, $\beta = 0.998$ may be selected. Preferably downscaling of the peak level estimate by β is done only when near-end speech is present i.e. the estimate is not modified during the speech pauses.

REFERENCES

- [1] ITU-T Recommendation G.121.
- [2] US Patent No. 5,524,148, Allen et al.
- [3] ITU-T Recommendation P.56.

CLAIMS

1. A method of enhancing audibility of a far-end speech signal from a far-end user to a near-end user in a telephone system by applying a gain to said far-end signal that depends on an estimated near-end background noise signal level, **characterized by**

determining said gain as a function varying in both said estimated near-end background noise signal level and an estimated near-end speech signal level.

2. The method of claim 1, **characterized by**

determining a first threshold from an estimated maximum far-end speech signal level;

limiting said gain to values below said first threshold.

3. The method of claim 1, **characterized by**

determining a second threshold from at least one estimated echo return loss;

limiting said gain to values below said second threshold.

4. the method of claim 1, **characterized by**

determining a first threshold from an estimated maximum far-end speech signal level;

determining a second threshold from at least one estimated echo return loss;

limiting said gain to values below the smallest of said first and second thresholds.

5. The method of any of claims 1-5, **characterized by** low pass filtering said determined gain before application to said far-end speech signal.

6. An apparatus for enhancing audibility of a far-end speech signal from a far-end user to a near-end user in a telephone system by applying a gain to said far-end signal that depends on an estimated near-end background noise signal level, **characterized by**

gain control logic (22) for determining said gain (G) as a function varying in both said estimated near-end background noise signal level (BN) and an estimated near-end speech signal level (SP).

7. The apparatus of claim 6, **characterized by**

means (22) for determining a first threshold from an estimated maximum far-end speech signal level (L_y);

means (22) limiting said gain to values below said first threshold.

8. The apparatus of claim 6, **characterized by**

means (22) for determining a second threshold from at least one estimated echo return loss (ERL_{NEAR} , ERL_{FAR});

means (22) for limiting said gain to values below said second threshold.

9. the apparatus of claim 6, **characterized by**

means (22) for determining a first threshold from an estimated maximum far-end speech signal level (L_y);

means (22) for determining a second threshold from at least one estimated echo return loss (ERL_{NEAR} , ERL_{FAR});

means (22) for limiting said gain to values below the smallest of said first and second thresholds.

10. The apparatus of any of claims 6-9, **characterized by** a low pass filter for filtering said determined gain before application to said far-end speech signal.

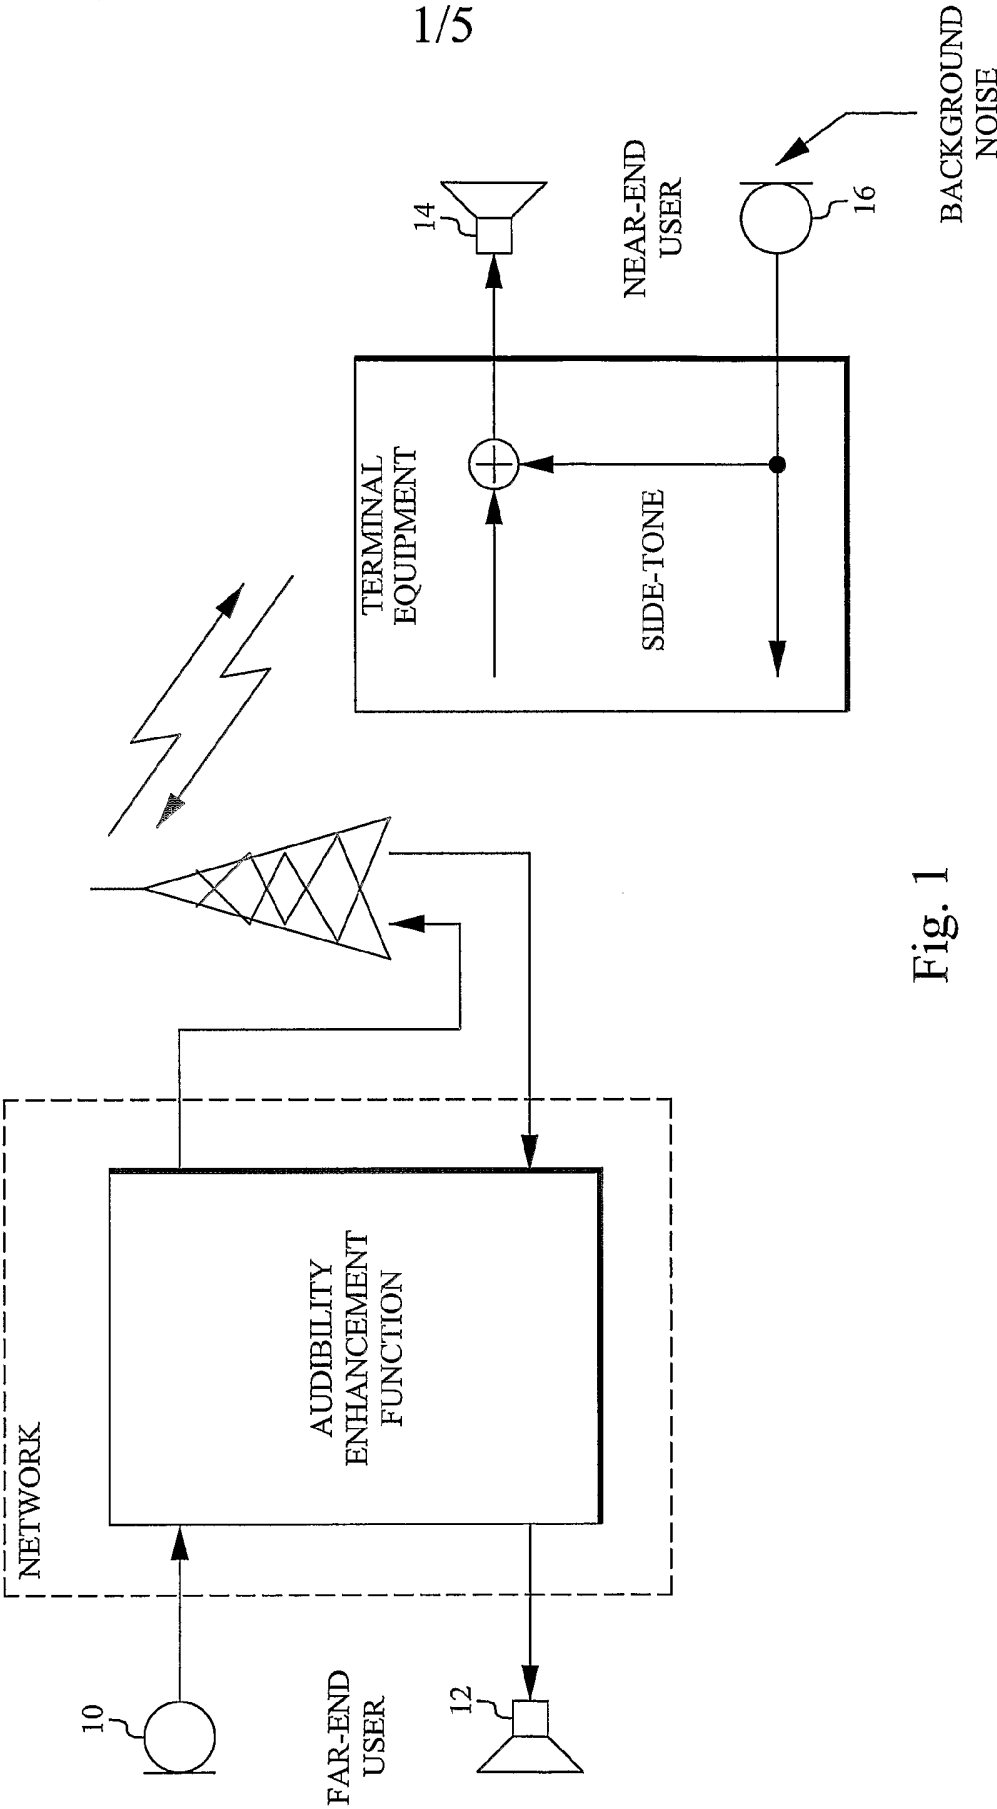


Fig. 1

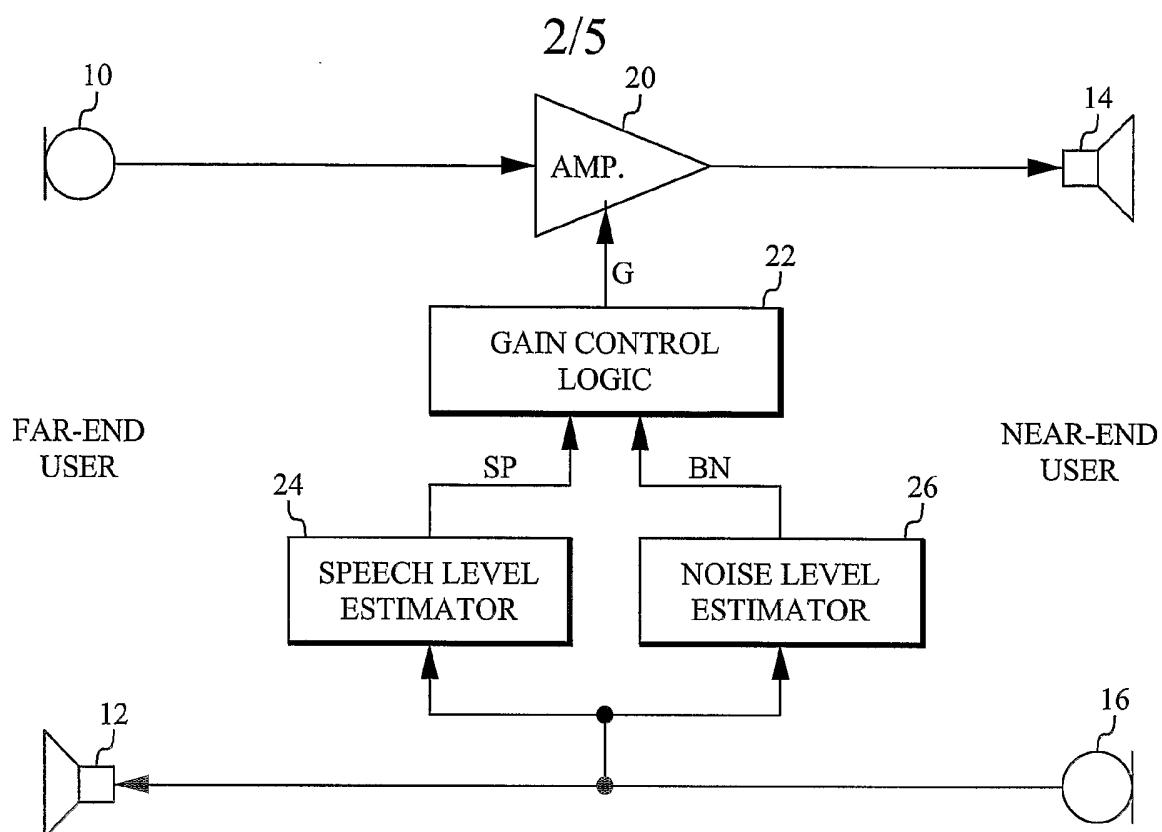


Fig. 2

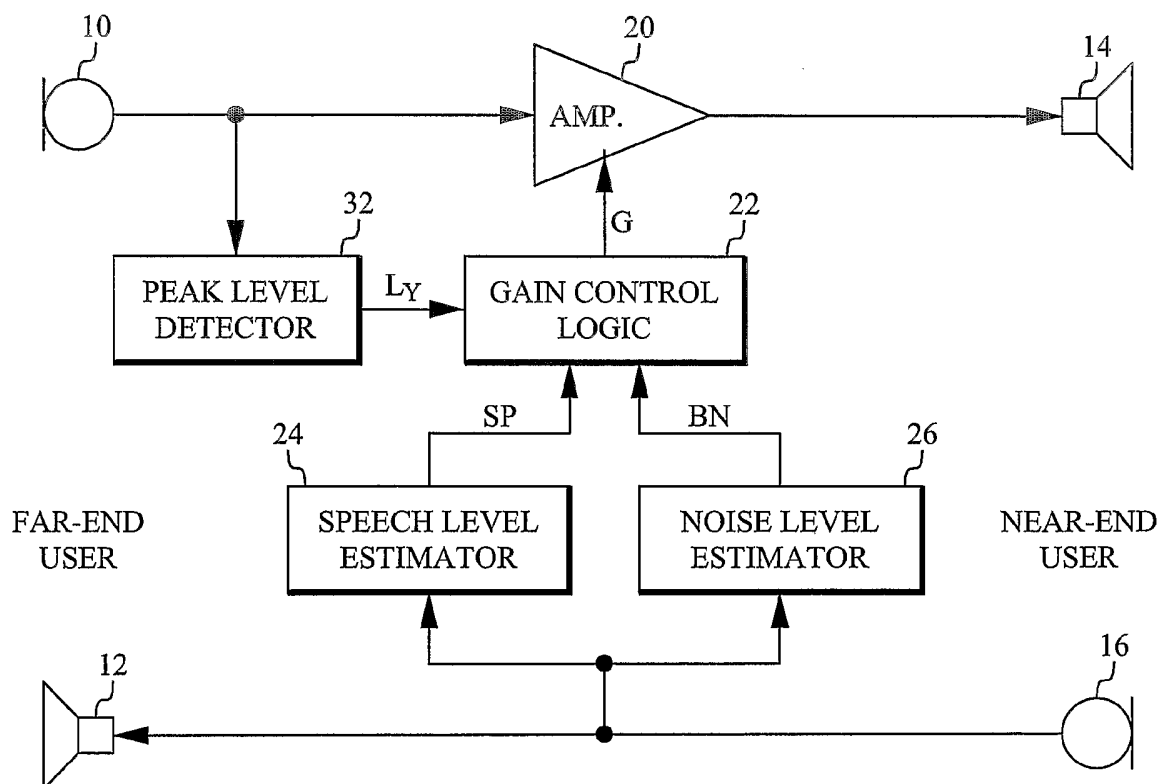


Fig. 5

3/5

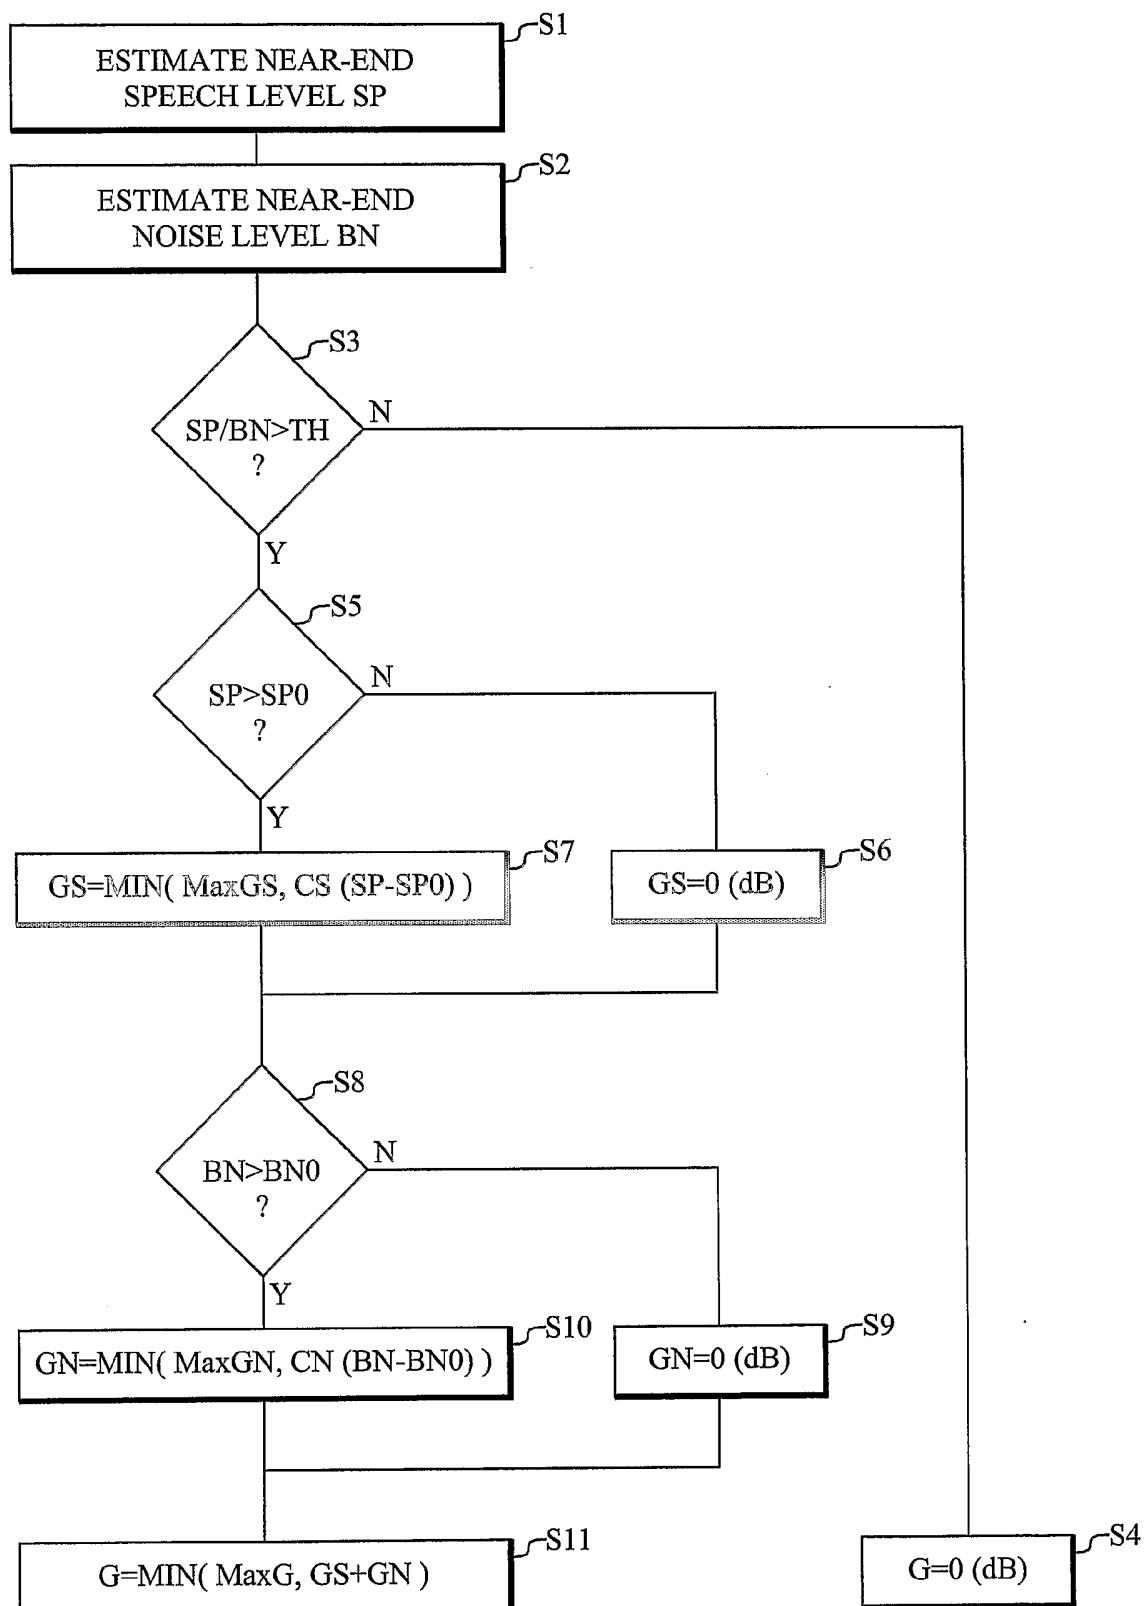


Fig. 3

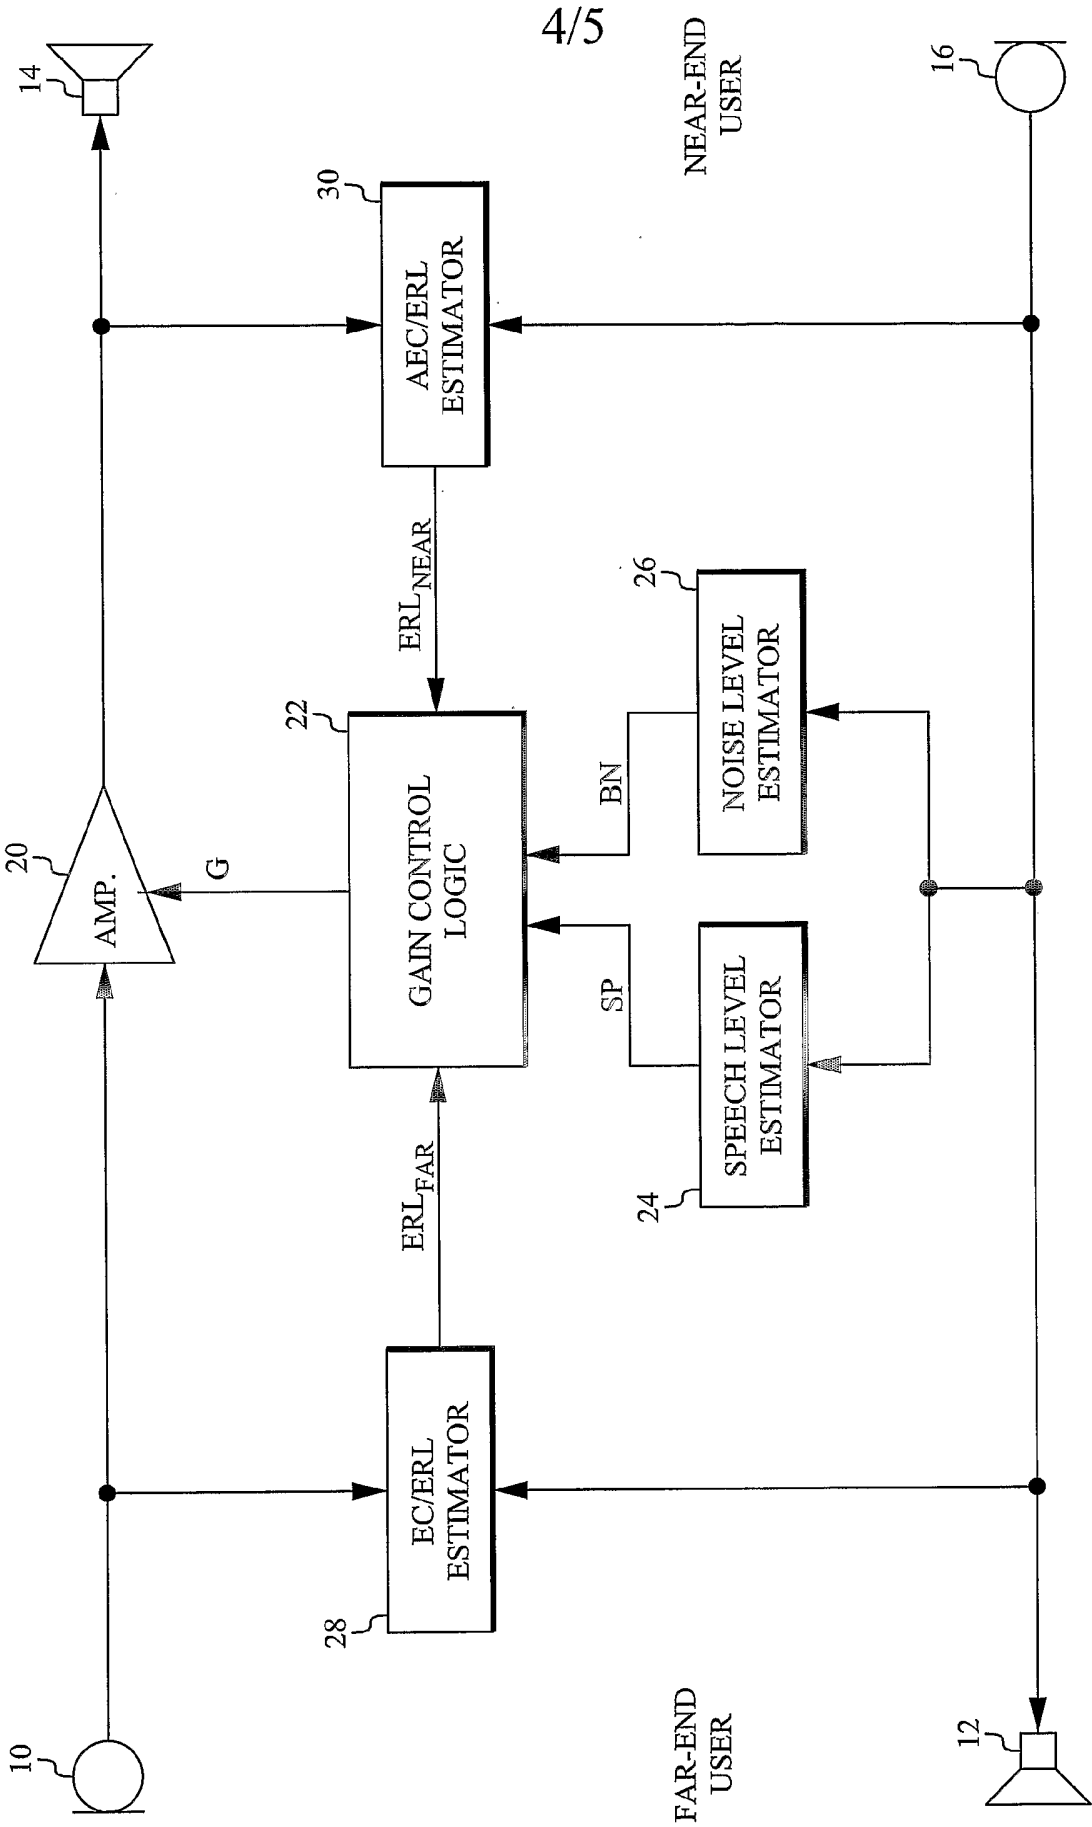


Fig. 4

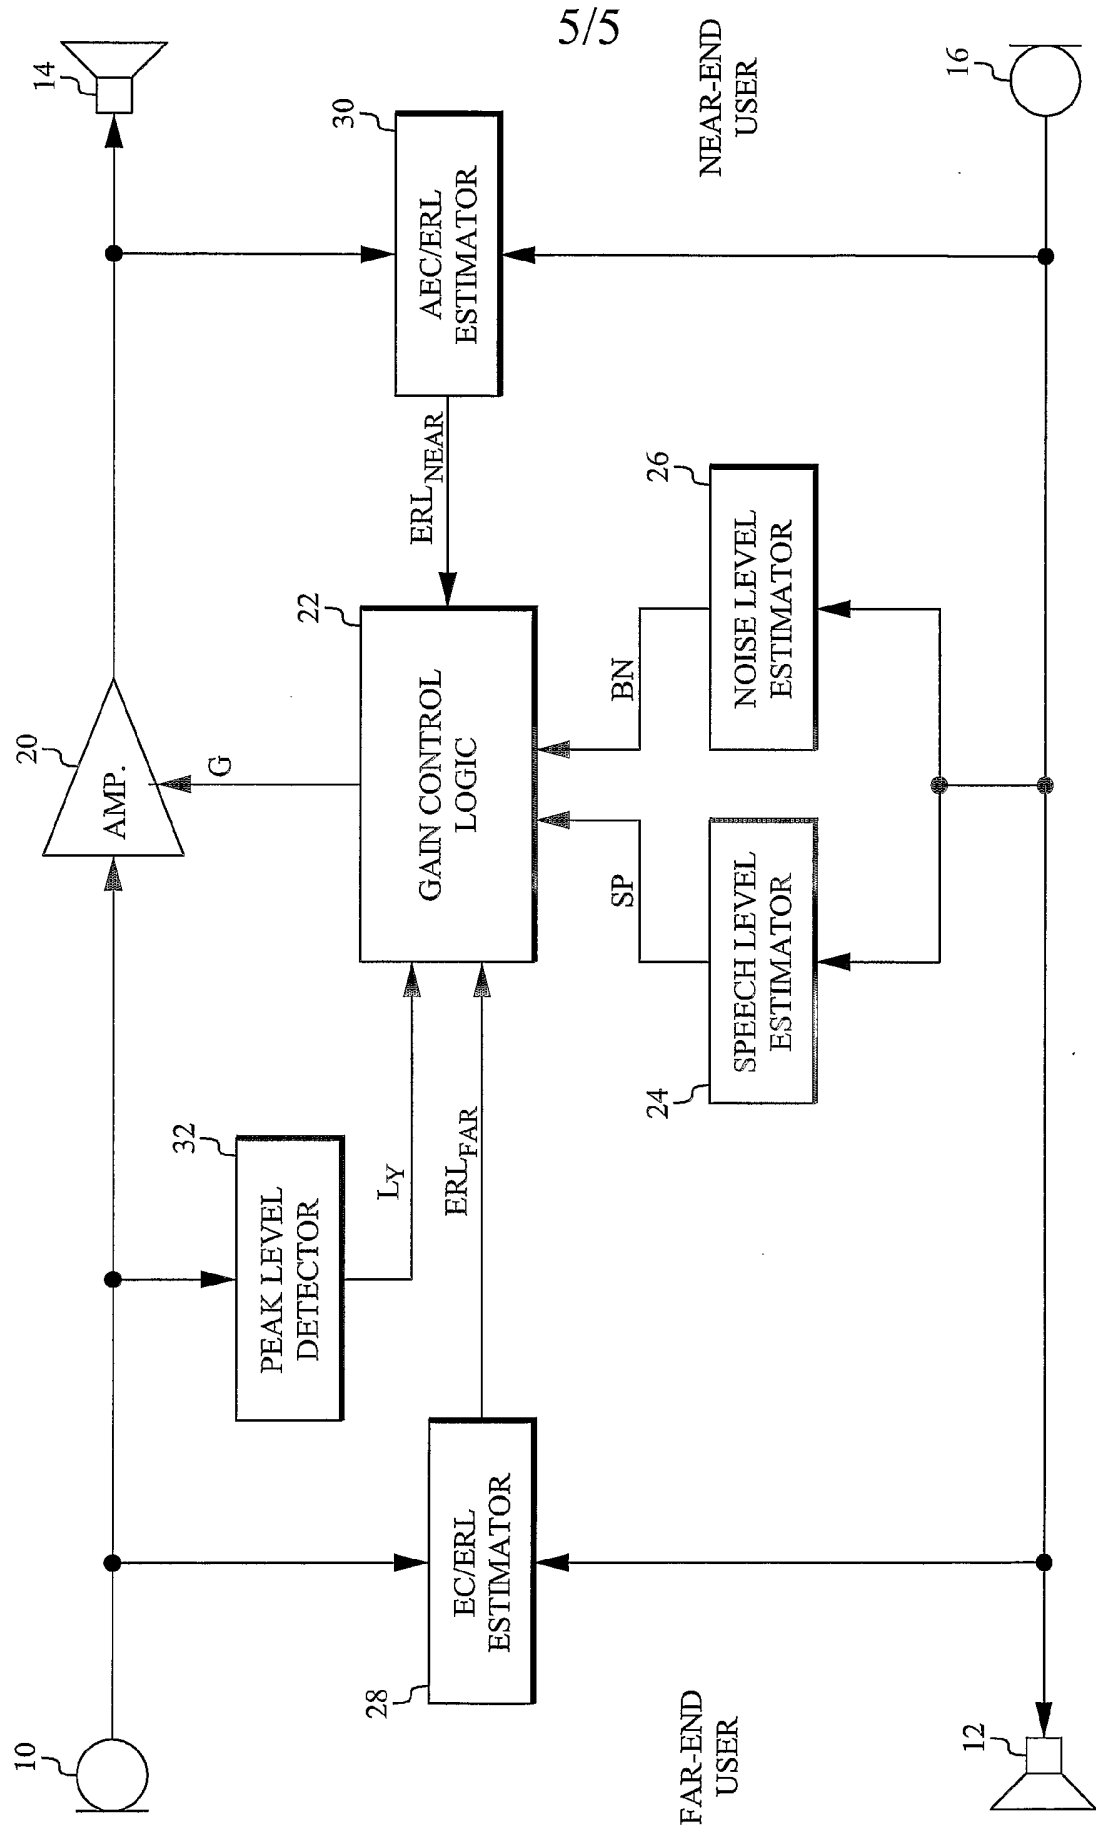


Fig. 6

INTERNATIONAL SEARCH REPORT

International Application No
PCT/SE2004/000261

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04M9/08 H04M1/60

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04M H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 205 217 B1 (NOBUSAWA HIDEAKI) 20 March 2001 (2001-03-20) column 1, line 59 - column 2, line 41 column 3, line 27 - line 55 column 3, line 67 - column 4, line 12 column 4, line 28 - line 51	1-10
A	US 5 524 148 A (ALLEN JONATHAN B ET AL) 4 June 1996 (1996-06-04) cited in the application column 4, line 1 - line 34 column 4, line 46 - column 5, line 39 column 6, line 52 - column 7, line 43	1-10
A	WO 00/39991 A (ERICSSON TELEFON AB L M) 6 July 2000 (2000-07-06) page 3, line 10 - line 19 page 9, line 16 - page 10, line 16	1-10



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

16 June 2004

Date of mailing of the international search report

23/06/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Sorrentino, A

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE2004/000261

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6205217	B1	20-03-2001	JP 3022807 B2	21-03-2000
			JP 10336305 A	18-12-1998
			AU 758050 B2	13-03-2003
			AU 6978498 A	03-12-1998
			GB 2327562 A	27-01-1999
US 5524148	A	04-06-1996	US 5485515 A	16-01-1996
			CA 2136366 A1	30-06-1995
			DE 69432853 D1	31-07-2003
			EP 0661860 A2	05-07-1995
			JP 7212468 A	11-08-1995
WO 0039991	A	06-07-2000	US 2003091180 A1	15-05-2003
			AU 2132100 A	31-07-2000
			CA 2356620 A1	06-07-2000
			CN 1331883 T	16-01-2002
			EP 1142288 A1	10-10-2001
			JP 2002534849 T	15-10-2002
			WO 0039991 A1	06-07-2000
			TW 453098 B	01-09-2001