




(86) Date de dépôt PCT/PCT Filing Date: 2001/01/16
 (87) Date publication PCT/PCT Publication Date: 2002/07/18
 (45) Date de délivrance/Issue Date: 2009/03/31
 (85) Entrée phase nationale/National Entry: 2003/07/15
 (86) N° demande PCT/PCT Application No.: IL 2001/000040
 (87) N° publication PCT/PCT Publication No.: 2002/056575

(51) Cl.Int./Int.Cl. *H04M 11/06* (2006.01),
H04M 1/02 (2006.01), *H04M 1/723* (2006.01)
 (72) Inventeur/Inventor:
 BINDER, YEHUDA, IL
 (73) Propriétaire/Owner:
 SERCONET LTD., IL
 (74) Agent: OGILVY RENAULT LLP/S.E.N.C.R.L.,S.R.L.

(54) Titre : PROCÉDE ET PRISE DE TELEPHONE PERMETTANT A UN TELEPHONE ET A UN EQUIPEMENT DE DONNEES D'ETRE CONNECTES A UNE LIGNE TELEPHONIQUE PAR UN CONNECTEUR COMMUN
 (54) Title: METHOD AND TELEPHONE OUTLET FOR ALLOWING TELEPHONE AND DATA EQUIPMENT TO BE CONNECTED TO A TELEPHONE LINE VIA A COMMON CONNECTOR

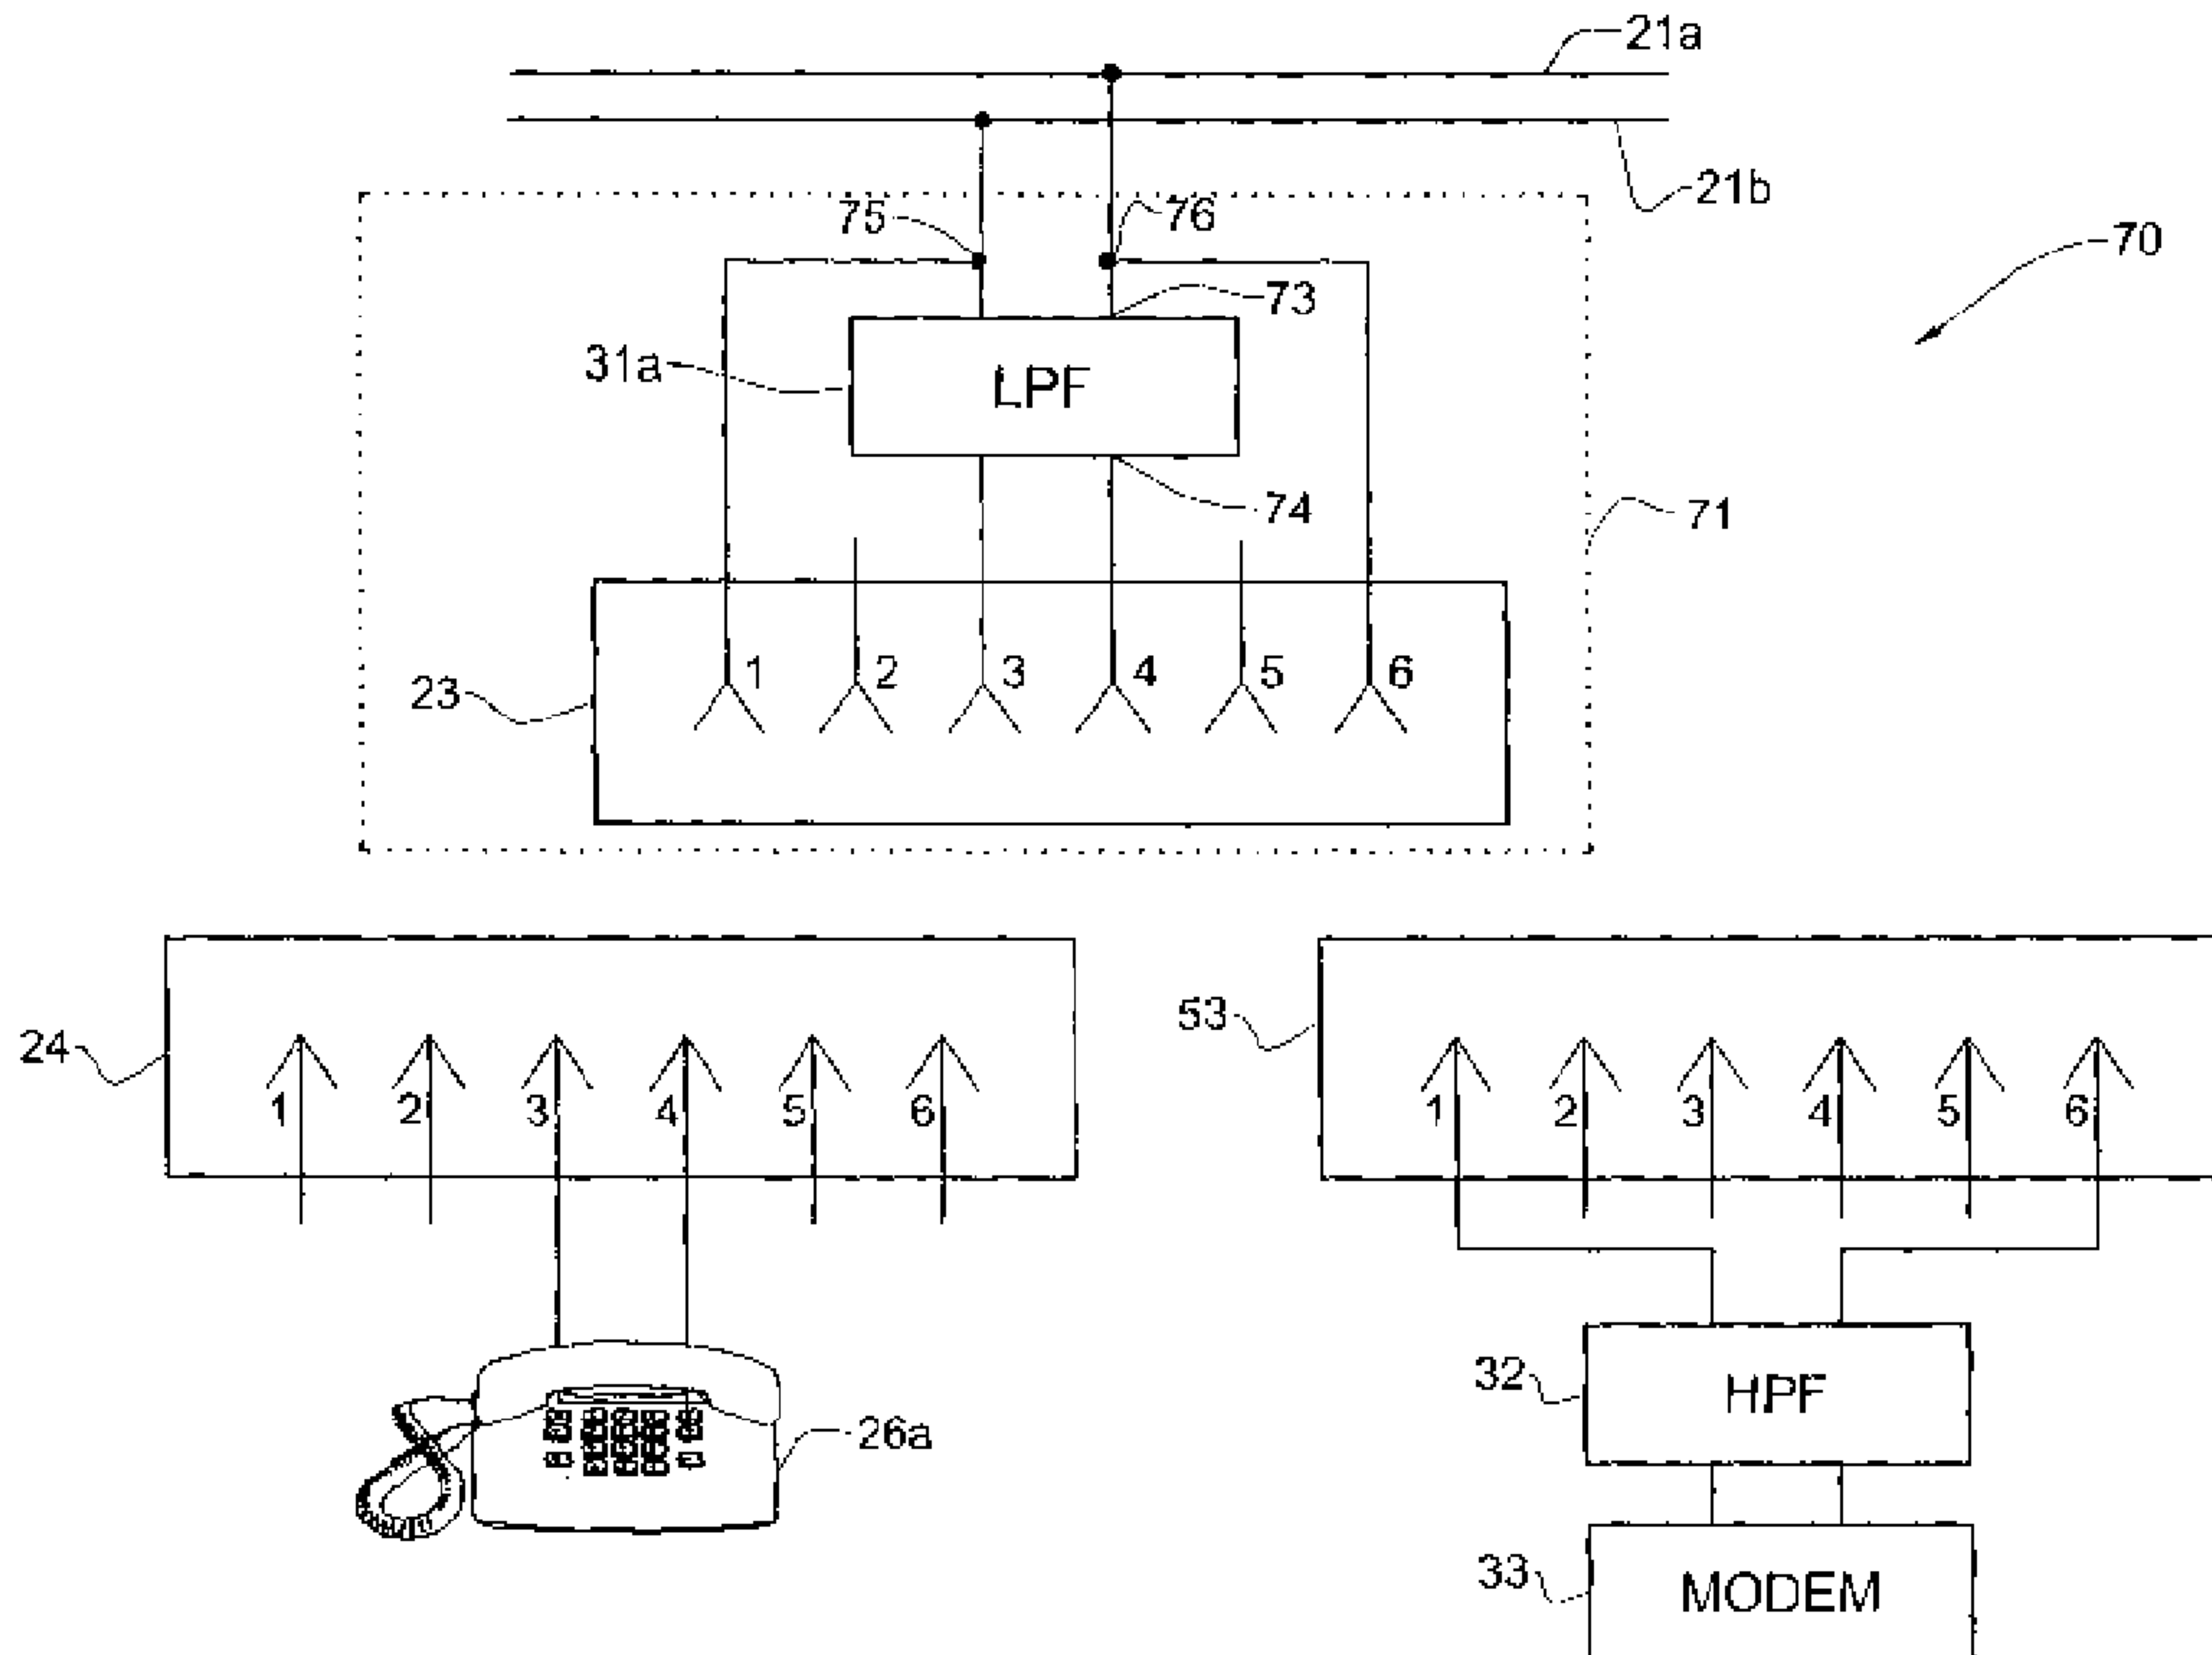

(57) Abrégé/Abstract:

A telephone outlet (71) simultaneously supporting both standard telephony and data communications over telephone wiring within a residence or other building. The outlet typically contains a low pass filter (31a), connected between the telephone wiring

(57) **Abrégé(suite)/Abstract(continued):**

(21a, 21b) and the telephone connector pins used for telephony (e.g. pins 2 and 3 in typical North-American RJ-11 connectors). In addition, a direct, unfiltered connection to the telephone wiring is supported via two other unused pins (e.g. pins 1 and 6 in typical North American RJ-11 6-pin connectors), thus allowing the connection of modems and high pass filters for access to the high frequency portion of the spectrum for data communications. Benefits include easy and direct connection of a telephone set or data devices to the same outlet, and elimination of the need to modify the telephone with low-pass filters or to provide an external module with a low-pass filter in series with the telephone. The direct, unfiltered connection to the telephone wiring also permits using a modified telephone having a low-pass filter, or an external module if so desired.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
18 July 2002 (18.07.2002)

PCT

(10) International Publication Number
WO 02/056575 A1

- (51) International Patent Classification⁷: **H04M 11/06**
- (21) International Application Number: PCT/IL01/00040
- (22) International Filing Date: 16 January 2001 (16.01.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **SERCONET LTD.** [IL/IL]; 16 Ha'Haroshet Street, P.O.B. 2009, 43657 Raanana (IL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **BINDER, Yehuda** [IL/IL]; 30 Yeshurun St., 45200 Hod HaSharon (IL).
- (74) Agent: **REINHOLD COHN AND PARTNERS**; P.O.B. 4060, 61040 Tel Aviv (IL).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: METHOD AND TELEPHONE OUTLET FOR ALLOWING TELEPHONE AND DATA EQUIPMENT TO BE CONNECTED TO A TELEPHONE LINE VIA A COMMON CONNECTOR

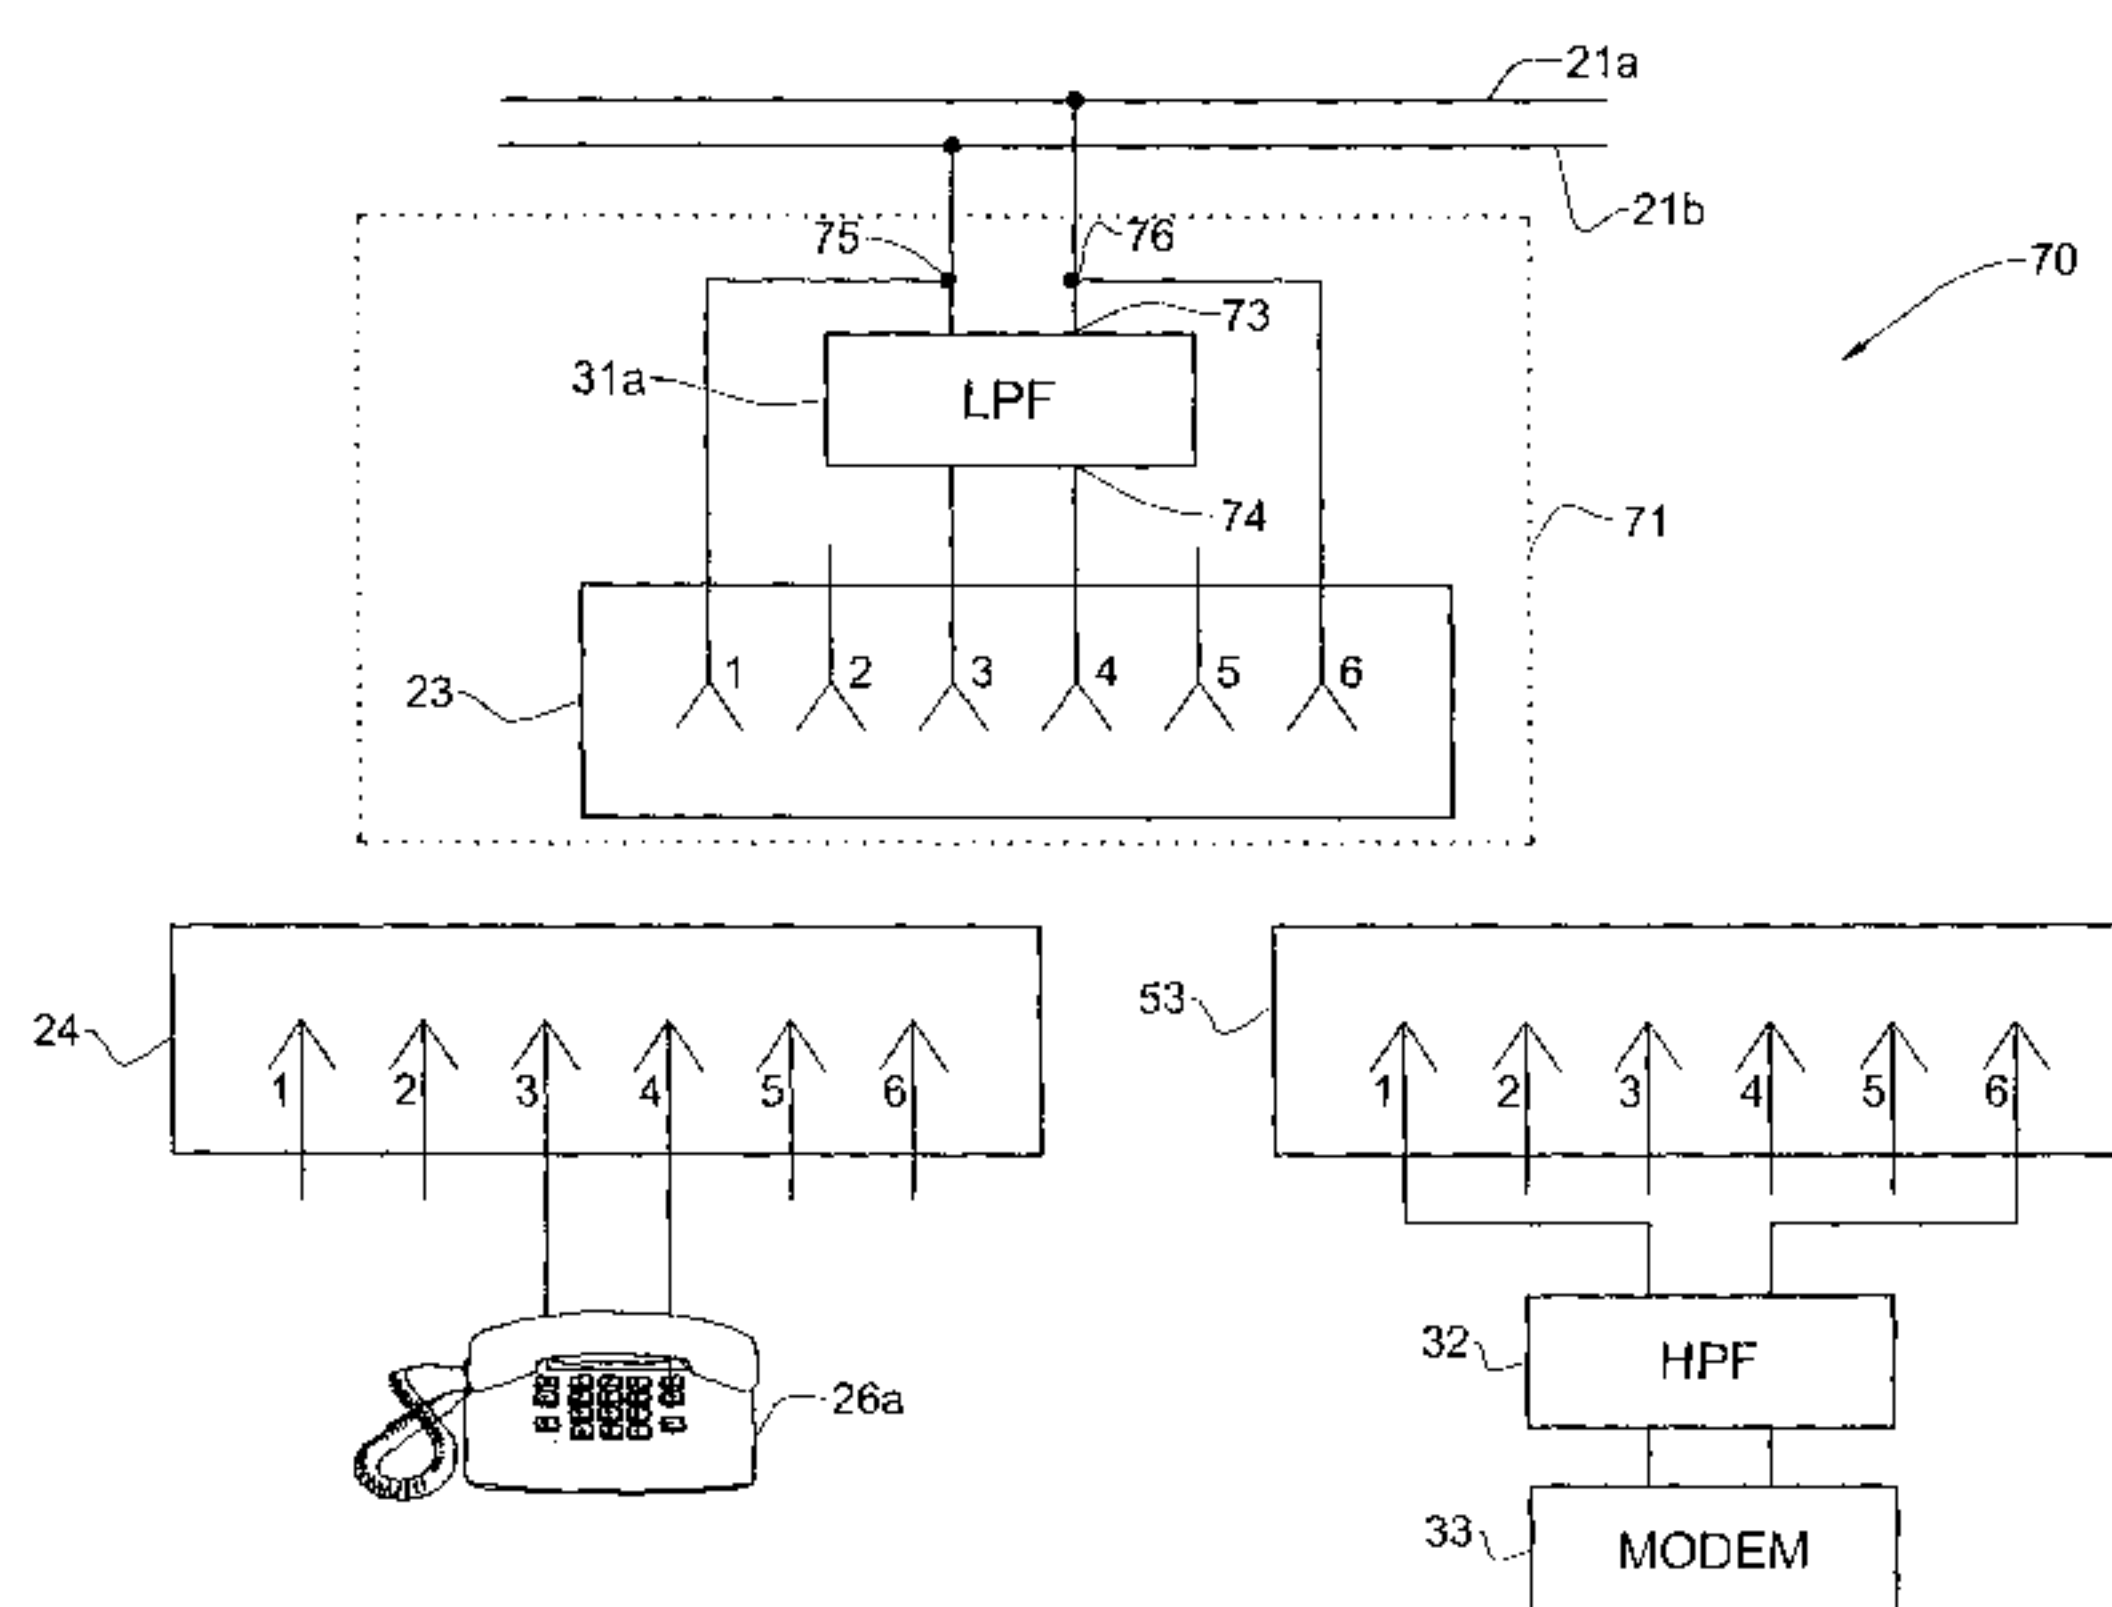

(57) Abstract: A telephone outlet (71) simultaneously supporting both standard telephony and data communications over telephone wiring within a residence or other building. The outlet typically contains a low pass filter (31a), connected between the telephone wiring (21a, 21b) and the telephone connector pins used for telephony (e.g. pins 2 and 3 in typical North-American RJ-11 connectors). In addition, a direct, unfiltered connection to the telephone wiring is supported via two other unused pins (e.g. pins 1 and 6 in typical North American RJ-11 6-pin connectors), thus allowing the connection of modems and high pass filters for access to the high frequency portion of the spectrum for data communications. Benefits include easy and direct connection of a telephone set or data devices to the same outlet, and elimination of the need to modify the telephone with low-pass filters or to provide an external module with a low-pass filter in series with the telephone. The direct, unfiltered connection to the telephone wiring also permits using a modified telephone having a low-pass filter, or an external module if so desired.

**Method and telephone outlet for allowing telephone and data equipment to
be connected to a telephone line via a common connector**

FIELD OF THE INVENTION

5 The present invention relates to the field of wired communication systems,
and, more specifically, to the networking of devices over telephone wiring via
outlet connections.

BACKGROUND OF THE INVENTION

10 There is an ongoing trend toward using telephone wiring within a building
as media for data communication. As part of the Public Switched Telephone
Network (PSTN), telephone wiring is both common and widespread, and is
typically configured for the voice spectrum to enable speech communication
from one telephone to another. It is well-known in the art that such a system can
be used for data communication as well as telephony by employing frequency
15 domain/division multiplexing (FDM) which splits the bandwidth carried by a
wire into a low-frequency band capable of carrying an analog telephony signal
and a high-frequency band capable of carrying data communication or other
signals. Such a mechanism is disclosed, for example, in U.S. Patent 4,785,448 to
Reichert *et al.* Using telephone wiring for both telephony and additional service
20 is disclosed in U.S. Patent 5,929,896 to Goodman *et al.* Also common are xDSL

- 2 -

xDSL systems, primarily Asymmetric Digital Subscriber Loop (ADSL) systems. Recently, there has also been a trend for using telephone wiring for data networking simultaneously with telephony and ADSL signals. Such systems are described, for example, in WO 99/12330 to Foley, U.S. Patent 6,069,899 to
5 Foley, U.S. Patent 5,896,443 to Dichter (hereinafter referred to as "Dichter"), and others. Figure 1 shows a graph 10 which shows the frequency spectrum for FDM. A POTS signal 11 occupies the 0 to 4KHz bandwidth, while ADSL signals 12 usually span from 100KHz to 1.5MHz, and in-home data network signals 13 (and similar applications) occupy the 5-10MHz band.

10 The term "analog telephony" herein denotes traditional analog low-frequency audio voice signals typically under 3KHz, sometimes referred to as "POTS" ("plain old telephone service"), whereas the term "telephony" in general denotes any kind of telephone service, including digital service such as Integrated Services Digital Network (ISDN). The term "high-frequency" herein
15 denotes any frequency substantially above such analog telephony audio frequencies, such as that used for data. ISDN typically uses frequencies not exceeding 100KHz (typically the energy is concentrated around 40KHz). The term "telephone line" herein denotes electrically-conducting lines which are intended primarily for the carrying and distribution of analog telephony, and
20 includes, but is not limited to, such lines which may be pre-existing within a building and which may currently provide analog telephony service. The term "telephone device" herein denotes, without limitation, any apparatus for telephony (including both analog telephony and ISDN), as well as any device using telephony signals, such as fax, voice-modem, and so forth. The term "Data
25 Terminal Equipment" (DTE) herein refers to any device or apparatus which can handle or process data, including, but not limited to, computers and controllers. The term "data communications" herein refers to the sending and/or receiving of data between any devices or apparatus, including, but not limited to, network communications such as a local area network.

- 3 -

Figure 2 schematically illustrates a prior-art in-home telephone wiring system **20**. A junction box (not shown) is used to separate the in-home circuitry from the PSTN and is used as a test facility for troubleshooting as well as for wiring new telephone outlets in the home. A telephone set **26a** connects to the telephone wiring, which is usually a wire pair **21a** and **21b**. Connection is done via a telephone outlet **22**, of which there are commonly a number located at convenient places within the home, and which typically utilize a standard RJ-11 (“Registered Jack”) connector, which employs either four or six contacts (pins). Figure 2 illustrates the six-pin RJ-11 form, although the four-pin configuration is also common in North America. Telephone outlet **22** has a female RJ-11 connector **23** (usually referred to as the “jack”). Telephone set **26a** may be connected to outlet **22** via a male RJ-11 connector **24** (often referred to as a “plug”). In most cases, the center pins 3 and 4 are used for making the connection. In the four-pin configuration (not shown), the center pins are numbered 2 and 3. The terms “standard connector”, “standard telephone connector”, and “standard data connector” are used in the description and appended claims to denote any connectors which are industry-standard or de facto standard connectors.

As suggested by the current trends, there is a widespread demand to use existing telephone wiring for both telephony and data networking. In this way, the task of establishing a new local area network in a home or other building is eased, because there are no additional wires to install. As previously noted, frequency domain/division multiplexing provides a means of simultaneously carrying an analog telephony signal and data communication or other signals.

In order to allow for both telephony and data networking without any mutual interference, a set of filters is commonly used. A Low Pass Filter (LPF) is connected in series with the telephone for passing the telephony signal (0-4KHz band) and isolating the high frequency band. Similarly, a High Pass Filter (HPF) is connected in series with the modem used for the data communication. The

- 4 -

term “low pass filter” herein denotes any device that passes signals in the low-frequency (analog telephony) band but blocks signals in the high-frequency (data) band. Conversely, the term “high pass filter” herein denotes any device that passes signals in the high-frequency (data) band but blocks signals in the low-frequency (analog telephony) band. The term “data device” herein denotes any apparatus that handles digital data, including without limitation modems, transceivers, Data Communication Equipment, and Data Terminal Equipment.

Figure 3 illustrates part of a prior-art network **30**. Low pass filters **31a** and **31b** are connected to telephone sets **26a** and **26b** respectively. DTE’s **34a** and **34b** intercommunicate via modems **33a** and **33b**, respectively, which are connected to telephone line pair **21a** and **21b** via high pass filters **32a** and **32b**, respectively. Low pass filters such as **31a** and **31b** are also referred to as “micro-filters”.

Figure 4 shows an example of a prior-art low pass filter **31**. Inductors **41a** and **41b** are placed in series with the connections to pins 3 and 4, respectively, while capacitors **42a** and **42b** are connected in parallel between pins 3 and 4. LPF **31a** is connected in series with telephone set **26a**, as shown in Figure 4. Capacitors **42a** and **42b** reduce noise produced by telephone **26a** in the high-frequency data communication band, and also reduce degradation resulting from the addition of taps in the telephone connection, which are often not terminated properly.

High pass filters **32a** and **32b** (Figure 3) are usually included within modems **33a** and **32b**. Furthermore, both modems **33a** and **32b** and high pass filters **32a** and **32b** are usually housed within DTE’s **34a** and **34b**. A typical example of DTE **34a** is a personal computer with modem **33a** and high pass filter **32a** within a plug-in card (known as a “Network Interface Card” — “NIC”), installed in the computer housing. However, since it is not practical to change or modify telephones or telephone wiring, the low pass filter **31** must be an add-on module.

- 5 -

One common prior-art implementation of the low pass filter **31** is as a module having an RJ-11 plug and jack, for being connected externally between telephone set **26a** and jack **23** within outlet **22** (Figure 2). To an ordinary non-technically skilled user, however, the requirement for such a module might present difficulties. A casual user, such as a person in an office or a family member wishing to attach a telephone to an outlet, might not be aware that an additional piece of equipment is required, and thus could unknowingly omit an essential device, thus degrading the data communication performance. In addition, an externally-added plug-in module is vulnerable to being removed, either inadvertently by someone who does not realize the necessity of the device, or by someone who needs, but lacks, such a device for installation elsewhere. Moreover, such an external module is not aesthetic and is relatively expensive, requiring two RJ-11 connectors (plug and jack) and an individual housing in addition to the filter circuitry.

Figure 5 illustrates a prior art outlet **51** that is adapted for isolating telephony from data communications. Outlet **51** has two RJ-11 telephone jacks **52** and **23**. Connector **52** connects directly to the telephone wiring, and hence allows for connection to modem **33** and DTE **34** using high pass filter **32** (Figure 3). Connector **23** connects to the telephone wiring via low pass filter **31a**, which is housed within outlet **51**. Figure 6 shows a schematic diagram of a prior art telephone wiring system **60** employing the outlet **51**. Telephone **26a** can directly connect to outlet **51** via a plug **24**, eliminating the need for any additional hardware or devices. Similarly, modem **33** can directly connect to jack **52** via a high pass filter **32** and a plug **34**. This solution does not require any additional modules, but has limitations. Since both connectors **52** and **23** are standard telephone jacks with no visible distinction, the user can easily confuse them and connect telephone **26a** to jack **52** or connect modem **33** to jack **23**. In either case, the performance of equipment connected to the telephone wiring will be unsatisfactory.

- 5a -

U.S. Patent No. 5,353,334 (O'Sullivan) entitled "*Interface for connecting computers to radio telephone networks*" describes a system for connecting a computer to both cellular and landline systems. As shown in Fig. 1 of this patent, the normally unused pins in a standard RJ-11 telephone connector are used to connect a data signal to a digital control unit simultaneous with the connection of the analog telephone signal to a cellular transceiver. In effect, the connector 136 is a composite adapter allowing simultaneous connection of both digital data signals and analog telephone to respective destinations (i.e. the control unit and the cellular transceiver).

Fig. 2b shows an alternative use of the system for connecting a modem to a landline telephone outlet. In this case, the analog output of a modem 102 is connected via a twisted pair cable 130 to a telephone outlet 138. It is to be noted that in this configuration, as explained at col. 6, line 67 to col. 7, line 2 the modem is connected via an ordinary modular telephone cable containing analog lines 132 to a landline RJ-11 jack 138. There is no suggestion to modify the landline jack 138 so as to allow connection of an analog telephone or of digital data equipment in such a manner that only the correct signal is conveyed regardless of which type of equipment (analog or digital) is connected to the jack 138. Indeed, as noted above, the jack 138 is configured only to serve as a source of analog data for connection to an analog data port.

On the other hand, the cable connected to the modem is indeed provided with a modified jack, as shown in Fig. 2c wherein two pins are connected to an analog source and two, normally unused pins, are connected to a digital source. This allows the respective analog and digital outputs of the modem to be simultaneously connected to the signal processing cable 100 shown in Fig. 1, which is actually a composite cable having separate cores for the separate conveyance of analog and data signals.

Moreover, the cellular bus 112 shown in Fig. 1 of U.S. Patent No. 5,353,334 is not analogous to the telephone wiring with which the invention is

- 5b -

concerned since the cellular bus 112 conveys different signals (i.e. analog and digital) both of which reach both devices (i.e. the transceiver 110 and the control unit 108). Thus, the end-devices constituted by the transceiver 110 and the control unit 108 must contain integral discrimination circuitry to separate the
5 respective signals. Of course, once such integral discrimination circuitry is provided in each analog or digital end-unit, there is then no risk of mis-connection since both devices do in fact receive both signals and simply filter out the signal that is not required.

There is no suggestion in U.S. Patent No. 5,353,334 to provide a modified
10 pin connection in a telephone outlet so as to allow either an analog telephone or a digital device to be separately but reliably connected to the same outlet without requiring the analog telephone to contain an integral filter.

There is thus a widely-recognized need for, and it would be highly advantageous to have, easy-to-use apparatus for connecting ordinary telephone
15 sets and data communication equipment to telephone wiring, so that telephony and data communications can operate simultaneously on the telephone wiring without interfering with each other, and in such a way that requires neither modification to the telephone sets, nor external modules or devices to be used therewith. This goal is met by the present invention.

20 SUMMARY OF THE INVENTION

The present invention provides apparatus for upgrading an existing telephone line wiring system within a residence or other building, to support both analog telephony service and local data communications in such a manner that a low-frequency band is allocated to regular telephone service (analog telephony),
25 while a high-frequency band is allocated to the data communications. Regular telephone outlets are replaced with outlets according to the present invention, so that a standard telephone device connected to the outlet will be isolated from, and not interfere with, data communications over the telephone wiring.

02-09-2002

- 6 -

An outlet according to the present invention contains a telephone connector (such as an RJ-11 connector) and a low pass filter for isolating telephony signals from data signals. The output of the low-pass filter goes to the pair of contacts in the connector which make connection with the pins of a telephone device plugged into the connector (for a 4-wire RJ-11 connector, these are typically pins 2 and 3, while for a 6-wire RJ-11 connector these are typically pins 3 and 4). The input to the low-pass filter is connected to a pair of contacts in the connector which is not normally used for a single-line telephone device (for a 4-wire RJ-11 connector, these are typically pins 1 and 4, while for a 6-wire RJ-11 connector these are typically pins 1 and 6). When the outlet is installed, the input to the low-pass filter is connected to the telephone wiring via a suitable attachment means, such as screw contacts or other system. With this connection in effect, the telephone wiring will be directly connected to the normally-unused contacts of the outlet's telephone connector, and the telephone wiring will be connected through the low-pass filter to the connector's contacts which provide standard telephony connection. This arrangement automatically isolates a plugged-in telephone device from any data communication taking place over the telephone wiring. At the same time, however, a data communication device can access the telephone wiring directly by connecting to the outlet via the contacts in the connector which are not used for telephony, thereby bypassing the low-pass filter. Such a data device will normally have a modem with a built-in high-pass filter, as previously noted. In this fashion, an outlet according to the present invention can serve both telephony and data communications.

Data Terminal Equipment as well as telephone devices can be readily connected to the outlets, thereby allowing a data communications network as well as a telephone system to be easily configured, such that both the data communications network and the telephone system can operate simultaneously without interference between one another.

It is to be noted that historically telephone connectors of the RJ-11 type have been provided with more contacts than are required in use. Thus, as noted above, 4-wire RJ-11 connectors typically utilize only pins 2 and 3, while 6-wire RJ-11 connectors typically utilize only pins 3 and 4. In either case, there is at least one spare pair of pins that is simply unused in the prior art.

Accordingly, there is provided in accordance with a broad aspect of the invention a method for using a connector of a telephone outlet, said outlet having at least one pair of terminals, which in use are coupled to telephone wiring comprising at least two conductors, said terminals being coupled to at least two first contacts, and said connector having at least two normally unused second contacts, the method being characterized by:

- a. coupling the second contacts to the terminals so that in use the second contacts effect electrical coupling to the telephone wiring, and
- b. coupling discrimination circuitry within the outlet between the terminals and at least one pair of the first contacts and the second contacts so that, in use, the first and second contacts are distinctly coupled to the telephone wiring;

thereby allowing for foolproof connection of either data equipment or a telephone device to the connector each via a respective complementary connector having respective contacts for engaging the respective contacts of the connector.

In accordance with the invention, there is also provided a telephone outlet for supporting independent foolproof connection of telephony and data equipment over telephone wiring comprising at least two conductors, the telephone outlet comprising:

- a pair of terminals for coupling the outlet to the telephone wiring,
- a first telephone connector having at least two first contacts coupled to respective ones of said terminals for establishing an electrical connection with respective connections of a telephone device, said first telephone connector having

02-09-2002 .

- 8 -

at least two normally unused second contacts electrically distinct from said first contacts;

characterized by:

discrimination circuitry within the outlet coupled between the terminals and
 5 at least one pair of the first contacts and the second contacts allowing for distinct coupling of the first and second contacts to the telephone wiring;

thereby allowing for foolproof connection of either data equipment or a telephone device to the connector each via a respective complementary connector having respective contacts for engaging the respective contacts of the connector.

10 A telephone device having an integral low pass filter may be connected to the first contacts so as not to receive interfering data, which having a high frequency is blocked by the low pass filter. Alternatively, a low pass filter may be integrally connected to the first contacts within the outlet.

BRIEF DESCRIPTION OF THE DRAWINGS

15 The invention is herein described, by way of example only, with reference to the accompanying drawings, wherein:

– 9 –

Figure 1 shows the prior-art frequency spectrum of multiple services over the telephone wiring.

Figure 2 shows part of a prior-art telephone wiring system for a residence or other building.

5 Figure 3 shows a prior art telephone line communication system for both telephony and data communications.

Figure 4 shows prior art modifications for telephone wiring connections required for isolating the telephony from data communications.

10 Figure 5 shows a prior art telephone outlet supporting both telephony and data communications.

Figure 6 shows prior art telephone wiring supporting both telephony and data communications.

Figure 7 shows an outlet configuration and part of the modified telephone wiring according to a first embodiment of the present invention.

15 Figure 8 shows an add-on module configuration and part of the modified telephone wiring according to a second embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

The principles and operation of a network according to the present invention may be understood with reference to the drawings and the
20 accompanying description. The drawings and descriptions are conceptual only. In actual practice, a single component can implement one or more functions; alternatively, each function can be implemented by a plurality of components and circuits. In the drawings and descriptions, identical reference numerals are used to indicate those components, which are common to different embodiments or
25 configurations.

Figure 7 illustrates a system **70** employing an outlet **71** according to a first embodiment the present invention. Such an outlet has a standard telephone jack **23** (such as an RJ-11). The contacts in telephone jack **23** which are used for

02-09-2002

IL0100040

- 10 -

23 (such as an RJ-11). The contacts in telephone jack 23 which are used for standard telephone connection are connected to telephone wiring 21a and 21b via the low pass filter 31a having an input 73 and an output 74. As noted previously, for 4-pin RJ-11 connectors these contacts (constituting first contacts) are typically pins 2 and 3, while for 6-pin RJ-11 connectors these are typically pins 3 and 4, as illustrated in Figure 7. The first pair of contacts is connected inside the outlet 71 to the output 74 of the low pass filter 31a, while the input 73 of the low pass filter 31a is connected to a second pair of normally unused contacts in the telephone jack 23 (constituting second contacts). As noted previously, for 4-pin RJ-11 connectors, these could be pins 1 and 4, while for 6-pin RJ-11 connectors these could be pins 1 and 6, as illustrated in Figure 7. The input 73 of the low pass filter 31a is also connected to screw terminals 75 and 76, which allow for direct non-filtered connection of the outlet 71 to the telephone wiring 21a and 21b. Thus, a plug 24 for telephone set 26a can be plugged directly into the outlet 71 via the first pair of contacts, without any need to modify the telephone set or to use any additional module. Moreover, the telephone wiring can be accessed for data communications by connecting DTE (not shown) to the telephone wiring via modem 33 and high pass filter 32, connected to the second pair of contacts in the outlet 71 via the appropriate pins of a telephone plug 53 (illustrated in Figure 7 for a 6-pin RJ-11 utilizing pins 1' and 6').

An outlet according to the present invention is physically similar in size, shape, and appearance to a standard telephone outlet having a single connection, and can be substituted for a standard telephone outlet in the building wall. This takes up much less room and is less expensive than the modified outlet 51 having a double connection as shown in Fig. 5 and allows for faster, and therefore less expensive, installation. No changes are required in the overall telephone wiring layout or configuration.

02-09-2002

IL0100040

- 11 -

In a second embodiment of the present invention, an external add-on module may be inserted between a standard telephone set and a standard telephone outlet. Figure 8 illustrates a module 81 connected to a system 80. Such a module 81 has a standard telephone plug 24 and a standard telephone jack 23, such that plug 24 is able to plug into outlet jack 23. A telephone set or a data device can be plugged into jack 23 of module 81. The principles of operation are the same for module 81 as for outlet 71, as previously detailed.

Thus, the module 81 includes a first connector 23 having a first pair of contacts 3' and 4' (constituting first contacts) operative to establishing an electrical connection with complementary connectors of a telephone device and having a second pair of contacts 1' and 6' (constituting second contacts) electrically distinct from said first pair of contacts. A low-pass filter 31a has an input 73 directly connected to the second pair of contacts 1', 6' and an output 74 connected to the first pair of contacts 3, 4, and a second connector 24 operative to connecting the telephone wiring 21a, 21b to the input 73 of the low-pass filter 31a.

The present invention has been described in terms of media having a single pair of wires, but is also applicable to more conductors. For example, ISDN employs two pairs for communication. In a similar manner, a low pass filter can be used for each such pair, and the connector changed to an ISDN connector (RJ-45).

While the invention has been described with respect to a limited number of embodiments, it will be appreciated that many variations, modifications and other applications of the invention may be made.

For example, the low pass filter has been shown connected within the outlet to accommodate those situations (currently the norm) where a telephone device does not itself have an integral low pass filter. In like manner, the high pass filter may be connected within the outlet, thus obviating the need for this to

- 12 -

be connected externally. As is known, the high pass filter is normally integral with the modem and, in such case, the combined modem and high pass filter may be connected in the outlet.

5 The invention has been described with particular regard to connection of either a telephone device or data equipment to an outlet having only one RJ-11 type connector. However, it will readily be appreciated that both a telephone device and data equipment may be connected to the outlet simultaneously via a complementary connector having respective pairs of pins connected to the telephone device and data equipment via corresponding cables.

10 Likewise, it is to be noted that whilst complementary connectors in the form of RJ-11 plugs having multiple pins are known, and include at least one pair of spare contacts, it has not been hitherto proposed to utilize the spare of contacts for connecting the plug independently to data equipment. The invention thus encompasses within its scope such a connector.

15 Finally, whilst the invention has been described with particular reference to the use of RJ-11 type connectors, this has been done only because such connectors are prevalent and have become the industry standard. However, it is to be noted that use of RJ-11 connectors is not an essential feature of the invention, which will find application with other kinds of connector.

CLAIMS:

1. A method for using a standard telephone outlet containing a connector having at least two first contacts intended for connecting a telephone device thereto and having at least two normally unused second contacts so as to allow said outlet to support both telephony and data communication over telephone wiring comprising at least two conductors, the method comprising the steps of:
 - (a) using the second contacts to effect electrical connection to the telephone wiring,
 - (b) allowing data equipment to be connected to the outlet via a complementary connector having contacts for engaging the second contacts of the connector, and
 - (c) providing discrimination circuitry within the outlet for allowing distinct connection of the first and second contacts to the telephone wiring.

2. The method according to claim 1, wherein step (c) includes:
 - i) connecting a low pass filter between the first contacts and the telephone wiring.

3. The method according to claim 1, further including:
 - (d) connecting a first conductor pair to the first contacts for connecting to the telephone device, and
 - (e) connecting a second conductor pair to the second contacts for connecting to the data equipment;thereby allowing both the telephone device and the data equipment to be connected to the telephone outlet simultaneously.

4. The method according to claim 2, further including:
 - (f) connecting a first conductor pair to the first contacts for connecting to the telephone device, and
 - (g) connecting a second conductor pair to the second contacts for connecting to the data equipment;thereby allowing both the telephone device and the data equipment to be connected to the telephone outlet simultaneously.

5. A telephone outlet for supporting both telephony and data communication over telephone wiring comprising at least two conductors, the telephone outlet comprising:

a telephone connector operative to connecting a telephone device having at least two connections, said telephone connector having at least two first contacts operative to establishing an electrical connection with said connections and at least two normally unused second contacts electrically distinct from said first contacts,

terminals coupled to the first contacts and to the second contacts for connecting the telephone wiring thereto, and

discrimination circuitry allowing for distinct connection of the first and second contacts to the telephone wiring.

6. The outlet according to claim 5, wherein the discrimination circuitry includes: a low-pass filter having an input and an output, said output being connected to said first contacts, and said input being directly connected to said second contacts.

7. The outlet according to claim 6, wherein said low-pass filter is operative to isolate telephony service.

8. The outlet according to claim 5, wherein said connector is compatible with the RJ-11 standard.

9. The outlet according to claim 6, wherein said connector is compatible with the RJ-11 standard.

10. The outlet according to claim 7, wherein said connector is compatible with the RJ-11 standard.

11. A connector for connecting data equipment to the outlet of claim 5, said connector being complementary to the connector in said outlet and having a pair of connectors for connecting to the second contacts of the connector.

12. The connector according to claim 11 being compatible with the RJ-11 standard.

- 13.** A module for supporting both telephony and data communication over telephone wiring, the module comprising:
a first connector having at least two first contacts operative to establishing an electrical connection with complementary connectors of a telephone device and having at least two second contacts electrically distinct from said first contacts;
a low-pass filter having an input and an output, said output being connected to said first contacts, and said input being directly connected to said second contacts; and
a second connector operative to connecting the telephone wiring to the input of the low-pass filter.
- 14.** The module according to claim 13, wherein said low-pass filter is operative to isolate telephony service.
- 15.** The module according to claim 13, wherein said first connector is compatible with the RJ-11 standard.
- 16.** The module according to claim 14, wherein said first connector is compatible with the RJ-11 standard.
- 17.** The module according to claim 13, wherein said second connector is compatible with the RJ-11 standard.
- 18.** The module according to claim 13, wherein said second connector is compatible with the RJ-11 standard.

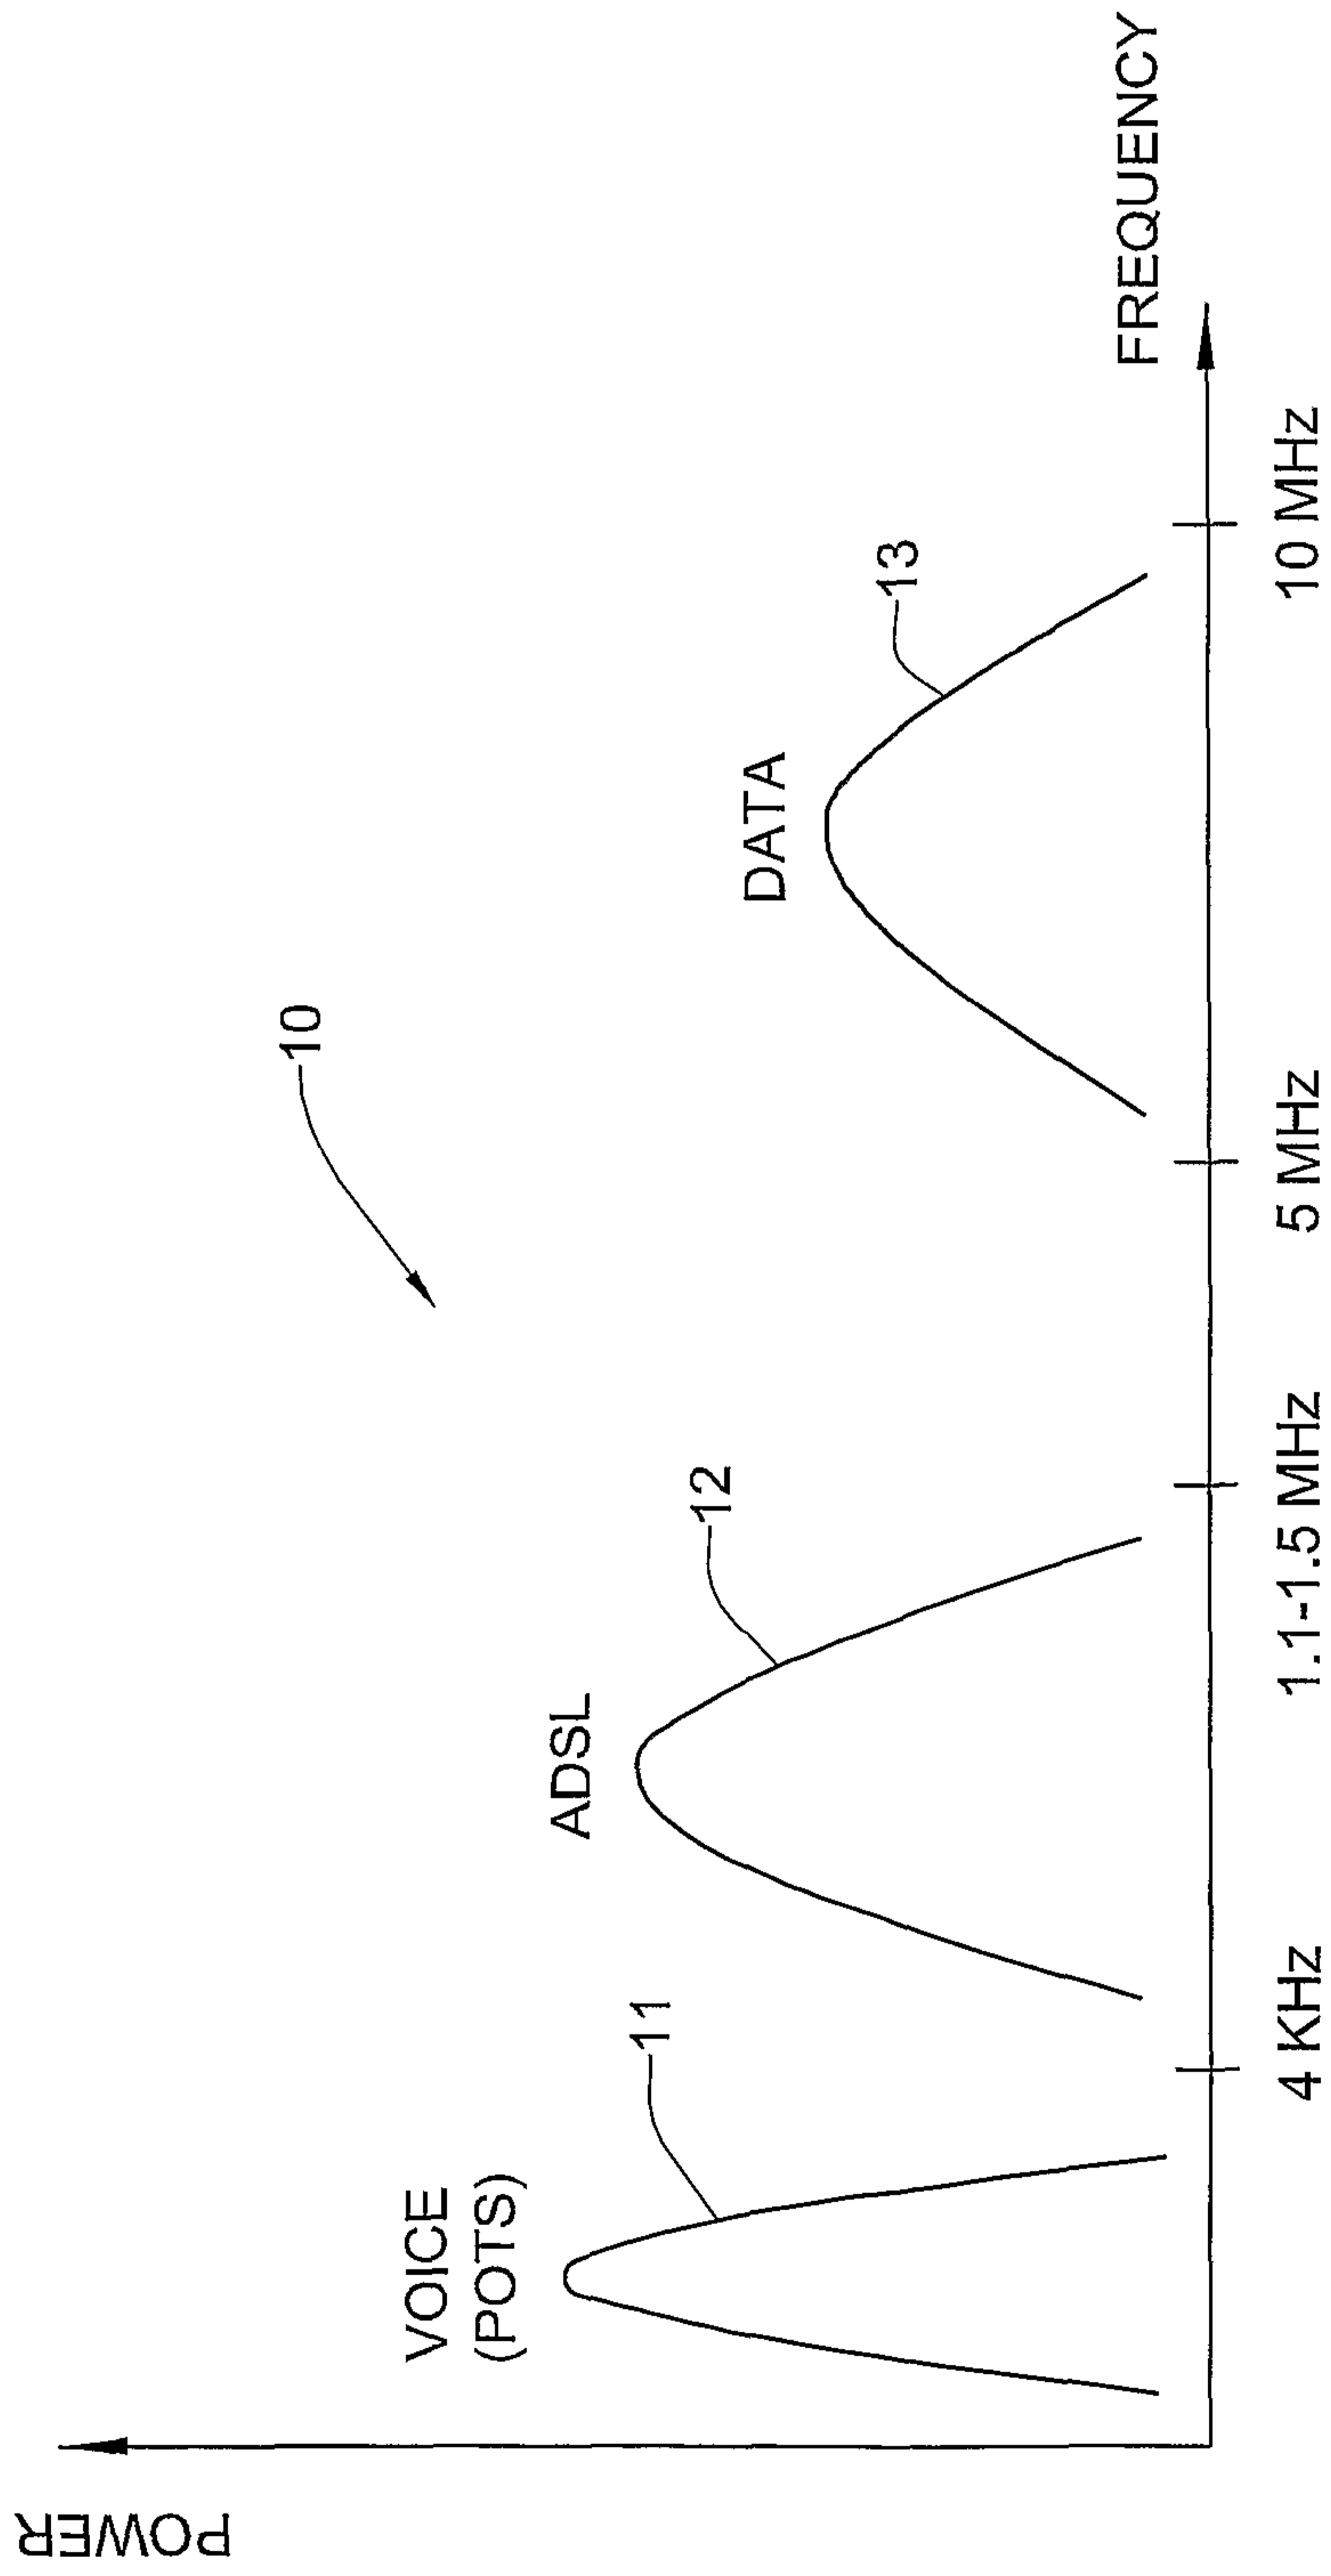


FIG. 1 (PRIOR ART)

2/8

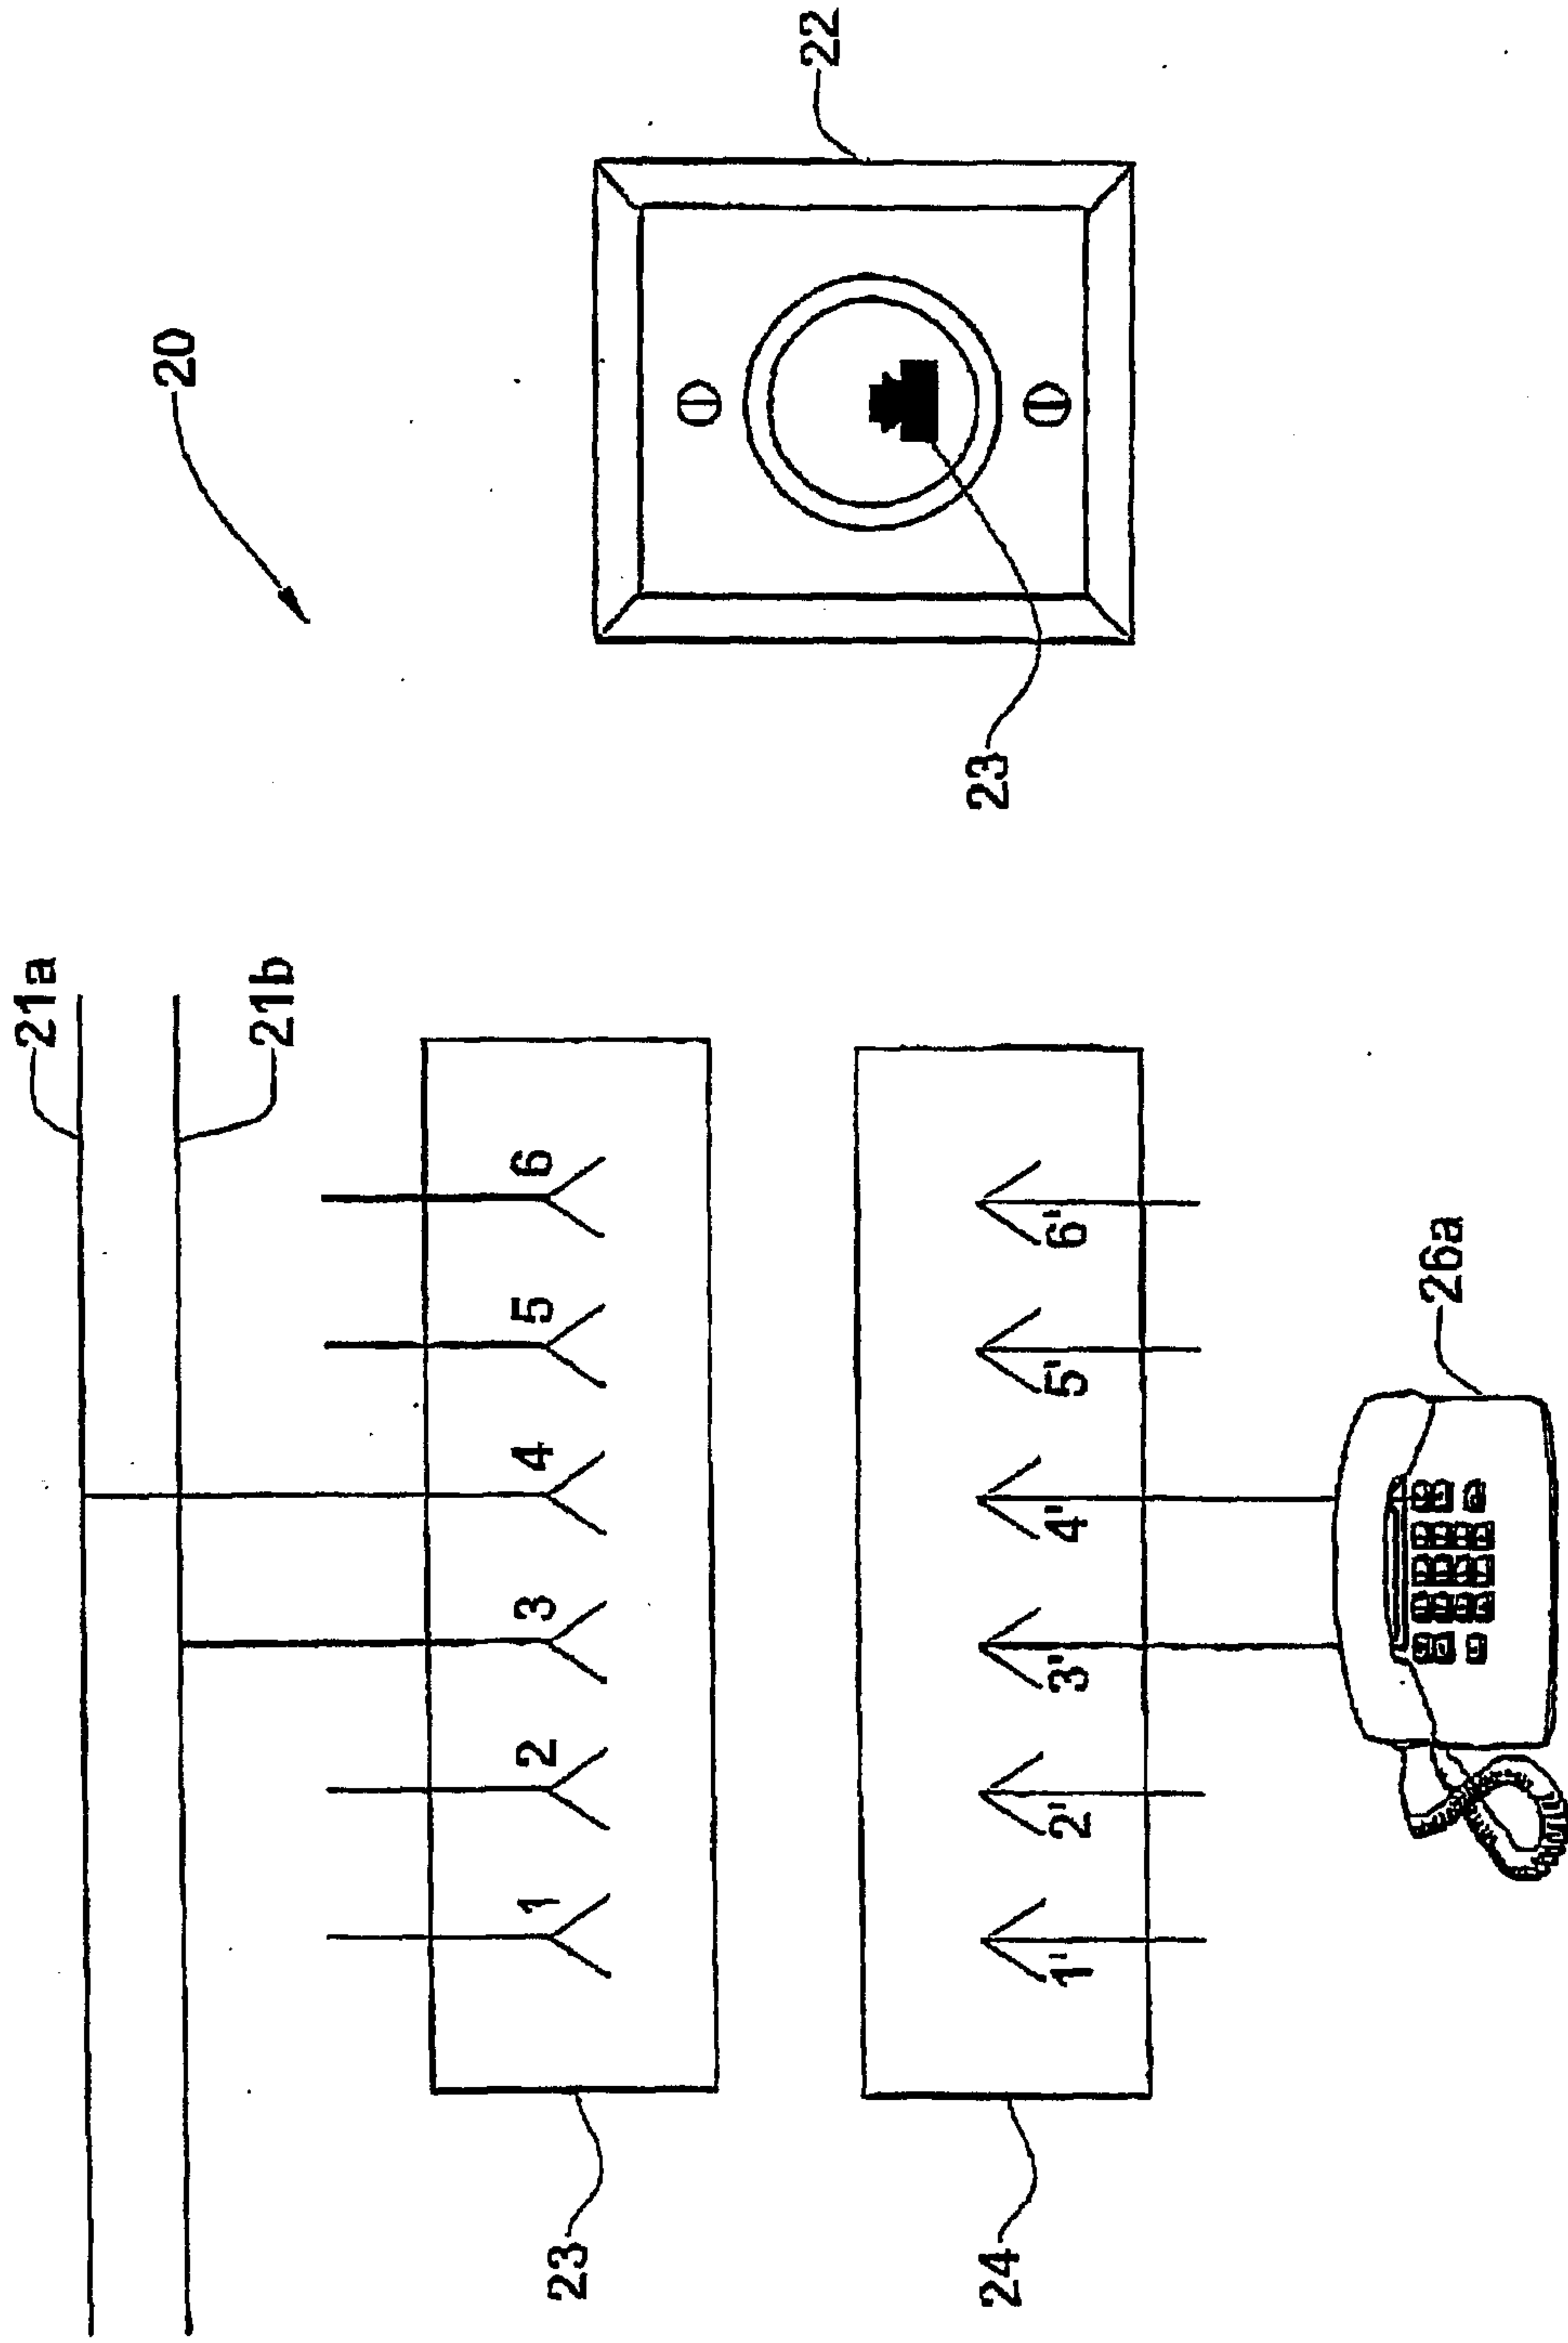


FIG. 2 (PRIOR ART)

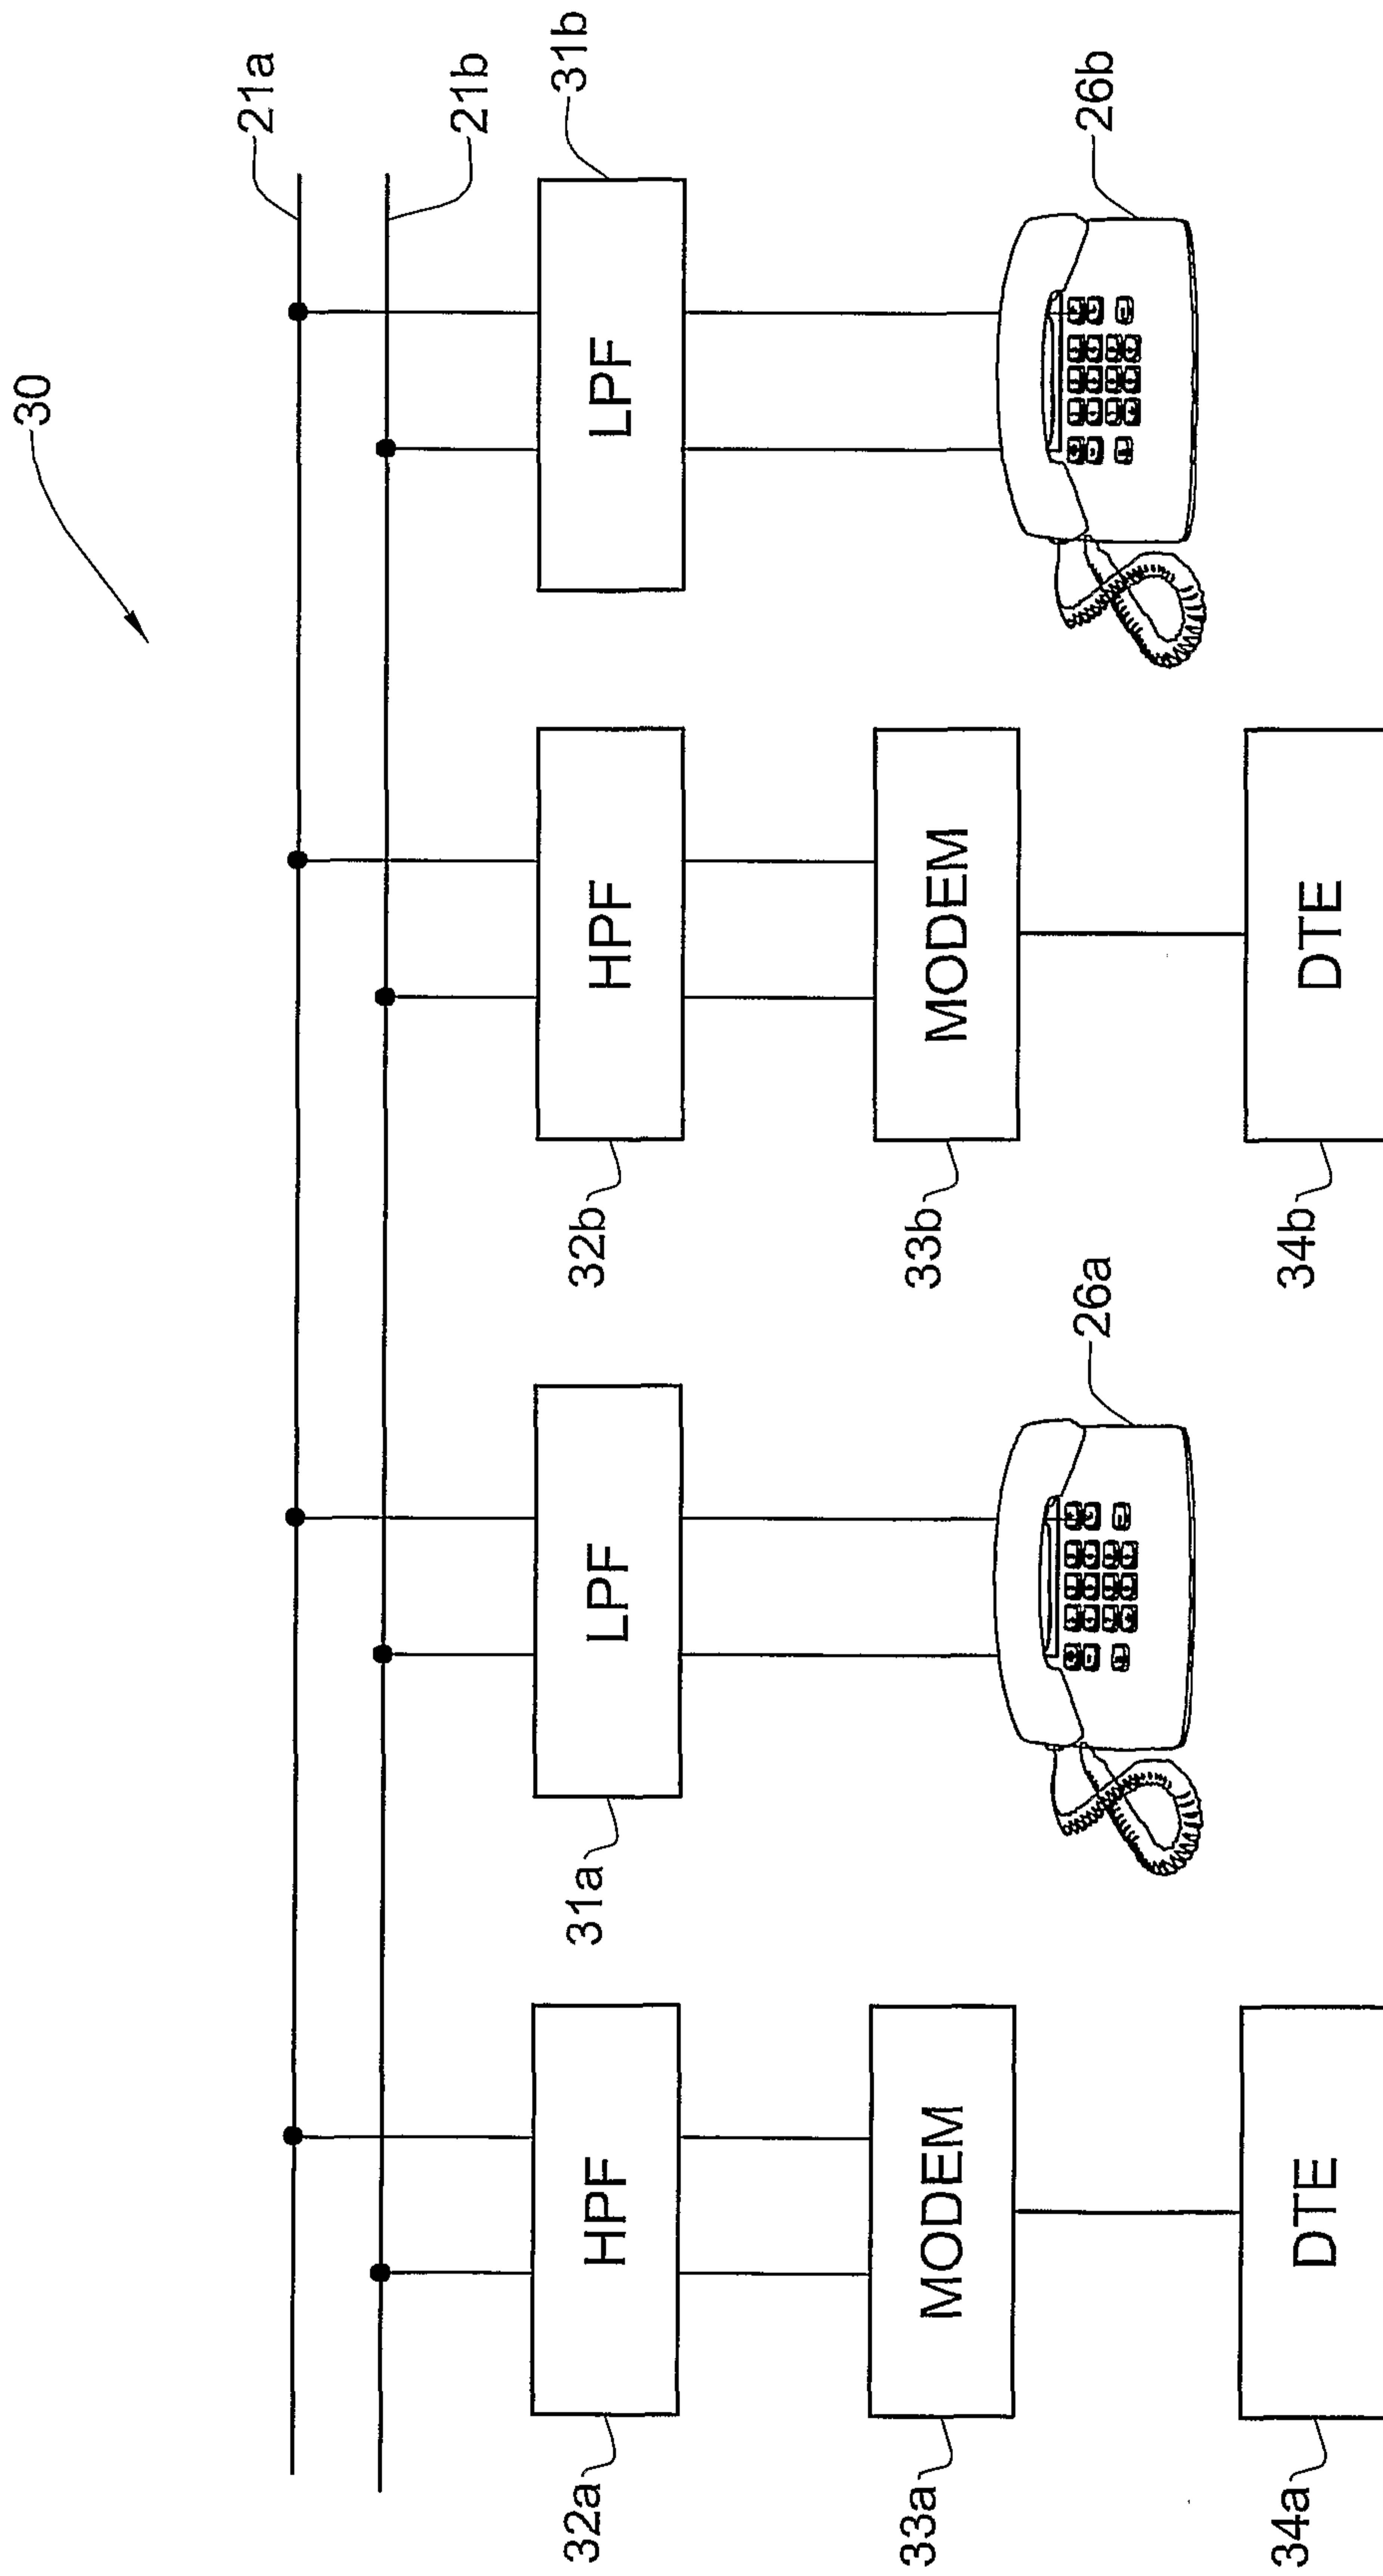


FIG. 3 (PRIOR ART)

4/8

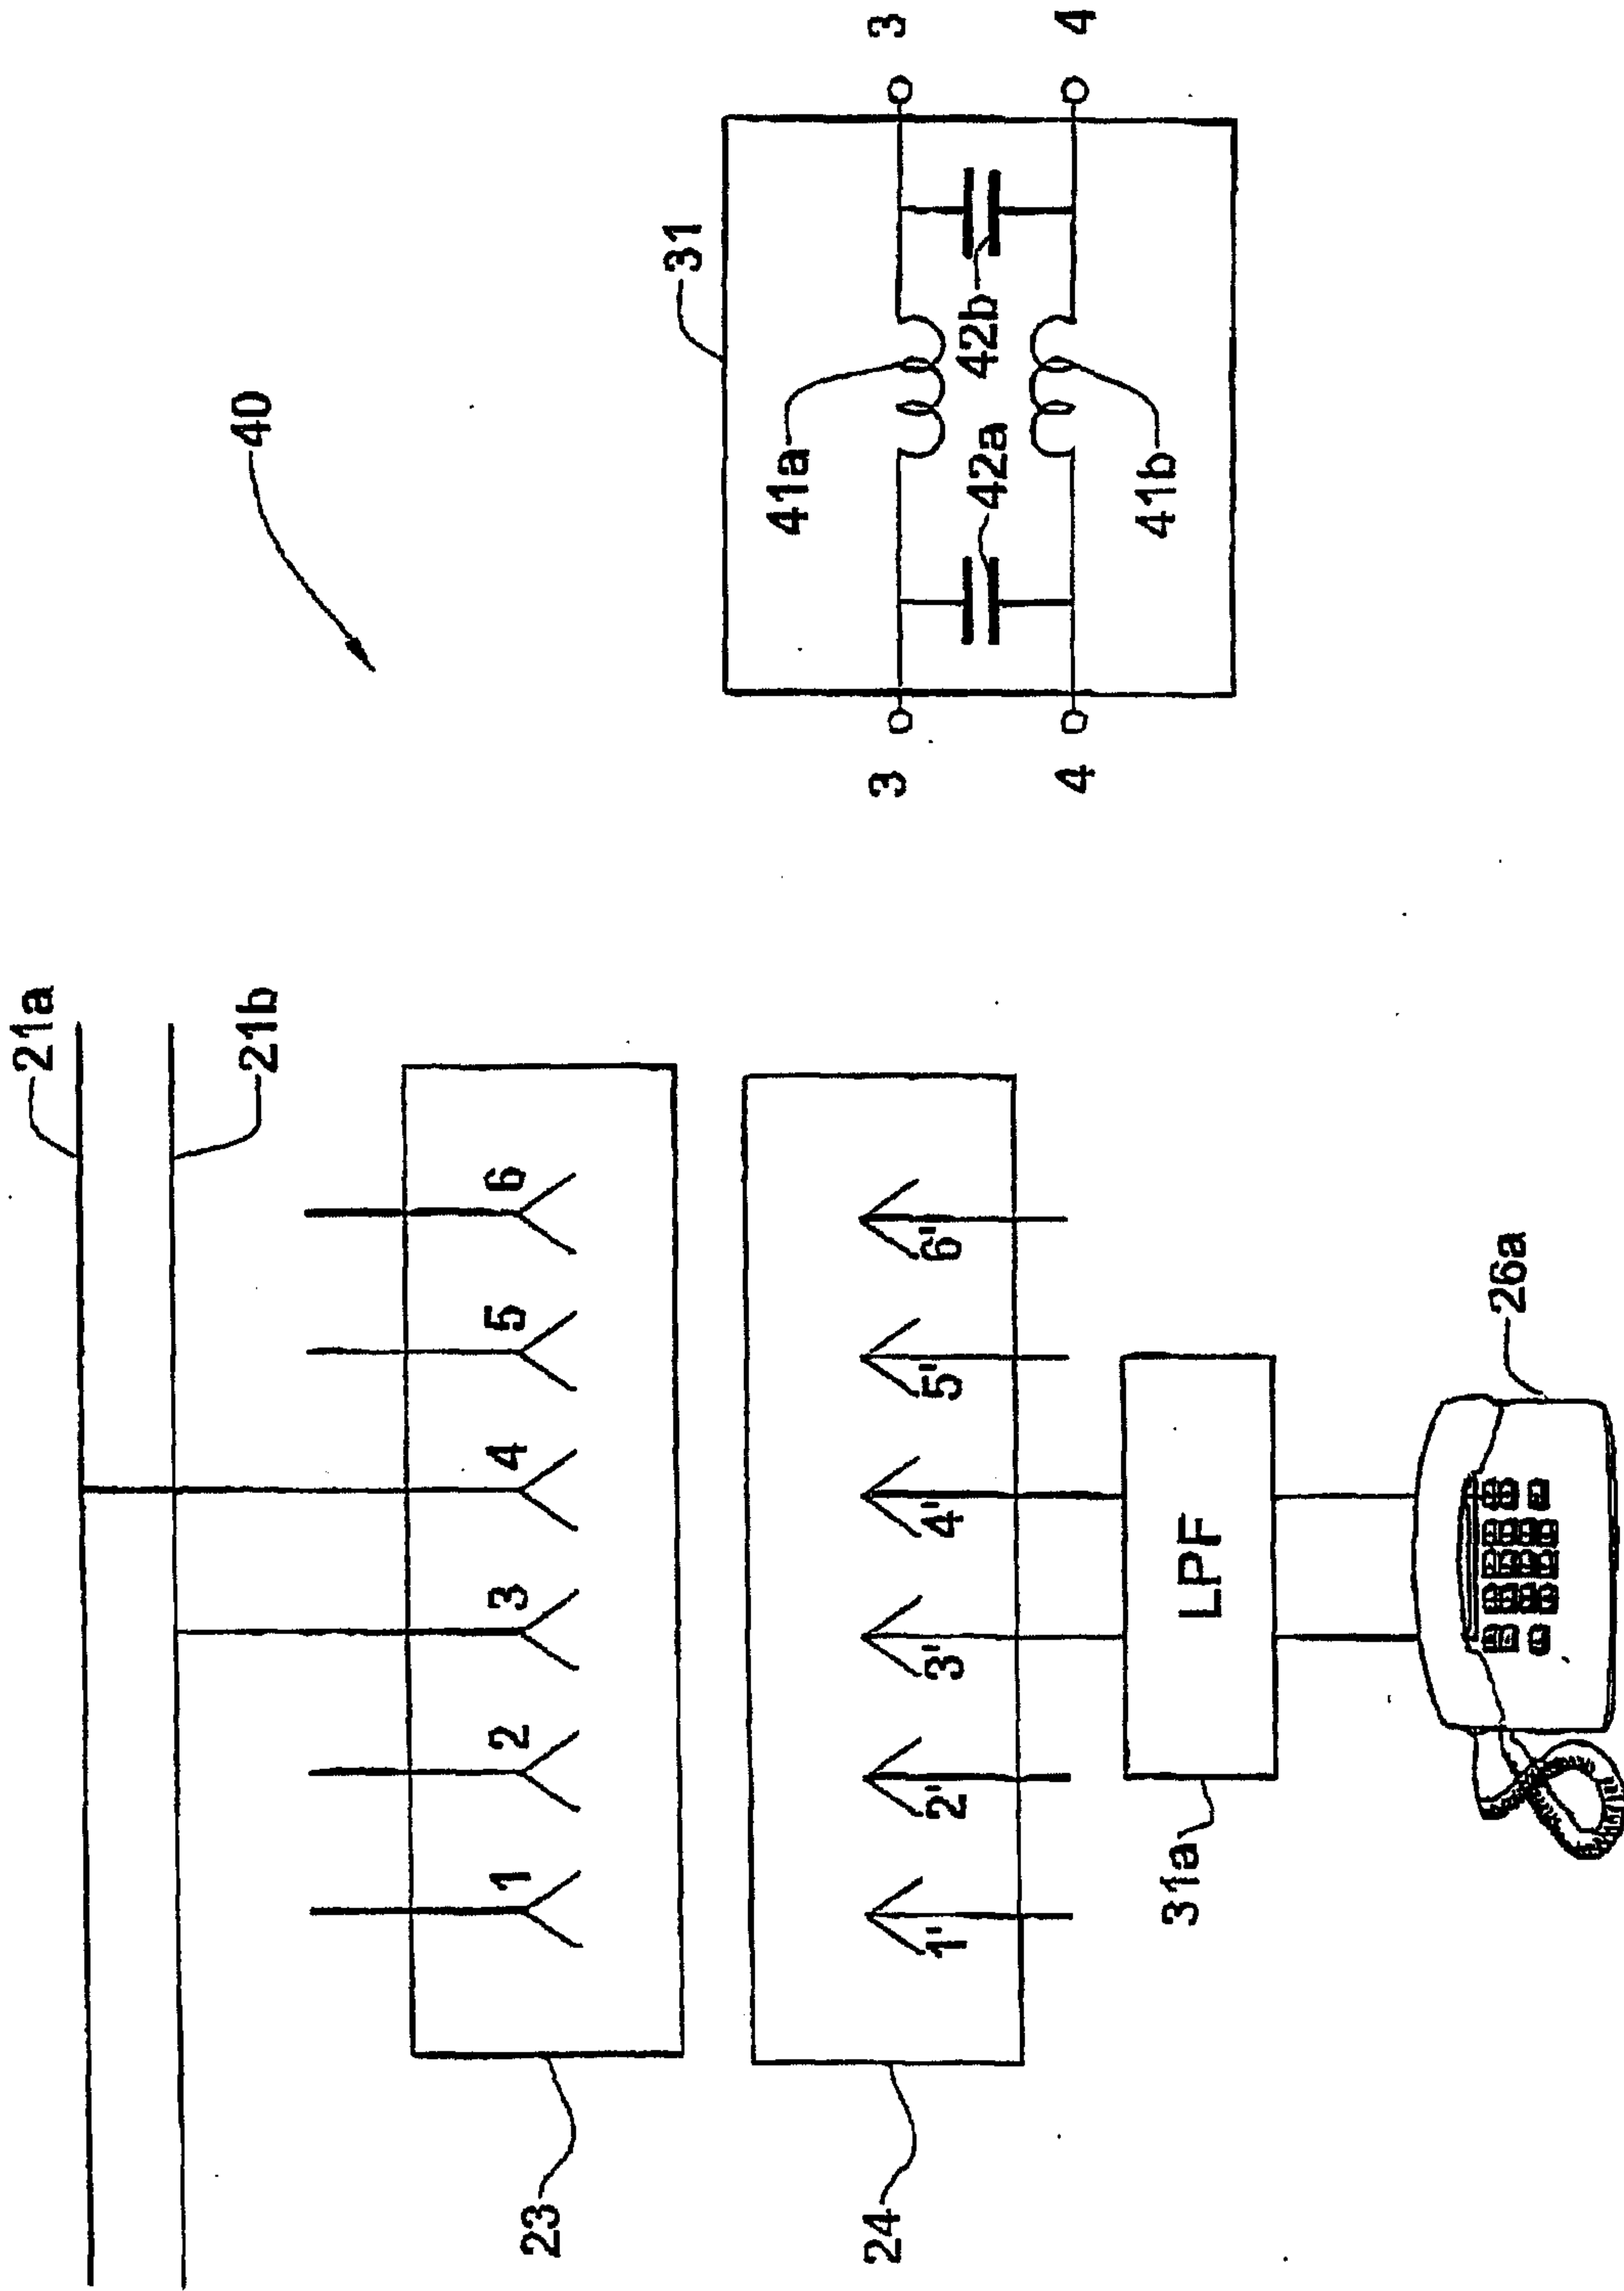


FIG. 4 (PRIOR ART)

5/8

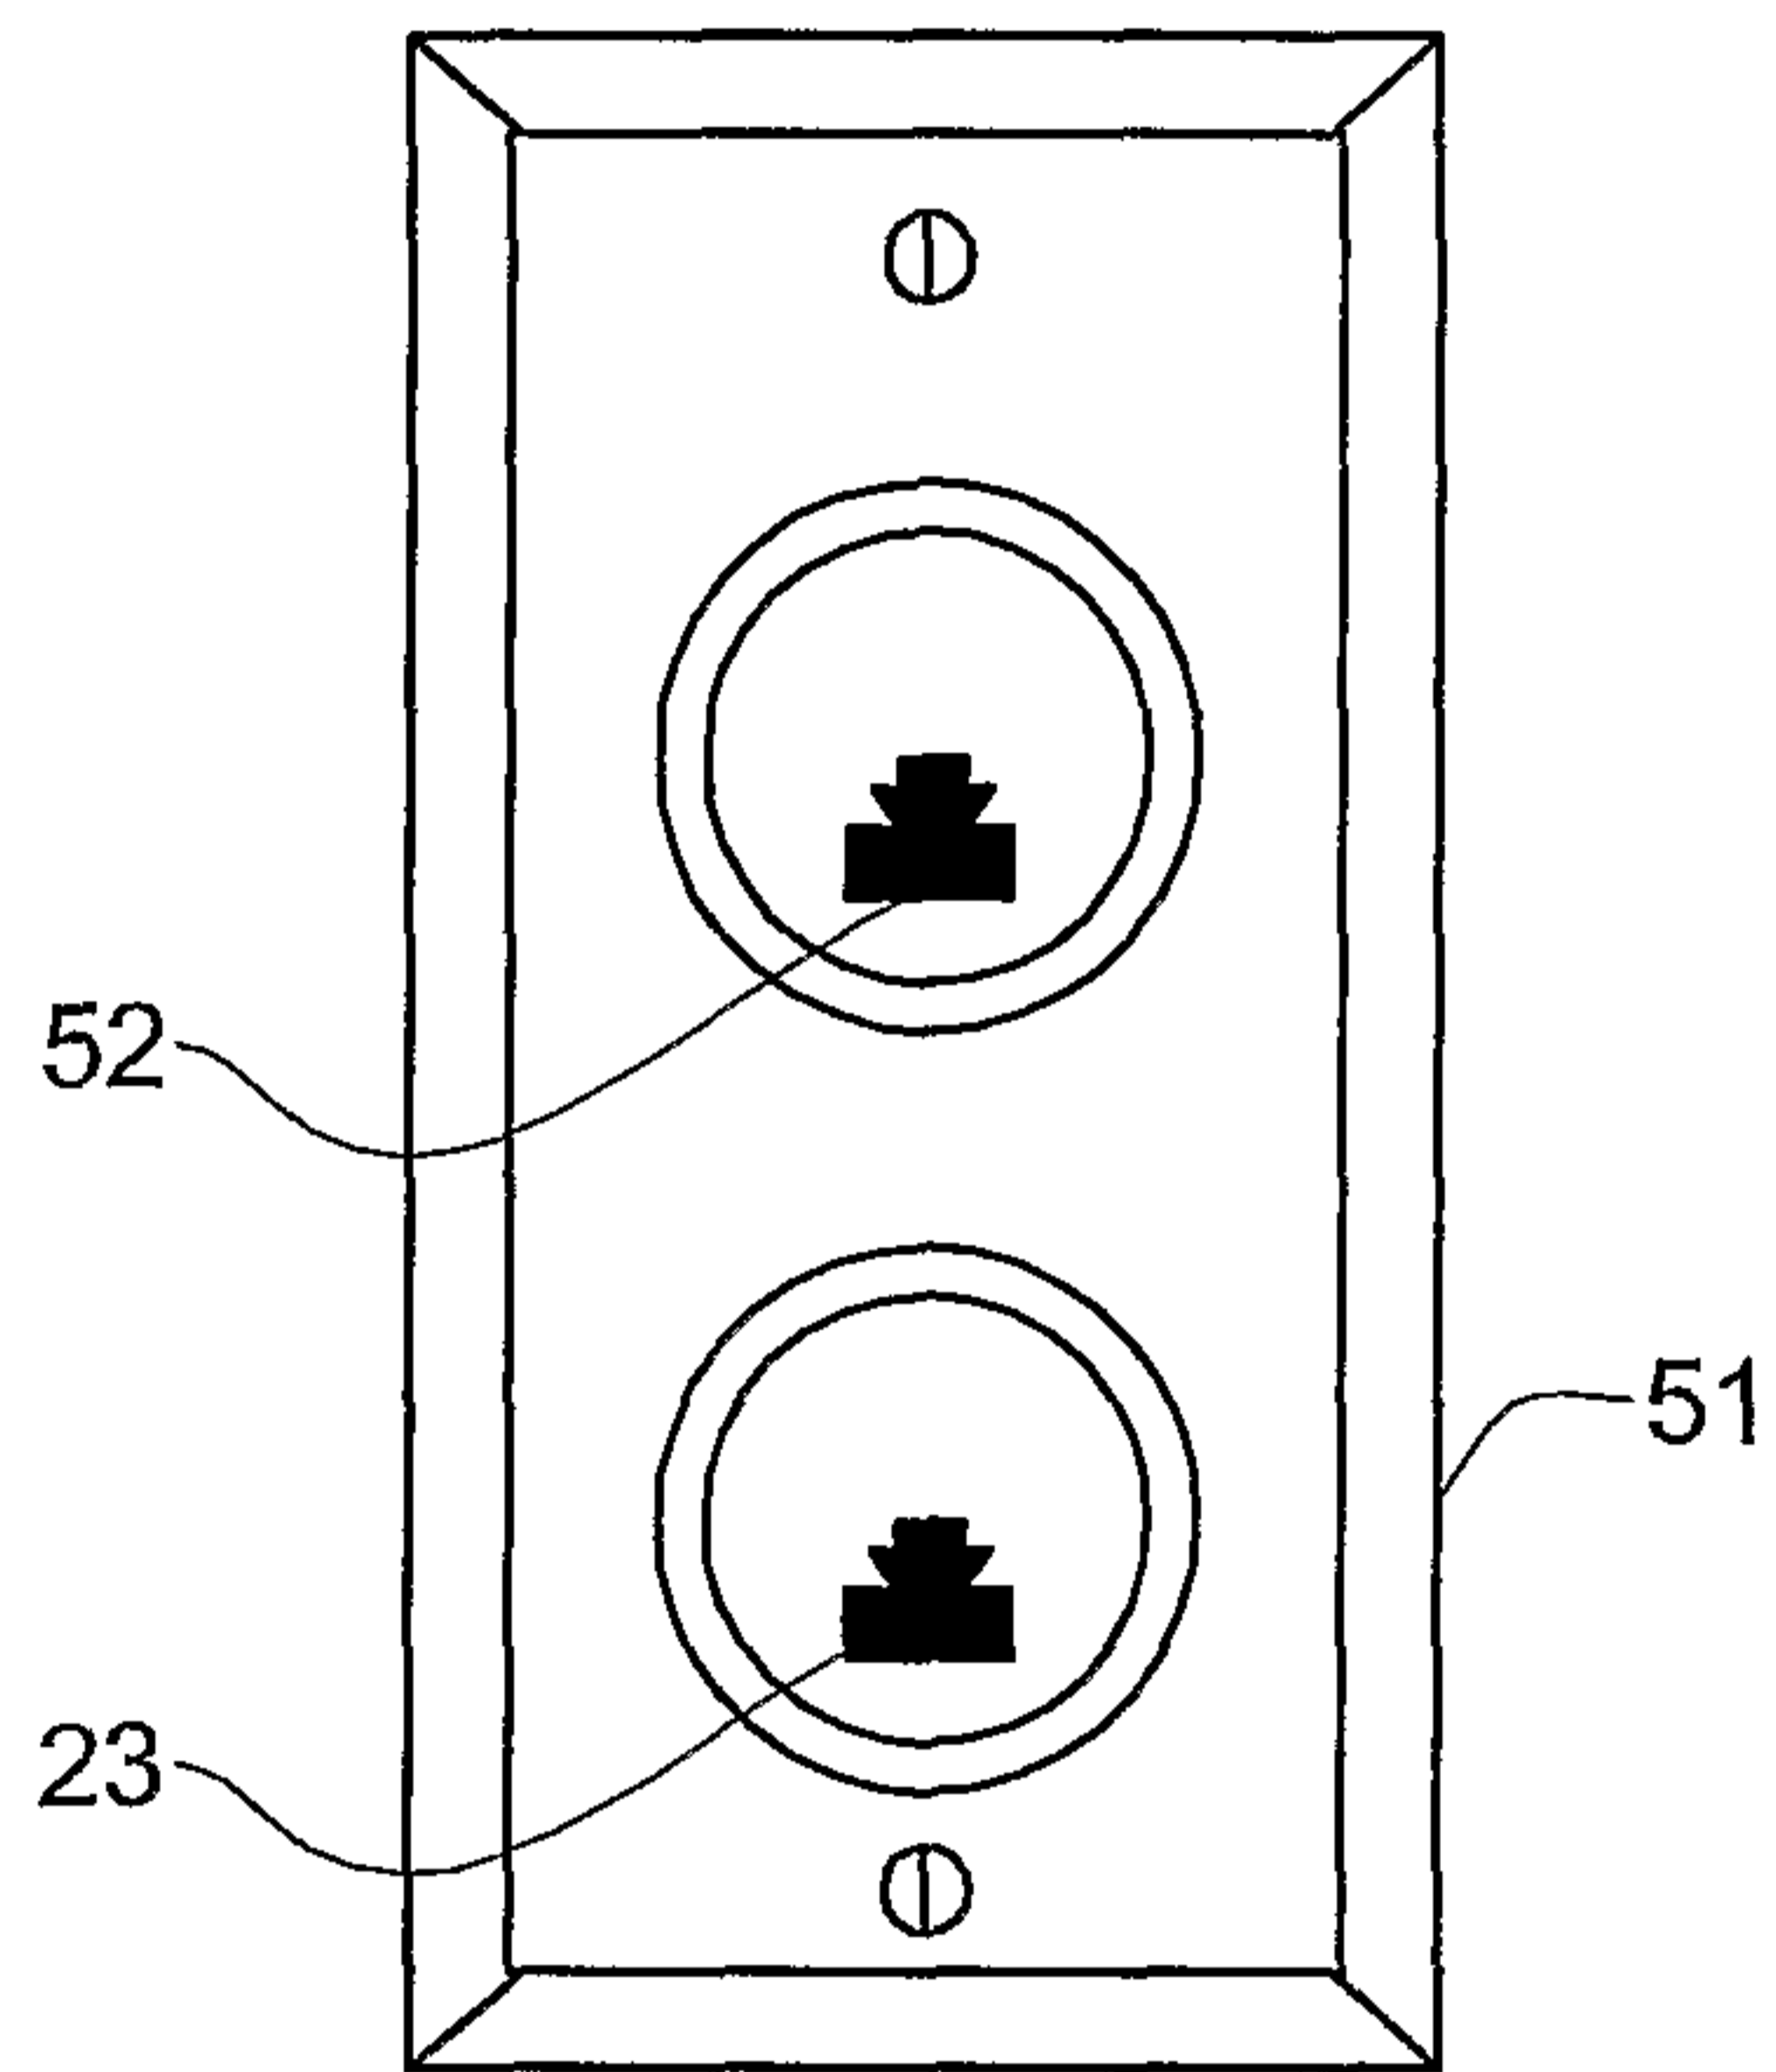


FIG.5 (PRIOR ART)

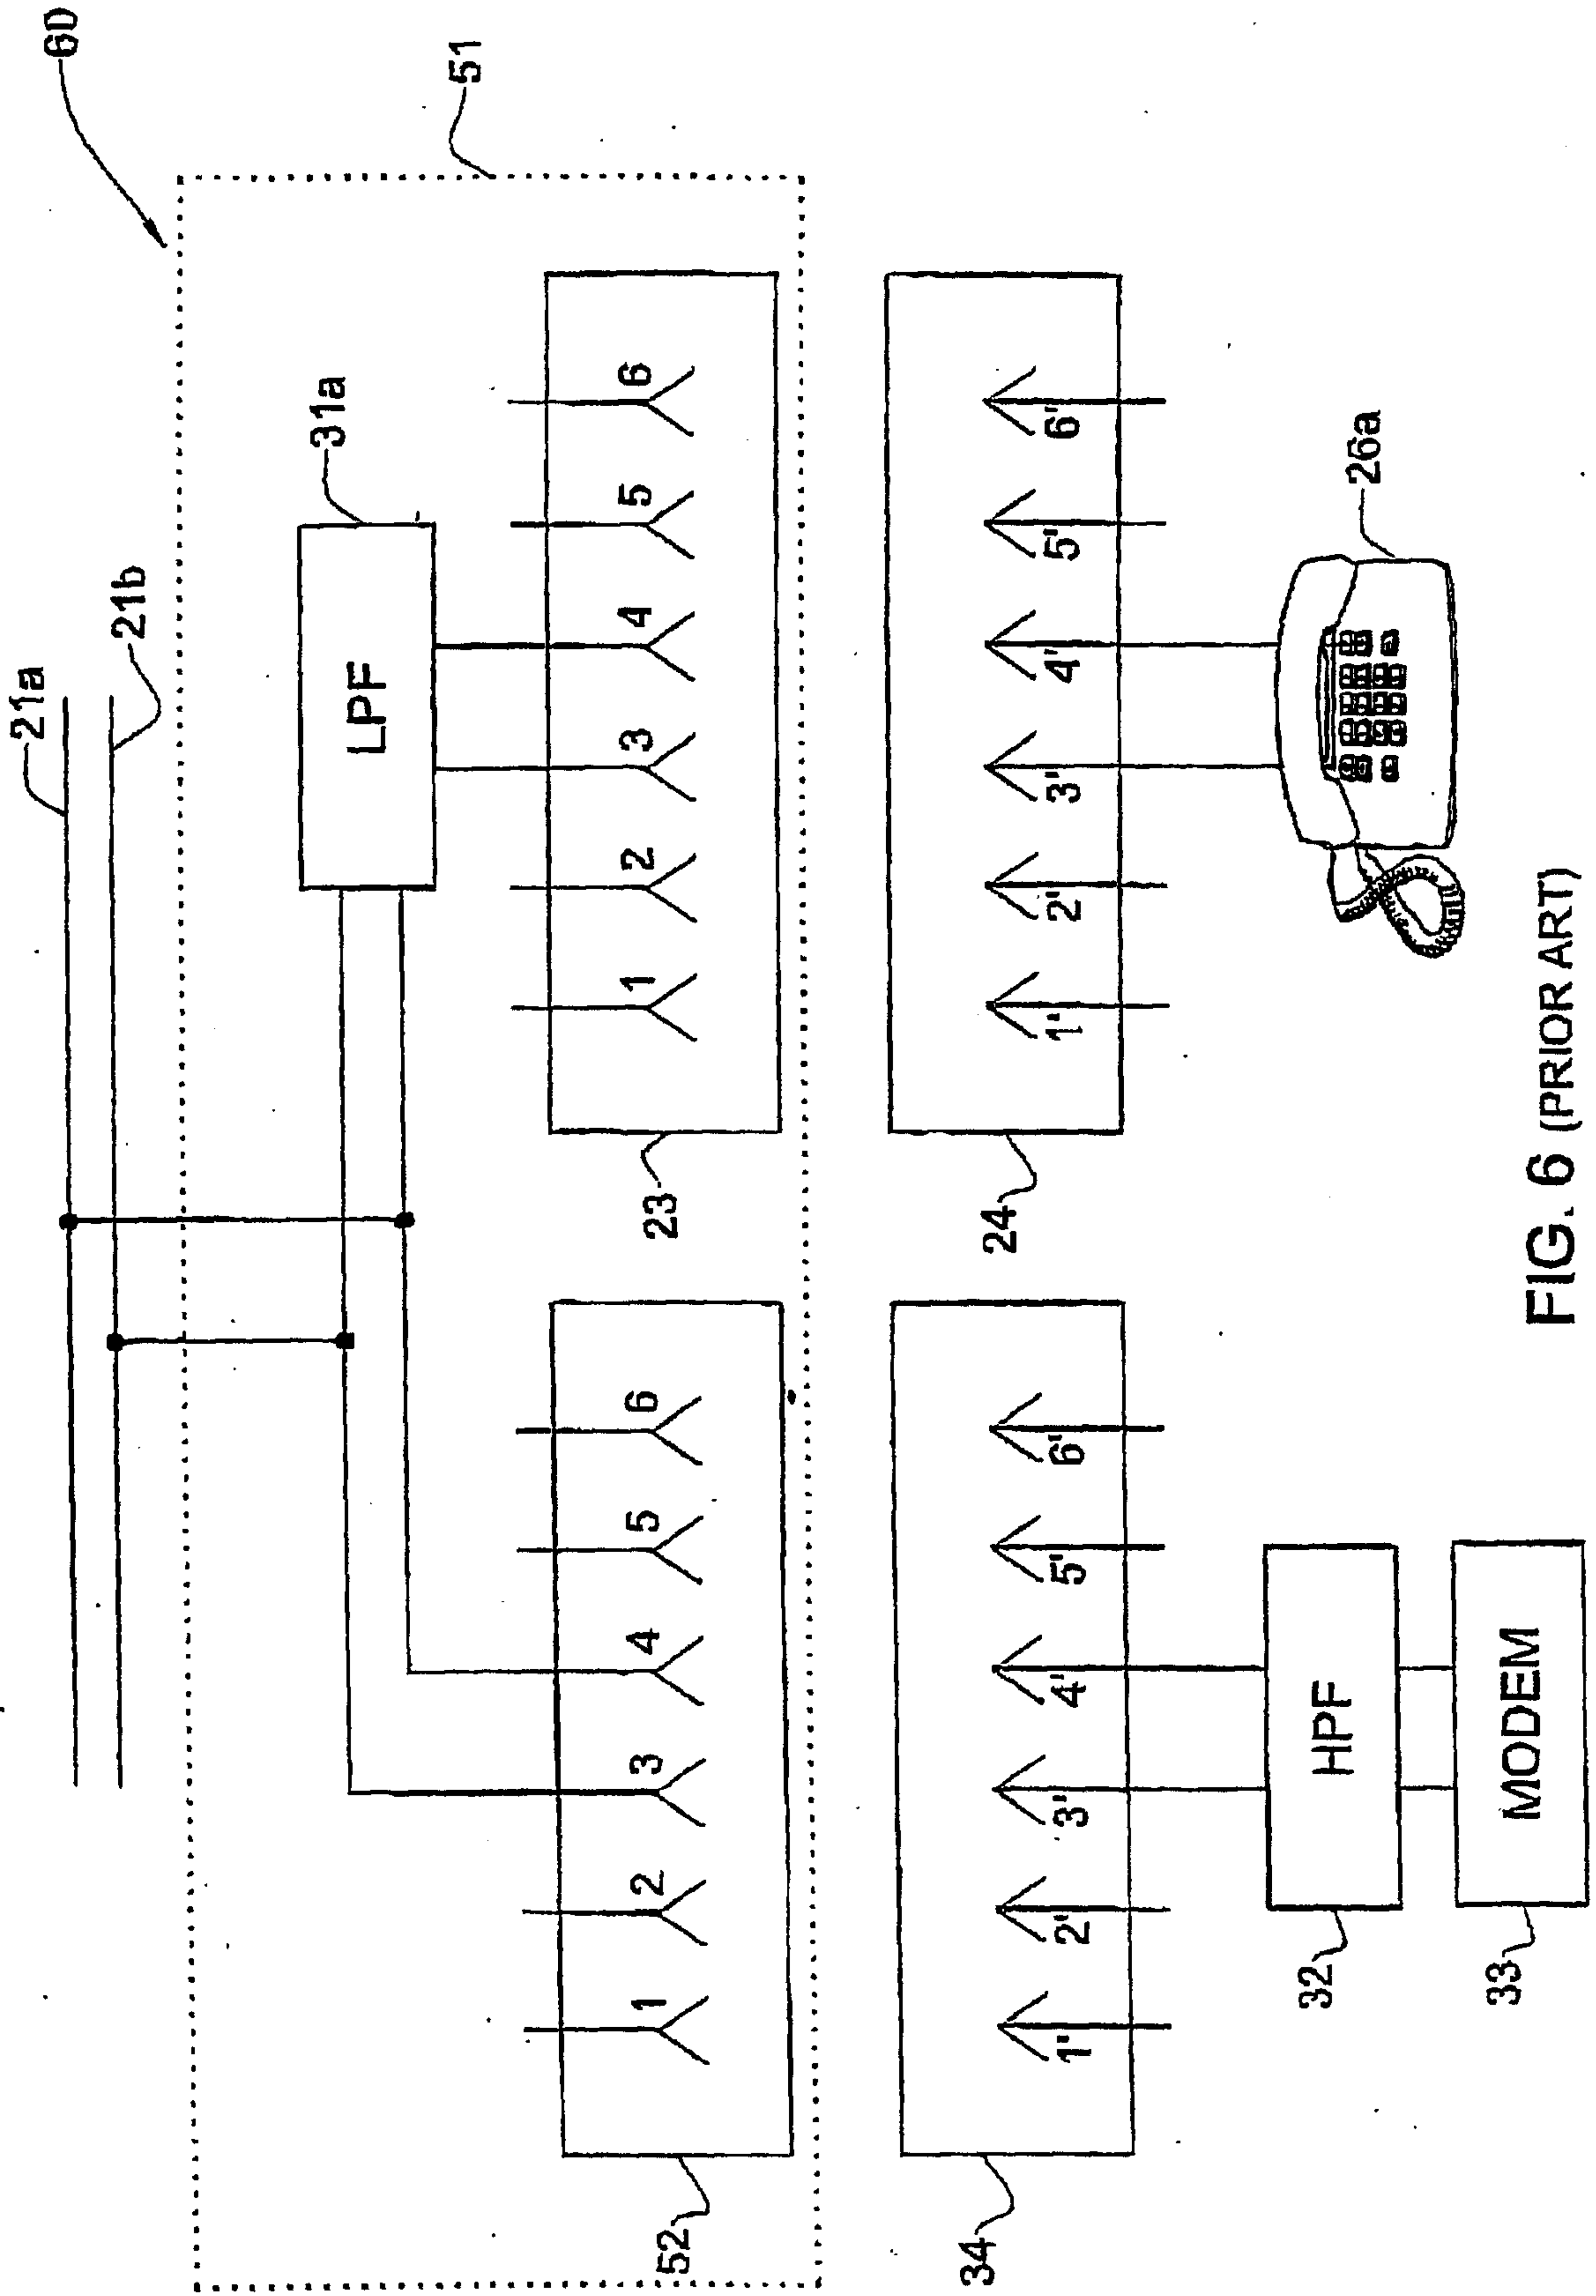


FIG. 6 (PRIOR ART)

8/8

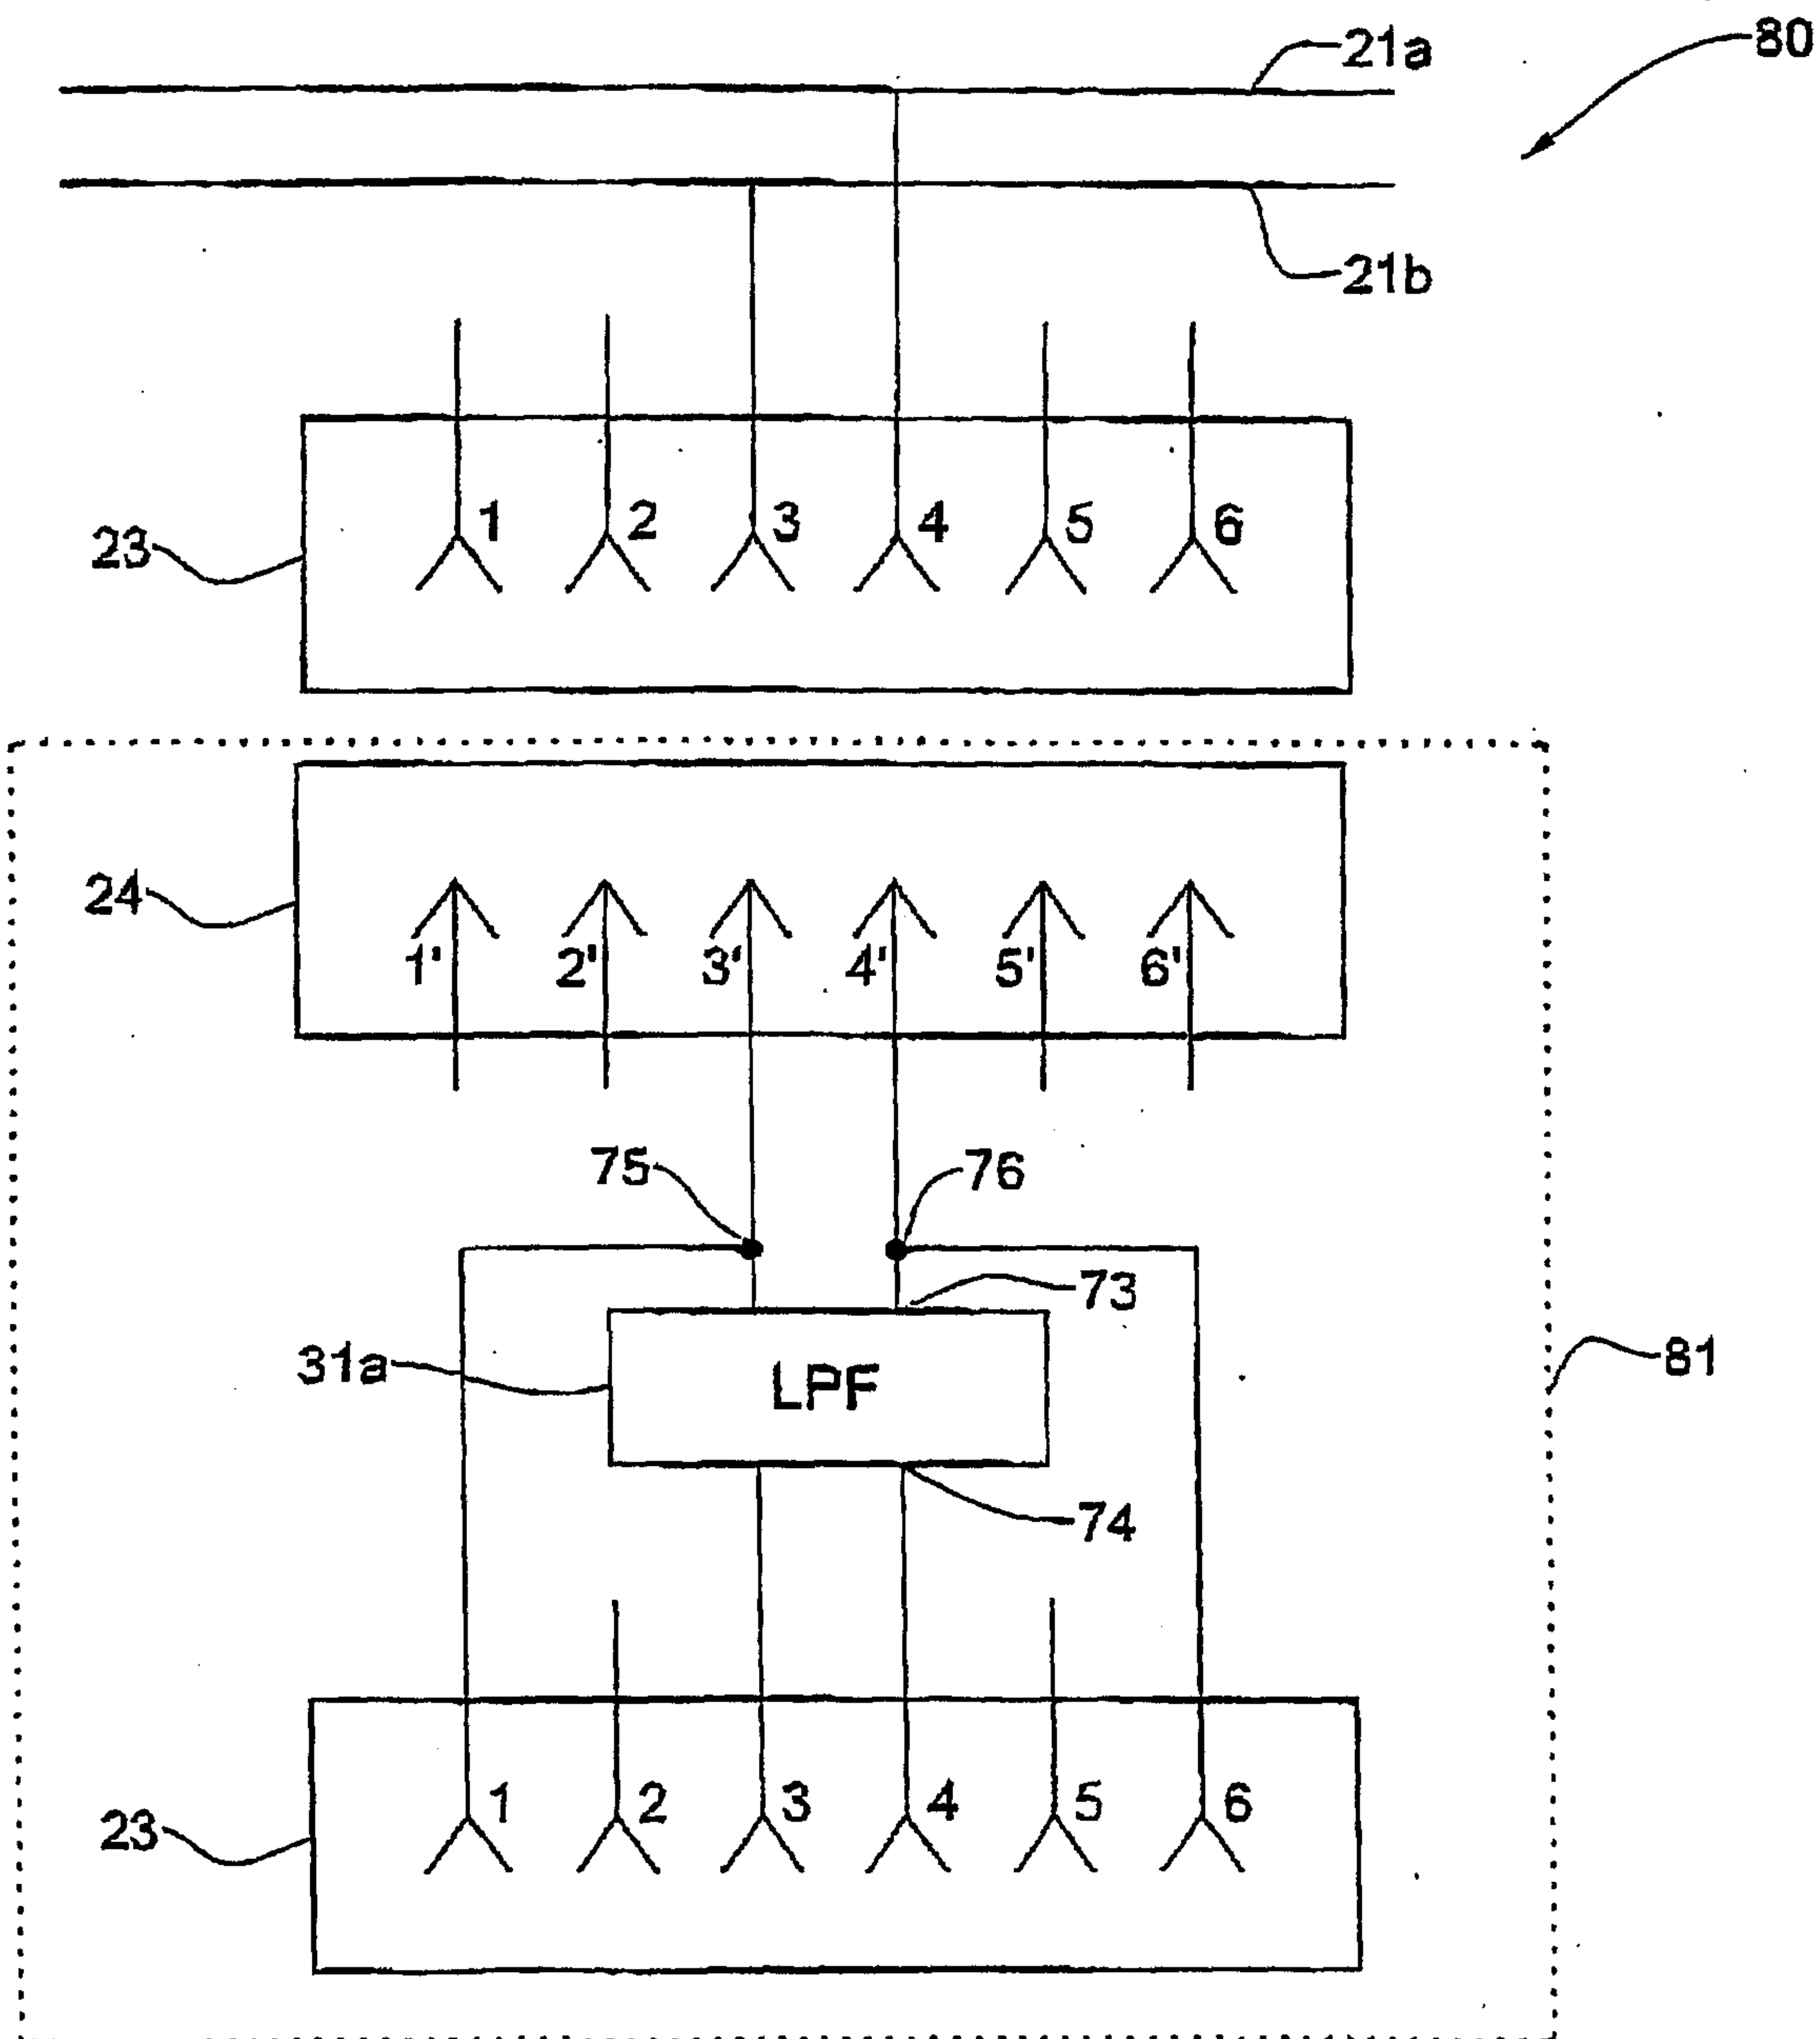


FIG. 8

