

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 267 578 B1

(12)

EUROPEAN PATENT SPECIFICATION(45) Date of publication of patent specification: **19.05.93** (51) Int. Cl.⁵: **H04N 7/133**(21) Application number: **87116590.8**(22) Date of filing: **10.11.87**

(54) **Encoding system capable of accomplishing a high efficiency by anterior and/or posterior processing to quantization.**

(30) Priority: **10.11.86 JP 267338/86**
10.11.86 JP 267339/86

(43) Date of publication of application:
18.05.88 Bulletin 88/20

(45) Publication of the grant of the patent:
19.05.93 Bulletin 93/20

(84) Designated Contracting States:
DE FR GB

(56) References cited:
EP-A- 0 189 703
US-A- 4 189 748
US-A- 4 398 217
US-A- 4 504 860

THE BELL SYSTEM TECHNICAL JOURNAL,
vol. 58, no. 7, September 1979, New York,
A.N. NETRAVALI et al.
"Motion-Compensated Transform Coding",
pages 1703-1718

FERNSEH- UND KINO-TECHNIK, no. 8, 1979,
Berlin, R. NAWRATH, "Verarbeitung von Bil-
dsignalen mit Walsh-Funktionen", pages
227-230

(73) Proprietor: **KOKUSAI DENSHIN DENWA CO., LTD**
3-2, Nishishinjuku 2-chome
Shinjuku-ku Tokyo 163(JP)

Proprietor: **NEC CORPORATION**
7-1, Shiba 5-chome Minato-ku
Tokyo 108-01(JP)

Proprietor: **FUJITSU LIMITED**
1015, Kamikodanaka Nakahara-ku
Kawasaki-shi Kanagawa 211(JP)

Proprietor: **NIPPON TELEGRAPH AND TELEPHONE CORPORATION**
1-6 Uchisaiwaicho 1-chome Chiyoda-ku
Tokyo(JP)

(72) Inventor: **Kaneko, Masahide**
1-29-108, Nishimotomachi 1-chome
Kokubunji-shi Tokyo(JP)
Inventor: **Koike, Atsushi**
8-14, Honcho 5-chome
Koganei-shi Tokyo(JP)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

EP 0 267 578 B1

Inventor: **Ohta, Mutsumi c/o NEC Corporation**
33- 1, Shiba 5- chome

Minato- ku Tokyo(JP)

Inventor: **Matsuda, Kiichi**

Shibueso 7 508- 16, Shiboguchi

Takatsu- ku Kawasaki- shi Kanagawa(JP)

Inventor: **Mukawa, Naoki**

NTT- Shataku 94 3- 102, Nagasawa

Yokosuka- shi Kanagawa(JP)

Inventor: **Kato, Yoichi**

4- 26- 9, Hino Konan- ku

Yokohama- shi Kanagawa(JP)

⁽⁷⁴⁾ Representative: **Vossius & Partner**
Siebertstrasse 4 P.O. Box 86 07 67
W- 8000 München 86 (DE)

Description

This invention relates to an encoding system for use in carrying out encoding of a sequence of digital signals into a sequence of encoded signals with a high efficiency. It is to be noted here that the digital signal sequence may convey an audio signal, although description will be made about an image signal, and that such encoding will be called efficient coding in the instant specification.

In order to carry out efficient coding of the type described, a sequence of digital signals is subdivided in each frame into a plurality of blocks and is subjected to a predetermined linear transform in the respective blocks. Such a linear transform may be, for example, Hadamard transform, Haar transform, Karhunen-Loève transform, Discrete Cosine transform, or the like, and may collectively be called an orthogonal transform. At any rate, the digital signals of each block are converted into transform coefficients which have a statistic distribution in a frequency region between a d.c. component zone and a high frequency zone and which have variable levels of electric power.

It is known in the art that electric power of the transform coefficients is locally distributed or concentrated on a local frequency zone which includes the d.c. component and a low frequency near the d.c. component. This shows that non-zero or significant ones of the transform coefficients mainly appear in the low frequency zone and scarcely appear in the high frequency zone while zero or nonsignificant ones of the transform coefficients mainly appear in the high frequency zone. Such nonsignificant coefficients need not always be transmitted through a transmission line.

Under the circumstances, the transform coefficients are preliminarily processed prior to quantization of the transform coefficients, which will be called anterior processing. A conventional encoding system monitors as the anterior processing a distribution of the significant coefficients in each of the blocks to determine a minimum zone which covers all of the significant coefficients and to transmit only the coefficients of the minimum zone, together with a code assigned to the minimum zone in question. This encoding system may be called a zone detection system. With this zone detection system, transmission is not carried out as regards nonsignificant coefficients which are outside of the minimum zone.

Alternatively, another conventional encoding system detects a final significant coefficient in each block and produces an End Of Block (EOB) code which is representative of continuation of nonsignificant coefficients after the EOB code. Such detection and production of the EOB code are carried out as the anterior processing. In order to effec-

tively detect the EOB code, zigzag scanning is carried out in each block. The encoding system may be referred to as an EOB code system and is effective to reduce redundancy of the coefficients.

Furthermore, still another conventional encoding system carries out the anterior processing by adaptively scanning the transform coefficients of each block in various manners to decide an optimum one of scanning operations that gives a maximum length of continuation of nonsignificant coefficients after a final significant transform coefficient. This system may be called a scanning encoder system and is helpful to reduce an amount of information to be transmitted.

Herein, it is to be noted here that significant transform coefficients have a tendency to be isolated from the other significant transform coefficients in the high frequency zone, although such isolated significant transform coefficients seldom appear in the high frequency zone, as mentioned before.

According to the inventors' experimental studies, it has been found out that removal or neglect of the isolated significant transform coefficients enables a considerable reduction of an amount of information but brings about a reduction of a picture quality from time to time. Accordingly, the experimental studies say that complete neglect of the isolated significant coefficients in the high frequency zone is not favorable in the light of a reduction of the picture quality.

At any rate, the transform coefficients are quantized by a quantizer into a sequence of quantized signals after the above-mentioned anterior processing and are thereafter usually subjected by an encoding unit to variable length encoding which may be called posterior processing. Such posterior processing is carried out by the use of a single conversion table between the quantized signals and variable length codes. This means that the transform coefficients are encoded by the same conversion table, irrespective of the fact that they are present in the low and the high frequency zones. However, it has been also confirmed that the use of the same conversion table is not favorable in view of accomplishing a high efficiency because of the local concentration of the transform coefficients as mentioned before.

The US-A-4 189 748 describes a video bandwidth reduction system. A reduction in bandwidth of two-dimensional video data is obtained by the two-dimensional transformation of the video data by means of one of a class of fast transformations followed by the elimination of certain non-significant transform coefficients prior to the transmission of the transformed data. The lower-order transform coefficients or "zonal coefficients" which are usually significant in size are always

transmitted. Higher - order transform coefficients of a significant size, however, are selected by an adaptive filter and are selectively transmitted. The zonal coefficients are predetermined or invariable in number and are always transmitted. Thus, the coding methods are varied within a predetermined zone of the zonal coefficients and outside the predetermined zone.

Summary of the Invention

It is an object of this invention to provide an encoding system which is capable of considerably reducing an amount of information to be transmitted, without any degradation of quality of a picture reproduced and which can effectively process, prior to quantization, significant transform coefficients isolated in a high frequency zone from the other transform coefficients.

This object is solved with the features of the claims.

This encoding system can establish a high efficiency of encoding after quantization of a transform coefficient sequence.

It is also useful for carrying out variable length encoding of a sequence of quantized signals.

The encoding system according to the invention can avoid the degradation of an effect of information compression which results from misadjustment between a distribution of transform coefficients and variable length encoding characteristics.

Fig. 1 is a view for use in describing coefficients distributed on a block;

Fig. 2 is a graphical representation for use in describing signal levels of the coefficients which appear on sequentially scanning the coefficients illustrated in Fig. 1;

Fig. 3 is a graphical representation for use in describing anterior processing of the coefficients shown in Fig. 2;

Figs. 4(A) and (B) are views for describing zone or area detection which can be used in this invention;

Figs. 5(A) and (B) are views for describing zig-zag scanning which can be used in this invention;

Fig. 6 is a block diagram of an encoding system according to a first embodiment of this invention;

Fig. 7 is a view for use in describing operation of a part of the encoding system illustrated in Fig. 6;

Fig. 8 is a view for use in describing another operation of the part of the encoding system illustrated in Fig. 6;

Fig. 9 is a block diagram of an encoding system according to a second embodiment of this in-

vention;

Fig. 10 is a block diagram of an encoding system according to a third embodiment of this invention;

Fig. 11 is a view for use in describing a portion of the encoding system illustrated in Fig. 10;

Fig. 12 is a view for use in describing another portion of the encoding system illustrated in Fig. 10; and

Fig. 13 is a block diagram of an encoding system according to a fourth embodiment of this invention.

Referring to Figs. 1 and 2, description will be made as regards principles of this invention for a better understanding of this invention. In Fig. 1, an illustration is made about a sequence of significant coefficients (depicted at crisscrosses) which result from an orthogonal transform, such as Hadamard or Discrete Cosine transform, of a sequence of image signals and which are arranged in a single one of blocks shown by a rectangle. As regards a horizontal direction H of Fig. 1, the coefficients are arranged from a lefthand side towards a righthand side as the coefficients become high in frequency. As regards a vertical direction V, the coefficients are arranged downwards as the coefficients become high in frequency. In this connection, a d.c. component of the coefficient is placed at an uppermost and leftmost position of Fig. 1.

As understood from Fig. 1, the coefficients are mainly concentrated on a low frequency zone along the horizontal and vertical directions while they are seldom on a high frequency zone along the horizontal and vertical directions. This means that electric power of low frequency components of the coefficients is greater than electric power of high frequency components of the coefficients.

It is to be noted here that the high frequency components of the significant coefficients are apt to be isolated from the other significant coefficients, as depicted at A and B. The illustrated high frequency components A and B may be called first and second high frequency components, respectively, and are assumed to have high and low levels of electric power. Therefore, neglectation of the first frequency component A gives rise to serious degradation of a picture quality while neglectation of the second frequency component B hardly degrades the picture quality.

Temporarily referring to Fig. 2, let the coefficients illustrated in Fig. 1 be sequentially scanned from the d.c. component along the horizontal direction and thereafter vertically scanned in a usual manner. Such scanning will be referred to as sequential scanning and brings about a signal variation as exemplified in Fig. 2. For convenience of description, a two-dimensional arrangement of the significant coefficients is rearranged in a one-

dimensional arrangement in the order of scanning in Fig. 2. In this connection, the significant coefficients are arranged from low frequency components to high frequency ones in a direction from the lefthand side of an abscissa towards the right-hand side. Each component of the significant coefficients has a signal level of electric power, as shown along an ordinate of Fig. 2.

As illustrated in Fig. 2, the second frequency component B is higher in frequency than the first frequency component A and is lower in electric power than the latter. In Fig. 2, a nonsignificant coefficient C is present as a third frequency component in the lower frequency zone.

In usual quantization, the coefficients are assumed to be quantized into a sequence of quantized signals by the use of first, second, third, and fourth quantization levels QL1, QL2, QL3, and QL4, respectively. In this event, quantization is carried out not only about the first frequency component A but also the second frequency component B because the first and the second frequency components A and B exceed the first quantization level QL1.

According to this invention, a threshold level TH is selected, for example, between the first and the second quantization levels QL1 and QL2, as shown at a broken line in Fig. 2, and is used to determine a significant area which is defined in each block in a manner to be described. In this event, the second frequency component B is judged to be outside of the significant area and neglected because the second frequency component B is lower than the threshold level TH as illustrated in Fig. 2. In other words, the second frequency component B is placed inside of a non-significant area and judged to be invalid while the third frequency component C in the significant area is judged to be valid. Such judgement is possible by monitoring the order of scanning the coefficients in addition to the signal levels of the coefficients.

After the significant area is determined by the use of the threshold level TH, quantization is carried out only about the significant coefficients placed within the significant area. By determining the significant area in each block, it is possible to considerably reduce an amount of information, as will become clear later.

Referring to Fig. 3, let the coefficients illustrated in Fig. 2 be processed or encoded with reference to the first through fourth quantization levels QL1 to QL4 in a digital manner into a digital signal shown in Fig. 3. When the second frequency component B is encoded with the threshold level TH (Fig. 2) left out of consideration, encoding must be carried out within a first range F1 from the d.c. component to the second frequency component B, although no encoding is carried out between the

second frequency component B and the block end. On the other hand, when the significant area is defined with reference to the threshold level TH, encoding may be carried out in a second range F2 between the d.c. component and the first frequency component A. Accordingly, no encoding may be carried out in a third range F3 between the first and the second frequency components A and B. In this event, the third frequency component C (Fig. 2) is processed as a valid component because it is present in the significant area defined by the threshold level TH.

Referring to Figs. 4(A) and 4(B), it is assumed that zone detection as mentioned in the preamble of the instant specification is used to detect a significant area of the significant coefficients distributed in the manner illustrated in Fig. 1. As shown in Fig. 4(A), no consideration of the threshold level TH (Fig. 2) provides a first minimum zone Z1 including the first and the second frequency components A and B. On the other hand, consideration of the threshold level TH results in a reduction of the first minimum zone Z1 to a second minimum zone Z2 excluding the second frequency component B. Thus, the zone detection is effective to determine the significant area with reference to the threshold level TH.

Referring to Figs. 5(A) and 5(B), zigzag scanning may be used to define the significant area in connection with the arrangement of the significant coefficients illustrated in Fig. 1. When the second frequency coefficient B is judged to be significant or valid, the zigzag scanning must be continued until the second frequency component B. However, the zigzag scanning can be stopped at the first frequency component A when the second frequency component B is neglected with reference to the threshold level TH.

As readily understood from Fig. 5(B), it is possible to considerably reduce a scanning area by neglecting the second frequency component B in relation to the threshold level TH. Thus, the zigzag scanning can be also used to determine the significant area.

An EOB code may be produced to specify a final one of the coefficients in each block when the zigzag scanning is carried out.

In addition, the significant area can be determined by the use of an adaptive scanning technique wherein optimum scanning is selected from horizontal scanning, vertical scanning, and zigzag scanning.

Embodiments

Referring to Fig. 6, an encoding system according to a first embodiment of this invention is supplied with a sequence of input signals IN which

may be given a digital form. The input signals IN may be a predictive error signal derived from an image signal in a manner described, for example, in United States Patent Application Serial No. 29,565 filed March 24, 1987, by M. Kaneko et al. The input signal sequence therefore carries a succession of picture elements. The input signal sequence IN is divided into a succession of frames and given to a block division circuit 11 to be subdivided into a sequence of blocks in the respective frames. Such a block division circuit 11 is known in the art and will not be described any longer. The block division circuit 11 produces a sequence of subdivided input signals as a sequence of digital signals DG and supplies the digital signal sequence DG to a linear transform circuit 12 for carrying out a predetermined linear transform, such as discrete cosine transform or the like.

In the linear transform circuit 12, the digital signal sequence DG is subjected in a known manner to the predetermined linear transform into a sequence of coefficients. As known in the art, the picture elements of a preselected number $N1 \times N2$ are transformed into the coefficients of the same number. Let the coefficient sequence be divided into a sequence of coefficient blocks each of which includes the coefficients equal in number to the picture elements included in each block.

In Fig. 6, the coefficient sequence is produced as a sequence of coefficient signals CO and subjected to anterior or preliminary processing prior to quantization which is carried out in a quantizer 15. In order to carry out the anterior processing, the illustrated encoding system comprises a threshold circuit 16 for producing a threshold signal th which is representative of a threshold level TH exemplified in Fig. 2. A comparator 17 is supplied with the coefficient signal sequence CO and the threshold signal th. The comparator 17 successively compares each of the coefficients with the threshold level in the respective blocks to produce a comparison result signal CR representative of results of comparison in the respective blocks. In other words, the comparison result signals CR represent whether the coefficients are greater or not greater than the threshold level TH.

The comparison result signals CR are delivered to a classifying circuit, depicted at a broken line block 20, together with the coefficient signal sequence CO. The classifying circuit 20 comprises an area decision circuit 21 operable in response to the comparison result signal CR to decide a significant area which includes significant ones of the coefficients. To this end, the area decision circuit 21 may carry out a preselected operation selected from the zone detection, the zigzag scanning, and the adaptive scanning in a known manner. How-

ever, it should be noted that the comparison result signals CR are subjected to such a preselected operation in the respective blocks.

Let the zone detection be carried out in the area decision circuit 21 so as to determine the significant area for the comparison result signals CR. In this event, an optimum area is selected as the significant area from a plurality of candidate areas in the area decision circuit 21.

Temporarily referring to Fig. 7, first through third ones CD1 to CD3 of the candidate areas are exemplified which are prepared in the area decision circuit 21. The first candidate area CD1 is elongated in a vertical direction while the second candidate area CD2 is extended along a horizontal direction. In addition, the third candidate area CD3 is of a sector shape.

In the area decision circuit 21, the comparison result signals CR are collected and memorized in a memory (not shown) to be collated with each of the candidate areas, as shown in Fig. 7. More specifically, significant ones of the comparison result signals are distributed in the memory to show a distribution specified by an area outline or configuration similar to either one of the candidate areas. Each of the candidate areas is successively compared with the area configuration to select a minimum one of the candidate areas that includes all of the significant comparison result signals. A result of selection is produced from the area decision circuit 21 as a significant area signal AS (Fig. 6) to specify which one of the candidate areas is selected.

Alternatively, the zigzag scanning is assumed to be used in the area decision circuit 21 so as to decide the significant area. In this case, the comparison result signals are scanned at every block on the memory of the area decision circuit 21 in the manner illustrated in Figs. 5(A) and 5(B).

Referring to Fig. 8, the significant comparison result signals CR (Fig. 6) are depicted at crosses and scanned in a zigzag manner as shown by a solid line. Such zigzag scanning is progressive from the low frequency component towards the high frequency components. When a final one of the significant comparison result signals is scanned in the above-mentioned manner, zero or nonsignificant ones of the comparison result signals follows the final significant comparison result signal until a block end, as shown by a broken line in Fig. 8. The nonsignificant comparison result signals need not always be encoded. In other words, the zigzag scanning may be stopped at the final significant comparison result signal. When no zigzag scanning is carried out as regards the nonsignificant comparison result signals following the final significant comparison result signal, the EOB (end of block) code is substituted for the

nonsignificant comparison result signals. The zig-zag scanning becomes effective as the nonsignificant comparison result signals becomes long.

It is also possible to produce the number of the significant comparison result signals instead of the EOB code. At any rate, the significant area signal AS is produced from the area decision circuit 21 until production of the EOB code or detection of the final significant comparison result signal.

Furthermore, the adaptive scanning may be used to decide the significant area in the area decision circuit 21 illustrated in Fig. 6. In the adaptive scanning, optimum scanning is selected from the vertical scanning, the horizontal scanning, and the zigzag scanning by monitoring a length of nonsignificant comparison result signals following a final one of significant comparison result signals. Specifically, each length of the nonsignificant comparison result signals is calculated on carrying out the vertical scanning, the horizontal scanning, and the zigzag scanning. As the optimum scanning, decided is either one of the vertical scanning, the horizontal scanning, and the zigzag scanning that provides a maximum length of the nonsignificant comparison result signals. Let the significant comparison result signals have distributions illustrated at CD1, CD2, and CD3 in Fig. 7. A selected one of the vertical scanning, the horizontal scanning, and the zigzag scanning is decided as the optimum scanning in connection with the distributions CD1, CD2, and CD3, as readily seen from Fig. 7.

Thus, the scanings are switched from one to another in the adaptive scanning. This shows that the optimum scanning may be different from scanning carried out as regards the coefficients in the block division circuit 11 and that the coefficients must be rearranged in dependency upon the optimum scanning when the adaptive scanning is carried out in the area decision circuit 21.

In this event, the significant area signal AS is produced from the area decision circuit 21 until the final significant comparison result signal, together with an optimum scanning signal OP (Fig. 6) representative of the optimum scanning.

Referring back to Fig. 6, either one of the area detection and the zigzag scanning is assumed to be used in the area decision circuit 21. Under the circumstances, the coefficient signal sequence CO is supplied direct to a judging circuit 25 through no intervention between the linear transform circuit 12 and the judging circuit 25. The judging circuit 25 is put into an active state during reception of the significant area signal AS produced in the above-mentioned manner. As a result, the judging circuit 25 judges the coefficients to be valid during presence of the significant area signal AS. Otherwise, the coefficients are judged to be invalid. From this fact, it is readily understood that the judging circuit

25 serves to judge whether or not the coefficients of each block are present inside of the significant area and to successively classify each of first and second species coefficients which are valid and invalid in each block in consideration of the significant area signal AS.

As a result, only the first species coefficients are produced as a sequence of significant coefficient signals SC. Thus, the significant coefficient signal sequence SC appears when the coefficients are present inside of the significant area.

On the other hand, when the coefficients are judged to be the second species coefficients due to the fact that the coefficients are not present in the significant area, none of the significant coefficient signals are produced by the judging circuit 25 with the coefficients in question suppressed.

In Fig. 6, let the area decision circuit 21 carry out the adaptive scanning in the above-mentioned manner to produce the significant area signal AS together with the optimum scanning signal OP. As mentioned before, the coefficient signals CO must be rearranged in accordance with the optimum scanning signal OP. To this end, the coefficient signal sequence CO is sent to a rearrangement circuit 28 which is known in the art. Supplied with the optimum scanning signal OP, the rearrangement circuit 28 rearranges the coefficient signal sequence CO into a sequence of rearranged coefficient signals RA by scanning the coefficient signals again in accordance with the optimum scanning determined by the area decision circuit 21. The rearranged coefficient signal sequence RA conveys the coefficients which are not subjected to quantization and is sent to the judging circuit 25 to be processed in the above-mentioned manner into the significant signal sequence SC.

Thus, the coefficient signal sequence CO is preliminarily processed prior to quantization into the significant signal sequence SC by a combination of the threshold circuit 16, the comparator 17, the area decision circuit 21, the judging circuit 25, and the rearranging circuit 28. In this connection, the significant signal sequence SC and the significant area signal AS may be collectively referred to as a sequence of preliminarily processed signals. Moreover, the area decision circuit 21, the judging circuit 25, and the rearranging circuit 28 are operable to classify the coefficients into the first and the second species coefficients, as described before, and therefore serve as the classifying circuit 20.

In Fig. 6, the quantizer 15 may comprise a quantization circuit and a sample memory, as will later be described, and quantizes the significant coefficient signal sequence SC into a sequence of quantized signals QS in accordance with a quantization characteristic. The quantization character-

istic may be selected from a plurality of quantization characteristics as a selected quantization characteristic in a known manner and switched to another quantization characteristic at every predetermined interval of time, for example, each frame. In order to control the quantizer 15, a controller 31 produces a quantization control signal C1 indicative of the selected quantization characteristic and supplies the quantization control signal C1 to the quantizer 15.

The illustrated controller 31 also supplies the threshold circuit 16 with a quantization control signal C2 which is indicative of the threshold level TH. The threshold level TH may be either invariable within each block or variable at every one of the coefficients placed within each block. In addition, both the quantization characteristic and the threshold level TH may be varied so as to effectively control an amount of information to be encoded.

The significant area signal AS and the quantized signal sequence QS are supplied to an encoder circuit 33 to be subjected to posterior processing which may be variable length encoding. In the illustrated example, the encoder circuit 33 is also supplied with the quantization control signal C1 to specify the selected quantization characteristic. Herein, the significant area signal AS carries information indicative of a selected one of the candidate areas or zones, such as CD1 and CD2 (Fig. 7), when the area or zone detection is used in the area decision circuit 21. On the zigzag scanning, the significant area signal AS carries the EOB code after the significant comparison result signals. On the adaptive scanning, the significant area signal AS carries, in addition to the EOB code, information indicative of the optimum scanning.

In any event, the encoder circuit 33 encodes the significant area signal AS, the quantized signal sequence QS, and the quantization control signal C1 into a sequence of encoded signals EC which is sent through a transmission line or path to a decoding system (not shown).

Referring to Fig. 9, an encoding system according to a second embodiment of this invention comprise similar parts designated by like reference numerals and symbols. In Fig. 9, it is to be noted that the classifying circuit 20 comprises a first area decision circuit 21' without a rearrangement circuit, such as 28 in Fig. 6. The first area decision circuit 21' decodes a significant quantization area in response to the comparison result signal sequence CR by carrying out either the zone detection or the zigzag scanning. This means that the adaptive scanning is not used in the illustrated classifying circuit 20. In this connection, no rearrangement circuit is necessary in the illustrated classifying circuit 20.

The coefficient signal sequence CO is sequentially given to the judging circuit 25 without changing the order of the coefficients while the significant area signal AS is given to the judging circuit 25 in the manner mentioned in conjunction with the zone detection and the zigzag scanning in Fig. 6. With this structure, the coefficients within the significant area are judged in the judging circuit 25 to be the first species coefficients and are produced as the significant coefficient signals SC. On the other hand, the coefficients outside of the significant area are forced to be zero or nonsignificant coefficients which may be called the second species coefficients.

In the example being illustrated, the second species coefficients are sent to the quantizer 15 together with the first species coefficients. As a result, the quantizer 15 quantizes not only the first species coefficients but also the second species coefficients into a sequence of quantized signals QS'.

The illustrated quantized signal sequence QS' is delivered to a rearrangement circuit 28' and a second area decision circuit 35. The rearrangement circuit 28' may be similar in structure and operation to that illustrated in Fig. 6.

The second area decision circuit 35 carries out the adaptive scanning in the manner mentioned in Fig. 6 to determine optimum scanning of the vertical scanning, the horizontal scanning, and the zigzag scanning and to produce an optimum scanning signal OP representative of the optimum scanning. The rearrangement circuit 28' rearranges the quantized signal sequence QS' into a sequence of rearranged signals RA' in accordance with the optimum scanning signal OP. The rearranged signal sequence RA' therefore conveys the coefficients quantized by the quantizer 25. Thus, a combination of the second area decision circuit 35, the rearrangement circuit 28', and the encoder circuit 33 is located after the quantizer to process the quantized signal sequence QS' and may be referred to as a posterior processing circuit for carrying out posterior processing.

The illustrated quantized signal sequence QS' suppresses isolated high frequency components, such as B in Fig. 2, having a level lower than the threshold level TH, because the significant area is decided by the first area decision circuit 21'. Although such suppressed components are quantized by the quantizer 15 and rearranged by the rearrangement circuit 28', they seldom appear in the rearranged signal sequence RA' by carrying out the optimum scanning in the rearrangement circuit 28'. For this purpose, the rearrangement circuit 28' may comprise a memory (not shown) for successively storing the quantized signal sequence SC and an address control circuit (not shown also).

for scanning memory addresses in the order determined for the optimum scanning. Such a rearrangement circuit 28' is known in the art and will not be described any longer.

The rearranged signal sequence RA', the optimum scanning signal OP, and the quantization control signal C1 are encoded by the encoder circuit 33 into a sequence of encoded signals EC. At any rate, the second area decision circuit 35 serves to determine the encoded signals EC sent to a transmission line and may be called a transmission area or zone decision circuit.

Referring to Fig. 10, an encoding system according to a third embodiment of this invention is for carrying out posterior processing after quantization. In the example being illustrated, variable length encoding is carried out as the posterior processing. In Fig. 10, a quantizer 15 is also illustrated along with a posterior processing circuit for the posterior processing. The illustrated quantizer 15 comprises a quantization circuit 41 which may be supplied either with the significant coefficient signal sequence (Fig. 6) or with a combination of the first and the second species signals (Fig. 9). In addition, any other coefficient signal sequence may be given to the illustrated quantizer 15, if it is divided into a sequence of blocks. Taking this into consideration, the coefficient signal sequence is depicted at CF and is quantized in accordance with a quantization characteristic by the quantization circuit 41. The quantization characteristic may be changed to another one under control of a controller, such as 31 in Figs. 6 and 9. As a result of quantization, a sequence of sampled signals is successively stored in a sample readout circuit 42 which is operable as a part of the quantizer 15 and which may be a memory circuit.

Herein, it is assumed that each of the sample signals may be made to correspond to a picture element and that each block is composed of a predetermined number of the picture elements, such as 4×4 , 8×8 , 16×16 , or the like. For brevity of description, let the predetermined number be equal to 8×8 , namely, sixty-four.

Referring to Fig. 11, it is also assumed that the sampled signals or the picture elements of sixty-four are already stored in a manner similar to the sequential scanning. More particularly, first through eighth ones of the sampled signals are memorized in an uppermost or first row of Fig. 11 along a horizontal direction while ninth through sixteenth picture elements are memorized in a second row of Fig. 11 in the horizontal direction. Likewise, the remaining sampled signals are assigned to each row.

In Figs. 10 and 11, the sampled signals are successively read out of the sample readout circuit 42 in numerical order from unity to sixty-four

under control of a readout control circuit 43. To this end, the readout control circuit 43 supplies the sample readout circuit 42 with an address indication signal ADD which specifies each address in the numerical order illustrated in Fig. 11 and which may be called a synchronizing signal. As a result, zigzag scanning is carried out on the sample readout circuit 42 to produce a sequence of quantized signals depicted at QS in Fig. 10.

In the meanwhile, zigzag scanning is progressive from the low frequency components of the coefficients towards the high frequency components, as described before. This is true of the sampled signals or quantized signals derived from the coefficients. From this fact, it is understood that the quantized signals for the low frequency components have a distribution which is different from the quantized signals for the high frequency components. In other words, the distribution of the quantized signals for the low frequency components becomes dense in comparison with the distribution of the quantized signals for the high frequency components.

Under the circumstances, high efficiency of encoding or posterior processing can be accomplished, if both the quantized signals for the low and the high frequency components can be encoded into short length codes, respectively. This means that the quantized signals for the low and the high frequency components are preferably encoded in accordance with different code sets.

Taking the above into consideration, a plurality of code sets are memorized in a variable length code memory 45 to define different mutual relationships between each quantized signal QS and the corresponding variable length code. The illustrated variable length code memory 45 memorizes first through fifth ones of the code sets 46 to 50 which may be numbered from unity to five, respectively, and which are switched from one to another, as will become clear soon.

Referring to Fig. 12 in addition to Fig. 10, the address indication signal ADD for the zigzag scanning is also delivered to a code set indication circuit 53 which memorizes a conversion table illustrated in Fig. 12. Supplied with the address indication signal ADD which specifies table addresses in the numerical order illustrated in Fig. 11, the code set indication circuit 53 produces a code set number signal NM which is assigned to the first through fifth code sets 46 to 50 and which is represented by 1 to 5 in Fig. 12. As illustrated in Fig. 12, the first and the second code sets 46 to 48 are selected for the low frequency components while the fourth and the fifth code sets 49 and 50 are selected for the high frequency components.

In Fig. 10, the code set number signal NM is sent to a switching circuit 55 to successively select

either one of the first through fifth code sets 46 to 50. As a result, a selected one of the first through fifth code sets 46 to 50 is connected in a time division fashion to a variable length encoder 56 supplied with the quantized signals QS. The variable length encoder 56 carries out the variable length encoding within each block in accordance with the first through fifth code set switched from one to another in the time division fashion and produces a sequence of encoded signals EC.

With this structure, it is possible to represent both the low and the high frequency components by short length codes, respectively, and to therefore accomplish high efficiency of the encoding. The variable length codes of each code set may have common code patterns in each of the remaining code sets and may be equal in number to those of the remaining code sets. However, relationships between the quantized signals and the code patterns must be different from one another in the first through fifth code sets.

Referring to Fig. 13, an encoding system according to a fourth embodiment of this invention is for carrying out variable length encoding as posterior processing by detecting a final one of significant coefficients which are produced in the form of quantized signals QC. More particularly, the coefficient signal sequence CF is quantized by the quantization circuit 41 into a sequence of sampled signals which is stored in a sample readout circuit 42'. The sampled signal sequence is read out of the sample readout circuit 42' as the quantized signal sequence QC. Either one of the sequential scanning or the zigzag scanning may be carried out so as to read the sampled signal sequence QC out of the sample readout circuit 42'.

The quantized signal sequence QC is delivered to a variable length encoder 56 similar to that illustrated in Fig. 10 on one hand and to a final significant coefficient detector 60 on the other hand.

The final significant coefficient detector 60 monitors the quantized signal sequence QC to detect the final significant coefficient which is followed in each block by continuation of the nonsignificant coefficients. In other words, detection is made in the final significant coefficient detector 60 about a leading one of the nonsignificant coefficients that next follows the final significant coefficient. The detector 60 further detects a nonsignificant position of the leading nonsignificant coefficient to find another position preceding the nonsignificant position and recognizes the preceding position as a position for the final significant coefficient.

The illustrated encoding system comprises a variable length code memory 45 which memorizes first and second code tables 61 and 62 for defining

different mutual relationships between each of the quantized signals QC and the corresponding variable length code. It is to be noted that the second code table 62 is used only when the final significant coefficient is detected by the final significant coefficient detector 60. This means that variable length coding is usually carried out by the use of the first code table 61 except for the final significant coefficient. The code patterns of the variable length codes in the first code table 61 may be equal in number to the code patterns of the variable length codes in the second code table 62. However, a relationship between each code pattern of the first code table 61 and the corresponding quantized signal is different from a similar relationship of the second code table 62.

In Fig. 13, the first code table 61 is connected to a variable length encoder 56 through a switching circuit 55 insofar as the final significant coefficient is not detected in each block by the final significant coefficient detector 60. As a result, the quantized signals QC are quantized in accordance with the first code table 61.

On the other hand, the final significant coefficient detector 60 sends a switching signal SW to the switching circuit 55 on detecting the final significant coefficient in the above-mentioned manner. In this case, the variable length encoder 56 is connected through the switching circuit 55 to the second code table 62 and encodes the quantized signals QC into a sequence of encoded signals EC in accordance with the second code table 62.

In the example being illustrated, the switching signal SW is sent to a block end code generator 64. The block end code generator 64 produces the EOB code immediately after the final significant coefficient in response to the switching signal SW. The EOB code is representative of the fact that only the nonsignificant coefficients follow in the block in question.

The encoded signal sequence EC and the EOB code are multiplexed by a multiplexer 66 into a sequence of transmission signals TR which is sent to a transmission line.

On decoding the transmission signal sequence TR in a decoder system (not shown), the variable length codes carried by the transmission signal sequence TR are decoded by the use of first and second decoding tables corresponding to the first and the second code tables 61 and 62, respectively. Specifically, usual decoding operation is carried out with reference to the first decoding table. The final significant coefficient is also once decoded by the use of the first significant coefficient. On decoding the final significant coefficient, the EOB code is also detected by the decoding system.

In this situation, the decoding system cancels the decoded final significant coefficient and decodes the final significant coefficient again in accordance with the second decoding table.

With this structure, the final significant coefficient alone is encoded by the use of the second code table 62 as described before, use of the first and the second code tables 61 and 62 enables high efficiency of encoding. This is because the final significant coefficient has a distribution which is quite different from the remaining significant coefficients and a reduction in efficiency of encoding is inevitable when such a final significant coefficient is encoded by the use of a common code table.

While this invention has thus far been described in conjunction with several embodiments thereof, it will readily be possible for those skilled in the art to put this invention into practice in various other manners. For example, the digital signal sequence may be subjected to predictive encoding and may convey an audio signal instead of the image signal. Any other encoding may be substituted for the variable length encoding as the posterior processing.

Claims

1. An encoding system for use in encoding a sequence of digital signals into a sequence of encoded signals, said digital signal sequence being subjected to a predetermined linear transform into a sequence of coefficients which is divided into a sequence of blocks and which is produced as a sequence of coefficient signals, said encoding system comprising anterior processing means (16) responsive to said coefficient signal sequence (CO) for processing said coefficients in the respective blocks into a sequence of preliminary processed signals, quantizing means (15) coupled to said anterior processing means (16,17,20,21,25,28) for quantizing said preliminary processed signals into a sequence of quantized signals, and posterior processing means (33) for processing said quantized signal sequence into said encoded signal sequence, wherein said anterior processing means comprises:

threshold means (16) for producing a threshold signal representative of a threshold level defined for said coefficients;

comparing means (17) responsive to said threshold signal and said coefficient signal sequence for successively comparing said coefficients with said threshold level in the respective blocks to produce a sequence of comparison result signals representative of results of comparison in the respective blocks;

classifying means (20) responsive to said comparison result signal sequence and said coefficient signal sequence for classifying said coefficients of each block with reference to said results of comparison into first and second species coefficients which are valid and invalid, respectively, and which are varied in number by carrying out a threshold operation by the use of a predetermined threshold level to produce a sequence of significant coefficient signals which are composed of said first specific coefficients alone with said second species coefficients neglected and which are variable in length at every block; and

supply means for supplying said significant coefficient signal sequence to said quantizing means (15) as said preliminary processed signals.

2. An encoding system as claimed in Claim 1, wherein said classifying means (20) comprises:

determining means (21) coupled to said comparing means for determining a significant area of said first species coefficients in every one of said blocks by collecting said comparison result signals in each of said blocks to produce a significant area signal (AS) representative of said significant area; and

judging means (25) responsive to said significant area signal and said coefficient signal sequence for judging whether the coefficients of each block are present inside of said significant area to successively classify each of said coefficients into said first and said second species coefficients and to produce said significant coefficient signal sequence.

3. An encoding system as claimed in Claim 2, wherein said determining means (21) produces said significant area signal (AS) by carrying out a selected one of zone detection and zigzag scanning in relation to said comparison result signals.

4. An encoding system as claimed in Claim 3, wherein said judging means (25) produces both said first and said second species coefficients as said significant coefficient signal sequence;

said quantized signal sequence (QS') carrying said first and said second species coefficients;

said posterior processing means comprising:

selecting means (35) responsive to said quantized signal sequence (QS') for selecting an optimum scanning method from a plurality of different scanning methods to produce an

optimum scanning signal representative of said optimum scanning method;

rearranging means (28') responsive to said quantized signal sequence (QS') and said optimum scanning signal for rearranging said quantized signal sequence into a sequence of rearranged signals with reference to said optimum scanning signal (OP); and

encoding means (33) coupled to said rearranging means for encoding said rearranged signal sequence into said encoded signal sequence.

5. An encoding system as claimed in Claim 3, wherein said judging means (25) produces only said first species coefficients as said significant coefficient signal sequence.

6. An encoding system as claimed in Claim 2, wherein said determining means (21) scans said comparison result signals by the use of an optimum scanning method selected from a plurality of different scanning methods to produce an optimum scanning signal representative of said optimum scanning method, together with said significant area signal (AS);

said judging means (25) comprising:

rearranging means (28') responsive to said optimum scanning signal (OP) for rearranging said coefficient signal sequence into a sequence of rearranged signals; and

detecting means responsive to said rearranged signal sequence and said significant area signal for detecting said first species coefficients from said rearranged signal sequence with reference to said significant area signal to produce said first species coefficients as said significant coefficient signal sequence.

7. An encoding system as claimed in any of Claims 1 to 6, wherein said posterior processing means carries out variable length encoding of said quantized signal sequence to produce variable length codes as said encoded signals and comprises:

memory means (45) for memorizing a plurality of code sets (46,47,50;61,62) which are different from one another and which define mutual relationships between said quantized signals and said variable length codes;

switching means (43,53,50;42',60,55) for switching said code sets from one to another within each of said blocks to select either one of said code sets as a selected code set; and

variable length encoding means (56) coupled to said switching means (50;55) and responsive to said quantized signal sequence for encoding said quantized signal sequence in

accordance with said selected code set into said variable length codes.

8. An encoding system as claimed in Claim 7, wherein said switching means comprises:

code set indicating means (53) for successively indicating said code sets one at a time in each of said blocks to produce an indication signal representative of each of said code sets in synchronism with each of said quantized signals; and

switch means (50) coupled to said code set indicating means (53), said memory means (45), and said variable length encoding means (56) for switching said code sets from one to another in response to said indication signal to selectively connect said code sets to said variable length encoding means (56).

9. An encoding system as claimed in Claim 7, said coefficients being divisible into significant and nonsignificant coefficients, wherein said switching means (42',60,55) comprises:

detecting means (60) responsive to said quantized signals corresponding to the respective coefficients for detecting a final one of said significant coefficients in each of said blocks to produce a switch signal on detection of said final one of the significant coefficients; and

switch means (55) coupled to said detecting means (60), said memory means (45), and said variable length encoding means (56) for switching said code sets from one to another in response to said switch signal to selectively connect said code sets to said variable length encoding means (56).

Patentansprüche

1. Kodiersystem zum Kodieren einer Folge von digitalen Signalen in eine Folge von kodierten Signalen, wobei die digitale Signalfolge durch eine vorgegebene lineare Transformation in eine Folge von Koeffizienten überführt wird, die in eine Folge von Blöcken unterteilt ist und die als eine Folge von Koeffizientensignalen erzeugt wird, und das Kodiersystem eine vorhergehende Verarbeitungseinrichtung (16), die die Koeffizientensignalfolge (CO) empfängt, um die Koeffizienten in den betreffenden Blöcken in eine Folge von vorverarbeiteten Signalen zu verarbeiten, eine Quantisierungseinrichtung (15), die mit der vorhergehenden Verarbeitungseinrichtung (16, 17, 20, 21, 25, 28) gekoppelt ist, um die vorverarbeiteten Signale in eine Folge von quantisierten Signalen zu quantisieren, und eine nachfolgende Verar-

beitungseinrichtung (33) aufweist, um die quantisierte Signalfolge in die kodierte Signalfolge zu verarbeiten, wobei die vorhergehende Verarbeitungseinrichtung folgendes umfaßt:

eine Schwellenwerteinrichtung (16), um ein Schwellenwertsignal zu erzeugen, das für einen Schwellenwert steht, der für die Koeffizienten definiert wurde;

eine Vergleichseinrichtung (17), die das Schwellenwertsignal und die Koeffizientensignalfolge empfängt, um der Reihe nach die Koeffizienten mit dem Schwellenwertsignal in den entsprechenden Blöcken zu vergleichen, um eine Folge von Vergleichsergebnissignalen zu erzeugen, die für die Vergleichsergebnisse in den entsprechenden Blöcken stehen;

eine Klassifizierungseinrichtung (20), die die Vergleichsergebnissignalfolge und die Koeffizientensignalfolge empfängt, um die Koeffizienten jedes Blocks bezüglich der Vergleichsergebnisse in Koeffizienten erster und zweiter Art, die gültig bzw. ungültig sind und deren Anzahl unterschiedlich ist, dadurch zu klassifizieren, daß eine Schwellenwertoperation unter Verwendung eines vorgegebenen Schwellenwertes ausgeführt wird, um eine Folge von signifikanten Koeffizientensignalen zu erzeugen, die sich nur aus den Koeffizienten erster Art zusammensetzen und die Koeffizienten zweiter Art vernachlässigt werden und deren Länge in jedem Block unterschiedlich ist; und

eine Versorgungseinrichtung, um die Quantisierungseinrichtung (15) mit der signifikanten Koeffizientensignalfolge als die vorverarbeiteten Signale zu versorgen.

2. Kodiersystem nach Anspruch 1, bei dem die Klassifizierungseinrichtung (20) umfaßt:

eine Bestimmungseinrichtung (21), die mit der Vergleichseinrichtung gekoppelt ist, um ein signifikantes Gebiet der Koeffizienten erster Art in jedem der Blöcke zu bestimmen, indem die Vergleichsergebnissignale in jedem der Blöcke gesammelt werden, um ein Signifikantgebietssignal (AS) zu erzeugen, das für das signifikante Gebiet steht; und

eine Prüfeinrichtung (25), die das Signifikantgebietssignal und die Koeffizientensignalfolge empfängt, um zu prüfen, ob die Koeffizienten jedes Blocks innerhalb des signifikanten Gebiets liegen, um der Reihe nach jeden der Koeffizienten in die Koeffizienten erster und zweiter Art zu klassifizieren und die signifikante Koeffizientensignalfolge zu erzeugen.

3. Kodiersystem nach Anspruch 2, bei dem die Bestimmungseinrichtung (21) das Signifikantgebietssignal (AS) erzeugt, indem eine ausgewählte Zonendetektion und zickzackförmiges Abtasten, bezogen auf die Vergleichsergebnissignale, durchgeführt werden.

4. Kodiersystem nach Anspruch 3, bei dem die Prüfeinrichtung (25) sowohl Koeffizienten erster Art als auch zweiter Art als die signifikante Koeffizientensignalfolge erzeugt;

die quantisierte Signalfolge (QS') die Koeffizienten erster und zweiter Art enthält;

wobei die nachfolgende Verarbeitungseinrichtung folgendes umfaßt:

eine Auswahlrichtung (35), die die quantisierte Signalfolge (QS') empfängt, um ein optimales Abtastverfahren aus mehreren unterschiedlichen Abtastverfahren auszuwählen, um ein Optimalabtastsignal zu erzeugen, das für das optimale Abtastverfahren steht;

eine Umordnungseinrichtung (28'), die die quantisierte Signalfolge (QS') und das Optimalabtastsignal empfängt, um die quantisierte Signalfolge in eine Folge von umgeordneten Signalen mit Bezug auf das Optimalabtastsignal (OP) umzuordnen; und

eine Kodiereinrichtung (33), die mit der Umordnungseinrichtung gekoppelt ist, um die umgeordnete Signalfolge in die kodierte Signalfolge zu kodieren.

5. Kodiersystem nach Anspruch 3, bei dem die Prüfeinrichtung (25) ausschließlich die Koeffizienten erster Art als die signifikante Koeffizientensignalfolge erzeugt.

6. Kodiersystem nach Anspruch 2, bei dem die Bestimmungseinrichtung (21) die Vergleichsergebnissignale unter Verwendung eines optimalen Abtastverfahrens, das aus mehreren unterschiedlichen Abtastverfahren ausgewählt wird, abtastet, um zusammen mit dem Signifikantgebietssignal (AS) ein Optimalabtastsignal zu erzeugen, das für das optimale Abtastverfahren steht;

wobei die Prüfeinrichtung (25) folgendes umfaßt:

eine Umordnungseinrichtung (28'), die das Optimalabtastsignal (OP) empfängt, um die Koeffizientensignalfolge in eine Folge von umgeordneten Signalen umzuordnen; und

eine Detektiereinrichtung, die die umgeordnete Signalfolge und das Signifikantgebietssignal empfängt, um die Koeffizienten erster Art aus der umgeordneten Signalfolge bezogen auf das Signifikantgebietssignal zu detektieren, um die Koeffizienten erster Art als

die signifikante Koeffizientensignalfolge zu erzeugen.

7. Kodiersystem nach einem der Ansprüche 1 bis 6, bei dem die nachfolgende Verarbeitungseinrichtung eine Variable-Längen-Kodierung der quantisierten Signalfolge ausführt, um variable Längencodes als die kodierten Signale zu erzeugen, und die folgendes umfaßt:
 - eine Speichereinrichtung (45), um mehrere Kodierungssätze (46,47,50;61,62) zu speichern, die sich voneinander unterscheiden und die gegenseitige Beziehungen zwischen den quantisierten Signalen und dem Variablen-Längen-Code definieren;
 - eine Umschaltungseinrichtung (43,53,50;42',60,55), um innerhalb eines jeden der Blöcke von einem Kodierungssatz zum anderen zu schalten, um einen aus den Kodierungssätzen als gewählten Kodierungssatz auszuwählen; und
 - eine Variable-Längen-Kodierungseinrichtung (56), die mit der Umschaltungseinrichtung (50,55) gekoppelt ist und die quantisierte Signalfolge zum Kodieren der quantisierten Signalfolge in die Variable-Längen-Codes gemäß dem ausgewählten Kodierungssatz empfängt.
 - 8. Kodiersystem nach Anspruch 7, bei dem die Umschaltungseinrichtung folgendes umfaßt:
 - eine Kodierungssatz-Anzeigeeinrichtung (53), um der Reihe nach die Kodierungssätze einzeln in jedem der Blöcke anzuzeigen, um synchron mit jedem der quantisierten Signale ein Anzeigesignal zu erzeugen, das für jeden der Kodierungssätze steht; und
 - eine Umschaltungseinrichtung (50), die mit der Kodierungssatz-Anzeigeeinrichtung (53), der Speichereinrichtung (45) und der Variable-Längen-Kodierungseinrichtung (56) gekoppelt ist, um als Antwort auf das Anzeigesignal von einem der Kodierungssätze zum anderen zu schalten, um selektiv diese Kodierungssätze mit der Variable-Längen-Kodiereinrichtung (56) zu verbinden.
 - 9. Kodiersystem nach Anspruch 7, wobei die Koeffizienten sich in signifikante und nichtsignifikante Koeffizienten einteilen lassen, und wobei die Umschaltungseinrichtung (42',60,55) folgendes umfaßt:
 - eine Detektiereinrichtung (60), die die zu den entsprechenden Koeffizienten gehörenden, quantisierten Signale empfängt, um einen letzten der signifikanten Koeffizienten in jedem der Blöcke zu detektieren, um bei Detektion dieses letzten signifikanten Koeffizienten ein

Umschaltsignal zu erzeugen; und

eine Umschaltungseinrichtung (55), die mit der Detektiereinrichtung (60), der Speichereinrichtung (45), und der Variable-Längen-Kodierungseinrichtung (56) gekoppelt ist, um als Antwort auf das Umschaltsignal zwischen den Kodierungssätzen zu schalten, um selektiv diese Kodierungssätze mit der Variable-Längen-Kodierungseinrichtung (56) zu verbinden.

Revendications

1. Système de codage pour utilisation dans le codage d'une séquence de signaux numériques en une séquence de signaux codés, ladite séquence de signaux numériques étant soumise à une transformation linéaire prédéterminée en une séquence de coefficients qui est divisée en une séquence de blocs et qui est produite en tant que séquence de signaux de coefficients, ledit système de codage comprenant un moyen de traitement antérieur (16) sensible à ladite séquence de signaux de coefficients (CO) pour traiter lesdits coefficients contenus dans les blocs respectifs en une séquence de signaux préalablement traités, un moyen de quantification (15) relié audit moyen de traitement antérieur (16, 17, 20, 21, 25, 28) pour quantifier lesdits signaux préalablement traités, en une séquence de signaux quantifiés, et un moyen de traitement postérieur (33) pour traiter ladite séquence de signaux quantifiés en une séquence de signaux codés, dans lequel ledit moyen de traitement antérieur comprend:
 - un moyen à seuil (16) pour produire un signal de seuil représentatif d'un niveau de seuil défini pour lesdits coefficients;
 - un moyen de comparaison (17) sensible audit signal de seuil et à ladite séquence de signaux de coefficients pour comparer successivement lesdits coefficients audit niveau de seuil dans les blocs respectifs et produire une séquence de signaux résultats de la comparaison représentatifs des résultats de la comparaison dans les blocs respectifs;
 - un moyen de classification (20) sensible à ladite séquence de signaux résultats de la comparaison et à ladite séquence de signaux de coefficients pour classer lesdits coefficients de chaque bloc en tenant compte desdits résultats de la comparaison, en des coefficients d'un premier type et d'un second type qui sont respectivement valides et invalides, et dont les nombres peuvent varier, par application d'une opération de seuil utilisant un niveau de seuil prédéterminé, pour produire une séquence de

signaux de coefficients significatifs qui se compose uniquement desdits coefficients du premier type, lesdits coefficients du second type étant négligés, et qui a une longueur variable d'un bloc à l'autre; et

un moyen de transfert pour transférer la – dite séquence de signaux de coefficients si – gnificatifs vers ledit moyen de quantification (15) en tant que lesdits signaux préalablement traités.

2. Système de codage selon la revendication 1, dans lequel ledit moyen de classification (20) comprend:

un moyen de détermination (21) relié audit moyen de comparaison pour déterminer une zone significative desdits coefficients du premier type dans chacun desdits blocs par combinaison desdits signaux résultats de la comparaison dans chacun desdits blocs, afin de produire un signal de zone significative (AS) représentatif de ladite zone significative; et

un moyen de jugement (25) sensible audit signal de zone significative et à ladite sé – quence de signaux de coefficients pour juger si les coefficients de chaque bloc sont pré – sents à l'intérieur de ladite zone significative afin de classer successivement chacun desdits coefficients en lesdits coefficients du premier type et du second type et pour produire ladite séquence de signaux de coefficients signifi – catifs.

3. Système de codage selon la revendication 2, dans lequel ledit moyen de détermination (21) produit ledit signal de zone significative AS en effectuant une opération sélectionnée parmi une détection de zone et un balayage en zig – zag, en fonction desdits signaux résultats de la comparaison.

4. Système de codage selon la revendication 3, dans lequel ledit moyen de jugement (25) produit à la fois lesdits coefficients du premier type et du second type en tant que ladite séquence de signaux de coefficients;

ladite séquence de signaux quantifiés (QS') contenant lesdits coefficients du premier et du second types;

ledit moyen de traitement postérieur comprenant:

un moyen de sélection (35) sensible à ladite séquence de signaux quantifiés (QS') pour sélectionner une méthode de balayage optimale parmi une pluralité de méthodes de balayage différentes afin de produire un signal de balayage optimal représentatif de ladite

méthode de balayage optimale;

un moyen de réarrangement (28') sensible à ladite séquence de signaux quantifiés (QS') et audit signal de balayage optimal pour réar – ranger ladite séquence de signaux quantifiés en une séquence de signaux réarrangés en fonction dudit signal de balayage optimal (OP); et

un moyen de codage (33) relié audit moyen de réarrangement pour coder ladite séquence de signaux réarrangés en ladite sé – quence de signaux codés.

5. Système de codage selon la revendication 3, dans lequel ledit moyen de jugement (25) produit seulement lesdits coefficients du pre – mier type en tant que ladite séquence de signaux de coefficients significatifs.

6. Système de codage selon la revendication 2, dans lequel ledit moyen de détermination (21) analyse lesdits signaux résultats de la com – paraison par utilisation d'une méthode de ba – layage optimale sélectionnée parmi une plu – ralité de méthodes de balayage différentes, afin de produire un signal de balayage optimal représentatif de ladite méthode de balayage optimal, en même temps que ledit signal de zone significative (AS);

ledit moyen de jugement (25) comprenant:

un moyen de réarrangement (28') sensible audit signal de balayage optimal (OP) pour réarranger ladite séquence de signaux de coefficients en une séquence de signaux réarrangés; et

un moyen de détection sensible à ladite séquence de signaux réarrangés et audit signal de zone significative pour détecter lesdits coefficients du premier type dans ladite sé – quence de signaux réarrangés en fonction dudit signal de zone significative, afin de pro – duire lesdits coefficients du premier type en tant que ladite séquence de signaux de coef – ficients significatifs.

7. Système de codage selon l'une quelconque des revendications 1 à 6, dans lequel ledit moyen de traitement postérieur effectue un codage à longueur variable de ladite séquence de signaux quantifiés pour produire des codes de longueurs variables en tant que lesdits si – gnaux codés et comprend:

un moyen à mémoire (45) pour mémoriser une pluralité de jeux de codes (46,47,50; 61,62) qui diffèrent les uns des autres et qui définissent des relations mutuelles entre les – dits signaux quantifiés et lesdits codes à lon – gueurs variables;

un moyen de commutation (43,53,50; 42',60,55) pour commuter entre lesdits jeux de codes à l'intérieur de chacun desdits blocs afin de sélectionner l'un ou l'autre desdits jeux de codes en tant que jeu de code sélectionné; et 5

un moyen de codage à longueur variable (56) relié audit moyen de commutation (50;55) et sensible à ladite séquence de signaux quantifiés, pour coder ladite séquence de signaux quantifiés en fonction dudit jeu de codes sélectionné, en lesdits codes à longueurs variables. 10

8. Système de codage selon la revendication 7, dans lequel ledit moyen de commutation comprend: 15

un moyen indicateur du jeu de codes (53) pour indiquer successivement lesdits jeux de codes un par un dans chacun desdits blocs, afin de produire un signal d'indication représentatif de chacun desdits jeux de codes en synchronisme avec chacun desdits signaux quantifiés; et 20

un moyen de commutation (50) relié audit moyen indicateur du jeu de codes (53) audit moyen à mémoire (45), et audit moyen de codage à longueur variable (56) pour commuter entre lesdits jeux de codes en réponse audit signal d'indication afin de connecter sélectivement lesdits jeux de codes audit moyen de codage à longueur variable (56). 25 30

9. Système de codage selon la revendication 7, lesdits coefficients pouvant être répartis en coefficients significatifs et non significatifs, dans lequel ledit moyen de commutation (42', 60,55) comprend: 35

un moyen de détection (60) sensible auxdits signaux quantifiés correspondant aux coefficients respectifs pour détecter un coefficient significatif final parmi lesdits coefficients significatifs dans chacun desdits blocs, et produire un signal de commutation lors de la détection dudit coefficient significatif final; et 40

un moyen de commutation (55) relié audit moyen de détection (60), audit moyen à mémoire (45) et audit moyen de codage à longueur variable (56), pour commuter entre lesdits jeux de codes en réponse audit signal de commutation afin de connecter sélectivement lesdits jeux de codes audit moyen de codage à longueur variable (56). 45 50

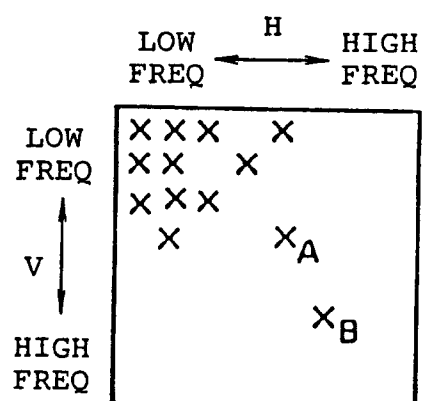


FIG. 1

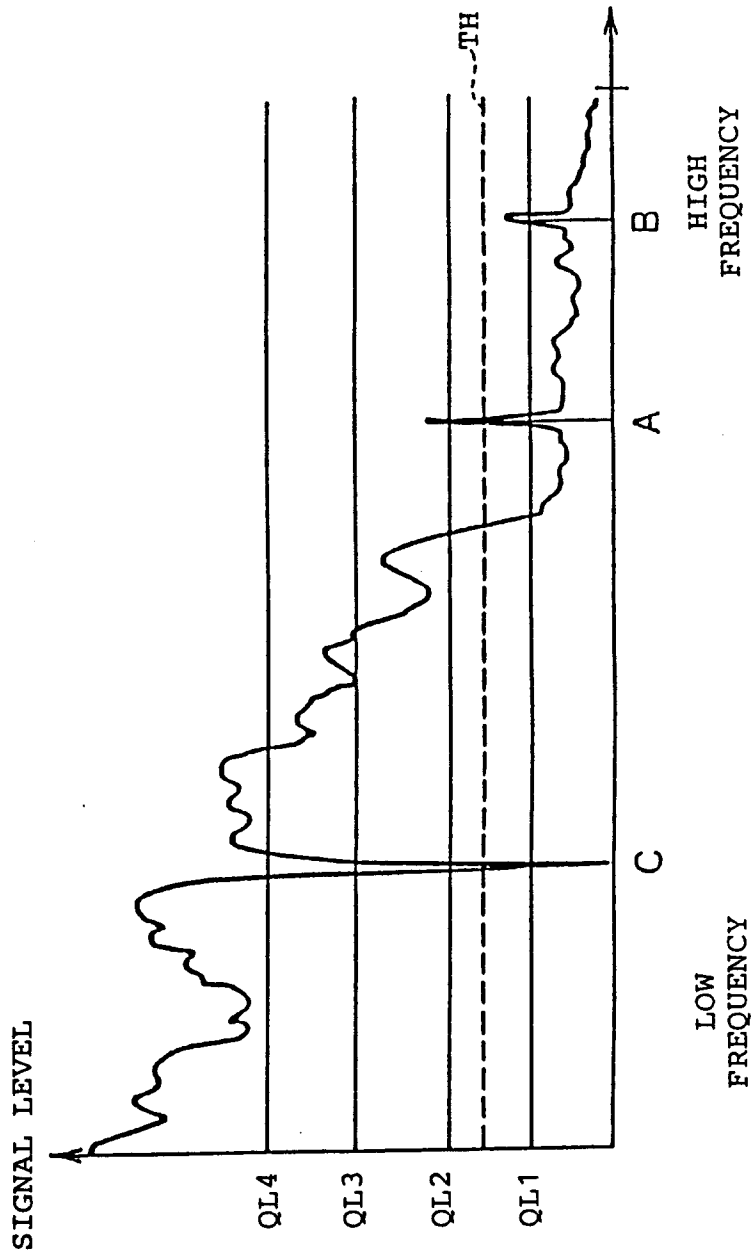


FIG. 2

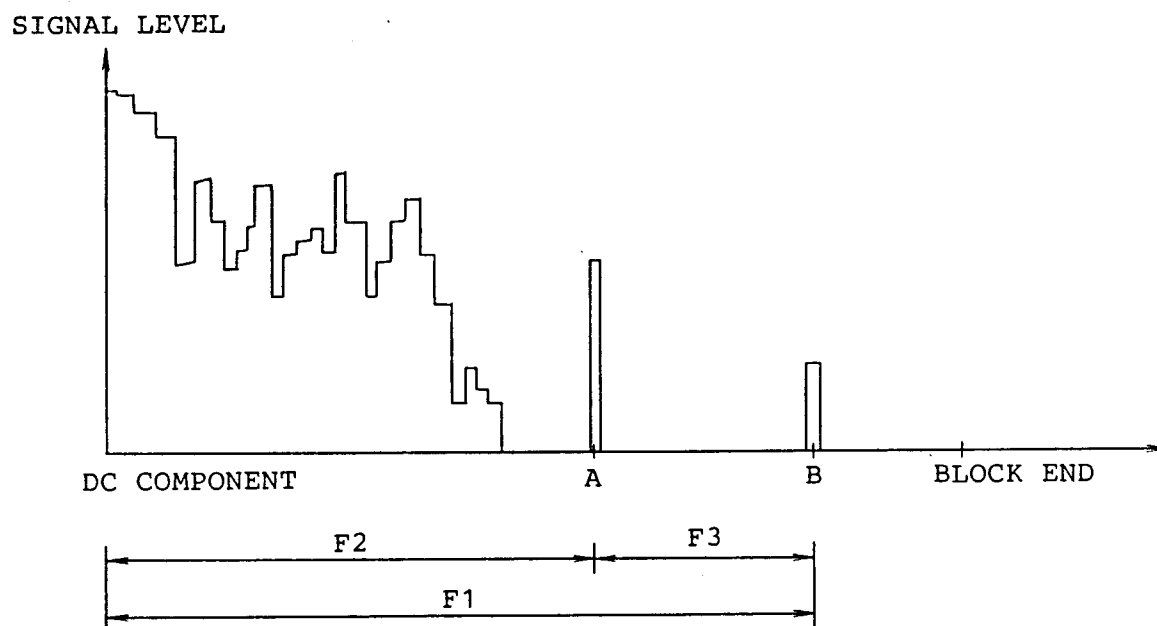


FIG. 3

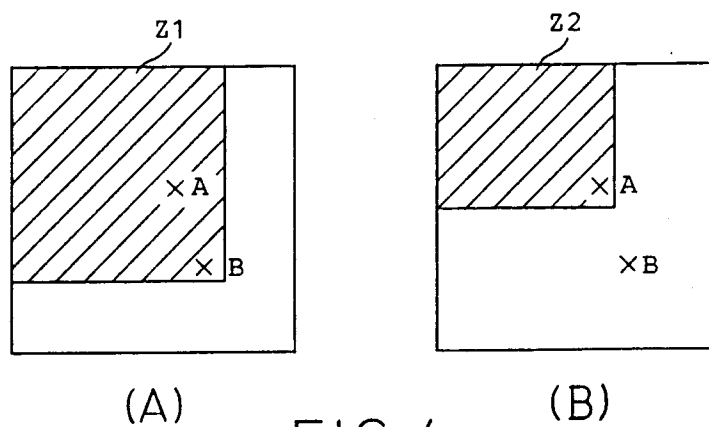


FIG. 4

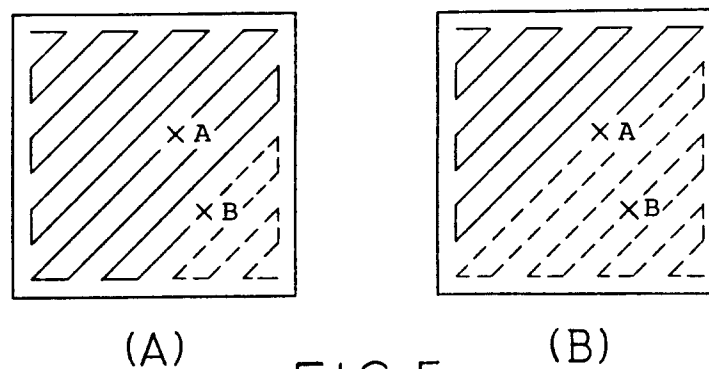


FIG. 5

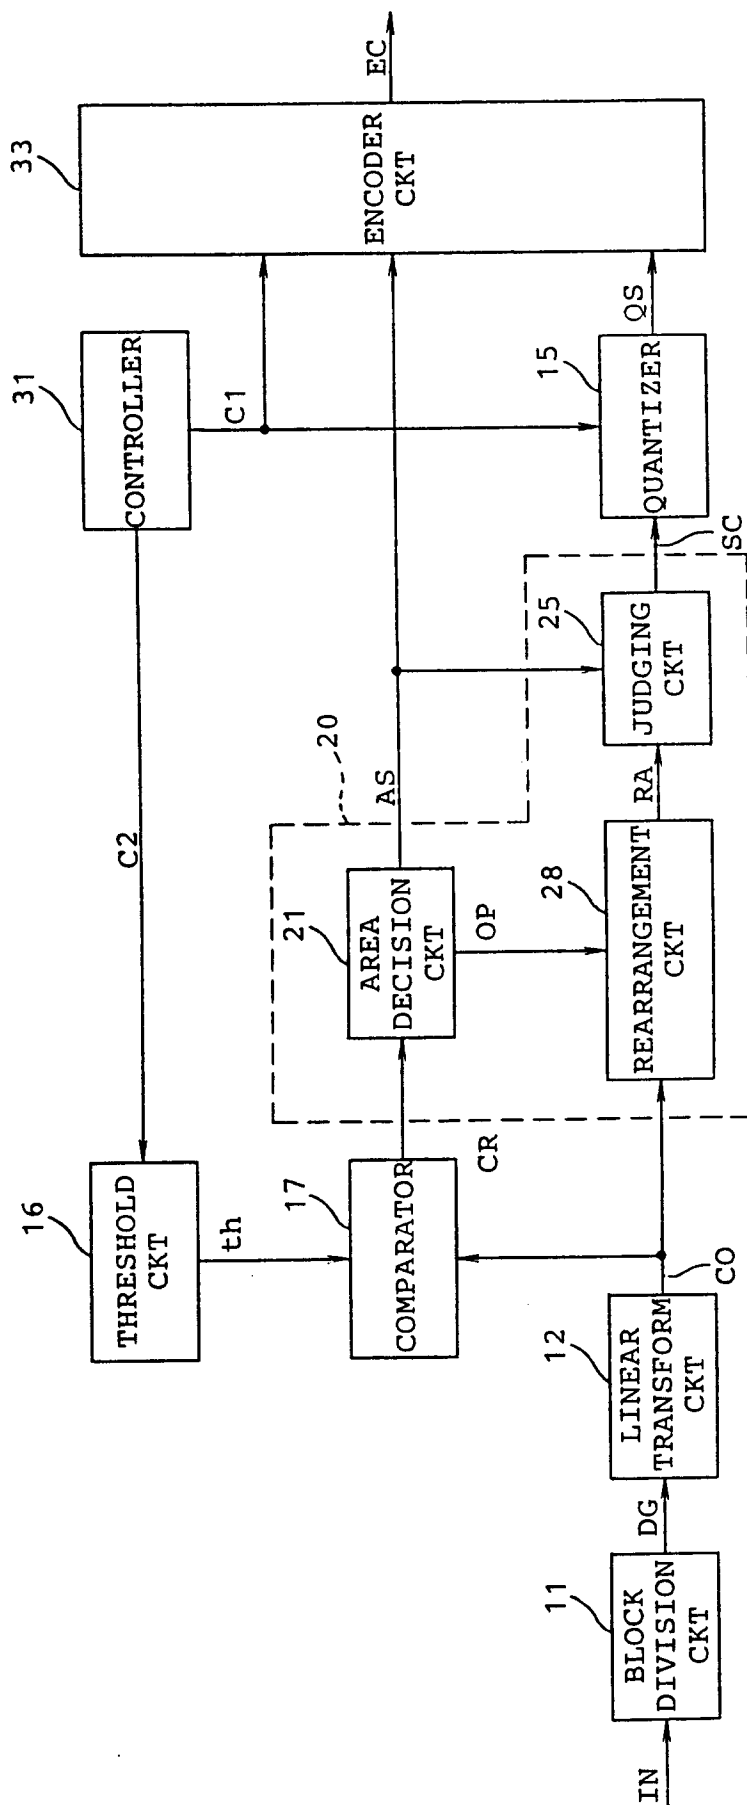


FIG.6

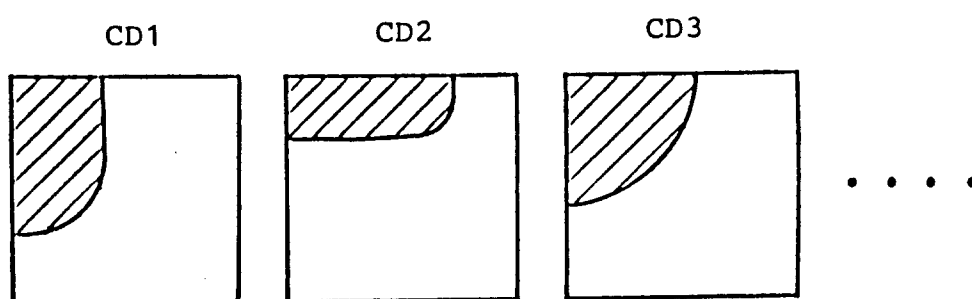


FIG.7

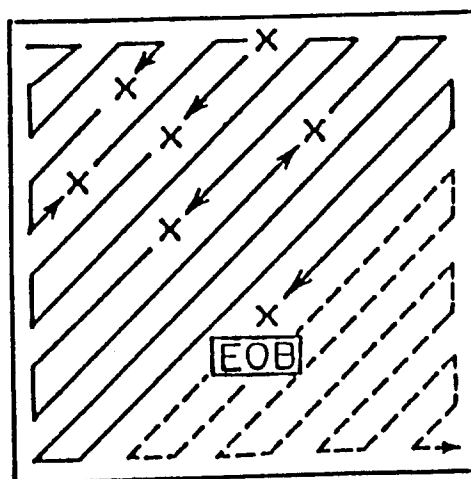


FIG.8

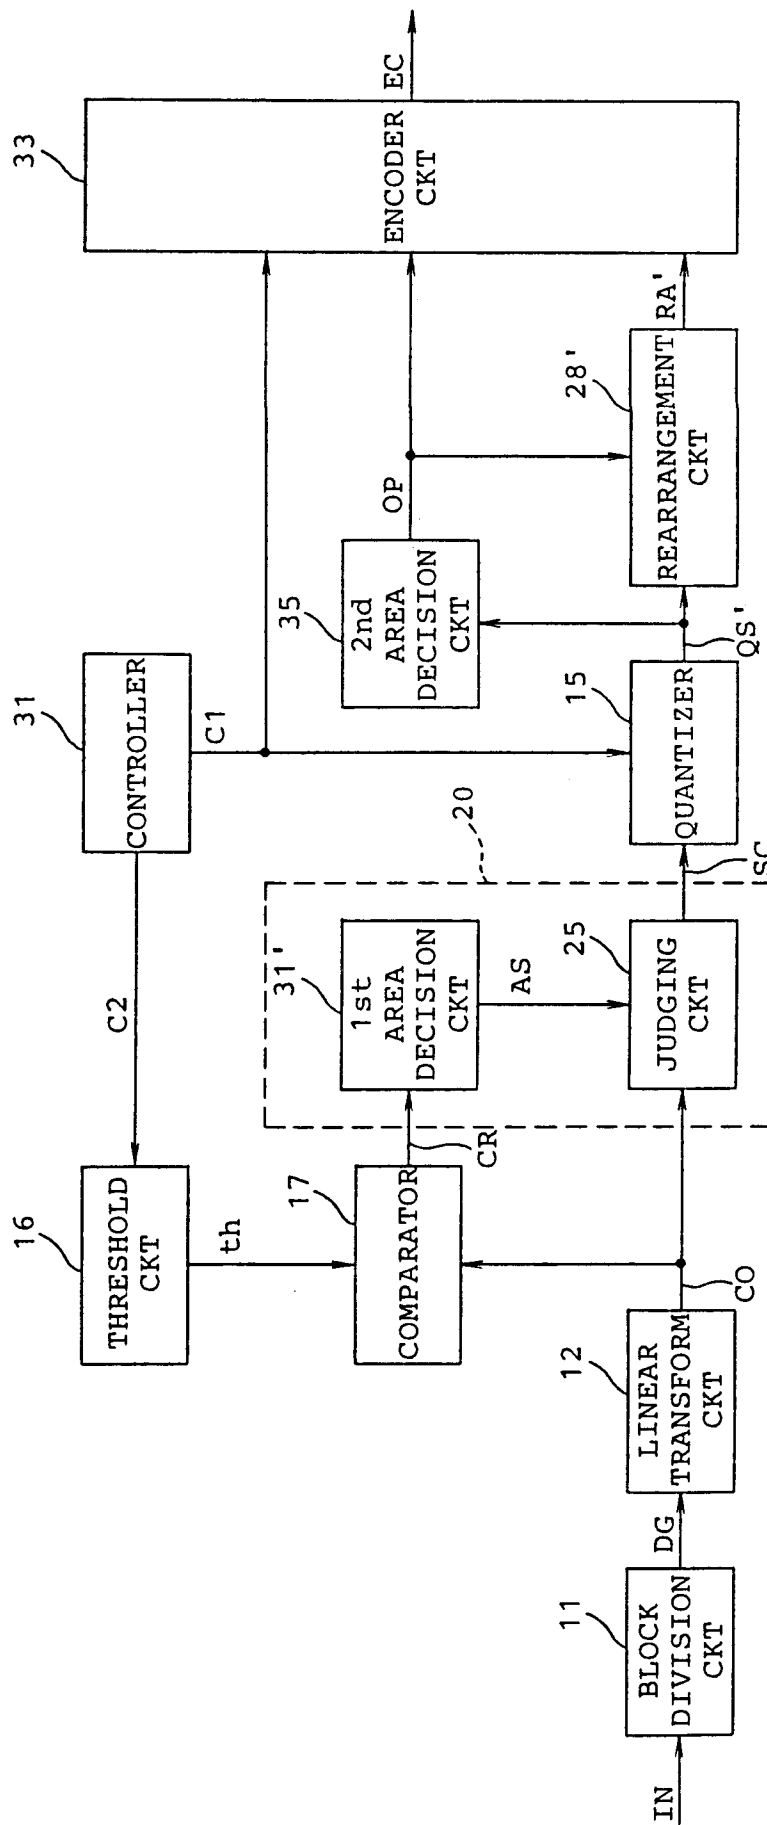


FIG.9

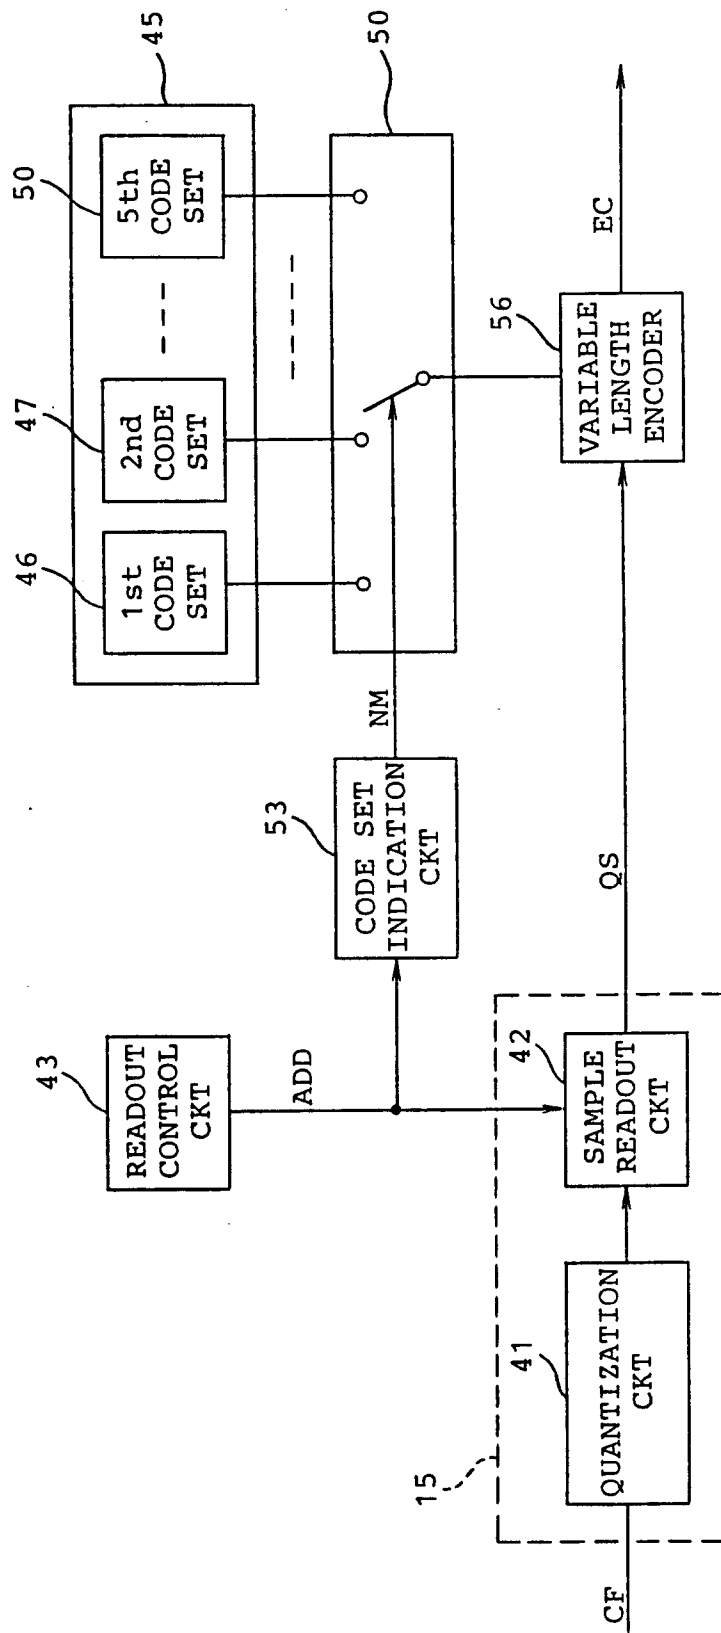


FIG.10

TRANSFORM COEFFICIENTS (HORIZONTAL DIRECTION)							
1	1	2	2	3	3	3	4
1	2	2	3	3	3	4	4
2	2	3	3	3	4	4	4
2	3	3	3	4	4	4	5
3	3	3	4	4	4	5	5
3	3	4	4	4	5	5	5
3	4	4	4	5	5	5	5
4	4	4	5	5	5	5	5

FIG.12

TRANSFORM COEFFICIENTS (HORIZONTAL DIRECTION)							
1	2	6	7	15	16	28	29
3	5	8	14	17	27	30	43
4	9	13	18	26	31	42	44
10	12	19	25	32	41	45	54
11	20	24	33	40	46	53	55
21	23	34	39	47	52	56	61
22	35	38	48	51	57	60	62
36	37	49	50	58	59	63	64

FIG.11

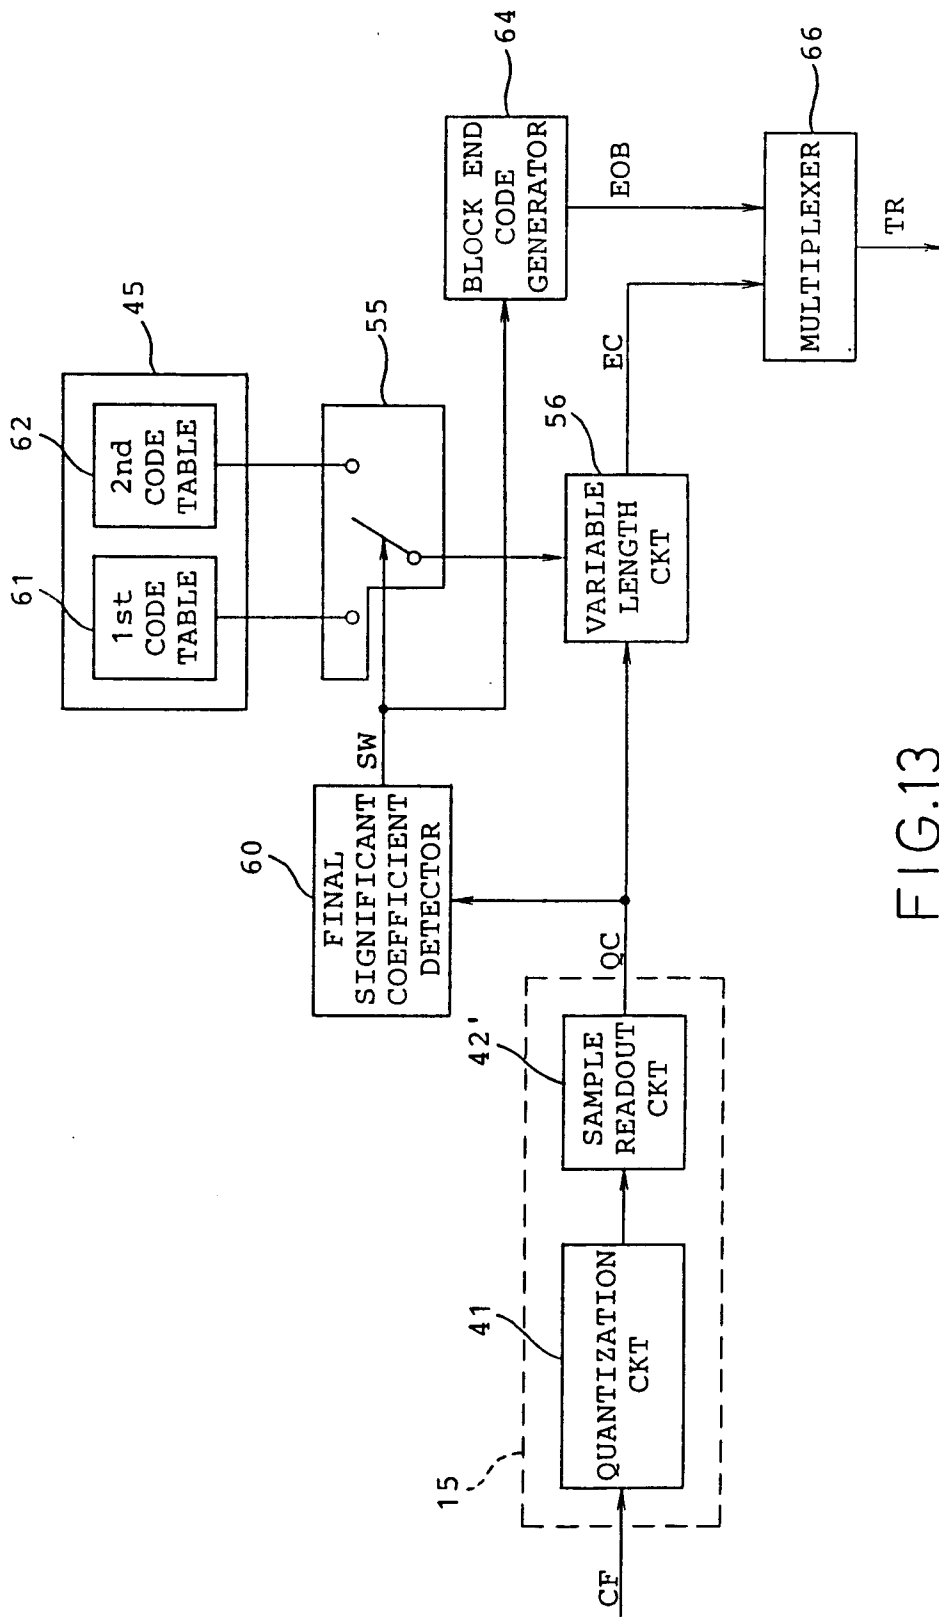


FIG.13