

FASCICULE DE BREVET D'INVENTION

21 Numéro de dépôt : 1201700140
PCT/JP16/068725

22 Date de dépôt : 23/06/2016

30 Priorité(s) :
JP n° 2015-129325 du 26/06/2015

24 Délivré le : 30/03/2018

45 Publié le : 17.08.2018

73 Titulaire(s) :

NTT DOCOMO, INC.,
11-1, Nagatacho 2-chome,
Chiyoda-ku,
TOKYO 100-6150 (JP)

72 Inventeur(s) :

Takahashi, Hideaki (JP)
Takeda, Kazuaki (JP)


74 Mandataire : SPOOR & FISHER (Inc. NGWAFOR & PARTNERS SARL), The Hilton Hotel, Entrance : Business Centre, Second Floor, Suite 208A, 20th May Boulevard, P.O. Box 8211, YAOUNDE (CM).

54 Titre : User device and soft buffer size determination method.

57 Abrégé :

A user apparatus configured to perform communication with a base station in a mobile communication system that supports downlink spatial multiplexing, including: transmission means configured to transmit category information of the user apparatus to the base station; reception means configured to receive configuration information from the base station; soft buffer size determination means configured, if the category information is a value equal to or greater than a predetermined value and if a parameter indicating a transmission mode corresponding to the downlink spatial multiplexing and predetermined additional information are received as the configuration information, to determine a soft buffer size used for downlink data reception processing in the user apparatus by using the total number of soft channel bits corresponding to the category information.

FIG.5

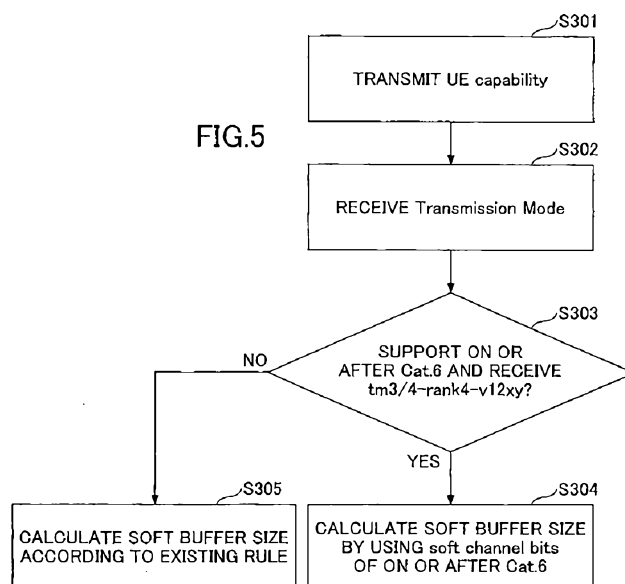

USER APPARATUS AND SOFT BUFFER SIZE DETERMINATION METHODTECHNICAL FIELD

The present invention relates to a user apparatus and a base station in a mobile
5 communication system that supports spatial multiplexing.

BACKGROUND ART

In an LTE (including LTE-Advanced) system, UE categories on capability
of the user apparatus UE are defined, and requirements that should be supported are
10 defined for each UE category. For example, the total number of soft channel bits, and
the number of supported MIMO layers and the like are defined for each UE category
(non-patent document 1).

Also, in LTE, it is defined that the user apparatus UE reports a UE
category of the user apparatus UE itself to the base station eNB by a predetermined
15 message "UE-EUTRA-Capability" (non-patent document 2).

In release 8 (Rel-8, hereinafter) of 3GPP, a field for reporting UE
categories 1~5 is defined in the message of UE-EUTRA-Capability. From release 10
(Rel-10, hereinafter), values of UE category 6 and after 6 are additionally defined, so
that a field for reporting that is defined. More specifically, for example, in an
20 information element (IE) of UE-EUTRA-Capability shown in Fig. 1, a field for reporting
UE categories 1~5 and a field for reporting UE categories 6~8 are defined as indicated
by underlines.

Also, in LTE, various Transmission Modes (transmission modes,
described as TM hereinafter) that determines a transmission scheme of data (PDSCH)
25 from the base station eNB to the user apparatus UE are defined, so that the user
apparatus UE performs data reception operation according to the TM configured from
the base station eNB (non-patent document 3). For example, TM3 indicates open loop
spatial multiplexing and TM4 indicates closed loop spatial multiplexing. Feedback of
an RI (rank number) from the user apparatus UE to the base station eNB is necessary
30 for both of them.

Also, in the user apparatus UE and the base station eNB of LTE, in an
HARQ entity of an MAC (Media Access Control) layer, HARQ (Hybrid ARQ) control is
performed. For example, in HARQ control for downlink data in the user apparatus UE,
when decoding of downlink data (TB: transport block) succeeds, the user apparatus UE
35 returns ACK to the base station eNB. When decoding fails, the user apparatus UE
returns NACK to the base station eNB. Accordingly, in HARQ, retransmission control

-2-

is performed by transmitting ACK/NACK. In HARQ, when the user apparatus UE fails in decoding of received data (when data is erroneous), the user apparatus UE holds the data, combines data retransmitted from the base station eNB and the held data, and decodes the combined data. Accordingly, strong tolerance against errors is provided. A storage unit for holding the data (memory area) is called a soft buffer.

RELATED ART DOCUMENT

[NON PATENT DOCUMENT]

[NON PATENT DOCUMENT 1] 3GPP TS 36.306 V12.4.0 (2015-03)

10 [NON PATENT DOCUMENT 2] 3GPP TS 36.331 V12.5.0 (2015-03)

[NON PATENT DOCUMENT 3] 3GPP TS 36.213 V12.5.0 (2015-03)

[NON PATENT DOCUMENT 4] 3GPP TS 36.212 V12.4.0 (2015-03)

SUMMARY OF THE INVENTION

15 PROBLEM TO BE SOLVED BY THE INVENTION

The user apparatus UE of a UE category on or after category 6 introduced in Rel-10 can perform 4 layer (4×4MIMO) reception by being configured with TM3, TM4, TM9, TM10 and the like. However, in the UE category on or after UE category 6, it is assumed that TM9 or TM10 are used instead of TM3 or TM4.

20 Therefore, in 4 layer reception by TM3/4, there is a limitation in determining a soft buffer size as described below.

That is, in “5.1.4.1.2 Bit collection, selection and transmission” of non-patent document 4 which is a conventional specification, a determination method of N_{soft} (the total number of soft channel bits of UE (= total soft buffer size)) that is used for calculating a soft buffer size (N_{IR}) per 1 TB is defined as “if the UE signals ue-Category-v1020, and is configured with transmission mode 9 or transmission mode 10 for the DL cell, N_{soft} is the total number of soft channel bits [4] according to the UE category indicated by ue-Category-v1020 [6]. Otherwise, N_{soft} is the total number of soft channel bits [4] according to the UE category indicated by ue-Category (without suffix) [6].”.

As described above, the total number of soft channel bits corresponding to the UE category (ue-Category-v1020) of Rel-10 is referred to when TM9/10 is configured. On the other hand, when TM3/4 is configured, even if the UE category (ue-Category-v1020) of Rel-10 is reported, the “Otherwise” is applied, so that the user apparatus UE refers to the total number of soft channel bits corresponding to the ue-Category of Rel-8. In the conventional specification, the user apparatus UE supporting

-3-

category 6/7 reports the category 6/7 by a parameter of Rel-10, and reports category 4 by a parameter of Rel-8.

Fig. 2 shows an example of the above-mentioned situation with a table of the UE category described in non-patent document 1.

5 For example, if the user apparatus UE supporting category 6 is configured with TM9, the user apparatus UE refers to the total number of soft channel bits corresponding to category 6 as N_{soft} , but, if the user apparatus UE is configured with TM3/4, the user apparatus UE refers to the total number of soft channel bits corresponding to category 4 as N_{soft} as shown in Fig. 2. As shown in Fig. 2, since the
10 total number of soft channel bits corresponding to category 4 is half of the total number of soft channel bits corresponding to category 6, there is a possibility that quality deteriorates in a communication environment where HARQ retransmission occurs.

Also, as described above, feedback of an RI is necessary in TM3/4. However, in the conventional technique, there is a problem in that there is a case
15 where an RI bit width (bit length) used for reporting of an RI cannot be properly determined if TM3/4 is configured.

That is, in "5.2.2.6 Channel coding of control information" of non-patent document 4, it is described that a bit width used for RI feedback is determined from a table such as 5.2.2.6.1-2, and also, it is described that, the maximum number of layers
20 used when referring to the table (the maximum number of DL MIMO layers that the UE supports) is determined based on a value such as "supportedMIMO-CapabilityDL-r10 field".

However, it is defined to apply, if TM3/4 is configured, "Otherwise the maximum number of layers is determined according to the minimum of the number of
25 PBCH antenna ports and ue-Category (without suffix)". Therefore, when the user apparatus UE is configured with TM3/4, the number of layers (which is "2" from Fig. 2) corresponding to category 4 is used as the maximum number of layers even if the UE supports category 6/7. Therefore, the RI bit width becomes 1 bit at the maximum. When the RI bit width is 1, only 1 or 2 can be reported as an RI (Rank). Therefore,
30 there occurs a problem in that, even if the use apparatus UE has capability for performing 4 layer spatial multiplexing, since RI=4 cannot be reported, 4 layer spatial multiplexing cannot be performed.

The above-mentioned problem on RI is not a problem limited to RI, and is a problem that may occur for other uplink control information (UCI).

35 The present invention is contrived in view of the problem on the soft buffer in the above-mentioned problems, and an object of the present invention is to

provide a technique for enabling a user apparatus to properly determine a soft buffer size in a mobile communication system including the user apparatus and a base station.

5 MEANS FOR SOLVING THE PROBLEM

According to an embodiment of the present invention, there is provided a user apparatus configured to perform communication with a base station in a mobile communication system that supports downlink spatial multiplexing, including:

10 transmission means configured to transmit category information of the user apparatus to the base station;

reception means configured to receive a parameter indicating a transmission mode from the base station;

15 soft buffer size determination means configured, if the category information is a value equal to or greater than a predetermined value and if the parameter is a predetermined parameter corresponding to the downlink spatial multiplexing, to determine a soft buffer size corresponding to the category information as a soft buffer size used for downlink data reception processing in the user apparatus.

20 According to an embodiment of the present invention, there is provided a user apparatus configured to perform communication with a base station in a mobile communication system that supports downlink spatial multiplexing, including:

transmission means configured to transmit category information of the user apparatus to the base station;

reception means configured to receive configuration information from the base station;

25 soft buffer size determination means configured, if the category information is a value equal to or greater than a predetermined value and if a parameter indicating a transmission mode corresponding to the downlink spatial multiplexing and predetermined additional information are received as the configuration information, to determine a soft buffer size corresponding to the category information as a soft buffer size used for downlink data reception processing in the user apparatus.

30 According to an embodiment of the present invention, there is provided a user apparatus configured to perform communication with a base station in a mobile communication system that supports downlink spatial multiplexing, including:

35 transmission means configured to transmit category information of the user apparatus to the base station;

reception means configured to receive configuration information from the

base station;

soft buffer size determination means configured, if the category information is a value equal to or greater than a predetermined value and if a parameter indicating a transmission mode corresponding to the downlink spatial multiplexing and predetermined additional information are received as the configuration information, to determine a soft buffer size used for downlink data reception processing in the user apparatus by using the total number of soft channel bits corresponding to the category information.

According to an embodiment of the present invention, there is provided a soft buffer size determination method executed by a user apparatus configured to perform communication with a base station in a mobile communication system that supports downlink spatial multiplexing, including:

a transmission step of transmitting category information of the user apparatus to the base station;

a reception step of receiving a parameter indicating a transmission mode from the base station;

a soft buffer size determination step of, if the category information is a value equal to or greater than a predetermined value and if the parameter is a predetermined parameter corresponding to the downlink spatial multiplexing, determining a soft buffer size corresponding to the category information as a soft buffer size used for downlink data reception processing in the user apparatus.

According to an embodiment of the present invention, there is provided a soft buffer size determination method executed by a user apparatus configured to perform communication with a base station in a mobile communication system that supports downlink spatial multiplexing, including:

a transmission step of transmitting category information of the user apparatus to the base station;

a reception step of receiving configuration information from the base station;

a soft buffer size determination step of, if the category information is a value equal to or greater than a predetermined value and if a parameter indicating a transmission mode corresponding to the downlink spatial multiplexing and predetermined additional information are received as the configuration information, determining a soft buffer size corresponding to the category information as a soft buffer size used for downlink data reception processing in the user apparatus.

According to an embodiment of the present invention, there is provided

-6-

a soft buffer size determination method executed by a user apparatus configured to perform communication with a base station in a mobile communication system that supports downlink spatial multiplexing, including:

a transmission step of transmitting category information of the user apparatus to the base station;

a reception step of receiving configuration information from the base station;

a soft buffer size determination step of, if the category information is a value equal to or greater than a predetermined value and if a parameter indicating a transmission mode corresponding to the downlink spatial multiplexing and predetermined additional information are received as the configuration information, determining a soft buffer size used for downlink data reception processing in the user apparatus by using the total number of soft channel bits corresponding to the category information.

EFFECT OF THE PRESENT INVENTION

It becomes possible that a user apparatus properly determines a soft buffer size in a mobile communication system including the user apparatus and a base station.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagram showing a part of information elements of UE-EUTRA-Capability;

Fig. 2 is a diagram for explaining a problem;

Fig. 3 is a block diagram of a communication system according to an embodiment of the present invention;

Fig. 4 is a diagram showing a basic operation example of a communication system according to an embodiment of the present invention;

Fig. 5 is a diagram for explaining a soft buffer size determination method of the user apparatus UE in an operation example 1;

Fig. 6 is a diagram showing a change example of a standard specification in the operation example 1;

Fig. 7A is a diagram showing a change example of a standard specification in the operation example 1;

Fig. 7B is a diagram showing a change example of a standard specification in the operation example 1;

-7-

Fig. 8 is a diagram for explaining an RI bit width determination method of the user apparatus UE in the operation example 1;

Fig. 9 is a diagram showing an example of an RI bit width;

5 Fig. 10 is a diagram showing a change example of a standard specification in the operation example 1;

Fig. 11A is a diagram showing a change example of a standard specification in the operation example 1;

Fig. 11B is a diagram showing a change example of a standard specification in the operation example 1;

10 Fig. 12 is a diagram for explaining a soft buffer size determination method of the user apparatus UE in an operation example 2;

Fig. 13 is a diagram showing a change example of a standard specification in the operation example 2;

15 Fig. 14A is a diagram showing a change example of a standard specification in the operation example 2;

Fig. 14B is a diagram showing a change example of a standard specification in the operation example 2;

Fig. 14C is a diagram showing a change example of a standard specification in the operation example 2;

20 Fig. 15A is a diagram showing a change example of a standard specification in the operation example 2;

Fig. 15B is a diagram showing a change example of a standard specification in the operation example 2;

25 Fig. 16 is a diagram for explaining an RI bit width determination method of the user apparatus UE in the operation example 2;

Fig. 17 is a diagram showing a change example of a standard specification in the operation example 2;

Fig. 18 is a diagram for explaining a soft buffer size determination method of the user apparatus UE in an operation example 3;

30 Fig. 19 is a diagram showing a change example of a standard specification in the operation example 3;

Fig. 20A is a diagram showing a change example of a standard specification in the operation example 3;

35 Fig. 20B is a diagram showing a change example of a standard specification in the operation example 3;

Fig. 20C is a diagram showing a change example of a standard

specification in the operation example 3;

Fig. 21 is a diagram for explaining an RI bit width determination method of the user apparatus UE in the operation example 3;

5 Fig. 22 is a diagram showing a change example of a standard specification in the operation example 3;

Fig. 23 is a diagram for explaining a soft buffer size determination method of the user apparatus UE in an operation example 4;

Fig. 24 is a diagram showing a change example of a standard specification in the operation example 4;

10 Fig. 25A is a diagram showing a change example of a standard specification in the operation example 4;

Fig. 25B is a diagram showing a change example of a standard specification in the operation example 4;

15 Fig. 25C is a diagram showing a change example of a standard specification in the operation example 4;

Fig. 26 is a diagram for explaining an RI bit width determination method of the user apparatus UE in the operation example 4;

Fig. 27 is a diagram showing a change example of a standard specification in the operation example 4;

20 Fig. 28 is a block diagram of the user apparatus UE;

Fig. 29 is a block diagram of the base station eNB;

Fig. 30 is a diagram showing an example of a hardware configuration of the base station eNB and the user apparatus UE.

25 EMBODIMENTS FOR CARRYING OUT THE INVENTION

In the following, an embodiment of the present invention is described with reference to figures. The embodiment described below is merely an example, and the embodiment to which the present invention is applied is not limited to the embodiment below. For example, although it is assumed that the communication
30 system of the present embodiment supports LTE including LTE-Advanced, the present invention can be applied not only to LTE but also to other schemes performing spatial multiplexing based on MIMO technology.

Also, CA (carrier aggregation) in the present embodiment includes not only Intra-eNB CA but also Inter-eNB CA such as DC (Dual connectivity). In the
35 present embodiment, "CC" and "cell" can be considered to be synonymous basically, so that "CC" may be called "cell" (serving cell, more specifically).

(System whole configuration, operation outline)

Fig. 3 shows a block diagram of a communication system in an embodiment of the present invention. The communication system of the present embodiment is a communication system of the LTE scheme, and includes a user apparatus UE and a base station eNB as shown in Fig. 3. The user apparatus UE and the base station eNB can perform spatial multiplexing communication such as 2×2 MIMO, 4×4 MIMO and the like, and CA. The base station eNB can form a plurality of cells by itself, and also can form a plurality of cells, by remotely connecting an RRE (remote radio equipment) for example, by the main body of the base station eNB and the RRE. Although Fig. 3 shows one user apparatus UE and one base station eNB, this is an example, and a plurality of user apparatuses UE and a plurality of base stations eNB may be provided. Also, the user apparatus UE may be provided with capability (Dual connectivity) for performing communication with a plurality of base stations eNB simultaneously.

When CA is performed, a PCell (Primary cell) that is a reliable cell for ensuring connectivity and an SCell (Secondary cell) that is an appendant cell are set for the user apparatus UE. The user apparatus UE connects to a PCell first, and then, an SCell can be added as necessary. The PCell is a cell similar to an independent cell for supporting RLM (Radio Link Monitoring) and SPS (Semi-Persistent Scheduling) and the like. Addition and deletion of the SCell is performed by RRC (Radio Resource Control) signaling. Since an SCell is in a deactivated state right after it is set in the user apparatus UE, communication becomes available (scheduling becomes available) only by activating it.

When performing Dual connectivity, the user apparatus UE performs communication simultaneously using radio resources of two physically different base stations eNB. Dual connectivity is a kind of CA, and it is also referred to as Inter eNB CA (inter base station carrier aggregation), in which Master-eNB (MeNB) and Secondary-eNB (SeNB) are introduced. In DC, a cell group formed by cell(s) (one or a plurality of cells) under an MeNB is called MCG (Master Cell Group), and a cell group formed by cell(s) (one or a plurality of cells) under an SeNB is called SCG (Secondary Cell Group). An UL CC is set in at least one SCell in an SCG, and PUCCH is set in one of the SCells. The SCell is called PSCell (primary SCell).

As a basic operation in the present embodiment, there are notification of UE capability information (UE capability) for notifying the base station of capability of the user apparatus UE from the user apparatus UE, and notification of RRCConnectionReconfiguration for notifying the user apparatus UE of various

configuration information (configuration) on RRC connection and the like from the base station eNB. These notification operation examples are described with reference to Fig. 4. As shown in Fig. 4, the user apparatus UE receives UE capability information request (UE capability enquiry) transmitted from the base station eNB in step S101.

- 5 The user apparatus UE transmits UE capability information (UE capability information) to the base station eNB based on the UE capability information request (step S102). The UE capability information of the present embodiment includes a UE category, the (maximum) number of downlink MIMO layers supported for each CC.

10 In step S103, RRCConnectionReconfiguration is notified from the base station eNB to the user apparatus UE. The user apparatus UE that receives RRCConnectionReconfiguration performs setting (storing) of various notified configurations, and transmits RRCConnectionReconfigurationComplete to the base station eNB in step S104. The RRCConnectionReconfiguration includes a parameter and the like of a transmission mode (TM).

- 15 Also, as basic operation of the user apparatus UE, there is transmission of uplink control information (UCI, hereinafter). As the UCI, there are ACK/NACK (hybrid ARQ transmittal confirmation), scheduling request, and channel state information (CSI, hereinafter) and the like. As the CSI, there are CQI, PMI, RI and the like. The present embodiment especially focuses on transmission of an RI in the CSI.
- 20 However, the technique of the present embodiment can be also applied to UCI other than the RI.

As for CSI reporting, there are periodic reporting and aperiodic reporting. For the periodic reporting, a PUCCH is normally used. However, when there is data transmission by a PUSCH at a periodic reporting timing, there is a case where the

25 PUSCH is used. Also, aperiodic reporting is performed by a PUSCH based on a request from a scheduling grant from the base station eNB.

The target of CSI reporting is for each downlink CC (cell). For example, in downlink CA including a downlink CC1 and a downlink CC2, the user apparatus UE obtains an RI1 by measurement of a reference signal (example: CSI-RS) that is

30 received in the downlink CC1 and reports the RI1 to the base station eNB as an RI for the CC1, and the user apparatus UE obtains an RI2 by measurement of a CSI-RS that is received in the downlink CC2 and reports the RI2 to the base station eNB as an RI for the CC2.

In the following, an operation example 1, an operation example 2, an

35 operation example 3, and an operation example 4 in the present embodiment are described in detail.

(Operation example 1)

As described before, in the conventional technique, in the case where the user apparatus UE is configured with TM3/4 (TM3 or TM4), the user apparatus UE uses a soft buffer size of category 4 even though the user apparatus UE has capability of 4 layer reception. Thus, there is a problem in that quality may be deteriorated in an environment where HARQ retransmission occurs.

Therefore, in the operation example 1, a new TM is newly introduced as a parameter to enable proper determination of a soft buffer size according to the parameter. In the operation example 1, parameters of the new TM are tm3-rank4-v12xy corresponding to TM3 and tm4-rank4-v12xy corresponding to TM4.

Also, the new TM is a TM that enables to properly execute MIMO communication of up to rank 4, this can be referred to as a TM for "TM3/4 up to rank4".

Operation of the user apparatus UE on determination of a soft buffer size is described with reference to Fig. 5.

In step S301, the user apparatus UE transmits, to the base station eNB, a UE capability including a UE category and the number of supported downlink MIMO layers. In step S302, the user apparatus UE receives a TM (included in RRCConnectionReconfiguration) from the base station eNB. The base station eNB has determined the TM to be configured in the user apparatus UE based on the UE category, the number of downlink MIMO layers and the like received in step S301.

In step S303, the user apparatus UE determines whether the UE category of the user apparatus UE itself is on or after UE category 6 and the user apparatus UE has received (configured) tm3/4-rank4-v12xy which is the new TM.

When the determination result of step S303 is Yes, the user apparatus UE calculates a soft buffer size (N_{IR}) by using the total number of soft channel bits (N_{soft}) corresponding to the UE category of the user apparatus UE (category on or after category 6) (step S304). When the determination result in step S303 is No, the user apparatus UE calculates a soft buffer size according to an existing rule (non-patent document 4, and the like) (step S305).

The user apparatus UE executes data reception processing such as HARQ control using a soft buffer of the soft buffer size calculated in the above-mentioned way.

Fig. 6 is a diagram showing a change example (excerpt) of a standard specification in the operation example 1. Fig. 6 shows a change example of the non-patent document 4 (3GPP TS 36.212). Parts related to the change are underlined. In Fig. 6, as described as "if the UE signals ue-Category-v1020, and is configured with

transmission mode 9, transmission mode 10, transmission mode 3 up to rank 4 or transmission mode 4 up to rank 4 for the DL cell, N_{soft} is the total number of soft channel bits [4] according to the UE category indicated by ue-Category-v1020 [6].", in the operation example 1, if the UE user apparatus is configured with the TM3/4 for up to rank4 for a downlink cell (serving cell), the user apparatus UE calculates a soft buffer size using the total number of soft channel bits corresponding to the UE category indicated by ue-Category-v1020 (that is, a UE category on or after UE category 6).

Figs. 7A and 7B show a change example of the non-patent document 2 (3GPP TS 36.331) in the operation example 1. As shown in Figs. 7A and 7B, the above-mentioned tm3-rank4-v12xy and tm4-rank4-v12xy are added.

As described before, in the conventional technique, in the case where the user apparatus UE is configured with TM3/4 (TM3 or TM4), even when the user apparatus UE has capability for performing 4 layer reception, a case occurs where the user apparatus UE cannot notify of a value of an RI corresponding to the capability of the user apparatus UE itself.

In the operation example 1, as described above, a new TM is introduced, and further, the number of MIMO layers supported for TM3/4 up to rank4 is introduced as information of the UE capability, so that the user apparatus UE can properly notify of a value of an RI.

Operation on determination of an RI bit width of the user apparatus UE is described with reference to a flowchart of Fig. 8.

Steps S401 and S402 are the same as steps S301 and S302 in Fig. 5.

In step S403, the user apparatus UE determines whether the user apparatus UE has notified of the number of downlink MIMO layers for TM3/4 up to rank4 by including it in the UE capability and the user apparatus UE has received (configured) tm3/4-rank4-v12xy. Notifying of the number of MIMO layers for TM3/4 up to rank4 as the UE capability means that the user apparatus UE supports MIMO communication for TM3/4 up to rank4.

When the determination result in step S403 is Yes, the user apparatus UE determines an RI bit width using, as the maximum number of layers, the minimum value of the number of antenna ports of PBCH and the notified number of MIMO layers (step S404). Here, the number of antenna ports of PBCH is a value that can be calculated based on MIB that the user apparatus UE receives from the base station eNB. For example, assuming that the number of antenna ports of PBCH is 4 and the notified number of MIMO layers is 2, the maximum number of layers is 2, so that the RI

-13-

bit width is determined from this 2. The RI bit width is determined from a predetermined table (example: Fig. 9). As shown in Fig. 9, when the maximum number of layers is 2, the bit width is determined as 1.

When the determination result in step S403 is No, the user apparatus
 5 UE determines the RI bit width according to an existing rule (non-patent document 4 and the like) (step S405).

Fig. 10 is a diagram showing a change example (excerpt) of a standard specification in the operation example 1. Fig. 10 shows a change example of the non-patent document 4 (3GPP TS 36.212). Parts related to the change are underlined.

10 In Fig. 10, as described as "If the UE is configured with transmission mode 3 or 4 up to Rank4 operation, and the supportedMIMO-TM3(or 4)-CapabilityDL-r12 field is included in the UE-EUTRA-Capability, the maximum number is determined according to the minimum of the number of PBCH antenna ports and the reported UE downlink MIMO capabilities in the supportedMIMO-TM3(or 4)-CapabilityDL-r12 field for the same
 15 band in the corresponding band combination.", in the operation example 1, if the user apparatus UE is configured with TM3/4 up to Rank4 and "supportedMIMO-TM3(or4)-CapabilityDL-r12" is included in the UE-EUTRA-Capability, the user apparatus UE determines the maximum number of layers for determining the RI bit width based on the number of PBCH antenna ports and the notified number of downlink MIMO layers.

20 Figs. 11A and 11B show a change example of the non-patent document 2 (3GPP TS 36.331) in the operation example 1. As shown in Figs. 11A and 11B, supportedMIMO-TM3/4-CapabilityDL-r12 indicating the maximum number of downlink MIMO layers that the UE supports is added. As to addition of supportedMIMO-TM3/4-CapabilityDL-r12 shown in Figs. 11A and 11B, same applies to operation examples
 25 2~4 described below. Although the number of MIMO layers is reported for each of TM3 and TM4 in the present embodiment, one signalling including TM3 and TM4 may be used. In this case, it is assumed that the number of MIMO layers is the same between TM3 and TM4.

(Operation example 2)

30 Next, the operation example 2 is described. In the operation example 1, a new TM is newly introduced as a parameter. On the other hand, in the operation example 2, by adding rank4-enabled which is a new information element to the existing TM3 and TM4, the user apparatus UE is configured with operation of up to rank 4.

Operation of the user apparatus UE on determination of a soft buffer
 35 size is described with reference to a flowchart of Fig. 12 in the case where the new information element is used.

In step S501, the user apparatus UE transmits, to the base station eNB, a UE capability including a UE category and the number of supported downlink MIMO layers. In step S502, the user apparatus UE receives a TM (included in RRCConnectionReconfiguration) from the base station eNB. In the operation example 2, the above-mentioned information element is added to the TM. The base station eNB has determined the TM to be configured in the user apparatus UE based on the UE category, the number of downlink MIMO layers and the like received in step S501.

In step S503, the user apparatus UE determines whether the UE category of the user apparatus UE itself is on or after UE category 6 and the user apparatus UE has received TM3/4 and rank4-enabled.

When the determination result of step S503 is Yes, the user apparatus UE calculates a soft buffer size (N_{IR}) by using the total number of soft channel bits (N_{soft}) corresponding to the UE category of the user apparatus UE (category on or after category 6) (step S504). When the determination result in step S503 is No, the user apparatus UE calculates a soft buffer size according to an existing rule (non-patent document 4, and the like) (step S505).

The user apparatus UE executes HARQ control and the like in data reception using a soft buffer of the soft buffer size calculated in the above-mentioned way.

Fig. 13 is a diagram showing a change example (excerpt) of a standard specification in the operation example 2. Fig. 13 shows a change example of the non-patent document 4 (3GPP TS 36.212). Parts related to the change are underlined. In Fig. 13, as described as "if the UE signals ue-Category-v1020, and is configured with transmission mode 3 or transmission mode 4, and is configured by higher layers with rank4-enabled-r12 for the DL cell, N_{soft} is the total number of soft channel bits [4] according to the UE category indicated by ue-Category-v1020 [6].", in the operation example 2, if the UE user apparatus UE is configured with TM3/4 and rank4-enabled for a downlink cell (serving cell), the user apparatus UE calculates a soft buffer size using the total number of soft channel bits corresponding to the UE category indicated by ue-Category-v1020 (that is, a UE category on or after UE category 6).

Figs. 14A~C and Figs. 15A, B show a change example of the non-patent document 2 (3GPP TS 36.331) in the operation example 2. As shown in Figs. 14A~C and Figs. 15A, B, the rank4-enabled indicating that up to rank4 operation in TM3/4 is available is added.

As to determination of an RI bit width, in the operation example 2, as described above, the rank4-enabled added to the existing TM3/4 is introduced, and

further, the number of MIMO layers supported for TM3/4 up to rank4 is introduced in the UE capability, so that the user apparatus UE can properly notify of a value of an RI.

Operation on determination of an RI bit width of the user apparatus UE in the operation example 2 is described with reference to a flowchart of Fig. 16.

5 Steps S601 and S602 are the same as steps S501 and S502 in Fig. 12.

In step S603, the user apparatus UE determines whether the user apparatus UE has notified of the number of downlink MIMO layers for TM3/4 up to rank4 by including it in the UE capability and the user apparatus UE has received (configured) TM3/4 and rank4-enabled.

10 When the determination result in step S603 is Yes, the user apparatus UE determines an RI bit width using, as the supported maximum number of layers, the minimum value of the number of antenna ports of PBCH and the notified number of MIMO layers (step S604). The method for determining an RI bit width from the maximum number of layers is the same as the method described in the operation
15 example 1.

When the determination result in step S603 is No, the user apparatus UE determines the RI bit width according to an existing rule (non-patent document 4 and the like) (step S605).

20 Fig. 17 is a diagram showing a change example (excerpt) of a standard specification in the operation example 2. Fig. 17 shows a change example of the non-patent document 4 (3GPP TS 36.212). Parts related to the change are underlined.

In Fig. 17, as described as "If the UE is configured with transmission mode 3 or 4, and is configured by higher layers with rank4-enabled-r12 for the DL cell, and the supportedMIMO-TM3(or 4)-CapabilityDL-r12 field is included in the UE-EUTRA-
25 Capability, the maximum number is determined according to the minimum of the number of PBCH antenna ports and the reported UE downlink MIMO capabilities in the supportedMIMO-TM3(or 4)-CapabilityDL-r12 field for the same band in the corresponding band combination.", in the operation example 2, if the user apparatus UE is configured with TM3/4 and rank4-enabled and "supportedMIMO-TM3(or4)-
30 CapabilityDL-r12" is included in the UE-EUTRA-Capability, the user apparatus UE determines the maximum number of layers for determining the RI bit width based on the number of PBCH antenna ports and the notified number of downlink MIMO layers.

(Operation example 3)

35 Next, the operation example 3 is described. In the operation example 3, the base station eNB transmits, to the user apparatus UE, for each CC (cell), an information element (maxLayers-RI-report) indicating the maximum number of layers

used for determining an RI bit width in the user apparatus UE. Also, the information element has a function similar to that of the rank4-enabled in the operation example 2. That is, in addition to the existing TM3 and TM4, by notifying the user apparatus UE of maxLayers-RI-report, the user apparatus UE is configured with operation of up to rank 4 of TM3/4.

Operation of the user apparatus UE on determination of a soft buffer size is described with reference to a flowchart of Fig. 18 in the case where the new parameter is used.

In step S701, the user apparatus UE transmits, to the base station eNB, a UE capability including a UE category and the number of supported downlink MIMO layers. In step S702, the user apparatus UE receives a TM (included in RRCConnectionReconfiguration) from the base station eNB. In the operation example 3, in step S702, in addition to the TM, maxLayers-RI-report is transmitted from the base station eNB to the user apparatus UE. The base station eNB has determined the TM (+maxLayers-RI-report) to be configured in the user apparatus UE based on the UE category, the number of downlink MIMO layers (for each CC (cell)) and the like received in step S701.

In step S703, the user apparatus UE determines whether the UE category of the user apparatus UE itself is on or after UE category 6 and the user apparatus UE has received TM3/4 and maxLayers-RI-report.

When the determination result of step S703 is Yes, the user apparatus UE calculates a soft buffer size (N_{IR}) by using the total number of soft channel bits (N_{soft}) corresponding to the UE category of the user apparatus UE (category on or after category 6) (step S704). When the determination result in step S703 is No, the user apparatus UE calculates a soft buffer size according to an existing rule (non-patent document 4, and the like).

The user apparatus UE executes HARQ control and the like in data reception using a soft buffer of the soft buffer size calculated in the above-mentioned way.

Fig. 19 is a diagram showing a change example (excerpt) of a standard specification in the operation example 3. Fig. 19 shows a change example of the non-patent document 4 (3GPP TS 36.212). Parts related to the change are underlined. In Fig. 19, as described as "if the UE signals ue-Category-v1020, and is configured with transmission mode 3 or transmission mode 4, and is configured by higher layers with maxLayers-RI-report-r12 for the DL cell, N_{soft} is the total number of soft channel bits [4] according to the UE category indicated by ue-Category-v1020 [6].", in the operation

example 3, if the UE user apparatus UE is configured with TM3/4 and maxLayers-RI-report for a downlink cell (serving cell), the user apparatus UE calculates a soft buffer size using the total number of soft channel bits corresponding to the UE category indicated by ue-Category-v1020 (that is, a UE category on or after UE category 6).

5 Figs. 20A~C show a change example of the non-patent document 2 (3GPP TS 36.331) in the operation example 3. As shown in Figs. 20A~C, the maxLayers-RI-report indicating the number of MIMO layers used for determining an RI bit width is added. Fig. 20C shows an example of addition of signalling for enabling notification of maxLayers-RI-report to each of a PCell and an SCell.

10 As to determination of an RI bit width, in the operation example 3, as described above, the maxLayers-RI-report added to the existing TM3/4 is introduced, and further, the number of MIMO layers supported for TM3/4 up to rank4 is introduced in the UE capability, so that the user apparatus UE can properly notify of a value of an RI.

15 Operation on determination of an RI bit width of the user apparatus UE in the operation example 3 is described with reference to a flowchart of Fig. 21.

Steps S801 and S802 are the same as steps S701 and S702 in Fig. 18.

In step S803, the user apparatus UE determines whether the user apparatus UE has notified of the number of downlink MIMO layers for TM3/4 up to rank4 as the UE capability and the user apparatus UE has received (configured) TM3/4 and maxLayers-RI-report.

20 When the determination result in step S803 is Yes, the user apparatus UE determines an RI bit width using, as the supported maximum number of layers, the minimum value of the number of antenna ports of PBCH and the value of maxLayers-RI-report. (step S804). The method for determining an RI bit width from the maximum number of layers is the same as the method described in the operation example 1.

When the determination result in step S803 is No, the user apparatus UE determines the RI bit width according to an existing rule (non-patent document 4 and the like) (step S805).

30 Fig. 22 is a diagram showing a change example (excerpt) of a standard specification in the operation example 3. Fig. 22 shows a change example of the non-patent document 4 (3GPP TS 36.212). Parts related to the change are underlined.

In Fig. 22, as described as "If the UE is configured with transmission mode 3 or 4, and is configured by higher layers with maxLayers-RI-report-r12 for the DL cell, and the supportedMIMO-TM3(or 4)-CapabilityDL-r12 field is included in the UE-EUTRA-Capability, the maximum number is determined according to the minimum of the

number of PBCH antenna ports and the configured maxLayers-RI-report-r12 field for the same band in the corresponding band combination.”, in the operation example 3, if the user apparatus UE is configured with TM3/4 and maxLayers-RI-report and “supportedMIMO-TM3(or4)-CapabilityDL-r12” is included in the UE-EUTRA-Capability, the user apparatus UE determines the maximum number of layers for determining the RI bit width based on the number of PBCH antenna ports and the value of the maxLayers-RI-report.

(Operation example 4)

Next, the operation example 4 is described. In the operation example 4, the base station eNB transmits, to the user apparatus UE, for each CC (cell), an information element (ue-RI-Bit-Width) indicating an RI bit width used in the user apparatus UE. Also, the information element has a function similar to that of the rank4-enabled in the operation example 2. That is, in addition to the existing TM3 and TM4, by notifying the user apparatus UE of ue-RI-Bit-Width, the user apparatus UE is configured with operation of up to rank 4 of TM3/4.

Operation of the user apparatus UE on determination of a soft buffer size is described with reference to a flowchart of Fig. 23 in the case where the new parameter is used.

In step S901, the user apparatus UE transmits, to the base station eNB, a UE capability including a UE category and the number of supported downlink MIMO layers. In step S902, the user apparatus UE receives a TM (included in RRCConnectionReconfiguration) from the base station eNB. In the operation example 4, in step S902, in addition to the TM, ue-RI-Bit-Width is transmitted from the base station eNB to the user apparatus UE. The base station eNB has determined, for each CC (cell), the TM (+ue-RI-Bit-Width) to be configured in the user apparatus UE based on the UE category, the number of downlink MIMO layers and the like received in step S901.

In step S903, the user apparatus UE determines whether the UE category of the user apparatus UE itself is on or after UE category 6 and the user apparatus UE has received TM3/4 and ue-RI-Bit-Width.

When the determination result of step S903 is Yes, the user apparatus UE calculates a soft buffer size (N_{IR}) by using the total number of soft channel bits (N_{soft}) corresponding to the UE category of the user apparatus UE (category on or after category 6) (step S904). When the determination result in step S903 is No, the user apparatus UE calculates a soft buffer size according to an existing rule (non-patent document 4, and the like) (step S905).

The user apparatus UE executes HARQ control and the like in data reception using a soft buffer of the soft buffer size calculated in the above-mentioned way.

Fig. 24 is a diagram showing a change example (excerpt) of a standard specification in the operation example 4. Fig. 24 shows a change example of the non-patent document 4 (3GPP TS 36.212). Parts related to the change are underlined. In Fig. 24, as described as “if the UE signals ue-Category-v1020, and is configured with transmission mode 3 or transmission mode 4, and is configured by higher layers with ue-RI-Bit-Width-r12 for the DL cell, N_{soft} is the total number of soft channel bits [4] according to the UE category indicated by ue-Category-v1020 [6].”, in the operation example 4, if the UE user apparatus UE is configured with TM3/4 and ue-RI-Bit-Width for a downlink cell (serving cell), the user apparatus UE calculates a soft buffer size using the total number of soft channel bits corresponding to the UE category indicated by ue-Category-v1020 (that is, a UE category on or after UE category 6).

Figs. 25A~C show a change example of the non-patent document 2 (3GPP TS 36.331) in the operation example 4. As shown in Figs. 25A~C, the ue-RI-Bit-Width indicating the RI bit width is added. Fig. 25C shows an example of addition of signalling for enabling notification of ue-RI-Bit-Width to each of a PCell and an SCell.

As to determination of an RI bit width, in the operation example 4, as described above, the ue-RI-Bit-Width added to the existing TM3/4 is introduced, and further, the number of MIMO layers supported for TM3/4 up to rank4 is introduced in the UE capability, so that the user apparatus UE can properly notify of a value of an RI.

Operation on determination of an RI bit width of the user apparatus UE in the operation example 4 is described with reference to a flowchart of Fig. 26.

Steps S1001 and S1002 are the same as steps S901 and S902 in Fig. 23.

In step S1003, the user apparatus UE determines whether the user apparatus UE has notified of the number of downlink MIMO layers for TM3/4 up to rank4 as the UE capability and the user apparatus UE has received (configured) TM3/4 and ue-RI-Bit-Width.

When the determination result in step S1003 is Yes, the user apparatus UE determines the value of ue-RI-Bit-Width as an RI bit width (step S1004).

When the determination result in step S1003 is No, the user apparatus UE determines the RI bit width according to an existing rule (non-patent document 4 and the like) (step S1005).

Fig. 27 is a diagram showing a change example (excerpt) of a standard

–20–

specification in the operation example 4. Fig. 27 shows a change example of the non-patent document 4 (3GPP TS 36.212). Parts related to the change are underlined.

In Fig. 27, as described as “If the UE is configured with transmission mode 3 or 4, and is configured by higher layers with ue-RI-Bit-Width-r12 for the DL cell, and the supportedMIMO-TM3(or 4)-CapabilityDL-r12 field is included in the UE-EUTRA-Capability, the RI bit width is determined according to the ue-RI-Bit-Width-r12 value for the DL cell signalled to the UE.”, in the operation example 4, if the user apparatus UE is configured with TM3/4 and ue-RI-Bit-Width and “supportedMIMO-TM3(or4)-CapabilityDL-r12” is included in the UE-EUTRA-Capability, the user apparatus UE determines the RI bit width according to ue-RI-Bit-Width.

(Apparatus configuration example)

Next, main configurations of the user apparatus UE and the base station eNB that can execute operation (including the operation example 1, the operation example 2, the operation example 3, and the operation example 4) are described.

First, Fig. 28 shows a block diagram of the user apparatus UE according to the present embodiment. As shown in Fig. 28, the user apparatus UE includes an UL signal transmission unit 101, a DL signal reception unit 102, an RRC management unit 103, a soft buffer size determination unit 104, and an RI bit width determination unit 105. Fig. 28 only shows functional units especially related to the embodiment of the present invention in the user apparatus UE, and the user apparatus UE also includes at least functions, not shown in the figure, for performing operation complying with LTE. Also, the configuration shown in Fig. 28 is merely an example. Any functional segmentations and any names of functional units can be used as long as the user apparatus UE can execute processing described in the present embodiment. Also, the user apparatus UE may include functions for performing all operations of the operation examples 1, 2, 3 and 4, or may include functions for performing any one operation of the operation examples 1, 2, 3 and 4. Also, the user apparatus UE may include functions for performing operations of a plurality (two or two) of the operation examples 1, 2, 3 and 4. Also, the user apparatus UE may include both of or one of the function for determining a soft buffer size according to the method of the present embodiment and the function for determining an RI bit width according to the method of the present embodiment. In the case where the function for determining the soft buffer size according to the method described in the present embodiment is provided, the RI bit width is properly determined, for example, such that an RI is reported with a sufficient bit width, and the like.

The UL signal transmission unit 101 includes functions configured to

generate various signals of physical layer from an upper layer signal to be transmitted from the user apparatus UE, and transmit the signals by radio. The DL signal reception unit 201 includes functions configured to receive various signals from the base station eNB by radio and obtain a signal of an upper layer from the received physical layer signals. Each of the UL signal transmission unit 101 and the DL signal reception unit 102 includes a function configured to execute CA in which communication is performed by bundling a plurality of CCs. Also, the DL signal reception unit 102 includes a function configured to determine a CSI such as an RI by performing measurement of a reference signal, and the UL signal transmission unit 101 includes a function configured to transmit the CSI such as the RI. Also, the DL signal reception unit 102 and the UL signal transmission unit 101 include functions configured to execute HARQ control on data reception using a soft buffer of the size determined by the soft buffer size determination unit 104.

It is assumed that each of the UL signal transmission unit 101 and the DL signal reception unit 102 includes a packet buffer, and performs processing of the layer 1 (PHY) and the layer 2 (MAC, RLC, PDCP). However, it is not limited to this.

The RRC management unit 103 includes functions configured to perform transmission and reception of an RRC message with the base station eNB via the UL signal transmission unit 101/DL signal reception unit 102, and to perform processing of setting/change/management of CA information, configuration change and the like. Also, the RRC management unit 103 holds information of capability of the user apparatus UE, and generates an RRC message for notification of capability information, and transmits it to the base station via the UL signal transmission unit 101.

The soft buffer size determination unit 104 determines a soft buffer size. For example, when executing the operation example 1, the soft buffer size determination unit 104 determines whether the UE category of the user apparatus UE is a UE category on or after UE category 6 and $tm3/4$ -rank4- $v12xy$ is received or not, then, if the determination result is Yes, calculates a soft buffer size (N_{IR}) by using the total number of soft channel bits (N_{soft}) corresponding to the UE category (category on or after category 6). The user apparatus includes storage means such as a memory, and the storage means stores a table (including the total number of soft channel bits for each UE category) like one shown in Fig. 2. The soft buffer size determination unit 104 obtains the total number of soft channel bits from the table.

When executing the operation example 2, the soft buffer size determination unit 104 determines whether the UE category of the user apparatus UE is a UE category on or after UE category 6 and $TM3/4$ and rank4-enabled are received

or not, then, if the determination result is Yes, calculates a soft buffer size (N_{IR}) by using the total number of soft channel bits (N_{soft}) corresponding to the UE category (category on or after category 6).

When executing the operation example 3, the soft buffer size determination unit 104 determines whether the UE category of the user apparatus UE is a UE category on or after UE category 6 and TM3/4 and maxLayers-RI-report are received or not, then, if the determination result is Yes, calculates a soft buffer size (N_{IR}) by using the total number of soft channel bits (N_{soft}) corresponding to the UE category (category on or after category 6).

When executing the operation example 4, the soft buffer size determination unit 104 determines whether the UE category of the user apparatus UE is a UE category on or after UE category 6 and TM3/4 and ue-RI-Bit-Width are received or not, then, if the determination result is Yes, calculates a soft buffer size (N_{IR}) by using the total number of soft channel bits (N_{soft}) corresponding to the UE category (category on or after category 6).

The RI bit width determination unit 105 calculates an RI bit width for each CC (cell). For example, in the case where the operation example 1 is executed, the RI bit width determination unit 105 determines whether the number of downlink MIMO layers for TM3/4 up to rank4 is notified as the UE capability and tm3/4-rank4-v12xy is received, then, if the determination result is Yes, determines the RI bit width by using, as the maximum number of layers of the corresponding CC (cell), the minimum value of the number of antenna ports of PBCH and the notified number of MIMO layers.

In the case where the operation example 2 is executed, the RI bit width determination unit 105 determines whether the number of downlink MIMO layers for TM3/4 up to rank4 is notified as the UE capability and TM3/4 and rank4-enabled are received, then, if the determination result is Yes, determines the RI bit width by using, as the maximum number of layers of the corresponding CC (cell), the minimum value of the number of antenna ports of PBCH and the notified number of MIMO layers.

In the case where the operation example 3 is executed, the RI bit width determination unit 105 determines whether the number of downlink MIMO layers for TM3/4 up to rank4 is notified as the UE capability, and TM3/4 and maxLayers-RI-report are received, then, if the determination result is Yes, determines the RI bit width by using, as the maximum number of layers of the corresponding CC (cell), the minimum value of the number of antenna ports of PBCH and the value of maxLayers-RI-report.

In the case where the operation example 4 is executed, the RI bit width

–23–

determination unit 105 determines whether the number of downlink MIMO layers for TM3/4 up to rank4 is notified as the UE capability, and TM3/4 and ue-RI-Bit-Width are received, then, if the determination result is Yes, determines the value of ue-RI-Bit-Width as the RI bit width the corresponding CC (cell).

5 Fig. 29 shows a block diagram of the base station eNB according to the present embodiment. As shown in Fig. 29, the base station eNB includes a DL signal transmission unit 201, an UL signal reception unit 202, an RRC management unit 203, and a scheduling unit 204. Fig. 29 only shows functional units especially related to the embodiment of the present invention in the base station eNB, and the base station eNB
10 also includes at least functions, not shown in the figure, for performing operation complying with LTE. Also, the configuration shown in Fig. 29 is merely an example. Any functional segmentations and any names of functional units can be used as long as the base station eNB can execute operation described in the present embodiment. The base station eNB may be a single base station eNB, and also, the base station
15 eNB may become either one of an MeNB and an SeNB by configuration when performing DC. Also, the base station eNB may include functions for performing all operations of the operation examples 1, 2, 3 and 4, or may include functions for performing any one operation of the operation examples 1, 2, 3 and 4. Also, the base station eNB may include functions for performing operations of a plurality (two or two)
20 of the operation examples 1, 2, 3 and 4.

The DL signal transmission unit 201 includes functions configured to generate various signals of physical layer from an upper layer signal to be transmitted from the base station eNB, and transmit the signals by radio. The UL signal reception unit 202 includes functions configured to receive various signals from each UE by radio
25 and obtain a signal of an upper layer from the received physical layer signals. Each of the DL signal transmission unit 201 and the UL signal reception unit 202 includes a function configured to execute CA in which communication is performed by bundling a plurality of CCs. Also, each of the DL signal transmission unit 201 and the UL signal reception unit 202 may include a radio communication unit, such as an RRE, that is
30 remotely placed from the main body (control unit) of the base station eNB.

It is assumed that each of the DL signal transmission unit 201 and the UL signal reception unit 202 includes a packet buffer, and performs processing of the layer 1 (PHY) and the layer 2 (MAC, RLC, PDCP). However, it is not limited to this.

The RRC management unit 203 includes functions configured to perform
35 transmission and reception of an RRC message with the user apparatus UE via the DL signal transmission unit 201/UL signal reception unit 202, and to perform processing of

setting/change/management of CA, configuration change and the like. Also, the RRC management unit 203 receives capability information from the user apparatus UE via the UL signal reception unit 202, and holds the capability information, so that the RRC management unit 203 can perform configuration and the like of CA and TM for the user apparatus UE. When the operation example 1 is executed, the TM includes the tm3-rank4-v12xy and the tm4-rank4-v12xy. Also, when the operation example 2 is executed, the RRC management unit 203 can notify of the rank4-enabled by adding it to TM3/4.

Also, when the operation example 3 is executed, the RRC management unit 203 determines the value of maxLayers-RI-report based on the number of downlink MIMO layers and the like that is received from the user apparatus UE as the UE capability, and notifies the user apparatus UE of the value by setting it to the maxLayers-RI-report. As an example, when the number of downlink MIMO layers notified from the user apparatus for a CC (cell) is 4, the RRC management unit 203 determines the value of the maxLayers-RI-report as 4. Also, for example, when there is a limitation for the total number of downlink MIMO layers in CA of a plurality of CCs, even when the number of downlink MIMO layers for a CC is 4, there is a case where the RRC management unit 203 determines the value of the maxLayers-RI-report as 2.

Also, when the operation example 4 is executed, the RRC management unit 203 determines the value of ue-RI-Bit-Width based on the number of downlink MIMO layers that is received from the user apparatus UE as the UE capability and the number of PBCH antenna ports used for downlink PBCH transmission by the base station eNB and the like, and notifies the user apparatus UE of the value by setting it to the ue-RI-Bit-Width. As an example, when the number of downlink MIMO layers notified from the user apparatus for a CC (cell) is 4 and the number of PBCH antenna ports is 4, the RRC management unit 203 determines the value of the ue-RI-Bit-Width as 2.

The scheduling unit 204 includes functions and the like configured to perform scheduling for each cell for the user apparatus UE, to generate assignment information of PDCCH, and to instruct the DL signal transmission unit 201 to transmit the PDCCH including the assignment information.

<Hardware configuration>

The block diagrams (Fig. 29 and Fig. 29) used for the description of the above-described embodiment illustrates blocks in units of functions. These functional blocks (components) are implemented by any combinations of hardware and/or software. Further, a method for implementing each functional block is not particularly

limited. Namely, each functional block may be implemented by a single device that is physically and/or logically combined; or may be implemented by a plurality of devices by directly and/or indirectly (e.g., wired and/or wireless) connecting the two or more devices that are physically and/or logically separated.

5 For example, the base station eNB and the user apparatus UE according to the embodiment of the present invention may function as computers for executing the process of the radio communication method according to the present invention. FIG. 30 is a diagram illustrating an example of the hardware configurations of the base station eNB and the user apparatus UE according to the embodiment. Each of the
10 above-described base station eNB and the user apparatus UE may be physically configured as a computer device including a processor 1001; a memory 1002; a storage 1003; a communication device 1004; an input device 1005; an output device 1006; a bus 1007, and so forth.

Note that, in the following description, the wording "device" may be
15 replaced with a circuit, a device, a unit, and so forth. The hardware configurations of the base station eNB and the user apparatus UE may be arranged to include one or more of the devices illustrated in the figure; or may be arranged not to include a part of the devices.

Each function of the base station eNB and the user apparatus UE may
20 be implemented by loading predetermined software (a program) onto hardware, such as a processor 1001 and a memory 1002, so that the processor 1001 performs operation to control communication by the communication device 1004, and reading and/or writing data in the memory 1002 and the storage 1003.

The processor 1001 controls the entire computer, for example, by
25 operating an operating system. The processor 1001 may be formed of a central processing unit (CPU: Central Processing Unit) including an interface with peripheral devices; a controller; a processor, a resister, and so forth. For example, the UL signal transmission unit 101, the DL signal reception unit 102, the RRC management unit 103, the soft buffer size determination unit 104, and the RI bit width determination unit 105
30 of the user apparatus UE may be implemented by the processor 1001; and the DL signal transmission unit 201, the UL signal reception unit 202, the RRC management unit 203, and the scheduling unit 204 of the base station eNB may be implemented by the processor 1001.

Furthermore, the processor 1001 reads out a program (a program code),
35 a software module, or data from the storage 1003 and/or the communication device 1004 onto the memory 1002; and performs various types of processes according to

these. As the program, a program is used which is for causing the computer to execute at least a part of the operation described in the above-described embodiment. For example, the UL signal transmission unit 101, the DL signal reception unit 102, the RRC management unit 103, the soft buffer size determination unit 104, and the RI bit width determination unit 105 of the user apparatus UE may be implemented by a control program that is stored in the memory 1002 and operated by the processor 1001 and the other functional blocks may be implemented in a similar manner; and the DL signal transmission unit 201, the UL signal reception unit 202, the RRC management unit 203, and the scheduling unit 204 of the base station eNB may be implemented by a control program that is stored in the memory 1002 and operated by the processor 1001; and the other functional blocks may be implemented in a similar manner. It is described that the above-described various types of processes are executed by the single processor 1001; however, these can be simultaneously or sequentially executed by two or more processors 1001. The processor 1001 may be implemented by one or more chips. Here, the program may be transmitted from a network via a telecommunication line.

The memory 1002 is a computer readable recording medium; and, for example, it can be formed of at least one of a ROM (Read Only Memory), an EPROM (Erasable Programmable ROM), an EEPROM (Electrically Erasable Programmable ROM), a RAM (Random Access Memory), and so forth. The memory 1002 may be referred to as a register, a cache, a main memory (a main storage device), and so forth. The memory 1002 can store a program (a program code), a software module, and so forth that can be executed for implementing the communication method according to the embodiment of the present invention.

The storage 1003 is a computer readable recording medium; and, for example, it can be formed of at least one of an optical disk, such as a CD-ROM (Compact Disc ROM); a hard disk drive; a flexible disk; a magneto-optical disk (e.g., a compact disk, a digital versatile disk, a Blu-ray (registered trademark) disk); a smart card; a flash memory (e.g., a card, a stick, a key drive); a Floppy (registered trademark) disk; a magnetic strip, and so forth. The storage 1003 may be referred to as an auxiliary storage device. The above-described storage medium may be, for example, a database including the memory 1002 and/or the storage 1003; a server; or any other suitable medium.

The communication device 1004 is hardware (a transceiver device) for executing communication between computers via a wired and/or wireless network; and, for example, it can be referred to as a network device, a network controller, a network

card, a communication module, and so forth. For example, the UL signal transmission unit 101 and the DL signal reception unit 102 of the user apparatus UE may be implemented by the communication device 1004; and the DL signal transmission unit 201 and the UL signal reception unit 202 of the base station eNB may be implemented by the communication device 1004.

The input device 1005 is an input device that receives an input from outside (e.g., a keyboard, a mouse, a microphone, a switch, a button, a sensor, etc.). The output device 1006 is an output device for implementing output toward outside (e.g., a display, a speaker, a LED lamp, etc.). Note that the input device 1005 and the output device 1006 may have an integrated configuration (e.g., a touch panel).

Further, the devices, such as the processor 1001 and the memory 1002, are connected by a bus 1007 for communicating information. The bus 1007 may be formed of a single bus; or may be formed of buses which are different among devices.

Further, each of the base station eNB and the user apparatus UE may be arranged to include hardware, such as a microprocessor, a digital signal processor (DSP: Digital Signal Processor), an ASIC (Application Specific Integrated Circuit), a PLD (Programmable Logic Device), and a FPGA (Field Programmable Gate Array); and a part of or all of the functional blocks may be implemented by the hardware. For example, the processor 1001 may be implemented by at least one of these hardware components.

(Summary of embodiment)

According to the present embodiment, there is provided a user apparatus configured to perform communication with a base station in a mobile communication system that supports downlink spatial multiplexing, including:

transmission means configured to transmit category information of the user apparatus to the base station;

reception means configured to receive a parameter indicating a transmission mode from the base station;

soft buffer size determination means configured, if the category information is a value equal to or greater than a predetermined value and if the parameter is a predetermined parameter corresponding to the downlink spatial multiplexing, to determine a soft buffer size corresponding to the category information as a soft buffer size used for downlink data reception processing in the user apparatus.

According to the above configuration, the user apparatus can properly determine a soft buffer size.

According to the present embodiment, there is provided a user

apparatus configured to perform communication with a base station in a mobile communication system that supports downlink spatial multiplexing, including:

transmission means configured to transmit category information of the user apparatus to the base station;

5 reception means configured to receive configuration information from the base station;

soft buffer size determination means configured, if the category information is a value equal to or greater than a predetermined value and if a parameter indicating a transmission mode corresponding to the downlink spatial
10 multiplexing and predetermined additional information are received as the configuration information, to determine a soft buffer size corresponding to the category information as a soft buffer size used for downlink data reception processing in the user apparatus.

According to the present embodiment, there is provided a user apparatus configured to perform communication with a base station in a mobile
15 communication system that supports downlink spatial multiplexing, including:

transmission means configured to transmit category information of the user apparatus to the base station;

reception means configured to receive configuration information from the base station;

20 soft buffer size determination means configured, if the category information is a value equal to or greater than a predetermined value and if a parameter indicating a transmission mode corresponding to the downlink spatial multiplexing and predetermined additional information are received as the configuration information, to determine a soft buffer size used for downlink data reception processing
25 in the user apparatus by using the total number of soft channel bits corresponding to the category information.

According to the above configuration, the user apparatus can properly determine a soft buffer size.

The predetermined additional information is, for example, information
30 indicating that the user apparatus can perform spatial multiplexing operation up to a predetermined number of layers. According to this configuration, a soft buffer size can be properly determined by adding information to a parameter of an existing transmission mode.

The predetermined additional information may be, for example, the
35 maximum number of layers used for determining a bit width (a bit width of a rank indicator) for transmitting uplink control information. According to this configuration, a

soft buffer size can be properly determined by adding information to a parameter of an existing transmission mode. Also, the maximum number of layers can be used for determining an uplink control information bit width.

The predetermined additional information may be a bit width for transmitting uplink control information. According to this configuration, a soft buffer size can be properly determined by adding information to a parameter of an existing transmission mode. Also, predetermined additional information can be used for determining an uplink control information bit width.

The soft buffer size determination means determines the soft buffer size by using the total number of soft channel bits corresponding to the category information, for example. According to this configuration, a soft buffer size can be properly determined.

According to the present embodiment, there is provided a user apparatus configured to perform communication with a base station in a mobile communication system that supports downlink spatial multiplexing, including:

transmission means configured to transmit capability information of the user apparatus to the base station;

reception means configured to receive a parameter indicating a transmission mode from the base station;

bit width determination means configured, if the parameter is a predetermined parameter corresponding to the downlink spatial multiplexing and if the capability information includes the number of MIMO layers for the transmission mode, to determine a bit width for transmitting uplink control information based on the number of MIMO layers.

According to the above configuration, the user apparatus can properly determine a bit width of uplink control information.

According to the present embodiment, there is provided a user apparatus configured to perform communication with a base station in a mobile communication system that supports downlink spatial multiplexing, including:

transmission means configured to transmit capability information of the user apparatus to the base station;

reception means configured to receive configuration information from the base station;

bit width determination means configured, if a parameter indicating a transmission mode corresponding to the downlink spatial multiplexing and predetermined additional information are received as the configuration information and

if the capability information includes the number of MIMO layers for the transmission mode, to determine a bit width for transmitting uplink control information based on the number of MIMO layers.

5 According to the above configuration, the user apparatus can properly determine a bit width of uplink control information.

10 The predetermined additional information is, for example, information indicating that the user apparatus can perform spatial multiplexing operation up to a predetermined number of layers. According to this configuration, a bit width of uplink control information can be properly determined by adding information to a parameter of an existing transmission mode.

According to the present embodiment, there is provided a user apparatus configured to perform communication with a base station in a mobile communication system that supports downlink spatial multiplexing, including:

15 transmission means configured to transmit capability information of the user apparatus to the base station;

reception means configured to receive configuration information from the base station;

20 bit width determination means configured, if a parameter indicating a transmission mode corresponding to the downlink spatial multiplexing and predetermined additional information are received as the configuration information and if the capability information includes the number of MIMO layers for the transmission mode, to determine a bit width for transmitting uplink control information based on the predetermined additional information.

25 According to the above configuration, the user apparatus can properly determine a bit width of uplink control information.

30 The predetermined additional information is, for example, the maximum number of layers transmitted from the base station as information for determining a bit width for transmitting the uplink control information. According to this configuration, the user apparatus can properly determine a bit width of uplink control information based on information instructed from the base station.

The predetermined additional information may be a bit width for transmitting the uplink control information. According to this configuration, the user apparatus can properly determine a bit width of uplink control information by directly using information instructed from the base station.

35 "Means" in the above-mentioned configuration of each apparatus may be replaced with "unit", "circuit", "device" or the like.

The user apparatus UE described in the present embodiment may include a CPU and a memory, and may be realized by executing a program by the CPU (processor), or may be realized by hardware such as hardware circuits including logics of processing described in the embodiment, or may be configured by coexistence of a program and hardware.

The base station eNB described in the present embodiment may include a CPU and a memory, and may be realized by executing a program by the CPU (processor), or may be realized by hardware such as hardware circuits including logics of processing described in the embodiment, or may be configured by coexistence of a program and hardware.

In the above, the embodiment of the present invention has been explained. However, the disclosed invention is not limited to the embodiment. Those skilled in the art will conceive of various modified examples, corrected examples, alternative examples, substituted examples, and the like. While specific numerical value examples are used to facilitate understanding of the present invention, such numerical values are merely examples, and any appropriate value may be used unless specified otherwise. Classification into each item in the description is not essential in the present invention, and features described in two or more items may be combined and used as necessary. Subject matter described in an item may be applied to subject matter described in another item (provided that they do not contradict).

It is not always true that the boundaries of the functional units or the processing units in the functional block diagram correspond to boundaries of physical components. The operations by the plural functional units may be physically performed by a single component. Alternatively, the operations by the single functional unit may be physically performed by plural components.

For convenience of explanation, the user apparatus and the base station have been explained by using functional block diagrams. However, such an apparatus may be implemented in hardware, software, or a combination thereof.

The software that operates by a processor of the user apparatus according to an embodiment of the present invention and the software that operates by a processor of the base station may be stored in any proper storage medium such as a Random Access Memory (RAM), a flash memory, a Read Only Memory (ROM), an EPROM, an EEPROM, a register, a hard disk (HDD), a removable disk, a CD-ROM, a database, a server and the like.

The present invention is not limited to the above-mentioned embodiment and is intended to include various variations, modifications, alterations, substitutions

-32-

and so on without departing from the spirit of the present invention.

The present patent application claims priority based on Japanese patent application No. 2015-129325, filed in the JPO on June 26, 2015, and the entire contents of the Japanese patent application No. 2015-129325 are incorporated herein

5 by reference.

DESCRIPTION OF REFERENCE SIGNS

UE user apparatus

eNB base station

10 101 DL signal reception unit

102 UL signal transmission unit

103 RRC management unit

104 soft buffer size determination unit

105 RI bit width determination unit

15 201 DL signal transmission unit

202 UL signal reception unit

203 RRC management unit

204 scheduling unit

1001 processor

20 1002 memory

1003 storage

1004 communication device

1005 input device

1006 output device

25

30

35

CLAIMS

1. A user apparatus configured to perform communication with a base station in a mobile communication system that supports downlink spatial multiplexing, comprising:

transmission means configured to transmit category information of the user apparatus to the base station;

reception means configured to receive configuration information from the base station;

soft buffer size determination means configured, if the category information is a value equal to or greater than a predetermined value and if a parameter indicating a transmission mode corresponding to the downlink spatial multiplexing and predetermined additional information are received as the configuration information, to determine a soft buffer size used for downlink data reception processing in the user apparatus by using a total number of soft channel bits corresponding to the category information.

2. The user apparatus as claimed in claim 1, wherein the predetermined additional information is information indicating that the user apparatus can perform spatial multiplexing operation up to a predetermined number of layers.

3. The user apparatus as claimed in claim 1, wherein the predetermined additional information is a maximum number of layers used for determining a bit width of a rank indicator.

4. A soft buffer size determination method executed by a user apparatus configured to perform communication with a base station in a mobile communication system that supports downlink spatial multiplexing, comprising:

a transmission step of transmitting category information of the user apparatus to the base station;

a reception step of receiving configuration information from the base station;

a soft buffer size determination step of, if the category information is a value equal to or greater than a predetermined value and if a parameter indicating a transmission mode corresponding to the downlink spatial multiplexing and predetermined additional information are received as the configuration information,

– 34 –

determining a soft buffer size used for downlink data reception processing in the user apparatus by using a total number of soft channel bits corresponding to the category information.

ABSTRACT

A user apparatus configured to perform communication with a base station in a mobile communication system that supports downlink spatial multiplexing, including: transmission means configured to transmit category information of the user apparatus to the base station; reception means configured to receive configuration information from the base station; soft buffer size determination means configured, if the category information is a value equal to or greater than a predetermined value and if a parameter indicating a transmission mode corresponding to the downlink spatial multiplexing and predetermined additional information are received as the configuration information, to determine a soft buffer size used for downlink data reception processing in the user apparatus by using the total number of soft channel bits corresponding to the category information.

FIG.5

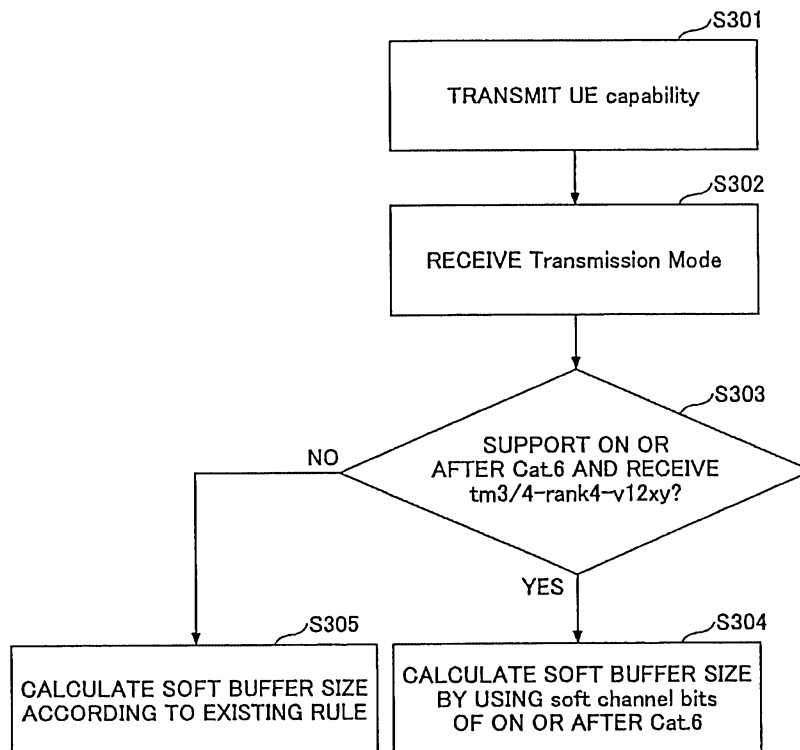


FIG.1

<i>UE-EUTRA-Capability</i> information element		
UE-EUTRA-Capability ::=SEQUENCE {		
accessStratumRelease		AccessStratumRelease,
<u>ue-Category</u> INTEGER (1..5),		
....		
},		
nonCriticalExtension	UE-EUTRA-Capability-v920-IEs	OPTIONAL
.....		
nonCriticalExtension	UE-EUTRA-Capability-v1020-IEs	OPTIONAL
}		
UE-EUTRA-Capability-v1020-IEs ::=		
<u>ue-Category-v1020</u>	SEQUENCE {	
nonCriticalExtension	<u>INTEGER (6..8)</u>	OPTIONAL,
	UE-EUTRA-Capability-v1060-IEs	OPTIONAL
}		
UE-EUTRA-Capability-v1060-IEs ::=		
....	SEQUENCE {	
nonCriticalExtension	SEQUENCE {}	OPTIONAL
}		

FIG.2

UE Category	Maximum number of DL-SCH transport block bits received within a TTI (Note)	Maximum number of bits of a DL-SCH transport block received within a TTI	Total number of soft channel bits	Maximum number of supported layers for spatial multiplexing in DL
Category 1	10296	10296	250368	1
Category 2	51024	51024	1237248	2
Category 3	102048	75376	1237248	2
Category 4	150752	75376	1827072	2
Category 5	299552	149776	3667200	4
Category 6	301504	149776 (4 layers) 75376 (2 layers)	3654144	2 or 4
Category 7	301504	149776 (4 layers) 75376 (2 layers)	3654144	2 or 4
Category 8	2998560	299856	35982720	8

NOTE: In carrier aggregation operation, the DL-SCH processing capability can be shared by the UE with that of MCH received from a serving cell. If the total eNB scheduling for DL-SCH and an MCH in one serving cell at a given TTI is larger than the defined processing capability, the prioritization between DL-SCH and MCH is left up to UE implementation.

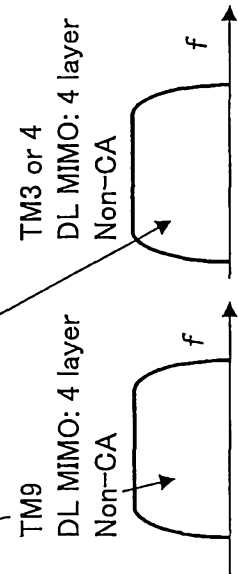


FIG.3

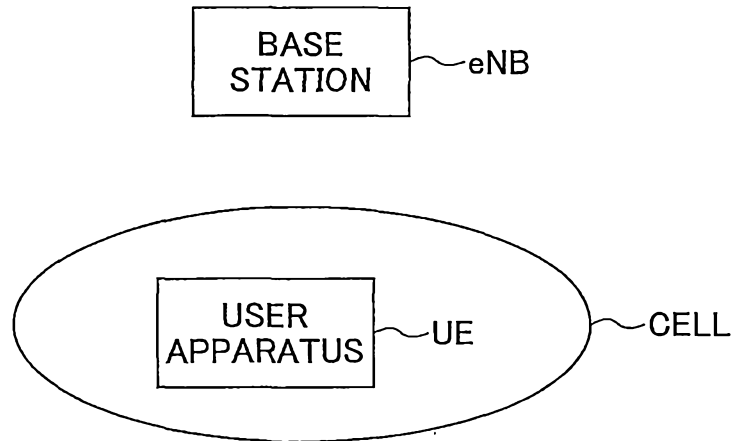


FIG.4

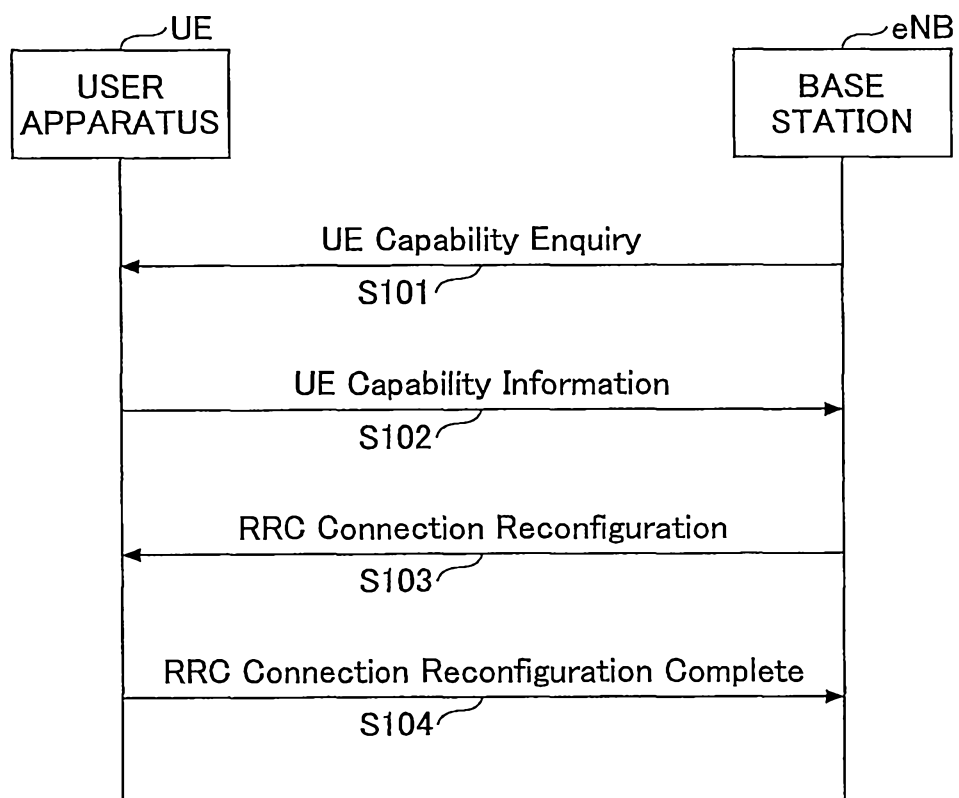


FIG.5

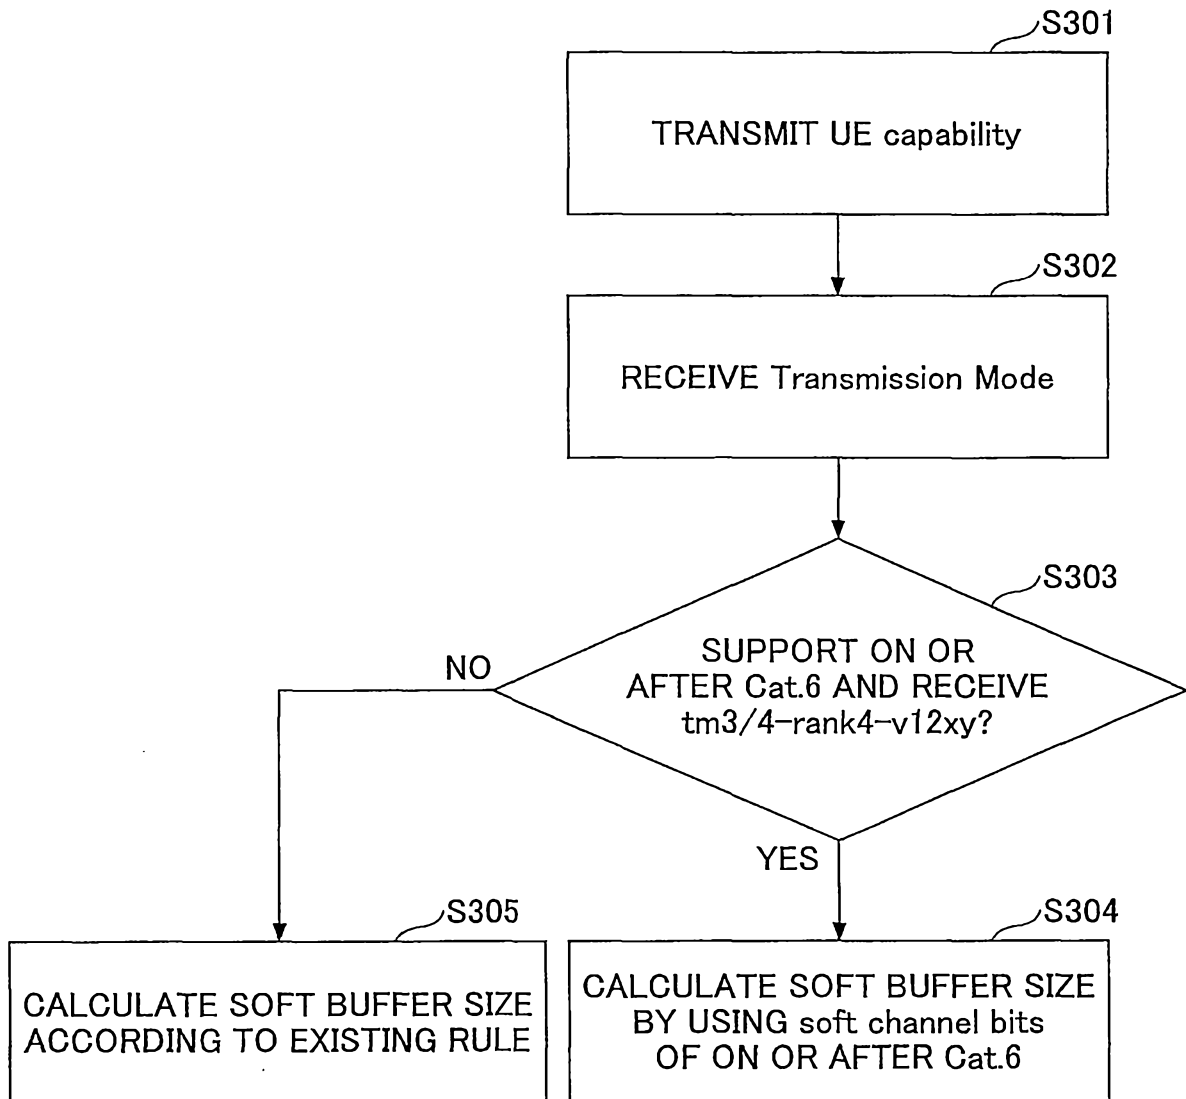


FIG.6

5.1.4.1.2 Bit collection, selection and transmission

where N_{IR} is equal to:

$$N_{IR} = \left\lfloor \frac{N_{soft}}{K_C \cdot K_{MIMO} \cdot \min(M_{DL_HARQ}, M_{limit})} \right\rfloor$$

where:

If the UE signals *ue-Category-v12xx* indicating UE category 0, or if the UE signals *ue-Category-v12xx* not indicating UE category 0 and is configured by higher layers with *altCQI-Table-r12* for the DL cell, N_{soft} is the total number of soft channel bits according to the UE category indicated by *ue-Category-v12xx*. Otherwise, if the UE signals *ue-Category-v11xx*, and is configured by higher layers with *altCQI-Table-r12* for the DL cell, N_{soft} is the total number of soft channel bits according to the UE category indicated by *ue-Category-v11xx*. Otherwise, if the UE signals *ue-Category-v1020*, and is configured with transmission mode 9, transmission mode 10, transmission mode 3 up to rank 4 or transmission mode 4 up to rank 4 for the DL cell, N_{soft} is the total number of soft channel bits [4] according to the UE category indicated by *ue-Category-v1020* [6]. Otherwise, N_{soft} is the total number of soft channel bits [4] according to the UE category indicated by *ue-Category* (without suffix) [6].

FIG.7A

<i>AntennaInfo information elements</i>	
<pre> -- ASN1START AntennaInfoCommon ::= SEQUENCE { antennaPortsCount ENUMERATED {an1, an2, an4, spare1} } </pre>	
<pre> AntennaInfoDedicated-r10 ::= SEQUENCE { transmissionMode-r10 ENUMERATED { tm1, tm2, tm3, tm4, tm5, tm6, tm7, tm8-v920, tm9-v1020, tm10-v1130, <u>tm3-rank4-v12xy</u>, <u>tm4-rank4-v12xy</u>, spare4, spare3, spare2, spare1}, codebookSubsetRestriction-r10 BIT STRING OPTIONAL, -- Cond TMX ue-TransmitAntennaSelection CHOICE{ release NULL, setup ENUMERATED {closedLoop, openLoop} } } </pre>	
<pre> AntennaInfoDedicated-v1250 ::= SEQUENCE { alternativeCodebookEnabledFor4TX-r12 BOOLEAN } -- ASN1STOP </pre>	

FIG.7B

<i>AntennaInfo field descriptions</i>
<i>transmissionMode</i> Points to one of Transmission modes defined in TS 36.213 [23, 7.1] where tm1 refers to transmission mode 1, tm2 to transmission mode 2 etc. Value <u>tm3-rank4</u> denotes up to rank 4 operation for transmission mode 3. Value <u>tm4-rank4</u> denotes up to rank 4 operation for transmission mode 4

FIG.8

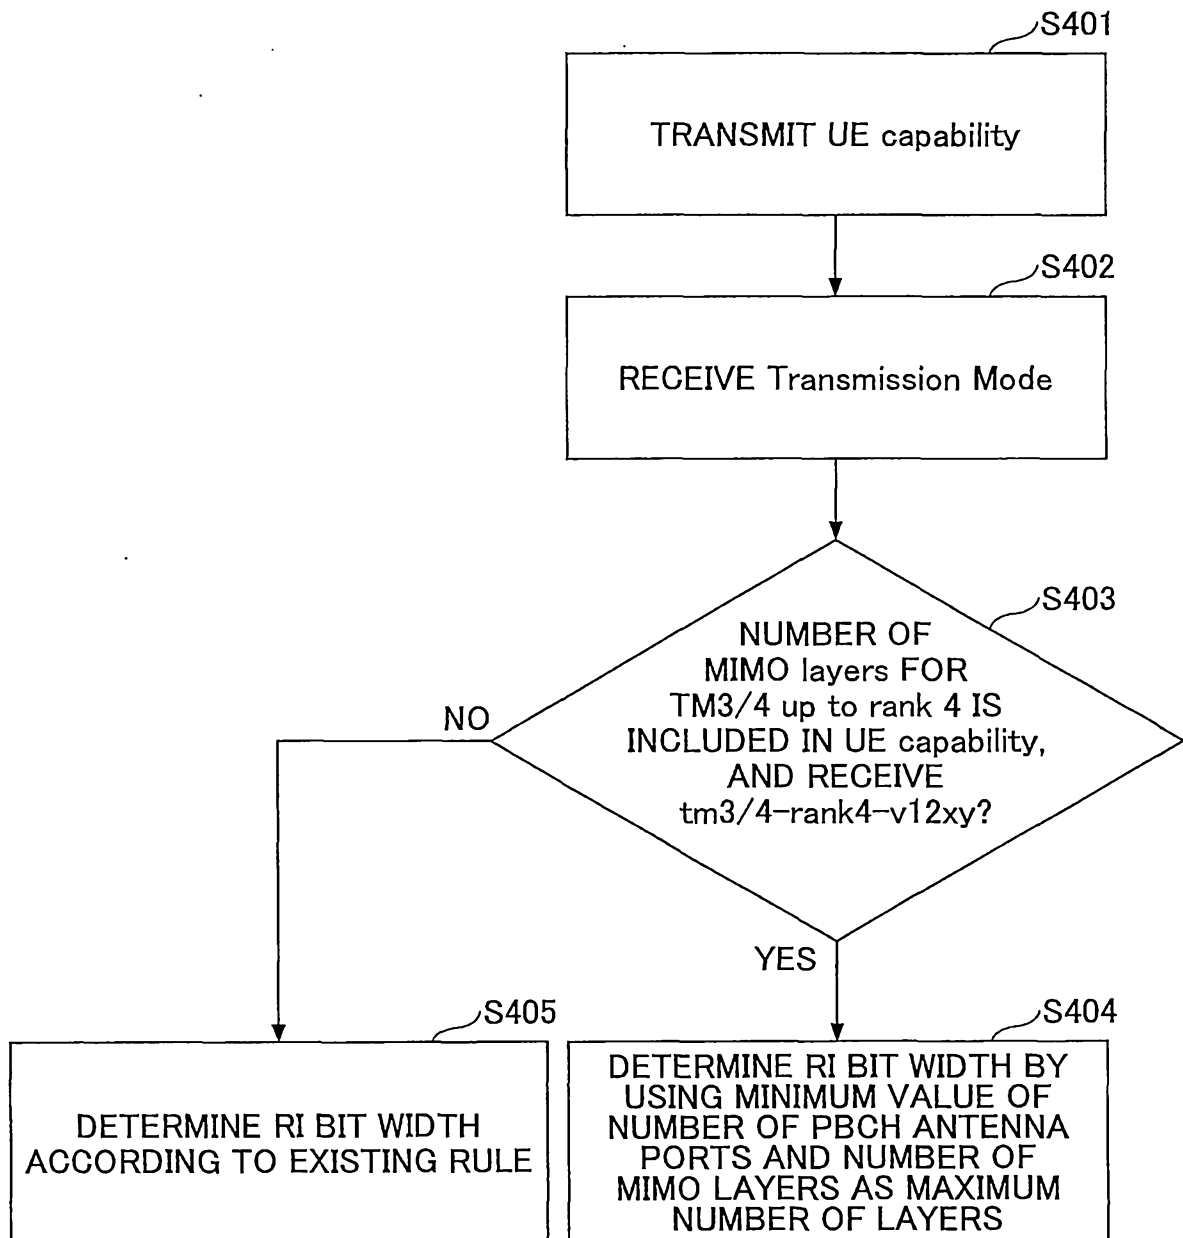


FIG.9

Field	Bit width						
	2 antenna ports	4 antenna ports		8 antenna ports			Max 8 layers
		Max 2 layers	Max 4 layers	Max 2 layers	Max 4 layers	Max 8 layers	
Rank indication	1	1	2	1	2	3	

FIG.10

For rank indication (RI) (RI only, joint report of RI and i1, and joint report of RI and PTI)

- The corresponding bit widths for RI feedback for PDSCH transmissions are given by Tables 5.2.2.6.1-2, 5.2.2.6.2-3, 5.2.2.6.3-3, 5.2.3.3.1-3, 5.2.3.3.1-3A, 5.2.3.3.2-4, and 5.2.3.3.2-4A, which are determined assuming the maximum number of layers as follows:
 - If the UE is configured with transmission mode 9, and the *supportedMIMO-CapabilityDL-r10* field is included in the *UE-EUTRA-Capability*, the maximum number of layers is determined according to the minimum of the configured number of CSI-RS ports and the maximum of the reported UE downlink MIMO capabilities for the same band in the corresponding band combination.
 - If the UE is configured with transmission mode 9, and the *supportedMIMO-CapabilityDL-r10* field is not included in the *UE-EUTRA-Capability*, the maximum number of layers is determined according to the minimum of the configured number of CSI-RS ports and *ue-Category* (without suffix).
 - If the UE is configured with transmission mode 10, and the *supportedMIMO-CapabilityDL-r10* field is included in the *UE-EUTRA-Capability*, the maximum number of layers for each CSI process is determined according to the minimum of the configured number of CSI-RS ports for that CSI process and the maximum of the reported UE downlink MIMO capabilities for the same band in the corresponding band combination.
 - If the UE is configured with transmission mode 10, and the *supportedMIMO-CapabilityDL-r10* field is not included in the *UE-EUTRA-Capability*, the maximum number of layers for each CSI process is determined according to the minimum of the configured number of CSI-RS ports for that CSI process and *ue-Category* (without suffix).
 - If the UE is configured with transmission mode 3 or 4 up to Rank4 operation, and the *supportedMIMO-TM3(or 4)-CapabilityDL-r12* field is included in the *UE-EUTRA-Capability*, the maximum number is determined according to the minimum of the number of PBCH antenna ports and the reported UE downlink MIMO capabilities in the *supportedMIMO-TM3(or 4)-CapabilityDL-r12* field for the same band in the corresponding band combination.
 - Otherwise the maximum number of layers is determined according to the minimum of the number of PBCH antenna ports and *ue-Category* (without suffix).

FIG.11A

<i>UE-EUTRA-Capability information element</i>	
<pre> -- ASN1START << skip unchanged part >> UE-EUTRA-Capability-v1250-IEs ::= SEQUENCE { << skip unchanged part >> nonCriticalExtension <u>UE-EUTRA-Capability-v12xy-IEs</u> OPTIONAL } UE-EUTRA-Capability-v12xy-IEs ::= SEQUENCE { rf-Parameters-v12xy RF-Parameters-v12xy OPTIONAL, nonCriticalExtension SEQUENCE {} OPTIONAL } << skip unchanged part >> RF-Parameters-v12xy ::= SEQUENCE { supportedBandCombination-v12xy SupportedBandCombination-v12xy OPTIONAL, supportedBandCombinationAdd-v12xy SupportedBandCombinationAdd-v12xy OPTIONAL } << skip unchanged part >> SupportedBandCombination-v12xy ::= SEQUENCE (SIZE (1..maxBandComb-r10)) OF <u>BandCombinationParameters-v12xy</u> << skip unchanged part >> SupportedBandCombinationAdd-v12xy ::= SEQUENCE (SIZE (1..maxBandComb-r11)) OF <u>BandCombinationParameters-v12xy</u> << skip unchanged part >> BandCombinationParameters-r11 ::= SEQUENCE { bandParameterList-v12xy SEQUENCE (SIZE (1..maxSimultaneousBands-r10)) OF BandParameters-v12xy OPTIONAL } << skip unchanged part >> BandParameters-v12xy ::= SEQUENCE { bandParametersDL-v12xy SEQUENCE (SIZE (1..maxBandwidthClass-r10)) OF <u>CA-MIMO-ParametersDL-v12xy</u> } << skip unchanged part >> CA-MIMO-ParametersDL-v12xy ::= SEQUENCE { supportedMIMO-TM3-CapabilityDL-r12 ENUMERATED {twoLayers, fourLayers}, OPTIONAL supportedMIMO-TM4-CapabilityDL-r12 ENUMERATED {twoLayers, fourLayers} OPTIONAL } << skip unchanged part >> -- ASN1STOP </pre>	

FIG.11B

<i>UE-EUTRA-Capability field descriptions</i>	<i>FDD/ TDD diff</i>
<u>supportedMIMO-TM3-CapabilityDL</u> Indicates the maximum number of spatial multiplexing layers for transmission mode 3 in DL.	
<u>supportedMIMO-TM4-CapabilityDL</u> Indicates the maximum number of spatial multiplexing layers for transmission mode 4 in DL.	

FIG.12

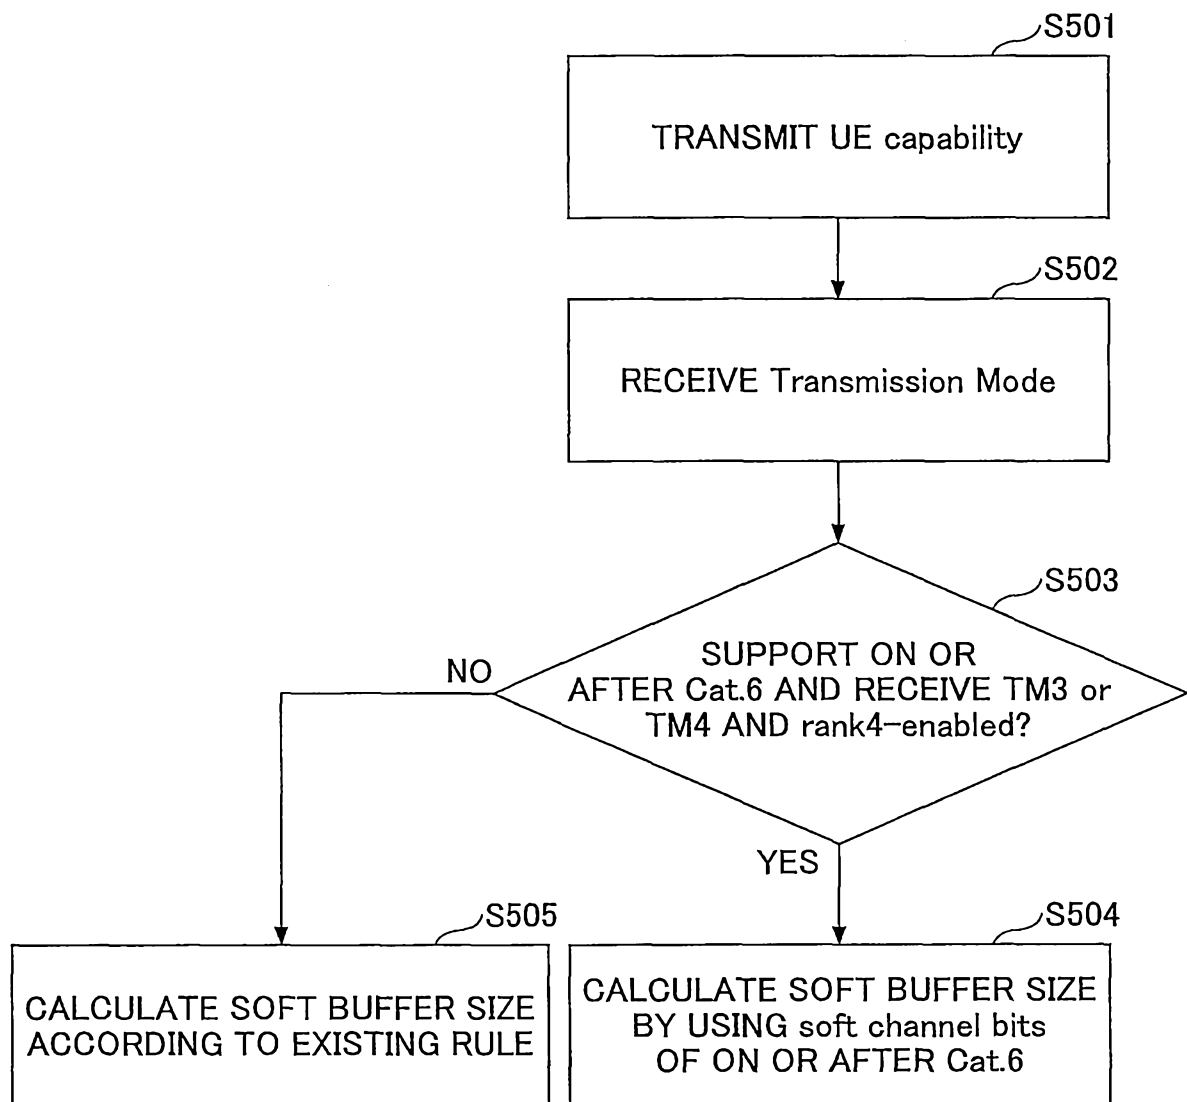


FIG.13

5.1.4.1.2 Bit collection, selection and transmission

where N_{IR} is equal to:

$$N_{IR} = \left\lfloor \frac{N_{soft}}{K_C \cdot K_{MIMO} \cdot \min(M_{DL_HARQ}, M_{limit})} \right\rfloor$$

where:

If the UE signals *ue-Category-v12xx* indicating UE category 0, or if the UE signals *ue-Category-v12xx* not indicating UE category 0 and is configured by higher layers with *altCQI-Table-r12* for the DL cell, N_{soft} is the total number of soft channel bits according to the UE category indicated by *ue-Category-v12xx*. Otherwise, if the UE signals *ue-Category-v11xx*, and is configured by higher layers with *altCQI-Table-r12* for the DL cell, N_{soft} is the total number of soft channel bits according to the UE category indicated by *ue-Category-v11xx*. Otherwise, if the UE signals *ue-Category-v1020*, and is configured with transmission mode 9 or transmission mode 10 for the DL cell, N_{soft} is the total number of soft channel bits [4] according to the UE category indicated by *ue-Category-v1020* [6]. Otherwise, if the UE signals *ue-Category-v1020*, and is configured with transmission mode 3 or transmission mode 4, and is configured by higher layers with *rank4-enabled-r12* for the DL cell, N_{soft} is the total number of soft channel bits [4] according to the UE category indicated by *ue-Category-v1020* [6]. Otherwise, N_{soft} is the total number of soft channel bits [4] according to the UE category indicated by *ue-Category* (without suffix) [6].

FIG.14A

AntennaInfo information elements

```
-- ASN1START
```

```
AntennaInfoDedicated-v1250 ::= SEQUENCE {
    alternativeCodebookEnabledFor4TX-r12    BOOLEAN
}
```

```
AntennaInfoDedicated-v12xy ::= SEQUENCE {
    rank4-enabled-r12                BOOLEAN                OPTIONAL    -- Cond TM34
}
```

```
-- ASN1STOP
```

FIG.14B

<i>AntennaInfo</i> field descriptions	
<u>Rank4-enabled</u>	Indicates that up to rank4 operation is enabled for transmission mode 3 or 4.

FIG.14C

Conditional presence	Explanation
<u>TM34</u>	The field is optional present, need ON, if the transmissionMode (without suffix) or transmissionMode-r10 is set to tm3 or tm4. Otherwise, the field is not present and the UE shall delete any existing value for this field.

FIG.15A

<i>PhysicalConfigDedicated information element</i>			
-- ASN1START			
<pre> [[antennaInfo-v1250 AntennaInfoDedicated-v1250 OPTIONAL, -- Cond AI-r10 eimta-MainConfig-r12 EIMTA-MainConfig-r12 OPTIONAL, -- Need ON eimta-MainConfigPCell-r12 EIMTA-MainConfigServCell-r12 OPTIONAL, -- Need ON pucch-ConfigDedicated-v1250 PUCCH-ConfigDedicated-v1250 OPTIONAL, -- Need ON cqi-ReportConfigPCell-v1250 CQI-ReportConfig-v1250 OPTIONAL, -- Need ON uplinkPowerControlDedicated-v1250 UplinkPowerControlDedicated-v1250 OPTIONAL, -- Need ON pusch-ConfigDedicated-v1250 PUSCH-ConfigDedicated-v1250 OPTIONAL, -- Need ON csi-RS-Config-v1250 CSI-RS-Config-v1250 OPTIONAL -- Need ON]], [[antennaInfo-v12xy AntennaInfoDedicated-v12xy OPTIONAL -- Cond AI-rX]],] </pre>			
<pre> [[antennaInfo-v1250 AntennaInfoDedicated-v1250 OPTIONAL, -- Need ON eimta-MainConfigSCell-r12 EIMTA-MainConfigServCell-r12 OPTIONAL, -- Need ON cqi-ReportConfigSCell-v1250 CQI-ReportConfig-v1250 OPTIONAL, -- Need ON uplinkPowerControlDedicatedSCell-v1250 UplinkPowerControlDedicated-v1250 OPTIONAL, -- Need ON csi-RS-Config-v1250 CSI-RS-Config-v1250 OPTIONAL -- Need ON]], [[antennaInfo-v12xy AntennaInfoDedicated-v12xy OPTIONAL -- Cond AI-rX]], } </pre>			
<pre> CSI-RS-ConfigNZPToAddModList-r11 ::= SEQUENCE (SIZE (1..maxCSI-RS-NZP-r11)) OF CSI-RS-ConfigNZP-r11 CSI-RS-ConfigNZPToReleaseList-r11 ::= SEQUENCE (SIZE (1..maxCSI-RS-NZP-r11)) OF CSI-RS-ConfigNZPId-r11 CSI-RS-ConfigZPToAddModList-r11 ::= SEQUENCE (SIZE (1..maxCSI-RS-ZP-r11)) OF CSI-RS-ConfigZP-r11 CSI-RS-ConfigZPToReleaseList-r11 ::= SEQUENCE (SIZE (1..maxCSI-RS-ZP-r11)) OF CSI-RS-ConfigZPId-r11 -- ASN1STOP </pre>			

FIG.15B

Conditional presence	Explanation
<u>AI-rX</u>	The field is optionally present, need ON, if <i>antennaInfoDedicated</i> (without suffix) or <i>antennaInfoForDedicated-r10</i> is present. Otherwise the field is not present.

FIG.16

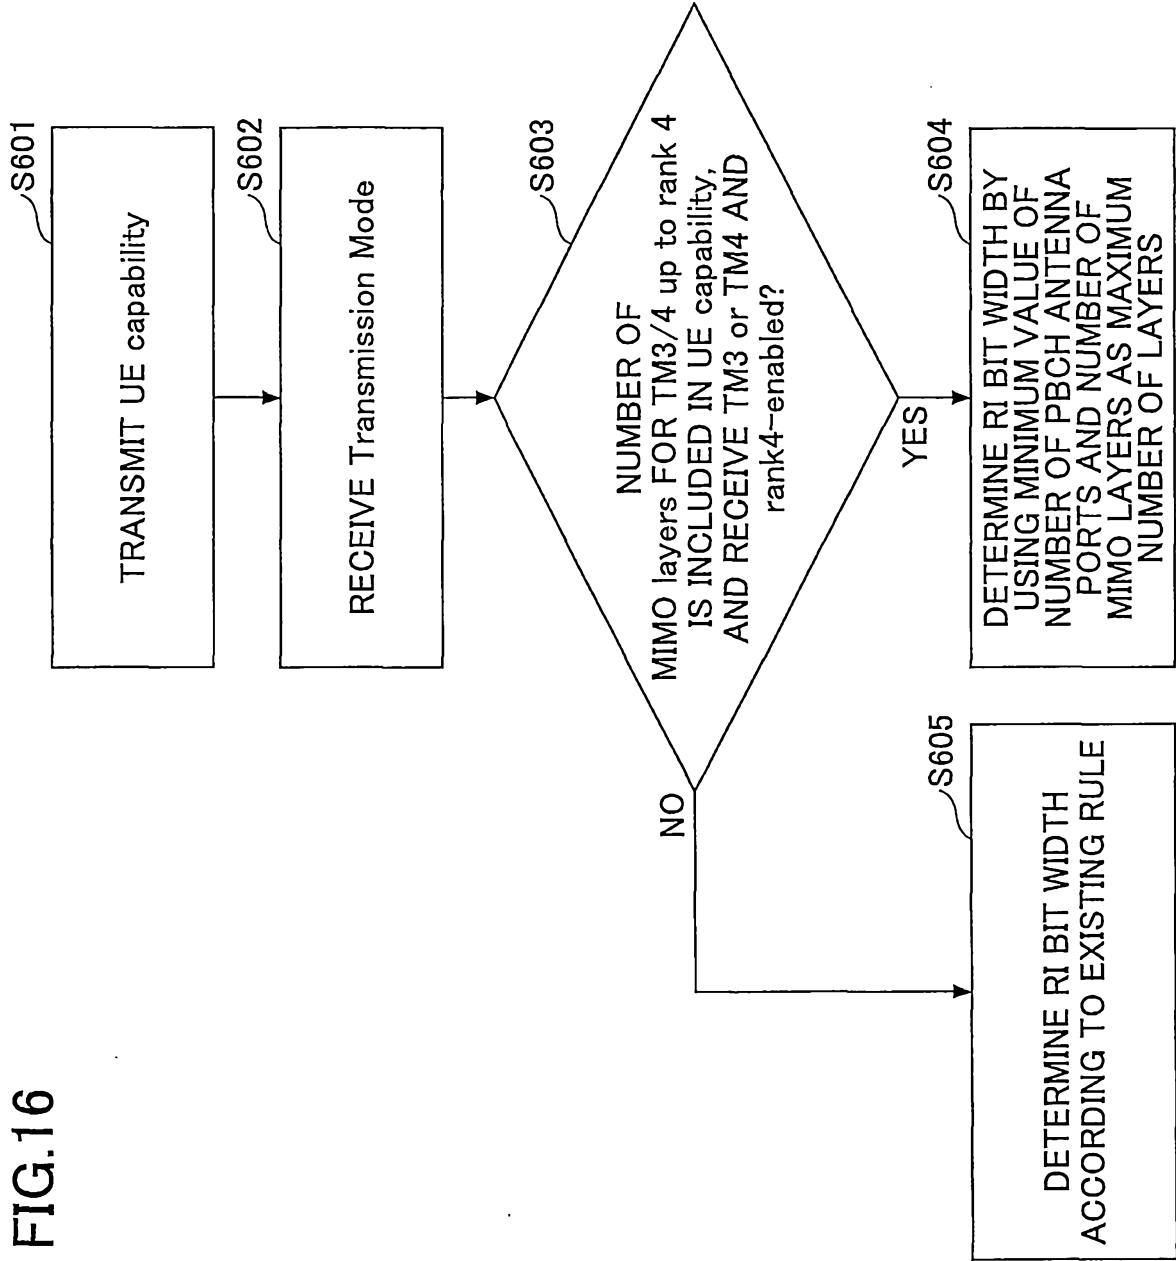


FIG.17

For rank indication (RI) (RI only, joint report of RI and i1, and joint report of RI and PTI)

- The corresponding bit widths for RI feedback for PDSCH transmissions are given by Tables 5.2.2.6.1-2, 5.2.2.6.2-3, 5.2.2.6.3-3, 5.2.3.3.1-3, 5.2.3.3.1-3A, 5.2.3.3.2-4, and 5.2.3.3.2-4A, which are determined assuming the maximum number of layers as follows:
 - If the UE is configured with transmission mode 9, and the *supportedMIMO-CapabilityDL-r10* field is included in the *UE-EUTRA-Capability*, the maximum number of layers is determined according to the minimum of the configured number of CSI-RS ports and the maximum of the reported UE downlink MIMO capabilities for the same band in the corresponding band combination.
 - If the UE is configured with transmission mode 9, and the *supportedMIMO-CapabilityDL-r10* field is not included in the *UE-EUTRA-Capability*, the maximum number of layers is determined according to the minimum of the configured number of CSI-RS ports and *ue-Category* (without suffix).
 - If the UE is configured with transmission mode 10, and the *supportedMIMO-CapabilityDL-r10* field is included in the *UE-EUTRA-Capability*, the maximum number of layers for each CSI process is determined according to the minimum of the configured number of CSI-RS ports for that CSI process and the maximum of the reported UE downlink MIMO capabilities for the same band in the corresponding band combination.
 - If the UE is configured with transmission mode 10, and the *supportedMIMO-CapabilityDL-r10* field is not included in the *UE-EUTRA-Capability*, the maximum number of layers for each CSI process is determined according to the minimum of the configured number of CSI-RS ports for that CSI process and *ue-Category* (without suffix).
 - If the UE is configured with transmission mode 3 or 4, and is configured by higher layers with *rank4-enabled-r12* for the DL cell, and the *supportedMIMO-TM3(or 4)-CapabilityDL-r12* field is included in the *UE-EUTRA-Capability*, the maximum number is determined according to the minimum of the number of PBCH antenna ports and the reported UE downlink MIMO capabilities in the *supportedMIMO-TM3(or 4)-CapabilityDL-r12* field for the same band in the corresponding band combination.
 - Otherwise the maximum number of layers is determined according to the minimum of the number of PBCH antenna ports and *ue-Category* (without suffix).

FIG.18

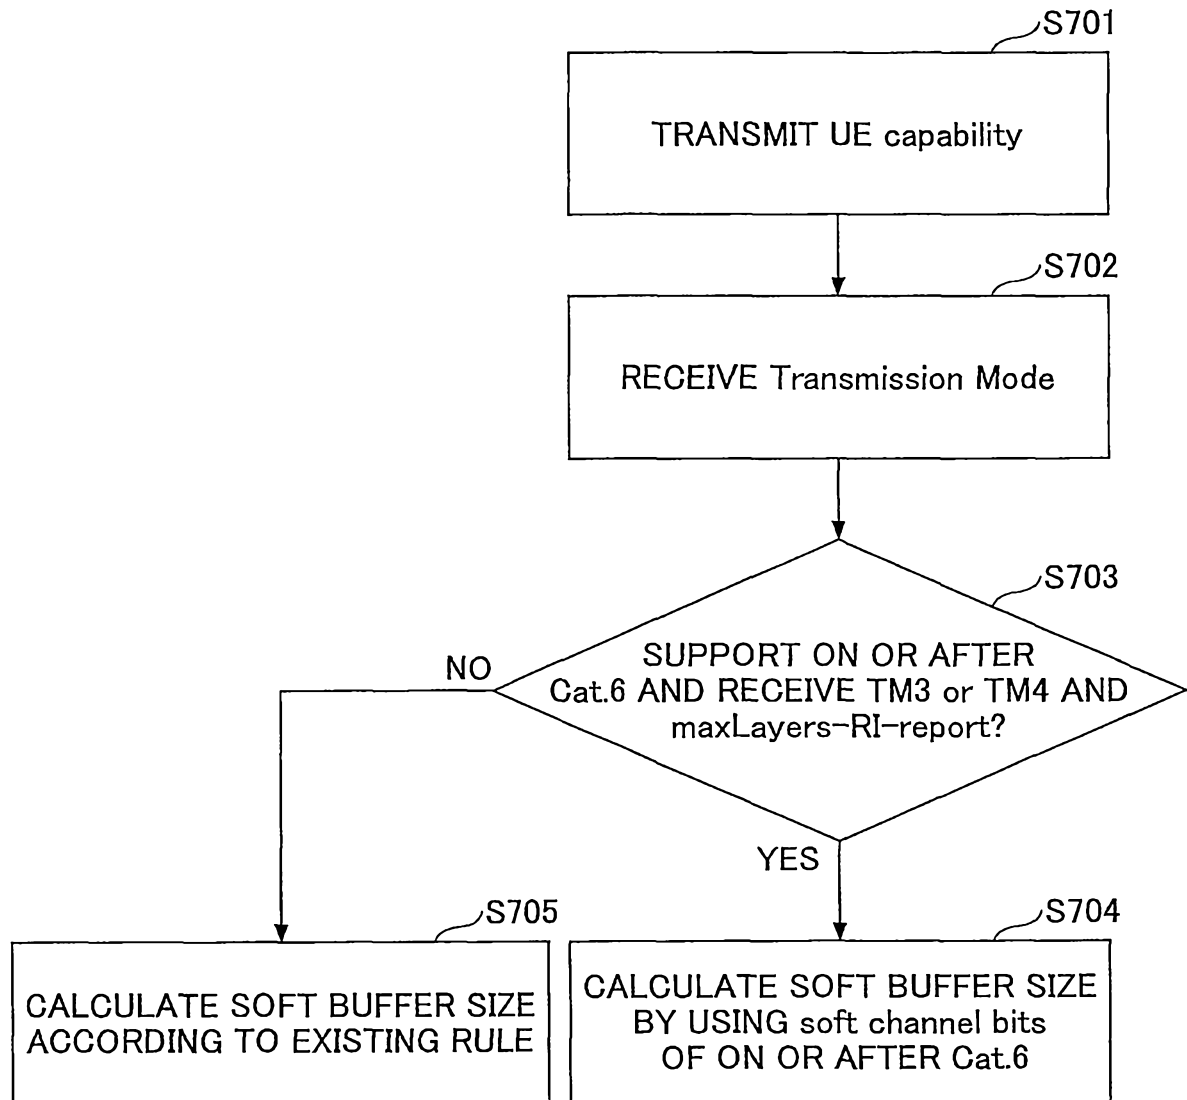


FIG.19

5.1.4.1.2 Bit collection, selection and transmission

where N_{IR} is equal to:

$$N_{IR} = \left\lfloor \frac{N_{soft}}{K_C \cdot K_{MIMO} \cdot \min(M_{DL_HARQ}, M_{limit})} \right\rfloor$$

where:

If the UE signals *ue-Category-v12xx* indicating UE category 0, or if the UE signals *ue-Category-v12xx* not indicating UE category 0 and is configured by higher layers with *altCQI-Table-r12* for the DL cell, N_{soft} is the total number of soft channel bits according to the UE category indicated by *ue-Category-v12xx*. Otherwise, if the UE signals *ue-Category-v11xx*, and is configured by higher layers with *altCQI-Table-r12* for the DL cell, N_{soft} is the total number of soft channel bits according to the UE category indicated by *ue-Category-v11xx*. Otherwise, if the UE signals *ue-Category-v1020*, and is configured with transmission mode 9 or transmission mode 10 for the DL cell, N_{soft} is the total number of soft channel bits [4] according to the UE category indicated by *ue-Category-v1020* [6]. Otherwise, if the UE signals *ue-Category-v1020*, and is configured with transmission mode 3 or transmission mode 4, and is configured by higher layers with *maxLayers-RI-report-r12* for the DL cell, N_{soft} is the total number of soft channel bits [4] according to the UE category indicated by *ue-Category-v1020* [6]. Otherwise, N_{soft} is the total number of soft channel bits [4] according to the UE category indicated by *ue-Category* (without suffix) [6].

FIG.20A

CQI-ReportConfig information elements

```
-- ASN1START
<< skip unchanged part >>
CQI-ReportConfig-v12xy ::= SEQUENCE {
    cqi-ReportBoth-v12xy CQI-ReportBoth-v12xy
}
<< skip unchanged part >>
CQI-ReportBoth-v12xy ::= SEQUENCE {
    maxLayers-RI-report-r12 ENUMERATED {twoLayers, fourLayers, eightLayers}
}
<< skip unchanged part >>
-- ASN1STOP
```

FIG.20B

<i>CQI-ReportConfig</i> field descriptions
<u>maxLayers-RI-report</u> Indicates the maximum number of layers used to determine the rank indication bit width according to TS 36.212 [22].

FIG.20C

<i>PhysicalConfigDedicated</i> information element			
-- ASN1START			
PhysicalConfigDedicated ::= SEQUENCE {			
<< skip unchanged part >>			
[[antennaInfo-v1250	AntennaInfoDedicated-v1250	OPTIONAL,	-- Cond AI-r10
eimta-MainConfig-r12	EIMTA-MainConfig-r12	OPTIONAL,	-- Need ON
eimta-MainConfigPCell-r12	EIMTA-MainConfigServCell-r12	OPTIONAL,	-- Need ON
pucch-ConfigDedicated-v1250	PUCCH-ConfigDedicated-v1250	OPTIONAL,	-- Need ON
cqi-ReportConfigPCell-v1250	CQI-ReportConfig-v1250	OPTIONAL,	-- Need ON
uplinkPowerControlDedicated-v1250	UplinkPowerControlDedicated-v1250	OPTIONAL,	
-- Need ON			
pusch-ConfigDedicated-v1250	PUSCH-ConfigDedicated-v1250	OPTIONAL,	-- Need ON
csi-RS-Config-v1250	CSI-RS-Config-v1250	OPTIONAL	-- Need ON
]]			
[[cqi-ReportConfigPCell-v12xy	CQI-ReportConfig-v12xy	OPTIONAL,	-- Need ON
]]			
}			
PhysicalConfigDedicatedSCell-r10 ::= SEQUENCE {			
<< skip unchanged part >>			
[[antennaInfo-v1250	AntennaInfoDedicated-v1250	OPTIONAL,	-- Need ON
eimta-MainConfigSCell-r12	EIMTA-MainConfigServCell-r12	OPTIONAL,	-- Need ON
cqi-ReportConfigSCell-v1250	CQI-ReportConfig-v1250	OPTIONAL,	-- Need ON
uplinkPowerControlDedicatedSCell-v1250	UplinkPowerControlDedicated-v1250	OPTIONAL,	
-- Need ON			
csi-RS-Config-v1250	CSI-RS-Config-v1250	OPTIONAL	-- Need ON
]]			
[[cqi-ReportConfigSCell-v12xy	CQI-ReportConfig-v12xy	OPTIONAL,	-- Need ON
]]			
}			
<< skip unchanged part >>			
-- ASN1STOP			

FIG.21

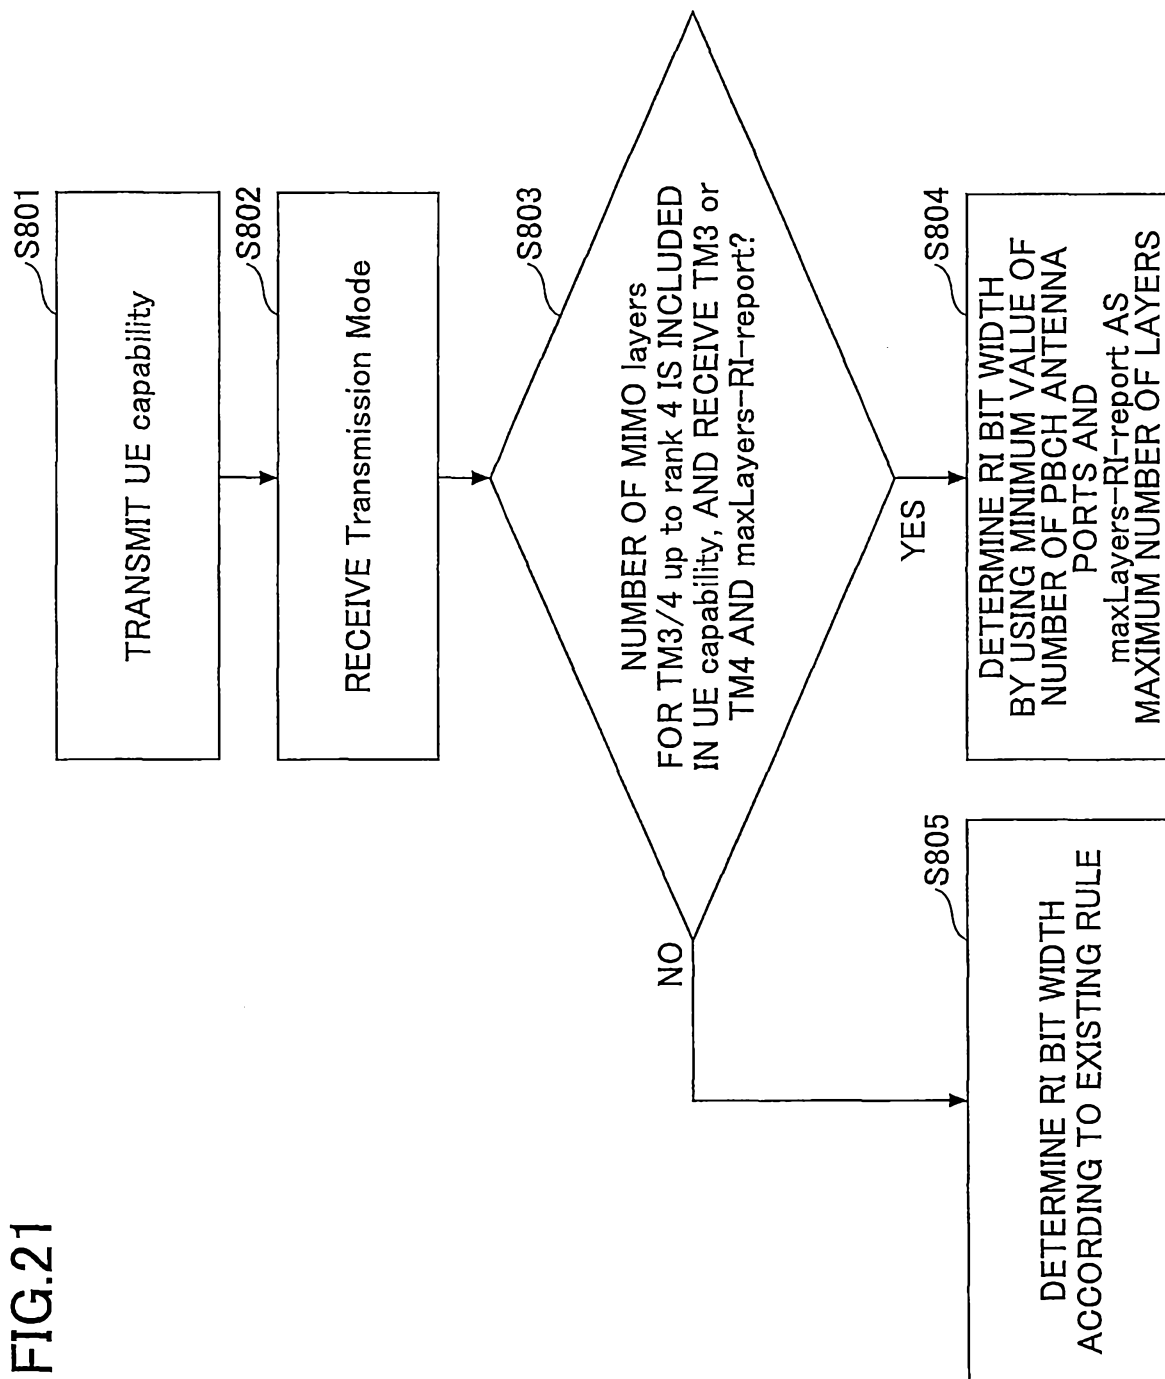


FIG.22

For rank indication (RI) (RI only, joint report of RI and i1, and joint report of RI and PTI)

- The corresponding bit widths for RI feedback for PDSCH transmissions are given by Tables 5.2.2.6.1-2, 5.2.2.6.2-3, 5.2.2.6.3-3, 5.2.3.3.1-3, 5.2.3.3.1-3A, 5.2.3.3.2-4, and 5.2.3.3.2-4A, which are determined assuming the maximum number of layers as follows:
 - If the UE is configured with transmission mode 9, and the *supportedMIMO-CapabilityDL-r10* field is included in the *UE-EUTRA-Capability*, the maximum number of layers is determined according to the minimum of the configured number of CSI-RS ports and the maximum of the reported UE downlink MIMO capabilities for the same band in the corresponding band combination.
 - If the UE is configured with transmission mode 9, and the *supportedMIMO-CapabilityDL-r10* field is not included in the *UE-EUTRA-Capability*, the maximum number of layers is determined according to the minimum of the configured number of CSI-RS ports and *ue-Category* (without suffix).
 - If the UE is configured with transmission mode 10, and the *supportedMIMO-CapabilityDL-r10* field is included in the *UE-EUTRA-Capability*, the maximum number of layers for each CSI process is determined according to the minimum of the configured number of CSI-RS ports for that CSI process and the maximum of the reported UE downlink MIMO capabilities for the same band in the corresponding band combination.
 - If the UE is configured with transmission mode 10, and the *supportedMIMO-CapabilityDL-r10* field is not included in the *UE-EUTRA-Capability*, the maximum number of layers for each CSI process is determined according to the minimum of the configured number of CSI-RS ports for that CSI process and *ue-Category* (without suffix).
 - If the UE is configured with transmission mode 3 or 4, and is configured by higher layers with *maxLayers-RI-report-r12* for the DL cell, and the *supportedMIMO-TM3(or 4)-CapabilityDL-r12* field is included in the *UE-EUTRA-Capability*, the maximum number is determined according to the minimum of the number of PBCH antenna ports and the configured *maxLayers-RI-report-r12* field for the same band in the corresponding band combination.
 - Otherwise the maximum number of layers is determined according to the minimum of the number of PBCH antenna ports and *ue-Category* (without suffix).

FIG.23

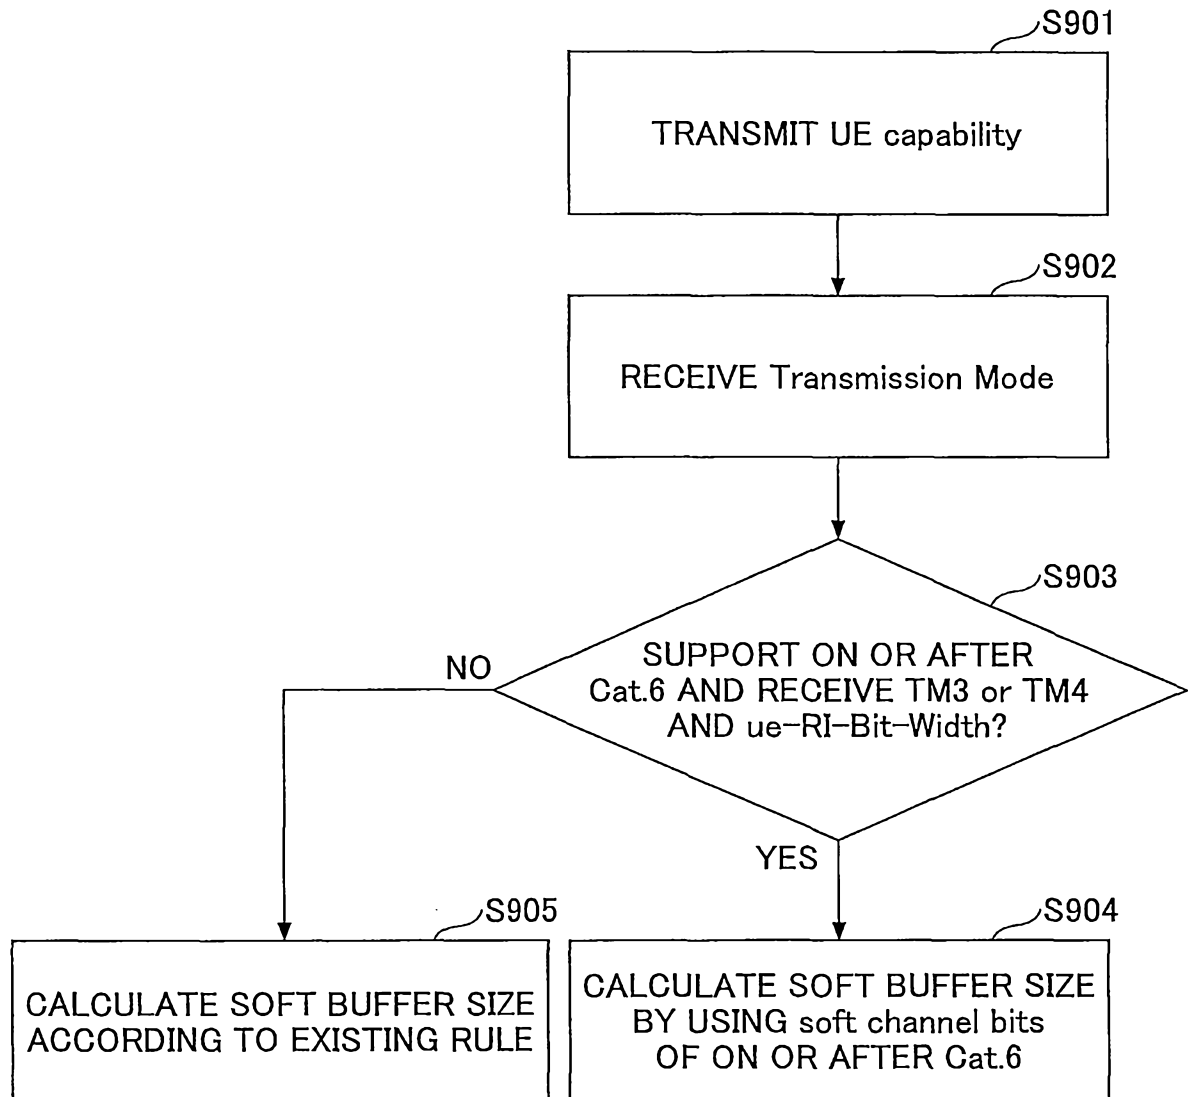


FIG.24

5.1.4.1.2 Bit collection, selection and transmission

where N_{IR} is equal to:

$$N_{IR} = \left\lfloor \frac{N_{soft}}{K_C \cdot K_{MIMO} \cdot \min(M_{DL_HARQ}, M_{limit})} \right\rfloor$$

where:

If the UE signals *ue-Category-v12xx* indicating UE category 0, or if the UE signals *ue-Category-v12xx* not indicating UE category 0 and is configured by higher layers with *altCQI-Table-r12* for the DL cell, N_{soft} is the total number of soft channel bits according to the UE category indicated by *ue-Category-v12xx*. Otherwise, if the UE signals *ue-Category-v11xx*, and is configured by higher layers with *altCQI-Table-r12* for the DL cell, N_{soft} is the total number of soft channel bits according to the UE category indicated by *ue-Category-v11xx*. Otherwise, if the UE signals *ue-Category-v1020*, and is configured with transmission mode 9 or transmission mode 10 for the DL cell, N_{soft} is the total number of soft channel bits [4] according to the UE category indicated by *ue-Category-v1020* [6]. Otherwise, if the UE signals *ue-Category-v1020*, and is configured with transmission mode 3 or transmission mode 4, and is configured by higher layers with *ue-R1-Bit-Width-r12* for the DL cell, N_{soft} is the total number of soft channel bits [4] according to the UE category indicated by *ue-Category-v1020* [6]. Otherwise, N_{soft} is the total number of soft channel bits [4] according to the UE category indicated by *ue-Category* (without suffix) [6].

FIG.25A

CQI-ReportConfig information elements

```
-- ASN1START
<< skip unchanged part >>
CQI-ReportConfig-v12xy ::= SEQUENCE {
    cqi-ReportBoth-v12xy CQI-ReportBoth-v12xy
}
<< skip unchanged part >>
CQI-ReportBoth-v12xy ::= SEQUENCE {
    Ue-R1-Bit-Width-r12 ENUMERATED {b1, b2, b3}
}
-- ASN1STOP
```

FIG.25B

<i>CQI-ReportConfig</i> field descriptions
<u>ue-RI-Bit-Width</u> Indicates the rank indication bit width as specified in TS 36.212 [22]. Value b1 denotes 1 bit, value b2 denotes 2 bits and so on.

FIG.25C

<i>PhysicalConfigDedicated</i> information element
<pre>-- ASN1START PhysicalConfigDedicated ::= SEQUENCE { << skip unchanged part >> [antennaInfo-v1250 AntennaInfoDedicated-v1250 OPTIONAL, -- Cond AI-r10 eimta-MainConfig-r12 EIMTA-MainConfig-r12 OPTIONAL, -- Need ON eimta-MainConfigPCell-r12 EIMTA-MainConfigServCell-r12 OPTIONAL, -- Need ON pucch-ConfigDedicated-v1250 PUCCH-ConfigDedicated-v1250 OPTIONAL, -- Need ON cqi-ReportConfigPCell-v1250 CQI-ReportConfig-v1250 OPTIONAL, -- Need ON uplinkPowerControlDedicated-v1250 UplinkPowerControlDedicated-v1250 OPTIONAL, -- Need ON pusch-ConfigDedicated-v1250 PUSCH-ConfigDedicated-v1250 OPTIONAL, -- Need ON csi-RS-Config-v1250 CSI-RS-Config-v1250 OPTIONAL, -- Need ON], [cqi-ReportConfigPCell-v12xy CQI-ReportConfig-v12xy OPTIONAL, -- Need ON] } PhysicalConfigDedicatedSCell-r10 ::= SEQUENCE { << skip unchanged part >> [antennaInfo-v1250 AntennaInfoDedicated-v1250 OPTIONAL, -- Need ON eimta-MainConfigSCell-r12 EIMTA-MainConfigServCell-r12 OPTIONAL, -- Need ON cqi-ReportConfigSCell-v1250 CQI-ReportConfig-v1250 OPTIONAL, -- Need ON uplinkPowerControlDedicatedSCell-v1250 UplinkPowerControlDedicated-v1250 OPTIONAL, -- Need ON csi-RS-Config-v1250 CSI-RS-Config-v1250 OPTIONAL, -- Need ON], [cqi-ReportConfigSCell-v12xy CQI-ReportConfig-v12xy OPTIONAL, -- Need ON] } << skip unchanged part >> -- ASN1STOP</pre>

FIG.26

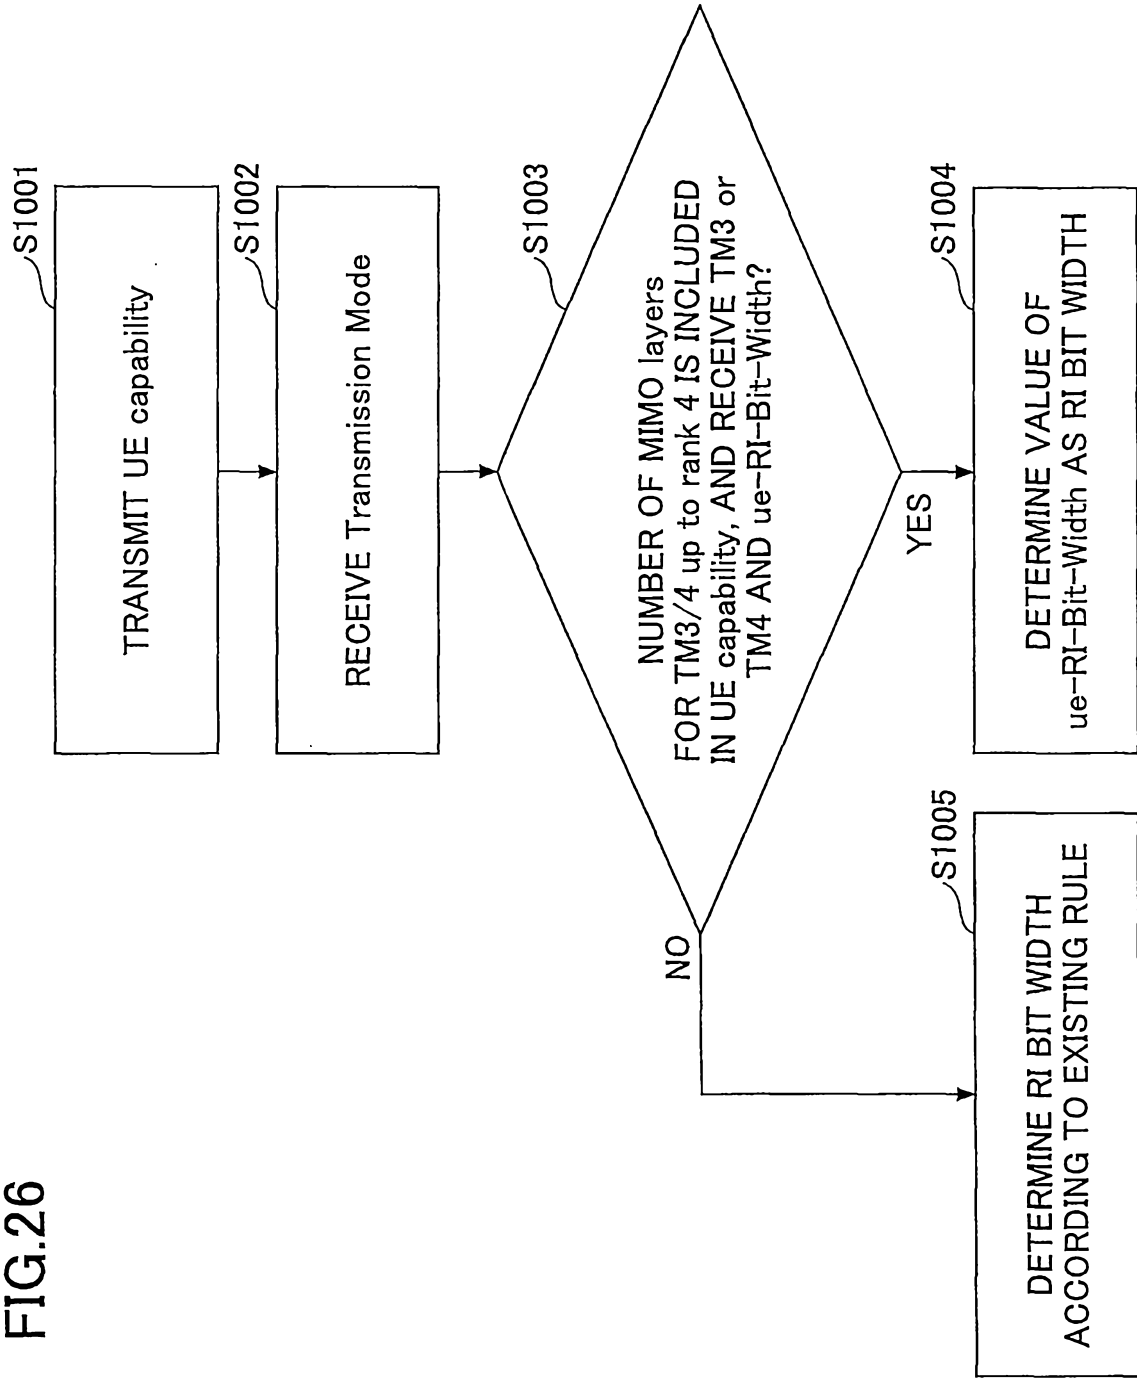


FIG.27

For rank indication (RI) (RI only, joint report of RI and i1, and joint report of RI and PTI)

- The corresponding bit widths for RI feedback for PDSCH transmissions are given by Tables 5.2.2.6.1-2, 5.2.2.6.2-3, 5.2.2.6.3-3, 5.2.3.3.1-3, 5.2.3.3.1-3A, 5.2.3.3.2-4, and 5.2.3.3.2-4A, which are determined assuming the maximum number of layers as follows:
 - If the UE is configured with transmission mode 9, and the *supportedMIMO-CapabilityDL-r10* field is included in the *UE-EUTRA-Capability*, the maximum number of layers is determined according to the minimum of the configured number of CSI-RS ports and the maximum of the reported UE downlink MIMO capabilities for the same band in the corresponding band combination.
 - If the UE is configured with transmission mode 9, and the *supportedMIMO-CapabilityDL-r10* field is not included in the *UE-EUTRA-Capability*, the maximum number of layers is determined according to the minimum of the configured number of CSI-RS ports and *ue-Category* (without suffix).
 - If the UE is configured with transmission mode 10, and the *supportedMIMO-CapabilityDL-r10* field is included in the *UE-EUTRA-Capability*, the maximum number of layers for each CSI process is determined according to the minimum of the configured number of CSI-RS ports for that CSI process and the maximum of the reported UE downlink MIMO capabilities for the same band in the corresponding band combination.
 - If the UE is configured with transmission mode 10, and the *supportedMIMO-CapabilityDL-r10* field is not included in the *UE-EUTRA-Capability*, the maximum number of layers for each CSI process is determined according to the minimum of the configured number of CSI-RS ports for that CSI process and *ue-Category* (without suffix).
 - If the UE is configured with transmission mode 3 or 4, and is configured by higher layers with *ue-RI-Bit-Width-r12* for the DL cell, and the *supportedMIMO-TM3(or 4)-CapabilityDL-r12* field is included in the *UE-EUTRA-Capability*, the RI bit width is determined according to the *ue-RI-Bit-Width-r12* value for the DL cell signalled to the UE.
 - Otherwise the maximum number of layers is determined according to the minimum of the number of PBCH antenna ports and *ue-Category* (without suffix).

FIG.28

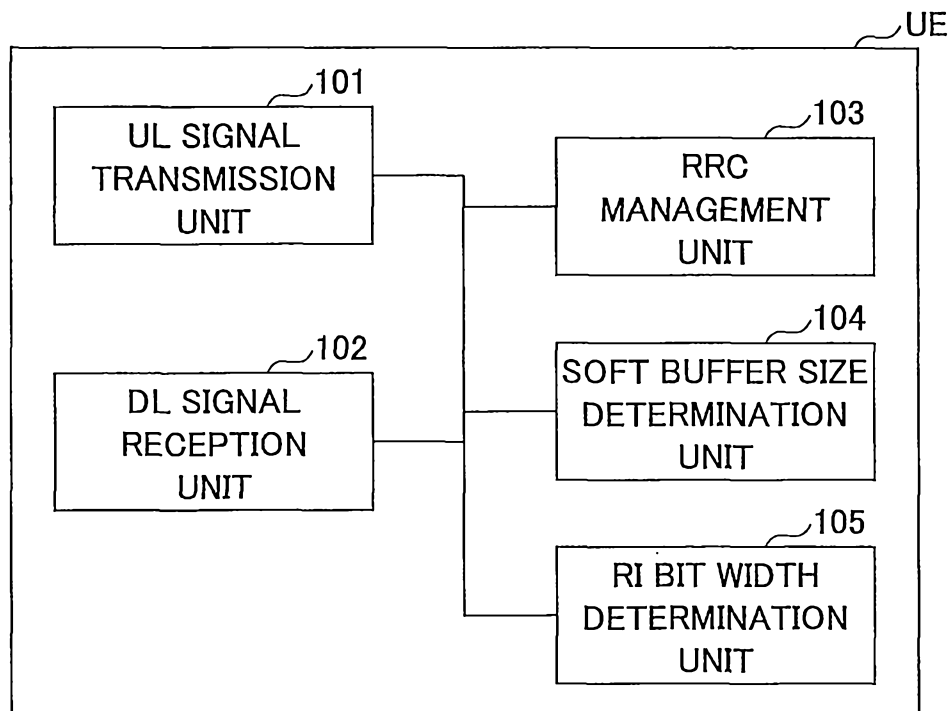


FIG.29

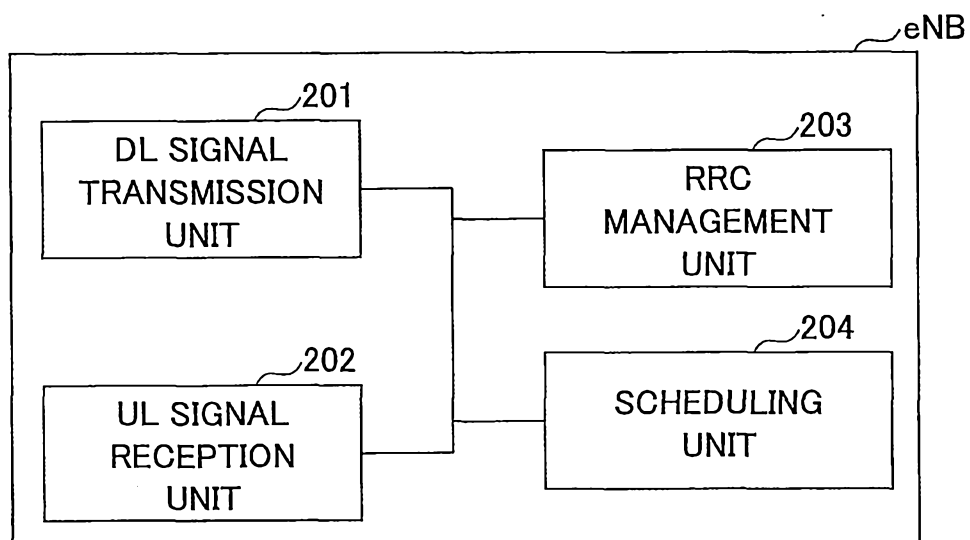


FIG.30

