

(19) AUSTRALIAN PATENT OFFICE

(54) Title
Mineral wool composition

(51)⁶ International Patent Classification(s)
C03C 13/06 (2006.01) 20060101AFI2005100
C03C 13/06 8BMEP
PCT/FR2004/050480

(21) Application No: 2004277445 (22) Application Date: 2004.10.04

(87) WIPO No: WO05/033032

(30) Priority Data

(31) Number 0400084	(32) Date 2004.01.07	(33) Country FR
03292463.1	2003.10.06	EP

(43) Publication Date : 2005.04.14

(71) Applicant(s)
Saint-Gobain Isover

(72) Inventor(s)
Bocquet, Eric, Bernard, Jean-Luc

(74) Agent/Attorney
Griffith Hack, Level 3 509 St Kilda Road, Melbourne, VIC, 3004

(56) Related Art
US 6284684

(12) DEMANDE INTERNATIONALE PUBLIÉE EN VERTU DU TRAITÉ DE COOPÉRATION
EN MATIÈRE DE BREVETS (PCT)

(19) Organisation Mondiale de la Propriété
Intellectuelle
Bureau international



(43) Date de la publication internationale
14 avril 2005 (14.04.2005)

PCT

(10) Numéro de publication internationale
WO 2005/033032 A1

(51) Classification internationale des brevets⁷ : C03C 13/06

(21) Numéro de la demande internationale :
PCT/FR2004/050480

(22) Date de dépôt international : 4 octobre 2004 (04.10.2004)

(25) Langue de dépôt : français

(26) Langue de publication : français

(30) Données relatives à la priorité :
03292463.1 6 octobre 2003 (06.10.2003) EP
0400084 7 janvier 2004 (07.01.2004) FR

(71) Déposant (pour tous les États désignés sauf US) :
SAINT-GOBAIN ISOVER [FR/FR]; 18 Avenue d'Alsace, F-92400 Courbevoie (FR).

(72) Inventeurs; et

(75) Inventeurs/Déposants (pour US seulement) :
BERNARD, Jean-Luc [FR/FR]; 51, rue André Ouden, Giencourt, F-60600 Clermont (FR). BOCQUET, Eric [FR/FR]; 14 Rue Voltaire, Résidence La Brèche, Bat Les Dahlia, F-60100 Creil (FR).


(74) Mandataire : SAINT-GOBAIN RECHERCHE; 39 Quai Lucien Lefranc, F-93300 Aubervilliers (FR).

(81) États désignés (sauf indication contraire, pour tout titre de protection nationale disponible) : AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, IE, EG, IS, IT, IL, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,

[Suite sur la page suivante]

(54) Titre: MINERAL WOOL COMPOSITION

(54) Titre : COMPOSITION DE LAINE MINÉRALE

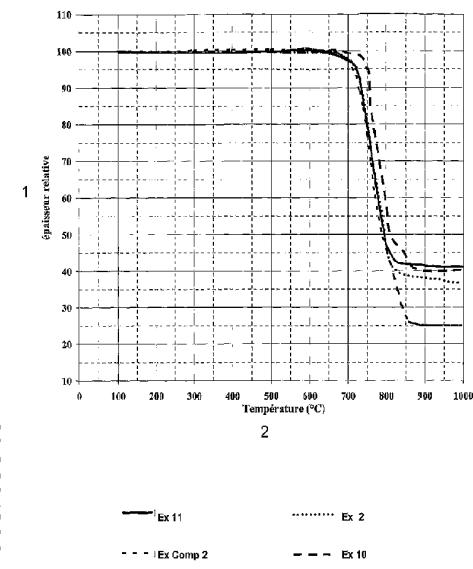

WO 2005/033032 A1

(57) **Abstract:** The invention relates to a mineral wool which can be dissolved in a physiological medium and which comprises the following constituents according to the following percentages by weight: SiO₂ 39-44%, preferably 40-43%, Al₂O₃ 16-27%, preferably 16-26%, CaO 6-20%, preferably 8-18%, MgO 1-5%, preferably 1-4.9%, Na₂O 0-15%, preferably 2-12%, K₂O 0-15%, preferably 2-12%, R₂O (Na₂O + K₂O) 10-14.7%, preferably 10-13.5% P₂O₅ 0-3%, i.e. 0-2% Fe₂O₃ (total iron) 1,5-15%, i.e. 3,2-8%, B₂O₃ 0-2%, preferably 0-1%, TiO₂ 0-2%, preferably 0.4-1%.

(57) **Abrégé :** L'invention a pour objet une laine minérale susceptible de se dissoudre dans un milieu physiologique, et qui comprend les constituants ci-après selon les pourcentages pondéraux suivants : SiO₂ 39-44%, de préférence 40-43%, Al₂O₃ 16-27%, de préférence 16-26%, CaO 6-20%, de préférence 8-18%, MgO 1-5%, de préférence 1-4.9%, Na₂O 0-15%, de préférence 2-12%, K₂O 0-15%, de préférence 2-12%, R₂O (Na₂O + K₂O) 10-14.7%, de préférence 10-13.5% P₂O₅ 0-3%, notamment 0-2% Fe₂O₃ (fer total) 1,5-15%, notamment 3,2-8%, B₂O₃ 0-2%, de préférence 0-1%, TiO₂ 0-2%, de préférence 0,4-1%.



PL, PT, RO, RU, SC, SD, SE, SG, SK, SI, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) **États désignés** (*sauf indication contraire, pour tout titre de protection régionale disponible*) : ARIPO (BW, GH, CM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), eurasien (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), européen (AT, BE, BG, CH, CY, CZ, DE, DK, BE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Publiée :

- *avec rapport de recherche internationale*
- *avant l'expiration du délai prévu pour la modification des revendications, sera republiée si des modifications sont requises*

En ce qui concerne les codes à deux lettres et autres abréviations, se référer aux "Notes explicatives relatives aux codes et abréviations" figurant au début de chaque numéro ordinaire de la Gazette du PCT.

MINERAL WOOL COMPOSITION

The present invention relates to the field of artificial mineral wool. It relates more particularly to mineral wool intended for the manufacture of thermal and/or acoustic insulation materials.

The invention relates more particularly to mineral wool of the rock wool type, that is to say the chemical compositions of which have a high liquidus temperature and are highly fluid at their fiberizing temperature, combined with a high glass transition temperature.

Conventionally, this type of mineral wool is fiberized by what are termed "external" centrifugal processes, for example of the type of those using a cascade of spinning wheels supplied with molten material by a static delivery device, as described for example in Patent EP-0 465 310 or Patent EP-0 439 385.

The fiberizing process termed "internal" centrifugal process, that is to say one making use of spinners rotating at high speed and pierced by orifices, is, in contrast, conventionally reserved for fiberizing mineral wool of the glass wool type, having broadly a composition relatively rich in alkali metal oxides and a low alumina content, a lower liquidus temperature, the viscosity of the wool at the liquidus temperature being higher than that of rock wool or basalt wool. This process is described for example in Patent EP-0 189 354 or Patent EP-0 519 797.

Technical solutions allowing the internal centrifugal process to be adapted to the fiberizing of rock wool are known, for example from WO 93/02977, by modifying the composition of the constituent material of the spinners and of their operating parameters. Such adaptation consequently makes it possible to combine properties that hitherto have only been inherent to one

or other of the two types of wool, namely rock wool or glass wool. Thus the rock wool obtained by an internal centrifugal process is of a quality comparable to that of glass wool, with a lower content of unfiberized particles than in conventionally obtained rock wool. However, it retains the two key advantages associated with its chemical nature, namely a low chemical material cost and a high temperature resistance.

10 Since in recent years the criterion of biodegradability of mineral wool, namely its ability to rapidly dissolve in a physiological medium, for the purpose of preventing any potential pathogen risk associated with possible accumulation of the finest fibres in the 15 organism by inhalation, has been added to the criteria of quality and of industrial and economic feasibility, a mineral wool composition of the rock wool type adapted accordingly has been proposed in WO 00/17117. This composition, given in detail below, is 20 characterized by the combination of a high alumina content with a high alkali metal (sodium and potassium) oxide (R_2O) content:

	SiO_2	39 - 55%, preferably 40 - 52%
	Al_2O_3	16 - 27%, preferably 16 - 25%
25	CaO	3 - 35%, preferably 10 - 25%
	MgO	0 - 15%, preferably 0 - 10%
	Na_2O	0 - 15%, preferably 6 - 12%
	K_2O	0 - 15%, preferably 3 - 12%
	R_2O ($Na_2O + K_2O$)	10 - 17%, preferably 12 - 17%
30	P_2O_5	0 - 3%, especially 0 - 2%
	Fe_2O_3 (total iron)	0 - 15%
	B_2O_3	0 - 8%, preferably 0 - 4%
	TiO_2	0 - 4%

where MgO is between 0 and 5% when $R_2O \leq 13.0\%$.

35 This choice of composition, which promotes dissolvability in a physiological medium, in fact makes the rock wool less refractory, which is liable to limit its properties at very high temperature.

In one embodiment, the compositions have iron oxide contents between 5 and 12%, especially between 5 and 8%, which may make it possible to achieve fire resistance of mineral wool blankets, this being a typical property of 5 conventional rock wool.

However, this property is not illustrated - only information about the annealing temperature is given, this being indicative of the service temperature range of the 10 material, but not about the fire behaviour at very high temperature (of the order of 1000°C).

The present invention relates to a range of rock-type mineral wool compositions, in which the high-temperature 15 properties, more particularly the fire resistance, are maximised, while preserving biodegradability and ability to be fiberized by an internal centrifugal process.

The present invention provides a mineral wool capable of 20 dissolving in a physiological medium, characterised in that it comprises the constituents below in the following percentages by weight:

	SiO ₂	39 - 44%, preferably 40 - 43%
25	Al ₂ O ₃	16 - 27%, preferably 16 - 26%
	CaO	6 - 20%, preferably 8 - 18%
	MgO	1 - 5%, preferably 1 - 4.9%
	Na ₂ O	0 - 15%, preferably 2 - 12%
	K ₂ O	0 - 15%, preferably 2 - 12%
30	R ₂ O (Na ₂ O + K ₂)	10 - 14.7%, preferably 10 - 13.5%
	P ₂ O ₅	0 - 3%, especially 0 - 2%
	Fe ₂ O ₃ (total iron)	1.5 - 15%, especially 3.2 - 8%
	B ₂ O ₃	0 - 2%, preferably 0 - 1%
35	TiO ₂	0 - 2%, preferably 0.4 - 1%.

(In the rest of the text, any percentage of a constituent

of the composition should be understood as a percentage by weight).

The present invention further provides the use of a
5 mineral wool according to one of the preceding claims in
fire-resistant structural systems or as insulation
employed at high temperature.

The composition according to the invention relies on the
10 combination of a high alumina content, of between 16 and
27%, preferably greater than 17% and/or preferably less
than 25%, for a sum of the network-forming elements -
silica and alumina - of between 57 and 75%, preferably
greater than 60% and/or preferably less than 72%, with a
15 quantity of alkali metal (sodium and potassium) oxides
(R₂O) that is relatively high but limited to between 10
and 13.5%, with magnesia in an amount of at least 1%.

Although these compositions may seem similar to
20 compositions known from WO 00/17117, they exhibit
remarkably improved behaviour at very high temperature.

Without wishing to be tied down by any particular
scientific theory, it would seem that this composition
25 range makes it possible for crystallization seeds to be
nucleated at low temperature, these seeds causing the
appearance or the growth of crystals at a sufficiently low
temperature at which the softening or sintering of the
material is not yet able to be effective. It may be
30 considered that, by crystallizing components more fusible
than the overall glass composition, the viscosity of the
residual glass increases and the surface forces involved
for sintering are no longer high enough to prevail over
the viscous cohesion forces.

35

Preferably, the alumina is present in an amount of 17 to
25.5%, especially 20 to 25%, in particular 21 to 24.5% and

2004277445 18 Jun 2010

- 4a -

especially around 22 to 23 or 24% by weight.

Advantageously, good refractoriness may be obtained by adjusting the magnesia content, especially to at least 5 1.5%, in particular 2%, especially greater than or equal to 2.5% or 3%. A high magnesia content is

2246948_1 (GHMatters) 17/06/10

conducive to a low-temperature crystallizing effect that opposes the lowering of viscosity generally observed at high temperature, and therefore prevents the material from sintering.

5

One advantageous composition selection consists in providing the required minimum amount of magnesia, this being greater the lower the amount of alumina.

10 Thus, when the alumina is present in an amount of at least 22% by weight, the amount of magnesia is preferably at least 1%, advantageously around 1 to 4%, preferably 1 to 2% and in particular 1.2 to 1.6%. The alumina content is preferably limited to 25% in order
15 to preserve a sufficiently low liquidus temperature. When the alumina is present in a lower amount, for example around 17 to 22%, the amount of magnesia is preferably at least 2%, especially around 2 to 5%.

20 The lime is advantageously present at contents of between 9.5 and 20%, preferably between 10 and 18% and even more preferably from 11 to 16%.

25 The total amount of lime and magnesia may advantageously be around 14 to 20%, especially 15 to 19%.

30 The total amount of alkaline-earth metal oxides (lime, magnesia, barium oxide and strontium oxide) is preferably between 10 and 20%, especially from 12 to 18%.

The amount of silica is advantageously around 40 to 43%, and more particularly 41 to 42%, by weight.

35

Depending on the embodiments of the invention, the alkali metal content is preferably less than or equal to 13.2%, or even 13.0%, especially around 10 to 12.5% and in particular 10.2 to 12% or less. Sodium oxide and

potassium oxide may each be present in an amount of 3 to 9% by weight.

Within this range of alkali metal contents, it proves 5 advantageous to choose a ratio of the alkali metal content to alumina content such that the R_2O/Al_2O_3 molar ratio is less than 1, in particular less than 0.9, especially at most 0.8 and in particular at most 0.75.

10 When the molar ratio is greater than 0.9, it is preferable for the magnesia content to be high enough to produce a low-temperature crystallizing effect, for example at least 2%, or at least 2.5%, otherwise excessively low glass transition temperatures would be 15 obtained, with a deleterious effect on the behaviour at very high temperature.

An R_2O/Al_2O_3 molar ratio of less than 0.9 produces a favourable effect on refractoriness, in particular at 20 low temperature, and therefore on the softening point and the sintering temperature.

However, within this composition range a sufficiently large difference is maintained between the temperature 25 corresponding to the viscosity for fiberizing and the liquidus temperature of the phase that crystallizes - thus good fiberizing conditions.

The iron oxide present in the composition has a 30 positive impact on the nucleation of growth of seeds at low temperature, while still limiting the liquidus. However, its amount is preferably limited so as not to adversely affect biosolubility in acid medium. In a preferred embodiment of the invention, the compositions 35 have iron oxide contents of between 2 and 6%, preferably around 3 to 6%.

The titanium oxide provides a very noticeable effect on the nucleation at high and low temperature of spinels

within the glassy matrix. A content of the order of 1% or less may prove to be advantageous.

5 P_2O_5 may be used, at contents of between 0 and 3%, especially between 0.1 and 1.2%, to increase the biosolubility at neutral pH.

10 Other oxides, such as BaO , SrO , MnO , Cr_2O_3 and ZrO_2 , may be present in the composition, each with contents of up to about 2%.

15 The difference between the temperature corresponding to a viscosity of $10^{2.5}$ poise (decipascal.second), denoted by $T_{log2.5}$, and the liquidus of the crystallizing phase, denoted by T_{liq} , is preferably at least 10° . This difference, $T_{log2.5} - T_{liq}$, defines the "working range" for the compositions of the invention, that is to say the temperature range within which fiberization is possible, most particularly by an internal centrifugal 20 process. This difference is preferably at least 10, 20 or $30^\circ C$, preferably $40^\circ C$ and even more than $50^\circ C$, especially more than $100^\circ C$.

25 The compositions are well suited to the internal centrifugal fiberizing process with a viscosity at a temperature of $1400^\circ C$ of more than 70 poise, especially around 75 to 250 poise.

30 The compositions according to the invention have high glass transition temperatures, especially above $600^\circ C$, in particular greater than or equal to $650^\circ C$. Their annealing temperature, denoted by $T_{annealing}$, is well above $600^\circ C$, especially around $670^\circ C$ or higher, often 35 $700^\circ C$ or higher.

35 The fire resistance of the products may be determined by a shrinkage measurement and/or a creep deformation measurement carried out on the product at a temperature above $700^\circ C$ and up to $1000^\circ C$.

Fire resistance is quite well correlated with the measurement of the high-temperature sintering contraction on a compacted fine powder. The 5 compositions according to the invention are characterized by a 700°C contraction of less than 40%, especially around 20 to 40% or better still less than 20%, and by an 800°C shrinkage of less than 90%, especially around 75 to 90% or better still less than 10 75%.

As mentioned above, the mineral wool exhibits a satisfactory level of biosolubility especially at acid pH. It thus has in general a rate of dissolution, 15 especially measured on silica, of at least 30 and preferably at least 40 or 50 ng/cm² per hour measured at pH 4.5 using a method similar to that described in the NF T 03-410 standard.

20 This type of composition, with a high alumina content and a high alkali metal oxide content, may advantageously be melted in fired glass furnaces or electric glass furnaces.

25 The invention also relates to the use of the mineral wool described above in fire-resistant structural systems.

30 The expression "fire-resistant structural systems" is understood to mean systems generally comprising assemblies of materials, especially based on mineral wool and metal plates, that can effectively retard the propagation of heat and also provide protection against flames and hot gases and maintain mechanical strength 35 during a fire.

Standardized tests define the degree of fire resistance, expressed especially as the time needed for a given temperature to be reached on the opposite side

of the structural system that is exposed to a heat flux generated, for example, by the flames of a burner or by an electric furnace.

5 A structural system is considered to exhibit satisfactory fire resistance if it is able in particular to meet the requirements of one of the following tests:

- fire door test: tests on mineral fibre boards,
- 10 as defined in the German standard DIN 18 089 - Part 1 (or equivalent);
 - fire behaviour of building materials and elements, as defined in the German standard DIN 4102 (or equivalent). In particular, the standard DIN 4102 -
 - 15 Part 5 is considered for full-scale tests so as to determine the fire resistance class, and/or the standard DIN 4102 - Part 8 for tests on specimens with a small test bed; and
 - normalized test OMI A 754 (18) (or equivalent),
- 20 which describes the general fire resistance test requirements for "marine"-type applications, especially for ship bulkheads. These tests are carried out on large specimens, with 3 m by 3 m furnaces. Mention may be made, for example, of the case of a steel deck on
- 25 which the required performance in the case of a fire on the insulation side is to meet the thermal insulation criterion for at least 60 minutes.

Other details and advantageous features will become 30 apparent from the description below of non-limiting preferred embodiments.

Table 1 below gives the chemical compositions of examples according to the invention, in which the 35 following characteristics are also indicated:

- the liquidus temperature (T_{liq}) and the temperatures at which the viscosity is equal to 10^3 poise (T_{log3}) and $10^{2.5}$ poise ($T_{log2.5}$) respectively, the three temperatures being expressed in °C;

- the viscosity at 1400°C;
- the shrinkage on powder at 700°C and 800°C;
- the annealing temperature and the glass transition temperature (T_g).

5

When the sum of all the contents of all the components is slightly less than or greater than 100%, it should be understood that the difference from 100% corresponds to the minor components/impurities that are not always 10 analyzed or cannot be analyzed in trace amounts and/or is due only to the accepted approximation in this field in the analytical methods used.

15 The purpose of the powder shrinkage test is to quantify the temperature resistance of a composition by measuring the densification of this material taken in the powder state. The protocol is as follows:

20 160 g of composition is milled in a ring mill for 8 minutes and then the powder is screened on an 80 μm screen followed by a 40 μm screen for 12 minutes. That part of the powder having a particle size of less than 40 μm is mixed with 8% water by weight and a pellet is manufactured from this mixture. A tungsten-carbide-lined pelletizer body 10 mm in diameter is placed on a 25 pressing support and the counter-piston is introduced. 3.110 g of the powder/water mixture are weighed and introduced into the pelletizer, then the piston is introduced and setting spacers 37 mm in height are 30 positioned between the body of the pelletizer and the upper part of the piston. The powder is pressed, ensuring that the upper part of the piston bears on the spacers. A specimen 28 mm in height and 10 mm in diameter is removed. The specimen is placed in a 35 furnace on a flat support and the furnace is heated to the test temperature within a 700 - 1150°C operating range with a temperature rise of 360°C/h. The furnace is maintained at the test temperature for 16 h and then left to cool. The top and bottom diameters and the mean

height are measured on the cooled specimen and from this the volume shrinkage expressed in % is deduced. The general appearance of the specimen is also noted.

5 The compositions according to these examples can be fiberized by an internal centrifugal process, especially according to the teaching of the aforementioned Patent WO 93/02977.

10 Their working ranges, defined by the difference $T_{log2.5} - T_{liq}$, are large and positive, especially greater than 50°C, or even 100°C and even greater than 150°C.

15 The liquidus temperatures are relatively low, especially not exceeding 1200°C and even 1150°C.

20 The temperatures ($T_{log2.5}$) corresponding to viscosities of $10^{2.5}$ poise are compatible with the use of centrifugal spinners for high-temperature fiberizing, especially under the operating conditions described in Application WO 93/02977.

25 The preferred compositions are in particular those in which $T_{log2.5}$ is less than 1350°C, preferably less than 1300°C.

TABLE 1

	COMP 1	COMP 2	EX 1	EX 2	EX 3	EX4	EX5	EX6	EX7
SiO ₂	45.7	42.4	42	41.9	43.3	42.4	42	43	43.1
Fe ₂ O ₃	7.4	4.8	5.4	5	5	5.1	4.73	5	5
Al ₂ O ₃	18.75	23.3	23.2	23.4	22.85	22.8	23.2	23	22.8
CaO	12	14.5	14.8	13.2	13.6	12.6	12.3	12.6	11.8
MgO	0.69	0.6	1.18	2.15	2.2	3.07	3.1	3.15	4
Na ₂ O	7.8	7.23	6.32	6.18	6.7	5.96	7.04	6.85	6.18
K ₂ O	5.1	4.84	4.51	5.25	4	5.08	5.3	4	5.54
B ₂ O ₃	0			0			0	0	0
BaO	0.4	0.35	0.28	0.32	0.33	0.3	0.33	0.34	0.33
P ₂ O ₅	0.13	0.14	0.48	0.75	0.13	0.76	0.14	0.13	0.14
TiO ₂	0.46	0.77	0.74	0.88	0.75	0.83	0.86	0.76	0.75
R ₂ O = Na ₂ O + K ₂ O	12.9	12.07	10.83	11.43	10.49	11.04	12.34	10.85	11.72
R ₂ O/Al ₂ O ₃ (mol)	0.979	0.735	0.659	0.677	0.661	0.671	0.747	0.678	0.709
T _{Liquidus}	1147	1167	1140	1167	1170	1154	1204	1134	1174
T _{leg3}	1209		1178	1204	1196	1197	1189	1195	1197
T _{leg2.5}	1294		1274	1284	1279	1277	1279	1279	1281
T _{leg.5} - T _{liq}	147	134	117	109	123	75	145	107	
Viscosity 1400°C		82.790	85.038		77.938	82.936	81.283	83.980	
% Sintering at 700°C	52	25	16	18	20	19	18	29	20
% Sintering at 800°C	81	91	75	52	65	53	54		
T _{annealing}	675	692	709	707	697	707	696		
T _g	635	655	669	659	656	656	653		

TABLE 1 (continued)

	EX 8	EX 9	EX 10	EX 11	EX 12	EX 13	EX 14	EX 15	EX 16	EX 17
SiO ₂	43.1	43	41.7	41.5	40.5	41.9	41.5	40.9	41.5	42.1
Fe ₂ O ₃	5	5	4.87	5.18	4.6	4.5	5	4.43	5.3	4.7
Al ₂ O ₃	22.9	23.35	24.5	24.9	23.9	25.8	24.7	25.25	23.5	
CaO	11.75	10	14.3	14.17	13.7	13.25	12.4	12.5	10.17	13.22
MgO	4.2	4.2	1.1	1.65	2.02	2.075	3	3.06	5.15	2.05
Na ₂ O	6.8	6.6	5.15	5.15	5.27	5	6.3	4.43	6.35	6.88
K ₂ O	4	3.9	5.9	5.16	6	6.35	4	6.84	4.5	5.23
BaO ₃	0	1.5				0		0		
BaO	0.3	0.35	0.34	0.4	0.34	0.32	0.4	0.29	0.35	0.31
P ₂ O ₅	0.13	0.13	0.16	0.63	0.76	0.75	0.1	0.75	0.11	0.14
TiO ₂	0.76	0.84	0.93	0.33	0.98	0.73	0.27	0.99	0.27	0.84
R ₂ O = Na ₂ O + K ₂ O	10.8	10.5	11.05	10.31	11.27	11.35	10.3	11.27		12.11
R ₂ O/Al ₂ O ₃ (mol)	0.678	0.646	0.607	0.574	0.609	0.632	0.570	0.595		0.723
T _{Liquidus}	1156	1175	1167	1194	1182		1154	1220		1164
T _{1eq3}	1190	1194	1217	1211	1199		1214			1194
T _{1eq2.5}	1273	1279	1298	1293	1285		1297			1284
T _{1eq2.5} - T _{Liq}	117	104	131	99	103		143			120
Viscosity 1400°C	77.485	83.590	97.884	91.400	86.480		97.263	89.6		87.190
% Sintering at 700°C	23	21	10	10	14	15	16	11	14	21
% Sintering at 800°C				75	41	39	63		38	56
T _{annealing}				722	712	710	713		714	698
T _g				677	675	669	667	671		659

The compositions of Examples 2, 10 and 11, and of Comparative Example 2 were used to manufacture a mineral wool blanket by the internal centrifugal 5 technique. The characteristics of the fibres and of the blanket obtained are given in Table 2 below.

The fineness of the fibres is expressed in various ways 10 in this table. When this quantity is expressed in 1/min, this refers to a measurement carried out using the method of measuring the fineness of mineral fibres described in Application WO 03/098209. The other fineness values are "micronaire" values measured on 5 g of fibre using the protocol described in the DIN 53941 15 or ASTM D 1448 standard.

Specimens of these blankets were taken and subjected to 20 a thermal stability test at very high temperature, in which the slump of the specimens was measured according to the procedure defined in the draft standard "Insulating materials: Thermal stability" as proposed by NORDTEST (NT FIRE XX- NORDTEST REMISS No. 1114-93). A specimen of insulating material (especially 25 mm in 25 height and 25 mm in diameter) was introduced into a furnace allowing the slump of the specimen to be observed as a function of the temperature to which the specimen is exposed. The temperature of the furnace was increased at 5°C per minute from room temperature up to about 1000°C or higher.

30 The residual thickness of the specimen, measured at a given temperature, relative to the initial thickness of the specimen (at room temperature) is called the "relative thickness". The value (1 - relative 35 thickness) at the given temperature is referred to as the "degree of slump".

Figure 1 shows the variation in relative thickness of four mineral wool specimens as a function of

temperature. This shows that the specimen of Comparative Example 2 rapidly slumps above 720°C to 800°C and that the relative thickness is less than 25% after 850°C.

5

Furthermore, visual inspection of the specimen after the test showed pronounced distortion, the shape being frustoconical with a diameter of 6 mm at the top and 14 mm at the bottom.

10

The specimens of mineral wool according to the invention exhibited substantially less slump, while better retaining their shape with less of a reduction in the radial dimension compared with the start of the 15 test.

TABLE 2

	EX. 2	EX. 10	COMP. 2 a	EX. 11	COMP. 2
Fibre fineness	12.9 1/min	12.5 1/min	13.11 1/min	3.3/5 g	3.1/5 g
Density (kg/m ³)	43.3	56.4	52.0	52.2	34.3
Temperature (°C)	960	980	930	930	920
% slump	63	60	78	59	75
Top diam. (mm)	15	11	6	16	9
Bottom diam. (mm)	21	20	14	22	19

20 It should be noted that the mineral wool according to the invention is applicable in particular to structural systems as described above, but also to applications in any known form of insulating material intended to furnish installations under extreme conditions, 25 especially such as superheated industrial pipes.

Thus, the invention also relates to insulating products, especially in the form of blankets, rolls, panels or shells. In particular, the subject of the 30 invention is a product in shell form for insulating pipes, especially industrial pipes, comprising mineral wool as defined the present Application, the fibres of

which have a mean diameter not exceeding 4 μm , which has a density of 40 to 100 kg/m^3 and a binder content of around 4 to 7% by weight.

5 It is to be understood that, if any prior art publication is referred to herein, such reference does not constitute an admission that the publication forms a part of the common general knowledge in the art, in Australia or any other country.

10

In the claims which follow and in the preceding description of the invention, except where the context requires otherwise due to express language or necessary implication, the word "comprise" or variations such as 15 "comprises" or "comprising" is used in an inclusive sense, i.e. to specify the presence of the stated features but not to preclude the presence or addition of further features in various embodiments of the invention.

CLAIMS

1. Mineral wool capable of dissolving in a physiological medium, characterized in that it
5 comprises the constituents below in the following percentages by weight:

	SiO ₂	39 - 44%, preferably 40 - 43%
	Al ₂ O ₃	16 - 27%, preferably 16 - 26%
	CaO	6 - 20%, preferably 8 - 18%
10	MgO	1 - 5%, preferably 1 - 4.9%
	Na ₂ O	0 - 15%, preferably 2 - 12%
	K ₂ O	0 - 15%, preferably 2 - 12%
	R ₂ O (Na ₂ O + K ₂ O)	10 - 14.7%, preferably 10 - 13.5%
15	P ₂ O ₅	0 - 3%, especially 0 - 2%
	Fe ₂ O ₃ (total iron)	1.5 - 15%, especially 3.2 - 8%
	B ₂ O ₃	0 - 2%, preferably 0 - 1%
	TiO ₂	0 - 2%, preferably 0.4 - 1%.

20 2. Mineral wool according to Claim 1, characterized in that the CaO content is between 9.5 and 20%, preferably between 10 and 18%.

25 3. Mineral wool according to either of the preceding claims, characterized in that it contains 20 to 25% alumina.

30 4. Mineral wool according to one of the preceding claims, characterized in that it contains at least 2%, especially around 2 to 5%, MgO when alumina is present in an amount of less than 22%, especially from 17 to 22%, and in that it contains 1 to 4%, preferably 1 to 2%, MgO when alumina is present in an amount of at least 22% by weight.

35 5. Mineral wool according to one of the preceding claims, characterized in that the alkali metal oxide content is preferably less than or equal to 13.0%, especially around 10 to 12.5% and in particular 12% or

less.

6. Mineral wool according to one of the preceding claims, characterized in that the R_2O/Al_2O_3 molar ratio is 5 less than 0.9, especially at most 0.8 and in particular at most 0.75.

7. Mineral wool according to one of the preceding claims, characterized in that it contains 2 to 6% iron 10 oxide.

8. Mineral wool according to one of the preceding claims, characterized in that it contains 1% titanium oxide or less.

15 9. Mineral wool according to one of the preceding claims, characterized in that it has a viscosity at a temperature of 1400°C of more than 70 poise, especially around 75 to 250 poise.

20 10. Mineral wool according to one of the preceding claims, characterized in that its composition has a shrinkage at 700°C of less than 40% and a shrinkage at 800°C of less than 90%.

25 11. Use of a mineral wool according to one of the preceding claims in fire-resistant structural systems or as insulation employed at high temperature.

30 12. A mineral wool as defined in claim 1 or uses involving it, substantially as herein described with reference to the accompanying examples or drawings.

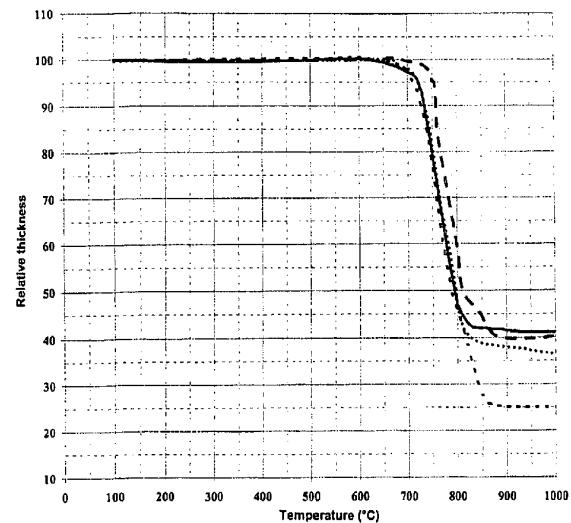


Fig. 1

— Ex. 11 Ex. 2