

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 March 2010 (25.03.2010)

(10) International Publication Number
WO 2010/033932 A1

(51) International Patent Classification:
H04R 25/00 (2006.01)

[US/US]; 2015 Fairmont Drive, San Mateo, California 94402 (US). ROSEN, **Micha** [US/US]; 607 Leksich Ave., Mountain View, California 94041 (US).

(21) International Application Number:
PCT/US2009/057716

(74) Agents: SHIMMICK, **John K.** et al; Townsend And Townsend And Crew LLP, Two Embarcadero Center, Eighth Floor, San Francisco, California 94111-3834 (US).

(22) International Filing Date:
21 September 2009 (21.09.2009)

(25) Filing Language: English

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(26) Publication Language: English

(30) Priority Data:
61/099,087 22 September 2008 (22.09.2008) US
61/109,785 30 October 2008 (30.10.2008) US
61/139,526 19 December 2008 (19.12.2008) US
61/217,801 3 June 2009 (03.06.2009) US

(71) Applicant (for all designated States except US): **EAR-LENS CORPORATION** [US/US]; 200 Chesapeake Drive, Redwood City, California 94063 (US).

(72) Inventors; and

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

(75) Inventors/Applicants (for US only): **RUCKER, Paul** [US/US]; 187 Ellsworth Street, San Francisco, California 94110 (US). **PURIA, Sunil** [US/US]; 743 Bamboo Drive, Sunnyvale, California 94086 (US). **FAY, Jonathan P.**

[Continued on next page]

(54) Title: TRANSDUCER DEVICES AND METHODS FOR HEARING

(57) Abstract: A device to transmit an audio signal to a user may comprise a mass, a piezoelectric transducer, and a support to support the mass and the piezoelectric transducer with the eardrum. The piezoelectric transducer can be configured to drive the support and the eardrum with a first force and the mass with a second force opposite the first force. The device may comprise circuitry configured to receive wireless power and wireless transmission of an audio signal, and the circuitry can be supported with the eardrum to drive the transducer in response to the audio signal, such that vibration between the circuitry and the transducer can be decreased. The transducer can be positioned away from the umbo of the ear to drive the eardrum, for example on the lateral process of the malleus.

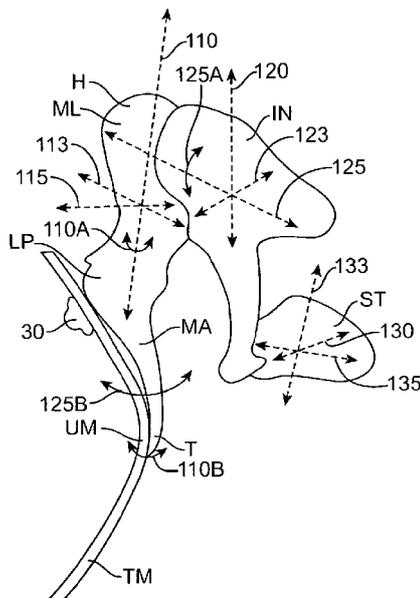


FIG. 1D

WO 2010/033932 A1

ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, Published:
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, — *mi* *th* *mi* *ernahohal* *'* *search* *'* *reP* *on* *'* *(Art* *'* *21* *'* *3* *)*
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

TRANSDUCER DEVICES AND METHODS FOR HEARING

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application claims priority to U.S. Patent Application Nos.: 61/139,526 filed December 19, 2008 (Attorney Docket No. 026166-002300US, entitled "Balanced
5 Armature Devices and Methods for Hearing"; 61/217,801 filed on June 3, 2009 (Attorney Docket No. 026166-0023 10US); 61/099,087 filed September 22, 2008 (Attorney Docket No. 026166-002000US), entitled "Transducer Devices and Methods for Hearing"; and
61/109,785 filed October 30, 2008 (Attorney Docket No. 026 166-00201 OUS), entitled
"Transducer Devices and Methods for Hearing"; the full disclosures of which are
10 incorporated herein by reference.

STATEMENT AS TO RIGHTS TO INVENTIONS MADE UNDER FEDERALLY SPONSORED RESEARCH AND DEVELOPMENT

[0002] This invention was supported by grants from the National Institutes of Health (Grant No. R44DC008499-02A1). The Government may have certain rights in this
15 invention.

BACKGROUND OF THE INVENTION

[0003] 1. Field of the Invention. The present invention is related to hearing systems, devices and methods. Although specific reference is made to hearing aid systems, embodiments of the present invention can be used in many applications in which a signal is
20 used to stimulate the ear.

[0004] People like to hear. Hearing allows people to listen to and understand others. Natural hearing can include spatial cues that allow a user to hear a speaker, even when background noise is present.

[0005] Hearing devices can be used with communication systems to help the hearing
25 impaired. Hearing impaired subjects need hearing aids to verbally communicate with those around them. Open canal hearing aids have proven to be successful in the marketplace because of increased comfort and an improved cosmetic appearance. Another reason why open canal hearing aides can be popular is reduced occlusion of the ear canal. Occlusion can result in an unnatural, tunnel-like hearing effect which can be caused by large hearing aids

which block the ear canal. In at least some instances, occlusion be noticed by the user when he or she speaks and the occlusion results in an unnatural sound during speech. However, a problem that may occur with open canal hearing aids is feedback. The feedback may result from placement of the microphone in too close proximity with the speaker or the amplified
5 sound being too great. Thus, feedback can limit the degree of sound amplification that a hearing aid can provide. Although feedback can be decreased by placing the microphone outside the ear canal, this placement can result in the device providing an unnatural sound that is devoid of the spatial location information cues present with natural hearing.

[0006] In some instances, feedback may be decreased by using non-acoustic means of
10 stimulating the natural hearing transduction pathway, for example stimulating the tympanic membrane, bones of the ossicular chain and/or the cochlea. An output transducer may be placed on the eardrum, the ossicles in the middle ear, or the cochlea to stimulate the hearing pathway. Such an output transducer may be electro magnetically based. For example, the transducer may comprise a magnet and coil placed on the ossicles to stimulate the hearing
15 pathway. Surgery is often needed to place a hearing device on the ossicles or cochlea, and such surgery can be somewhat invasive in at least some instances. At least some of the known methods of placing an electromagnetic transducer on the eardrum may result in occlusion in some instances.

[0007] One promising approach has been to place a magnet on the eardrum and drive the
20 magnet with a coil positioned away from the eardrum. The magnets can be electromagnetically driven with a coil to cause motion in the hearing transduction pathway thereby causing neural impulses leading to the sensation of hearing. A permanent magnet may be coupled to the ear drum through the use of a fluid and surface tension, for example as described in U.S. Patent Nos. 5,259,032 and 6,084,975.

[0008] However, there is still room for improvement. For example, with a magnet
25 positioned on the eardrum and coil positioned away from the magnet, the strength of the magnetic field generated to drive the magnet may decrease rapidly with the distance from the driver coil to the permanent magnet. Because of this rapid decrease in strength over distance, efficiency of the energy to drive the magnet may be less than ideal. Also, placement of the
30 driver coil near the magnet may cause discomfort for the user in some instances. There can also be a need to align the driver coil with the permanent magnet that may, in some instances, cause the performance to be less than ideal.

[0009] For the above reasons, it would be desirable to provide hearing systems which at least decrease, or even avoid, at least some of the above mentioned limitations of the current hearing devices. For example, there is a need to provide a comfortable hearing device which provides hearing with natural qualities, for example with spatial information cues, and which allow the user to hear with less occlusion, distortion and feedback than current devices.

[0010] 2. Description of the Background Art.

[0011] Patents and publications that may be relevant to the present application include: 3,585,416; 3,764,748; 3,882,285; 5,142,186; 5,554,096; 5,624,376; 5,795,287; 5,800,336; 5,825,122; 5,857,958; 5,859,916; 5,888,187; 5,897,486; 5,913,815; 5,949,895; 6,005,955; 6,068,590; 6,093,144; 6,139,488; 6,174,278; 6,190,305; 6,208,445; 6,217,508; 6,222,302; 6,241,767; 6,422,991; 6,475,134; 6,519,376; 6,620,110; 6,626,822; 6,676,592; 6,728,024; 6,735,318; 6,900,926; 6,920,340; 7,072,475; 7,095,981; 7,239,069; 7,289,639; D512,979; 2002/0086715; 2003/0142841; 2004/0234092; 2005/0020873; 2006/0107744; 2006/0233398; 2006/075175; 2007/0083078; 2007/0191673; 2008/0021518; 2008/0107292; commonly owned 5,259,032 (Attorney Docket No. 026166-000500US); 5,276,910 (Attorney Docket No. 026166-000600US); 5,425,104 (Attorney Docket No. 026166-000700US); 5,804,109 (Attorney Docket No. 026166-000200US); 6,084,975 (Attorney Docket No. 026166-000300US); 6,554,761 (Attorney Docket No. 026166-001700US); 6,629,922 (Attorney Docket No. 0261 66-00 1600US); U.S. Publication Nos. 2006/0023908 (Attorney Docket No. 0261 66-000 100US); 2006/0189841 (Attorney Docket No. 026166-000820US); 2006/0251278 (Attorney Docket No. 026166-000900US); and 2007/0100197 (Attorney Docket No. 026166-001 100US). Non-U.S. patents and publications that may be relevant include EP1845919 PCT Publication Nos. WO 03/063542; WO 2006/075175; U.S. Publication Nos.. Journal publications that may be relevant include: Ayatollahi et al., "Design and Modeling of Micromachines Condenser MEMS Loudspeaker using Permanent Magnet Neodymium-Iron-Boron (Nd-Fe-B)", ISCE, Kuala Lumpur, 2006; Birch et al, "Microengineered Systems for the Hearing Impaired", IEE, London, 1996; Cheng et al., "A silicon microspeaker for hearing instruments", J. Micromech. Microeng., 14(2004) 859-866; Yi et al., "Piezoelectric microspeaker with compressive nitride diaphragm", IEEE, 2006, and Zhigang Wang et al., "Preliminary Assessment of Remote Photoelectric Excitation of an Actuator for a Hearing Implant", IEEE Engineering in Medicine and Biology 27th Annual Conference, Shanghai, China, September 1-4, 2005. Other publications of interest include: Gennum GA3280 Preliminary Data Sheet, "Voyager TDTM.Open Platform DSP System for

Ultra Low Power Audio Processing" and National Semiconductor LM4673 Data Sheet, "LM4673 Filterless, 2.65W, Mono, Class D audio Power Amplifier"; Puria, S. et al., Middle ear morphometry from cadaveric temporal bone microCT imaging, Invited Talk. MEMRO 2006, Zurich; Puria, S. et al, A gear in the middle ear ARO 2007, Baltimore, MD.

5 BRIEF SUMMARY OF THE INVENTION

[0012] The present invention is related to hearing systems, devices and methods. Although specific reference is made to hearing aid systems, embodiments of the present invention can be used in many applications in which a signal is used to stimulate the ear.

[0013] Embodiments of the present invention can provide improved hearing which
10 overcomes at least some of the aforementioned limitations of current systems. In many
embodiments, a device to transmit an audio signal to a user may comprise a transducer
assembly comprising a mass, a piezoelectric transducer, and a support to support the mass
and the piezoelectric transducer with the eardrum. The piezoelectric transducer can be
configured to drive the support and the eardrum with a first force and the mass with a second
15 force opposite the first force. This driving of the ear drum and support with a force opposite
the mass can result in more direct driving of the eardrum, and can improve coupling of the
vibration of transducer to the eardrum. The transducer assembly device may comprise
circuitry configured to receive wireless power and wireless transmission of an audio signal,
and the circuitry can be supported with the eardrum to drive the transducer in response to the
20 audio signal, such that vibration between the circuitry and the transducer can be decreased.
The wireless signal may comprise an electromagnetic signal produced with a coil, or an
electromagnetic signal comprising light energy produce with a light source. In at least some
embodiments, at least one of the transducer or the mass can be positioned on the support
away from the umbo of the ear when the support is coupled to the eardrum to drive the
25 eardrum, so as to decrease motion of the transducer and decrease user perceived occlusion,
for example when the user speaks. This positioning of the transducer and/or the mass away
from the umbo, for example on the short process of the malleus, may allow a transducer with
a greater mass to be used and may even amplify the motion of the transducer with the
malleus. In at least some embodiments, the transducer may comprise a plurality of
30 transducers to drive the malleus with both a hinging rotational motion and a twisting motion,
which can result in more natural motion of the malleus and can improve transmission of the
audio signal to the user.

[0014] In a first aspect, embodiments of the present invention provide a device to transmit an audio signal to a user. The user has an ear comprising an ear drum. The device comprises a mass, a piezoelectric transducer, and a support to support the mass and the piezoelectric transducer with the eardrum. The piezoelectric transducer is configured to drive the support and the eardrum with a first force and the mass with a second force opposite the first force.

[0015] In many embodiments, the piezoelectric transducer is disposed between the mass and the support.

[0016] In many embodiments, the device further comprises at least one flexible structure disposed between the piezoelectric transducer and the mass.

[0017] In many embodiments, the piezoelectric transducer is magnetically coupled to the support.

[0018] In many embodiments, the piezoelectric transducer comprises a first portion connected to the mass and a second portion connected to the support to drive the mass opposite the support.

[0019] In many embodiments, the support comprises a first side shaped to conform with the eardrum. A protrusion can be disposed opposite the first side and affixed to the piezoelectric transducer.

[0020] In many embodiments, the device further comprises a fluid disposed between the first side and the eardrum to couple the support to the eardrum. The fluid may comprise a liquid composed of at least one of an oil, a mineral oil, a silicone oil or a hydrophobic liquid. In some embodiments, the support comprises a second side disposed opposite the first side and the protrusion extends from the second side to the piezoelectric transducer.

[0021] In many embodiments, the support comprises a first component and a second component. The first component may comprise a flexible material shaped to conform to the eardrum and flex with motion of the eardrum. The second component may comprise a rigid material extending from the transducer to the flexible material to transmit the first force to the flexible material and the eardrum. In at least some embodiments, the rigid material comprises at least one of a metal, titanium, a stainless steel or a rigid plastic, and the flexible material comprises at least one of a silicone, a flexible plastic or a gel.

[0022] In many embodiments, the device further comprises a housing, the housing rigidly affixed to the mass to move the housing and the mass opposite the support. In some embodiments, the support comprises a rigid material that extends through the housing to the transducer to move the mass and the housing opposite the support.

5 [0023] In many embodiments, the mass comprises circuitry coupled to the transducer and supported with the support and the transducer. The circuitry is configured to receive wireless power and wireless transmission of the audio signal to drive the transducer in response to the audio signal.

10 [0024] In many embodiments, the piezoelectric transducer comprises at least one of a piezoelectric unimorph transducer, a bimorph-bender piezoelectric transducer, a piezoelectric multimorph transducer, a stacked piezoelectric transducer with a mechanical multiplier or a ring piezoelectric transducer with a mechanical multiplier.

15 [0025] In some embodiments, the piezoelectric transducer comprises the bimorph-bender piezoelectric transducer and the mass comprises a first mass and a second mass. The bimorph bender comprises a cantilever extending from a first end supporting the first mass to a second end supporting the second mass. The support is coupled to the cantilever between the first end and the second end to drive the ear drum with the first force and drive the first mass and the second mass with the second force.

20 [0026] In some embodiments, the piezoelectric transducer comprises the stacked piezoelectric transducer with the mechanical multiplier. The mechanical multiplier comprises a first side coupled to the support to drive the eardrum with the first force and a second side coupled to the mass to drive the mass with the second force.

25 [0027] In some embodiments, the piezoelectric transducer comprises the ring piezoelectric transducer with the mechanical multiplier. The mechanical multiplier comprises a first side and a second side. The first side extends inwardly from the ring piezoelectric transducer to the mass. The second side extends inwardly toward a protrusion of the support. The mass moves away from the protrusion of the support when the ring contracts and toward the protrusion of the support when the ring expands. The ring piezoelectric multiplier may define a center having central axis extending there through. The central protrusion and the
30 mass may be disposed along the central axis.

[0028] In some embodiments, the piezoelectric transducer comprises the bimorph bender. The mass comprises a ring having a central aperture formed thereon. The bimorph bender extends across the ring with a first end and a second end coupled to the ring. The support extends through the aperture and connects to the piezoelectric transducer between the first
5 end and the second end to move the support opposite the ring when the bimorph bender bends. The bimorph bender can be connected to the ring with an adhesive on the first end and the second end such that the first end and the second end are configured to move relative to the ring with shear motion when the bimorph bender bends to drive the support opposite the ring.

10 [0029] In another aspect, embodiments of the present invention provide a device to transmit an audio signal to a user. The user has an ear comprising an eardrum. The device comprises a transducer, circuitry coupled to the transducer, and a support configured to couple to the eardrum and support the circuitry and the transducer with the eardrum. The circuitry is configured to receive at least one of wireless power or wireless transmission of the audio
15 signal to drive the transducer in response to the audio signal.

[0030] In many embodiments, the transducer is configured to drive the support and the eardrum with a first force and drive the circuitry with a second force opposite the first force.

[0031] In many embodiments, the circuitry is rigidly attached to a mass and coupled to the transducer to drive the circuitry and the mass with the first force. In some embodiments, the
20 circuitry is rigidly attached to the mass and coupled to the transducer to drive the circuitry and the mass with the second force.

[0032] In many embodiments, the circuitry is flexibly attached to a mass and coupled to the transducer to drive the circuitry and the mass with the first force. In some embodiments, the circuitry is flexibly attached to the mass and coupled to the transducer to drive the circuitry
25 and the mass with the second force.

[0033] In many embodiments, the circuitry comprises at least one of a photodetector or a coil supported with the support and coupled to the transducer to drive the transducer with the at least one of the wireless power or wireless transmission of the audio signal.

[0034] In many embodiments, the transducer comprises at least one of a piezoelectric
30 transducer, a magnetostrictive transducer, a magnet or a coil.

[0035] In another aspect, embodiments of the invention provide a device to transmit an audio signal to a user. The user has an ear comprising an eardrum having a mechanical impedance. The device comprises a transducer and a support to support the transducer with the eardrum. A combined mass of the support and the transducer supported thereon is
5 configured to match the mechanical impedance of the eardrum for at least one audible frequency between about 0.8 kHz and about 10 kHz.

[0036] In many embodiments, the combined mass comprises no more than about 50 mg. In some embodiments, the combined mass is within a range from about 10 mg to about 40 mg.

[0037] In many embodiments, the combined mass comprises at least one of a mass from
10 circuitry to drive the transducer, a mass from a housing disposed over the transducer or a metallic mass coupled to the transducer opposite the support. In some embodiments, the transducer, the circuitry to drive the transducer, the housing disposed over the transducer and the metallic mass are supported with the eardrum when the support is coupled to the eardrum.

[0038] In many embodiments, at least one audible frequency is between about 1 kHz and
15 about 6 KHz.

[0039] In many embodiments, the transducer and the mass are positioned on the support to place at least one of the transducer or the mass away from an umbo of the eardrum when the support is placed on the eardrum. This positioning can decrease a mechanical impedance of the support to sound transmitted with the eardrum when the support is positioned on the
20 eardrum.

[0040] In many embodiments, the piezoelectric transducer comprises a stiffness. The stiffness of the piezoelectric transducer is matched to the mechanical impedance of the eardrum for the at least one audible frequency.

[0041] In many embodiments, the eardrum comprises an umbo and the acoustic input
25 impedance comprises an acoustic impedance of the umbo. The stiffness of the piezoelectric transducer is matched to the acoustic input impedance of the umbo.

[0042] In another aspect, embodiments of the present invention provide a device to transmit an audio signal to a user. The user has an ear comprising an eardrum and a malleus connected to the ear drum at an umbo. The device comprises a transducer and a support to
30 support the transducer with the eardrum. The transducer is configured to drive the eardrum.

The transducer is positioned on the support to extend away from the umbo when the support is placed on the eardrum.

[0043] In many embodiments, a mass is positioned on the support for placement away from the umbo when the support is placed against the eardrum, and the transducer extends
5 between the mass and a position on the support that corresponds to the umbo so as to couple vibration of the transducer to the umbo. The mass can be positioned on the support to align the mass with the malleus away from the umbo when the support is placed against the eardrum.

[0044] In many embodiments, the transducer is positioned on the support so as to decrease
10 a first movement of the transducer relative to a second movement of the umbo when the eardrum vibrates and to amplify the second movement of the umbo relative to the first movement of the transducer when the transducer vibrates. In some embodiments, the first movement of the transducer is no more than about 75 % of the second movement of the umbo and the second movement of the umbo is at least about 25% more than the first movement of
15 the transducer. The first movement of the transducer may be no more than about 67 % of the second movement of the umbo and the second movement of the umbo may be at least about 50% more than the first movement of the transducer.

[0045] In many embodiments, the device further comprises a mass, and the transducer is disposed between the mass and the support.

[0046] In many embodiments, the support is shaped to the eardrum of the user to position
20 the support on the eardrum in a pre-determined orientation. The transducer is positioned on the support to align the transducer with a malleus of the user with the eardrum disposed between the malleus and the support when the support is placed on the eardrum. In some embodiments, the support comprises a shape from a mold of the eardrum of the user.

[0047] In many embodiments, the transducer is positioned on the support to place the
25 transducer away from a tip of the malleus when the support is placed on the eardrum.

[0048] In many embodiments, the transducer is positioned on the support to place the
30 transducer away from the tip when the support is positioned on the eardrum. The malleus comprises a head and a handle. The handle extends from the head to a tip near the umbo of the eardrum.

[0049] In many embodiments, the transducer is positioned on the support to align the transducer with the lateral process of the malleus with the eardrum disposed between the lateral process and the support when the support is placed on the eardrum. In some
5 embodiments, the support comprises a rigid material that extends from the transducer toward the lateral process to move the lateral process opposite the mass.

[0050] In many embodiments, the transducer comprises at least one of a piezoelectric transducer, a magnetostrictive transducer, a photostrictive transducer, a coil or a magnet.

[0051] In many embodiments, the transducer comprises the piezoelectric transducer. The piezoelectric transducer may comprise a cantilevered bimorph bender, which has a first end
10 anchored to the support and a second end attached to a mass to drive the mass opposite the lateral process when the support is placed on the eardrum.

[0052] In many embodiments, the device further comprises a mass coupled to the transducer and circuitry coupled to the transducer to drive the transducer. The mass and the circuitry is supported with the eardrum when the support is placed on the ear. The support,
15 the transducer, the mass and the circuitry comprise a combined mass of no more than about 60 mg, for example, a combined mass of no more than about 40mg or even a combined mass of no more than 30 mg.

[0053] In another aspect, embodiments of the present invention provide a device to transmit an audio signal to a user. The user has an ear comprising an ear drum. The device comprises
20 a first transducer, a second transducer, and a support to support the first transducer and the second transducer with the eardrum when the support is placed against the eardrum. The first transducer is positioned on the support to couple to a first side of the malleus. The second transducer positioned on the support to couple to a second side of the malleus.

[0054] In many embodiments, the first transducer is positioned on the support to couple to
25 the first side of the malleus and the second transducer is positioned on the support to coupled to the second side of the malleus which is opposite the first side of the malleus.

[0055] In many embodiments, the support comprises a first protrusion extending to the first transducer to couple the first side of the malleus to the first transducer and a second
30 protrusion extending to the second transducer to couple the second side of the malleus to the second transducer.

[0056] In many embodiments, the first transducer and second transducer are positioned on the support and configured to twist the malleus with a first rotation about a longitudinal axis of the malleus when the first transducer and second transducer move in opposite directions. The first transducer and second transducer can be positioned on the support and configured to rotate the malleus with a second hinged rotation when the first transducer and second transducer move in similar directions.

[0057] In many embodiments, the device further comprises circuitry coupled to the first transducer and the second transducer. The circuitry is configured to generate a first signal to drive the transducer and a second signal to drive the second transducer. In some embodiments, the circuitry is configured to generate the first signal at least partially out of phase with the second signal and drive the malleus with a twisting motion. The circuitry can be configured to drive the first transducer substantially in phase with the second transducer at a first frequency below about 1 kHz, and the circuitry can be configured to drive the first transducer at least about ten degrees out of phase with the second transducer at a second frequency above at least about 2 kHz.

[0058] In many embodiments, the first transducer comprises at least one of a first piezoelectric transducer, a first coil and magnet transducer, a first magnetostrictive transducer or a first photostrictive transducer, and the second transducer comprises at least one of a second piezoelectric transducer, a second coil and magnet transducer, a second magnetostrictive transducer or a second photostrictive transducer.

[0059] In another aspect, embodiments of the present invention provide a method of transmitting an audio signal to a user. The user has an ear comprising an eardrum. The method comprises supporting a mass and a piezoelectric transducer with a support on the eardrum of the user and driving the support and the eardrum with a first force and the mass with a second force, the second force opposite the first force.

[0060] In many embodiments, the ear comprises a mechanical impedance. The mass, the piezoelectric transducer and the support comprise a combined mechanical impedance. The combined mechanical impedance matches the mechanical impedance of the eardrum for at least one audible frequency within a range from about 1 kHz to about 6 KHz.

[0061] In another aspect, embodiments of the present invention provide a method of transmitting an audio signal to a user. The user has an ear comprising an eardrum. The method comprises supporting circuitry and a transducer coupled to the circuitry with the

eardrum and transmitting the audio signal with a wireless signal to the circuitry to drive the transducer in response to the audio signal.

[0062] In another aspect, embodiments of the present invention provide a method of transmitting an audio signal to a user. The user has an ear comprising an eardrum having a mechanical impedance. The method comprises supporting a transducer and a support coupled to the eardrum with the eardrum. A combined mass of the support and the transducer supported thereon matches the mechanical impedance of the eardrum for at least one audible frequency between about 0.8 kHz and about 10 kHz.

[0063] In another aspect, embodiments of the present invention provide a method of transmitting an audio signal to a user. The user has an ear comprising an eardrum and a malleus connected to the ear drum at an umbo. The method comprises supporting a transducer with a support positioned on the eardrum and vibrating the support and the eardrum with the transducer positioned away from the umbo. In many embodiments, a first movement of the transducer is decreased relative to a second movement of the umbo when the eardrum is vibrated and the second movement of the umbo is amplified relative to the first movement of the transducer.

[0064] In another aspect, embodiments of the present invention provide a method of transmitting an audio signal to a user. The user has an ear comprising an eardrum and a malleus connected to the eardrum at an umbo. The method comprises supporting a first transducer and a second transducer with a support positioned on the eardrum. The first transducer and the second transducer are driven in response to the audio signal to the twist the malleus such that the malleus rotates about an elongate longitudinal axis of the malleus.

BRIEF DESCRIPTION OF THE DRAWINGS

[0065] A hearing aid system using wireless signal transduction is shown in Fig. 1, according to embodiments of the present invention;

[0066] Fig. 1A shows the lateral side of the eardrum and Fig. 1B shows the medial side of the eardrum, suitable for incorporation of the hearing aid system of Fig. 1;

[0067] Figs. 1C and 1D show the eardrum coupled to the ossicles including the malleus, incus, and stapes, and locations of attachment for the hearing aid system shown in Fig. 1;

[0068] Fig. 2 shows the sensitivity of silicon photovoltaics to different wavelengths of light, suitable for incorporation with the system of Figs. 1A to 1D;

[0069] Fig. 3 shows the mechanical impedance of the eardrum in relation to that of various masses, in accordance with the system of Figs. IA to 2;

[0070] Fig. 4 shows a simply supported bimorph bender, in accordance with the systems of Figs. IA to 3;

5 [0071] Fig. 5A shows a cantilevered bimorph bender, in accordance with the system of Figs. IA to 3;

[0072] Fig. 5B shows cantilevered bimorph bender which includes a first mass and a second mass, in accordance with the system of Figs. IA to 3;

10 [0073] Fig. 6 shows a stacked piezo with mechanical multiplier, in accordance with the system of Figs. IA to 3;

[0074] Fig. 7 shows a narrow ring piezo with a mechanical multiplier, in accordance with the system of Figs. IA to 3;

[0075] Fig. 8 shows a ring mass with bimorph piezo, in accordance with the system of Figs. IA to 3;

15 [0076] Figs. 8A and 8B show a cross-sectional view and a top view, respectively, of a ring mass with bimorph piezo, in accordance with the system of Figs. IA to 3;

[0077] Figs. 8B 1 and 8B2 shows a perspective view of ring mass with a bimorph piezo with flexible structures to couple the bimorph piezo to the ring mass, in accordance with the system of Figs. IA to 3;

20 [0078] Figs. 8C and 8D show a cross-sectional view and a top view, respectively, of a ring mass with dual bimorph piezo, in accordance with the systems of Figs. IA to 3;

[0079] Fig 8E shows a plot of phase difference versus frequency for the first and second transducers of the dual bimorph piezo of Figs. 8C and 8D;

25 [0080] Fig. 9 shows a simply supported bimorph bender with a housing, in accordance with the systems of Figs. IA to 4;

[0081] Fig. 9A shows an optically powered output transducer, in accordance with the systems of Figs. IA to 3;

[0082] Fig. 9B shows a magnetically powered output transducer, in accordance with the systems of Figs. IA to 3;

[0083] Fig. 10 shows a cantilevered bimorph bender placed on the eardrum away from the umbo and on the lateral process, in accordance with the systems of Figs. 1A to 3;

[0084] Fig. 10A shows an output transducer assembly comprising a cantilevered bimorph bender placed on the ear drum with a mass on the lateral process away from the umbo and an elongate member comprising a cantilever extending from the mass toward the umbo so as to couple to the eardrum at the umbo, in accordance with the systems of Figs. 1A to 3;

[0085] Fig. 10B shows the cantilevered bimorph bender of Fig. 10A from another view;

[0086] Fig. 11 shows a side view of a transducer comprising two cantilevered bimorph benders placed on different locations on the eardrum, in accordance with the systems of Figs. 1A to 3;

[0087] Fig. 11A shows two cantilevered bimorph benders placed on the ear drum over the umbo and the lateral process, in accordance with the systems of Figs. 1A to 3;

[0088] Fig. 12 shows an exemplary graph of simulation results for an output transducers in accordance with the systems of Figs. 1A to 3;

[0089] Fig. 13A shows a stacked piezo and Fig. 13B shows a plot of displacement per voltage for the stacked piezo of Fig. 13A;

[0090] Fig. 14A shows a series bimorph and Fig. 14B shows a plot of displacement per voltage for the series bimorph of Fig. 14A;

[0091] Fig. 15A shows a single crystal bimorph cantilever and Fig. 15B shows a plot of displacement per voltage for the single crystal bimorph cantilever of Fig. 15A;

[0092] Fig. 16A shows a bimorph on a washer and Fig. 16B shows a plot of displacement per voltage for the bimorph on a washer of Fig. 16A;

[0093] Fig. 17A shows a stacked piezo pair, Fig. 17B shows a plot of displacement per voltage for the stacked piezo pair of Fig. 17A, and Fig. 17C shows a plot of lever ratio for the stacked piezo pair of Fig. 17C;

[0094] Fig. 18A shows a plot of peak output for a bimorph piezo placed on the umbo, and Fig. 18B shows a plot of feedback for a bimorph piezo placed on the umbo;

[0095] Fig. 19A shows a plot of peak output for a bimorph piezo placed on the center of pressure on an eardrum, and Fig. 19B shows a plot of feedback for a biomorph piezo placed on the center of pressure on an eardrum; and

[0096] Fig. 20A shows a plot of peak output for a stacked piezo placed on the center of pressure on an eardrum, and Fig. 20B shows a plot of feedback for a stacked piezo placed on the center of pressure on an eardrum.

DETAILED DESCRIPTION OF THE INVENTION

[0097] Embodiments of the present invention can provide optically coupled hearing devices with improved audio signal transmission. The systems, devices, and methods described herein may find application for hearing devices, for example open ear canal hearing aides. Although specific reference is made to hearing aid systems, embodiments of the present invention can be used in any application in which a signal is wirelessly received and converted into a mechanical output.

[0098] As used herein, the umbo of the eardrum encompasses a portion of the eardrum that extends most medially along the ear canal, so as to include a tip, or vertex of the ear canal. As used herein, a twisting motion and/or twisting encompass a rotation of an elongate body about an elongate axis extending along the elongate body, for example rotation of a rigid elongate bone about an elongate axis of the bone. Twisting as used herein encompasses rotation of the elongate body both with torsion of the elongate body about the elongate axis and also without torsion of the elongate body about the elongate axis. As used herein torsion encompasses a strain, or deformation, that can occur with twisting, such that one part of the elongate body twists, or rotates, more than another part of the elongate body.

[0099] Fig. 1 shows a hearing aid system using wireless signal transduction. The hearing system 10 includes an input transducer assembly 20 and an output transducer assembly 30. Hearing system 10 may comprise a behind the ear unit BTE. Behind the ear unit BTE may comprise many components of system 10 such as a speech processor, battery, wireless transmission circuitry and input transducer assembly 10. Behind the ear unit BTE may comprise many component as described in U.S. Pat. Pub. Nos. 2007/0100197, entitled "Output transducers for hearing systems"; and 2006/0251278, entitled "Hearing system having improved high frequency response". The input transducer assembly 20 is located at least partially behind the pinna P, although an input transducer assembly may be located at

many sites such as in pinna P or entirely within ear canal EC. The input transducer assembly 20 can receive a sound input, for example an audio sound. With hearing aids for hearing impaired individuals, the input can be ambient sound. The input transducer assembly comprises an input transducer, for example a microphone 22. Microphone 22 can be
5 positioned in many locations such as behind the ear, if appropriate. Microphone 22 is shown positioned within ear canal near the opening to detect spatial localization cues from the ambient sound. The input transducer assembly can include a suitable amplifier or other electronic interface. In some embodiments, the input may comprise an electronic sound signal from a sound producing or receiving device, such as a telephone, a cellular telephone,
10 a Bluetooth connection, a radio, a digital audio unit, and the like.

[0100] Input transducer assembly 20 includes a signal output source 12 which may comprise an electromagnetic source such as a light source such as an LED or a laser diode, an electromagnet, an RF source, or the like. Alternatively, an amplifier of the input assembly may be coupled to the output transducer assembly with a conductor such as a flexible wire,
15 conductive trace on a flex printed circuitry board, or the like. The signal output source can produce an output signal based on the sound input. Output transducer assembly 30 can receive the output source signal and can produce mechanical vibrations in response. Output transducer assembly 30 may comprise a transducer responsive to the electromagnetic signal, for example at least one photodetector, a coil responsive to the electromagnet, a
20 magenetostrictve element, a photostrictive element, a piezoelectric element, or the like. When properly coupled to the subject's hearing transduction pathway, the mechanical vibrations caused by output transducer assembly 30 can induce neural impulses in the subject which can be interpreted by the subject as the original sound input.

[0101] The output transducer assembly 30 can be configured to couple to a point along the hearing transduction pathway of the subject in order to induce neural impulses which can be
25 interpreted as sound by the subject. As shown in Fig. 1, the output transducer assembly 30 may be coupled to the tympanic membrane or eardrum TM. Output transducer assembly 30 may be supported on the eardrum TM by a support, housing, mold, or the like shaped to conform with the shape of the eardrum TM. A fluid may be disposed between the eardrum
30 TM and the output transducer assembly 30 such as an oil, a mineral oil, a silicone oil, a hydrophobic liquid, or the like. Output transducer assembly 30 can cause the eardrum TM to move in a first direction 40 and in a second direction 45 opposite the first direction 40, such that output transducer assembly 30 may cause the eardrum TM to vibrate. Specific points of

attachment are described in prior U.S. Pat. Nos. 5,259,032; and 6,084,975, the full disclosures of which are incorporated herein by reference and may be suitable for combination with some embodiments of the present invention.

[0102] Fig. IA shows structures of the ear suitable for placement of the output transducer assembly from the lateral side of the eardrum TM, and Fig. IB shows structures of the ear from the medial side of the eardrum TM. The eardrum TM is connected to a malleus ML. Malleus ML comprises a head H, a manubrium MA, a lateral process LP, and a tip T. Manubrium MA is disposed between head H and tip T and coupled to eardrum TM, such that the malleus ML vibrates with vibration of eardrum TM.

[0103] Fig. 1C. shows output transducer assembly 30 coupled to the eardrum TM on the umbo UM to transmit vibration so that the user can perceive sound. Eardrum TM is coupled to the ossicles including the malleus ML, incus IN, and stapes ST. The manubrium MA of the malleus ML can be firmly attached to eardrum TM. The most depressed or concaved point of the eardrum TM comprises the umbo UM. Malleus ML comprises a first axis 110, a second axis 113 and a third axis 115. Incus IN comprises a first axis 120, a second axis 123 and a third axis 125. Stapes ST comprises a first axis 130, a second axis 133 and a third axis 135.

[0104] The axes of the malleus ML, incus IN and stapes ST can be defined based on moments of inertia. The first axis may comprise a minimum moment of inertia for each bone. The second axis comprises a maximum moment of inertia for each bone. The first axis can be orthogonal to the second axis. The third axis extends between the first and second axes, for example such that the first, second and third axes comprise a right handed triple. For example first axis 110 of malleus ML may comprise the minimum moment of inertia of the malleus. Second axis 113 of malleus ML may comprise the maximum moment of inertia of malleus ML. Third axis 115 of malleus ML can extend perpendicular to the first and second axis, for example as the third component of a right handed triple defined by first axis 110 and second axis 113. Further first axis 120 of incus IN may comprise the minimum moment of inertia of the incus. Second axis 123 of incus ESf may comprise the maximum moment of inertia of incus ESf. Third axis 125 of incus IN can extend perpendicular to the first and second axis, for example as the third component of a right handed triple defined by first axis 120 and second axis 123. First axis 130 of stapes ST may comprise the minimum moment of inertia of the stapes. Second axis 133 of stapes ST may comprise the maximum

moment of inertia of stapes ST. Third axis 135 of stapes ST can extend perpendicular to the first and second axis, for example as the third component of a right handed triple defined by first axis 130 and second axis 133.

[0105] Vibration of the output transducer system induces vibration of eardrum TM and malleus ML that is transmitted to stapes ST via Incus IN, such that the user perceives sound. Low frequency vibration of eardrum TM at umbo UM can cause hinged rotational movement 125A of malleus ML and incus IN about axis 125. Translation at umbo UM and causes a hinged rotational movement 125B of the tip T of malleus ML and hinged rotational movement 125A of malleus ML and incus IN about axis 125, which causes the stapes to translate along axis 135 and transmits vibration to the cochlea. Vibration of eardrum TM, for example at higher frequencies, may also cause malleus ML to twist about elongate first malleus axis 110 in a twisting movement 110A. Such twisting may comprise twisting movement 110B on the tip T of the malleus ML. The twisting of malleus ML about first malleus axis 110 may cause the incus IN to twist about first incus axis 120. Such rotation of the incus can cause the stapes to transmit the vibration to the cochlea where the vibration is perceived as sound by the user.

[0106] With the output transducer assembly positioned over the eardrum TM on the umbo UM, the combined mass of the output transducer assembly can be from about 10 to about 60 mg, for example from about 10 to about 40 mg. In some embodiments, the combined mass comprises no more than about 50 mg. The combined mass may comprise the mass of the support, the transducer, a mass opposite the support and/or the circuitry to receive a wireless signal and drive the transducer. The support can be configured to support the transducer, a mass opposite the support and/or the circuitry to receive a wireless signal and drive the transducer with the eardrum when the support is placed against the eardrum.

[0107] Fig. ID shows output transducer assembly 30 coupled on the TM away from umbo UM, for example over the lateral process LP of the malleus ML. Output transducer assembly 30 may be placed on other parts of the eardrum as well. Depending on the placement of output transducer assembly 30 on the eardrum TM, the mechanical impedance of the output transducer assembly 30 and the eardrum TM may vary. Placement of output transducer assembly 30 away from the umbo UM allows for increased mass of the lateral process while minimizing occlusion. For example, with placement over the lateral process, the mass of the output transducer assembly may comprise approximately twice the mass as when placed over

the umbo without causing occlusion. For example, an output transducer assembly comprising a mass of 60 mg positioned over the lateral process will provide a mechanical impedance and occlusion similar to a 30 mg mass positioned over the umbo. Further the vibration of the transducer at the lateral process is amplified from the lateral process to the umbo, for example
5 by a factor of two due to leverage of the malleus with hinged rotation from the head of the malleus to the tip near the umbo.

[0108] The mass of transducer assembly 30 for placement away from the umbo can be similar to ranges described above for the configuration placed over the umbo, and may be scaled accordingly. For example, with the output transducer assembly positioned over the
10 eardrum TM away from the umbo UM, for example over the lateral process, the combined mass of the output transducer assembly can be from about 20 to about 120 mg, for example from about 40 to about 80 mg. In many embodiments, the combined mass of output transducer assembly 30 over the lateral process can be from about 20 mg to about 60 mg to provide occlusion and transmission losses similar to a mass of about 10 mg to about 30 mg
15 over the umbo.

[0109] Output transducer assembly 30 may have a number of exemplary specifications for maximum output. Output transducer assembly 30 may produce a sound pressure level of up to 106 dB. For example, a sound pressure level of up to at least about 90 dB can be sufficient to provide quality hearing for many hearing impaired users. The "center" of the eardrum, or
20 the umbo, may move at 0.1 $\mu\text{m}/\text{Pa}$ at 1 kHz and 0.01 $\mu\text{m}/\text{Pa}$ at 10 kHz. The velocity can be 630 $\mu\text{m}/\text{s}/\text{Pa}$ from about 1 kHz and 10 kHz. The area of the eardrum may be about 100 mm^2 . The ear drum may have an impedance of about 0.2 Ns/m for frequencies greater than 1 kHz, which may be damping in nature, and an impedance of about 1000 N/m for frequencies less than 1 kHz in nature, which may be stiffening in nature. Thus, the power input into the ear at
25 up to 106 dB SPL may be up to about 1 μW .

[0110] Output transducer assembly 30 may comprise a number of exemplary specifications for frequency response. Output transducer assembly 30 can have a frequency response of 100 Hz to 10 kHz. For an open canal system, it may be acceptable if low frequency response rolls off below 1 kHz since most hearing impaired subjects have relatively good low
30 frequency hearing and the natural sound pathway can provide this portion of the sound spectrum. A relatively flat response may be good and it may be ideal if a resonance is generated at 2-3 kHz without affecting response at other frequencies. Variability between subjects may be ± 3 dB. This includes variability due to variable insertions and movement

of the transducer with jaw movements. Variability across subjects may be +/- 6 dB. Even in low responding subjects may need to have adequate output above their thresholds at all frequencies. Subject based calibrations may likely be problematic for clinicians and best avoided if possible.

5 [0111] Output transducer assembly 30 may further comprise a number of other exemplary specifications. For example, output transducer assembly 30 may have less than 1 percent harmonic distortion of up to 100 db SPL and less than 10 percent distortion of up to 106 db SPL. Output transducer may have less than 30 dB SPL noise equivalent pressure at the input. Output transducer may provide 15 dB of gain up to 1 kHz and 30 dB of gain above 1 kHz.

10 [0112] I. Power Sources:

Both power and signal may be transmitted to the output transducer assembly 30. 1 uW of power into the ear may need to be generated to meet maximum output specifications.

Methods of transmitting power may include light (photovoltaic), ultrasound, radio frequency, magnetic resonant circuits.

15 [0113] In exemplary embodiments, a piezoelectric transducer driven by a photovoltaic (PV) cell or a number of photovoltaic (PV) in placed in series. The maximum voltage and current provided by the cells can be limited by the area and the amount of incident light upon them. 70 mW may be a good upper limit for the amount of electrical power available for the output transducer at its maximum output. This power can be limited by the amount of heat
20 that can be dissipated as well as battery life considerations.

[0114] LEDs may be about 5% efficient in their conversion of electrical power into light power. The maximum light power coming out of the LEDs may be near 3.5mW. The light coming out of the LED can cover a broader area than the area of the photovoltaic cell. The broader area may be set based on the movement of the ear canal and the ability to point the
25 light directly at the photovoltaic cells. For example, a spot with a diameter that is twice as wide as a square 3.16mm x 3.16mm photocell may be used. This spot size would have an area of 31.4 mm² (leading to an optical efficiency of 32%). The photodetector area may comprise two parts —one part to move the transducer in a first direction and another part to move the transducer in a second direction, for example as described in U.S. Pat. App. No.
30 61/073,271, filed on June 17, 2008, entitled "OPTICAL ELECTRO-MECHANICAL HEARING DEVICES WITH COMBmED POWER AND SIGNAL ARCHITECTURES", (attorney docket no. 026166-001800US), the full disclosure of which is incorporated herein by reference. This two part photodetector area may further reduce the efficiency by a factor of two to 16%. This efficiency may be improved depending on the result of studies showing

how much the motion of the ear canal moves the light as well as the ability to initially point the light down the ear canal. With a 16% efficiency, 560 uW of light power impinges on the surface of each of the two photovoltaics. The device may comprise at least one photo detector, for example as described in U.S. Pat. App. No. 61/073,281, filed June 17, 2008, 5 entitled "OPTICAL ELECTRO-MECHANICAL HEARING DEVICES WITH SEPARATE POWER AND SIGNAL COMPONENTS", (attorney docket no. 026166-001900US), the full disclosure of which is incorporated by reference.

[0115] Fig. 2 shows the sensitivity of silicon photovoltaics to different wavelengths of

light. The sensitivity of a photodetector is how much current is produced per unit power of

10 incident light (A/W). In Fig. 2, maximum light intensity of 560 uW may be 336 uA at

infrared wavelengths ($S = 0.6 A/W @ 900 - 1000 \text{ nm}$) or 224 uA in the "red" range ($S = 0.4$

$A/W @ 650 \text{ nm}$). Red LEDs may be more efficient than infrared LEDs, so the increased

efficiency of the LEDs may overcome the decreased sensitivity of the photodetector at those

wavelengths. The maximum available currents may be in the 220-340 uA range. The

15 voltage characteristic of the photodetector is set by the "diode" action of the junction.

Starting a 0.3 V, an increasingly non-linear voltage response may be encountered. Hence the maximum effective voltage of the photodetector for our application may be 0.4V.

Multiplying this 0.4V by the 224 uA one obtains 90 uW. Taking this 90 uW and dividing by

the 560 uW of light power in gives an efficiency of 16%. One may also use the photocells in

20 series to increase the amount of voltage available. However, the area of each photocell may

need to be reduced to keep the total area the same. This may have the effect that voltage may

be traded for current and vice versa, however the total amount of power remains fixed.

[0116] The LED/photovoltaic system may supply approximately 224 uA of current and

0.4V. Voltage can be increased by putting cells in series but the voltage increase may be at

25 the proportional cost of current. 90 uW of power may be available to the transducer for

producing motion of the eardrum. However, the amount of power utilized can depend on the

load characteristics. The optimal load may be a 1800 ohm resistor ($0.4V/224 \text{ uA}$). In either

the piezoelectric case (capacitive load) or the voice coil case (inductive load), the load

impedance may change as a function of frequency. A frequency at which this optimal

30 impedance is matched may be chosen. For the capacitive load case, the system may be

current limited above this frequency and voltage limited below this frequency. For the

inductive load case, the situation may reverse. In the current limited cases, one may not be

able to reach the desired maximum output levels. In the voltage limited regions, driving the

system too hard may highly distort the output. If 2 kHz is chosen as the optimal frequency,

this impedance may correspond to a capacitance of 44nF or an inductance of 143 mH. Even with an optimal load attached, the overall efficiency of the optical power transfer is 0.04%. Yet even with this efficiency, the amount of power produced by the PV is 90x greater than what we expect to need to input into the ear.

5 [0117] Table 1 below summarizes the above-mentioned exemplary power specifications.

[0118] TABLE 1: EXEMPLARY POWER SPECIFICATIONS FOR OUTPUT TRANSDUCER

Parameter	Formula	Value	Comment
Input Power Maximum		70mW	May be chosen based on magnetic system experience with heat and battery life.
LED efficiency		5%	May be based on literature and experimental data
Area of illumination	ρR^2	R = 3.16mm A = 31.4 mm ²	May be a reasonable guess based on what will be required for robust illumination of photodetectors
Area of photodetectors	$\frac{b^2}{2}$	b = 3.16mm A = 5 mm ²	May be based on what area of the eardrum is easily viewable from a mid ear canal location. Remember that only half of the area is available for each photodetectors (hence the divide by 2).
Optical efficiency	$\frac{A_{illum}}{A_{pv}} \times 100\%$	16%	
Maximum optical power incident on photodetectors	$E_{optical} E_{LED} P_{max}$	560 mW	
Sensitivity of PV @ IR (~950 nm)		0.6 A/W	
Sensitivity of PV @ Red (~650 nm)		0.4 A/W	
Maximum PV current @ IR	$S_{PV} P_{\lambda PV}$	336 mA	
Maximum PV current @ Red	$S_{PV} P_{\lambda PV}$	224 mA	
Maximum PV voltage		0.4 V	Maximum voltage for ~10% distortion. (0.3 V for ~1%)
Maximum PV power @ Red	$V_{PVmax} I_{PVmax}$	90 mW	
Optimal Load for PV	$\frac{V_{PVmax}}{I_{PVmax}}$	1800 ohms	
Overall efficiency	$\frac{P_{PV}}{P_{max}} \times 100\%$	0.13%	

[0119] Other power transmission portions may include ultrasonic power transmission, magnetic resonant circuits, and radiofrequency power transmission. For magnetic resonant circuits, the basic concept is to produce two circuits that resonant with each other. The "far" coil should only draw enough power from the magnetic fields to perform its task. Power transfer may be in the 30-40% efficient range.

[0120] II. Output Transducer Specifications

In exemplary embodiments, an output transducer may comprise two major characteristics; the physics used to generate motion and the type of reference method used. The choices for the physics used to generate motion can include electromagnetic (voice coils, speakers, and the like), piezoelectric, electrostatic, pryomechanical, photostrictive, magnetostrictive, and the like. Regardless of what physics are used to generate motion, the energy of the motion can be turned into useful motion of the eardrum. In order to produce motion, forces or moments that act against the impedance of the eardrum may be generated. To generate forces or moments, the reaction force or moment is resisted. To resist such forces or movements, a fixed anchor point may be introduced, a floating inertia may be used, for example, utilizing translational and rotational inertia, or deforming an object so that the boundaries produce a net force that moves the object, i.e., using a deformation transducer.

[0121] Fig. 3 is a graph showing the mechanical impedance of the eardrum in relation to that of various masses of 100 mg, 50 mg, 20 mg, and 10 mg. The impedance of the eardrum matches the masses of 100 mg, 50 mg, 20 mg, and 10 mg at frequencies of about 450 Hz, 700 Hz, 1.5 kHz, 3 kHz, respectively. The impedance of the mass can be dependent on the location of the eardrum. By placing the mass away from the umbo, the impedance can be decreased, for example halved, when the mass is positioned on the short or lateral process of the malleus, for example. For example, a mass of 40 mg can have an impedance at 1.5 kHz that is similar to a 20 mg mass so as to match the impedance of the eardrum TM.

[0122] Exemplary physical specifications may be placed on the transducer based on the size of the ear canal, the ability of an output transducer to remain in position and the perception of occlusion resulting from having a mass present on the eardrum. Table 2 below show these specifications.

[0123] TABLE 2: EXEMPLARY PHYSICAL SPECIFICATIONS FOR OUTPUT TRANSDUCER

Parameter	Value	Comment
Maximum dimension in plane with annular	<5 mm	If the dimension gets larger, then manipulating the transducer into place may become difficult

ligament of TM		for physicians and may not fit down some ear canals.
Maximum dimension perpendicular to TM	<2 mm	If the dimension gets larger, then the anterior wall that “hangs” over the TM may begin to get in the way.
Maximum mass	60 mg	A mass of 46mg may result in significant “occlusion”. Other embodiments may be able to hold more weight. There may be evidence that at even this weight gravity may shift the position of the transducer depending on the orientation of the head and the support to TM coupling.

[0124] Output transducer assembly 30 may use a piezoelectric element to generate motion. Material properties of exemplary piezoelectric elements are shown in the table 3 below.

[0125] TABLE 3: MATERIAL PROPERTIES OF EXEMPLARY PIEZOELECTRIC

5 ELEMENTS

	APC disk bender	APC Tapecast	APC stacked	STEMinc	TRS single crystal	APC single crystal
Material	APC 855	APC 850	APC PST 150	7x7x.2 SMQA	TRS PMN-PT	APC PMN-PT
Density (kg/m3)	7600	7700	8000	7900	7900	8200
Curie Temperature	200	360	155	250	166	
k33	0.76	0.72			0.91	0.92
d31 (x10-12 m/V)	276	175	290	140	1000	930
d33 (x10-12 m/V)	600	400	640	310	1900	2000
E33 (N/m2)	5.10E+10	5.40E+10	5.56E+10	7.30E+10	1.16E+10	
relative dielectric constant (Er33)	3400	1900	5400	1400	7700	4600
E11 (N/m2)	5.90E+10	6.30E+10		8.40E+10		2.48E+10
kp	0.68	0.63		0.58		0.92
kt				0.45	0.55	0.6
k31	0.4	0.36		0.34	0.51	0.72

[0126] III. Exemplary Output Transducers

[0127] Output transducer assembly 30 may comprise a piezoelectric based output transducer, for example, a transducer comprising a piezoelectric unimorph, piezoelectric bimorph, or a piezoelectric multimorph. Exemplary output transducers may comprise a

10

simply supported bimorph bender 400 as shown in Fig. 4, a cantilevered bimorph bender 500 as shown in Fig. 5, a stacked piezo with mechanical multiplier 600 as shown in Fig. 6, a disk or narrow ring piezo with a mechanical multiplier 700 as shown in Fig. 7 or a ring mass with bimorph piezoelectric transducer 800 as shown in Fig. 8.

5 [0128] Fig. 4 shows a simply supported bimorph bender 400 suitable for incorporation with transducer assembly 30 as described above. Simply supported bimorph bender 400 comprises a first mass 410a, a second mass 410b, a bimorph piezoelectric cantilever 420, and a support 430. Cantilever 420 extends from a first end supporting first mass 410a to a second end supporting second mass 410b. Cantilever 420 is coupled with the support 430
10 comprising a protrusion 430p extending from the support to the transducer to couple the support to the transducer between the first and second ends. Support 430 may be configured to support the first and second masses 410a, 410b and the bimorph cantilever 420 on the eardrum TM. For example, support 430 may comprise a mold shaped to conform with the eardrum TM, for example support 430 can be shaped with known molding techniques. The
15 portion 430a of support 430 which is in contact with the fluid that couples to the eardrum TM can be flexible, for example, by comprising a flexible material such as silicone, flexible plastic, a gel, or the like. Other portions of support 430, for example protrusion 430p may be rigid, for example, by comprising a metal, titanium, a rigid plastic, or the like. Simply supported bimorph bender 400 may comprise circuitry which receives an external, wireless
20 signal and causes cantilever 420 to change shape. Cantilever 420 may push against masses 410a, 410b causing a force on the masses 410a, 410b in a direction 445 and also cause a force on support 430 in a direction 440 opposite direction 445. The force on support 430 drives the eardrum TM to produce sensations of sound.

[0129] Fig. 5A shows a cantilevered bimorph bender 500 suitable for incorporation with
25 transducer assembly 30 as described above. Cantilevered bimorph bender 500 includes a mass 510, a bimorph cantilever 520 extending from mass 510, and a support 530 coupled with cantilever 520. Support 530 may be configured to support mass 510 and bimorph cantilever 520 on the eardrum TM, which may not be drawn to scale in Fig. 5A. For example, support 530 may comprise a mold shaped to conform with the eardrum TM.
30 Cantilever 520 is coupled with the support 530 comprising a protrusion 530p extending from the support to the transducer. The portion 530a of support 530 which is in contact with the eardrum TM can be flexible, for example, by comprising a flexible material such as silicone, flexible plastic, a gel, or the like. Other portions of support 530 may be rigid, for example, by comprising a metal, titanium, a rigid plastic, or the like. Cantilevered bimorph bender 500

may comprise circuitry configured to receive an external, wireless signal and cause cantilever 520 to bend and thus push against mass 510. The pushing action causes a force in a direction 545 on the mass 510 and also a force on the support 530 in a direction 540 opposite the direction 545. The force on the support 530 drives the eardrum TM to produce sensations of sound.

5 [0130] Cantilevered bimorph bender 500 includes mass 510 and cantilever 520. Some embodiments may include more than one mass, cantilever, and/or support.

[0131] Fig. 5B shows cantilevered bimorph bender 550 suitable for incorporation with transducer assembly 30 as described above. Bimorph bender 550 includes a first mass 560a and a second mass 560b. A first cantilevered bimorph 570a is coupled to first mass 560a. A second cantilevered bimorph 570b is coupled to second mass 560b. A support 580 is coupled to the first cantilevered bimorph 570a and second cantilevered bimorphs 570b. First cantilevered bimorph 570a is coupled with the support 580 comprising a protrusion 580p.

10 Second cantilevered bimorph 570b is coupled with the support 580 comprising a protrusion 580pb. Support 580 may be configured to support masses 560a, 560b and bimorph cantilevers 570a, 570b on the eardrum TM, which may not be drawn to scale on Fig. 5B. For example, support 580 may comprise a mold shaped to conform with the eardrum TM. The portion 580a of support 580 which is in contact with the eardrum TM can be flexible, for example, by comprising a flexible material such as silicone, flexible plastic, a gel, or the like.

20 Other portions of support 580 may be rigid, for example, by comprising a metal, titanium, a rigid plastic, or the like. Cantilevered bimorph bender 550 may comprise circuitry configured to receive an external, wireless signal and cause cantilevers 570a, 570b to bend and thus push against masses 560a, 560b, respectively. The pushing action causes force in a direction 595 on the masses 560a, 560b and also a force on the support 580 in a direction 590 opposite the direction 595. The force on the support 580 causes a translational movement which drives the eardrum TM to produce sensations of sound. Cantilevers 570a, 570b may push masses 560a, 560b in tandem to cause support 540 to translate and drive the eardrum TM. Cantilevers 570a, 570b may also push masses 560a, 570b in different orders as to cause a rotational or twisting movement of the support 580 and the eardrum TM.

30 [0132] Fig. 6 shows a stacked piezo with mechanical multiplier 600 suitable for incorporation with transducer assembly 30 as described above. The stacked piezo 600 comprises a plurality of piezoelectric elements or a stacked piezoelectric array 610, mechanical multiplier 620, a mass 630, and a support 640. The piezoelectric array 610 may

be held by mechanical multiplier 620. Mechanical multiplier 620 is coupled to mass 630 on side 623 and support 640 on side 626. Mechanical multiplier 620 is coupled with the support 640 comprising a protrusion 64Op extending from the support to the transducer. Support 640 may be configured to support mechanical multiplier 620 and the piezoelectric array 610 and the mass 630 on the eardrum TM, which may not be drawn to scale in Fig. 6. For example, support 640 may comprise a mold shaped to conform with the eardrum TM. The portion 630a of support 630 which is in contact with the eardrum TM can be flexible, for example, by comprising a flexible material such as silicone, flexible plastic, a gel, or the like. Other portions of support 640 may be rigid, for example, by comprising a metal, titanium, a rigid plastic, or the like. Stacked piezo 600 may comprise circuitry configured to receive an external, wireless signal and cause the piezoelectric array 610 to expand or contract along axis 650. Mechanical multiplier 620 uses leverage to multiply this expansion and contraction and change its direction to a direction along axis 655, thereby producing a force against mass 630 and support 640. The force on support 640 drives the eardrum TM to produce sensations of sound.

[0133] Fig. 7 shows a narrow ring piezo with a mechanical multiplier 700 suitable for incorporation with transducer assembly 30 as described above. The narrow ring piezo 700 comprises a piezoelectric ring 710, disc-shaped mechanical multiplier 720, a mass 730, and a support 740. Mechanical multiplier 720 is coupled to mass 730 and support 740. Mechanical multiplier 720 is coupled with the support 740 comprising a protrusion 74Op extending from the support to the transducer. Support 740 may be configured to support mechanical multiplier 720 and the piezoelectric ring 710 and the mass 730 on the eardrum TM. For example, support 740 may comprise a mold shaped to conform with the eardrum TM. The portion 740a of support 740 which is in contact with the eardrum TM can be flexible, for example, by comprising a flexible material such as silicone, flexible plastic, a gel, or the like. Other portions of support 740 may be rigid, for example protrusion 740P that extends to the bimorph, by comprising a metal, titanium, a rigid plastic, or the like. Mechanical multiplier 720 comprises a first side 723 and a second side 726, the first side 723 extends inwardly from piezoelectric ring 710 to mass 730 and the second side 726 extends inwardly from piezoelectric ring 710 to support 740. Narrow ring piezo 700 may comprise circuitry configured to receive an external, wireless signal and cause the piezoelectric ring 710 to expand or contract along axis 750. Mechanical multiplier 720 uses leverage to multiply this expansion and contraction and change its direction to that along axis 755, producing a force

against mass 730 and support 740. The force on support 740 drives the eardrum TM to produce sensations of sound.

[0134] Fig. 8 shows a ring mass with bimorph piezoelectric transducer 800 suitable for incorporation with transducer assembly 30 as described above. Piezoelectric transducer 800 comprises contact elements contact elements 815 and 818 to connect a washer ring 820 to a piezoelectric bimorph 810. Ring mass with bimorph piezoelectric transducer 800 comprises a piezoelectric bimorph 810, contact elements 815, 818, a washer ring 820 which can serve as a mass and which defines an aperture 825, and a support 830 coupled to the bimorph 810, the support 830 coupled with bimorph 810 and passing through aperture 825 at least in part. Bimorph 810 may comprise a single crystal bimorph. Support 830 may be configured to support bimorph 810 on the eardrum TM. For example, support 830 may comprise a mold shaped to conform with the eardrum TM. The portion 830a of support 830 which is in contact with the eardrum TM can be flexible, for example, by comprising a flexible material such as silicone, flexible plastic, a gel, or the like. Other portions of support 830, for example protrusion 830p, may be rigid, for example, by comprising a metal, titanium, a rigid plastic, or the like. Bimorph 810 comprises a first end 813 and a second end 816. First end 813 and second end 816 are respectively coupled to ring 820 through contact elements 815 and 818, for example, through the use of an adhesive. Ring mass with bimorph piezoelectric transducer 800 may be coupled to circuitry configured to receive an external, wireless signal and cause bimorph 810 to flex in response. Flexion of bimorph 810 produces a shearing force or shear motion of first end 813 and second end 816 relative to washer ring 820 and produces a translational force along axis 850 so as to drive support 830 against the eardrum TM, producing sensations of sound.

[0135] Figs. 8A and 8B show a ring mass with bimorph piezoelectric transducer 802 suitable for incorporation with transducer assembly 30 as described above. Fig. 8a shows a cross-sectional view of ring mass with bimorph piezoelectric transducer 802. Fig. 8b shows a top view of ring mass with bimorph piezoelectric transducer 802. Bimorph 810 can be directly connected to washer ring 820 which can serve as a mass. Bimorph 810 is coupled with a support 830 comprising a protrusion 830p extending from the support to the transducer. Support 830 may be configured to support washer bimorph 810 and washer 820 on the eardrum TM. The portion of support 830 which is in contact with the eardrum TM can be flexible, for example, by comprising a flexible material such as silicone, flexible plastic, a gel, or the like. Other portions of support 830 may be rigid, for example, the portions may comprise a metal, titanium, a rigid plastic, or the like. For example, support 830 may

comprise a mold shaped to conform with the eardrum TM. Support 830 may be configured so that protrusion 830p is directly over the umbo UM. Ring mass with bimorph piezoelectric transducer 802 may comprise circuitry configured to receive an external, wireless signal and cause bimorph 810 to bend or flex and thus push against washer 820. The pushing action
5 causes a force in a direction 852 on washer 820 and also a force on the support 830 in a direction 853. The force on the support 830 causes a translational movement of the umbo UM which can rotate malleus ML to produce sensations of sound.

[0136] Figs. 8B1 and 8B2 show perspective views of mass, for example a ring mass, with a piezoelectric transducer, for example a bimorph piezoelectric transducer 803, in which the
10 mass is coupled to the piezoelectric transducer with a flexible intermediate structure, for example intermediate element 815, suitable for incorporation with transducer assembly 30 as described above. The flexible intermediate structure can relax a boundary condition at the edge of the piezoelectric transducer so as to improve performance of the piezoelectric transducer coupled to the mass. Although an elongate rod is shown, the flexible intermediate
15 structure may comprise many known flexible shapes such as coils, spheres and leafs.

Bimorph 810 is indirectly and flexibly connected to washer ring 820. The ends of bimorph 810 can be directly connected to intermediate elements 815. Intermediate elements 815 can in turn be directly connected to washer ring 820. Washer ring 820 can serve as a mass. The ends of bimorph 810 may be rigidly attached to intermediate elements 815, for example, via
20 an adhesive or glue. Intermediate elements 815 may be rigidly attached to intermediate elements 815, for example, via an adhesive or glue. Intermediate elements 815 is flexible so as to provide a flexible boundary condition or a flexible connection between bimorph 810 and washer ring 820. For example, intermediate elements 815 may comprise a rod made of a flexible material such as carbon fiber or a similar composite material. Such a flexible
25 material may be more prone to twisting than bending. By providing such a flexible boundary condition, the force outputted by transducer 803 can be greater, for example, twice as great, as the force outputted if bimorph 810 were instead directly and rigidly connected to washer ring 820.

[0137] Bimorph 810 is coupled with a support 830. Support 830 comprises a protrusion
30 830P protruding from the bimorph 810 and a support member 830E adapted to conform with the eardrum TM. Protrusion 830P is coupled to support member 830E. For example, protrusion 830P can comprise a first magnetic member 83IP and support member 830E may comprise a complementary second magnetic member 83IE so that protrusion 830P and support member 830E are magnetically coupled. Both first magnetic member 83IP and

second magnetic member 83IE may comprise magnets. Alternatively, one of first magnetic member 83IP or second magnetic member 83IE may comprise a magnet while the other comprises a ferromagnetic material. To position transducer 803 on the eardrum TM, support member 830E may first be placed on the eardrum TM, followed by the remainder of the transducer 803 as guided by first magnetic member 83IP and second magnetic member 83IE. The use of magnetism to guide the positioning of transducer 803 can reduce a hearing professional's reliance on vision to position transducer 803 on the eardrum TM.

[0138] Support member 830E may comprise a mold shaped to conform with the eardrum TM. Support member 830E can comprise a flexible material such as silicone, flexible plastic, a gel, or the like. The portion of support member 830E in contact with protrusion 830P may be rigid, for example, the portions may comprise a metal, titanium, a rigid plastic, or the like. Support 830 may be configured so that protrusion 830P is directly over the umbo UM. Transducer 803 may also comprise circuitry 824. Circuitry 824 may be configured to receive an signal, for example, an external, wireless signal. Circuitry 824 can cause bimorph 810 to bend or flex and thus push against washer 820. The pushing action causes a force in a direction 852 on washer 820 and also a force on the support 830 in a direction 853. The force on the support 830 causes a translational movement of the umbo UM which can rotate malleus ML to produce sensations of sound.

[0139] Figs. 8C and 8D show embodiments that comprise more than one bimorph, for example a ring mass dual bimorph piezoelectric transducer 804, suitable for incorporation with transducer assembly 30 as described above. Transducer 804 may comprise a mass from about 20 mg to about 60 mg, for example about 40 mg. Ring mass with double bimorph piezoelectric transducer 804 comprises first transducer, for example first bimorph 810a and second transducer, for example second bimorph 810b. Malleus ML extends into the ear canal, and first bimorph 810a and second bimorph 810b may extend along a line substantially perpendicular to malleus ML, or first bimorph 810a and second bimorph 810b may extend along a line oblique to Malleus ML. Bimorph 810a and bimorph 810b are coupled to a ring or washer 820 which comprises a mass. Bimorph 810a and bimorph 810b are supported by support 830 comprising protrusions 830pa and 830pb, which are coupled to bimorph 810a and bimorph 810b, respectively. The portion of support 830 which is in contact with the eardrum TM can be flexible, for example, by comprising a flexible material such as silicone, flexible plastic, a gel, or the like. Other portions of support 830 may be rigid, for example comprising a metal, titanium, a rigid plastic, or the like. For example, support 830 may comprise a mold shaped to conform with the eardrum TM.

[0140] Ring mass with double bimorph piezoelectric transducer 804 may comprise circuitry configured to receive an external, wireless signal and cause bimorph 810a and bimorph 810b to bend and/or flex and thus push against washer 820. The wireless signal may comprise a first signal configured to drive first bimorph 810a and a second signal configured to drive second bimorph 810b. The pushing action of the first transducer in response to the first signal causes a first force in a first direction 852a on washer 820 and an opposite force on the support 830 in an opposite direction 853a. The pushing action of the second transducer in response to the second signal causes a second force in a second direction 852b on washer 820 and an opposite force on the support 830 in an opposite direction 853b. The force on the support 830 in first direction 853a and second direction 853b causes a translational movement which drives the eardrum TM to produce sensations of sound.

[0141] The dual transducer 804 allows the malleus to be driven in more than one dimension, for example with a first translational motion to rotate the malleus with hinged motion about the head of the malleus and second rotational motion to twist the malleus about an elongate axis of the malleus extending from a head of the malleus toward the umbo. When bimorphs 810a and 810b are flexed at the same time and in the same direction, ring-mass-double-bimorph-piezoelectric-transducer 804 may work similar to same as ring-mass-double-bimorph-piezoelectric-transducer 804. However, flexion of bimorphs 810a and 810b at different times and/or in different directions or phase may produce a rotational twisting motion along the elongate axis of the malleus with support 830 and thus induce rotation at the umbo of eardrum TM. For example, the received external, wireless signal may cause only one of bimorph 810a and bimorph 810b to bend or flex. Alternatively or in combination, the received external, wireless signal may cause bimorph 810a to bend or flex more than bimorph 810b, or vice versa, so as to cause a rotational twisting motion of the malleus to occur along with the hinged rotation motion of the malleus to translate the umbo of eardrum TM. Arrows 853TW show twisting motion of the malleus at umbo UM with a first rotation of the malleus about an elongate axis of the malleus. Arrows 853TR show translational motion of the umbo UM with hinged rotation of the malleus comprising pivoting of the malleus about the head of the malleus. The first transducer and the second transducer can be driven with a signal having a time delay, for example a phase delay of 90 degrees, such that translation movement and twisting of the malleus and umbo occur. Thus, a first portion support 830 may translate in a first direction 853 and a second portion of support 830 may translate in a second direction 853b opposite first direction 853a so as to rotate the malleus with twisting motion.

Thus, the first transducer and the second transducer comprising bimorphs 810a and 810b can be driven so as to cause translational movement and a rotational movement of eardrum TM. Hinged rotational movement of the malleus to effect translational movement of the umbo UM may be made at low frequencies less than about 5 kHz, for example frequencies less than
5 about 1kHz. Rotational twisting movement of the malleus may be made at frequencies greater than about 2 kHz, for example high frequencies greater than 5kHz.

[0142] Fig. 8E shows a plot of phase difference versus frequency for the first and second transducers of the dual bimorph piezo of Figs. 8C and 8D. This phase difference can result in increased frequency gain at high frequencies above about 5 kHz, such that the user can hear
10 the high frequency sounds more clearly due to the twisting of the malleus. At a first frequency below about 1 kHz, for example 0.5 kHz, the phase difference between the first transducer and the second transducer is substantially zero. At a second frequency above from about 3 to 6 kHz, for example above about 5 KHz, the phase difference between the first transducer and the second transducer is at least about 10 degrees. For example, at about 9
15 kHz, the phase difference between the first transducer and the second transducer may comprise about 100 degrees. The phase difference between the first transducer and the second transducer can be provided in many ways, for example with the audio processor as described above, configured to output a first channel to the first transducer and a second channel to the second transducer. The circuitry coupled to the first transducer and the second
20 transducer may be configured to provide the first signal phase shifted from the second signal in response to the audio signal, for example with circuitry comprising at least one of a capacitor, a resistor or an inductor configured to provide a phase shift of the audio signal such that the first signal is phase shifted from the second signal.

[0143] Fig. 9 shows simply supported bimorph bender 400 housed in a hermetically sealed
25 housing 900 suitable for incorporation with transducer assembly 30 as described above. Housing 900 may comprise many known biocompatible materials. In many embodiments, an output transducer may comprise a hermetically sealed housing. Housing 900 may be rigidly affixed to masses 410a and 410b with rigid connections. First mass 410a is connecting to housing 900 with rigid connections 900RA 1 and 900RA2. Second mass 410b is connecting
30 to housing 900 with rigid connections 900RB 1 and 900RB2. Housing 900 can provide additional mass for bimorph 420 to push against. A rigid portion 430P of support 430 extends through housing 900 to bimorph 420. Hermitically sealed housing 900 may be configured for many of the above described transducers, for example piezoelectric at least

one of cantilevered bimorph bender 500, 550, stacked piezo with mechanical multiplier 600, disk or narrow ring piezo with a mechanical multiplier 700, or transducer 800.

[0144] Fig. 9A shows an output transducer 902 which receives power through optical transmission suitable for incorporation with transducer assembly 30 as described above.

5 Output transducer 902 may comprise a piezoelectric transducer, a magnetostrictive transducer, a photostrictive transducer, a coil and a magnet, or the like. As shown in Fig. 9A, output transducer 902 comprises a piezoelectric transducer 910 which is coupled to annular mass 920. Piezoelectric transducer 910 and mass 920 are both supported by support 930. Piezoelectric transducer 910 may comprise many of the piezoelectric elements described
10 above, for example at least one of a bimorph, a cantilevered bimorph, a stacked piezo, or a disc or ring piezo. Mass 920 may be similar to many of the masses as previously discussed. Piezoelectric transducer 910 can be powered by a photodetector 940 which receives light 945. Light 945 may comprise a signal, for example, a signal representative of sound as described above. Photodetector 940 can be coupled to circuitry 940c. Circuitry 940c can be supported
15 with support 930, mass 920, piezoelectric transducer 930 and support 930. Circuitry 940 can be coupled to piezoelectric transducer 910 to convert light 945 into an electrical signal which can cause piezoelectric transducer 910 to move and cause vibrations on eardrum TM which may lead to a sensation of sound. A housing 903 extends around piezoelectric transducer 910, circuitry 940c, mass 920 and photodetector 940 to hermetically seal transducer 902.

20 [0145] Fig. 9B shows an output transducer 904 which receives power through magnet and/or electric power transmission suitable for incorporation with transducer assembly 30 as described above. Output transducer 904 may comprise a piezoelectric transducer, a magnetostrictive transducer, a photostrictive transducer, a coil and a magnet, or the like. Output transducer 904 comprises a piezoelectric transducer 910 coupled to a mass 920B.
25 Piezoelectric transducer 910 and mass 920B are both supported by support 930. Piezoelectric transducer 910 may comprise many of the piezoelectric elements described above, for example at least one of a bimorph, a cantilevered bimorph, a stacked piezo, or a disc or ring piezo. Mass 920B may be similar to many of the masses as previously discussed. Piezoelectric transducer 910 can be powered by an external coil 955 which produces a
30 magnetic field 957 which causes a magnetic field 952 and a voltage in coil 950. Coil 950 is coupled to and powers piezoelectric transducer 910. Coil 950 can be supported with mass 920B, transducer 910 and support 930. The electromagnetic field 957 produced by external coil 955 may provide a signal, for example, a signal representative of sound, to coil 950.

Appropriate variations in magnetic field 957 and magnetic filed 952 can cause piezoelectric transducer 910 to cause vibrations on eardrum TM which may lead to a sensation of sound.

[0146] Tables 4 and 5 below show characteristics of exemplary piezoelectric output transducers as described above, including simply supported bimorph bender 400, cantilevered bimorph bender 500, stacked piezo with mechanical multiplier 600, disk or narrow ring piezo with a mechanical multiplier 700, and bimorph or wide ring piezo 800.

[0147] TABLE 4: EXEMPLARY PARAMETERS OF PIEZOELECTRIC OUTPUT TRANSDUCERS

Variable	Symbol	Comments
Displacement at point of interest	w	Simply Supported Bimorph – Mid span Cantilever Bimorph – Free end Stack – Free end Narrow Ring – Mid radius Wide Ring – Outer radius
Beam or stack length	L	
Beam or stack width	b	Stack is assumed to have a square cross section
Wide ring outer radius		
Wide ring inner radius	a	
Thickness	h	Bimorph – 1/2 total thickness Stack – single layer thickness Ring – total thickness
Number of layers	n	Bimorph – number of layers in 1/2 thickness Stack – total number of layers Ring – total number of layers
Piezoelectric constant	d_{31}, d_{32}	
Elastic moduli	E_{11}, E_{33}	
Density	ρ	
Permittivity of free space	ϵ_0	8.854E-12 (F/m)
Relative permittivity	$\bar{\epsilon}_{33}$	
Applied voltage	ΔV	
Applied force	F	Simply Supported Bimorph – Force (N) at mid span Cantilever Bimorph – Force (N) at free end Stack – Force (N) at free end Narrow Ring – Ring load (N/m) at mid radius Wide Ring – Ring load (N/m) at outer radius

10 [0148] TABLE 5: EXEMPLARY MECHANICAL FORMULAS FOR PIEZOELECTRIC OUTPUT TRANSDUCERS

Type	Formulas	Comments
Simply Supported Bimorph Bender 400	Displacement per Volt $\frac{w}{\Delta V} = \frac{3}{16} n d_{31} \left(\frac{L}{h}\right)^2$ Capacitance	

	$C = 2n^2 \epsilon_0 \bar{\epsilon}_{33} b \left(\frac{L}{h}\right)$ <p>Stiffness</p> $\frac{F}{w} = 32E_{11} b \left(\frac{h}{L}\right)^3$ <p>1st Mechanical Resonance</p> $f_1 = \frac{(\pi)^2}{2\pi} \sqrt{\frac{E_{11} h^2}{3\rho L^4}}$	
Cantilevered Bimorph Bender 500	<p>Displacement per Volt</p> $\frac{w}{\Delta V} = \frac{3}{4} n d_{31} \left(\frac{L}{h}\right)^2$ <p>Capacitance</p> $C = 2n^2 \epsilon_0 \bar{\epsilon}_{33} b \left(\frac{L}{h}\right)$ <p>Stiffness</p> $\frac{F}{w} = 2E_{11} b \left(\frac{h}{L}\right)^3$ <p>1st Mechanical Resonance</p> $f_1 = \frac{(1.875)^2}{2\pi} \sqrt{\frac{E_{11} h^2}{3\rho L^4}}$	
Stack (shown with displacement amplifier) 600	<p>Displacement per Volt</p> $\frac{w}{\Delta V} = n d_{33}$ <p>Stiffness</p> $\frac{F}{w} = \frac{E_{33} b^3}{L}$ <p>Capacitance</p> $C = \frac{n \epsilon_0 \bar{\epsilon}_{33} b^2}{h}$ <p>1st Mechanical Resonance</p> $f_1 = \frac{1}{4L} \sqrt{\frac{E_{33}}{\rho}}$	The 1 st mechanical resonance equation may be the ¼ wave “rod” resonance which can tend to be very high. This may not be the first resonance of the system. The most likely 1 st mode may be the mass of the piezo/ref mass in conjunction with the spring of the displacement amplifier or some kind of bending mode.
Narrow Ring (shown with displacement amplifier) 700	<p>Displacement per Volt</p> $\frac{w}{\Delta V} = n d_{31} \left(\frac{r_o}{h}\right)$ <p>Stiffness</p> $\frac{F}{w} = \frac{E_{11} t}{r_o \left(\frac{h}{r_o}\right)}$ <p>Capacitance</p> $C = n^2 \epsilon_0 \bar{\epsilon}_{33} 2\pi t \left(\frac{r_o}{h}\right)$ <p>1st Mechanical Resonance</p>	<p>Remember for ring cases that F is a ring load (N/m) that will be summed by the displacement amplifier.</p> <p>The appropriate 1st mechanical resonance mode may not be clear. Likely the first resonance may either be a bending type mode or a $\cos(2\theta)$ mode.</p>
Wide Ring	<p>Displacement per Volt</p> $\frac{w}{\Delta V} = n d_{31} \left(\frac{b}{h}\right)$ <p>Stiffness</p> $\frac{F}{w} = \frac{E_{11} t}{b} \frac{(b^2 - a^2)}{(1 + \nu)a^2 + (1 - \nu)b^2}$ <p>Capacitance</p>	

	$C = n^2 \epsilon_0 \bar{\epsilon}_{33} \frac{\pi(b^2 - a^2)}{h}$	
	1 st Mechanical Resonance	

[0149] Fig. 10 shows an output transducer assembly comprising 1000 a cantilevered bimorph bender positioned on a support 1010 such that the output transducer assembly is positioned over the lateral process and away from the umbo when the support is placed on the eardrum, suitable for incorporation with transducer assembly 30 as described above. Many of the output transducers as described above can be positioned on support 1010 so as to couple to the umbo of the eardrum TM with the transducer positioned away from the umbo, for example on the lateral process LP. The output transducer positioned on the support 1010 so as to couple to the umbo with the transducer positioned away from the umbo may comprise at least one of a piezoelectric transducer, a magnetostrictive transducer, a photostrictive transducer, a coil or a magnet. Support 1010 can be made with known methods of molding to manufacture a support customized to the ear of the user, for example as with the known EarLens. The transducers as described above, for example simply supported bimorph bender 400, cantilevered bimorph bender 500, cantilevered bimorph bender 550, stacked piezo with mechanical multiplier 600, ring piezo with mechanical multiplier 700 and ring mass with bimorph piezoelectric transducer 800 can be positioned on support 1010 so as to position the transducer at the desired location on the eardrum when support 1010 is placed against tympanic membrane TM. As shown in Fig. 10, the transducer may comprise cantilevered bimorph bender 500 on support 1010 and coupled to eardrum TM over the lateral process LP and away from the umbo UM. Cantilevered bimorph bender 500 can be placed on the support so as to align with malleus ML when the support is placed against the eardrum. For example, support 530 of cantilevered bimorph bender 500 can be positioned on support 1010 to conform to the portion of the eardrum TM over the lateral process LP when support 1010 is placed against the eardrum TM. In some embodiments, support 530 can be placed directly on the eardrum without support 1010, for example directly over the lateral process LP. Mass 510 of cantilevered bimorph bender 500 may be placed along the eardrum away from the umbo U of the eardrum TM so as to decrease a mechanical impedance of the support to sound transmitted with the eardrum TM. Cantilever 520 has a first end coupled to mass 510 and a second end coupled to support 530. Cantilever 520 may bend and push against mass 510 and cause a force on support 530 which drives the lateral process LP of the malleus ML to produce sensations of sound.

[0150] Figs. 10A and 10B show an output transducer assembly 1050 suitable for incorporation with transducer assembly 30 as described above and comprising cantilevered bimorph bender 500 placed on a support 1060 which may be made from a mold of the user's ear. The output transducer positioned on the support 1060 may comprise at least one of a piezoelectric transducer, a magnetostrictive transducer, a photostrictive transducer, a coil or a magnet. Support 530, mass 510 and the elongate member comprising bimorph cantilever 520 of bimorph bender 500 are positioned on support 1060 such that mass 510 is positioned away from the umbo and the elongate member is coupled to the umbo when support 1060 is placed against eardrum TM. The elongate member, for example bimorph cantilever 520, extends from the mass supported on the lateral process to the umbo so as to couple to the motion of the transducer to the eardrum at the umbo. This configuration has the advantage of lowering the mechanical impedance with the mass positioned away from the umbo while providing mechanical leverage with coupling at the umbo.

[0151] The mass can be positioned away from the umbo and/or aligned with the malleus ML in many ways so as to reduce the input impedance of the transducer assembly. For example, mass 510 can be positioned on support 1060 such that mass 510 is supported with the lateral process LP when support 1060 is placed against the ear. Also cantilevered bimorph bender 500 and support 530 can be placed directly on the eardrum TM such that mass 510 is aligned with malleus ML, for example aligned with lateral process LP. As shown in Figs. 10A and 10B, mass 510 is placed on support 1060 over the lateral process LP and support 530 is placed on support 1060 over the umbo U when support 1060 is placed against the eardrum TM. The elongate member comprising bimorph cantilever 520 has a first end coupled to mass 510 and a second end coupled to support 530. Cantilever 520 may bend and push against mass 510 and cause a force on support 530 which drives the tip T of the malleus ML to produce sensations of sound. The length of cantilever 520 may be provided with a longer length such that cantilever 520 can provide more mechanical leverage while reducing the input impedance of mass 510.

[0152] Fig. 11 shows two or more transducers positioned on a support 1130 so as to rotate the malleus with hinged rotation at low frequencies and twist the malleus at high frequencies and suitable for incorporation with transducer assembly 30 as described above. Many of the above described transducers can be placed on support 1130. For example, embodiments of cantilevered bimorph bender 550 and bimorph or wide ring piezo 800 may cause a twisting motion on the eardrum TM and thus the malleus ML. Placement of two or more output

transducers, on different parts of the eardrum TM can also produce a rotational or twisting motion on the eardrum TM at the umbo and the malleus ML. The placed output transducers may comprise, for example, at least one of simply supported bimorph bender 400, cantilevered bimorph bender 500, stacked piezo with mechanical multiplier 600, disk or narrow ring piezo with a mechanical multiplier 700, and bimorph or wide ring piezo 800. For example, Figs. 11 and 11A show two cantilevered bimorph benders 500A and 500B configured to couple to the umbo of the eardrum TM on opposite lateral sides over the tip T of malleus ML. Cantilevered bimorph benders 500A and 500B each comprise masses 510A and 510B, respectively, and bimorph cantilevers 520A and 520B, respectively, and may both be supported with a common support 530 and/or support 1130 which also supports masses 510A and 510B. Each of bimorph cantilevers 520A and 520B comprises an elongate member that extends from the mass to the umbo to couple to the eardrum at the umbo. A phase difference, as described above, between bimorphs 500A and 500B may cause malleus ML to twist. Masses 510A and 510B are positioned on support 1130 such that masses 510A and 510B are supported with the lateral process when support 1130 is placed against eardrum TM. Output transducers may be placed on other areas of the eardrum TM as well, for example at additional locations away from the umbo as described above. In some embodiments, support 530 can be coupled directly to eardrum TM, for example without support 1130.

[0153] Many of the above embodiments can be evaluated on an empirical number of patients, for example 10 patients to optimize the transducers, for example transducer mass, positioning, support and circuitry. For example, experiments can be conducted on an empirical number of ten patients to determine improved coupling of sound with differential movement of the first transducer and second transducer. In addition to testing with patients, the embodiments can be tested with computer simulations and laboratory testing. The below described experiments are merely examples of experiments that can be performed, and a person of ordinary skill in the art will recognize many variations and modifications that can be used to improve and optimize the performance of the transducer devices described herein.

[0154] IV. EXPERIMENTAL

[0155] For exemplary piezoelectric elements, five key characteristics were looked at as a function of geometric parameters. The five parameters were: 1) minimum manufacturable layer thickness, 2) electrical capacitance, 3) 1st mechanical resonant frequency (if available), 4) low frequency stiffness, and 5) maximum displacement achievable with a photodetector power source. For each exemplary piezoelectric element, a contour plot of the maximum

displacement achievable at 2 kHz was made. Fig. 12 shows an exemplary contour map for an embodiment of a back-to-back amplified stack piezoelectric elements, a PZT506 back-to-back stack with displacement amplifier. Similar plots can be made for additional embodiments comprising the simply supported bimorph piezoelectric elements, for example a PZT506 simply supported bimorph, a TRS singly crystal simply supported bimorph, and a PVDF simply supported bimorph piezoelectric elements. Fig. 12 includes combinations of different numbers of photodetectors used to power the piezoelectric element and the width of the piezoelectric element. The displacement shown accounts for the electrical limitations of the photovoltaic power source as well as any mismatch between the impedance of the umbo and the stiffness of the driving piezo. Equation 1 and Table 6 below show the equation for the maximum displacement and the parameter definitions.

[0156] EQUATION 1:

$$d_{max} = \left(\frac{d}{V}\right)R \left(\frac{K_{pz}}{K_{pz} + R^2 Z_{umbo}}\right) \min\left(N_{PD} V_{max}, \frac{I_{max}}{2\pi f_1 C}\right)$$

15 [0157] TABLE 6: EXEMPLARY TEST PARAMETERS

Parameter	Value
f_{max}	Maximum frequency of interest (10 kHz)
f_1	2 kHz – frequency used to optimize design
R	Lever ratio
K_{pz}	Low frequency stiffness of piezo
Z_{umbo}	Impedance of umbo at f_1
$\frac{d}{V}$	Displacement per volt of a given design
N_{PD}	Number of photocells in series
V_{max}	Maximum voltage of single photocell (0.4 V)
I_{max}	Maximum current of single photocell given the illumination constraints (224 uA)
C	Capacitance of a given design
$\min(x, y)$	Minimum function which takes the minimum of the two arguments (x,y)

[0158] On top of the contour map shown, other parameters are shown as "constraint lines". For example, the minimum manufacturable thickness is represented as a line. Any design point falling below or to the right of this line may be achievable. Any design point falling

above or to the left calls for a layer thickness that is not currently available from any of the contacted vendors. Often, only integer numbers of layers are possible. Similarly, the capacitance is shown in a line. Any design falling below or to the right of this line has less than the optimal capacitance for 2 kHz. Any design above or to the left has a higher capacitance. At this point, one must remember that the displacement contours are shown at 2 kHz. At different frequencies, there will be a different optimal capacitance (Optimizing for higher frequencies will require smaller capacitances.) Designs that have a 1st mechanical resonance of 10 kHz are shown as a line. Designs to the right have higher resonant frequencies; designs to the left have lower resonant frequencies. Designs that have a low frequency stiffness equal to the umbo stiffness at 10 kHz are shown with a line. Designs to the right have higher stiffnesses, designs to the left have lower stiffnesses. In exemplary embodiments, piezoelectric element parameters that are below and to the right of all the constraint lines while at the same time maximizing location on the displacement contour are chosen. Contour maps can be made for embodiments of bimorph piezoelectric transducers using the parameters set forth in Table 7.

[0159] TABLE 7: EXEMPLARY TEST PARAMETERS FOR BIMORPH PIEZOELECTRICS

Parameter	PZT506	TRS – Single Crystal	PVDF
E_{11}	64.5 GPa	11.6 GPa	3.0 GPa
d_{31}	225 pm/V	1000 pm/V	20 pm/V
$\bar{\epsilon}_{33a}$	2250	7700	12
ρ	8000 Kg/m ³	7900 Kg/m ³	1780 Kg/m ³
Minimum layer thickness	20 um	140 um	2 um
Lever Ratio	1.0	1.0	1.0
L	5 mm	5 mm	5 mm

[0160] Contour maps can be made for embodiments of simply supported bimorph piezoelectrics using the parameters set forth in Table 8. The bimorph with the greatest displacement that meets all of the constraints may be selected. Exemplary embodiments SSBM1, SSBM2, SSBM3, SSBM4, SSBM5, SSBM6, SSBM7, SSBM8, SSBM12, SSBM15, and SSBM18 give displacements greater than 0.1 um at 2 kHz.

[0161] TABLE 8 - DISPLACEMENT MEASUREMENTS FOR EXEMPLARY BIMORPH PIEZOELECTRIC EMBODIMENTS

Embodiment	Material	Beam width	Number of photodetectors	Beam 1/2 thickness	Number of layers	Layer thickness	Maximum displacement
SSBM1	PZT506	0.5	1	120 um	6	20 um	0.15 um

		mm					
SSBM2	PZT506	0.5 mm	2	120 um	4	30 um	0.16 um
SSBM3	PZT506	0.5 mm	3	120 um	3	40 um	0.15 um
SSBM4	PZT506	1.0 mm	1	100 um	4	25 um	0.15 um
SSBM5	PZT506	1.0 mm	2	100 um	2	50 um	0.15 um
SSBM6	PZT506	1.0 mm	3	100 um	1	100 um	0.12 um
SSBM7	PZT506	1.5 mm	1	100 um	3	33 um	0.12 um
SSBM8	PZT506	1.5 mm	2	100 um	2	50 um	0.14 um
SSBM9	PZT506	1.5 mm	3	100 um	1	100 um	0.09 um
SSBM10	TRS-SC	0.5 mm	1	280 um	2	140 um	0.045 um
SSBM11	TRS-SC	0.5 mm	2	280 um	2	140 um	0.09 um
SSBM12	TRS-SC	0.5 mm	3	280 um	2	140 um	0.13 um
SSBM13	TRS-SC	1.0 mm	1	280 um	2	140 um	0.05 um
SSBM14	TRS-SC	1.0 mm	2	280 um	2	140 um	0.09 um
SSBM15	TRS-SC	1.0 mm	3	230 um	1	230 um	0.10 um
SSBM16	TRS-SC	1.5 mm	1	280 um	2	140 um	0.045 um
SSBM17	TRS-SC	1.5 mm	2	230 um	1	230 um	0.07 um
SSBM18	TRS-SC	1.5 mm	3	230 um	1	230 um	0.10 um
SSBM19	PVDF	2.0 mm	2	210 um	34	6.2 um	0.045 um
SSBM20	PVDF	2.0 mm	3	210 um	16	13.1 um	0.045 um
SSBM21	PVDF	3.0 mm	2	210 um	27	7.8 um	0.04 um
SSBM22	PVDF	3.0 mm	3	210 um	14	15 um	0.04 um

[0162] The PZT506 material appears to be the suitable for making the bimorph. Its combination of thin layer thicknesses, high piezoelectric constants and moderate permittivity provides a suitable best output. Also, it appears that a wide range of beams all produce

roughly the same output, 0.1 5um. Choosing between these options can be based on tradeoffs of manufacturing. For example, layers in the bimorph can be traded-off against segmenting the photodetector.

[0163] Contour maps can be made for embodiments of back-to-back amplified stack piezoelectric elements, a TRS single crystal back-to-back stack with displacement amplifier, respectively. A displacement amplified stack piezoelectric elements may comprise a scissor jack with two stacks placed back-to-back pushing outwards. In this configuration, the centerline of the assembly does not move. Therefore, the maximum stack length to consider for displacement purposes is 2.5 mm or half of the maximum allowable dimension.

However, the effective capacitance may be needed to account for both stacks. The lever ratio may be limited to be between 1 and 15. In between those limits, the stiffness of the stack can be matched to the impedance of the umbo at 10 kHz. Since the number of layers in a stack is high, the thickness of the glue/electrodes between layers may need to be considered. For example, a glue/electrode layer thickness of 16 um may be used. Like with simply supported bimorph piezoelectric elements above, amplified stack piezoelectric elements were analyzed at a variety of thicknesses and assuming various numbers of photodetectors in series. Neither the stiffness nor the 1st resonance of the stack was a limiting factor while layer thickness, capacitance and length may be limiting factors.

[0164] Table 9 below shows some exemplary ranges of parameters for embodiments of back-to-back amplified stack piezoelectric elements.

TABLE 9: EXEMPLARY TEST PARAMETERS FOR BACK-TO-BACK STACK PIEZOELECTRICS

Parameter	PZT506	TRS – Single Crystal
E_{11}	64.5 GPa	11.6 GPa
d_{33}	545 pm/V	1900 pm/V
$\bar{\epsilon}_{33}$	2250	7700
ρ	8000 Kg/m ³	7900 Kg/m ³
Minimum layer thickness	20 um	140 um
Lever Ratio	1.0 to 15.0	1.0 to 15
L	2.5 mm	2.5 mm

[0166] Table 10 below shows parameters for several embodiments of back-to-back amplified stack piezoelectric elements Both the single crystal material and the PZT506 material appear to have maximum outputs near 0.3um. Several embodiments of back-to-back

amplified stack piezoelectric elements produce similar amounts of displacement. Thus, there may be flexibility in manufacturing.

[0167] TABLE 10: DISPLACEMENT MEASUREMENTS FOR EXEMPLARY BACK-TO-BACK STACK PIEZOELECTRIC EMBODIMENTS

Material	Stack width	Number of photodetectors	Number of layers	Layer thickness	Maximum displacement
PZT506	0.5 mm	1	65	20 μ m	0.2 μ m
PZT506	0.5 mm	2	45	40 μ m	0.23 μ m
PZT506	0.5 mm	4	25	90 μ m	0.28 μ m
PZT506	0.75 mm	1	58	30 μ m	0.15 μ m
PZT506	0.75 mm	2	32	65 μ m	0.18 μ m
PZT506	0.75 mm	4	16	135 μ m	0.20 μ m
PZT506	1.0 mm	1	45	40 μ m	0.13 μ m
PZT506	1.0 mm	2	25	70 μ m	0.15 μ m
PZT506	1.0 mm	4	12	180 μ m	0.16 μ m
TRS-SC	0.5 mm	1	17	140 μ m	0.1 μ m
TRS-SC	0.5 mm	2	17	140 μ m	0.2 μ m
TRS-SC	0.5 mm	4	14	170 μ m	0.31 μ m
TRS-SC	0.75 mm	1	17	140 μ m	0.14 μ m
TRS-SC	0.75 mm	2	17	140 μ m	0.28 μ m
TRS-SC	0.75 mm	4	9	260 μ m	0.31 μ m
TRS-SC	1.0 mm	1	17	140 μ m	0.15 μ m
TRS-SC	1.0 mm	2	14	175 μ m	0.25 μ m
TRS-SC	1.0 mm	4	7	350 μ m	0.28 μ m

5

[0168] Embodiments of piezoelectric elements were also tested using a laser vibrometer to measure the velocity (and hence the displacement) of a target. Data was analyzed to yield displacement per volt and plotted versus frequency. Data was determined using the equations mentioned above and plotted alongside the test data.

10 [0169] A single Morgan stacked as shown in Fig. 13A was tested. The parameters for the single Morgan stack piezo are shown in Table 11 below. A plot of the test data, including displacement versus voltage, is shown in Fig. 13B.

[0170] TABLE 11: EXEMPLARY PARAMETERS FOR MORGAN STACKED PIEZO

Parameter	Value
Material	Morgan PZT506
Piezo Dimensions	1 x 1 x 1.8mm
Layer Thickness	20 μ m
Number of Layers	50
E11	6.45e10
d33	545e-12
d31	-225e-12

Density	8000
Relative Permittivity	2250
Kp (coupling factor)	0.70
Input Voltage	1V
Input Frequency range	100-20000Hz
Measured capacitance	52nF
Calculated capacitance	49.8nF

[0171] A Steiner and Martins cofired Piezo series bimorph as shown in Fig. 14A was tested. The parameters for the single Morgan stack are shown in Table 12 below. A plot of the test data, including displacement versus voltage, is shown in Fig. 14B. Affixing the piezo using a flexible material increased the vibrational displacement by a few dB.

[0172] TABLE 12: EXEMPLARY PARAMETERS FOR STEINER AND MARTINS COFIRED PIEZO - SERIES BIMORPH

Parameter	Value
Material	STEMInc SMQA
Piezo Dimensions	7mm x 7mm
Layer Thickness	200 μ m
E11	8.6e10
d33	310e-12
d31	-140e-12
Density	7900
Relative Permittivity	1400
Kp (coupling factor)	0.58
Input Voltage	1V
Input Frequency range	100-20000Hz
Measured capacitance	1.4nF
Calculated capacitance	1.4nF

[0173] A TRS Single Crystal Bimorph Cantilever as shown in Fig. 15A was tested. The parameters for the single Morgan stack are shown in Table 13 below. The parameters may comprise known parameters and can be measured by one of ordinary skill in the art. A plot of the test data, including displacement versus voltage, is shown in Fig. 15B

[0174] TABLE 13: EXEMPLARY PARAMETERS FOR TRS SINGLE CRYSTAL BIMORPH CANTILEVER

Parameter	Value
Material	TRS single crystal
Piezo Dimensions	6mm x 6mm
Layer Thickness	140 μ m

E11	1.16e10
d33	1900e-12
d31	-1000e-12
Density	7900
Relative Permittivity	7700
Input Voltage	1V
Input Frequency range	100-20000Hz
Measured capacitance	nF
Calculated capacitance	35nF

[0175] A TRS Single Crystal Bimorph on a washer as shown in Fig. 16A was tested. The parameters for the single Morgan stack are shown in Table 14 below. A plot of the test data, including displacement versus voltage, is shown in Fig. 16B In this test, the resonance is in the predicted frequency but the magnitude is off by nearly 20dB. The capacitance is also off, so the piezo may be damaged.

[0176] TABLE 14: EXEMPLARY PARAMETERS FOR TRS SINGLE CRYSTAL ON WASHER

Parameter	Value
Material	TRS single crystal
Piezo Dimensions	1mm x 5mm
Layer Thickness	140µm
E11	1.16e10
d33	1900e-12
d31	-1000e-12
Density	7900
Relative Permittivity	7700
Input Voltage	1V
Input Frequency range	100-20000Hz
Measured capacitance	3.6nF
Calculated capacitance	4.2nF

[0177] A stacked piezo pair with V-jack type displacement amplification as shown in Fig. 17A was tested. The parameters for the single Morgan stack are shown in Table 15 below. A plot of the test data, including displacement versus voltage, is shown in Figs. 17B and 17C. In this test, an additional resonance appears which may most likely a resonance in the mechanical lever.

[0178] TABLE 15: EXEMPLARY PARAMETERS FOR STACKED PIEZO PAIR WITH V-JACK DISPLACEMENT AMPLIFICATION

Parameter	Value
-----------	-------

Material	Morgan PZT506
Piezo Dimensions	1 x 1 x 3.6 mm
Lever angle, lever ratio	3.5°, 16X
Layer Thickness	20µm
Number of Layers	100
E11	6.45e10
d33	545e-12
d31	-225e-12
Density	8000
Relative Permittivity	2250
Kp (coupling factor)	0.70
Input Voltage	1V
Input Frequency range	100-20000Hz
Measured capacitance	104nF
Calculated capacitance	99.6nF

[0179] Embodiments of output transducers which were placed on a subject's eardrum were tested. The transducer was wire driven, connected directly to the audiometer to determine the acoustic threshold. In order to reduce the effect of the wires, 48 AWG wire was used between
5 the transducer and a location just outside the ear canal. The position of the transducer was verified by a physician using a video otoscope.

[0180] Once in place, the audiometer driven transducer was energized across a 12kΩ load and the audiometer setting adjusted to reach threshold. The threshold was recorded at each frequency tested. After the testing was complete and the transducer removed from the
10 subject's ear, the transducer was reconnected to the audiometer and the voltage measured. Often, the audiometer setting was increased by 40dB to make a reliable measurement.

[0181] The data collected was converted to pressure equivalent using Minimum Audible Pressure curves and plotted against the specifications, bench-top data and average electromagnetic or EM system output. In all cases, the assumption is that the input to the
15 transducer is 0.4V peak and 75mW. The bench-top data was determined by measuring the unloaded displacement and comparing to the known displacement of the umbo at each frequency plotted.

[0182] In addition to the threshold measurements, the feedback pressure was measured at two locations: at the umbo and at the entrance to the ear canal. Often, the transducer was
20 driven by a laptop running SYSid, and operated at 1V peak, with the feedback measured with an ER-7c microphone. The resulting data gives a measure of the gain margin for each

transducer design/location if the microphone is located either deep in the canal or at the canal entrance.

[0183] Figs. 18A-20B show peak power output and feedback for the tested embodiments of output transducers. Although an idealized target peak power output of 106 dB is shown for purposes of comparison, peak power outputs of less than 106 dB, for example 80 or 90 dB at 10kHz, can provide improved hearing for many patients. Figs. 18A and 18B show peak power output and feedback, respectively, of a TRS single crystal bimorph placed on the umbo. The on ear results match the bench top predictions up to 2kHz, then diverge, with the on-ear results remaining flat up to 12kHz. The umbo located transducer used a different piezo than the center of pressure located transducer.

[0184] Figs. 19A and 19B show peak power output and feedback, respectively, of a TRS single crystal bimorph placed on the center of pressure of the eardrum. The on ear results match the bench top predictions up to 2kHz, then diverge, with the on-ear results remaining flat up to 12kHz. Employing feedback cancellers or other feedback handling techniques, or moving the microphone location can improve the power output and feedback profiles.

[0185] Figs. 20A and 20B show peak power output and feedback, respectively, of a stacked piezo pair with V-jack type displacement amplification placed on the center of pressure of the eardrum. The 100nF piezo load causes the PV system to be current limited starting at a low frequency. The overall equivalent pressure per volt (when not current limited) is better than the bimorph case by about 20dB.

[0186] While the above is a complete description of the preferred embodiments of the invention, various alternatives, modifications, and equivalents may be used. Therefore, the above description should not be taken as limiting in scope of the invention which is defined by the appended claims.

25

WHAT IS CLAIMED IS:

- 1 L A device to transmit an audio signal to a user, the user having an ear
2 comprising an eardrum, the device comprising:
3 a mass;
4 a piezoelectric transducer; and
5 a support to support the mass and the piezoelectric transducer with the
6 eardrum, the piezoelectric transducer configured to drive the support and the eardrum with a
7 first force and the mass with a second force, the second force opposite the first force.
- 1 2. The device of claim 1 wherein the piezoelectric transducer is disposed
2 between the mass and the support.
- 1 3. The device of claim 1 further comprising at least one flexible structure
2 disposed between the piezoelectric transducer and the mass.
- 1 4. The device of claim 1 wherein the piezoelectric transducer is
2 magnetically coupled to the support.
- 1 5. The device of claim 1 wherein the piezoelectric transducer comprises a
2 first portion connected to the mass and a second portion connected to the support to drive the
3 mass opposite the support.
- 1 6. The device of claim 1 wherein the support comprises a first side
2 shaped to conform with the eardrum.
- 1 7. The device of claim 6 wherein a protrusion is disposed opposite the
2 first side and affixed to the piezoelectric transducer.
- 1 8. The device of claim 6 further comprising a fluid disposed between the
2 first side and the eardrum to couple the support to the eardrum, the fluid comprising a liquid
3 composed of at least one of an oil, a mineral oil, a silicone oil or a hydrophobic liquid.
- 1 9. The device of claim 6 wherein the support comprises a second side
2 disposed opposite the first side, the protrusion extending from the second side to the
3 piezoelectric transducer.

1 10. The device of claim 1 wherein the support comprises a first component
2 and a second component, the first component comprising a flexible material shaped to
3 conform to the eardrum and flex with motion of the eardrum, the second component
4 comprising a rigid material extending from the transducer to the flexible material to transmit
5 first force to the flexible material and the eardrum.

1 11. The device of claim 10 wherein the rigid material comprises at least
2 one of a metal, titanium, a stainless steel or a rigid plastic and wherein the flexible material
3 comprises at least one of a silicone, a flexible plastic or a gel.

1 12. The device of claim 1 further comprising a housing, the housing rigidly
2 affixed to the mass to move the housing and the mass opposite the support.

1 13. The device of claim 12 wherein the support comprises a rigid material
2 that extends through the housing to the transducer to move the mass and the housing opposite
3 the support.

1 14. The device of claim 1 wherein the mass comprises circuitry coupled to
2 the transducer and supported with the support and the transducer, the circuitry configured to
3 receive wireless power and wireless transmission of the audio signal to drive the transducer in
4 response to the audio signal.

1 15. The device of claim 1 wherein the piezoelectric transducer comprises
2 at least one of a piezoelectric unimorph transducer, bimorph-bender piezoelectric transducer,
3 a piezoelectric multimorph transducer, a stacked piezoelectric transducer with a mechanical
4 multiplier or a ring piezoelectric transducer with a mechanical multiplier.

1 16. The device of claim 15 wherein the piezoelectric transducer comprises
2 the bimorph-bender piezoelectric transducer and the mass comprises a first mass and a
3 second mass, and wherein the bimorph bender comprises a cantilever extending from a first
4 end supporting the first mass to a second end supporting the second mass, and wherein the
5 support is coupled to the cantilever between the first end and the second end to drive the ear
6 drum with the first force and drive the first mass and the second mass with the second force.

1 17. The device of claim 15 wherein the piezoelectric transducer comprises
2 the stacked piezoelectric transducer with the mechanical multiplier and wherein the

3 mechanical multiplier comprises a first side coupled to the support to drive the eardrum with
4 the first force and a second side coupled to the mass to drive the mass with the second force.

1 18. The device of claim 15 wherein the piezoelectric transducer comprises
2 the ring piezoelectric transducer with the mechanical multiplier and wherein the mechanical
3 multiplier comprises a first side and a second side, the first side extending inwardly from the
4 ring piezoelectric transducer to the mass, the second side extending inwardly toward a
5 protrusion of the support, and wherein the mass moves away from the protrusion of the
6 support when the ring contracts and toward the protrusion of the support when the ring
7 expands.

1 19. The device of claim 18, wherein ring piezoelectric multiplier defines a
2 center having central axis extending there through and wherein the central protrusion and the
3 mass are disposed along the central axis.

1 20. The device of claim 15 wherein the piezoelectric transducer comprises
2 the bimorph bender and wherein the mass comprises a ring having a central aperture formed
3 thereon and wherein the bimorph bender extends across the ring with a first end and a second
4 end coupled to the ring and wherein the support extends through the aperture and connects to
5 the piezoelectric transducer between the first end and the second end to move the support
6 opposite the ring when the bimorph bender bends.

1 21. The device of claim 20, wherein bimorph bender is connected to the
2 ring with an adhesive on the first end and the second end such that the first end and the
3 second end are configured to move relative to the ring with shear motion when the bimorph
4 bender bends to drive the support opposite the ring.

1 22. A device to transmit an audio signal to a user, the user having an ear
2 comprising an eardrum, the device comprising:

3 a transducer;

4 circuitry coupled to the transducer, the circuitry configured to receive at least
5 one of wireless power or wireless transmission of the audio signal to drive the transducer in
6 response to the audio signal; and

7 a support configured to couple to the eardrum and support the circuitry and the
8 transducer with the eardrum.

1 23. The device of claim 22 wherein the transducer is configured to drive
2 the support and the eardrum with a first force and drive the circuitry with a second force, the
3 second force opposite the first force.

1 24. The device of claim 23 wherein the circuitry is rigidly attached to a
2 mass and coupled to the transducer to drive the circuitry and the mass with the first force.

1 25. The device of claim 23 wherein the circuitry is rigidly attached to a
2 mass and coupled to the transducer to drive the circuitry and the mass with the second force.

1 26. The device of claim 22 wherein the circuitry is flexibly attached to a
2 mass and coupled to the transducer to drive the circuitry and the mass with the first force.

1 27. The device of claim 26 wherein the circuitry is flexibly attached to a
2 mass and coupled to the transducer to drive the circuitry and the mass with the second force.

1 28. The device of claim 22 wherein the circuitry comprises at least one of
2 a photodetector a coil supported with the support and coupled to the transducer to drive the
3 transducer with the at least one of the wireless power or wireless transmission of the audio
4 signal.

1 29. The device of claim 22 wherein the transducer comprises at least one
2 of a piezoelectric transducer, a magnetostrictive transducer, a magnet or a coil.

1 30. A device to transmit an audio signal to a user, the user having an ear
2 comprising an eardrum having a mechanical impedance, the device comprising:
3 a transducer; and
4 a support to support the transducer with the eardrum, wherein a combined
5 mass of the support and the transducer supported thereon is configured to match the
6 mechanical impedance of the eardrum for at least one audible frequency between about 0.8
7 kHz and about 10 kHz.

1 31. The device of claim 30 wherein the combined mass comprises no more
2 than about 50 mg.

1 32. The device of claim 31 wherein the combined mass is within a range
2 from about 10 mg to about 40 mg.

1 33. The device of claim 30 wherein the combined mass comprises at least
2 one of a mass from circuitry to drive the transducer, a mass from a housing disposed over the
3 transducer or a metallic mass coupled to the transducer opposite the support.

1 34. The device of claim 33 wherein the transducer, the circuitry to drive
2 the transducer, the housing disposed over the transducer and the metallic mass are supported
3 with eardrum when the support is coupled to the eardrum.

1 35. The device of claim 30 wherein the at least one audible frequency is
2 between about 1 kHz and about 6 KHz.

1 36. The device of claim 30 wherein the transducer and the mass are
2 positioned on the support to place at least one of the transducer or the mass away from an
3 umbo of the eardrum when the support is placed on the eardrum, so as to decrease a
4 mechanical impedance of the support to sound transmitted with the eardrum when the support
5 is positioned on the eardrum.

1 37. The device of claim 30 wherein the piezoelectric transducer comprises
2 a stiffness and wherein the stiffness of the piezoelectric transducer is matched to the
3 mechanical impedance of the eardrum for the at least one audible frequency.

1 38. The device of claim 30 wherein the eardrum comprises an umbo and
2 the acoustic input impedance comprises an acoustic impedance of the umbo and wherein the
3 stiffness of the piezoelectric transducer is matched to the acoustic input impedance of the
4 umbo.

1 39. A device to transmit an audio signal to a user, the user having an ear
2 comprising an eardrum and a malleus connected to the ear drum at an umbo, the device
3 comprising:

4 a transducer; and

5 a support to support the transducer with the eardrum, the transducer
6 configured to drive the eardrum and wherein the transducer is positioned on the support to
7 extend away from the umbo when the support is placed on the eardrum.

1 40. The device of claim 39 further comprising a mass positioned on the
2 support for placement away from the umbo when the support is placed against the eardrum

3 and wherein the transducer extends between the mass and a position on the support that
4 corresponds to the umbo so as to couple vibration of the transducer to the umbo.

1 41. The device of claim 40 wherein the mass is positioned on the support
2 to align the mass with the malleus away from the umbo when the support is placed against
3 the eardrum.

1 42. The device of claim 39 wherein the transducer is positioned on the
2 support so as to decrease a first movement of the transducer relative to a second movement of
3 the umbo when the eardrum vibrates and to amplify the second movement of the umbo
4 relative to the first movement of the transducer when the transducer vibrates.

1 43. The device of claim 42 wherein first movement of the transducer is no
2 more than about 75 % of the second movement of the umbo and wherein the second
3 movement of the umbo is at least about 25% more than the first movement of the transducer.

1 44. The device of claim 43 wherein first movement of the transducer is no
2 more than about 67 % of the second movement of the umbo and wherein the second
3 movement of the umbo is at least about 50% more than the first movement of the transducer.

1 45. The device of claim 39 further comprising a mass, wherein the
2 transducer is disposed between the mass and the support.

1 46. The device of claim 39 wherein the support is shaped to the eardrum of
2 the user to position the support on the eardrum in a pre-determined orientation and wherein
3 the transducer is positioned on the support to align the transducer with a malleus of the user
4 with the eardrum disposed between the malleus and the support when the support is placed on
5 the eardrum.

1 47. The device of claim 46 wherein the support comprises a shape from a
2 mold of the eardrum of the user.

1 48. The device of claim 46 wherein the transducer is positioned on the
2 support to place the transducer away from a tip of the malleus when the support is placed on
3 the eardrum.

1 49. The device of claim 46 wherein the malleus comprises a head and a
2 handle, the handle extending from the head to a tip near the umbo of the eardrum, and
3 wherein the transducer is positioned on the support to place the transducer away from the tip
4 when the support is positioned on the eardrum.

1 50. The device of claim 46 wherein the transducer is positioned on the
2 support to align the transducer with the lateral process of the malleus with the eardrum
3 disposed between the lateral process and the support when the support is placed on the
4 eardrum.

1 51. The device of claim 50 wherein the support comprises a rigid material
2 that extends from the transducer toward the lateral process to move the lateral process
3 opposite the mass.

1 52. The device of claim 39 wherein the transducer comprises at least one
2 of a piezoelectric transducer, a magnetostrictive transducer, a photostrictive transducer, a coil
3 or a magnet.

1 53. The device of claim 52 wherein the transducer comprises the
2 piezoelectric transducer and wherein the piezoelectric transducer comprises a cantilevered
3 bimorph bender, the cantilevered bimorph bender having a first end anchored to the support
4 and a second end attached to a mass to drive the mass opposite the lateral process when the
5 support is placed on the eardrum.

1 54. The device of claim 39 further comprising:
2 a mass coupled to the piezoelectric transducer; and
3 circuitry coupled to the transducer to drive the transducer, the mass and the
4 circuitry supported with the eardrum when the support is placed on the ear;
5 wherein the support, the transducer, the mass and the circuitry comprise a
6 combined mass of no more than about 60 mg.

1 55. The device of claim 54 wherein the support, the circuitry, the mass,
2 and the piezoelectric transducer comprise a combined mass of no more than about 40 mg.

1 56. The device of claim 55 wherein the support, the circuitry, the mass,
2 and the piezoelectric transducer comprise a combined mass of no more than about 30 mg.

1 57. A device to transmit an audio signal to a user, the user having an ear
2 comprising an eardrum, the device comprising:
3 a first transducer;
4 a second transducer; and
5 a support to support the first transducer and the second transducer with the
6 eardrum when the support is placed against the eardrum, the first transducer positioned on the
7 support to couple to a first side of the malleus, the second transducer positioned on the
8 support to couple to a second side of the malleus.

1 58. The device of claim 57 wherein the first transducer is positioned on the
2 support to couple to the first side of the malleus and the second transducer is positioned on
3 the support to couple to the second side of the malleus which is opposite the first side of the
4 malleus.

1 59. The device of claim 57 wherein the support comprises a first
2 protrusion extending to the first transducer to couple the first side of the malleus to the first
3 transducer and a second protrusion extending to the second transducer to couple the second
4 side of the malleus to the second transducer.

1 60. The device of claim 57 wherein the first transducer and second
2 transducer are positioned on the support and configured to twist the malleus with a first
3 rotation about an elongate longitudinal axis of the malleus when the first transducer and
4 second transducer move in opposite directions.

1 61. The device of claim 60 the first transducer and second transducer are
2 positioned on the support and configured to rotate the malleus with a second hinged rotation
3 when the first transducer and second transducer move in similar directions.

 62. The device of claim 57 further comprising circuitry coupled to the first
transducer and the second transducer, the circuitry configured to generate a first signal to
drive the transducer and a second signal to drive the second transducer.

 63. The device of claim 62 wherein the circuitry is configured to generate
the first signal at least partially out of phase with the second signal and drive the malleus with
a twisting motion.

64. The device of claim 62 wherein the circuitry is configured to drive the first transducer substantially in phase with the second transducer at a first frequency below about 1 kHz and wherein the circuitry is configured to drive the first transducer at least about ten degrees out of phase with the second transducer at a second frequency above at least about 2 kHz.

65. The device of claim 62 wherein the first transducer comprises at least one of a first piezoelectric transducer, a first coil and magnet transducer, a first magnetostrictive transducer or a first photostrictive transducer and wherein the second transducer comprises at least one of a second piezoelectric transducer, a second coil and magnet transducer, a second magnetostrictive transducer or a second photostrictive transducer.

1 66. A method of transmitting an audio signal to a user, the user having an
2 ear comprising an eardrum, the method comprising:
3 supporting a mass and a piezoelectric transducer with a support on the
4 eardrum of the user;
5 driving the support and the eardrum with a first force and the mass with a
6 second force, the second force opposite the first force.

1 67. The method of claim 66 wherein the ear comprises a mechanical
2 impedance and wherein the mass, the piezoelectric transducer and the support comprise a
3 combined mechanical impedance and wherein the combined mechanical impedance matches
4 the mechanical impedance of the eardrum for at least one audible frequency within a range
5 from about 1 kHz to about 6 KHz.

1 68. A method of transmitting an audio signal to a user, the user having an
2 ear comprising an eardrum, the method comprising:
3 supporting circuitry and a transducer coupled to the circuitry with the
4 eardrum; and
5 transmitting the audio signal with a wireless signal to the circuitry to drive the
6 transducer in response to the audio signal.

1 69. A method of transmitting an audio signal to a user, the user having an
2 ear comprising an eardrum having a mechanical impedance, the method comprising:

3 supporting a transducer and a support coupled to the eardrum with the
4 eardrum, wherein a combined mass of the support and the transducer supported thereon
5 matches the mechanical impedance of the eardrum for at least one audible frequency between
6 about 0.8 kHz and about 10 kHz.

1 70. A method of transmitting an audio signal to a user, the user having an
2 ear comprising an eardrum and a malleus connected to the ear drum at an umbo, the method
3 comprising:

4 supporting a transducer with a support positioned on the eardrum;
5 vibrating the support and the eardrum with the transducer positioned away
6 from the umbo.

1 71. The method of claim 70 wherein a first movement of the transducer is
2 decreased relative to a second movement of the umbo when the eardrum is vibrated and
3 wherein the second movement of the umbo is amplified relative to the first movement of the
4 transducer.

1 72. A method of transmitting an audio signal to a user, the user having an
2 ear comprising an eardrum and a malleus connected to the eardrum at an umbo, the method
3 comprising:

4 supporting a first transducer and a second transducer with a support positioned
5 on the eardrum; and

6 driving the first transducer and the second transducer in response to the audio
7 signal to the twist the malleus such that the malleus rotates about an elongate longitudinal
8 axis of the malleus.

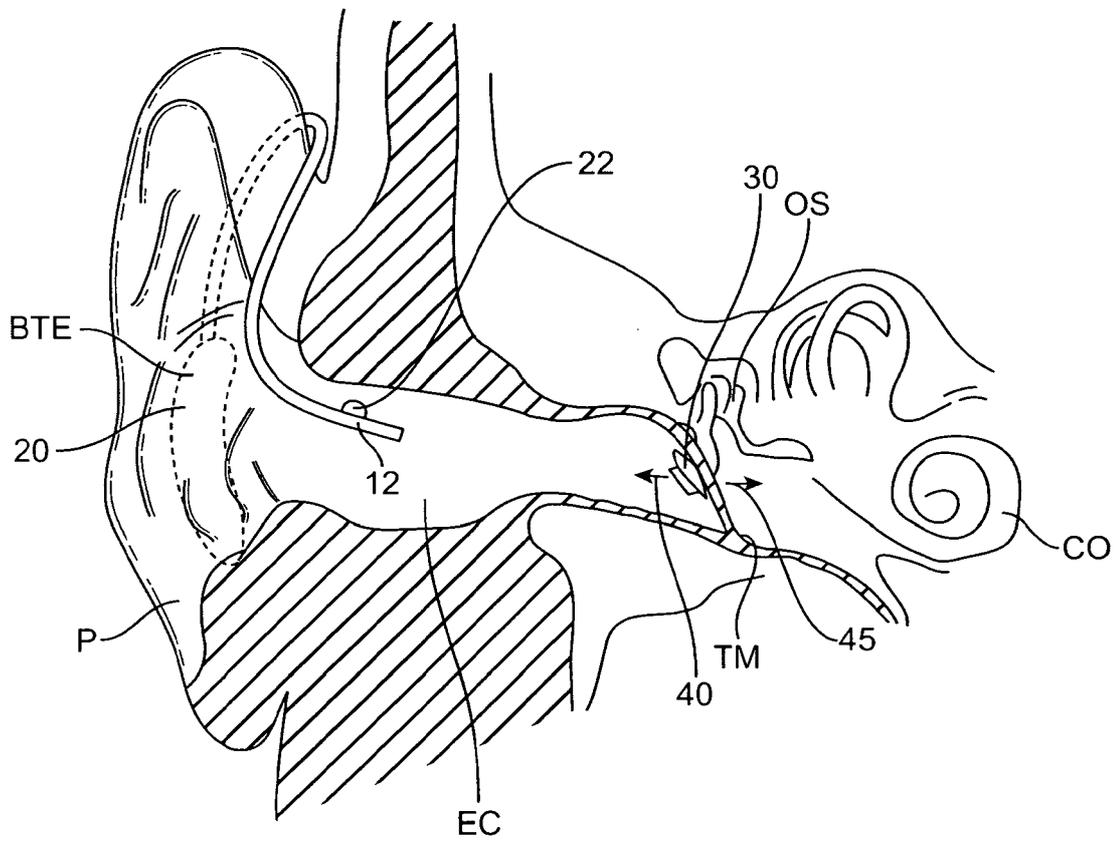


FIG. 1

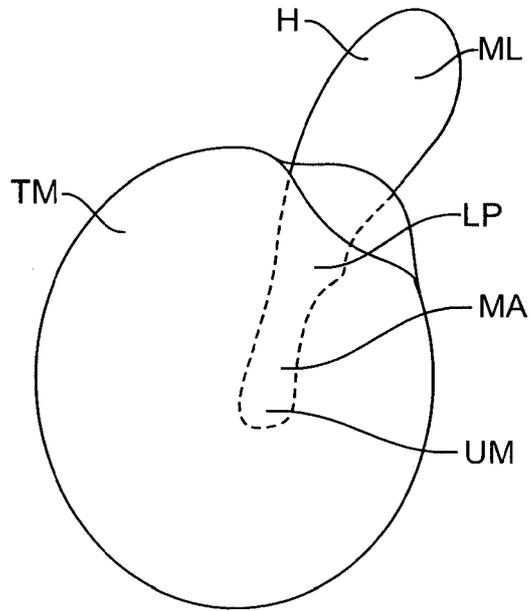


FIG. 1A

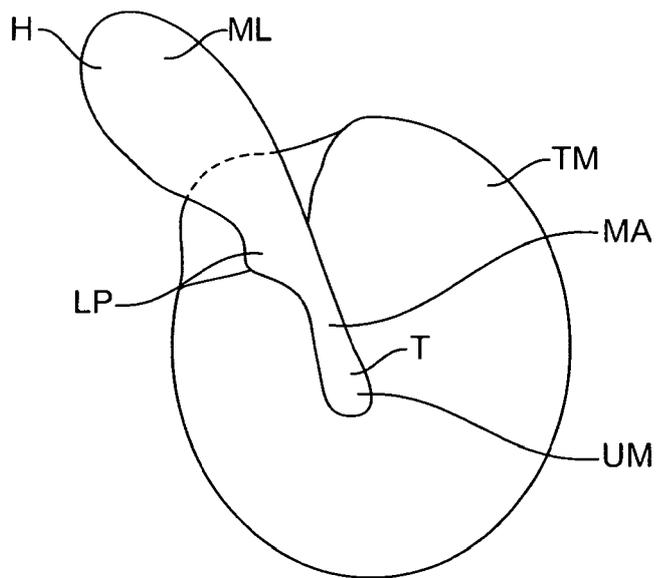


FIG. 1B

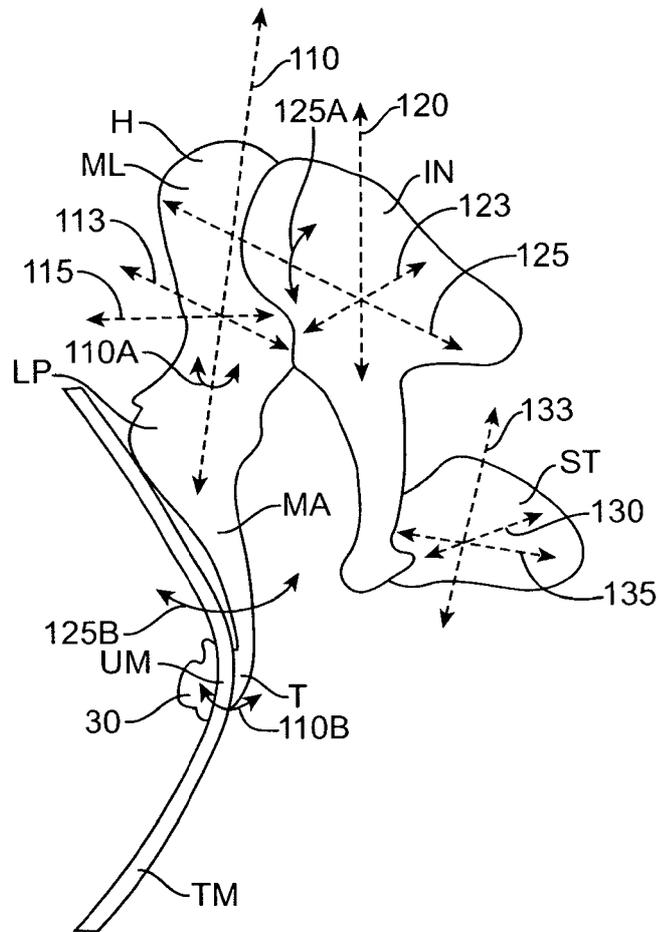


FIG. 1C

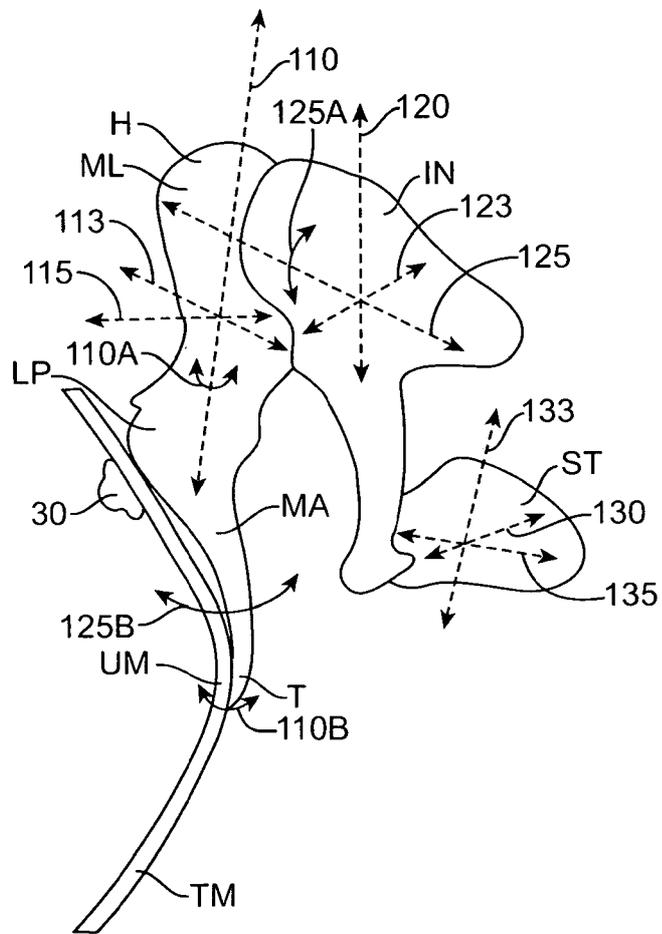


FIG. 1D

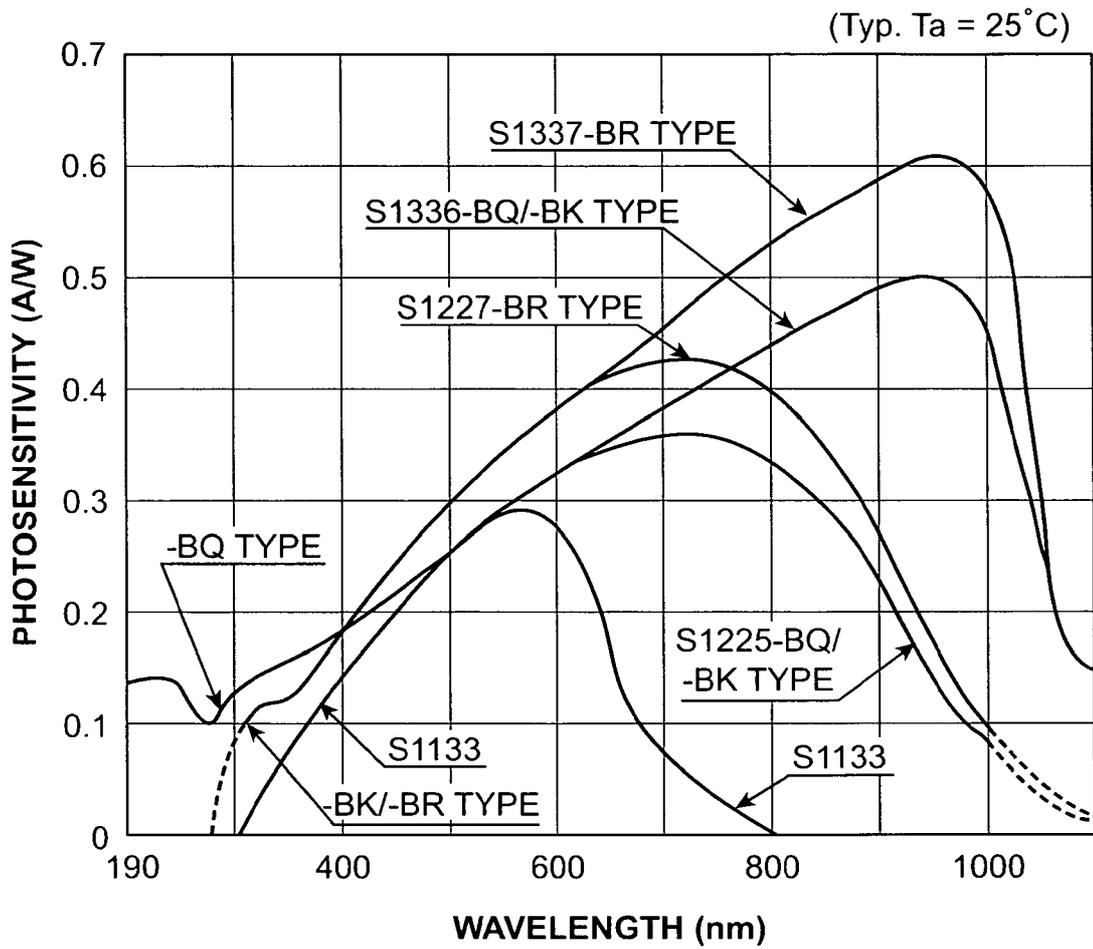


FIG. 2

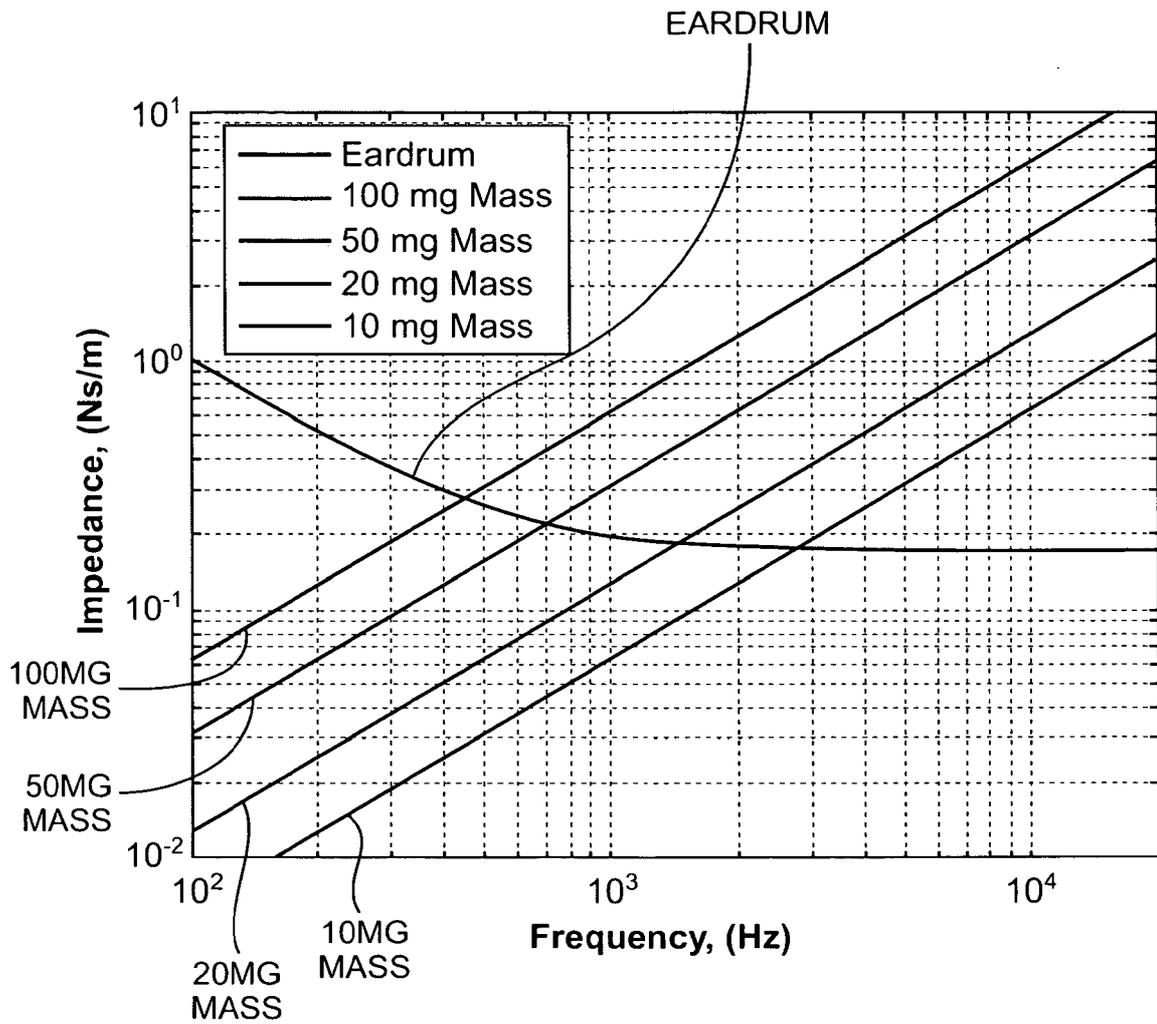


FIG. 3

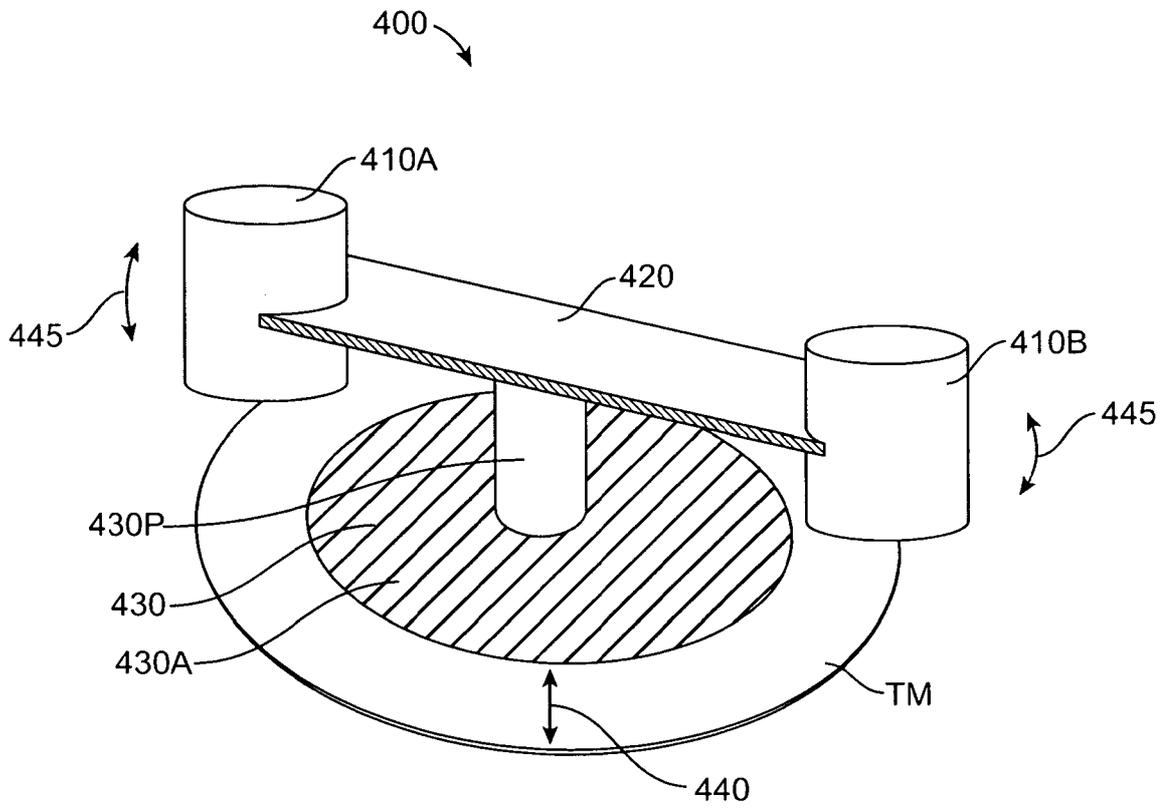


FIG. 4

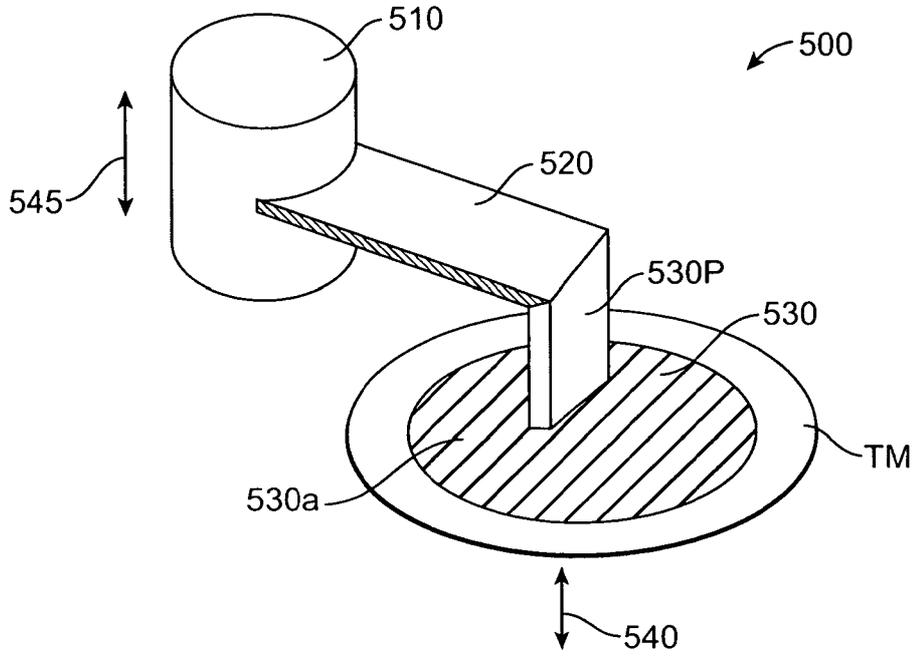


FIG. 5A

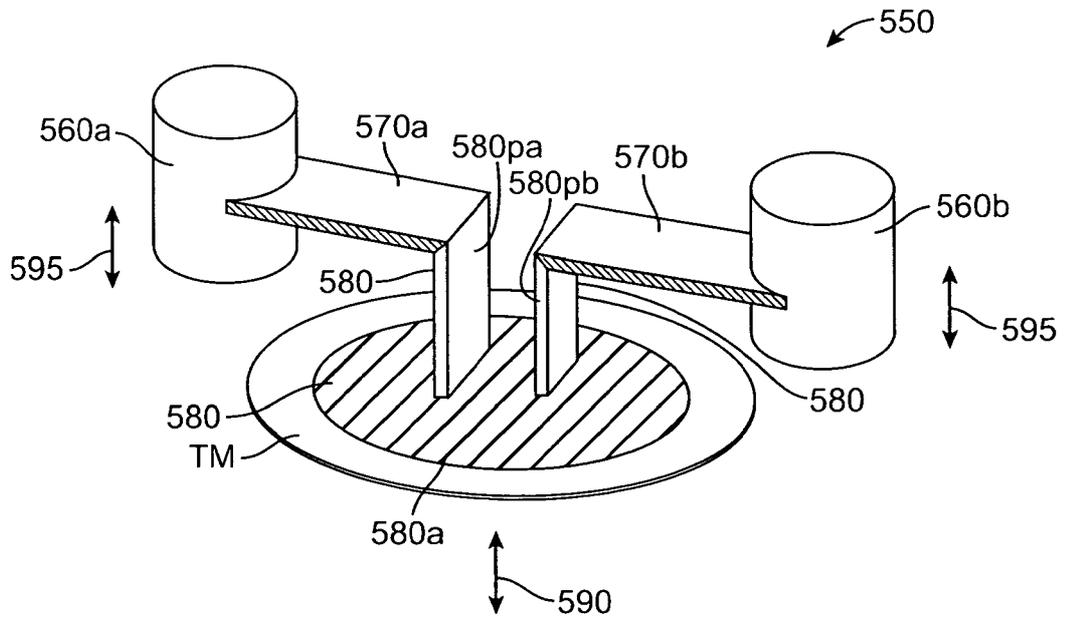


FIG. 5B

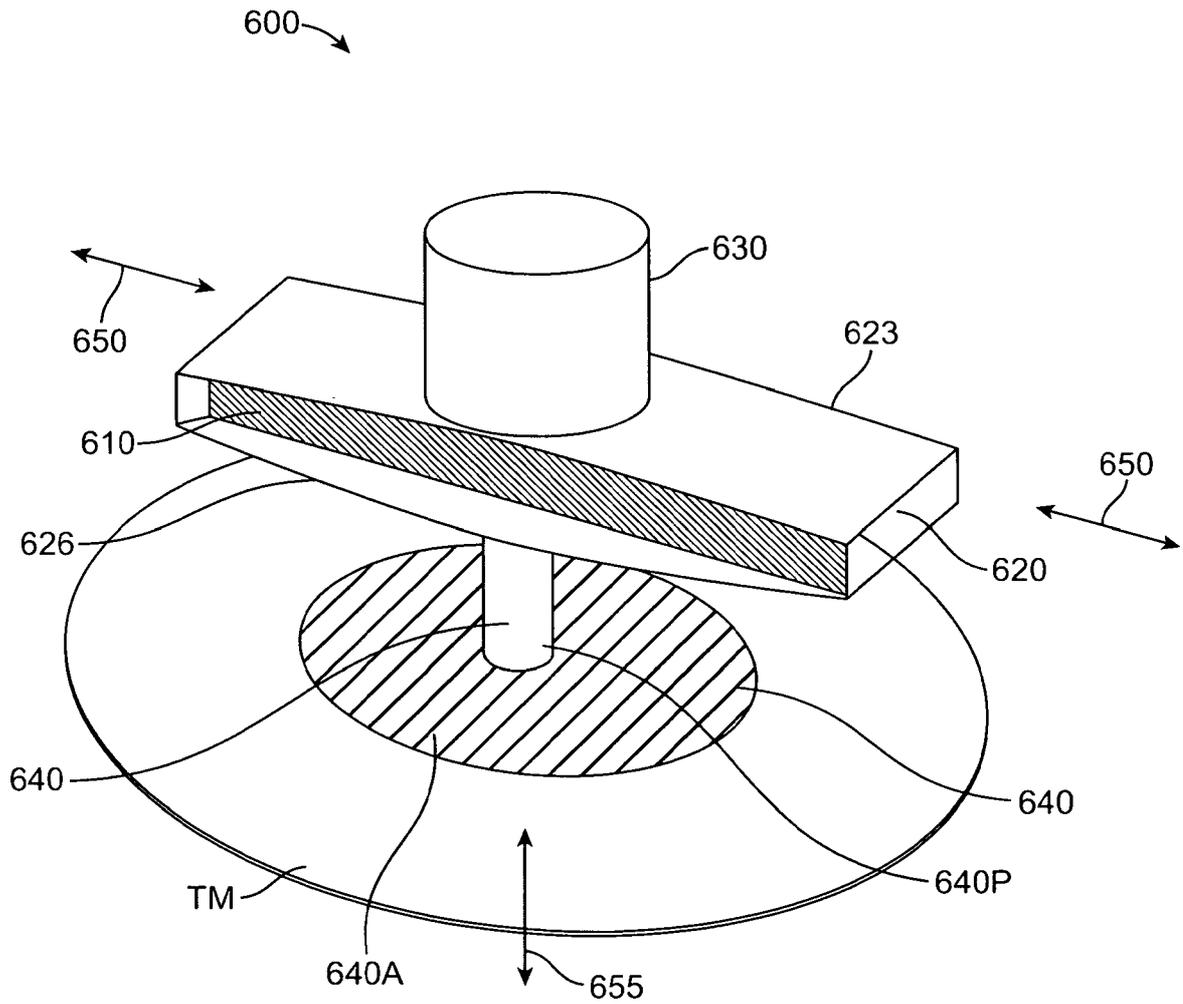


FIG. 6

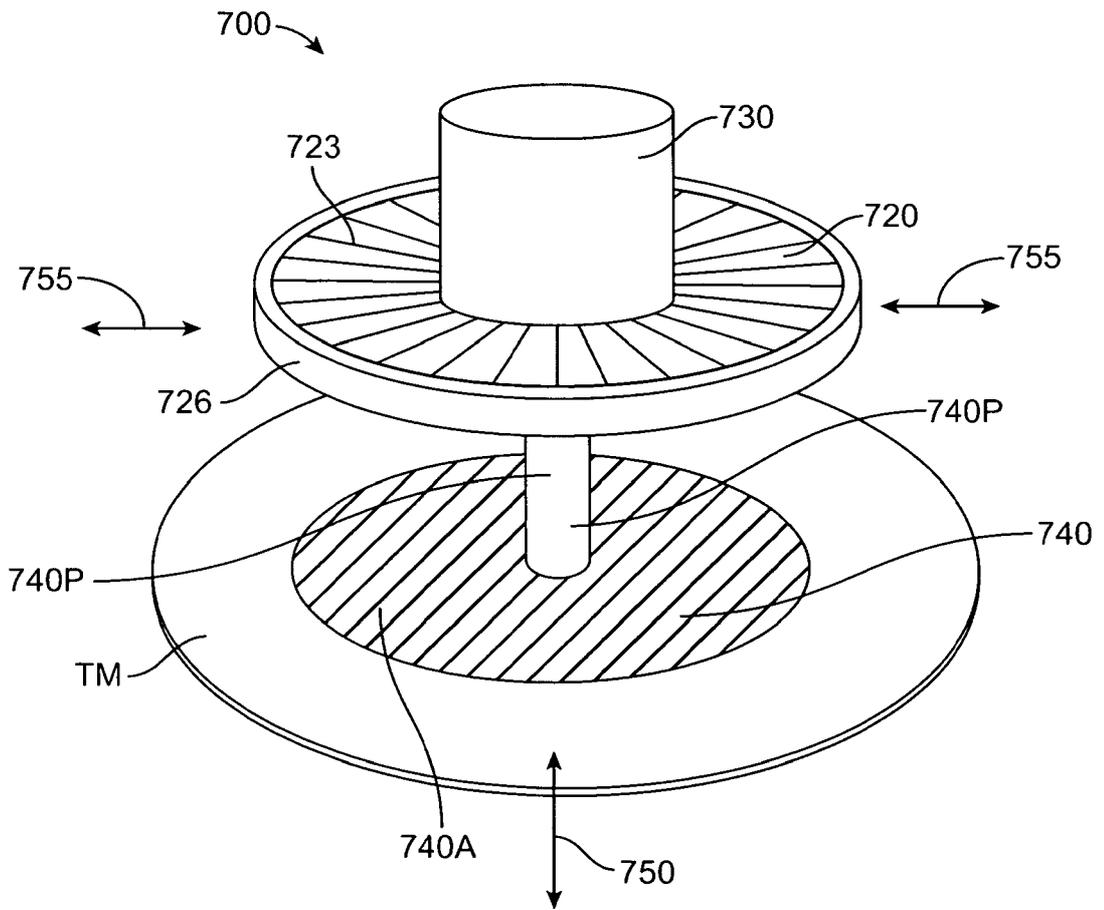


FIG. 7

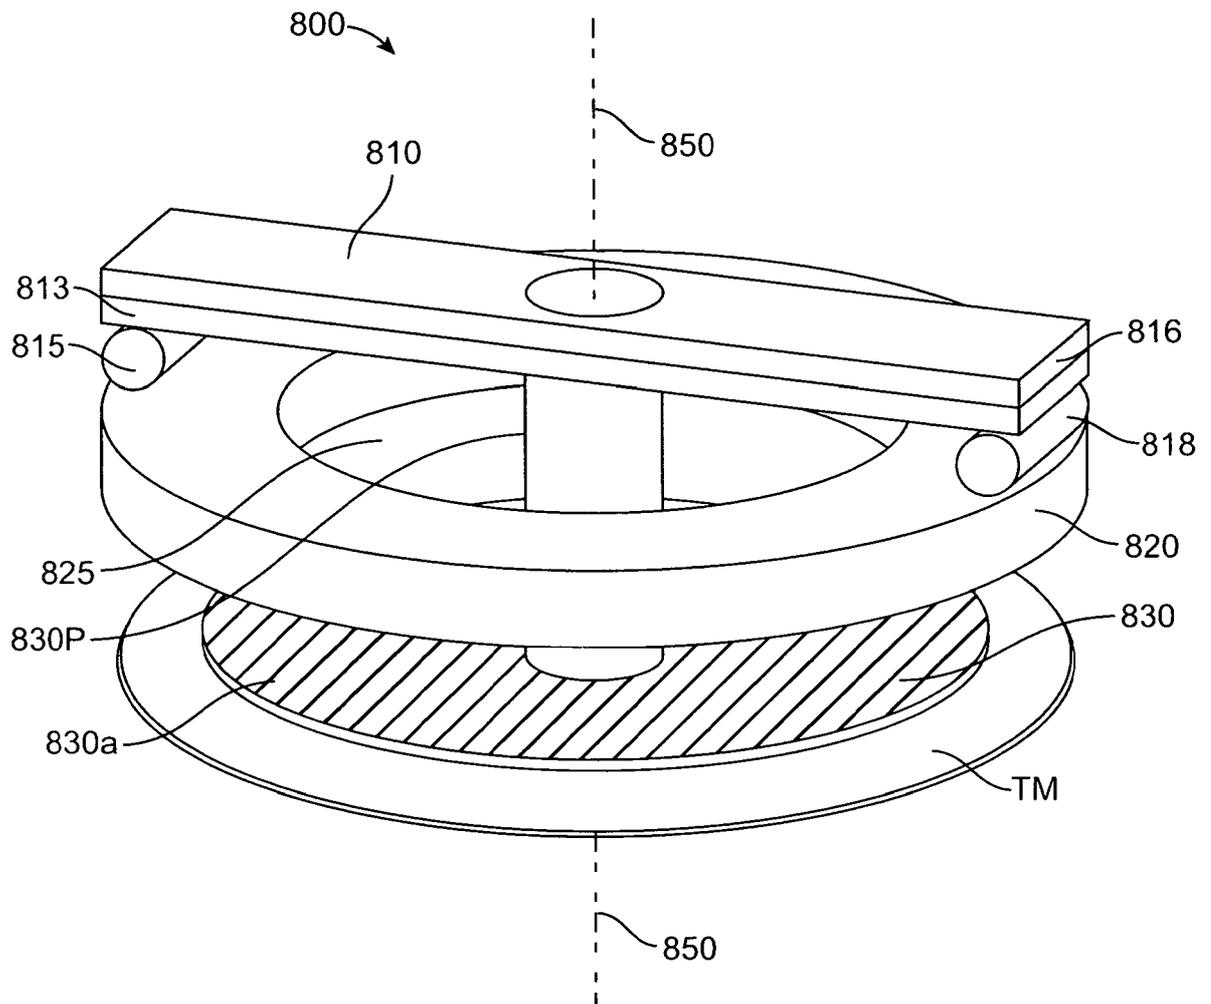


FIG. 8

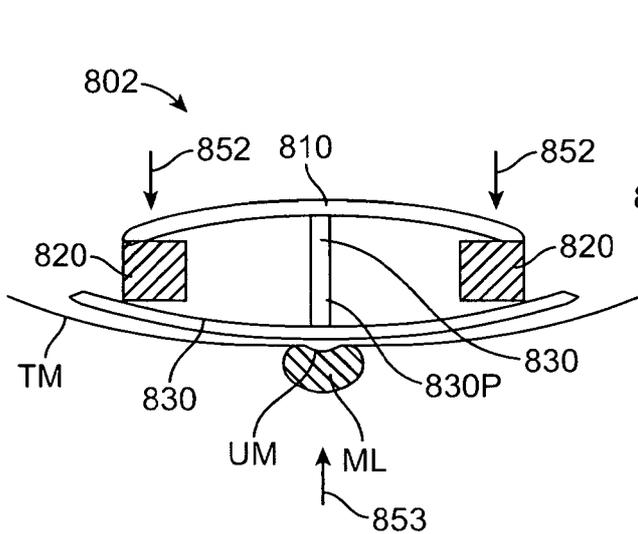


FIG. 8A

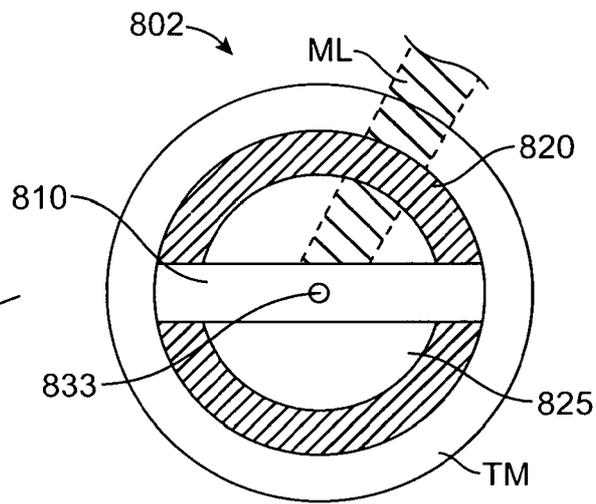


FIG. 8B

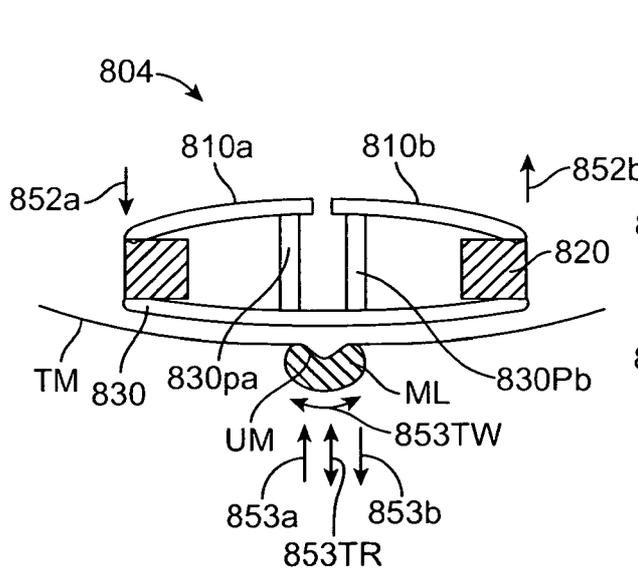


FIG. 8C

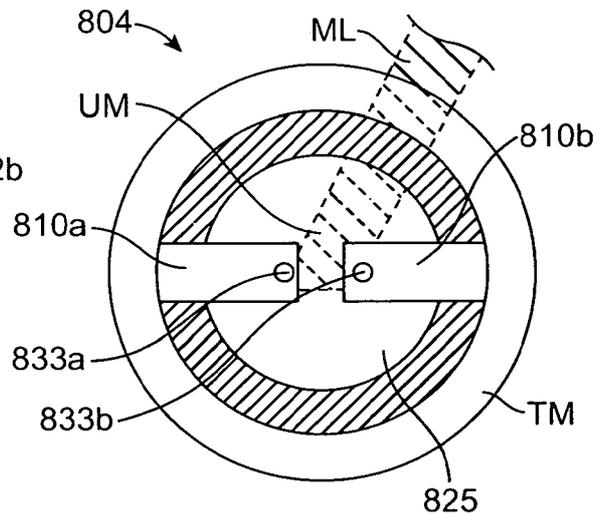


FIG. 8D

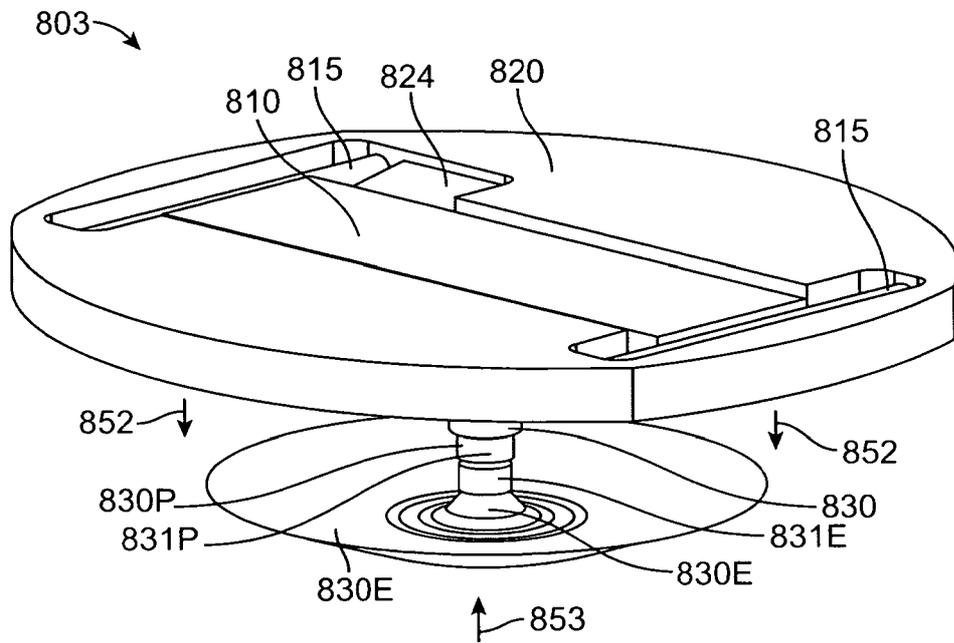


FIG. 8B1

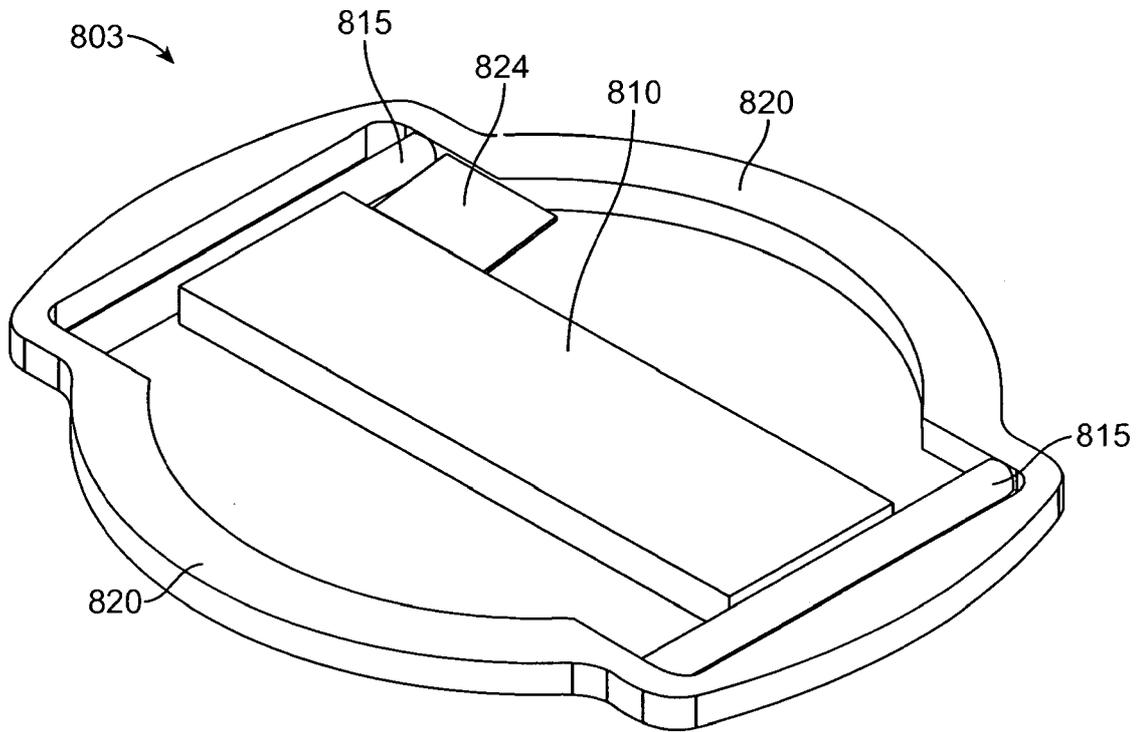


FIG. 8B2

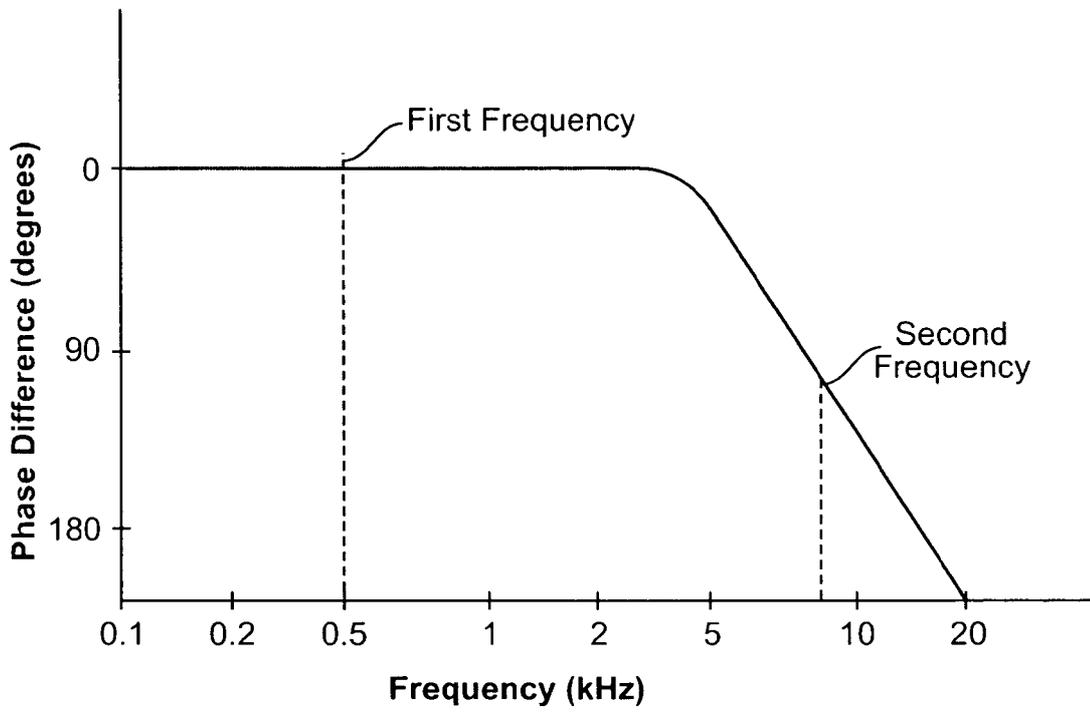


FIG. 8E

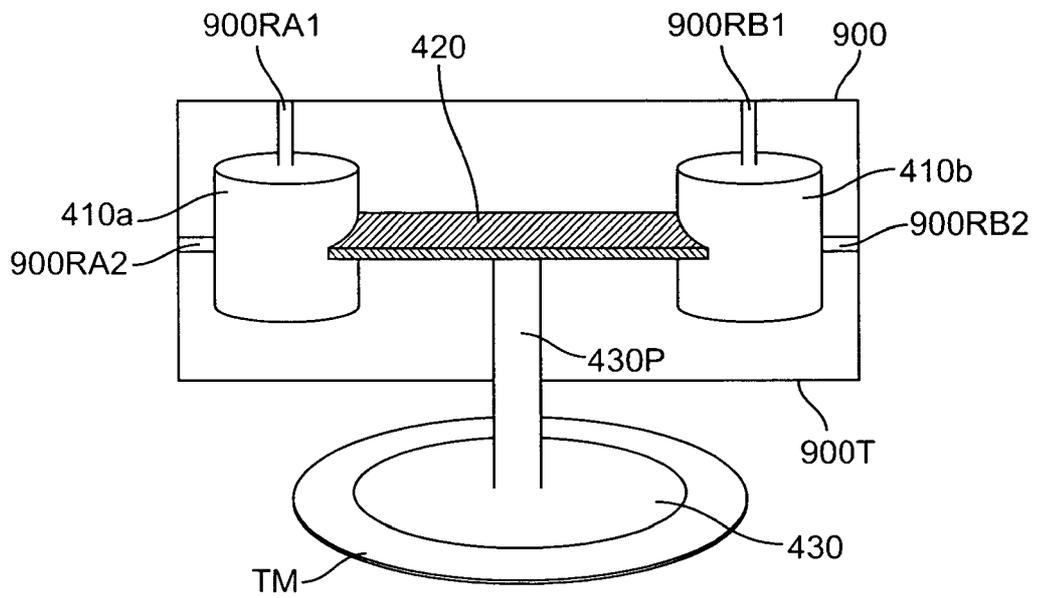


FIG. 9

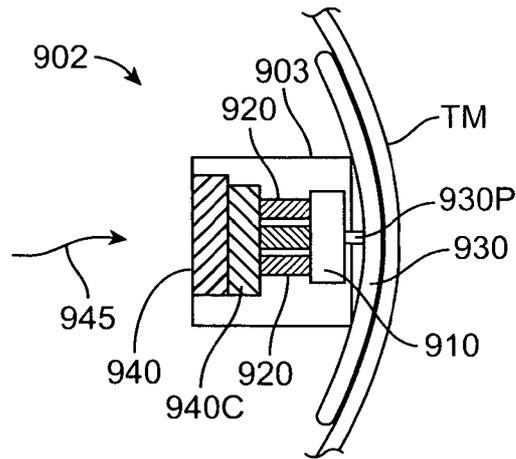


FIG. 9A

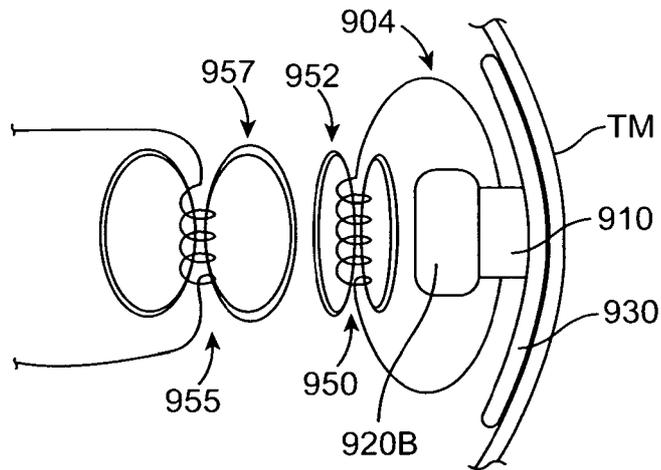


FIG. 9B

20 / 29

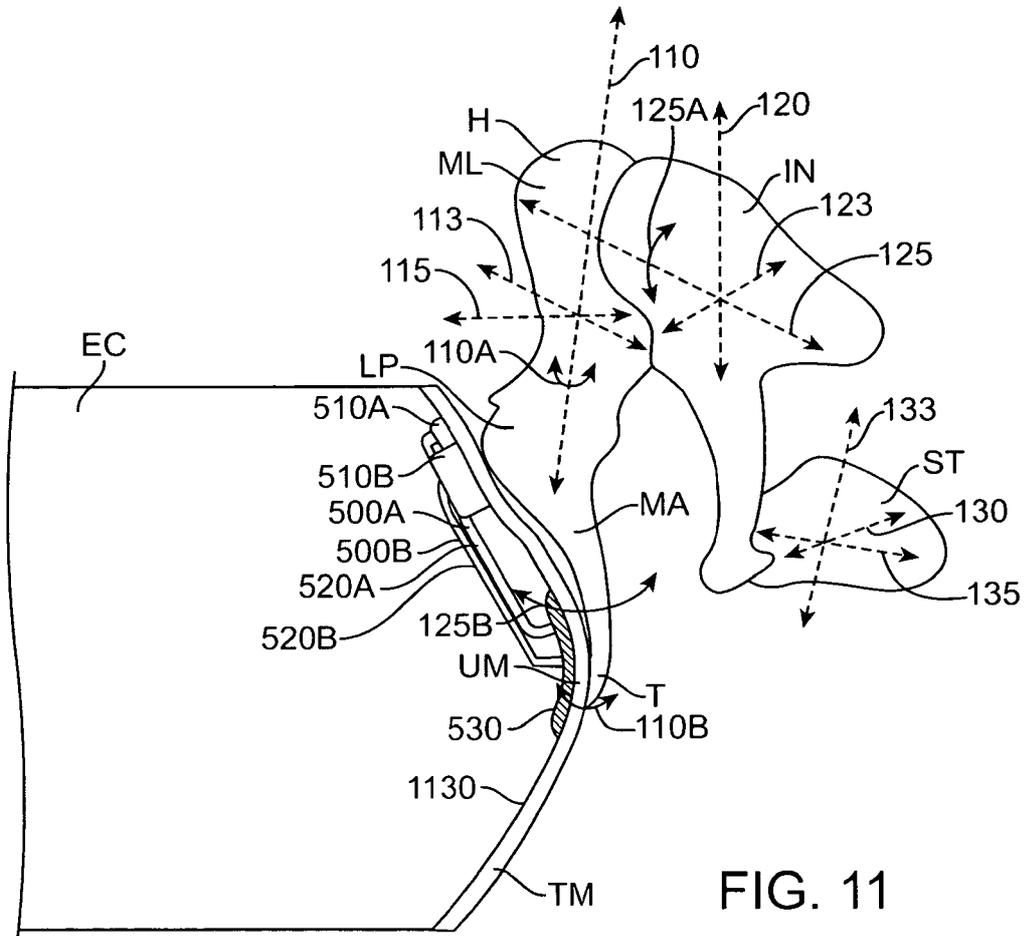


FIG. 11

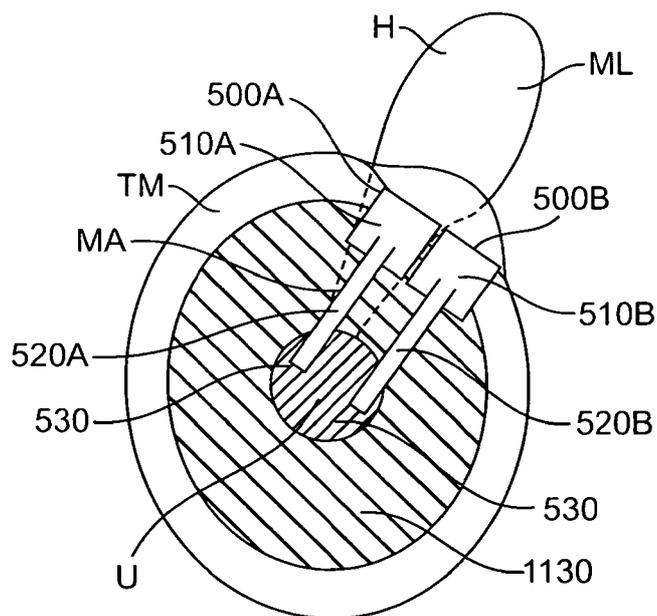


FIG. 11A

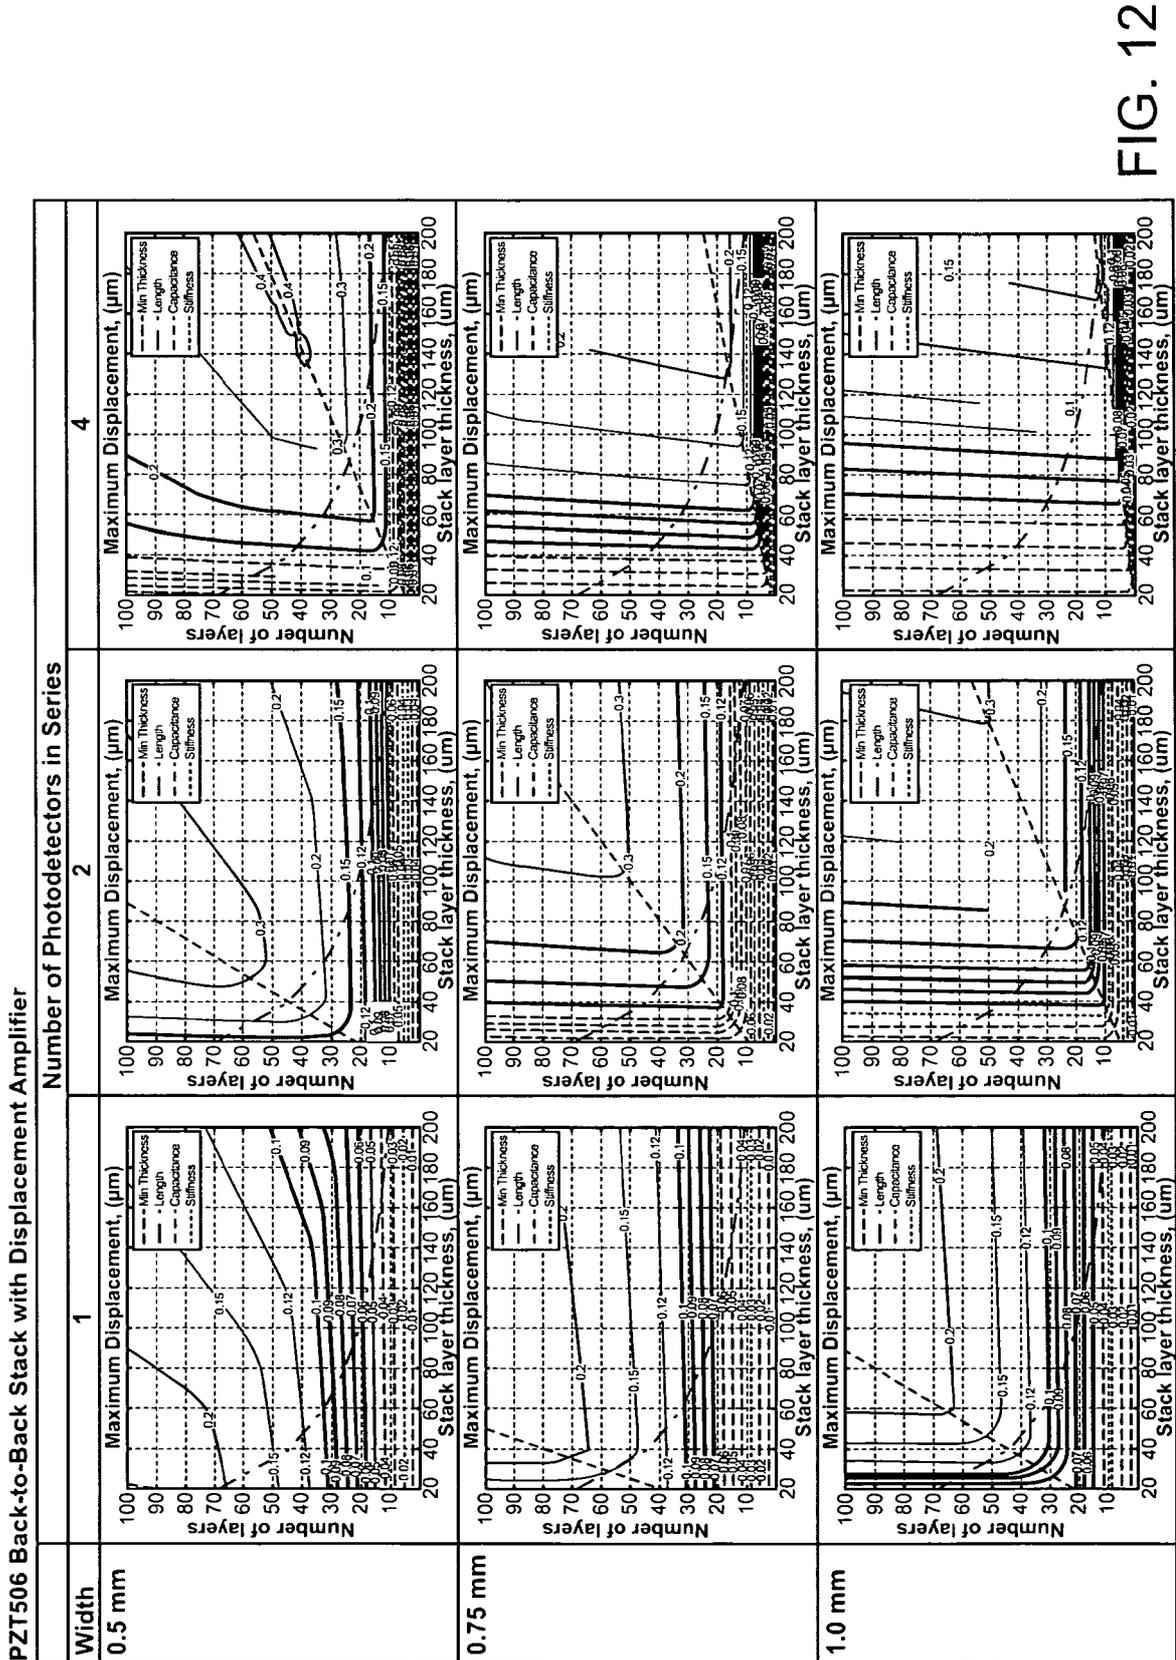


FIG. 12

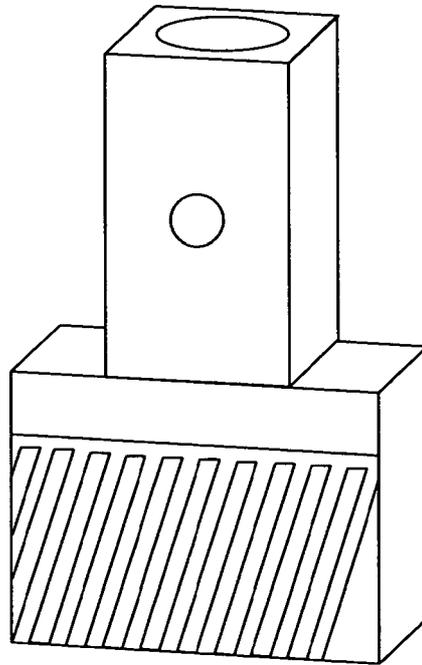


FIG. 13A

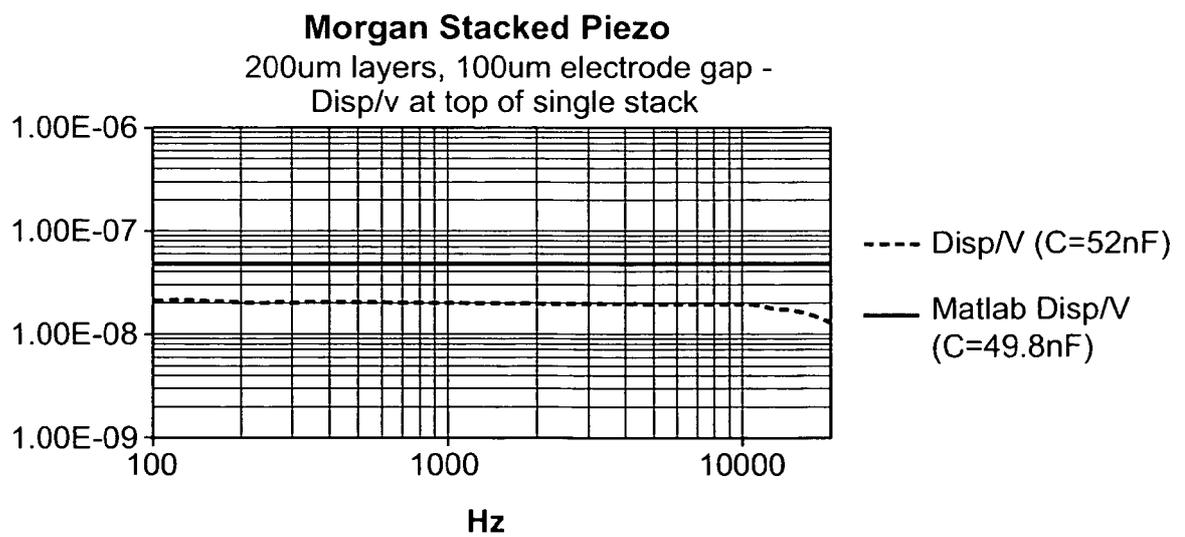


FIG. 13B

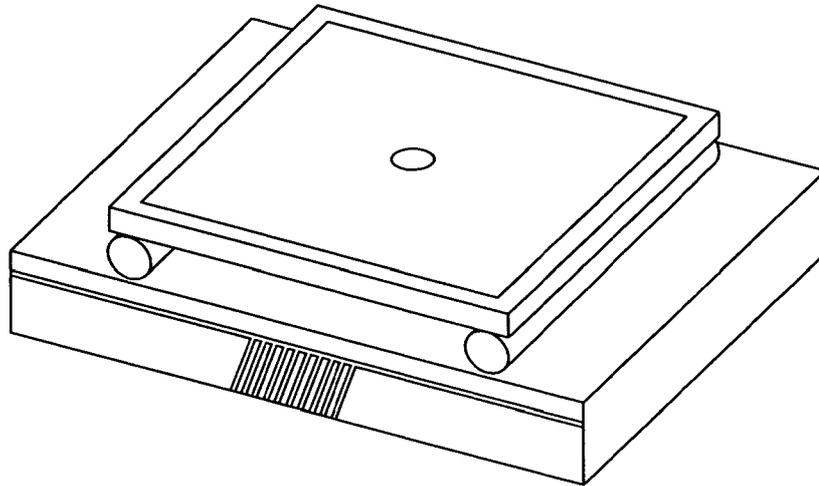


FIG. 14A

Steiner & Martins Cofired Piezo - Series Bimorph

"simply supported" Cyanoacrylate vs. Silicone
 4dB improvement with silicone - C = 1.4nf model and measured

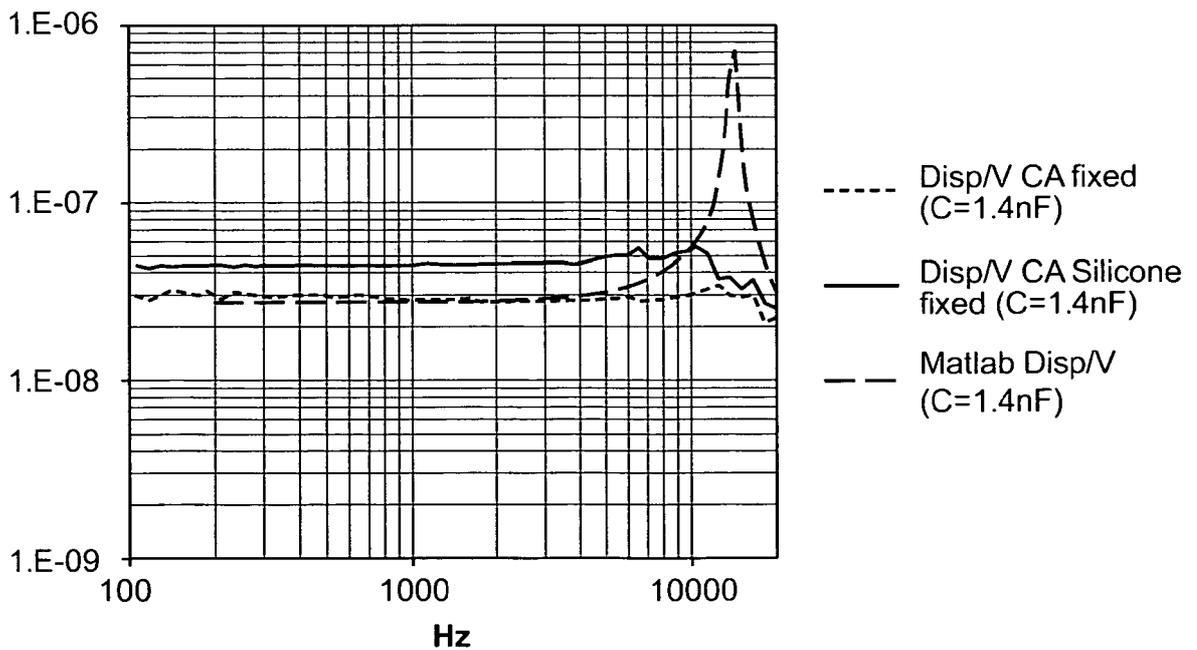


FIG. 14B

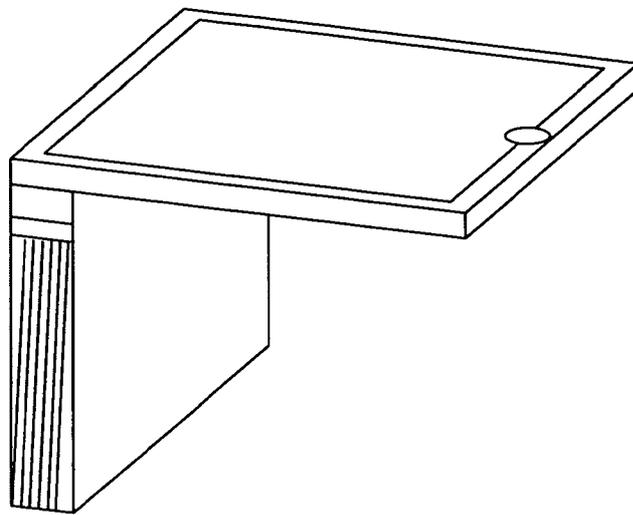


FIG. 15A

Single Crystal Bimorph - TRS
6x6mm cantilever - model vs laser benchtop

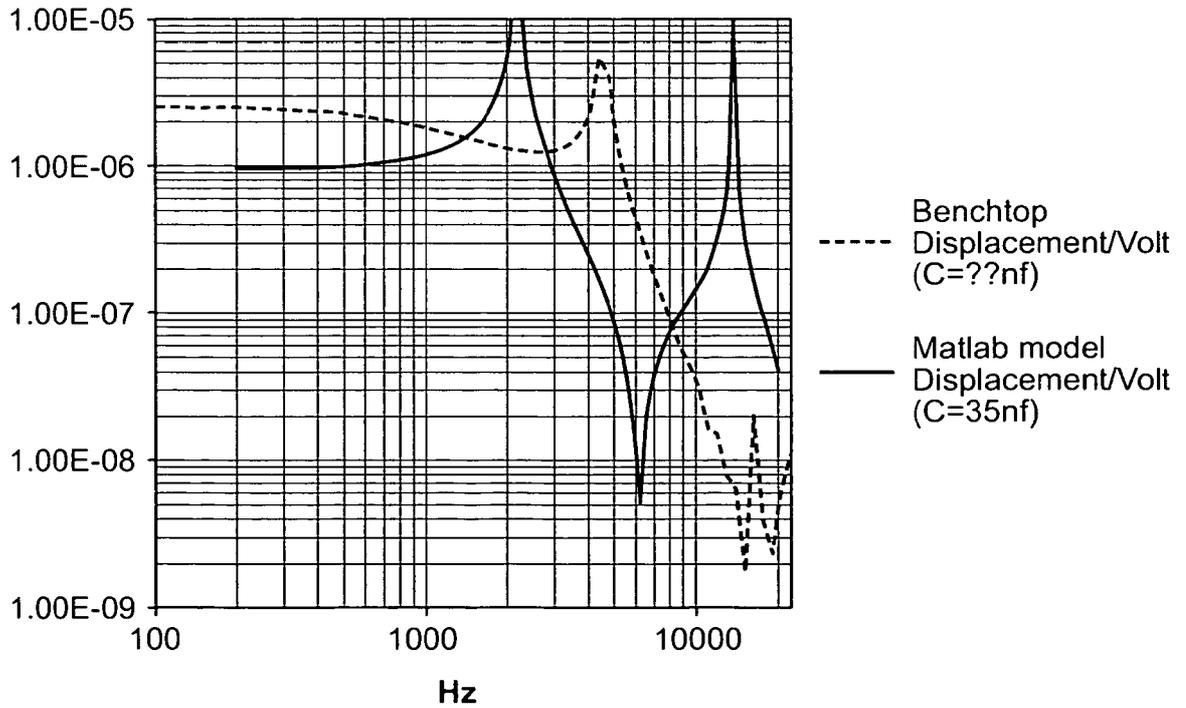


FIG. 15B

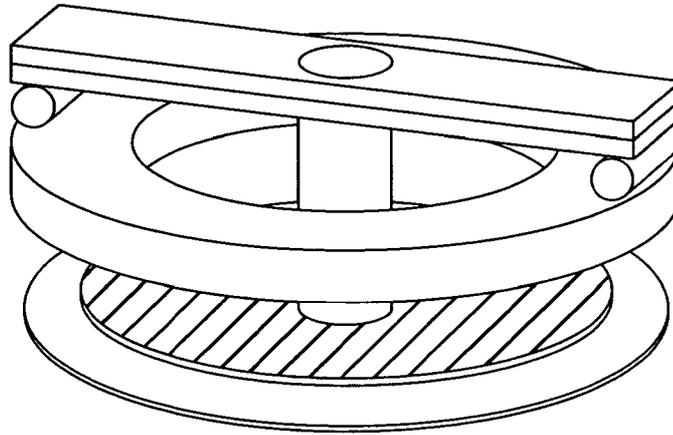


FIG. 16A

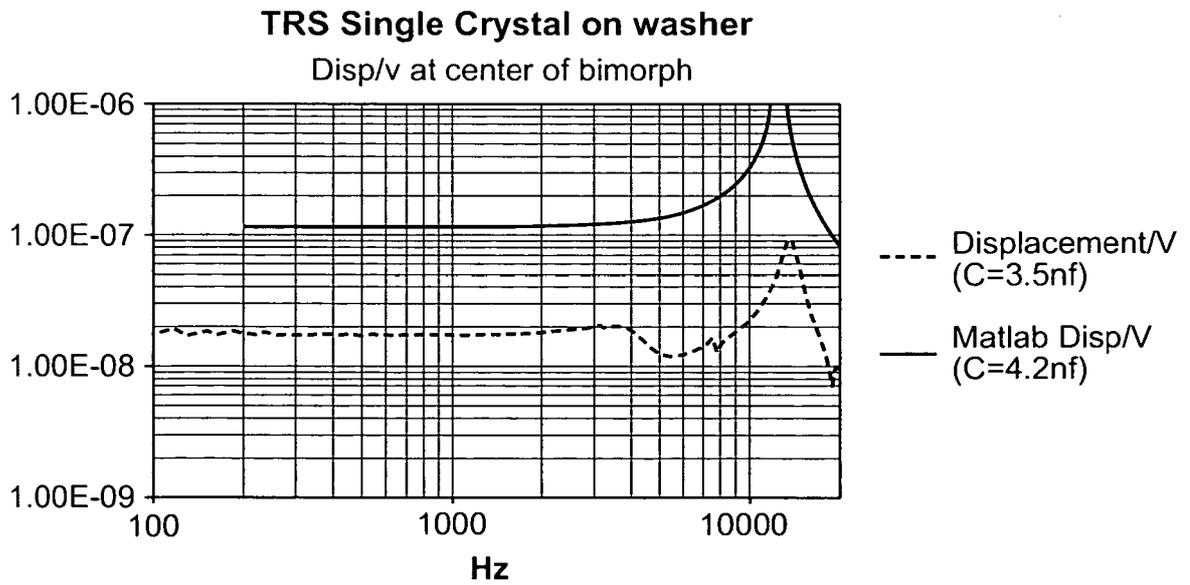


FIG. 16B

26 / 29

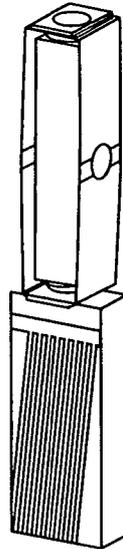


FIG. 17A

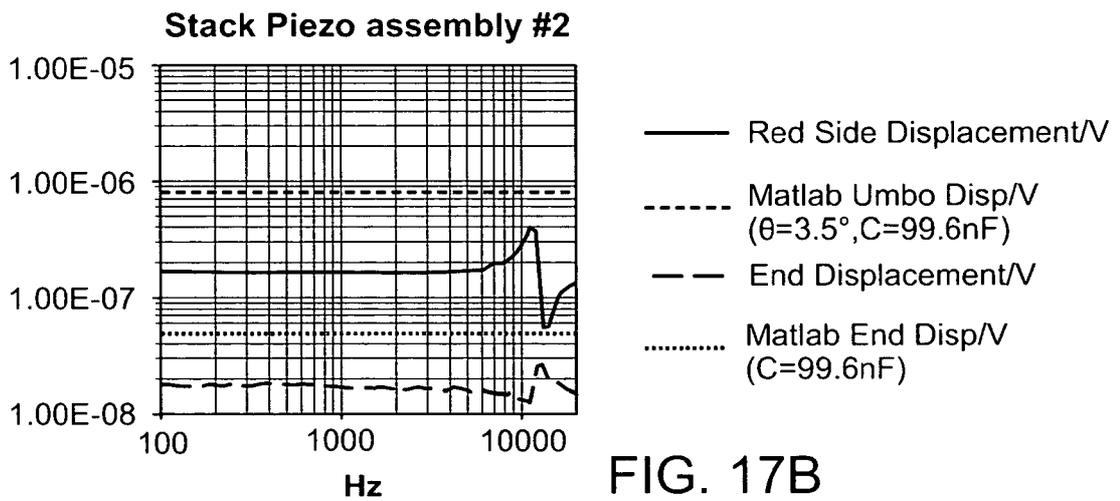


FIG. 17B

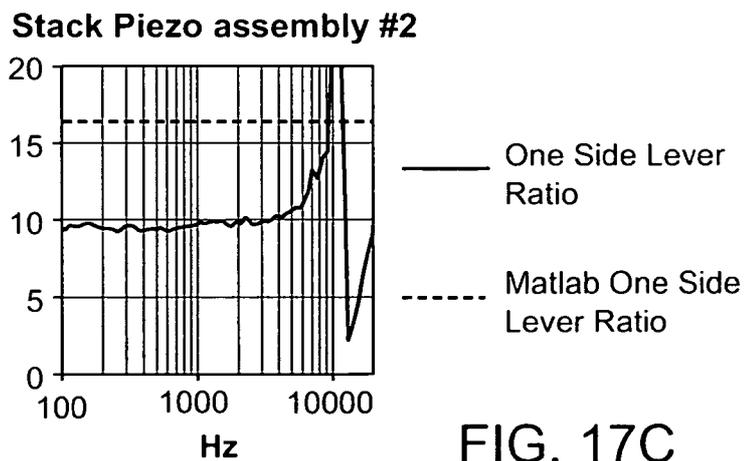


FIG. 17C

**Peak output @ Umbo placement:
Piezo Bimorph on Ear Results vs. Bench Testing**

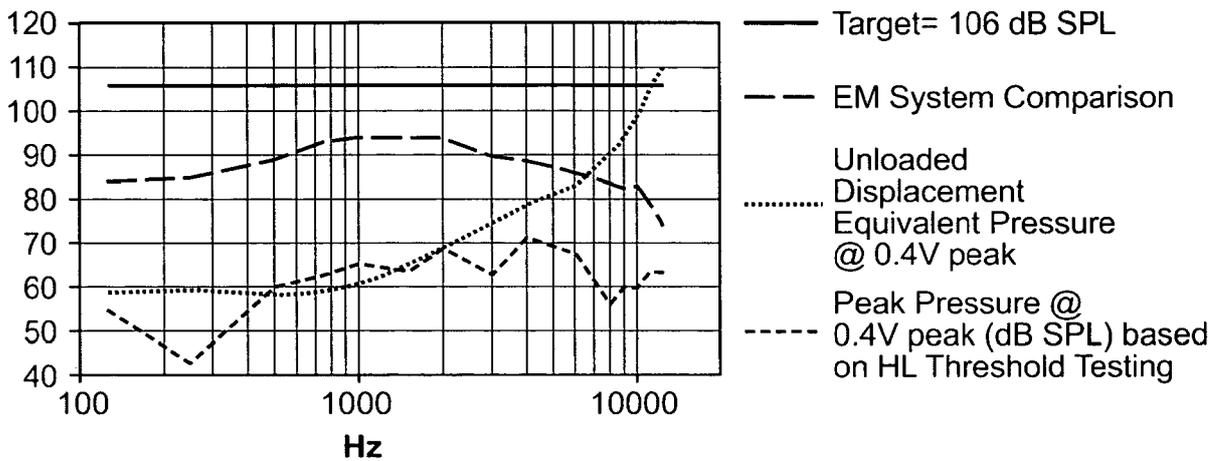


FIG. 18A

Umbo Placement Feedback Results (Pa/V)

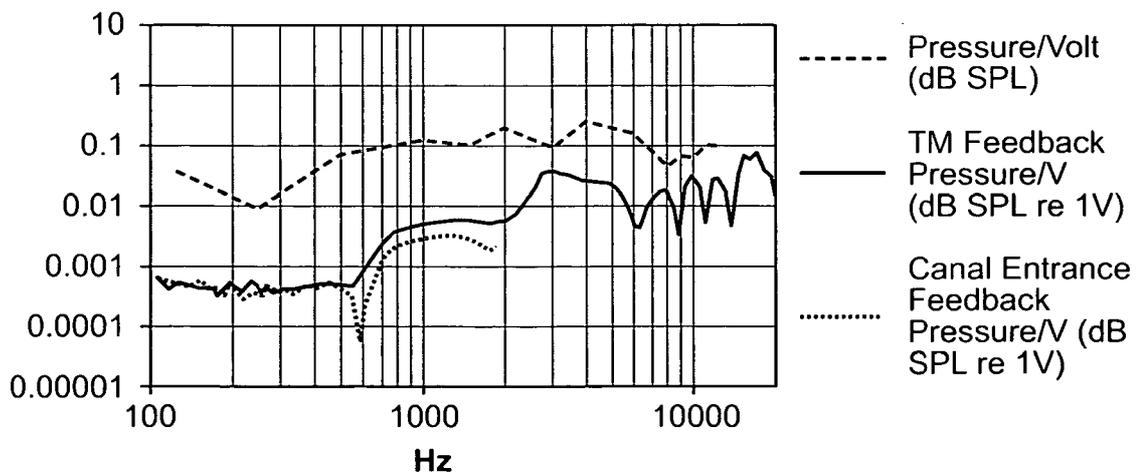


FIG. 18B

**Peak output @ Center of Pressure:
Piezo Bimorph on Ear Results vs. Bench Testing**

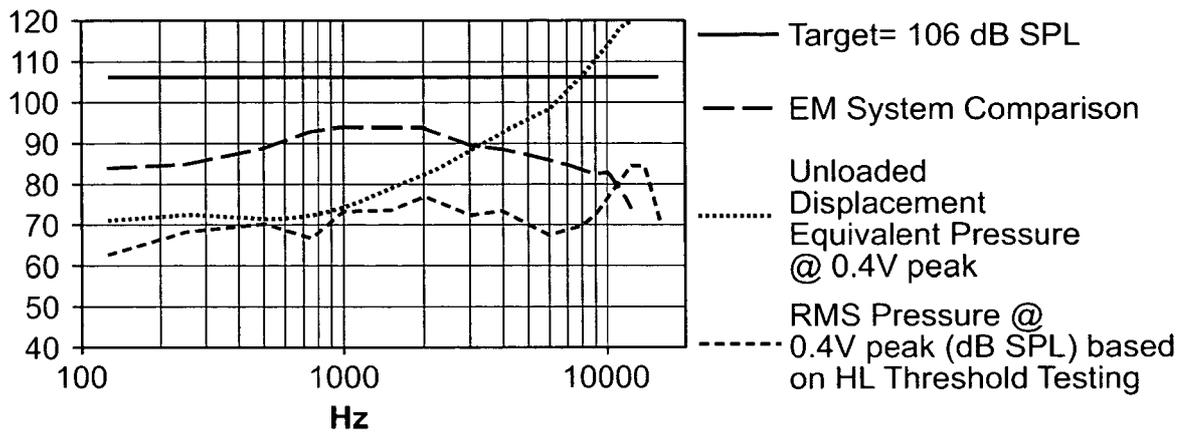


FIG. 19A

Center of Pressure Feedback Results (Pa/V)

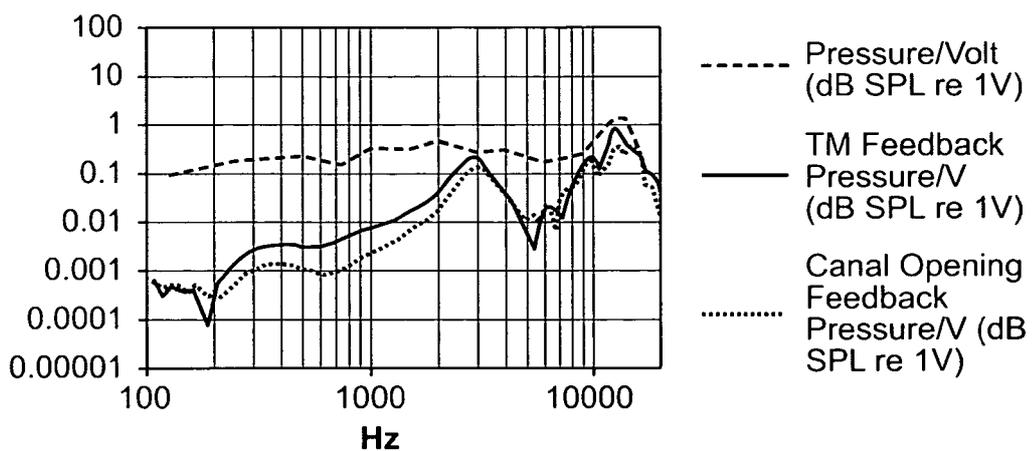


FIG. 19B

**Peak output @ Center of Pressure:
Piezo Amplified Stack on Ear Results vs. Bench Testing**

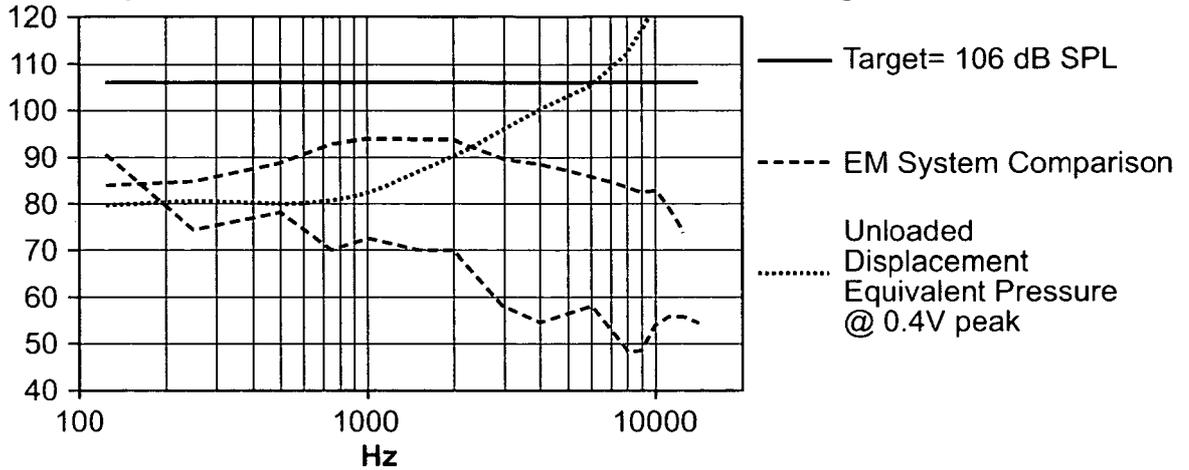


FIG. 20A

**Center of Pressure Feedback Results (Pa/V)
Piezo Amplified Stack**

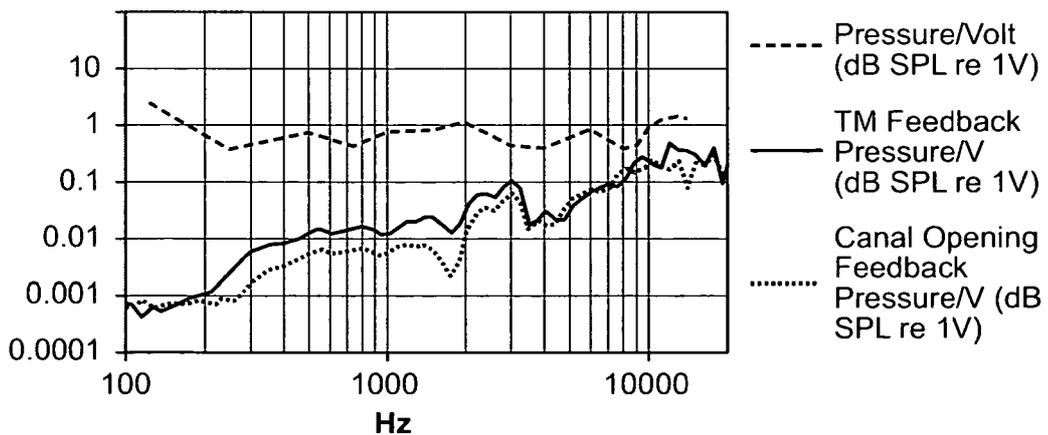


FIG. 20B

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2009/057716

A CLASSIFICATION OF SUBJECT MATTER IPC(8) - H04R 25/00 (2009.01) USPC - 600/25 According to International Patent Classification (IPC) or to both national classification and IPC		
B FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC(8) - H04R 25/00, 25/02 (2009 01) USPC - 381/326, 600/25 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) PatBase, Google Patents		
C DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No
X	WO 98/06236 A1 (KROLL et al) 12 February 1998 (12 02 1998) entire document	1-2, 5, 12-15, 17, 22, 26-27, 29, 39-41, 45, 52, 54-63, 65-66, 68, 70, 72

Y		3-4, 6-11, 16, 23-25, 28, 30-38, 42-44, 46-50, 64, 67, 69, 71
Y	US 2001/0003788 A1 (BALL et al) 14 June 2001 (14 06 2001) entire document	3, 6-11, 16
Y	US 6,137,889 A (SHENNIB et al) 24 October 2000 (24 10 2000) entire document	4, 23-25, 46-50
Y	US 6,554,761 B1 (PURIA et al) 29 April 2003 (29 04 2003) entire document	7, 9, 30-38, 67, 69
Y	US 5,984,859 A (LESINSKI) 16 November 1999 (16 11 1999) entire document	28
Y	US 2006/0058573 A1 (NEISZ et al) 16 March 2006 (16 03 2006) entire document	42-44, 71
Y	US 2002/0029070 A1 (LEYSIEFFER et al) 07 March 2002 (07 03 2002) entire document	64
A	US 4,654,554 A (KISHI) 31 March 1987 (31 03 1987) entire document	1-72
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input type="checkbox"/>		
• Special categories of cited documents	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family	
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search 09 November 2009	Date of mailing of the international search report 19 NOV 2009	
Name and mailing address of the ISA/US Mail Stop PCT, Attn ISA/US, Commissioner for Patents P O Box 1450, Alexandria, Virginia 22313-1450 Facsimile No 571-273-3201	Authorized officer Blame R Copenheaver PCT H&I pd@sk 571 272-4300 PCT OSP 571-272-7774	