

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 February 2007 (15.02.2007)

PCT

(10) International Publication Number
WO 2007/019407 A2

(51) International Patent Classification:
A23L 1/00 (2006.01)

(21) International Application Number:
PCT/US2006/030645

(22) International Filing Date: 4 August 2006 (04.08.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/198,881 5 August 2005 (05.08.2005) US

(71) Applicant (for all designated States except US): **T.F.H. PUBLICATIONS, INC.** [US/US]; One TFH Plaza, Third And Union Avenues, Neptune City, New Jersey 07753 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **AXELROD, Glen S.** [US/US]; 106 Cedar Drive, Colts Neck, New Jersey 07722 (US). **GAJRIA, Ajay** [IN/US]; 304 Cobblestone Court, Monmouth Junction, New Jersey 08852 (US).

(74) Agents: **GROSSMAN, Steven J.** et al.; Grossman, Tucker, Perreault & Pfleger, PLLC, 55 South Commercial Street, Manchester, New Hampshire 03101 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DIRECT STARCH MOLDING

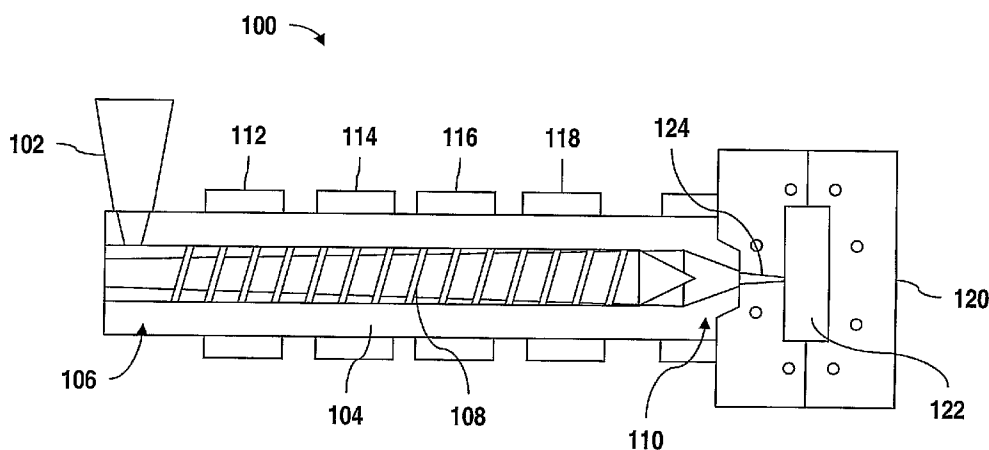

(57) Abstract: The present invention relates to an animal chew including an edible starch. The invention relates to a method of molding the animal chew in which starch and other additives may be introduced directly into an injection molding machine and molded to a desired shape. The starch may include fermented soy product, enzymes and/or coenzymes.

WO 2007/019407 A2

DIRECT STARCH MOLDING

CROSS REFERENCE TO RELATED APPLICATIONS

The present application claims the benefit of the filing date of U.S. Utility Patent
5 Application Serial No. 11/198,881 filed August 5, 2005, the teachings of which are
incorporated herein by reference.

FIELD OF INVENTION

The present invention relates to the direct injection molding of an edible starch based
10 animal chew compositions. The processing conditions, including barrel temperatures may
also be adjusted along with additive amount and water levels to provided molded starch
products. The starch may include fermented soy product, enzymes and/or coenzymes.

BACKGROUND

15 Numerous disclosures exist pertaining to the development of edible dog chews that
are digestible and/or nutritious along with a texture that can be individually adjusted to suit a
wide variety of a dog's preferences or needs. Attention is therefore directed to the following
exemplary disclosures: U.S. Pat. Nos. 6,180,161 "Heat Modifiable Edible Dog Chew"; U.S.
Pat. No. 6,159,516 "Method of Molding Edible Starch"; U.S. Pat. No. 6,126,978 "Edible Dog
20 Chew"; U.S. Pat. No. 6,110,521 "Wheat and Casein Dog Chew with Modifiable Texture";
U.S. Pat. No. 6,093,441 "Heat Modifiable Peanut Dog Chew"; U.S. Pat. No. 6,093,427
"Vegetable Based Dog Chew"; U.S. Pat. No. 6,086,940 "High Starch Content Dog Chew";
U.S. Pat. No. 6,067,941 "Animal Chew"; U.S. Pat. No. 6,056,991 "Turkey and Rice Dog
Chew With Modifiable Texture"; U.S. Pat. No. 5,941,197 "Carrot Based Dog Chew"; U.S.
25 Pat. No. 5,827,565 "Process for Making an Edible Dog Chew"; U.S. Pat. No. 5,339,771
"Animal Chew Toy Containing Animal Meal"; U.S. Pat. No. 5,240,720 "Dog Chew with
Modifiable Texture"; U.S. Pat. No. 5,200,212 "Dog Chew with Modifiable Texture."
Attention is also directed to U.S. Pat. No. 6,165,474 entitled "Application for Patent for
Nutriceutical Toy" and U.S. Pat. No. 5,419,283 entitled "Animal Chew Toy of Starch
30 Material and Degradable Ethylene Copolymer". These disclosures provide non-limiting
examples of starch based molding compositions and molding methods.

SUMMARY

In an exemplary embodiment, the present invention relates to a method for direct injection molding raw starch in an injection molding machine to produce an animal chew. The injection molding machine may include a screw, a barrel and a mold. Raw starch, water and optionally plasticizer may be introduced directly into the barrel of the injection molding machine. The starch, plasticizer and water may be mixed in the barrel to form a starch composition. The starch composition may then be formed. The starch may contain fermented soy product, enzymes and/or coenzymes.

BRIEF DESCRIPTION OF DRAWINGS

Features and advantages of the present invention are set forth herein by description of embodiments consistent with the present invention, which description should be considered in conjunction with the accompanying drawings, wherein:

FIG. 1 is an exemplary embodiment of an injection molding machine.

DETAILED DESCRIPTION

The present invention relates to the direct injection molding of starch based edible animal chew compositions. The additives of the starch based composition may be added directly into an injection molding machine to provide a molded starch based animal chew in a single step.

The starch composition may include any carbohydrate of natural or vegetable origin. The starch may include amylose and/or amylopectin and may be extracted from plants, including but not limited to potatoes, rice, tapioca, corn and cereals such as rye, wheat, and oats. The starch may also be extracted from fruits, nuts and rhizomes, or arrowroot, guar gum, locust bean, arracacha, buckwheat, banana, barley, cassava, konjac, kudzu, oca, sago, sorghum, sweet potato, taro, yams, fava beans, lentils and peas. The starch may be present between about 30-99% including all increments and values therebetween such as levels above about 50%, 85%, etc.

The starch employed herein may be raw starch, which may be understood as starch that has not seen a prior thermal molding history, such as extrusion or other type of melt processing step. The raw starch itself may also be native, which may be understood as unmodified starch recovered in the original form by extraction and not physically or

chemically modified. The raw starch may also be in powder form of varying particle size, which may be understood as milled and/or pre-sifted. It should be understood that the raw starch may also have varying degrees moisture present. Accordingly, it should be appreciated that the term "direct" as used herein with respect to injection molding refers to the molding of starch without exposing the starch to prior thermal molding histories before injection molding. However, the starch herein may, e.g., be heated for drying purposes, which would not amount to a prior thermal molding history.

The starch composition may include cellulose. The cellulose may be, for example, a long-chain polymer of polysaccharide carbohydrate. The cellulose may also be derived or extracted from plants. The cellulose may be incorporated into the starch composition between about 1-15% by weight of the starch composition and any increment or value therebetween including 4%, 10%, 11%, etc.

Emulsifiers or surfactants may also be incorporated into the starch composition. The emulsifier may be present between about 1-10% by weight of the starch composition and all increments or values therebetween including 3%, 4%, etc. The emulsifier may include, for example, lecithin, which may be extracted or derived from, for example, egg yolk or soy beans.

The starch composition may also include a plasticizer. The plasticizer may include for example, glycerin. The plasticizer may be incorporated between about 15-30%, including all increments and values therebetween such as levels greater than 15%, 21%, 27% etc.

A humectant may also be incorporated into the starch composition. The humectant may include, for example, oat fiber. The humectant may be incorporated between about 0.1-5% by weight of the starch composition including all intervals and values therebetween, including 1%, 25%, etc. A humectant may be understood to be any additive that may absorb water in the material.

The starch composition may also include water. The water may be introduced into the composition between about 1-40% by weight of the starch composition and any increment or value therebetween, including 4%, 20-40%, 10-20%, etc. After the product has been formed, the water may be present between 1-20% by weight of the starch composition including all increments or values therebetween, such as, below 20%, 4%, 5-10%, etc.

The starch composition may include a nutraceutical. The nutraceutical may be fermented soya. Fermented soya nutraceuticals are available from Bio Food, Ltd., Pine

Brook, N.J. and sold under the general trademark Soynatto®. The fermented soya is present between about 1-40% by weight of the starch composition, including all increments and values therbetween, including 10%, 20%, etc. The Soynatto® product is more specifically described to contain the following as compared to other available compositions:

Made With		Foods*				Constituents*		
Nutrient	Units per 100 g	IEFS	Soynatto®	Tempeh	Miso Paste	Soy protein isolate	Soy milk as fluid	Tofu, regular
Proximates								
Protein	g	37.00	37.00	18.54	11.81	80.69	2.75	8.08
Total lipid	g	7.50	7.50	10.80	6.07	3.39	1.91	4.78
Carbohydrate	g	40.00	40.00	9.39	27.96	7.36	1.81	1.88
Fiber, total dietary	g	12.02	12.02		5.40	5.60	1.30	0.30
Minerals								
Calcium	mg	151.50	151.50	111.00	66.00	178.00	4.00	350.00
Iron	mg	5.21	5.21	2.70	2.74	14.50	0.58	5.36
Magnesium	mg	191.25	191.25	81.00	42.00	39.00	19.00	30.00
Phosphorus	mg	608.25	608.25	266.00	153.00	776.00	49.00	97.00
Potassium	mg	1957.50	1957.50	412.00	164.00	81.00	141.00	121.00
Sodium	mg	18.30	18.30	9.00	3647.00	1005.00	12.00	7.00
Zinc	mg	3.84	3.84	1.14	3.32	4.03	0.23	0.80
Copper	mg	3.93	3.93	0.56	0.44	1.60	0.12	0.19
Manganese	mg	2.40	2.40	1.30	0.86	1.49	0.17	0.61
Selenium	mcg	27.98	27.98	0.02	1.60	0.80	1.30	8.90
Lithium	mcg	60.00	60.00	tr	tr	tr	tr	tr
Molybdenum	mcg	6.00	6.00	tr	tr	tr	tr	tr
Nickel	mcg	30.00	30.00	tr	tr	tr	tr	tr
Tin	mcg	12.00	12.00	tr	tr	tr	tr	tr
Lipids								
Fatty acids, saturated	g	1.22	1.22	2.22	0.88	0.42	0.21	0.69

Fatty acids, monounsaturated	g	1.70	1.70	3.00	1.34	0.65	0.33	1.06
Fatty acids, polyunsaturated	g	4.14	4.14	3.83	3.43	1.65	0.83	2.70
Omega-6 Fatty Acid	g	3.57	3.57	3.59	3.02	1.45	0.74	2.38
Omega-3 Fatty Acid	g	0.55	0.55	0.22	0.41	0.20	0.10	0.32
Vitamins								
Thiamin	mg	1.79	1.79	0.08	0.10	0.18	0.16	0.08
Riboflavin	mg	1.04	1.04	0.36	0.25	0.10	0.07	0.05
Niacin	mg	7.62	7.62	2.64	0.86	1.44	0.15	0.20
Pantothenic acid	mg	2.34	2.34	0.28	0.26	0.06	0.05	0.07
Vitamin B-6	mg	0.99	0.99	0.22	0.22	0.10	0.04	0.05
Folic	mcg	532.50	532.50	23.90	33.00	176.10	1.50	15.00
Vitamin A	IU	30.00	30.00	0.00	87.00	0.00	32.00	85.00
Vitamin E	mg_ATE	0.15	0.15	tr	0.01	0.00	0.01	tr
Biotin	mg	0.02	0.02	tr	tr	tr	tr	tr
Choline	mg	60.00	60.00	tr	tr	tr	tr	tr
Inositol	mg	72.00	72.00	tr	tr	tr	tr	tr
PABA	mg	6.00	6.00	tr	tr	tr	tr	tr
Special Nutrients								
Isoflavones	mg	4000.00	200.00	43.52	42.55	97.43	9.65	23.61
Glycogen	g	1.10	1.10	tr	tr	tr	tr	tr
Beta Glucans	g	0.50	0.50	tr	tr	tr	tr	tr
Glutathione	mg	60.00	60.00	tr	tr	tr	tr	tr
SOD	unit	1650.00	1650.00	tr	tr	tr	tr	tr
RNA/DNA	g	1.05	1.05					
An Empty Cell indicates a value is un-known; "tr" indicates a value is probably a trace or none.								

As can be seen from the above, the Soynatto® product may provide proteins, minerals, and vitamins, in a fermented soy form. The fermentation process may infuse the

product with *saccharomyces cerevisiae*, commonly known as “bakers yeast” or “brewers yeast.” *Saccharomyces cerevisiae* is more traditionally known to ferment sugars present in flour or dough, yielding carbon dioxide and alcohol. Accordingly, it should be appreciated that a protein, one or more of a mineral, and one or more of a vitamin, along with
5 *saccharomyces cerevisiae* may be present in the starch composition.

The fermented soy product herein may include increased concentrations of glycitein, daidzein and genistein, reportedly present at several hundred percent more than other more common soyfood sources. Glycitein, daidzein and genistein belong to the isoflavone class of flavanoids and may be classified as phytoestrogen, since they are plant derived nonsteroidal
10 compounds that contain estrogen-like biological activity.

In the context of the present invention, the direct injection molding of the fermented soy product may offer advantages with respect to the activity of the soy product in a final molded shape. Specifically, the direct injection molding provides that the fermented soy product is not substantially degraded and the nutritional value of the fermented soy product
15 remains substantially unchanged.

The starch composition may also include enzymes and/or co-enzymes which are similarly available through Bio Foods, Ltd., Pine Brook, N.J. and sold under the trademark of BT-CoQ10®. This reportedly is a biologically transformed (fermented) cell mitochondrial coenzyme and contains Coenzyme Q10, antioxidants, phytonutrients and cofactor mineral
20 nutrients and other cell constituents. The enzymes and/or co-enzymes may be present between 0.1-10% by weight of the starch composition, including all increments and values therebetween such as 1%, 5%, etc.

Reportedly, the coenzyme Q10 is a fat-soluble compound primarily synthesized by the body and also consumed in the diet and is required for mitochondrial ATP synthesis. The
25 fermented coenzyme also reportedly belongs to the family of compounds known as ubiquinones, which are either of two isomeric cyclic crystalline compounds $C_6H_4O_2$ that are di-keto derivatives of dihydro-benzene. It may also function as an antioxidant in cell membranes and lipoproteins.

Other additives may be introduced into the composition as well. These additives may
30 include vegetable matter, fruit matter, rawhide, nuts, nut bits or nut flour such as peanut flour, and animal or fish products, by-products, meal or digests, etc. Glutens may also be incorporated into the starch composition. Gluten may be understood as water-insoluble

protein complex extracted from cereal grains such as maize or corn and wheat. These additives may be present individually or cumulatively between about 0.1-50% by weight of the starch composition and all increments and values therebetween including 0.1-5.0%, 15%, 25%, etc.

5 Additionally, flavorants, herbs, herbal extracts, vitamins, minerals, colorants, yeast products, soy products, attractants, etc, may be incorporated into the starch composition. Yeast products may include nutritional yeast or brewers yeast such as *saccharomyces cerevisiae*, dairy yeast such as *kluveromyces marxianus* or wine yeast such as *saccharomyces fermentati*. The soy products may include fermented soy or other soy products, as listed in
10 the table above. Attractants may include compounds listed herein, such as the animal or fish digests, or other compounds that may increase an animal's interest in the starch composition. These additives may be present individually or cumulatively between about 0.01-25% by weight of the starch composition and any increment or value therebetween including 0.01-0.5%, 10%, 20%, etc. The composition may also include calcium carbonate. The calcium
15 carbonate may be present between about 5-10%.

 The additives of the starch composition may be introduced directly into the barrel of an injection molding machine **100**, illustrated in **FIG. 1**, through a hopper or other feeding device **102**. Various feeding devices for introducing the additives into the injection molding barrel may be contemplated including loss-in weight gravimetric blenders/feeders, auger
20 feeders, venturi loaders, etc. Those skilled in the art will appreciate that an injection molding machine **100** typically contains a barrel **104** including a feed section **106**, a screw **108** and an output nozzle **110**. The barrel **104** may include a plurality of temperature control zones **112**, **114**, **116**, **118** in the barrel extending from the feed section **106** section to the nozzle **110**. The injection molding machine may include a mold **120** having one or more cavities **122**. The
25 molding machine may also be vented, including a vented barrel and/or a vented mold.

 The temperature adjustment may vary for each zone. For example, in one exemplary embodiment, the molding machine barrel may include 4 zones, zone 1 **112** being the closest to the feed section **106** and zone 4 **118** being the closest to the nozzle **110**. Zone 1 **112** may be set to less than about 150 degrees F, including any increment or value between about 35 to
30 150 degrees F including between about 46 to 150 degrees F, 46 to 70 degrees F, etc. Similarly zone 2 **114** may be set between about 70 to 150 degrees F including any increment or value therebetween, zone 3 **116** between about 50 to 300 degrees F including any

increment or value therebetween, and zone 4 **118** between about 200 to 375 degrees F including any increment or value therebetween. The nozzle **110** may be set between about 250 to 390 degrees F including any increment or value therebetween. The bushing **124** inside of the mold **120** may be set between about 250 to 425 degrees F including any increment or value therebetween and the mold **120** may also be set between about 35 to 65 degrees F including any increment or value therebetween.

Once introduced into the barrel **104** of the molding machine **100** the additives may be blended as the screw **108** conveys the material towards the mold **120** where the starch composition may be formed. The mold **120** may cool the starch composition. Once molded, and venting takes place, the starch composition may include water between about 1-20% by weight of the starch composition, including all increments and values therebetween such as 10%, 15%, etc. The starch composition may be molded into any form capable of being produced in an injection molding cavity.

The foregoing description is provided to illustrate and explain the present invention. However, the description hereinabove should not be considered to limit the scope of the invention set forth in the claims appended here to.

What is claimed is:

1. A method for direct injection molding raw starch in an injection molding machine including a screw, a barrel and a mold to produce an animal chew, comprising:

introducing raw starch, plasticizer, and water directly into the barrel of the injection molding machine, wherein said starch is present at levels greater than about 50% by weight, and said plasticizer is present at levels greater than about 15% by weight;

mixing said starch, said plasticizer and said water in said barrel to form a starch composition;

forming said starch composition into a molded shape.

2. The method of claim 1 wherein said step of introducing said starch, said plasticizer and said water directly into the barrel of the injection molding machine further comprises including an additive.

3. The method of claim 1 wherein said plasticizer comprises glycerin.

4. The method of claim 2 wherein said additive is selected from the group consisting of emulsifiers, cellulose and combinations thereof.

5. The method of claim 4 wherein said emulsifier comprises lecithin.

6. The method of claim 4 wherein in said starch composition said starch is present between about 50-99% by weight of the starch composition, said water is present between about 1-10% by weight of the starch composition, said cellulose is present between about 1-15% by weight of the starch composition, said emulsifiers are present between about 1-10% by weight of the starch composition and said plasticizer is present above about 15% by weight of the starch composition.

7. The method of claim 2 wherein said additive is selected from the group consisting of humectants, vegetable matter, fruit matter, animal products, animal by-products, animal digests, animal meal, fish products, fish by-products, fish digests, fish meal, rawhide, nuts,

nut bits, nut flour, flavorants, attractants, herbs, herbal extracts, vitamins, minerals colorants, yeast products, soy products, calcium carbonate and combinations thereof.

8. The method of claim 7 wherein said additive is present between about 0.1 to 25% by weight of said starch composition.
9. The method of claim 2 wherein said additive is selected from the group consisting of gluten, fermented soy products and combinations thereof.
10. The method of claim 9 wherein said additive is present between about 0.1 to 40% by weight of said starch composition.
11. The method of claim 2 wherein said additive comprises enzymes/coenzymes.
12. The method of claim 11 wherein said additive is present between about 0.1-10% by weight of said starch composition.
13. The method of claim 1 wherein said barrel further includes a feed section and a nozzle including a plurality of temperature control zones in said barrel extending from said feed section to said nozzle.
14. The method of claim 13 wherein said barrel adjacent to said feed section is maintained at a temperature less than about 150 degrees F.
15. The method of claim 13 wherein said plurality of temperature control zones in said barrel are set within the following temperature ranges:
 - zone 1 is set between about 35 to 150 degrees F;
 - zone 2 is set between about 70 to 150 degrees F;
 - zone 3 is set between about 50-300 degrees F; and
 - zone 4 is set between about 200-375 degrees F.

16. The method of claim 1 wherein said mold is set at a temperature between about 35 to 65 degrees F.
17. The method of claim 1 wherein said mold includes a bushing and said bushing temperature is set between about 250 to 425 degrees F.
18. The method of claim 13 wherein said nozzle is set at a temperature between about 250 to 390 degrees F.
19. The method of claim 1 wherein said barrel is vented.
20. The method of claim 1 wherein said mold is vented.
21. A method for direct injection molding raw starch in an injection molding machine including a screw, a barrel and a mold to produce an animal chew, comprising:
 - introducing raw starch and water directly into the barrel of the injection molding machine, wherein said starch is present at levels greater than about 50% by weight, wherein said starch includes fermented soy product;
 - mixing said starch, water and fermented soy product in said barrel to form a starch composition; and
 - forming said starch composition into a molded shape.
22. The method of claim 21 wherein said raw starch further includes gluten.
23. The method of claim 21 wherein said raw starch further includes a plasticizer.
24. The method of claim 23 wherein said plasticizer comprises glycerin.
25. The method of claim 21 wherein said barrel further includes a feed section and a nozzle including a plurality of temperature control zones in said barrel extending from said feed section to said nozzle.

26. The method of claim 25 wherein said barrel adjacent to said feed section is maintained at a temperature less than about 150 degrees F.

27. The method of claim 25 wherein said plurality of temperature control zones in said barrel are set within the following temperature ranges:

- zone 1 is set between about 35 to 150 degrees F;
- zone 2 is set between about 70 to 150 degrees F;
- zone 3 is set between about 50-300 degrees F; and
- zone 4 is set between about 200-375 degrees F.

28. The method of claim 21 wherein said mold is set at a temperature between about 35 to 65 degrees F.

29. The method of claim 21 wherein said mold includes a bushing and said bushing temperature is set between about 250 to 425 degrees F.

30. A method for direct injection molding raw starch in an injection molding machine including a screw, a barrel and a mold to produce an animal chew, comprising:

- introducing raw starch and water directly into the barrel of the injection molding machine, wherein said starch is present at levels greater than about 50% by weight,
- mixing said starch and said water in said barrel to form a starch composition;

- wherein said barrel further includes a feed section and a nozzle including a plurality of temperature control zones in said barrel extending from said hopper section to said nozzle, wherein said barrel adjacent to said feed section is maintained at a temperature less than about 150 degrees F and wherein said plurality of temperature control zones in said barrel are set within the following temperature ranges:

- zone 1 is set between about 35 to 150 degrees F;
 - zone 2 is set between about 70 to 150 degrees F;
 - zone 3 is set between about 50-300 degrees F;
 - zone 4 is set between about 200-375 degrees F; and
- forming said starch composition into a molded shape.

31. A method for direct injection molding raw starch in an injection molding machine including a screw, a barrel and a mold to produce an animal chew, comprising:

introducing raw starch and water directly into the barrel of the injection molding machine, wherein said starch is present at levels greater than about 50% by weight, wherein said starch includes enzymes/coenzymes;

mixing said starch, water and enzymes/coenzymes in said barrel to form a starch composition; and

forming said starch composition into a molded shape.

32. The method of claim 31 wherein said raw starch further includes gluten.

33. The method of claim 31 wherein said raw starch further includes a plasticizer.

34. The method of claim 31 wherein said barrel further includes a feed section and a nozzle including a plurality of temperature control zones in said barrel extending from said feed section to said nozzle.

35. The method of claim 34 wherein said barrel adjacent to said feed section is maintained at a temperature less than about 150 degrees F.

36. The method of claim 34 wherein said plurality of temperature control zones in said barrel are set within the following temperature ranges:

zone 1 is set between about 35 to 150 degrees F;

zone 2 is set between about 70 to 150 degrees F;

zone 3 is set between about 50-300 degrees F; and

zone 4 is set between about 200-375 degrees F.

37. The method of claim 31 wherein said mold is set at a temperature between about 35 to 65 degrees F.

38. The method of claim 31 wherein said mold includes a bushing and said bushing temperature is set between about 250 to 425 degrees F.

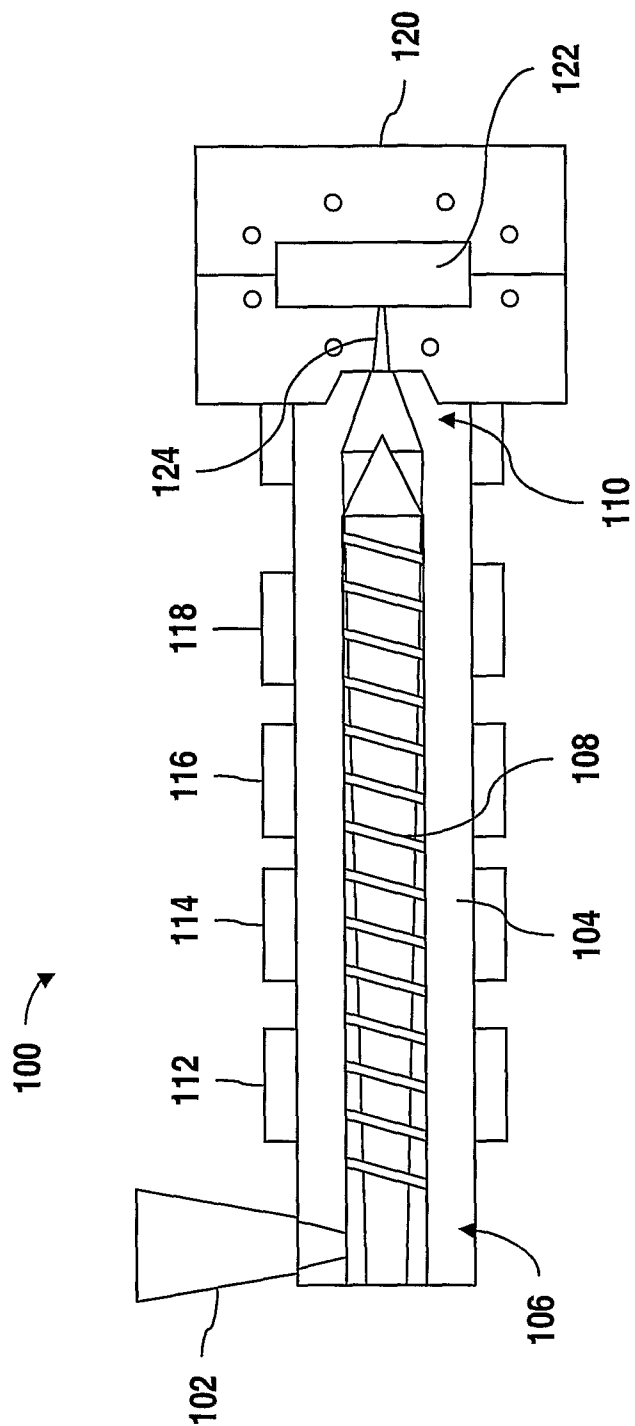


FIG. 1