




US 20090240265A1

(19) **United States**(12) **Patent Application Publication**
Breton et al.(10) **Pub. No.: US 2009/0240265 A1**(43) **Pub. Date: Sep. 24, 2009**(54) **EVERSION APPARATUS AND METHODS****Publication Classification**(76) Inventors: **Tom Breton**, Palo Alto, CA (US);
Steve Golden, Menlo Park, CA
(US)(51) **Int. Cl.**
A61B 17/11 (2006.01)
(52) **U.S. Cl.** **606/149**
(57) **ABSTRACT**

Correspondence Address:

MEDTRONIC, INC.**710 MEDTRONIC PARKWAY NE****MINNEAPOLIS, MN 55432-9924 (US)**(21) Appl. No.: **12/235,445**(22) Filed: **Sep. 22, 2008****Related U.S. Application Data**(63) Continuation of application No. 10/646,254, filed on
Aug. 22, 2003.

Surgical eversion apparatus for preparing a conduit for anastomosis in a human patient comprises an everting member having a loop shaped portion adapted to be inserted into an end portion of a conduit harvested from a human patient and configured to fold a portion of the conduit end portion over itself when moved proximally away from the end of the conduit and along the conduit while a portion of the conduit is held fixed relative thereto. A method of everting a graft comprises positioning a graft in a support device such that an end portion of the graft extends therefrom; introducing a generally looped shaped member into the end portion of the graft extending from said support device; and moving the looped shaped member over the support device to fold at least a portion of the end portion of the graft over the support device.

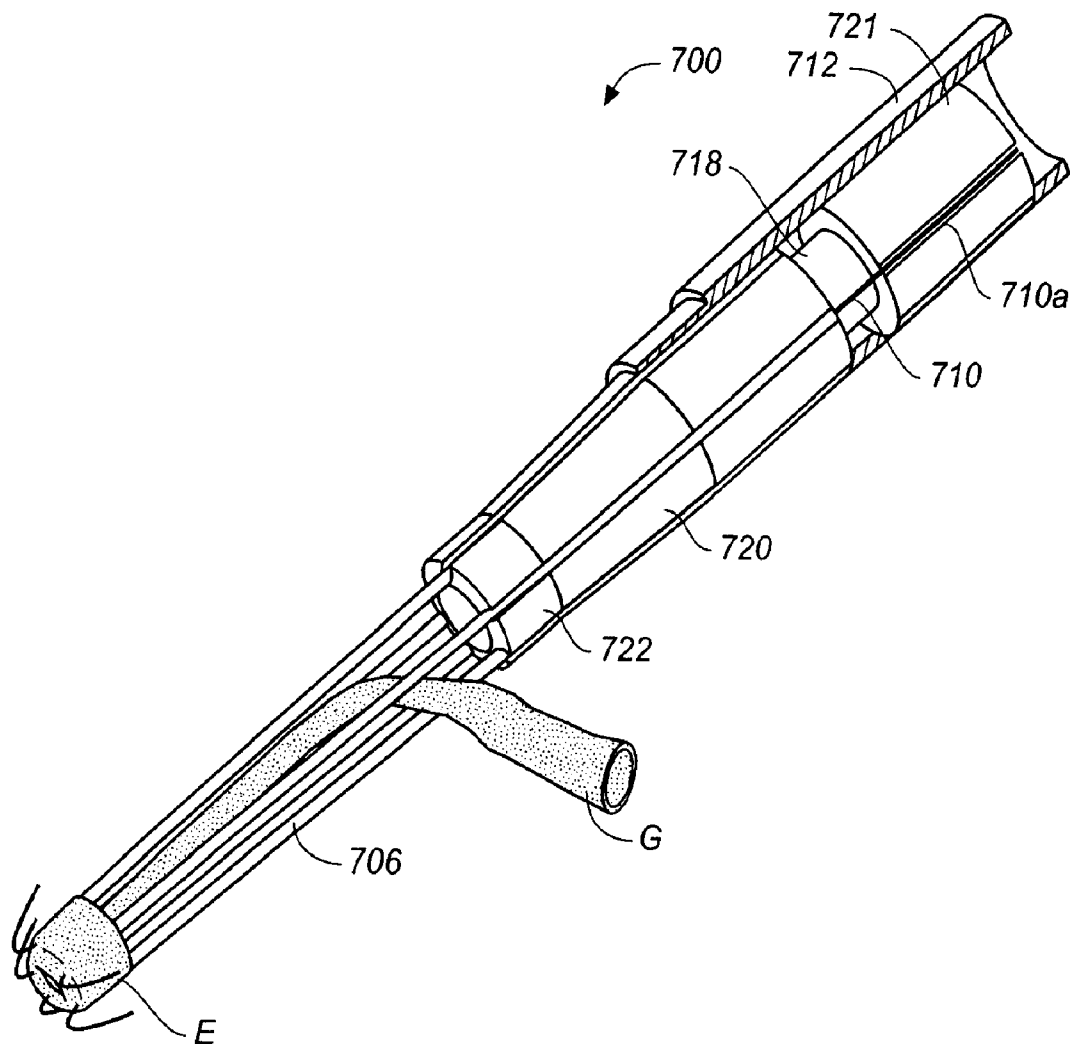

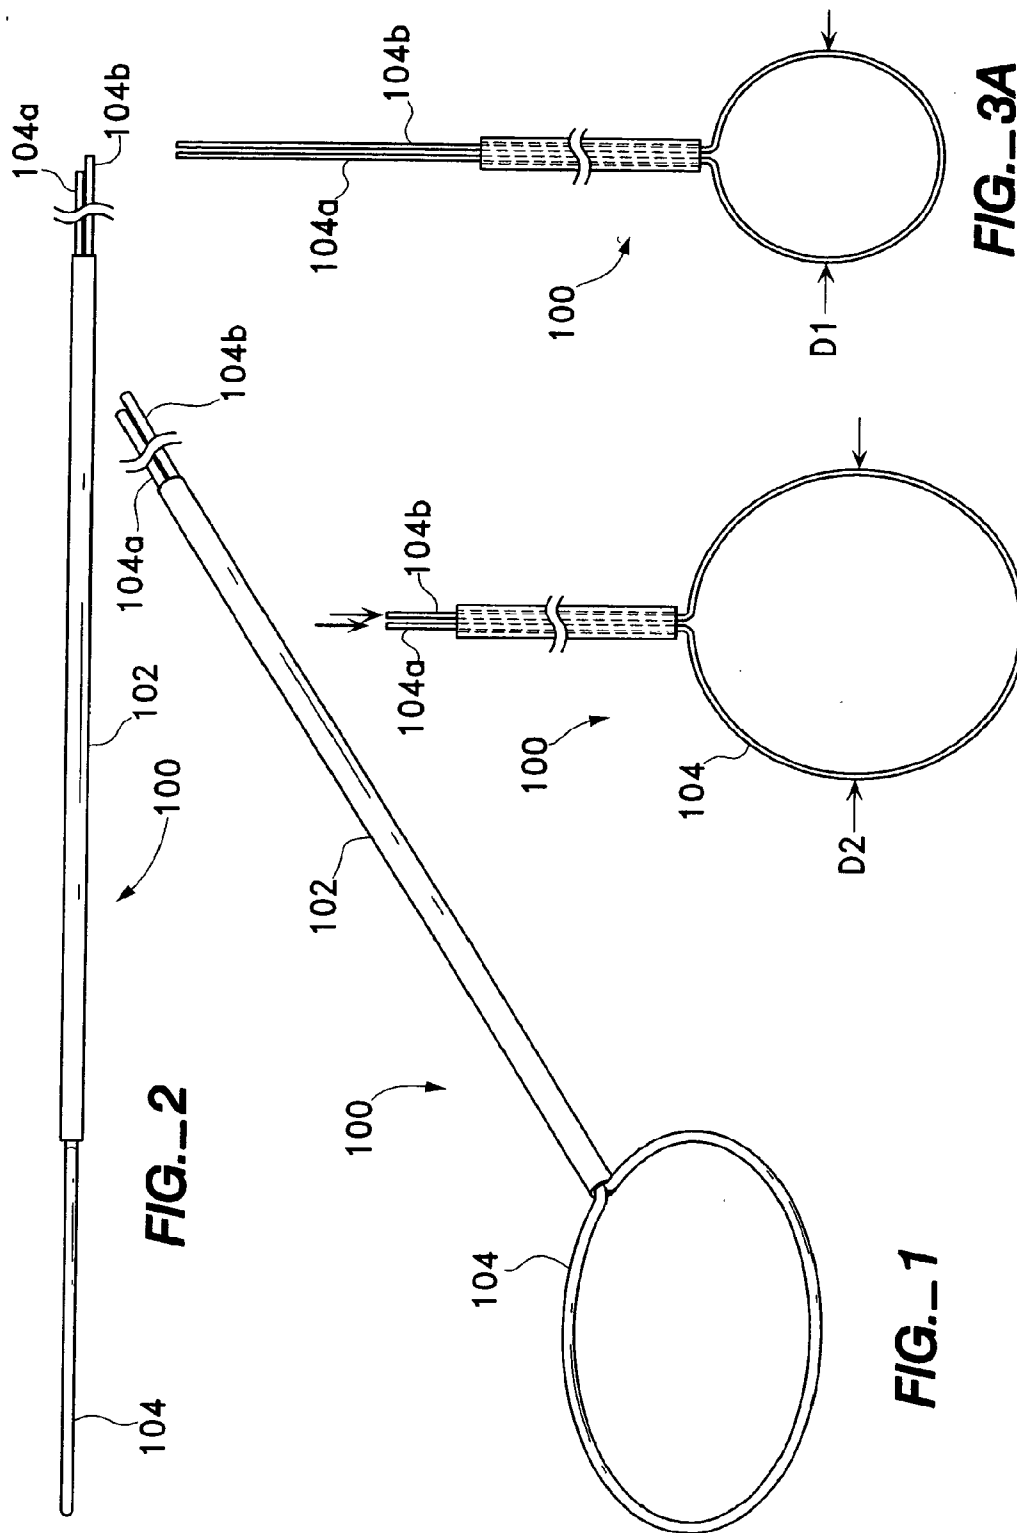


FIG. 3A

FIG. 3B

FIG. 1

FIG. 2

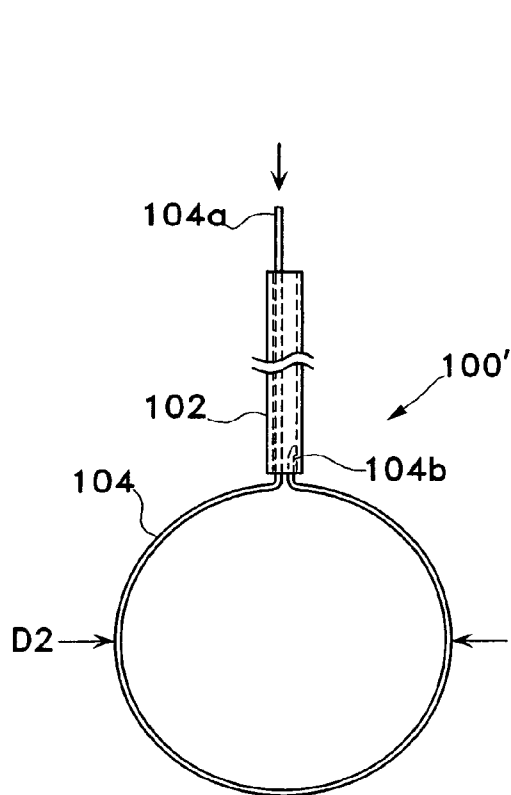


FIG._4A

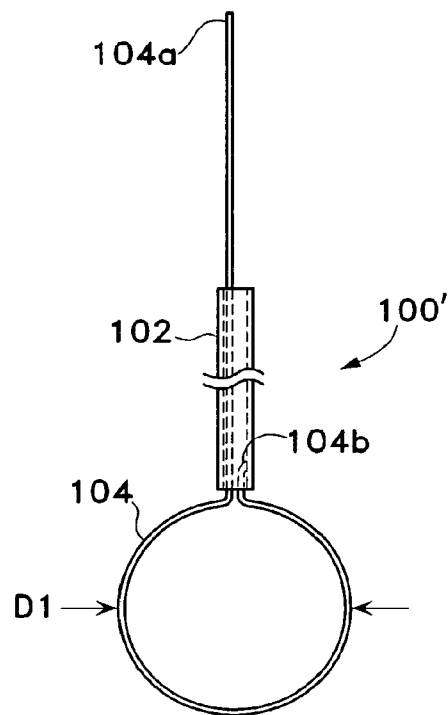


FIG._4B

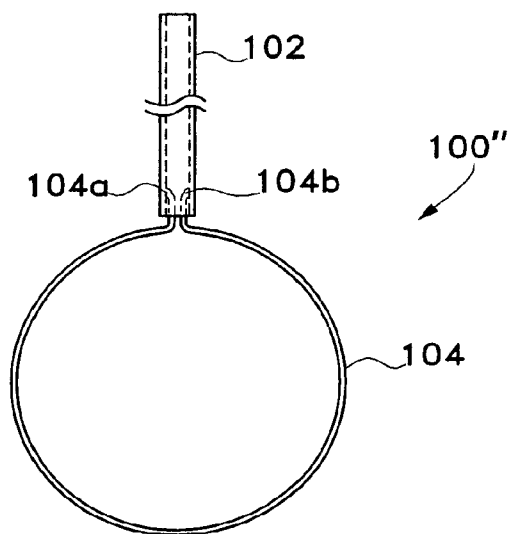
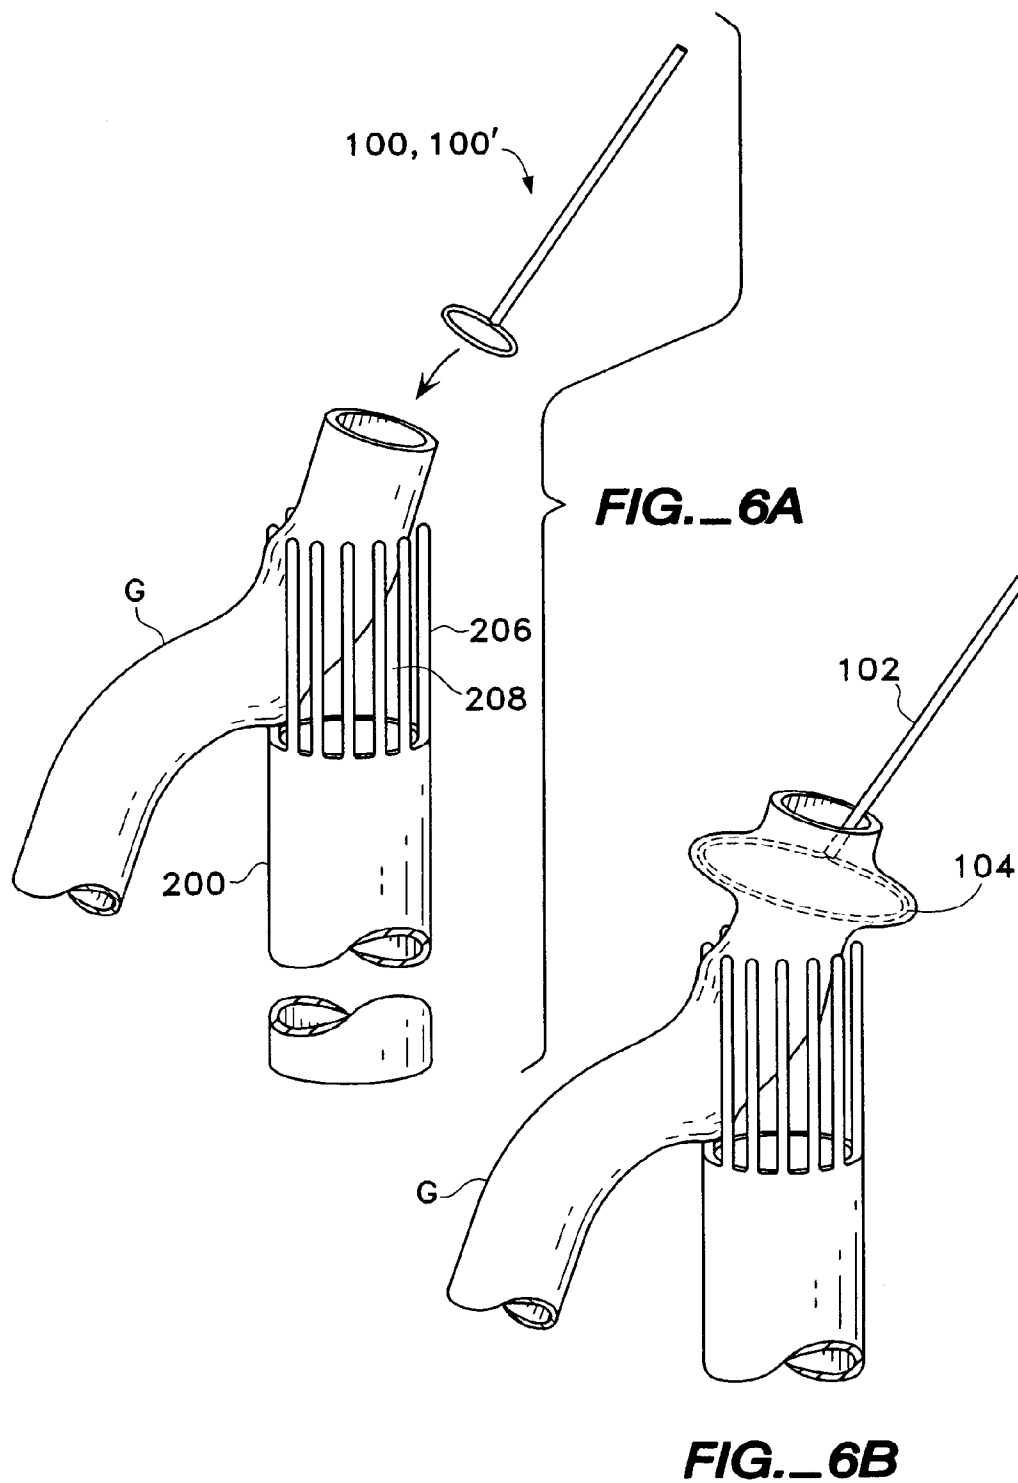


FIG._5



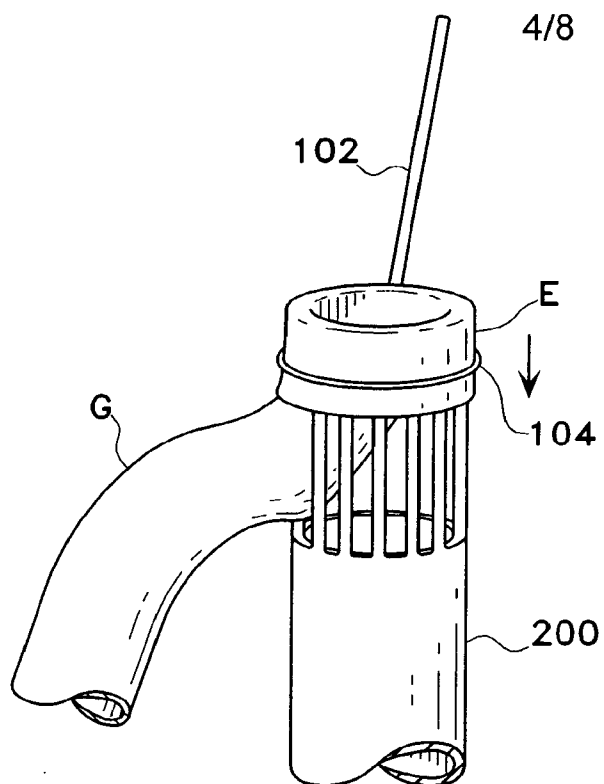
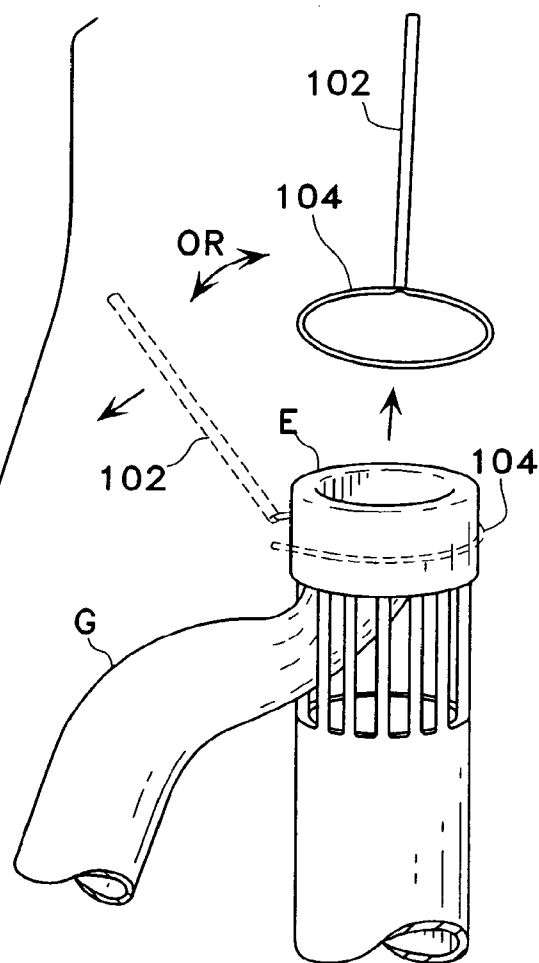
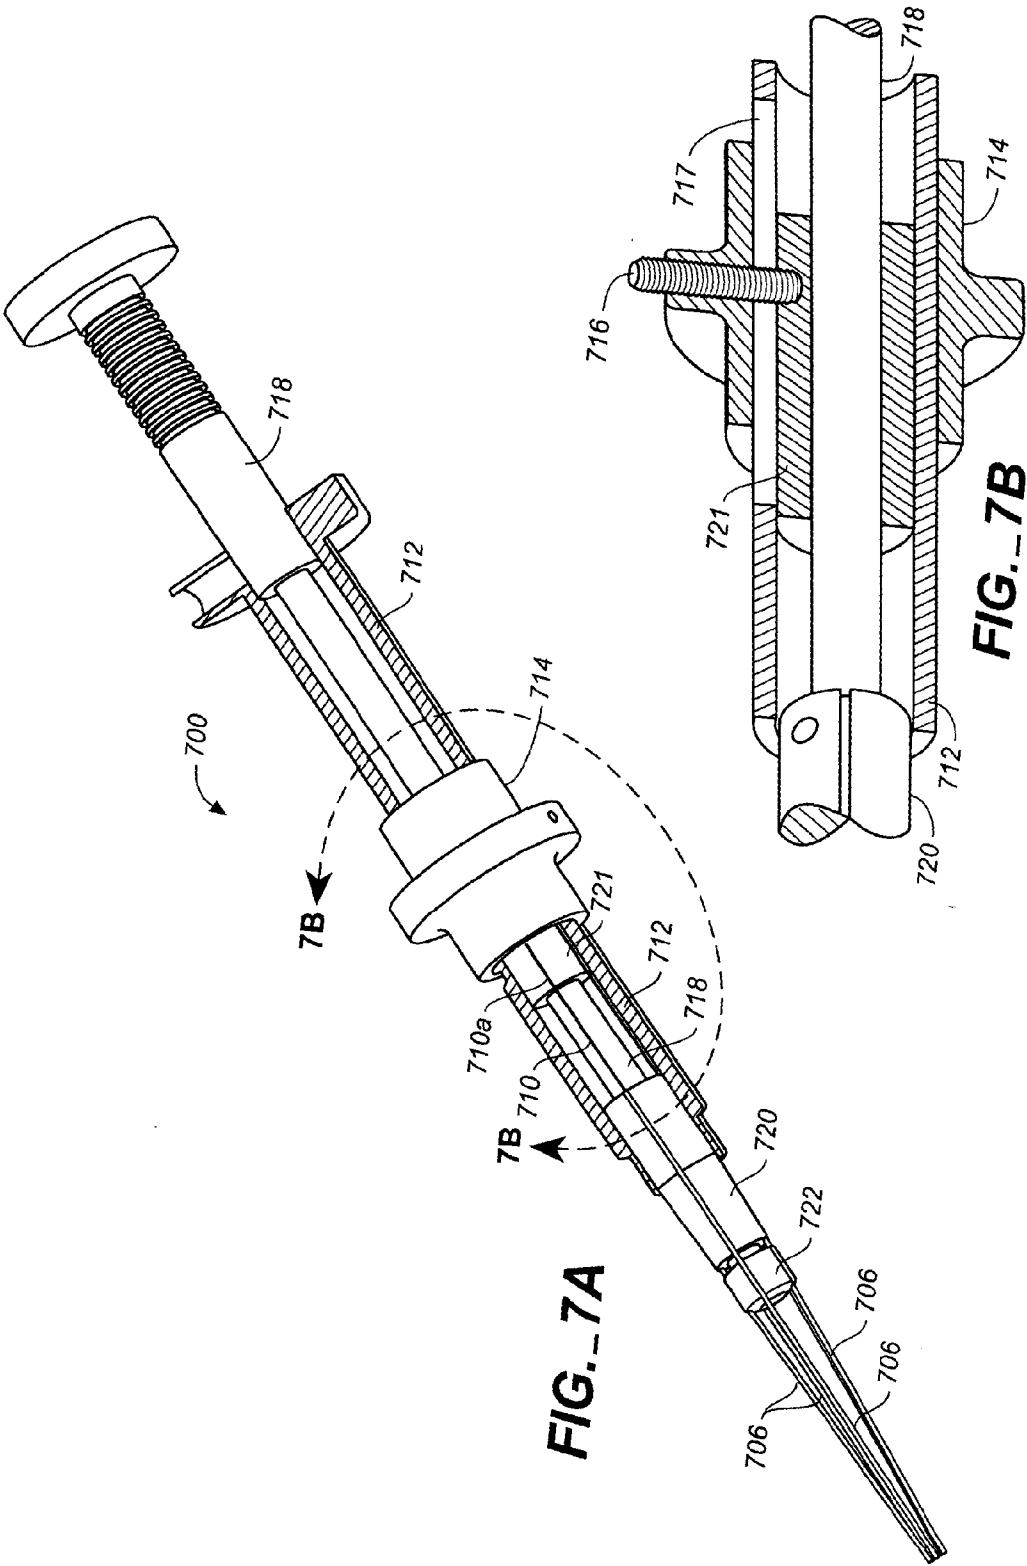
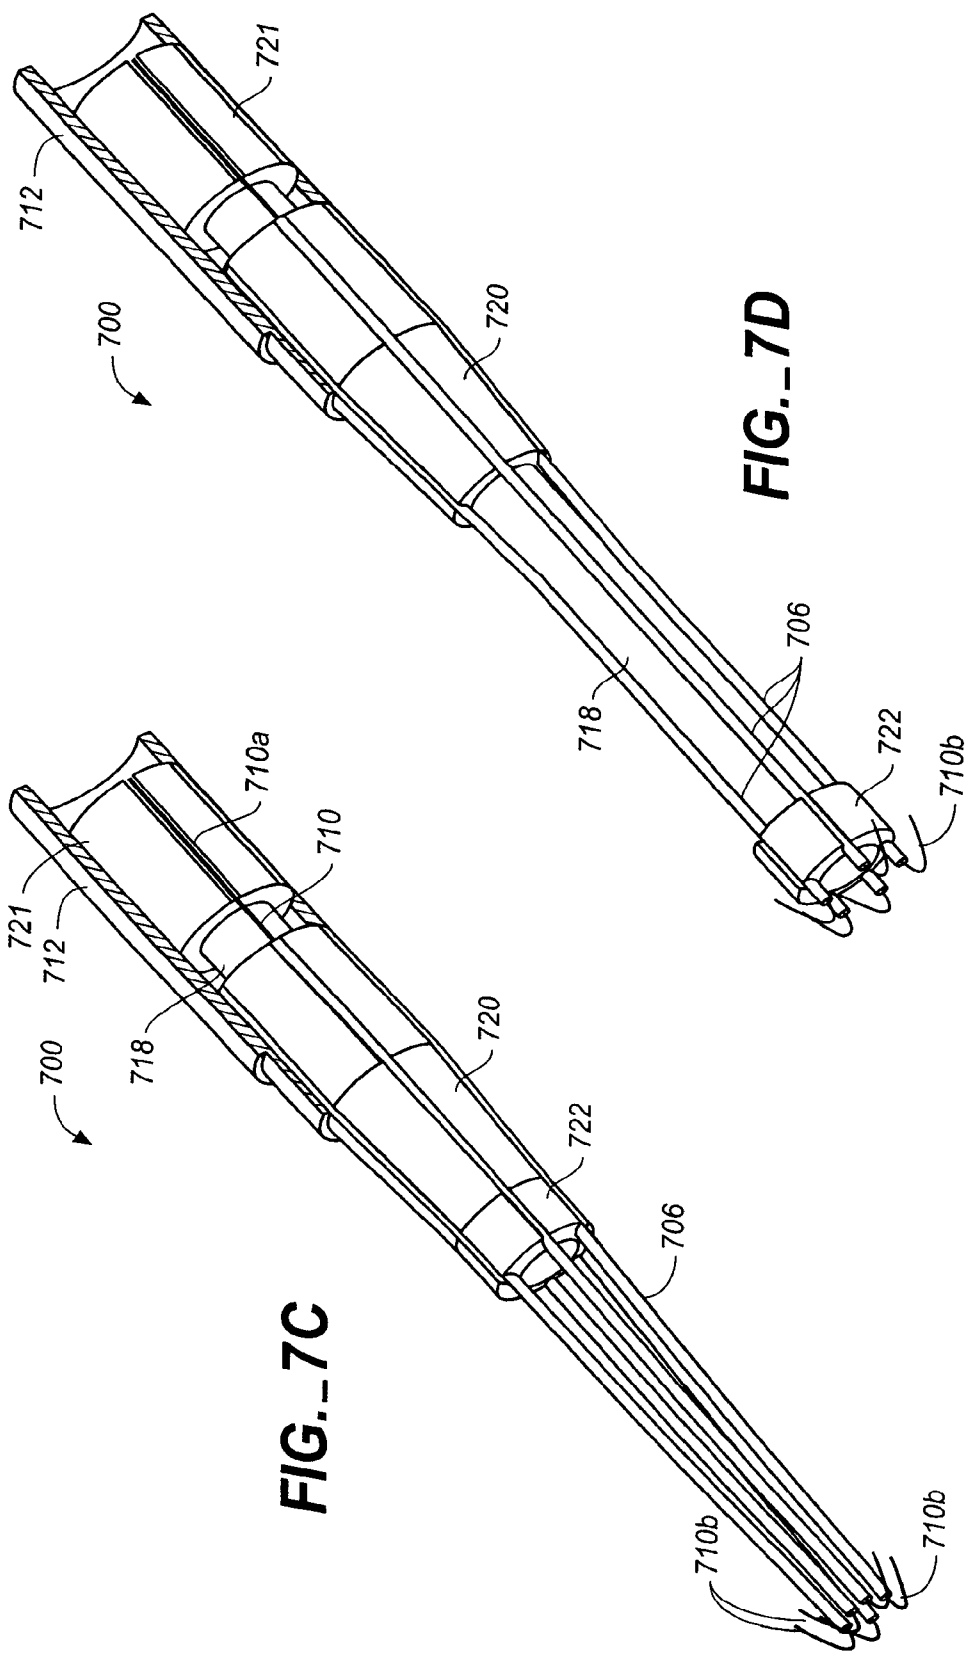



FIG._6C

FIG._6D







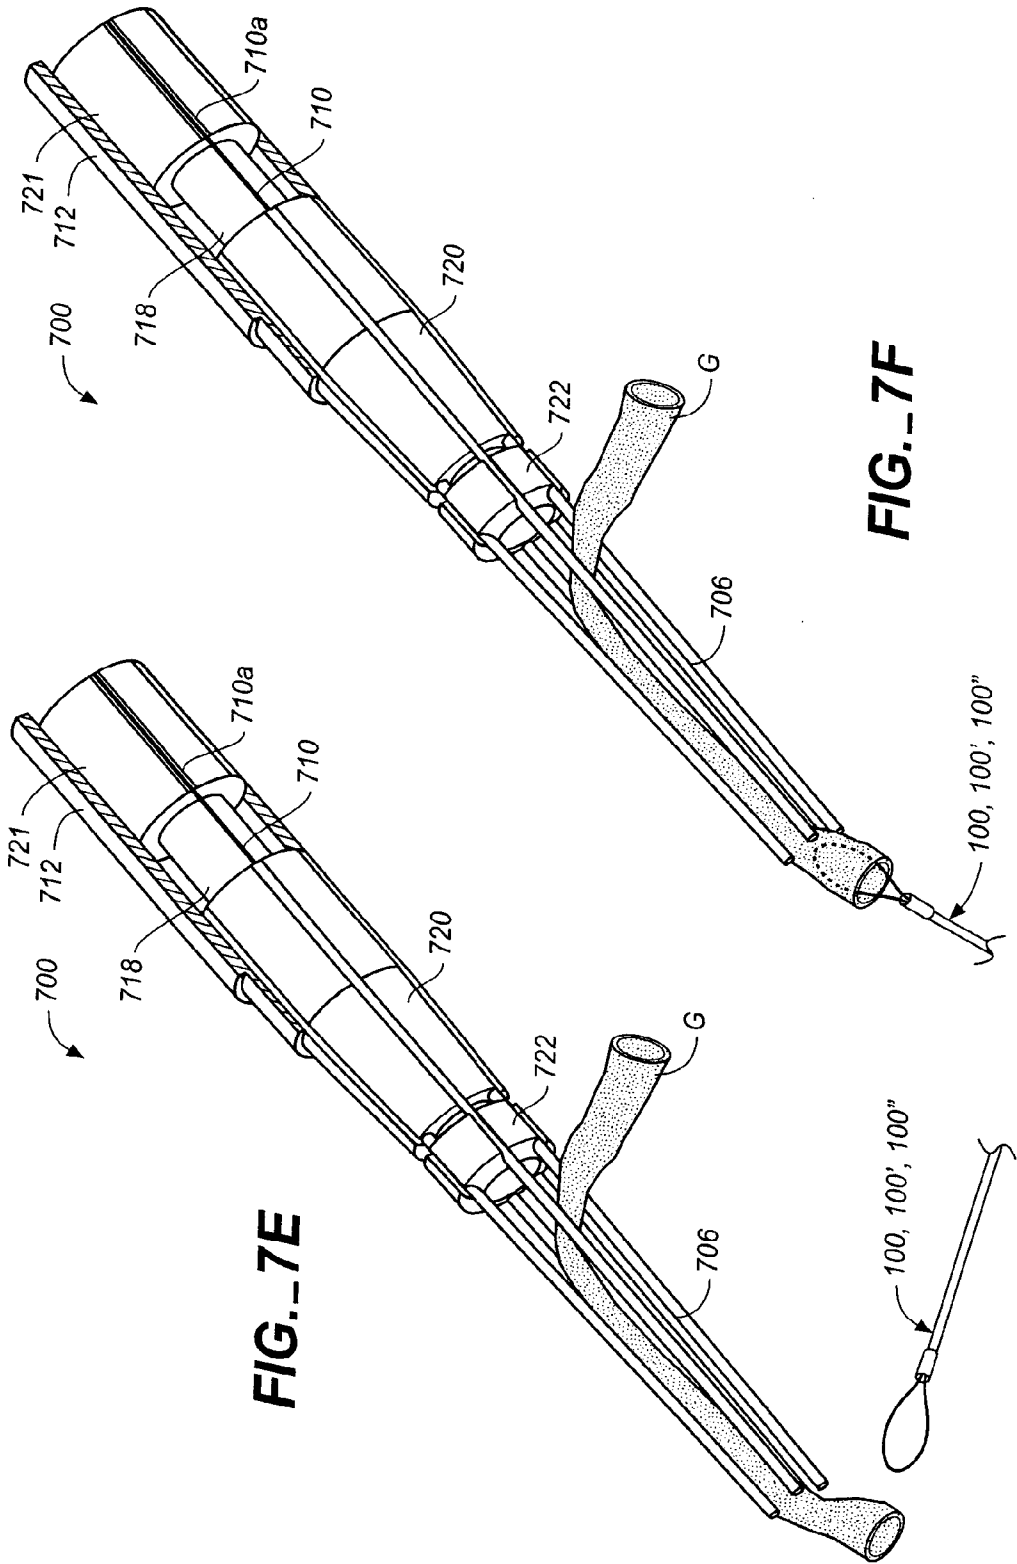

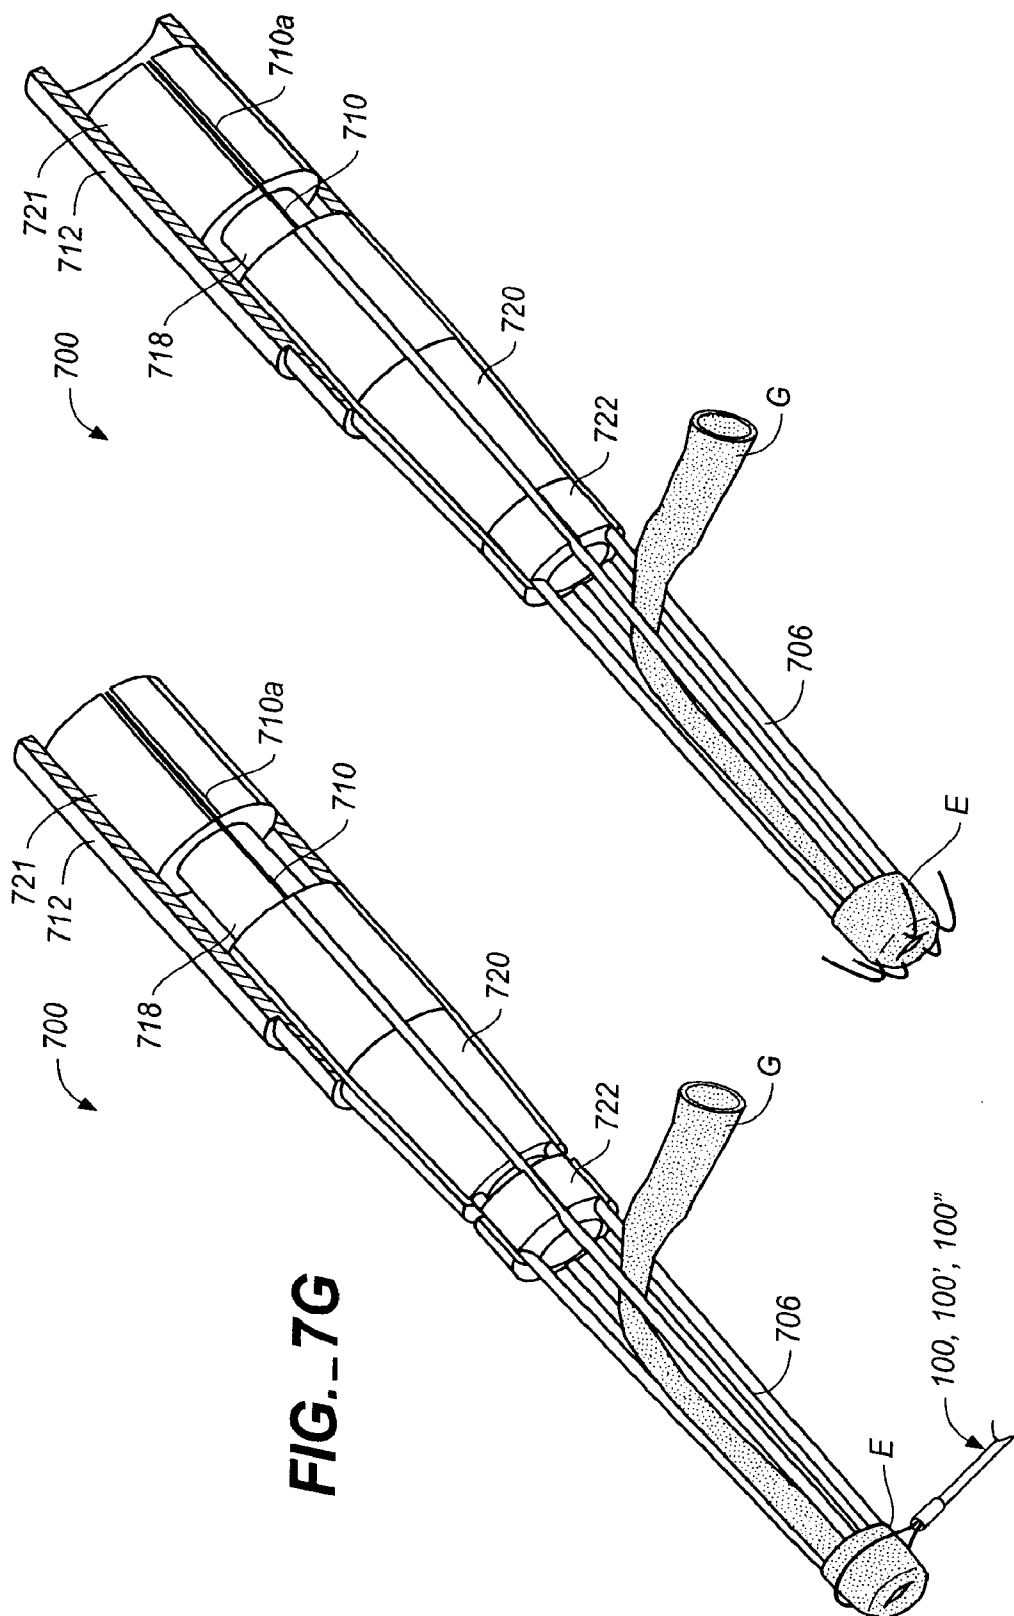


FIG. 7H

EVERSION APPARATUS AND METHODS

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application is a continuation of U.S. Ser. No. 10/646,254, filed Aug. 22, 2003, entitled "Eversion Apparatus and Methods", and bearing Attorney Docket No. P0022020.00; and the entire teachings of which are incorporated herein by reference.

FIELD

[0002] This invention relates to apparatus and methods for preparing a tubular graft for an anastomosis procedure. More particularly, the invention involves apparatus and methods for everting a graft prior to anastomosing the graft to another tubular structure such as an aorta.

BACKGROUND

[0003] The occlusion of the arteries can lead to insufficient blood flow resulting in discomfort and risks of angina and ischemia. Significant blockage of blood flow in the coronary artery can result in damage to the myocardial tissue or death of the patient. In most cases, occlusion of the artery results from progressive long term deposits of plaque along the artery wall. While such deposits may be concentrated and occlude the artery at a particular site, the deposits are most certainly present throughout the arteries and the vascular system.

[0004] Coronary artery bypass graft (CABG) surgery is a surgical procedure performed in severe cases of coronary blockages. CABG procedures involve anastomosing an artery to a graft, such as a vascular graft, which restores the flow of blood by establishing another pathway around the occluded vasculature. During coronary artery bypass graft surgery, a vein or other conduit can be attached proximally to the patient's aorta. The other end is attached to the blocked artery, downstream from the obstruction, thus bypassing the coronary occlusion. CABG procedures can be done by placing the patient on a heart-lung machine and stopping the heart from beating or they can be done on a beating heart without a heart lung machine.

[0005] Vessel eversion apparatus have been disclosed to prepare vascular grafts for anastomosis. For example, vessel everting apparatus is described in U.S. Pat. No. 5,076,161 to Kirsch, et al. and U.S. Pat. No. 6,176,413 to Heck, et al. However, there remains a need to provide improved everting apparatus and methods.

SUMMARY

[0006] The present invention involves improvements in anastomosis apparatus and methods for anastomosing a first tubular structure to a second tubular structure.

[0007] According to one embodiment of the invention, eversion apparatus for preparing a conduit, such as a vessel, for anastomosis in a human patient comprises an everting member having a loop shaped portion adapted to be inserted into an end portion of a conduit from a human patient and configured to fold a portion of the conduit end portion over itself when it is moved away from the conduit end and along the conduit while a portion of the conduit is held fixed relative thereto.

[0008] The eversion apparatus facilitates eversion of a vascular or nonvascular graft, for example, so that the intimal

surface of the graft and the intimal surface of the target conduit, such as a vessel, can be placed in contact with one another for the anastomosis. The eversion apparatus also facilitates rapid graft eversion which can expedite the anastomosis procedure. In cases where the surgeon must complete the graft in as little time as possible due to the absence of blood flowing through a vessel such as the aorta in a CABG procedure, this can be especially advantageous. If blood flow is not promptly restored, sometimes in as little as 30 minutes, the tissues the artery supplies may experience significant damage or necrosis.

[0009] According to another embodiment of the invention, a conduit or vessel eversion system for preparing a conduit or vessel for anastomosis in a human patient comprises a conduit or vessel support device having a proximal end and a distal end; and everting apparatus comprising an everting member, the everting member having a loop shaped portion adapted to be inserted into a portion of a conduit or vessel to be prepared for an anastomosis in a human patient and evert the portion of the conduit or vessel over the conduit or vessel support device when the conduit or vessel is coupled to the support device with an end portion thereof extending from the distal end of the support device.

[0010] According to another embodiment of the invention, a method of everting a graft comprises positioning a graft in a support device such that an end portion of the graft extends therefrom; introducing a generally looped shaped member into the end portion of the graft extending from said support device; and moving the looped shaped member over the support device to fold at least a portion of the end portion of the graft over the support device.

[0011] The above is a brief description of some deficiencies in the prior art and advantages of the present invention. Other features, advantages, and embodiments of the invention will be apparent to those skilled in the art from the following description, accompanying drawings, wherein, for purposes of illustration only, specific forms of the invention are set forth in detail.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] FIG. 1 is a perspective view of an eversion tool constructed according to the principles of the present invention;

[0013] FIG. 2 is a side elevational view of the eversion tool of FIG. 1;

[0014] FIGS. 3A and 3B are top plan views of the eversion tool of FIG. 1 where FIG. 3A shows the everting member or loop adjusted to a first diameter and FIG. 3B shows the everting member or loop adjusted to a second larger diameter;

[0015] FIGS. 4A and 4B illustrate another embodiment of the eversion tool where FIG. 4A shows the everting member or loop adjusted to a first diameter and FIG. 4B shows the everting member or loop adjusted to a second larger diameter;

[0016] FIG. 5 illustrates another embodiment of the eversion tool;

[0017] FIGS. 6A-6D schematically illustrate everting a graft vessel using the eversion tool of any one of FIGS. 1-5, where FIG. 6A illustrates presenting the distal end portion of the graft vessel in a graft support device, FIG. 6B illustrates insertion of the eversion tool in the distal end portion of the graft vessel, FIG. 6C illustrates everting the distal end portion of the graft vessel, and FIG. 6D illustrates removing the eversion tool from the everted graft and graft support device;

[0018] FIGS. 7A-7D depicts another support or anastomosis device apparatus with which the eversion tool can be used, where FIG. 7A is a partial sectional view of the support device, FIG. 7B is an enlarged partial sectional view of the apparatus of FIG. 7A taken generally along line 7B-7B;

[0019] FIG. 7C shows the apparatus of FIG. 7A in a radially collapsed state with the mandrel or slide retracted allowing the arms to progressively move radially inward along the distal portion thereof, and FIG. 7D shows the apparatus of FIG. 7A in a radially expanded state with the mandrel longitudinally extended toward the distal end of the apparatus urging the arms radially outward; and

[0020] FIGS. 7E-7H illustrate everting a graft vessel using the eversion tool of any one of FIGS. 1-5, where FIG. 7E illustrates presenting the distal end portion of the graft vessel in the graft support device of FIG. 7A, FIG. 7F illustrates insertion of the eversion tool in the distal end portion of the graft vessel, FIG. 7C illustrates everting the distal end portion of the graft vessel with the eversion tool, and FIG. 7D illustrates extending piercing member through the distal end portion of the graft vessel after the eversion tool has been removed.

DETAILED DESCRIPTION

[0021] Before the present invention is described, it is to be understood that this invention is not limited to the particular embodiments or examples described herein, as such may, of course, vary. Further, when referring to the drawings, like numerals indicate like elements.

[0022] The apparatus, systems, and methods described herein can be used to connect or anastomose tubular structures or conduits together. The tubular structures can be vascular or nonvascular structures. Thus, the apparatus, systems, and methods described herein can be used in connection with coronary artery bypass grafting procedures during which a vascular conduit or graft structure, such as a vein (e.g., a saphenous vein), artery (e.g., an internal mammary artery), or an artificial conduit or graft structure, is anastomosed to an aorta, the example target structure. They also can be used in connection with the anastomosis of internal mammary arteries to coronary arteries, and saphenous veins to coronary, femoral or popliteal arteries. The apparatus, systems, and methods described herein also can be used in connection with connecting other body lumens including nonvascular lumens, which can include, but are not intended to be limited to, the bile duct, the urethra, the urinary bladder, intestines, esophagus, stomach, and bowel.

[0023] The ideal anastomotic connection can be created when the component vessels are arranged in a situation that provides intima-to-intima contact. Standard suturing techniques provide some degree of this attribute, but there are inconsistencies owing to, for example, variation in operator technique and vessel preparation. To ensure providing exposure of the graft vessel intima, the vessel can be everted (or cuffed). This involves manipulation of the vessel to turn a defined section inside-out to expose the internal lumen and intimal surface. This everted section can also be utilized to create a seal (or gasket) between the graft and the native vessel. The everted section can be used to form the interface at the anastomotic site that also provides a medium for desired tissue healing. One difficulty of vessel eversion arises when attempting to manually manipulate the tissue to create the everted section or cuff. As the tissue is semi-elastic, it has a tendency to resist manual eversion.

[0024] The invention involves graft or vessel everting apparatus, systems and methods to prepare grafts and vessels for anastomosis and assist with the anastomosis. The eversion tool or apparatus of the present invention generally comprises an everting member, which comprises a flexible or pliable member or portion. The flexible or pliable member or portion can be semi-rigid and can be generally oval or circular with a closed or nearly closed turn. In other words, the flexible or pliable member or portion can be in the form of a loop. In operation, the everting member loop is inserted into one end of a graft or vessel and then manipulated to expand the graft or vessel radially outward so that the graft or vessel can be everted or draped over a vessel holder or support device, which will be described in more detail below. The everting member loop can have variable shapes and/or diameters to accommodate variously sized vessel support devices and to facilitate ease of its removal therefrom. The eversion tool also can include a handle to support the everting member.

[0025] Referring to FIGS. 1, 2, 3A, and 3B, one embodiment of an eversion tool constructed in accordance with the principles of the present invention is shown and generally designated with reference numeral 100. Eversion tool 100 generally comprises an everting member 104, which comprises a flexible or pliable member having a portion that is in the form of a circular loop. The generally circular loop can be nearly closed or closed. It should be understood, however, the flexible and/or pliable characteristics allow the loop to be readily reshaped. One suitable material for flexible or pliable member 104 can be stainless steel wire, such as 304 series stainless steel wire, or nitinol wire. The wire typically will have a diameter ranging from about 0.002 to 0.015 inch.

[0026] In the illustrative embodiment, eversion tool 100 includes handle 102 for supporting everting member 104. As shown in the illustrative embodiments, handle 102 can be tubular. It also can have a collar at its distal end as shown in FIGS. 7E-G. The handle can be made from any suitable material such as a machined metal (e.g., stainless steel) or injection molded plastic.

[0027] In the embodiment illustrated in FIGS. 3A and 3B, everting member 104 is slidably mounted in handle 102. More specifically, the ends of a straight wire (e.g., a nitinol wire) can be brought together and inserted into the handle without plastically deforming the wire. This facilitates adjustment of the size of the everting member loop extending from handle 102 by moving the ends of the wire. One can move proximally located everting member ends 104a and 104b relative to handle 102 to adjust the length of the elongated everting member portion extending from the distal end of handle 102 to adjust the loop size. In FIG. 3A, the distal ends 104a and 104b are in first position and in FIG. 3B they have been moved in a distal direction as shown with arrows to enlarge the loop diameter from a first diameter D1 to a second larger diameter D2. From the position shown in FIG. 3B, either one or both of the distal ends can be moved proximally to return the loop diameter toward or to D1 or make the loop smaller than D1.

[0028] Referring to FIGS. 4A and 4B another embodiment of the eversion tool is shown and generally designated with reference numeral 100'. Eversion tool 100' is the same as eversion tool 100 with the exception that one portion of everting member 104 is fixedly secured to handle 102. In the example illustrated in FIGS. 4A and 4B, everting member 104b is fixedly secured to handle 102. Accordingly, one can enlarge the everting member loop diameter D1 as shown in

FIG. 4A by moving or sliding everting member end **104a** in a distal direction as shown with the arrow in FIG. 4B to enlarge the diameter **D1** to **D2**. One can retract everting member end **104a** to return the loop diameter toward or to **D1** or reduce the loop diameter to a diameter less than **D1**. According to further variations, the loop can be preformed with other shapes such as oblong, oval or teardrop shapes.

[0029] Referring to FIG. 5, another embodiment of the eversion tool is shown and generally designated with reference numeral **100'**. Eversion tool **100'** is the same as eversion tool **100** with the exception that two portions of everting member **104** are fixedly secured to handle **102** so that the length of the loop extending from the distal end of the handle is fixed. In the illustrative embodiment, everting member ends **104a** and **104b** can be fixedly secured to handle **102**.

[0030] Referring to FIGS. 6A-D, operation of the eversion tool will be described in conjunction with a graft support device which is schematically shown and generally indicated with reference numeral **200**. In order to assist in the understanding of the operation of the eversion tool, graft support device **200** will first be described.

[0031] Anastomosis or support device **200** is used to hold the everted graft tubular structure (e.g., graft vessel) adjacent to or in an opening formed in a target tubular structure (e.g., target vessel) to which the graft tubular structure is to be anastomosed. More specifically, the support device supports or holds the graft tubular structure in a position relative to the target tubular structure so that the graft and target tubular structure can be secured to one another with known fasteners such as sutures or surgical clips.

[0032] Anastomosis or support device **200** comprises a proximal portion and a distal portion. The distal portion has a plurality of arms (or fingers) **206** that are configured to hold the everted portion or flap "E" of a tubular graft structure "G" as shown in FIGS. 6C and 6D. Adjacent arms are configured and arranged to form spaces, such as spaces **208**, suitable for receiving surgical fasteners therethrough. Support device **200** can be described as a slotted tubular member, each slot having an open distal end and a closed end. After the support device has been positioned in the desired position and fasteners passed through a desired number of the slots through graft tubular structure and the target tubular structure, the open ends allow removal of the anastomosis or support device without disrupting the fasteners.

[0033] Anastomosis device or support **200** can be made from any suitable plastic or metal. For example, the device can be made from ABS plastic material or stainless steel tubing such as **304** stainless steel tubing. The length of the device typically ranges from about 25 mm to about 125 mm depending on the application. In aortic applications, it typically ranges from about 25 mm to about 70 mm. The inner diameter of the tube typically ranges from about 1 mm to about 25 mm also depending on the application. For example, the inner diameter typically can vary from about 3 mm to about 6 mm when sized for an aortic anastomosis where the tube thickness can range from 0.1 mm to 2 mm. On the other hand, the tube inner diameter can be up to about 25 mm when sized for applications concerning the bowel. The tube can have any number of slots or openings, but typically will have 4 to 12 slots cut into its side or the number of arms selected and arranged to form 4 to 12 openings. The slots or openings typically extend a length of about 2 mm to about 25 mm and have a width of about 0.2 mm to about 5 mm. In aortic applications, the slot length typically can range from about 5

mm to about 25 mm and the slot width typically can range from about 0.2 mm to 2.5 mm. The desired number of sutures or clips to be used for a particular anastomosis can determine the number of spaces or slots that the anastomosis device should have. That is the number of openings can match the number desired fasteners. However, it should be understood that the number of openings need not necessarily match the number of fasteners.

[0034] The tube can be split down the side to facilitate its placement in and removal from the tubular graft structure. Regarding the former, the split allows the tube to be compressed and deformed to fit into small openings in the target vessel. On the other hand, the split can be expanded to assist in removing the graft from the device. The tube can comprise or be made of shape memory material or alloy so that the compressed split tube returns to a shape memory tubular shape that is approximately equal to or slightly larger the opening into which it is inserted. The tube construction can provide for some elastic deformation in the radial direction if radially compressed so that its annular dimension can be decreased to some degree, which can be desirable when introducing the device into an opening formed in a vessel where the opening is slightly smaller in diameter than the diameter of device **200** in the uncompressed state. The wall thickness can be selected (e.g., reduced) to provide such elastic deformation. Other factors that can be used to achieve this effect include, but are not limited to a slot number, slit width, and material selection as would be apparent to one of skill in the art. For example, the tubular member can comprise or be made of nitinol.

[0035] Support device **200** can be cylindrical as shown in the drawings or it can have other shapes suitable for the intended purpose. For example, it can have a rectangular or oval configuration. Other construction examples include, but are not limited to, mesh tubes, wire framed constructions, or other nonsolid wall constructions.

[0036] Referring to FIG. 6A, tubular graft structure (e.g., graft vessel) "G" is passed between adjacent fingers **206** of support device **200** and the distal end thereof positioned to extend distally from the support device lumen. Alternatively, the tubular graft structure can be presented through the proximal end of support device **200** so that it passes along the length of the support device and extends from both the distal and proximal ends thereof. Eversion tool **100** or **100'** is prepared for insertion into the distal end of the tubular graft structure. This can include bending the everting member portion that extends from handle **102** so that the plane in which the everting member loop lies forms an angle of about 90 degrees with the longitudinal axis of the handle as shown in FIG. 6A. The everting member loop is adjusted to have a diameter that allows it to be readily inserted into the end of graft G. The loop diameter can be selected to be less than the inner diameter of the end of graft G as shown in FIG. 6A. The everting member loop diameter is then enlarged to mechanically expand graft G, which in this example is semi-elastic, and increase the diameter of the graft as shown in FIG. 6B. The eversion tool is then moved so that the everting member passes over the distal end of the support device, thereby mechanically draping the expanded end of the graft over the support device distal end as shown in FIG. 6C. With the graft everted over support device **200**, the eversion tool can be retracted as shown in FIG. 6D. Optionally, one can detach one end of everting member **104** from handle **102** for easier removal (FIG. 6D).

[0037] When eversion tool **100'** is used with a fixed loop length, one typically does not bend the everting member to form an angle with handle **102**. In this case, the loop is inserted into the graft and pulled over the graft support device as shown in FIGS. 7E-G, which will be described in detail below.

[0038] FIGS. 7A-D illustrate a support device **700** that also can be used in conjunction with eversion tool or apparatus **100**, **100'**, or **100''** in accordance with the principles of the present invention. Support device **700** is described in co-pending U.S. patent application Ser. Nos. 10/340,161 and 10/340,164, both of which were filed on Jan. 10, 2003 and entitled Anastomosis Apparatus and Methods.

[0039] Anastomosis or graft support device **700** generally includes a proximal portion and a distal portion, which includes a plurality of arms **706** in which piercing members **710** can be slidably mounted. More specifically, each arm forms a pathway in which a piercing member **710** is slidably mounted. Arms **706** can be tubular members (e.g., hypotubes) each having a lumen through which a piercing member **706** can slide.

[0040] Arms **706** are biased radially inward and have outer diameters that can range from 0.5 mm to 2 mm, for example, in aortic applications. In the illustrative embodiment, anastomosis apparatus **700** includes a mandrel or slide **722** for radially expanding the piercing member carrying or support arms **706**.

[0041] Each arm **706** has a proximal end secured to tubular member or arm support **720** which tapers so that the annular dimension of the arms, taken collectively, progressively decreases in the distal direction when the slide **722** is in a retracted position adjacent to arm support **720** as shown in FIG. 7A. The arms can be secured in circumferentially spaced longitudinal grooves formed in arm support **720** by gluing or other suitable means. The arms also extend along longitudinal grooves formed in mandrel or slide **722**. Actuator or plunger **718** extends through the device with its end secured to mandrel or slide **722** so that when the pusher is moved forwardly, it pushes the mandrel or slide **722** distally and radially expands the arms. After a graft is everted over the distal ends of the arms as will be described below, it can be desirable to radially expand the arms when graft holder or support **700** is positioned in an opening in a target tubular structure (e.g., target vessel) to which the tubular graft structure (e.g., graft vessel) is to be anastomosed. The radial expansion of the arms can enhance or form a seal between the graft and the target tubular structure (e.g., an aorta).

[0042] Referring to FIGS. 7C and 7D, apparatus or device **700** further includes piercing members **710**, which are slidably mounted in arms **706**. Piercing members **710** have proximal portions **710a** and distal portions **710b**. Piercing members **710** extend from arms **706** proximally toward cylindrical piercing member support **721** where proximal portions **710a** are secured in grooves formed in cylindrical piercing member support **721**. Support **721** is slidably mounted on actuator or pusher **718** and secured to cylindrical knob or finger grip **714** by fastener or screw **716** (FIG. 7B). When knob **714** is pushed forwardly in a distal direction, the piercing members are extended as shown in FIGS. 7C and 7D. Moving the knob **714** proximally retracts the piercing members as shown in FIG. 7A. Housing or tubular body **712** can have a longitudinal slot **717** through which screw **716** can slide so that knob **714** can move independently from housing **712**.

[0043] The radius of curvature of the memory shaped distal portions **710b** of the piercing members can vary. For example, a larger radius of curvature may be desired if the user wants to insert part of the device into the opening in the target structure or vessel to which the graft is to be anastomosed. On the other hand, a smaller radius of curvature may be desired if the user wants to tack the device down around the opening in the target structure or vessel, thereby seating the device on the outer wall and covering the opening with the graft.

[0044] Distal portions **710b** have the desired memory shape to pierce the graft and vessel to which the graft is to be anastomosed when the piercing members are advanced. In the illustrative embodiment, the piercing members comprise shape memory material so that the distal portions **710b** can be provided with a hook configured memory shape, which is one suitable shape for holding the graft and vessel together during the anastomosis. Thus, the piercing members can be made of nitinol wire and the distal portions provided with the desired memory shape as is known in the art so that they return to their memory shape when in an unbiased state (e.g., extended from arms **706**). In other words, the shape memory alloy distal portions exhibit pseudoelastic (superelastic) behavior.

[0045] Referring to FIGS. 7E-G, eversion of a graft over the distal end portion of support member or apparatus **700** using any one of the eversion tools **100**, **100'**, or **100''** will be described. Graft structure (e.g., graft vessel) **G** is positioned in the graft support device or apparatus **700** with the distal end of graft structure **G** extending from the distal end of the support device as shown in FIG. 7E. The everting member loop of eversion tool **100** is introduced through the distal end of the graft structure and inserted into the graft lumen shown in FIG. 7F. The diameter of the everting member or loop can be increased as described above in connection with embodiments **100** and **100'** to expand or increase the diameter of the graft vessel to make it easier to evert the distal end portion of the graft structure over the distal end of the graft holding device. The everting member loop is then turned or oriented so that it can pass over the distal end portion of the support member and moved to pass over the support member distal end portion or arms **706**, thereby everting graft structure **G** over the support member distal end portion and forming everted portion **E** with the intimal surface of the graft lumen exposed and facing radially outward. In this manner the graft is prepared for an anastomosis where an intima-to-intima connection can be readily achieved. The support device can be positioned in an opening formed in the target tubular structure and the piercing members extended as shown in FIG. 7H to hold the graft and target tubular structures together, while fasteners are used to secure the graft and target structures together.

[0046] More specifically, after the surgeon cuts a hole or opening in the target tubular structure or vessel (e.g., the aorta) using a scalpel and an aorta cutting device or punch, the surgeon covers the hole with either a finger or other suitable tool. The distal portion of the support device and the portion of the graft everted thereover are positioned in the vessel opening. The distal portions of the piercing members are extended and the mandrel is moved distally to expand the arms and everted graft against the tissue surrounding the opening so as to form a seal therewith. In other words, the arms can be expanded to urge the everted graft against the tissue surrounding the target vessel opening to seal the connection between the graft and target vessel. After the fasteners have been placed to connect the graft and target tubular struc-

tures, the piercing members are retracted and anastomosis device 700 pulled off of the graft and target structures. Additional fasteners or clips can be placed at the connection, if any blood appears to be seeping out from the graft and target vessel.

[0047] Any fastener can be used to secure the tubular graft and target structures together. Examples of suitable fasteners include conventional sutures and surgical clips such as the surgical clips disclosed in U.S. Pat. Nos. 5,972,024 to Northrup, et al., 6,607,541 to Gardiner, et al., 6,514,265 to Ho, et al., U.S. Patent Publication No. 2002-0010490 of U.S. patent application Ser. No. 09/260,623 filed Mar. 1, 1999 and entitled Tissue Connector Methods and Apparatus and U.S. patent application Ser. No. 09/090,305 filed Jun. 3, 1998 and entitled Tissue Connector Apparatus and Methods.

[0048] Variations and modifications of the devices and methods disclosed herein will be readily apparent to persons skilled in the art. As such, it should be understood that the foregoing detailed description and the accompanying illustrations, are made for purposes of clarity and understanding, and are not intended to limit the scope of the invention, which is defined by the claims appended hereto.

What is claimed is:

1. Surgical eversion apparatus for preparing a conduit for anastomosis in a human patient using a device with multiple piercing members, said eversion apparatus comprising a handle coupled to an everting member having a loop shaped portion adapted to be inserted into an end portion of a conduit from a human patient and configured to fold a portion of the conduit over itself when it is moved away from the conduit end portion and along the conduit while a portion of the conduit is held fixed relative thereto, wherein said handle defines a major longitudinal axis and further wherein said eversion apparatus is configured to provide a first state in which said loop shaped portion extends from said handle in a plane parallel with said major longitudinal axis.

2. The eversion apparatus of claim 1 wherein said everting member comprises a flexible member having two ends, said two ends being movable relative to said handle and portions of said flexible member being slidably mounted to said handle.

3. The eversion apparatus of claim 1 wherein said everting member comprises a flexible member having two ends, one of said ends being movable relative to said handle, the other one of said two ends being fixedly secured to said handle.

4. The eversion apparatus of claim 1 wherein said everting member comprises a flexible member having two ends, both of said ends being fixedly attached to said handle.

5. The eversion apparatus of any one of claims 2-4 wherein said flexible member comprises a pliable wire.

6. The eversion apparatus of claim 1 wherein said loop shaped portion has an adjustable diameter.

7. The eversion apparatus of claim 1, wherein said everting member is bendable from said first state such that said eversion apparatus is configured to be transitionable to a second state in which said loop shaped portion extends from said handle in a plane forming an angle of about 90 degrees with said major longitudinal axis.

8. A vessel eversion system for preparing a vessel for anastomosis in a human patient, said vessel eversion system comprising: a vessel support device having a proximal end and a distal end forming a plurality of piercing members; and an everting apparatus comprising an everting member, said everting member having a loop shaped portion adapted to be inserted into a portion of a vessel to be prepared for an anastomosis in a human patient and evert the portion of the vessel over said plurality of piercing members when said vessel is coupled to said support device with an end portion thereof extending from said distal end of said support device.

9. The vessel eversion system of claim 8 wherein said everting apparatus includes a handle and said everting member is coupled to said handle.

10. The vessel eversion system of claim 9 wherein said everting member comprises a flexible member having two ends, said two ends being movable relative to said handle and portions of said flexible member being slidably mounted to said handle.

11. The vessel eversion system of claim 9 wherein said everting member comprises a flexible member having two ends, one of said ends being movable relative to said handle, the other one of said two ends being fixedly secured to said handle.

12. The vessel eversion system of claim 9 wherein said everting member comprises a flexible member having two ends, both of said ends being fixedly attached to said handle.

13. The vessel eversion system of any one of claims 10-12 wherein said flexible member comprises a pliable wire.

14. The vessel eversion system of claim 8 wherein said loop shaped portion has an adjustable diameter.

* * * * *