



- (51) **International Patent Classification:**
H02J 1/12 (2006.01) *H02J 3/36* (2006.01)
- (21) **International Application Number:**
PCT/EP2015/050810
- (22) **International Filing Date:**
16 January 2015 (16.01.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
14275011.6 17 January 2014 (17.01.2014) EP
- (71) **Applicant:** ALSTOM TECHNOLOGY LTD [CH/CH];
Brown Boveri Strasse 7, CH-5400 Baden (CH).
- (72) **Inventor:** CHENG, Leong Ching; 15 Ilmington Drive,
New Oscott, Sutton Coldfield, Birmingham B73 6QE
(GB).
- (74) **Agent:** MARSHALL, Caroline; Potter Clarkson LLP,
The Belgrave Centre, Talbot Street, Nottingham Notting-
hamshire NG1 5GG (GB).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LI, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** MULTI-TERMINAL DC ELECTRICAL NETWORK

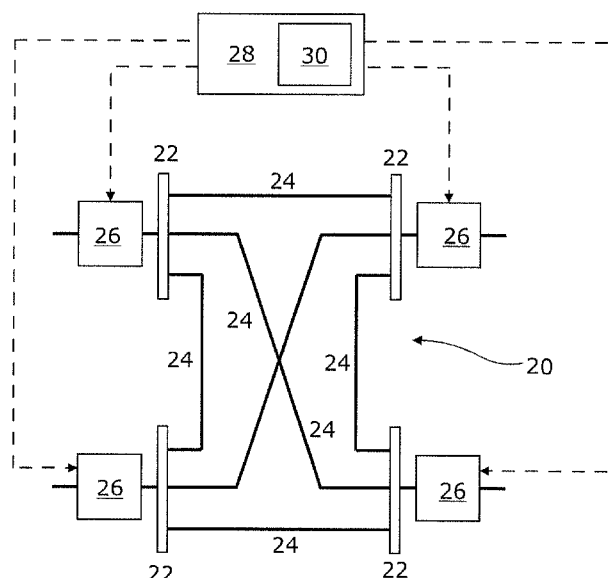


Figure 1

(57) **Abstract:** A multi-terminal DC electrical network (20) comprises: a plurality of DC terminals (22), each DC terminal (22) being operatively connected to at least one other DC terminal (22) via a respective DC power transmission medium (24); a plurality of converters (26), each converter (26) being operatively connected to a respective one of the DC terminals (22), the plurality of converters (26) including at least one designated converter (26); and a controller (28) including a solver (30) configured to use an algorithm to process a plurality of values to thereby compute a no-load DC voltage for at least one first designated converter (26) as a function of the plurality of values, the plurality of values including: at least one first value defining an operating mode of the or each designated converter (26); at least one second value defining a default electrical characteristic of the multi-terminal DC electrical network (20) or a computation parameter of the algorithm; and at least one third value defining an electrical measurement corresponding to a voltage or current in the multi-terminal DC electrical network (20), wherein the controller (28) is configured to operate the or each first designated converter (26) in accordance with the or the respective computed no-load DC voltage.

MULTI-TERMINAL DC ELECTRICAL NETWORK

This invention relates to a multi-terminal DC electrical network, and a method of controlling power flow in a multi-terminal DC electrical network.

5

A new class of high voltage direct current (HVDC) power transmission networks are being considered for moving large quantities of power over long distances, as required by geographically dispersed renewable forms of generation, and to augment existing capabilities of AC and DC power transmission networks with smartgrid intelligence and features that are able to support modern electricity trading requirements. Such a network is sometimes referred to as a DC power grid.

10

15

A DC power grid requires multi-terminal interconnection of HVDC converters, whereby power can be exchanged on the DC side using three or more HVDC converters operating in parallel. Each HVDC converter acts as either a source or sink to maintain the overall input-to-output power balance of the network whilst exchanging the power as required. Such interconnection is carried out using DC power transmission media to interconnect different terminals of the DC power grid.

20

A DC power transmission medium may be any medium that is capable of transmitting electrical power between two or more DC terminals. Such a medium may be, but is not limited to, a submarine DC power transmission cable, an overhead DC power transmission line, or a combination of an overhead DC power transmission line and an underground DC power transmission cable.

25

According to a first aspect of the invention, there is provided a multi-terminal DC electrical network comprising:

- a plurality of DC terminals, each DC terminal being operatively connected to at least one other DC terminal via a respective DC power transmission medium;

30

- a plurality of converters, each converter being operatively connected to a respective one of the DC terminals, the plurality of converters including at least one designated converter; and

- a controller including a solver configured to use an algorithm to process a plurality of values to thereby compute a no-load DC voltage for at least one first designated converter as a function of a plurality of values, the plurality of values including:

35

- at least one first value defining an operating mode of the or each designated converter;

at least one second value defining a default electrical characteristic of the multi-terminal DC electrical network or a computation parameter of the algorithm; and

5 at least one third value defining an electrical measurement corresponding to a voltage or current in the multi-terminal DC electrical network, wherein the controller is configured to operate the or each first designated converter in accordance with the or the respective computed no-load DC voltage.

10 It will be understood that, for the purposes of the specification, a computation parameter of the algorithm is defined as a rule followed by the algorithm when processing the plurality of values.

It will be appreciated that the controller of the multi-terminal DC electrical network may include a global control unit associated with the multi-terminal DC electrical network, or a
15 combination of the global unit and a plurality of local control units respectively associated with the plurality of converters.

In practice, a multi-terminal DC electrical network can include very high numbers of DC terminals, DC power transmission media and converters, all of which are interconnected
20 in a complex layout.

The configuration of the solver according to the invention to compute the no-load DC voltage as a function of the operating mode(s), default electrical characteristic(s) of the multi-terminal DC electrical network and/or computation parameter(s) of the algorithm, and
25 electrical measurement(s) corresponding to a voltage or current in the multi-terminal DC electrical network not only results in a solver that is capable of computing a no-load DC voltage for the or each first designated converter to reliably control power flow in the multi-terminal DC electrical network, but also simplifies computation of the no-load DC voltage for the or each first designated converter.

30 In addition using the solver according to the invention enables provision of a no-load DC voltage for the or each first designated converter to control power flow in the multi-terminal DC electrical network in a way that optimises power flow and power balance in the multi-terminal DC electrical network for a given set of first, second and third values, thus resulting
35 in an efficient and reliable multi-terminal DC electrical network.

Each of the plurality of converters may be a designated converter, preferably a first designated converter.

5 The solver may be configured to use the algorithm to process the plurality of values to thereby compute a converter power order for at least one second designated converter as a function of the plurality of values, and wherein the controller is configured to operate the or each second designated converter in accordance with the or the respective converter power order.

10 In embodiments of the invention, the solver may be configured to use the algorithm to process the plurality of values to thereby compute a converter power order, a power ramp rate order and/or a DC voltage ramp rate order for the or each designated converter as a function of the plurality of values, and wherein the controller is configured to operate the or each designated converter in accordance with the or the respective converter power
15 order, power ramp rate order and/or DC voltage ramp rate order.

Such configuration of the solver enhances the ability of the controller to provide control over the power flow in the multi-terminal DC electrical network.

20 In such embodiments, the solver may be configured to use the algorithm to process the plurality of values to thereby compute a power ramp rate order for each of a plurality of designated converters as a function of the plurality of values so as to equalise a plurality of power ramp times for the plurality of designated converters, the power ramp time for each of the plurality of designated converters being the time taken for that designated
25 converter to attain a predefined converter power.

In other such embodiments, the solver may be configured to use the algorithm to process the plurality of values to thereby compute a DC voltage ramp rate order for each of a plurality of designated converters as a function of the plurality of values so as to equalise
30 a plurality of DC voltage ramp times for the plurality of designated converters, the DC voltage ramp time for each of the plurality of designated converters being the time taken for that designated converter to attain a predefined DC converter voltage.

Configuration of the solver to equalise the power and/or DC voltage ramp times for the
35 plurality of designated converters ensures synchronisation of action of the plurality of designated converters in modifying their respective powers to attain a respective converter power and/or their respective DC voltages to attain a respective DC converter voltage.

The solver may be configured to use the algorithm to process the plurality of values to thereby compute a DC power transmission medium current for at least one designated DC power transmission medium, a converter current for the or each designated converter, a
5 converter voltage for the or each designated converter, a converter power for the or each designated converter and/or a converter power error for the or each designated converter.

For the purposes of this specification, a converter power error is defined as the difference between a preliminary converter power order and the computed converter power for a
10 designated converter.

The solver may be configured to use the algorithm to process the plurality of values to thereby compute a DC power transmission medium current for the or each designated DC power transmission medium, a converter current for the or each designated converter, a
15 converter voltage for the or each designated converter and/or a converter power error for the or each designated converter in accordance with a or a respective predefined limit.

Computation of the DC power transmission medium current for the or each designated DC power transmission medium, the converter current for the or each designated converter, the converter voltage for the or each designated converter and/or the converter power
20 error limit for the or each designated converter enables them to be checked to ensure compliance with a or a respective predefined limit whilst the solver is using the algorithm to process the plurality of values, thus improving the efficiency and reliability of the solver in using the algorithm to process the plurality of values to provide computed outputs for
25 controlling the or each designated converter.

By configuring the solver to compute outputs for controlling the or each designated converter that results in compliance of the DC power transmission medium current for the or each designated DC power transmission medium, the converter current for the or each
30 designated converter, the converter voltage for the or each designated converter and/or the converter power error for the or each designated converter with a or a respective predefined limit, the control of power flow in the multi-terminal DC electrical network can be further optimised.

35 The solver may be configured to use the algorithm to process the plurality of values to thereby sequentially compute at least two of: a DC power transmission medium current for the or each designated DC power transmission medium; a converter current for the or

each designated converter; a converter voltage for the or each designated converter; a converter power for the or each designated converter; a converter power error for the or each designated converter. Configuring the solver in this manner enables the sequentially computed outputs to be sequentially checked to ensure their compliance with a or a
5 respective predefined limit whilst the solver is using the algorithm to process the plurality of values. This has the benefit of saving computation time in comparison to simultaneously computing and checking at least two of: the DC power transmission medium current for the or each designated DC power transmission medium; a converter current for the or each designated converter; a converter voltage for the or each designated converter; a
10 converter power error for the or each designated converter. This has the effect of further improving the efficiency and reliability of the solver in using the algorithm to process the plurality of values.

The solver may be configured to use the algorithm to iteratively process the plurality of
15 values. Configuring the solver to use the algorithm to iteratively process the plurality of values to provide computed outputs for controlling the or each designated converter improves computation of the computed outputs for controlling the or each designated converter, thereby further optimising control of power flow in the multi-terminal DC electrical network.

20 The solver may be configured to use the algorithm to iteratively process the plurality of values to re-compute the DC power transmission medium current for the or each designated DC power transmission medium, the converter current for the or each designated converter, the converter voltage for the or each designated converter and/or
25 the converter power error for the or each designated converter when the computed DC power transmission medium current, the computed converter current, the computed converter voltage and/or the computed converter power error for a prior iteration is not in accordance with the or the respective predefined limit.

30 The solver may be configured to use the algorithm to process the plurality of values to thereby compute a converter power error for the or each designated converter and to stop the iterative processing of the plurality of values when a difference between computed converter power errors of successive iterations is at or below a converter power error difference limit. Configuring the solver in this manner ensures that the iterative processing
35 of the plurality of values is terminated at a suitable convergence of the computed outputs for controlling the or each designated converter, and thereby improves the efficiency of the solver in computing the outputs for controlling the or each designated converter.

As indicated above, the or each first value defines an operating mode of the or each designated converter. For example, the or each first value may be defined by a value selected from a group including:

- 5 • a preliminary converter power order;
- a first operating state to configure the designated converter to constantly operate in a power control mode;
- a second operating state to configure the designated converter to operate in a power control mode and to switch from the power control mode to a DC voltage control mode after operating at a minimum or maximum DC voltage limit for a predefined period of time;
- 10 • a third operating state to configure the designated converter to constantly operate in a voltage control mode;
- a converter droop characteristic, preferably a converter DC voltage-direct current droop characteristic;
- 15 • a converter minimum power ramp rate.

The or each first value may be provided to the solver in the form of an operator inputted value.

20

As indicated above, the or each second value defines a default electrical characteristic of the multi-terminal DC electrical network or a computation parameter of the algorithm. For example, the or each second value may be defined by a value selected from a group including:

- 25 • a base voltage value that is a rated voltage of the DC electrical network;
- a base current value that is calculated by dividing a rated power of the DC electrical network by a rated voltage of the DC electrical network;
- a base impedance value that is a rated impedance of a DC power transmission medium;
- 30 • a maximum number of iterations for processing the plurality of values;
- a load reference set point DC voltage;
- a converter current rating limit;
- a converter voltage rating limit;
- a DC power transmission medium current rating limit;

- an accuracy factor to control the computational accuracy of the algorithm, wherein the accuracy factor is defined by a converter power error limit or a power error difference limit;
- an algorithm acceleration factor to control the computational speed of the algorithm when iteratively processing the plurality of values;
- an optimisation toggle controllable to select whether the plurality of values is to be processed by the algorithm in accordance with one or more voltage or current rating limits;
- a DC power transmission medium impedance.

As indicated above, the or each third value defines an electrical measurement corresponding to a voltage or current in the multi-terminal DC electrical network. For example, the or each third value may be defined by a value selected from a group including:

- a converter voltage;
- a converter current;
- a DC power transmission medium current.

The configuration of the solver according to the invention enables it to take into account a wide range of operating modes, default electrical characteristics of the multi-terminal DC electrical network, computation parameters of the algorithm, and electrical measurements corresponding to a voltage or current in the multi-terminal DC electrical network in order to compute the no-load DC voltage for each converter. This in turn enables high quality control of power flow in the multi-terminal DC electrical network.

The controller may be configured to perform an integrity validation of the integrity of the or each first value. The solver may be further configured to use the algorithm to process the plurality of values only if the integrity of the or each first value is validated by the integrity validation, wherein the or each first value has a valid integrity when one or more prerequisites are met. This ensures that the solver does not waste computation time in processing one or more first values without a valid integrity.

The or each first value may have a valid integrity when:

- a representative matrix of the multi-terminal DC electrical network is square and has a non-zero determinant;

- the first value or at least one of the first values is defined by the second or third operating state;
 - the or each preliminary converter power order for the or each designated converter is in the range of -1 and +1 per unit; and/or
- 5 • an or a respective operating state to configure the or each designated converter is defined by any of the first, second and third operating states.

It will be understood that a representative matrix of the multi-terminal DC electrical network can be derived from the number of DC terminals and DC power transmission media in the multi-terminal DC electrical network. As such the representative matrix is a system dependent parameter in that its structure changes with the number of DC terminals and DC power transmission media in the multi-terminal DC electrical network.

According to a second aspect of the invention, there is provided a method of controlling power flow in a multi-terminal DC electrical network, the multi-terminal DC electrical network comprising:

a plurality of DC terminals, each DC terminal being operatively connected to at least one other DC terminal via a respective DC power transmission medium; and

a plurality of converters, each converter being operatively connected to a respective one of the DC terminals, the plurality of converters including at least one designated converter;

wherein the method includes the steps of:

(i) using an algorithm to process a plurality of values to thereby compute a no-load DC voltage for at least one first designated converter as a function of the plurality of values, the plurality of values including:

at least one first value defining an operating mode of the or each designated converter;

at least one second value defining a default electrical characteristic of the multi-terminal DC electrical network or a computation parameter of the algorithm;

30 and

at least one third value defining an electrical measurement corresponding to a voltage or current in the multi-terminal DC electrical network,

(ii) operating the or each first designated converter in accordance with the or the respective computed no-load DC voltage.

35

A preferred embodiment of the invention will now be described, by way of a non-limiting example, with reference to the accompanying drawings in which:

Figure 1 shows, in schematic form, a multi-terminal DC electrical network according to an embodiment of the invention;

Figure 2 shows, in schematic form, a solver forming part of the controller of the multi-terminal DC electrical network of Figure 1;

Figures 3 and 4 respectively illustrate, in graph form, power control and voltage control modes of each designated converter of the multi-terminal DC electrical network of Figure 1; and

Figure 5 illustrates, in flow-chart form, the operation of the solver to compute outputs for controlling each designated converter of the multi-terminal DC electrical network of Figure 1.

A multi-terminal DC electrical network 20 according to an embodiment of the invention is shown in Figure 1.

The multi-terminal DC electrical network 20 comprises a plurality of DC terminals 22. Each DC terminal 22 is operatively connected to at least one other DC terminal 22 via a respective DC power transmission line 24.

The multi-terminal DC electrical network 20 further includes a plurality of converters 26. Each converter 26 is operatively connected to a respective one of the DC terminals 22. In use, each converter 26 interconnects the corresponding DC terminal 22 to another electrical network, and is operable to provide power conversion between the electrical network and the DC terminal 22.

The multi-terminal DC electrical network 20 further includes a controller 28. In the embodiment shown, the controller 28 is in the form of a combination of a global control unit and a plurality of local control units (not shown) respectively associated with the plurality of converters 26. In other embodiments of the invention, it is envisaged that the controller 28 may be in the form of a global control unit.

In the embodiment shown, each converter 26 is a designated converter 26 and each DC power transmission line 24 is a designated DC power transmission line 24. It will be appreciated that, in other embodiments of the invention, at least one, but not all, of the plurality of converters is a designated converter, and/or at least one, but not all, of the plurality of DC power transmission lines is a designated DC power transmission line.

The controller 28 includes a solver 30. Figure 2 shows, in schematic form, the solver 30 which is configured to use an algorithm to process a plurality of values to thereby compute a plurality of outputs for controlling each designated converter 26 as a function of the plurality of values.

5

The plurality of values includes a plurality of first values, a plurality of second values and a plurality of third values.

10

The controller 28 is preferably configured to include an operator interface such that the plurality of first values can be inputted into the solver 30 by a human operator using the operator interface. The plurality of first values define operating modes of each designated converter 26, and are defined by:

15

- a preliminary converter power order;
- a first operating state to configure the designated converter 26 to constantly operate in a power control mode, as shown in Figure 3;
- a second operating state to configure the designated converter 26 to operate in a power control mode and to switch from the power control mode to a DC voltage control mode after operating at a minimum or maximum DC voltage limit V_{dc_min} , V_{dc_max} for a predefined period of time;
- a third operating state to configure the designated converter 26 to constantly operate in a DC voltage control mode;
- a converter DC voltage-direct current droop characteristic;
- a converter minimum power ramp rate.

20

25

The preliminary converter power order is defined as an order for the designated converter 26 to exchange a certain level of active power whilst disregarding power losses in the plurality of designated converters 26 and the rest of the multi-terminal DC network.

30

Figure 3 illustrates, in graph form, a power control mode of each designated converter 26. The power control mode is defined as a mode in which the designated converter 26 is operated to maintain its local power demands during its operation as an inverter or rectifier. The designated converter 26 in the power control mode may operate at a minimum or maximum DC voltage limit V_{dc_min} , V_{dc_max} .

35

Figure 4 illustrates, in graph form, a voltage control mode of each converter 26 that includes the converter DC voltage-direct current droop characteristic (as indicated by the line connecting "b" and "c", i.e. the line between the minimum and maximum DC voltages

V_{dc_min}, V_{dc_max}). The voltage control mode is defined as a mode in which the designated converter 26 is operated as a slack converter 26 during its operation as an inverter or rectifier. This allows balancing of the total load on the multi-terminal DC electrical network 20 so that the power imported by one or more designated converters 26 acting as a receiving end converter is equal to the power exported by one or more designated converters 26 acting as a sending-end converter minus any power losses.

The converter droop characteristic is defined as a steady state operating frame of the designated converter 26 in terms of V_{DC} and I_{DC} , where the droop definition is based on V_{DC}/I_{DC} .

The converter minimum power ramp rate is defined as a minimum rate of change of power for the designated converter 26.

The plurality of second values define default electrical characteristics of the multi-terminal DC electrical network 20 and computation parameters of the algorithm, and are defined by:

- a base voltage value, V_{base} that is a rated voltage of the multi-terminal DC electrical network 20;
- a base current value, I_{base} that is calculated by dividing a rated power of the multi-terminal DC electrical network 20 by a rated voltage of the multi-terminal DC electrical network 20;
- a base impedance value, Z_{base} that is a rated impedance of a DC power transmission line 24;
- a maximum number of iterations, $iteration_{max}$ for processing the plurality of values;
- a load reference set point DC voltage, $V_{LRSP\_initial}$;
- a converter current rating limit, I_{DC_MAX} ;
- a converter voltage rating limit, V_{DC_MAX} ;
- a DC power transmission line current rating limit, I_{LINE_MAX} ;
- a plurality of accuracy factors $\Delta_0, \Delta_2, \Delta_{delta}$ to control the computational accuracy of the algorithm;
- a plurality of algorithm acceleration factors $\alpha_{line}, \alpha_{IDC}, \alpha_{VDC}, \alpha_0, \alpha_2$ to control the computational speed of the algorithm when iteratively processing the plurality of values. Each algorithm acceleration factor is in the range of 0 and 1;
- a plurality of optimisation toggles $Op_{LINE}, Op_{IDC}, Op_{VDC}$;
- a DC power transmission line impedance Z .

The plurality of third values define an electrical measurement corresponding to a voltage or current in the multi-terminal DC electrical network 20, and are defined by:

- a converter voltage;
- 5 • a converter current;
- a DC power transmission line current.

The plurality of outputs for controlling each converter 26 are:

- a no-load DC voltage for each converter 26;
- 10 • a converter power order for each converter 26;
- a power ramp rate order for each converter 26;
- a DC voltage ramp rate order for each converter 26.

15 The controller 28 is further configured to operate each converter 26 in accordance with the respective computed plurality of outputs.

Operation of the solver 30 to use the algorithm to compute the plurality of outputs as a function of the plurality of values is described as follows, with reference to Figure 5.

20 Once the plurality of first values has been inputted into the solver 30, the controller 28 performs an integrity validation of the integrity of each first value before the solver 30 uses the algorithm to process the plurality of values to thereby compute the plurality of outputs as a function of the plurality of values. The solver 30 is further configured to use the algorithm to process the plurality of values only if the integrity of each first value is validated

25 by the integrity validation. Therefore, the solver 30 terminates the algorithm and thereby does not compute the plurality of outputs if the integrity of each first value is not validated by the integrity validation. At this stage the controller 28 provides a warning message to the operator so that the operator is aware of the need to input new first values due to the invalid integrity of the first values.

30

Each first value has a valid integrity when:

- representative matrices of the multi-terminal DC electrical network 20 are square and has a non-zero determinant;
- at least one of the first values is defined by the second or third operating state;
- 35 • each preliminary converter power order for each designated converter 26 is in the range of -1 and +1 per unit; and

- a respective operating state to configure each designated converter 26 is defined by any of the first, second and third operating states.

When the integrity of the plurality of first values has been validated by the integrity
 5 validation, the solver 30 uses the algorithm to process the plurality of values to thereby
 sequentially compute a DC power transmission line current for each designated DC power
 transmission line 24, a converter current for each converter 26, a converter voltage for
 each designated converter 26 and a converter power for each designated converter 26.
 In the embodiment shown, computation of the designated DC power transmission line
 10 current is followed by computation of the converter current for each designated converter
 26 followed by the computation of the converter voltage for each designated converter 26
 followed by computation of the converter power for each designated converter 26.

Such computation by the solver 30 is performed using a series of matrices in accordance
 15 with the following equations.

The converter DC voltage-direct current droop characteristic of Figure 4 can be expressed
 as:

$$20 \quad V_{DC_i} = m_i I_{DC_i} + V_{LRSP_i} - m_i I_{0_i}$$

where the subscript *i* refers to the respective designated converter 26

V_{DC} and I_{DC} is to the converter voltage and current of the respective designated
 converter 26;

m is the gradient of the converter DC voltage-direct current droop characteristic for
 25 the respective designated converter 26;

V_{LRSP} is the load reference set point DC voltage for the respective designated
 converter 26;

I_0 is the current order for the respective designated converter 26.

30 The current order I_0 is calculated by dividing a preliminary converter power order P_0 for the
 respective designated converter by the respective load reference set point DC voltage
 V_{LRSP} .

A no-load DC voltage V_{NL} , which is a DC voltage of the respective designated converter
 35 26 at zero current, can be expressed as:

$$V_{NL_i} = V_{LRSP_i} - m_i \frac{P_{0_i}}{V_{LRSP_i}}$$

The voltage drop across each DC power transmission line impedance I_{LINE} is expressed as:

5

$$V_{DC_i} - V_{DC_{i+1}} = Z_i I_{LINE}$$

The converter current I_{DC} for each designated converter 26 is found by employing Kirchhoff's current law in relation to the DC power transmission line current I_{LINE} in each DC power transmission line 24.

10

The DC power transmission line current I_{LINE} in each DC power transmission line 24 can be expressed as:

15

$$[I_{LINE}] = A^{-1} \cdot \left(B[V_{LRSP}] + C \left[\frac{P_0}{V_{LRSP}} \right] \right)$$

where A, B and C are representative matrices of the multi-terminal DC electrical network 20.

20

It will be understood that the representative matrices A, B and C of the multi-terminal DC electrical network 20 can be derived from the number of DC terminals 22 and DC power transmission lines 24 in the multi-terminal DC electrical network 20. As such the representative matrices A, B and C are system dependent parameters in that their respective structures change with the number of DC terminals 22 and DC power transmission lines 24 in the multi-terminal DC electrical network 20.

25

The converter power for each designated converter 26 is expressed as:

$$P_{cal_i} = V_{DC_i} \times I_{DC_i}$$

30

After computing the DC power transmission line current I_{LINE} , the computed DC power transmission line current I_{LINE} is checked against the DC power transmission line current

rating limit I_{LINE_MAX} . If the computed DC power transmission line current I_{LINE} exceeds the DC power transmission line current rating limit I_{LINE_MAX} , a first iterative correction loop is triggered.

- 5 The first iterative correction loop involves re-computing the DC power transmission line current I_{LINE} using a modified V_{LRSP} , which is obtained as follows:

$$V_{LRSP_i}^k = V_{LRSP_i}^{k-1} + \alpha_{LINE} \cdot \left(\left| I_{LINE_j}^k \right| - I_{LINE\_MAX_j} \right)$$

where k refers to the number of iteration cycles

- 10 j refers to the respective DC power transmission line 24.

The first iterative correction loop is repeated until the recomputed DC power transmission line current I_{LINE} is equal to or less than the DC power transmission line current rating limit I_{LINE_MAX} . To speed up the algorithm's processing of the plurality of values, the algorithm acceleration factor α_{line} from the plurality of second values can be adjusted accordingly.

15

After computing the converter current I_{DC} for each designated converter 26, the computed converter current I_{DC} for each designated converter 26 is checked against the converter current rating limit I_{DC_MAX} . If the computed converter current I_{DC} for each designated converter 26 exceeds the converter current rating limit I_{DC_MAX} , a second iterative correction loop is triggered.

20

The second iterative correction loop involves re-computing the DC power transmission line current I_{LINE} and the converter current I_{DC} using a modified V_{LRSP} , which is obtained as follows:

25

$$V_{LRSP_i}^k = V_{LRSP_i}^{k-1} + \alpha_{IDC} \cdot \left(\left| I_{DC_i}^k \right| - I_{DC\_MAX_i} \right)$$

The second iterative correction loop is repeated until the computed converter current I_{DC} for each designated converter 26 is equal to or less than the converter current rating limit I_{DC_MAX} . To speed up the algorithm's processing of the plurality of values, the algorithm acceleration factor α_{IDC} from the plurality of second values can be adjusted accordingly.

30

After computing the converter voltage V_{DC} for each designated converter 26, the computed converter voltage V_{DC} for each designated converter 26 is checked against the converter voltage rating limit V_{DC_MAX} . If the computed converter voltage V_{DC} for each designated converter 26 exceeds the converter voltage rating limit V_{DC_MAX} , a third iterative correction loop is triggered.

The third iterative correction loop involves re-computing the DC power transmission line current I_{LINE} , the converter current I_{DC} and the converter voltage V_{DC} using a modified V_{LRSP} , which is obtained as follows:

$$V_{LRSP_i}^k = V_{LRSP_i}^{k-1} + \alpha_{VDC} \cdot \left(\left| V_{DC_i}^k \right| - V_{DC\_MAX_i} \right)$$

The third iterative correction loop is repeated until the computed converter voltage V_{DC} for each designated converter 26 is equal to or less than the converter voltage rating limit V_{DC_MAX} . To speed up the algorithm's processing of the plurality of values, the algorithm acceleration factor α_{VDC} from the plurality of second values can be adjusted accordingly.

After computing the converter power P_{cal} for each designated converter 26, a computed converter power error ΔP for each designated converter 26 is checked against a converter power error limit as defined by an accuracy factor Δ_0, Δ_2 . The converter power error limit for each designated converter 26 depends on whether that designated converter 26 is designated to operate in accordance with the first, second or third operating state. If a particular designated converter 26 is designated to operate in accordance with the first or second operating state, the converter power error limit is defined as a first accuracy factor Δ_2 , which is defined as a near-zero value, e.g. 10^{-10} . If a particular designated converter 26 is designated to operate in accordance with the third operating state, the converter power error limit is defined as a second accuracy factor Δ_0 , which is defined as a non near-zero value, e.g. 0.01, which may be dependent on the loss characteristic of the corresponding DC power transmission line 24. The first and second accuracy factors Δ_2, Δ_0 may be adjusted to permit faster processing of the plurality of values at the expense of less computational accuracy in terms of correspondence of the computed converter power P_{cal} with the preliminary converter power order P_0 for each designated converter 26.

The first accuracy factor Δ_2 may be several orders of magnitude smaller than the second accuracy factor Δ_0 .

If the computed converter power error ΔP for the or each designated converter 26 operating in the power control mode exceeds the converter power error limit defined by the first accuracy factor Δ_2 , a fourth iterative correction loop is triggered.

5

The fourth iterative correction loop involves re-computing the DC power transmission line current I_{LINE} , the converter current I_{DC} , the converter voltage V_{DC} and the converter power P_{cal} using a modified V_{LRSP} , which is obtained as follows:

10

$$V_{LRSP_i}^k = V_{LRSP_i}^{k-1} + \alpha_2 \cdot (\Delta P_i^k)$$

15

The fourth iterative correction loop is repeated until the computed converter power error ΔP for the or each designated converter 26 operating in the power control mode is equal to or less than the converter power error limit defined by the first accuracy factor Δ_2 . This ensures that the computed converter power ΔP for the or each designated converter 26 operating in the power control mode is substantially equal to the or the respective preliminary converter power order P_0 . To speed up the algorithm's processing of the plurality of values, the algorithm acceleration factor α_2 from the plurality of second values can be adjusted accordingly.

20

If the computed converter power error ΔP for the or each designated converter 26 operating in the DC voltage control mode exceeds the converter power error limit defined by the second accuracy factor Δ_0 , a fifth iterative correction loop is triggered.

25

The fifth iterative correction loop involves re-computing the DC power transmission line current I_{LINE} , the converter current I_{DC} , the converter voltage V_{DC} and the converter power P_{cal} using a modified V_{LRSP} , which is obtained as follows:

30

$$V_{LRSP_i}^k = V_{LRSP_i}^{k-1} + \alpha_0 \cdot (\Delta P_i^k)$$

The fifth iterative correction loop is repeated until the computed converter power error ΔP for the or each designated converter 26 operating in the DC voltage control mode is equal to or less than the converter power error limit defined by the second accuracy factor Δ_0 . This ensures that the computed converter power ΔP for the or each designated converter

26 operating in the DC voltage control mode is substantially equal to the or the respective preliminary power order P_0 , after taking into account any power losses. To speed up the algorithm's processing of the plurality of values, the algorithm acceleration factor α_0 from the plurality of second values can be adjusted accordingly.

5

Configuring the solver 30 in this manner enables the sequentially computed outputs to be sequentially checked to ensure their compliance with the respective predefined limit whilst the solver 30 is using the algorithm to process the plurality of values. This has the benefit of saving computation time in comparison to simultaneously computing and checking the

10 DC power transmission line current I_{LINE} , the converter current I_{DC} , the converter voltage V_{DC} and the converter power error ΔP . This has the effect of further improving the efficiency and reliability of the solver 30 in using the algorithm to process the plurality of values.

15 Each of the plurality of optimisation toggles $Op_{LINE}, Op_{IDC}, Op_{VDC}$ is controllable by the operator to select whether or not the plurality of values is to be processed by the algorithm in accordance with some or none of the DC power transmission line current rating limit I_{LINE_MAX} , the converter current rating limit I_{DC_MAX} and the converter voltage rating limit V_{DC_MAX} . This permits faster processing of the plurality of values at the expense of non-

20 compliance with some or all of the DC power transmission line current rating limit I_{LINE_MAX} , the converter current rating limit I_{DC_MAX} and the converter voltage rating limit V_{DC_MAX} .

The solver 30 is further configured to stop the iterative processing of the plurality of values when a difference between computed converter power errors ΔP of successive iterations

25 is at or below a power error difference limit defined by a third accuracy factor Δ_{delta} . If the difference between computed converter power errors ΔP of successive iterations is not at or below a power error difference limit defined by the third accuracy factor Δ_{delta} , a sixth iterative correction loop is triggered.

30 The sixth iterative correction loop involves re-computing the DC power transmission line current I_{LINE} , the converter current I_{DC} , the converter voltage V_{DC} and the converter power P_{cal} until the difference between computed converter power errors ΔP of successive iterations is at or below a power error difference limit defined by the third accuracy factor Δ_{delta} .

35

Configuring the solver 30 in this manner ensures that the iterative processing of the plurality of values is terminated at a suitable convergence of the computed outputs for

controlling each designated converter 26, and thereby improves the efficiency of the solver 30 in computing the outputs for controlling each designated converter 26. The third accuracy factor Δ_{delta} may be adjusted to permit faster processing of the plurality of values at the expense of less computational accuracy in terms of better convergence of the
 5 computed outputs for controlling each designated converter 26.

The solver 30 then checks whether the maximum number of iterations $iteration_{\text{max}}$ has been reached. If the maximum number of iterations $iteration_{\text{max}}$ is exceeded, the solver 30 terminates the algorithm and provides a warning message to the operator so that the
 10 operator is aware that the maximum number of iterations $iteration_{\text{max}}$ has been exceeded. Configuring the solver 30 in this manner prevents the algorithm from iteratively processing the plurality of values in a continuous manner without producing the computed outputs for controlling each designated converter 26.

15 If the maximum number of iterations $iteration_{\text{max}}$ is not exceeded, the controller 28 performs an output validation check to confirm compliance with the following conditions:

- the DC power transmission line current I_{LINE} is equal to or less than the DC power transmission line current limit $I_{\text{LINE\_MAX}}$;
- the converter current I_{DC} for each designated converter 26 is equal to or less than
 20 the predefined converter current limit $I_{\text{DC\_MAX}}$;
- the converter voltage V_{DC} for each designated converter 26 is equal to or less than the converter voltage rating limit $V_{\text{DC\_MAX}}$;
- the converter power error ΔP for the or each designated converter 26 operating in the power control mode is equal to or less than the converter power error limit
 25 defined by the first accuracy factor Δ_2 ;
- the converter power error ΔP for the or each designated converter 26 operating in the DC voltage control mode is equal to or less than the converter power error limit defined by the second accuracy factor Δ_0 ;
- the difference between computed converter power errors ΔP of successive
 30 iterations is at or below a power error difference limit defined by the third accuracy factor Δ_{delta} ; and
- the maximum number of iterations $iteration_{\text{max}}$ has not been exceeded.

If one or more of the above conditions is not met, a seventh iterative correction loop is
 35 triggered.

The seventh iterative correction loop involves re-computing the DC power transmission line current I_{LINE} , the converter current I_{DC} , the converter voltage V_{DC} and the converter power P_{cal} until the output validation check confirms compliance with all of the above conditions.

5

The solver 30 then uses the algorithm to process the computed output DC load reference set point voltage to compute the plurality of outputs for controlling each designated converter 26, namely the no-load DC voltages V_{NL} , converter power orders, power ramp rate orders and DC voltage ramp rate orders for the plurality of designated converters 26.

10

The solver 30 is configured to use the algorithm to process the plurality of values to thereby compute power and DC voltage ramp rate orders for each designated converter 26 as a function of the plurality of values so as to equalise a plurality of power and DC voltage ramp times for the plurality of designated converters. The power ramp time for each designated converter 26 is the time taken for that designated converter 26 to attain the computed converter power. The DC voltage ramp time for each designated converter 26 is the time taken for that designated converter 26 to attain the computed no-load DC voltage V_{NL} .

15

20

Configuration of the solver 30 to equalise the power and DC voltage ramp times for the plurality of designated converters 26 ensures synchronisation of action of the plurality of converters 30 in modifying their respective powers to attain the respective converter power in accordance with the respective converter power order, and their respective DC voltages V_{DC} to attain the respective converter power in accordance with the respective computed no-load DC voltage V_{NL} .

25

The operator interface presents the operator with the computed plurality of outputs, the computed DC power transmission line currents, the computed converter currents and the computed converter voltages.

30

The operator can choose to accept the computed plurality of outputs, or reject the computed plurality of outputs and input a new preliminary converter power order P_0 for each designated converter 26 into the solver to obtain a new computed plurality of outputs. When the operator accepts the computed plurality of outputs from the solver 30, the computed no-load DC voltages V_{NL} , converter power orders, power ramp rate orders and DC voltage ramp rate orders are despatched to the plurality of local control units to operate

35

each designated converter 26 in accordance with the respective no-load DC voltage V_{NL} , converter power order, power ramp rate order and DC voltage ramp rate order.

5 The configuration of the solver 30, as shown in Figures 2 and 5, to use the algorithm to compute the no-load DC voltage V_{NL} , converter power order, power ramp rate order and DC voltage ramp rate order as a function of the plurality of values, namely the operating modes of the designated converters 26, default electrical characteristics of the multi-terminal DC electrical network 20, computation parameters of the algorithm and electrical measurements corresponding to voltage and currents in the multi-terminal DC electrical network 20 not only results in a solver 30 that is capable of computing the no-load DC voltage V_{NL} , converter power order, power ramp rate order and DC voltage ramp rate order for each designated converter 26 to reliably control power flow in the multi-terminal DC electrical network 20, but also simplifies computation of the no-load DC voltage V_{NL} , converter power order, power ramp rate order and DC voltage ramp rate order for each designated converter 26.

20 The configuration of the solver 30 thus enables it to take into account a wide range of operating modes of the designated converters 26, default electrical characteristics of the multi-terminal DC electrical network 20, computation parameters of the algorithm and electrical measurements corresponding to voltages and currents in the multi-terminal DC electrical network 20 in order to compute the no-load DC voltage V_{NL} , converter power order, power ramp rate order and DC voltage ramp rate order for each designated converter 26. This in turn enables high quality control of power flow in the multi-terminal DC electrical network 20.

25 In addition using the solver 30 enables provision of a no-load DC voltage V_{NL} , converter power order, power ramp rate order and DC voltage ramp rate order for each converter 26 to control power flow in the multi-terminal DC electrical network 20 in a way that optimises power flow and power balance in the multi-terminal DC electrical network 20 for the plurality of first, second and third values, thus resulting in an efficient and reliable multi-terminal DC electrical network 20.

35 It will be appreciated that the topology of the multi-terminal DC electrical network 20 is merely chosen to help illustrate the operation of the invention, and that the multi-terminal DC electrical network 20 may be respectively replaced by another converter with a different topology and by another multi-terminal DC electrical network 20 with a different topology.

CLAIMS

1. A multi-terminal DC electrical network comprising:
 - a plurality of DC terminals, each DC terminal being operatively connected to at
 - 5 least one other DC terminal via a respective DC power transmission medium;
 - a plurality of converters, each converter being operatively connected to a
 - respective one of the DC terminals, the plurality of converters including at least one
 - designated converter; and
 - a controller including a solver configured to use an algorithm to process a plurality
 - 10 of values to thereby compute a no-load DC voltage for at least one first designated
 - converter as a function of the plurality of values, the plurality of values including:
 - at least one first value defining an operating mode of the or each designated
 - converter;
 - at least one second value defining a default electrical characteristic of the
 - 15 multi-terminal DC electrical network or a computation parameter of the algorithm;
 - and
 - at least one third value defining an electrical measurement corresponding
 - to a voltage or current in the multi-terminal DC electrical network,
 - wherein the controller is configured to operate the or each first designated
 - 20 converter in accordance with the or the respective computed no-load DC voltage.
2. A multi-terminal DC electrical network according to Claim 1 wherein each of the
- plurality of converters is a designated converter, preferably a first designated converter.
- 25 3. A multi-terminal DC electrical network according to any preceding claim wherein
- the solver is configured to use the algorithm to process the plurality of values to thereby
- compute a converter power order for at least one second designated converter as a
- function of the plurality of values, and wherein the controller is configured to operate the
- or each second designated converter in accordance with the or the respective converter
- 30 power order.
4. A multi-terminal DC electrical network according to any preceding claim wherein
- the solver is configured to use the algorithm to process the plurality of values to thereby
- compute a converter power order, a power ramp rate order and/or a DC voltage ramp rate
- 35 order for the or each designated converter as a function of the plurality of values, and
- wherein the controller is configured to operate the or each designated converter in

accordance with the or the respective converter power order, power ramp rate order and/or DC voltage ramp rate order.

5. A multi-terminal DC electrical network according to Claim 4 wherein the solver is
5 configured to use the algorithm to process the plurality of values to thereby compute a power ramp rate order for each of a plurality of designated converters as a function of the plurality of values so as to equalise a plurality of power ramp times for the plurality of designated converters, the power ramp time for each of the plurality of designated converters being the time taken for that designated converter to attain a predefined
10 converter power.

6. A multi-terminal DC electrical network according to Claim 4 or Claim 5 wherein the solver is configured to use the algorithm to process the plurality of values to thereby compute a DC voltage ramp rate order for each of a plurality of designated converters as
15 a function of the plurality of values so as to equalise a plurality of DC voltage ramp times for the plurality of designated converters, the DC voltage ramp time for each of the plurality of designated converters being the time taken for that designated converter to attain a predefined DC converter voltage.

7. A multi-terminal DC electrical network according to any preceding claim wherein the solver is configured to use the algorithm to process the plurality of values to thereby compute a DC power transmission medium current for at least one designated DC power transmission medium, a converter current for the or each designated converter, a converter voltage for the or each designated converter, a converter power for the or each
25 designated converter and/or a converter power error for the or each designated converter.

8. A multi-terminal DC electrical network according to Claim 7 wherein the solver is configured to use the algorithm to process the plurality of values to thereby compute a DC power transmission medium current for the or each designated DC power transmission
30 medium, a converter current for the or each designated converter, a converter voltage for the or each designated converter and/or a converter power error for the or each designated converter in accordance with a or a respective predefined limit.

9. A multi-terminal DC electrical network according to Claim 7 or Claim 8 wherein the
35 solver is configured to use the algorithm to process the plurality of values to thereby sequentially compute at least two of: a DC power transmission medium current for the or each designated DC power transmission medium; a converter current for the or each

designated converter; a converter voltage for the or each designated converter; a converter power for the or each designated converter; a converter power error for the or each designated converter.

5 10. A multi-terminal DC electrical network according to any preceding claim wherein the solver is configured to use the algorithm to iteratively process the plurality of values.

11. A multi-terminal DC electrical network according to Claim 10 when dependent from Claim 8 wherein the solver is configured to use the algorithm to iteratively process the
10 plurality of values to re-compute the DC power transmission medium current for the or each designated DC power transmission medium, the converter current for the or each designated converter, the converter voltage for the or each designated converter and/or the converter power error for the or each designated converter when the computed DC power transmission medium current, the computed converter current, the computed
15 converter voltage and/or the computed converter power error for a prior iteration is not in accordance with the or the respective predefined limit.

12. A multi-terminal DC electrical network according to Claim 10 or Claim 11 wherein the solver is configured to use the algorithm to iteratively process the plurality of values to
20 thereby compute a converter power error for the or each designated converter and to stop the iterative processing of the plurality of values when a difference between computed converter power errors of successive iterations is at or below a converter power error difference limit.

25 13. A multi-terminal DC electrical network according to any preceding claim wherein the or each first value is defined by a value selected from a group including:

- a preliminary converter power order;
- a first operating state to configure the designated converter to constantly operate in a power control mode;
- 30 • a second operating state to configure the designated converter to operate in a power control mode and to switch from the power control mode to a DC voltage control mode after operating at a minimum or maximum DC voltage limit for a predefined period of time;
- a third operating state to configure the designated converter to constantly operate
35 in a DC voltage control mode;
- a converter droop characteristic, preferably a converter DC voltage-direct current droop characteristic;

- a converter minimum power ramp rate.

14. A multi-terminal DC electrical network according to any preceding claim wherein the or each second value is defined by a value selected from a group including:

- 5 • a base voltage value that is a rated voltage of the DC electrical network;
- a base current value that is calculated by dividing a rated power of the DC electrical network by a rated voltage of the DC electrical network;
- a base impedance value that is a rated impedance of the DC electrical network;
- a maximum number of iterations for processing the plurality of values;
- 10 • a load reference set point DC voltage;
- a converter current rating limit;
- a converter voltage rating limit;
- a DC power transmission medium current rating limit;
- an accuracy factor to control the computational accuracy of the algorithm, wherein
- 15 the accuracy factor is defined by a converter power error limit or a power error difference limit;
- an algorithm acceleration factor to control the computational speed of the algorithm when iteratively processing the plurality of values;
- an optimisation toggle controllable to select whether or not the plurality of values is
- 20 to be processed by the algorithm in accordance with one or more voltage or current rating limits;
- a DC power transmission medium impedance.

15. A multi-terminal DC electrical network according to any preceding claim wherein the or each third value is defined by a value selected from a group including:

- a converter voltage;
- a converter current;
- a DC power transmission medium current.

16. A multi-terminal DC electrical network according to any preceding claim wherein the controller is configured to perform an integrity validation of the integrity of the or each first value, and the solver is further configured to use the algorithm to process the plurality of values only if the integrity of the or each first value is validated by the integrity validation, wherein the or each first value has a valid integrity when one or more prerequisites are met.

17. A multi-terminal DC electrical network according to Claim 16 when dependent from Claim 13 wherein the or each first value has a valid integrity when:

- a representative matrix of the multi-terminal DC electrical network is square and has a non-zero determinant;
- 5 • the first value or at least one of the first values is defined by the second or third operating state;
- the or each preliminary converter power order for the or each designated converter is in the range of -1 and +1 per unit; and/or
- an or a respective operating state to configure the or each designated converter is
10 defined by any of the first, second and third operating states.

18. A method of controlling power flow in a multi-terminal DC electrical network, the multi-terminal DC electrical network comprising:

- a plurality of DC terminals, each DC terminal being operatively connected to at
15 least one other DC terminal via a respective DC power transmission medium; and
- a plurality of converters, each converter being operatively connected to a respective one of the DC terminals, the plurality of converters including at least one designated converter;

wherein the method includes the steps of:

- 20 (i) using an algorithm to process a plurality of values to thereby compute a no-load DC voltage for at least one first designated converter as a function of the plurality of values, the plurality of values including:
 - at least one first value defining an operating mode of the or each designated converter;
 - 25 at least one second value defining a default electrical characteristic of the multi-terminal DC electrical network or a computation parameter of the algorithm; and
 - at least one third value defining an electrical measurement corresponding to a voltage or current in the multi-terminal DC electrical network,
- 30 (ii) operating the or each first designated converter in accordance with the or the respective computed no-load DC voltage.

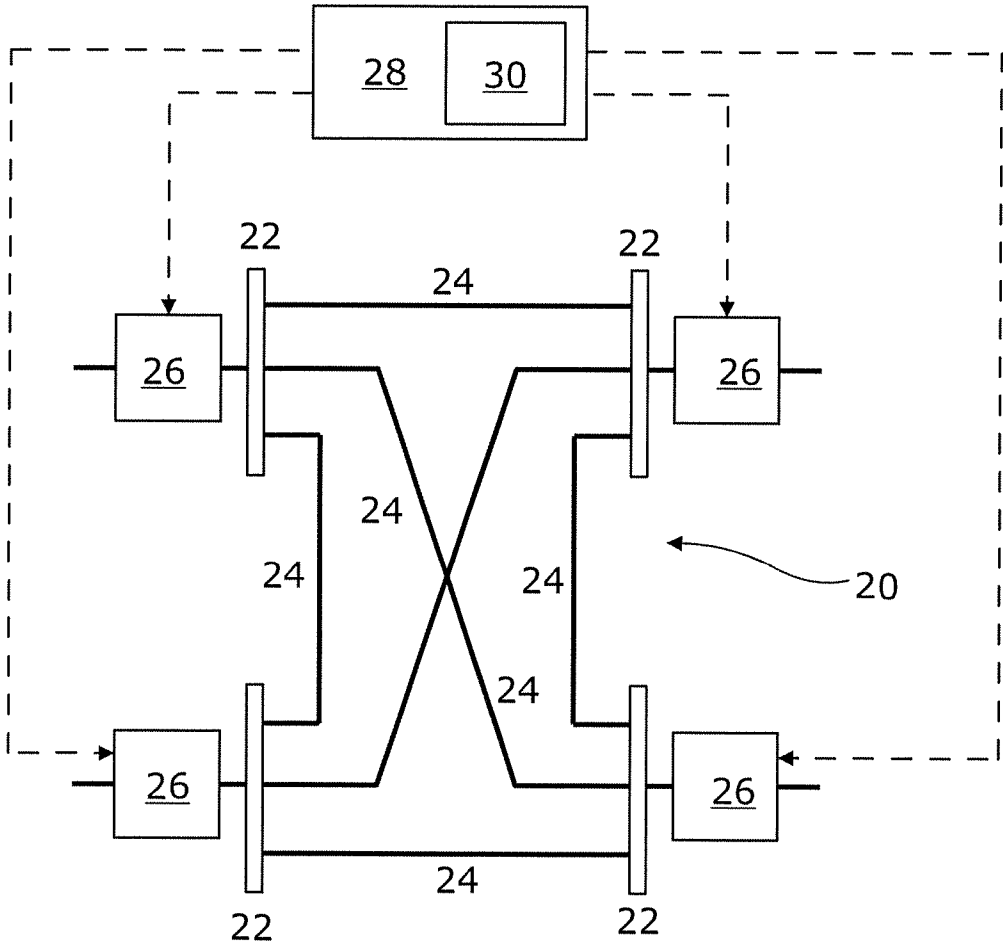


Figure 1

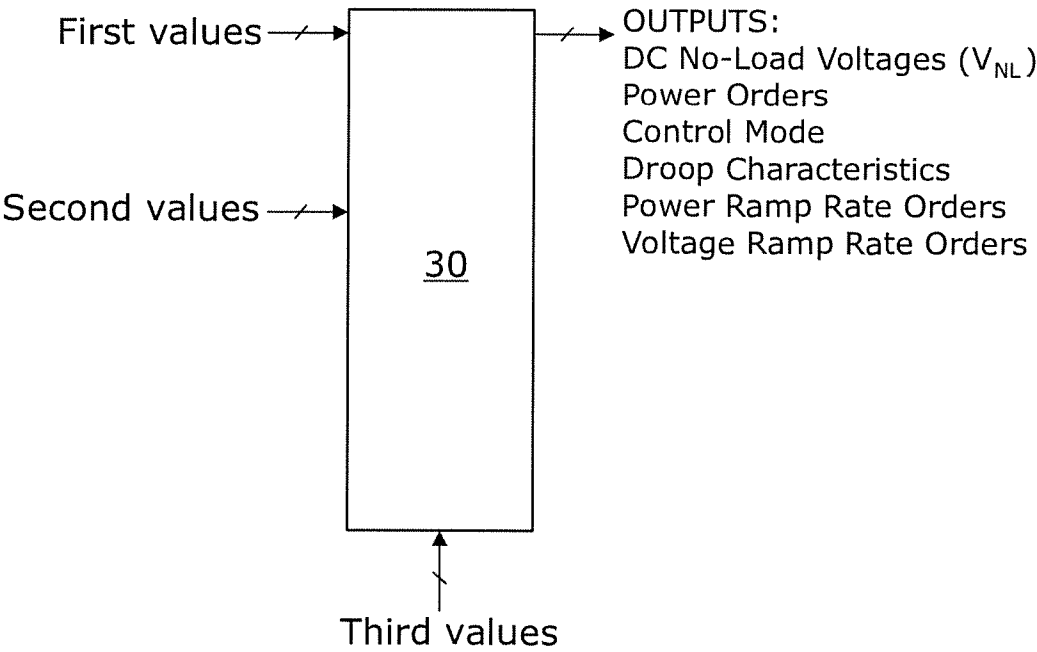


Figure 2

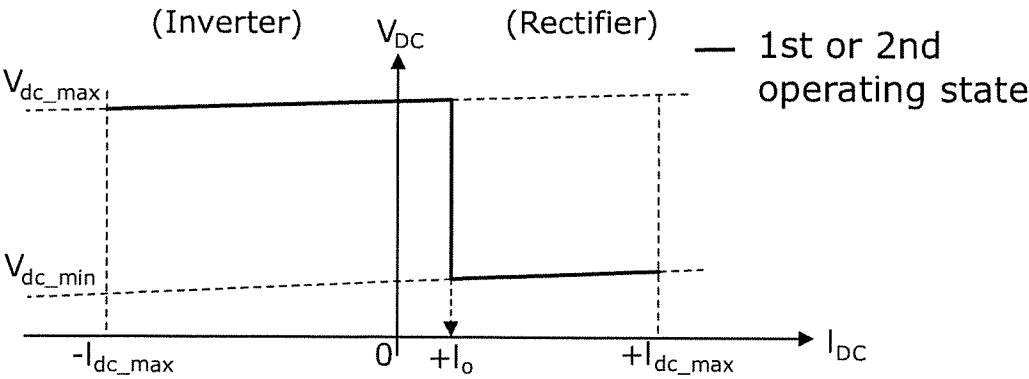


Figure 3

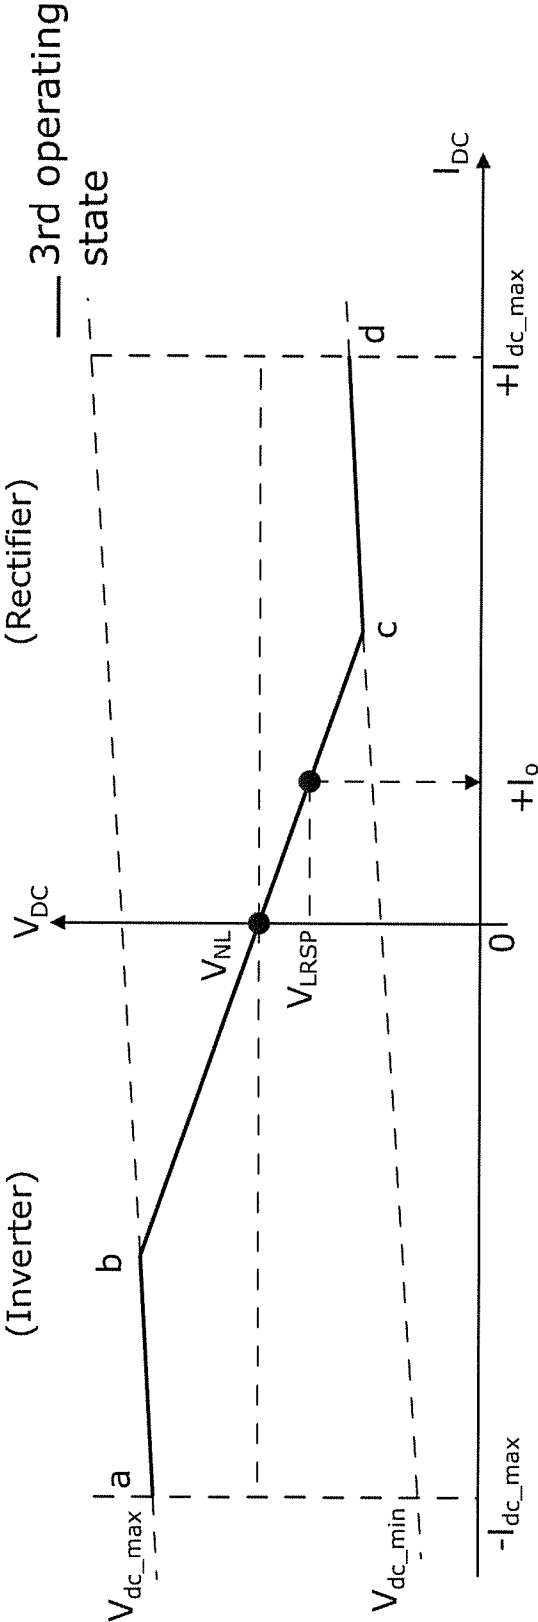


Figure 4

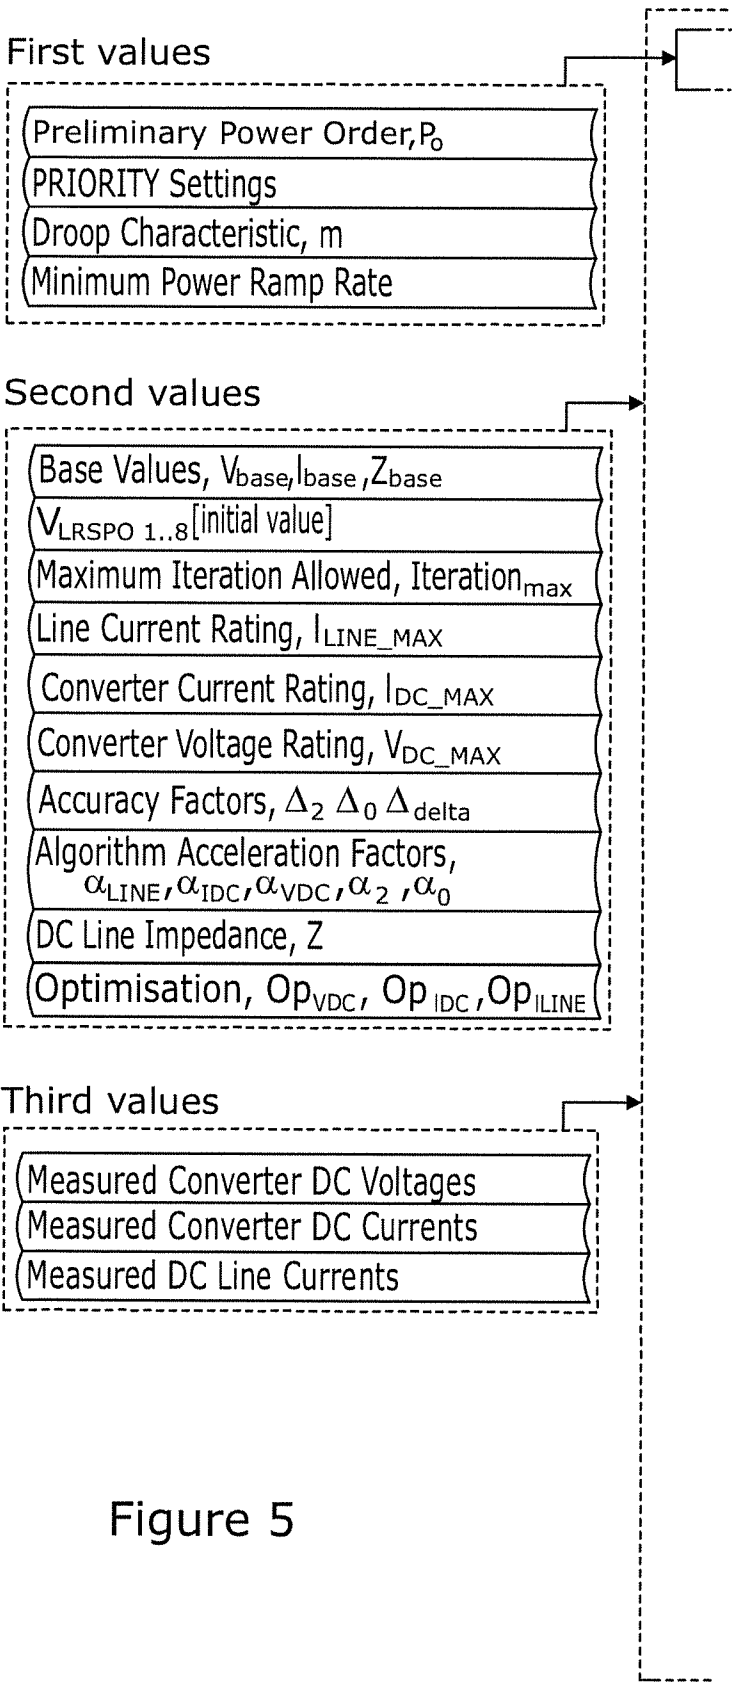


Figure 5

5/5

DC POWER FLOW SOLVER

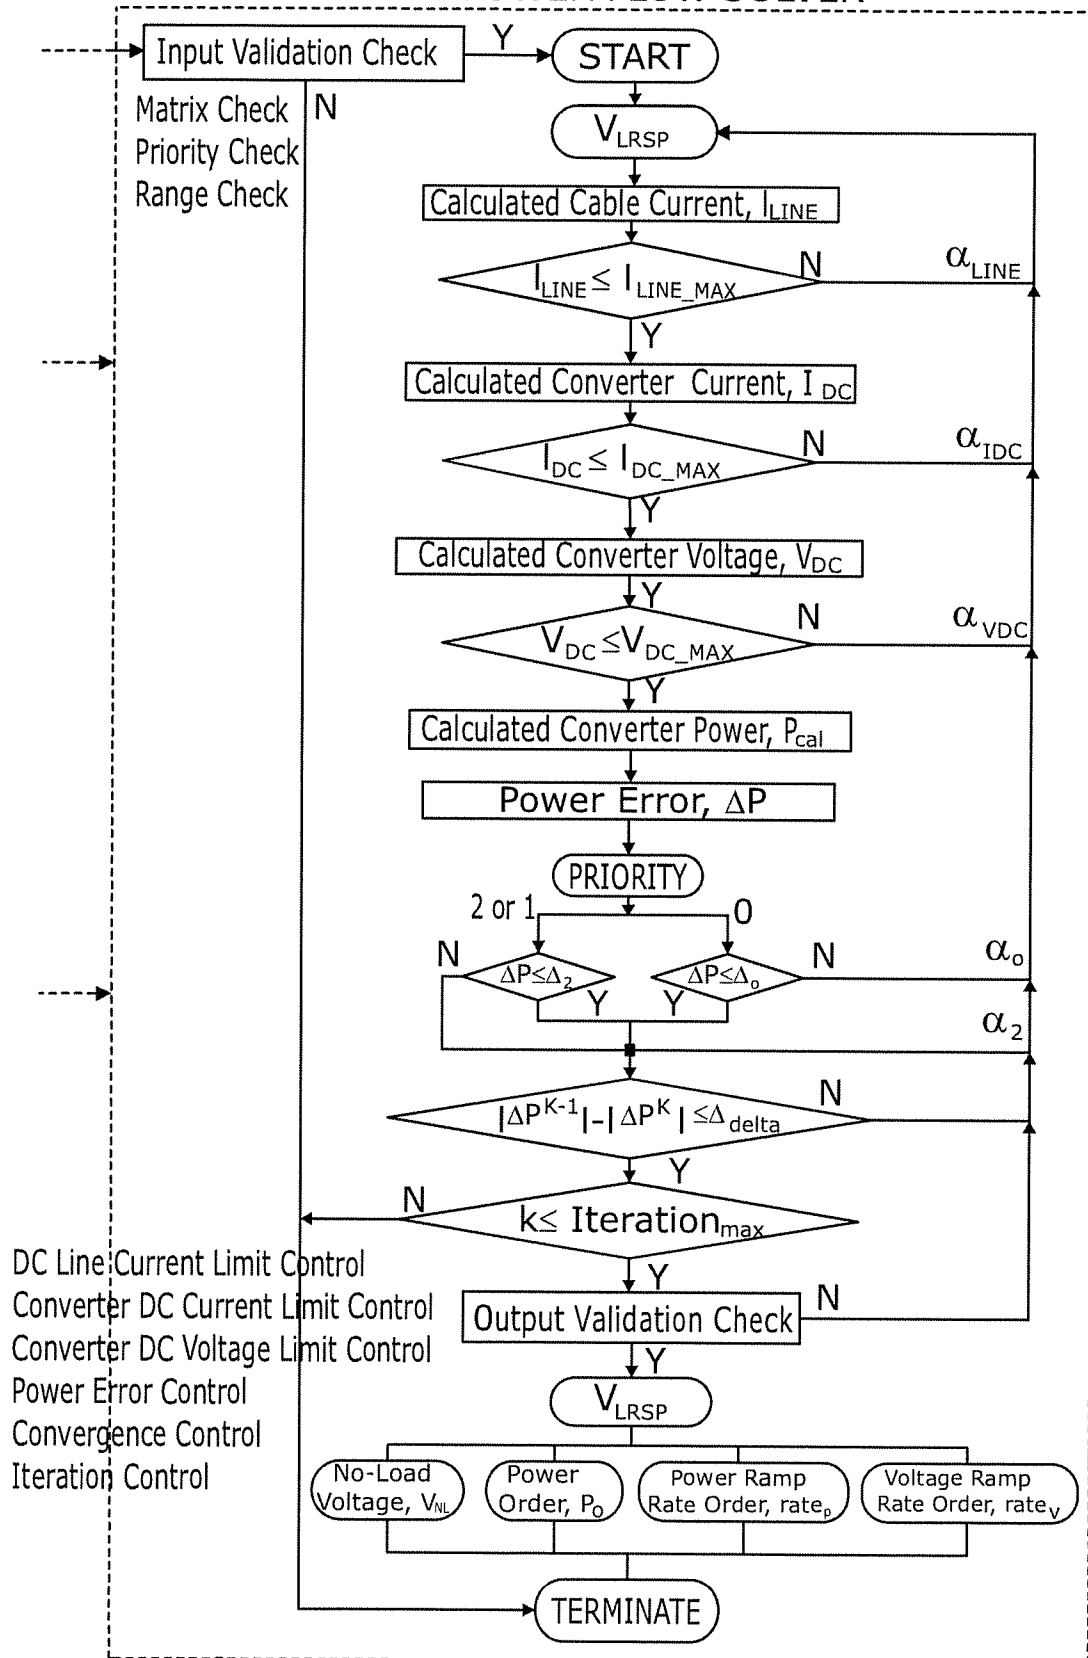


Figure 5(Cont.)

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2015/050810

A. CLASSIFICATION OF SUBJECT MATTER

INV. H02J1/12 H02J3/36
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H02J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2012/000549 A1 (ABB RESEARCH LTD [CH]; BERGGREN BERTIL [SE]; MAJUMDER RAJAT [US]; SAO) 5 January 2012 (2012-01-05) page 1, line 9 - page 22, line 18; figures 2a-4d	1-3,9, 10, 12-15,18
X	WO 2012/000548 A1 (ABB TECHNOLOGY AG [CH]; LINDEN KERSTIN [SE]; FLISBERG GUNNAR [SE]; JUH) 5 January 2012 (2012-01-05) page 5, line 22 - page 16, line 27; figures 1,2	1-4,8, 10-15,18
X	EP 1 069 666 A1 (ABB AB [SE]) 17 January 2001 (2001-01-17)	1-4,7-9, 13-15,18
A	paragraph [0003] - paragraph [0038]; figures 1,2	10-12
	----- -/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

17 April 2015

Date of mailing of the international search report

28/04/2015

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Jonda, Sven

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/050810

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2013/197704 A1 (PAN JIUPING [US] ET AL) 1 August 2013 (2013-08-01) paragraph [0033] - paragraph [0042]; figures 6-8	1,2,7,8, 13-15,18
A	----- JOHNSON B K ET AL: "Expandable Multiterminal DC Systems Based On Voltage Droop", IEEE TRANSACTIONS ON POWER DELIVERY, IEEE SERVICE CENTER, NEW YORK, NY, US, vol. 8, no. 4, 31 October 1993 (1993-10-31), pages 1926-1932, XP002631393, ISSN: 0885-8977 the whole document	1-18
A	----- LIE XU ET AL: "DC grid management of a multi-terminal HVDC transmission system for large offshore wind farms", SUSTAINABLE POWER GENERATION AND SUPPLY, 2009. SUPERGEN '09. INTERNATIONAL CONFERENCE ON, IEEE, PISCATAWAY, NJ, USA, 6 April 2009 (2009-04-06), pages 1-7, XP031639926, ISBN: 978-1-4244-4934-7 the whole document	1-18
A	----- WO 2009/152840 A1 (SIEMENS AG [DE]; BERNHARD TOBIAS [DE]; DOMMASCHK MIKE [DE]; DORN JOERG) 23 December 2009 (2009-12-23) the whole document	1-18
A	----- WO 2008/000626 A1 (ABB TECHNOLOGY AG [CH]; JIANG-HAEFNER YING [SE]) 3 January 2008 (2008-01-03) the whole document -----	1-18

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2015/050810

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
WO 2012000549	A1	05-01-2012	CN	102959822 A		06-03-2013
			EP	2589128 A1		08-05-2013
			US	2013127426 A1		23-05-2013
			WO	2012000549 A1		05-01-2012

WO 2012000548	A1	05-01-2012	CN	102986110 A		20-03-2013
			EP	2589127 A1		08-05-2013
			US	2013334887 A1		19-12-2013
			WO	2012000548 A1		05-01-2012

EP 1069666	A1	17-01-2001	DE	69920424 D1		28-10-2004
			DE	69920424 T2		23-02-2006
			EP	1069666 A1		17-01-2001
			EP	1166421 A1		02-01-2002
			JP	4101515 B2		18-06-2008
			JP	2003504995 A		04-02-2003
			US	6411066 B1		25-06-2002
			WO	0103268 A1		11-01-2001

US 2013197704	A1	01-08-2013	CN	104137376 A		05-11-2014
			EP	2810353 A2		10-12-2014
			US	2013197704 A1		01-08-2013
			WO	2013116586 A2		08-08-2013

WO 2009152840	A1	23-12-2009	CN	102067406 A		18-05-2011
			EP	2289145 A1		02-03-2011
			US	2011205771 A1		25-08-2011
			WO	2009152840 A1		23-12-2009

WO 2008000626	A1	03-01-2008	AT	475216 T		15-08-2010
			CN	101479910 A		08-07-2009
			CN	102280898 A		14-12-2011
			DK	2036181 T3		02-05-2011
			EP	2036181 A1		18-03-2009
			ES	2370357 T3		14-12-2011
			JP	4673428 B2		20-04-2011
			JP	5231585 B2		10-07-2013
			JP	2009542182 A		26-11-2009
			JP	2011125216 A		23-06-2011
			PT	2036181 E		29-11-2010
			US	2009279328 A1		12-11-2009
			US	2013301313 A1		14-11-2013
			WO	2008000626 A1		03-01-2008
