



(11)

EP 2 696 599 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
25.05.2016 Bulletin 2016/21

(51) Int Cl.:
H04R 25/00 (2006.01)

(21) Application number: **13178787.1**

(22) Date of filing: **31.07.2013**

(54) Compression of spaced sources for hearing assistance devices

Kompression beabstandeter Quellen für Hörgeräte

Compression de sources espacées pour dispositifs d'aide auditive

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **07.08.2012 US 201213568618**

(43) Date of publication of application:
12.02.2014 Bulletin 2014/07

(73) Proprietor: **Starkey Laboratories, Inc.
Eden Prairie, MN 55344 (US)**

(72) Inventors:
• **Strelcyk, Olaf**
Oakland, CA 94609 (US)
• **Edwards, Brent**
San Francisco, CA 94122 (US)

(74) Representative: **Maury, Richard Philip
Marks & Clerk LLP
90 Long Acre
London WC2E 9RA (GB)**

(56) References cited:
EP-A1- 2 131 610

- **MICHAEL A STONE AND BRIAN C J MOORE:**
**"Effects of spectro-temporal modulation
changes produced by multi-channel
compression on intelligibility in a
competing-speech task", THE JOURNAL OF THE
ACOUSTICAL SOCIETY OF AMERICA,
AMERICAN INSTITUTE OF PHYSICS FOR THE
ACOUSTICAL SOCIETY OF AMERICA, NEW
YORK, NY, US, vol. 123, no. 2, February 2008
(2008-02), pages 1063-1076, XP007921522, ISSN:
0001-4966, DOI: 10.1121/1.2821969**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Field of the Invention

5 **[0001]** This patent application pertains to apparatus and processes for compression of spaced sources for hearing assistance devices.

Background

10 **[0002]** Hearing assistance devices, such as hearing aids, include electronic instruments worn in or around the ear that compensate for hearing losses by amplifying and processing sound. The electronic circuitry of the device is contained within a housing that is commonly either placed in the external ear canal and/or behind the ear. Transducers for converting sound to an electrical signal and vice-versa may be integrated into the housing or external to it.

15 **[0003]** Whether due to a conduction deficit or sensorineural damage, hearing loss in most patients occurs non-uniformly over the audio frequency range, most commonly at high frequencies. Hearing aids may be designed to compensate for such hearing deficits by amplifying received sound in a frequency-specific manner, thus acting as a kind of acoustic equalizer that compensates for the abnormal frequency response of the impaired ear. Adjusting a hearing aid's frequency specific amplification characteristics to achieve a desired level of compensation for an individual patient is referred to as fitting the hearing aid. One common way of fitting a hearing aid is to measure hearing loss, apply a fitting algorithm, and fine-tune the hearing aid parameters.

20 **[0004]** Hearing assistance devices also use a dynamic range adjustment, called dynamic range compression, which controls the level of sound sent to the ear of the patient to normalize the loudness of sound in specific frequency regions. The gain that is provided at a given frequency is controlled by the level of sound in that frequency region (the amount of frequency specificity is determined by the filters in the multiband compression design). When properly used, compression adjusts the level of a sound at a given frequency such that its loudness is similar to that for a normal hearing person without a hearing aid. There are other fitting philosophies, but they all prescribe a certain gain for a certain input level at each frequency. It is well known that the application of the prescribed gain for a given input level is affected by time constants of the compressor. What is less well understood is that the prescription can break down when there are two or more simultaneous sounds in the same frequency region. The two sounds may be at two different levels, and therefore each should receive different gain for each to be perceived at their own necessary loudness. Because only one gain value can be prescribed by the hearing aid, however, at most one sound can receive the appropriate gain, providing the second sound with the less than desired sound level and resulting loudness.

25 **[0005]** This phenomenon is illustrated in the following figures. FIG. 1 shows the levels of two different sounds out of a filter centered at 1 kHz-in this example, the two sounds are two different speech samples. The samples are overlaid on FIG. 1 and one is in a thick dark line 1 and the second is in a thin line 2.

30 **[0006]** FIG. 2 shows the gains that would be applied to those two different sounds at 1 kHz if they were to be presented to a hypothetical multiband dynamic range compressor. Notice that the ideal gain for each speech sample is different. Again, the samples from the thick dark line 1 are shown in comparison to those of the thin line 2.

35 **[0007]** FIG. 3 shows the two gains from FIG. 1 represented by the thick dark line 1 and the thin line 2, but with a line of intermediate thickness 3 which shows the gain that is applied when the two sounds are mixed together before being sent to the multiband compressor. Notice that when the two sounds are mixed together, neither receives the exact gain that should be prescribed for each separately; in fact, there are times when the gain should be high for one speech sample, but it is low because the gain is controlled by the level of the mix of the two sounds, not the level of each sound individually. This can cause artificial envelope fluctuations in each sound, described as comodulation or cross modulation by Stone and Moore (Stone, M. A., and Moore, B. C. (2008). "Effects of spectro-temporal modulation changes produced by multi-channel compression on intelligibility in a competing-speech task," J Acoust Soc Am 123, 1063-1076.)

40 **[0008]** This could be particularly problematic with music and other acoustic sound mixes such as the soundtrack to a Dolby 5.1 movie, where signals of significantly different levels are mixed together with the goal of provided a specific aural experience. If the mix is sent to a compressor and improper gains are applied to the different sounds, then the auditory experience is negatively affected and is not the experience intended by the produce of the sound. In the case of music, the gain for each musical instrument is not correct, and the gain to one instrument might be quite different than it would be if the instrument were played in isolation. The impact is three-fold: the loudness of that instrument is not normal for the hearing aid listener (it may be too soft, for example), distortion to the temporal envelope of that instrument can occur, and interaural-level difference (ILD) cues for sound source localization and segregation can be distorted, making the perceived auditory image of that instrument fluctuate in a way that was not in the original recording..

45 **[0009]** Another example is when the accompanying instrumental tracks in a movie soundtrack have substantial energy then compression can overly reduce the overall level and distort the ILD of the simultaneous vocal tracks, diminishing the ability of the wearer to enjoy the mix of instrumental and vocal sound and even to hear and understand the vocal

track. Thus, there is a need in the art for improved compression and mixing systems for hearing assistance devices. EP 2131610A discloses an apparatus for processing sound for a hearing assistance device placed at a wearer's ear, the apparatus comprising: a receiver adapted to receive signals from a sound environment; a unit for applying head-related-transfer-functions to the received signals, a compressor adapted to independently compress each of the individual sound source components, a mixer connected to the compressor, the mixer adapted to mix the compressed sound source components to produce a mixed output signal; and a speaker connected to the mixer, the speaker integrated with the hearing assistance device and adapted to output the mixed output signal at the wearer's ear.

[0010] The invention is in the apparatus of Claim 1 and the method of Claim 11.

[0011] This application relates to a system for compression for hearing assistance devices by application of compression to individual sound sources before applying a head-related transfer function (HRTF) to prevent compression and cross modulation of ILD cues for localization, according to one example. Variations of the present system use coordinated compression to left and right individual source signals after application of HRTFs. This Summary is an overview of some of the teachings of the present application and is not intended to be an exclusive or exhaustive treatment of the present subject matter. Further details about the present subject matter are found in the detailed description and the appended claims. The scope of the present invention is defined by the appended claims.

Brief Description of the Drawings

[0012]

FIG. 1 shows the levels of two different sounds out of a filter centered at 1 kHz.

FIG. 2 shows the gains that would be applied to those two different sounds of FIG. 1 at 1 kHz if they were to be presented to a hypothetical multiband dynamic range compressor.

FIG. 3 shows the two gains from FIG. 1 represented by the thick line and the thinner line, but with a line of intermediate thickness which shows the gain that is applied when the two sounds are mixed together before being sent to the multiband compressor.

FIG. 4 illustrates a system for processing left and right stereo signals from a plurality of sound sources in order to produce mixed left and right sound output signals that can be used by left and right hearing assistance devices.

FIG. 5 illustrates a system for processing left and right stereo signals from a plurality of sound sources by applying compression before mixing to produce mixed left and right sound output signals that can be used by left and right hearing assistance devices according to one embodiment of the present subject matter.

FIG. 6 shows a signal processor that includes a surround sound synthesizer for producing the surround sound signals from the left and right stereo signals where compression is applied the surround sound signals before mixing to produce mixed left and right sound output signals that can be used by left and right hearing assistance devices.

FIG. 7 shows an example where a stereo music signal is processed to separate the center signal from the left-dominant and right-dominant signals in order to compress the center signal separately from the left-dominant and right-dominant signals.

FIG. 8 shows an example for separating sounds into component sound sources and compressing each individual sound source before being remixed into the original number of channels.

FIG. 9A shows a modification of FIG. 6 above, including independently compressing individual sound sources before applying HRTFs to prevent compression and cross modulation of ILDs, according to one embodiment of the present subject matter.

FIG. 9B shows a modification of FIG. 6 above, including applying coordinated compression to individual left and right signal sources after applying HRTFs to prevent compression and cross modulation of ILDs.

FIG. 10 shows a system with separate source signals and separate microphone signals.

FIG. 11A shows a modification of FIG. 10 above, including independently compressing estimated source signals before applying HRTFs to prevent compression and cross modulation of ILDs, according to one embodiment of the present subject matter.

FIG. 11 B shows a modification of FIG. 10 above, including applying coordinated compression to individual left and right signal sources after applying HRTFs to prevent compression and cross modulation of ILDs.

Detailed Description

[0013] The following detailed description of the present invention refers to subject matter in the accompanying drawings which show, by way of illustration, specific aspects and embodiments in which the present subject matter may be practiced. These embodiments are described in sufficient detail to enable those skilled in the art to practice the present subject matter. References to "an", "one", or "various" embodiments in this disclosure are not necessarily to the same embodiment, and such references contemplate more than one embodiment. The following detailed description is, there-

fore, not to be taken in a limiting sense, and the scope is defined only by the appended claims.

[0014] FIG. 4 illustrates a system for processing left and right stereo signals from a plurality of sound sources in order to produce mixed left and right sound output signals that can be used by left and right hearing assistance devices. The figure shows separate left 410 and right 420 channels where a plurality of left sound sources 1 L, 2L, ... , NL are mixed by mixer 411 to make a composite signal that is compressed using compressor 412 to produce the left output signal LO. FIG. 4 also shows in the right channel 420 a plurality of right sound sources 1 R, 2R, ... , NR that are mixed by mixer 421 to make a composite right signal that is compressed by compressor 422 to produce a right signal RO. It is understood that the separate sound sources can be right and left tracks of individual instruments. It is also possible that the tracks include vocals or other sounds. The system provides compression after the mixing which can result in over-attenuation of desired sounds, which is an undesired side effect of the signal processing. For example, if track 1 included bass guitar and track 2 included a lead guitar, it is possible that the louder instrument would dominate the signal strength in the channel at any given time and may result in over-attenuation of the weaker signal when compression is applied to the composite signal. Furthermore, because left and right signals are compressed independently, level difference between the left and right output signals LO and RO are compressed, i.e., ILD cues are reduced.

[0015] FIG. 5 illustrates a system for processing left and right stereo signals from a plurality of sound sources by applying compression before mixing to produce mixed left and right sound output signals that can be used by left and right hearing assistance devices, according to one embodiment of the present subject matter. This embodiment applies compression (512 for the left channel 510 and 522 for the right channel 520) to each signal independently to assist in preserving the ability to mix each signal accordingly (using mixers 510 and 521, respectively). This approach allows each sound source 1 L, 2L, ... , NL and 1 R, 2R, ... , NR to be added to the composite signal as desired. It is understood that to provide a plurality of sound sources two or more sound sources are input into the mixer. These may be right and left components of an instrumental input, vocal input, or other sound input. Level difference between the left and right output signals LO and RO are compressed, i.e., ILD cues are reduced, because left and right signals are compressed independently.

[0016] FIG. 6 shows one example of a signal processor that includes a surround sound synthesizer for producing the surround sound signals from the left and right stereo signals where compression is applied to the surround sound signals before mixing to produce mixed left and right sound output signals that can be used by left and right hearing assistance devices. A surround sound synthesizer 601 receives a right stereo signal SR and a left stereo signal SL and converts the signals into LS, L, C, R, and RS signals. In various examples, the HRTFs are not used and the signal passes from the surround sound synthesizer 601 to the compression stages 610R and 610L before being sent to the mixers 611 R and 611 L. In various examples, the signals are processed by right and left head-related transfer functions (HRTFs) 608R and 608L. The resulting signals are then sent through compression stages 610R and 610L before being sent through mixers 611 R and 611 L. The resulting outputs RO and LO are used by the hearing assistance device to provide stereo sound reception. Level difference between the left and right output signals LO and RO are compressed, i.e., ILD cues are reduced, because left and right signals are compressed independently. It is understood that other surround sound systems may be employed. For example, surround sound systems include, but are not limited to Dolby 5.1, 6.1, and 7.1 systems, and the application of HRTFs is optional. Thus, the examples provided herein are intended to be demonstrative and not limiting, exclusive, or exhaustive.

[0017] One advantage of the system of FIG. 6 is that the center channel, which frequently is dominated by vocals, can be separated compressed from the other channels, which are largely dominated by the music. Such compression and mixing avoids cross modulation of gain. The level of compression is commensurate with that found in hearing assistance devices, such as hearing aids. Other levels of compression are possible.

[0018] Independent dynamic-range compression of stereo signals diminishes ILD cues for localization. Particularly in complex situations with multiple sources, preserving ILD cues is beneficial. The present subject matter preserves source-specific ILD cues by preventing compression and cross modulation of the ILDs, while providing optimal gain for each individual source.

[0019] FIG. 9A shows a modification of FIG. 6 above, including independently compressing individual sound sources before applying HRTFs to prevent compression and cross modulation of ILDs, according to one embodiment of the present invention: The present subject matter applies compression 609 separately to each individual source in a mixture, without compressing its ILD. The five surround sound signals LS, L, C, R, and RS represent estimates of individual source signals. These estimated source signals are first independently compressed which prevents cross modulation between the waveforms of these sources. Then, head-related transfer functions (HRTFs) are applied to the compressed source signals. Since the HRTFs are applied after compression, the ILDs are neither compressed nor cross modulated.

[0020] An alternate example is shown in FIG. 9B including applying coordinated compression to individual left and right signal sources after applying HRTFs to prevent compression and cross modulation of ILDs. Here, coordinated compression, i.e., identical gain, is applied to the left and right individual source signals after application of the HRTFs. Coordinated compression prevents compression and cross modulation of the ILDs. This holds true for simple coordinated compression of the mixture as well. However, here optimal gain is applied to each individual source. High-level sources,

for example, will not suppress the gain for low-level sources.

[0021] FIG. 10 shows a system with separate source signals and separate microphone signals. Here, s_1 and s_2 represent the true separate source signals and x_1 and x_2 two (hearing-aid) microphone signals. Blind source separation (BSS) provides the estimates y_1 and y_2 of these source signals. Application of the (room) transfer functions H_{nm} yields separate stereo output signals for the two sources. Signals "z1 left" and "z1 right," for example, represent the estimated left and right microphone signals for the single source s_1 . FIG. 11A shows a modification of FIG. 10 above, representing one embodiment of the present subject matter. Compression 1109 is applied separately to the estimated source signals y_1 and y_2 , before application of the transfer functions H_{nm} . Similar to the embodiment in FIG. 9A, this yields ILDs that are neither compressed nor cross modulated. The example shown in FIG. 11 B applies coordinated compression 1109 to the stereo source signals, similar to the embodiment in FIG. 9B. Again, ILDs are preserved while optimal gain is applied to each of the sources. FIG. 7 shows one embodiment for separating a stereo signal into three channels for a more source-specific compression. Often in music, the signal for the singer is equally applied to both the left and right channel, centering the perceptual image of the singer. Consider the simple example of a stereo music signal with a singer S that is equally in the left and right channel, instrument A that is predominantly in the left channel, and instrument B that is predominantly in the right channel. Then, the left L and right R channels can be described as:

$$L = A + S$$

$$R = B + S$$

[0022] Then, one can remove the singer from the instruments by subtracting the left from the right channels, and create a signal that is dominated by the singer by adding the left and right channels:

$$L - R = (A+S) - (B+S) = A - B$$

$$L + R = (A+S) + (B+S) = A + B + 2*S$$

$$CS = (L + R)/2 = S + (A + B)/2$$

[0023] Thus, one can compress the $(L+R)/2$ mix to the compressor so that the gain is primarily that for the singer. To get a signal that is primarily instrument A and one that is primarily instrument B:

$$CA = L - R/2 = (A+S) - (B+S)/2 = A - (B-S)/2$$

$$CB = R - L/2 = (B+S) - (A+S)/2 = B - (A-S)/2$$

[0024] After CS, CL and CR have been individually compressed, they are mixed together to create a stereo channel again:

$$CL = 2*(CS + CA)/3$$

$$CR = 2*(CS + CB)/3$$

[0025] FIG. 7 is one example of how to combine the original channels before compression and how to mix the post-compressed signals back into a stereo signal, but other approaches exist. FIG. 7 shows the left $(A+S)$ signal 701 and the right $(B+S)$ signal 702 applied to multipliers (which multiply by $1/2$) and summed by summers to create the CA, CB, and 2CS signals. The CS signal is obtained using multiplier 705. The CA, CB and CS signals are compressed by compressors 706, 708, and 707, respectively, and summed by summers 710 and 712. The resulting outputs are multiplied

by 2/3 by multipliers 714 and 715 to provide the compressed left and compressed right signals, as shown in FIG. 7. It is understood that this is one example of how to process the signals and that other variations are possible without departing from the scope of the present subject matter. Thus, the system set forth in FIG. 7 is intended to be demonstrative and not exhaustive or exclusive.

[0026] FIG. 8 represents a general way of isolating a stereo signal into individual components that can then be separately compressed and recombined to create a stereo signal. There are known ways of taking a stereo signal and extracting the center channel in a more complex way than shown in FIG. 8 (e.g., U.S. Pat. No. 6,405,163, and U.S. Patent Application Publication Number 2007/0076902). Techniques can also be applied to monaural signals to separate the signal into individual instruments. With either approach, the sounds are separated into individual sound source signals, and each source is compressed; the individually compressed sources are then combined to create either the monaural or stereo signal for listening by the hearing impaired listener.

[0027] Left stereo signal 801 and right stereo signal 802 are sent through a process 803 that separates individual sound sources. Each source is sent to a compressor 804 and then mixed with mixer 806 to provide left 807 and right 808 stereo signals according to one embodiment of the present subject matter.

[0028] It is understood that the present subject matter can be embodied in a number of different applications. In applications involving mixing of music to generate hearing assistance device-compatible stereo signals, the mixing can be performed in a computer programmed to mix the tracks and perform compression as set forth herein. In various embodiments, the mixing is done in a fitting system. Such fitting systems include, but are not limited to, the fitting systems set forth in U.S. Patent Application Ser. No. 11/935,935, filed Nov. 6, 2007, and entitled: SIMULATED SURROUND SOUND HEARING AID FITTING SYSTEM.

[0029] In various embodiments, the mixing is done using the processor of the hearing assistance device. In cases where such devices are hearing aids, that processing can be done by the digital signal processor of the hearing aid or by another set of logic programmed to perform the mixing function provided herein. Other applications and processes are possible without departing from the scope of the present subject matter.

[0030] It is understood that in various embodiments, the apparatus and processes set forth herein may be embodied in digital hardware, analog hardware, and/or combinations thereof. It is also understood that in various embodiments, the apparatus and processes set forth herein may be embodied in hardware, software, firmware, and/or combinations thereof.

[0031] This application is intended to cover adaptations and variations of the present subject matter. It is to be understood that the above description is intended to be illustrative, and not restrictive. The scope of the present subject matter should be determined with reference to the appended claims.

Claims

1. Apparatus for processing sound for a hearing assistance device placed at a wearer's ear, the apparatus comprising:

a receiver adapted to receive signals from a sound environment;
 a processor (610L, 610R) connected to the receiver, the processor adapted to process individual sound source components of the received signals, the processor further adapted to apply a head-related transfer function to the individual sound source components;
 a compressor (609) connected to the processor, the compressor adapted to independently compress each of the individual sound source components prior to the application of the head-related transfer function;
 a mixer (611 L, 611 R) connected to the compressor, the mixer adapted to mix the compressed sound source components to produce a mixed output signal; and
 a speaker connected to the mixer, the speaker integrated with the hearing assistance device and adapted to output the mixed output signal at the wearer's ear.

2. The apparatus of claim 1, adapted to apply the head related transfer function at an individual angle of reception for each of the individual sound components.

3. The apparatus of either of the preceding claims, wherein the receiver is adapted to receive sound signals having a stereo right, SR, and a stereo left, SL, sound signal.

4. The apparatus of claim 3, wherein the processor is adapted to process the SR and SL signals to produce left surround, LS, left, L, center, C, right, R, and right surround, RS, signals.

5. The apparatus of claim 4, wherein the processor is further adapted to generate a processed version for each of the

LS, L, C, R, and RS signals by application of a head-related transfer function at an individual angle of reception for each of the LS, L, C, R, and RS signals.

6. The apparatus of claim 5, wherein the compressor is adapted to compress the processed version for each of the LS, L, C, R, and RS signals.

7. The apparatus of claim 6, wherein the mixer is adapted to mix the compressed and processed version of the LS, L, C, R, and RS signals to produce one or both of a right output signal, RO, and a left output signal, LO.

8. The apparatus of claim 7, wherein the hearing assistance device includes a right hearing assistance device including a right speaker and a left hearing assistance device including a left speaker, and wherein the RO signal is adapted to be used by the right speaker the LO signal is adapted to be used by the left speaker.

9. The apparatus of any one of the preceding claims, wherein the processor includes a synthesizer.

10. The apparatus of claim 9, wherein the synthesizer includes a surround sound synthesizer.

11. A method, comprising:

receiving stereo surround signals from a sound environment;
processing the received signals to isolate individual sound source components;
independently compressing the individual sound source components to prevent cross modulation between waveforms of the source components; and
after compressing the components, applying a head-related transfer function to the compressed individual sound source components.

12. The method of claim 11, wherein receiving stereo surround signals includes receiving at least one left sound signal and at least one right sound signal.

13. The method of claim 11 or claim 12, wherein processing the received signals to isolate components includes processing to isolate voice and instrument components from musical signals.

14. The method of any of claim 11 through claim 13, wherein applying the head related transfer function includes applying the transfer function at an individual angle of reception for each of the individual sound components.

Patentansprüche

1. Vorrichtung zum Verarbeiten von Klang für ein Hörhilfegerät, das an einem Ohr eines Trägers platziert ist, wobei die Vorrichtung umfasst:

einen Empfänger, der dafür eingerichtet ist, Signale aus einer Klangumgebung zu empfangen;
einen mit dem Empfänger verbundenen Prozessor (610L, 610R), wobei der Prozessor dafür eingerichtet ist, individuelle Klangquellenkomponenten der empfangenen Signale zu verarbeiten, wobei der Prozessor ferner dafür eingerichtet ist, auf die individuellen Klangquellenkomponenten eine kopfbezogene Übertragungsfunktion anzuwenden;
einen mit dem Prozessor verbundenen Kompressor (609), wobei der Kompressor dafür eingerichtet ist, vor der Anwendung der kopfbezogenen Übertragungsfunktion jede der individuellen Klangquellenkomponenten unabhängig voneinander zu komprimieren;
einen mit dem Kompressor verbundenen Mischer (611L, 611R), wobei der Mischer dafür eingerichtet ist, die komprimierten Klangquellenkomponenten zu mischen, um ein gemischtes Ausgangssignal zu erzeugen; und
einen mit dem Mischer verbundenen Lautsprecher, wobei der Lautsprecher mit dem Hörhilfegerät integriert und dafür eingerichtet ist, das gemischte Ausgangssignal an das Ohr des Hörers auszugeben.

2. Vorrichtung nach Anspruch 1, dafür eingerichtet, die kopfbezogene Übertragungsfunktion für jede der individuellen Klangquellenkomponenten in einem individuellen Empfangswinkel anzuwenden.

3. Vorrichtung nach einem der vorhergehenden Ansprüche, worin der Empfänger dafür eingerichtet ist, Klangsignale

mit einem stereorechten, SR, und einem stereolinken, SL, Klangsignal zu empfangen.

4. Vorrichtung nach Anspruch 3, worin der Prozessor dafür eingerichtet ist, die SR- und SL-Signale zu verarbeiten, um Signale für linkes Umfeld, LS, links, L, Mitte, C, rechts, R, und rechtes Umfeld, RS, zu erzeugen.

5. Vorrichtung nach Anspruch 4, worin der Prozessor ferner dafür eingerichtet ist, eine verarbeitete Version für jedes der LS-, L-, C-, R- und RS-Signale durch Anwendung einer kopfbezogenen Übertragungsfunktion in einem individuellen Empfangswinkel für jedes der LS-, L-, C-, R- und RS-Signale zu erzeugen.

6. Vorrichtung nach Anspruch 5, worin der Kompressor dafür eingerichtet ist, die verarbeitete Version für jedes der LS-, L-, C-, R- und RS-Signale zu komprimieren.

7. Vorrichtung nach Anspruch 6, worin der Mischer dafür eingerichtet ist, die verarbeitete und komprimierte Version der LS-, L-, C-, R- und RS-Signale zu mischen, um eines oder beide von einem rechten Ausgangssignal, RO, und einem linken Ausgangssignal, LO, zu erzeugen.

8. Vorrichtung nach Anspruch 7, worin das Hörhilfegerät ein rechtes Hörhilfegerät, das einen rechten Lautsprecher aufweist, und ein linkes Hörhilfegerät, das einen linken Lautsprecher aufweist, aufweist und worin das RO-Signal dafür eingerichtet ist, durch den rechten Lautsprecher verwendet zu werden, und das LO-Signal dafür eingerichtet ist, durch den linken Lautsprecher verwendet zu werden.

9. Vorrichtung nach einem der vorhergehenden Ansprüche, worin der Prozessor einen Synthesizer aufweist.

10. Vorrichtung nach Anspruch 9, worin der Synthesizer einen Raumklang-Synthesizer aufweist.

11. Verfahren, umfassend:

Empfangen von Stereo-Umfeldsignalen aus einer Klangumgebung;
Verarbeiten der empfangenen Signale, um individuelle Klangquellenkomponenten zu isolieren;
voneinander unabhängiges Komprimieren der individuellen Klangquellenkomponenten, um Kreuzmodulation zwischen Wellenformen der Quellenkomponenten zu vermeiden; und
nach dem Komprimieren der Komponenten erfolgreiches Anwenden einer kopfbezogenen Übertragungsfunktion auf die komprimierten individuellen Klangquellenkomponenten.

12. Verfahren nach Anspruch 11, worin das Empfangen von Stereo-Umfeldsignalen einschließt: Empfangen mindestens eines linken Klangsignals und mindestens eines rechten Klangsignals.

13. Verfahren nach Anspruch 11 oder 12, worin das Verarbeiten der empfangenen Signale, Komponenten zu isolieren, einschließt: Verarbeiten, um Stimmen- und Instrumentenkomponenten aus Musiksignalen zu isolieren.

14. Verfahren nach einem der Ansprüche 11 bis 13, worin das Anwenden der kopfbezogenen Übertragungsfunktion einschließt: Anwenden der Übertragungsfunktion in einem individuellen Empfangswinkel für jede der individuellen Klangquellenkomponenten.

Revendications

1. Appareil permettant de traiter un son pour un dispositif d'aide auditive placé au niveau de l'oreille d'un porteur, l'appareil comprenant :

un récepteur conçu pour recevoir des signaux en provenance d'un environnement sonore ;
un processeur (610L, 610R) raccordé au récepteur, le processeur étant conçu pour traiter des composantes de source sonore individuelle des signaux reçus, le processeur étant en outre conçu pour appliquer une fonction de transfert relative à la tête aux composantes de source sonore individuelle ;
un compresseur (609) raccordé au processeur, le compresseur étant conçu pour comprimer de manière indépendante chacune des composantes de source sonore individuelle préalablement à l'application de la fonction de transfert relative à la tête ;
un mélangeur (611L, 611R) raccordé au compresseur, le mélangeur étant conçu pour mélanger les composantes

de source sonore comprimées afin de produire un signal de sortie mélangé ; et
un haut-parleur raccordé au mélangeur, le haut-parleur étant intégré au dispositif d'aide auditive et conçu pour
produire le signal de sortie mélangé au niveau de l'oreille de porteur.

- 5 2. Appareil selon la revendication 1, conçu pour appliquer la fonction de transfert relative à la tête avec un angle individuel de réception pour chacune des composantes de source sonore individuelle.
3. Appareil selon l'une quelconque des revendications précédentes, dans lequel le récepteur est conçu pour recevoir des signaux sonores présentant un signal sonore stéréo droit, SR, et un signal sonore stéréo gauche, SL.
- 10 4. Appareil selon la revendication 3, dans lequel le processeur est conçu pour traiter les signaux SR et SL afin de produire des signaux ambiophonique gauche, LS, gauche, L, central, C, droit, R, et ambiophonique droit, RS.
- 15 5. Appareil selon la revendication 4, dans lequel le processeur est en outre conçu pour générer une version traitée pour chacun des signaux LS, L, C, R, et RS par application d'une fonction de transfert relative à la tête avec un angle individuel de réception pour chacun des signaux LS, L, C, R, et RS.
- 20 6. Appareil selon la revendication 5, dans lequel le compresseur est conçu pour compresser la version traitée pour chacun des signaux LS, L, C, R, et RS.
7. Appareil selon la revendication 6, dans lequel le mélangeur est conçu pour mélanger les versions comprimées et traitées des signaux LS, L, C, R, et RS afin de produire un ou les deux parmi un signal de sortie droit, RO, et un signal de sortie gauche, LO.
- 25 8. Appareil selon la revendication 7, dans lequel le dispositif d'aide auditive comprend un dispositif d'aide auditive droit comprenant un haut-parleur droit et un dispositif d'aide auditive gauche comprenant un haut-parleur gauche, et dans lequel le signal RO est conçu pour être utilisé par le haut-parleur et le signal LO est conçu pour être utilisé par le haut-parleur gauche.
- 30 9. Appareil selon l'une quelconque des revendications précédentes, dans lequel le processeur comprend un synthétiseur.
10. Appareil selon la revendication 9, dans lequel le synthétiseur comprend un synthétiseur de son ambiophonique.
- 35 11. Procédé, comprenant les étapes consistant à :

recevoir des signaux ambiophoniques stéréo en provenance d'un environnement sonore ;
traiter les signaux reçus afin d'isoler des composantes de source sonore individuelle ;
compresser de manière indépendante les composantes de source sonore individuelle afin d'empêcher une
40 transmodulation entre des formes d'onde des composantes de source ; et
après compression des composantes, appliquer une fonction de transfert relative à la tête aux composantes de source sonore individuelle comprimées.
12. Procédé selon la revendication 11, dans lequel l'étape de réception de signaux ambiophoniques stéréo comprend une étape consistant à recevoir au moins un signal sonore gauche et au moins un signal sonore droit.
- 45 13. Procédé selon la revendication 11 ou 12, dans lequel l'étape de traitement des signaux reçus afin d'isoler des composantes comprend une étape consistant à traiter des signaux musicaux afin d'isoler des composantes vocales et instrumentales.
- 50 14. Procédé selon l'une quelconque des revendications 11 à 13, dans lequel l'étape d'application de la fonction de transfert relative à la tête comprend une étape consistant à appliquer la fonction de transfert avec un angle individuel de réception pour chacune des composantes de source sonore individuelle.

55

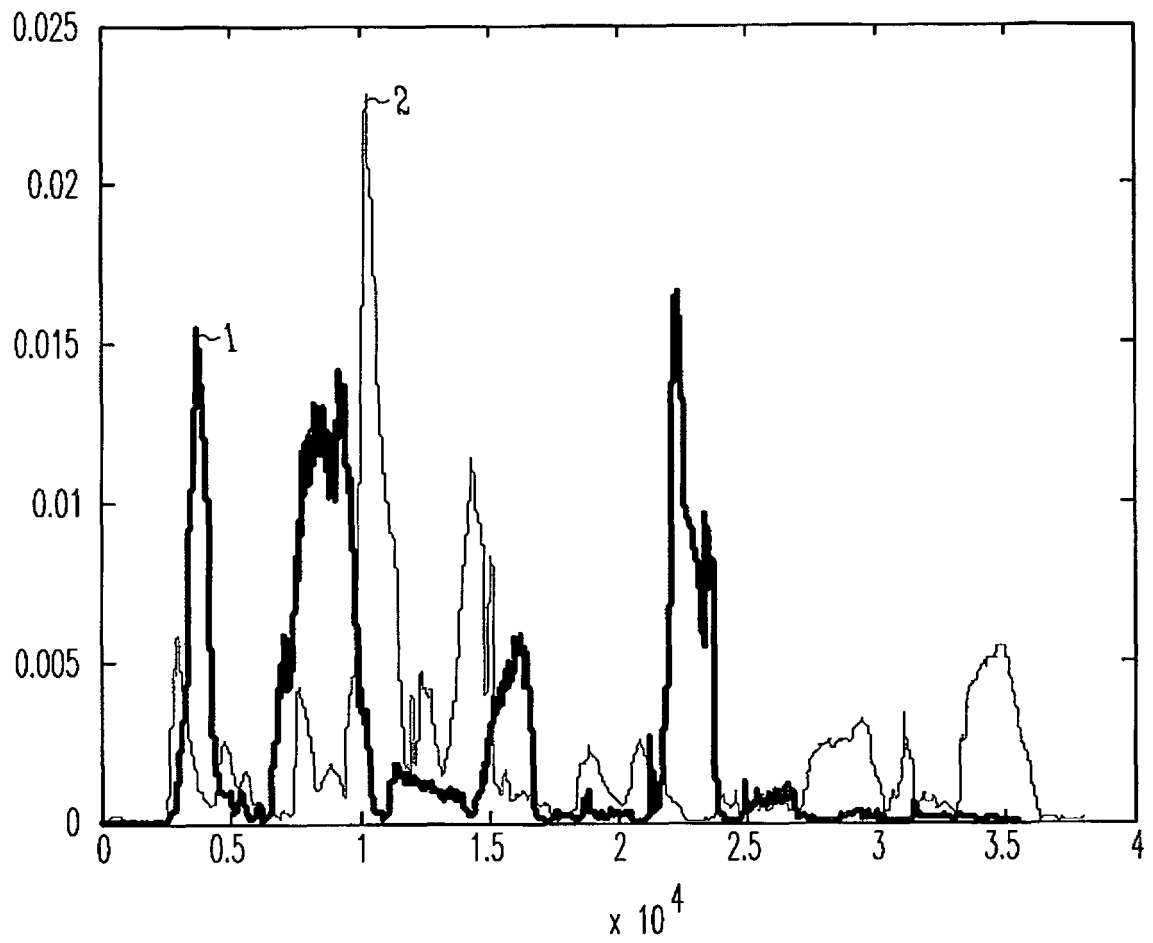


Fig. 1

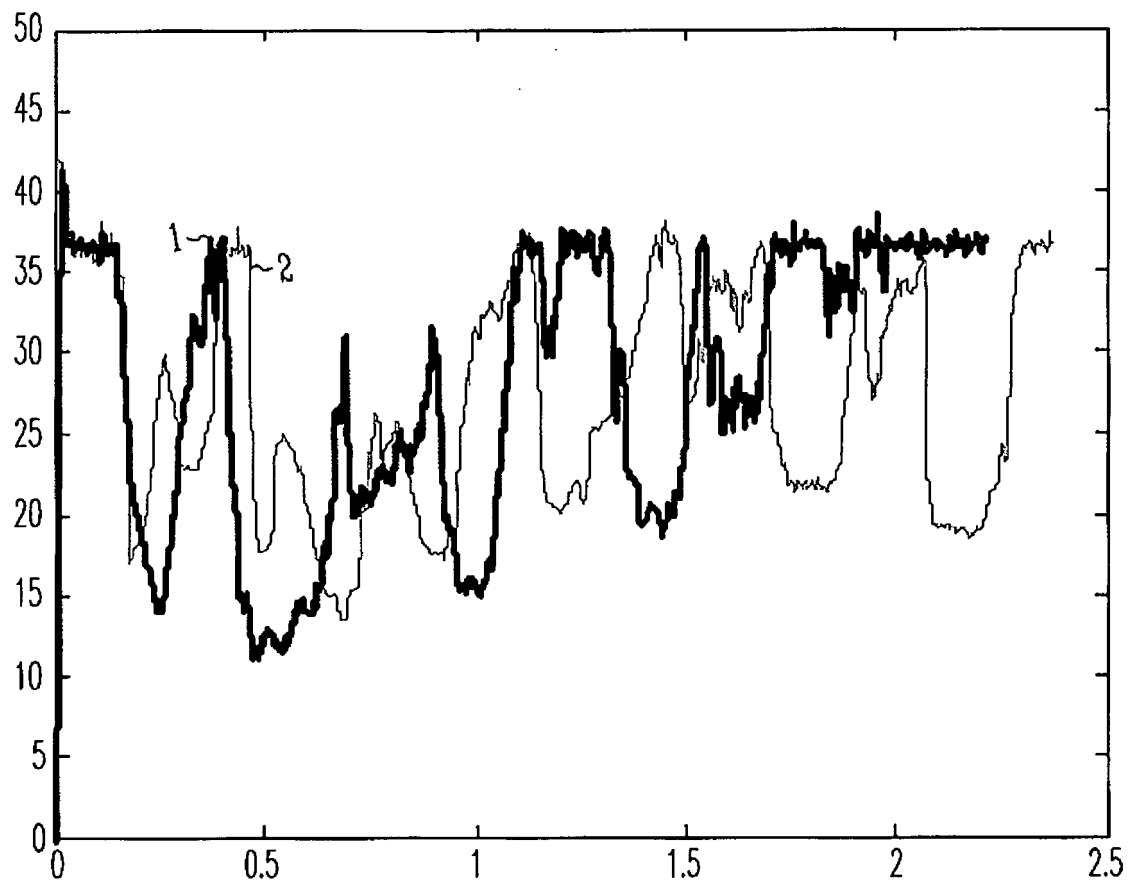


Fig.2

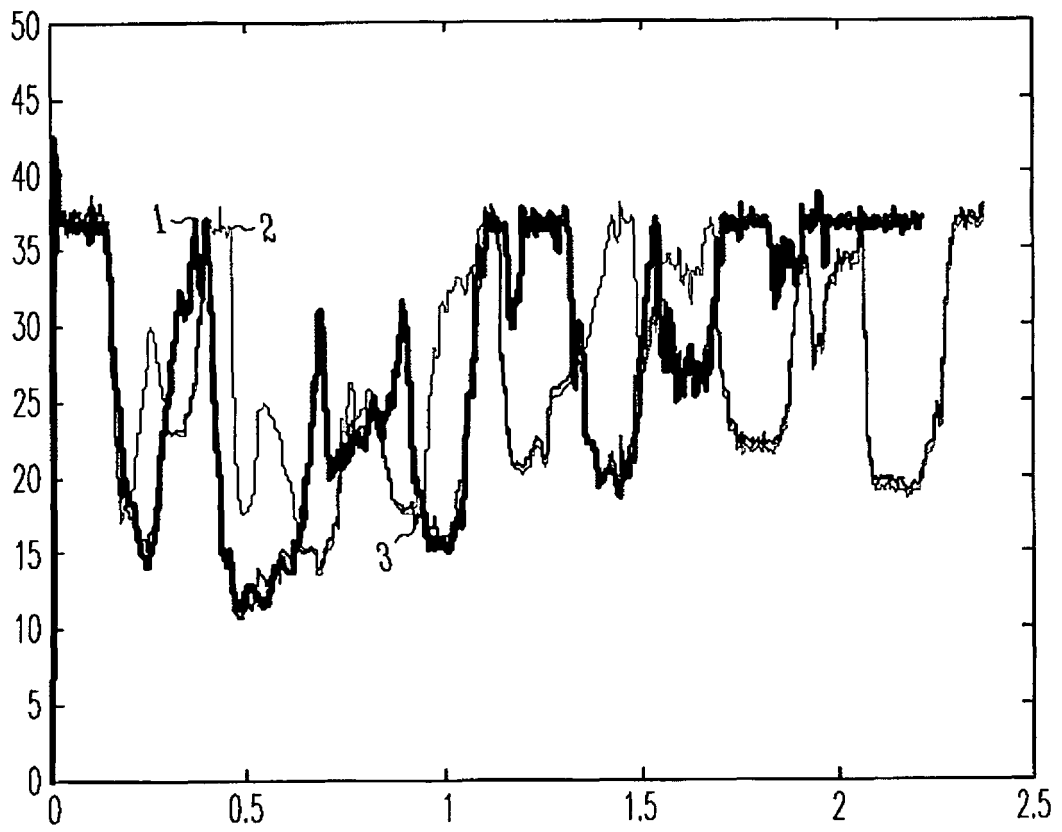


Fig. 3

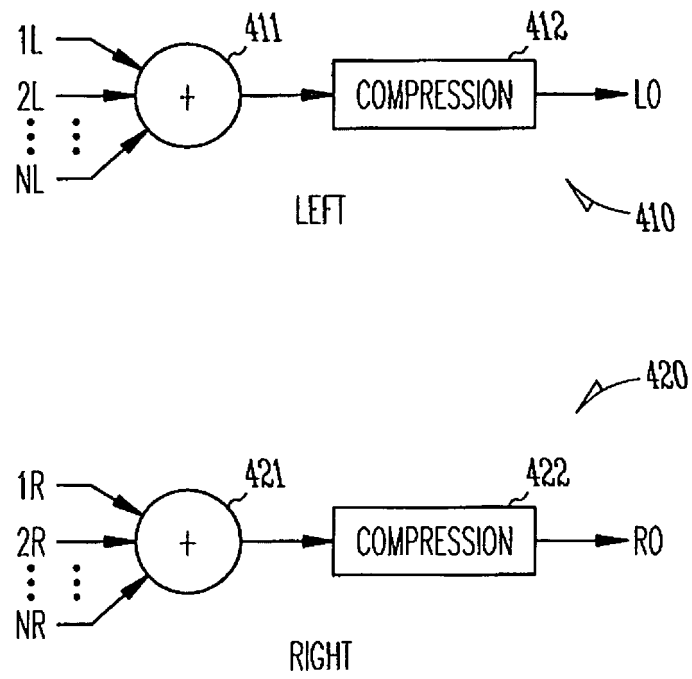


Fig. 4

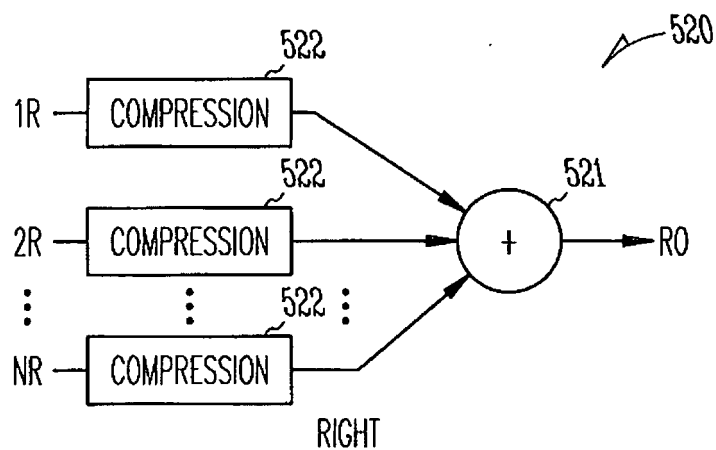
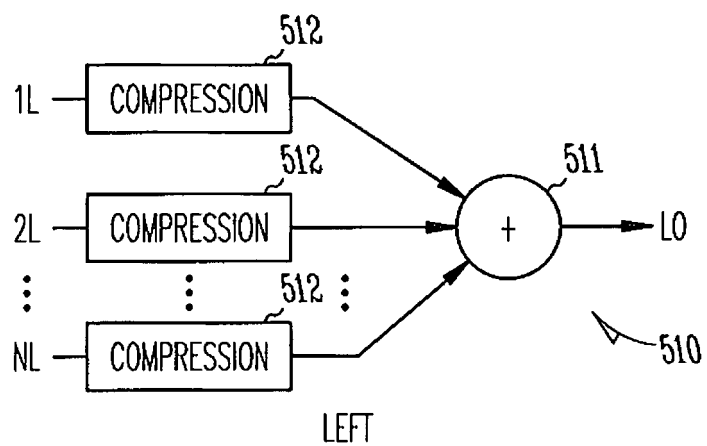


Fig. 5

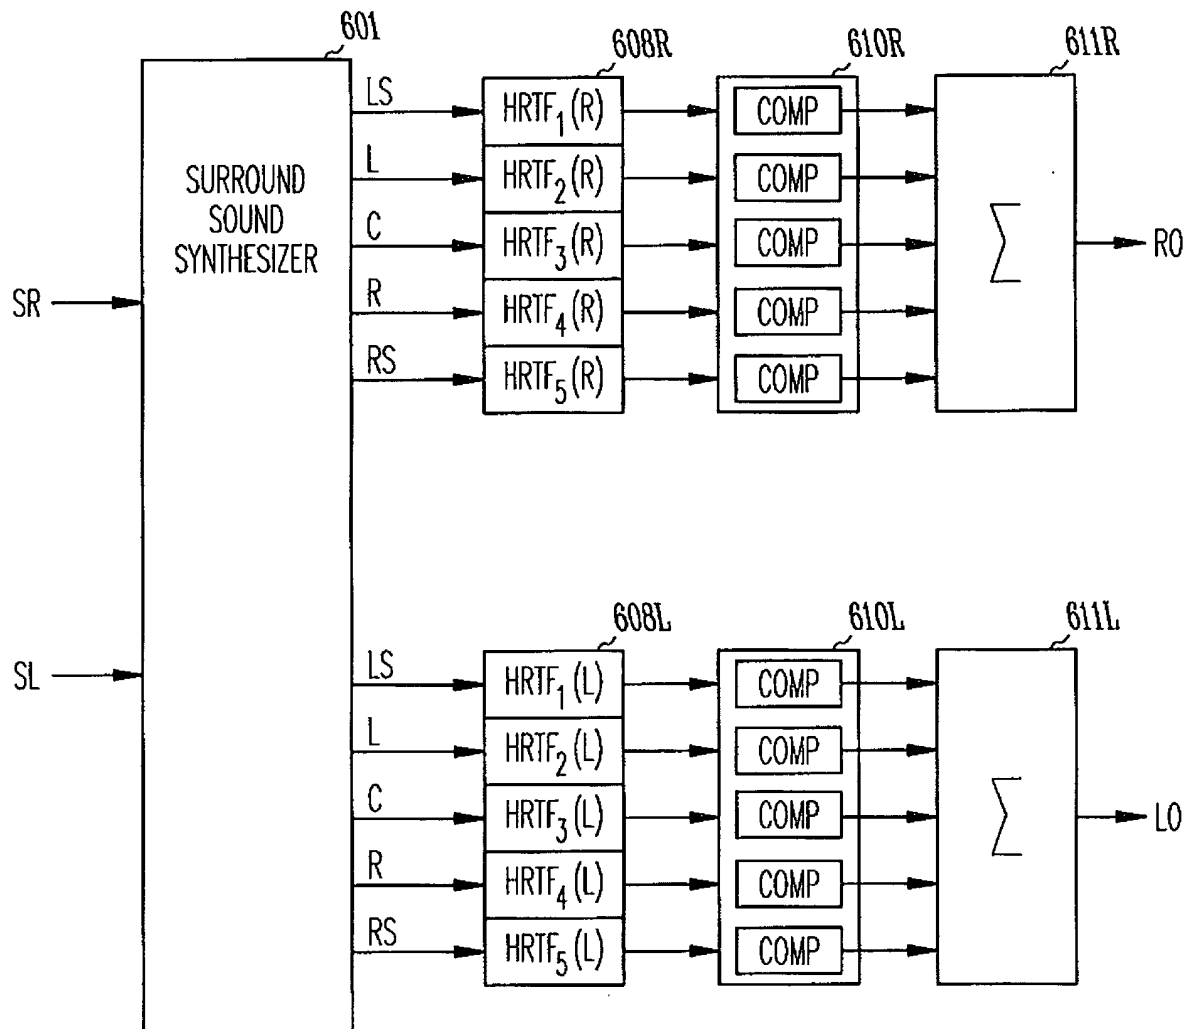


Fig. 6

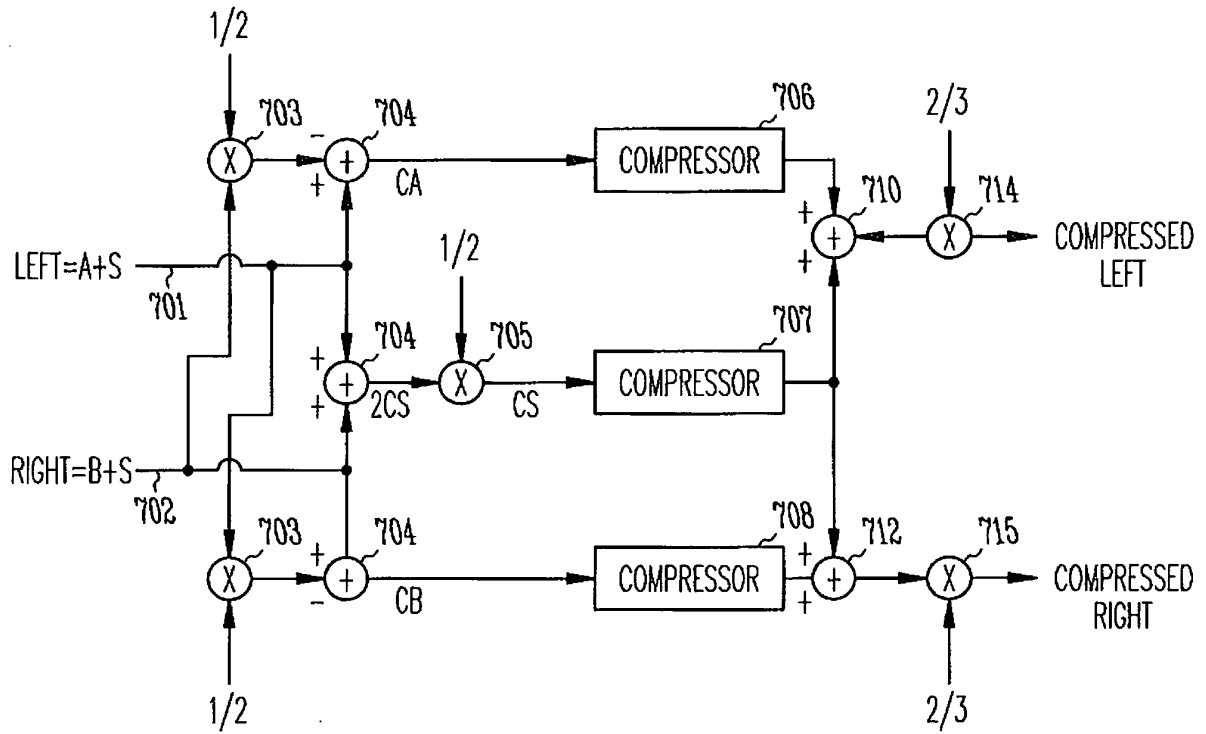


Fig. 7

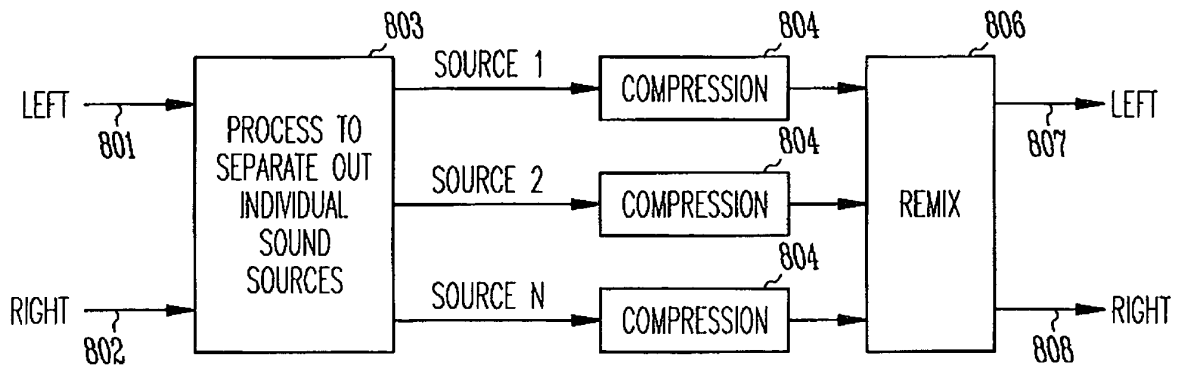


Fig. 8

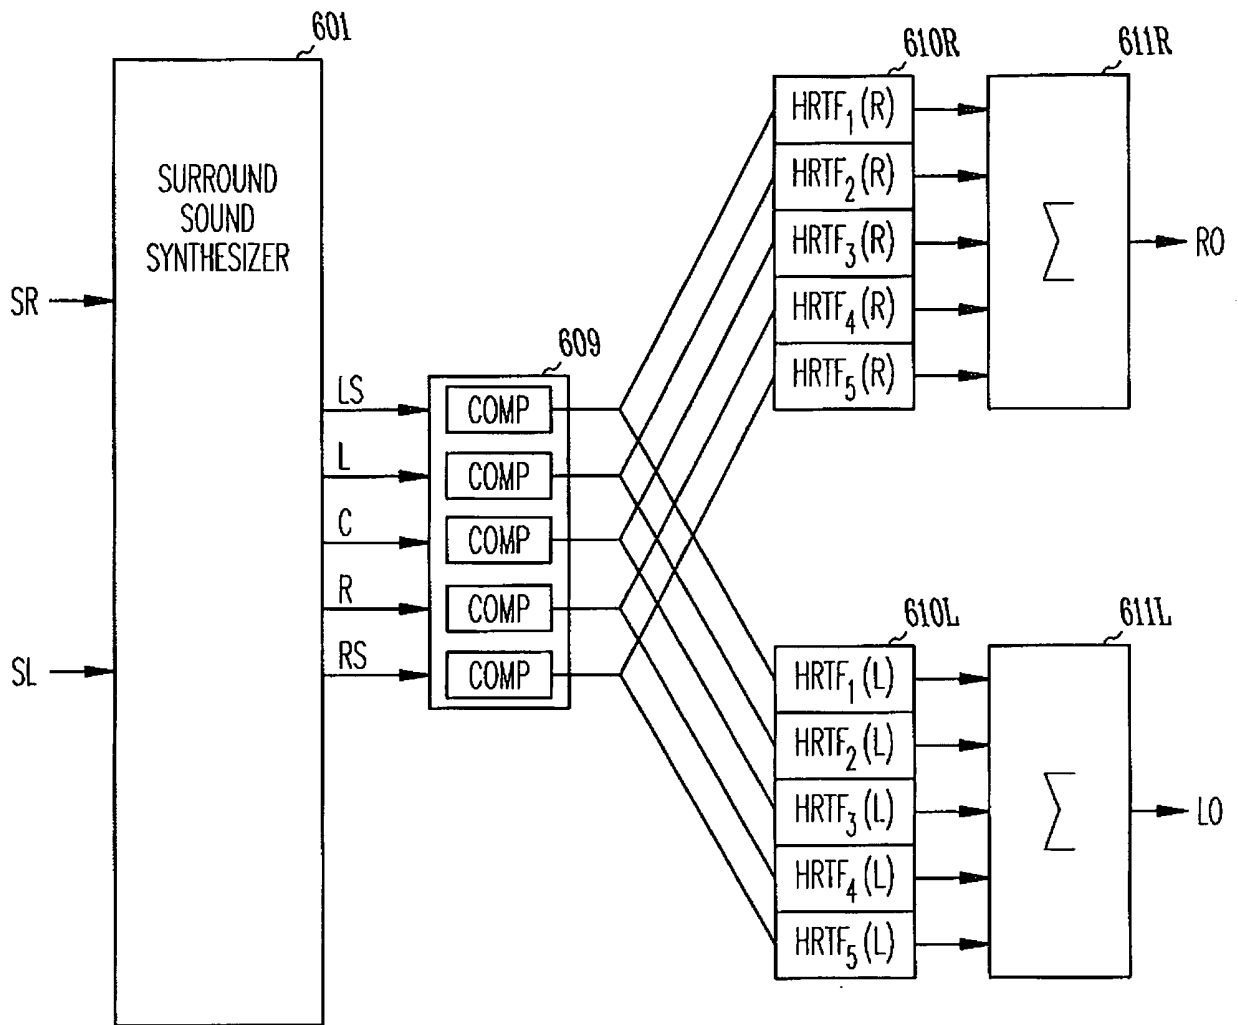
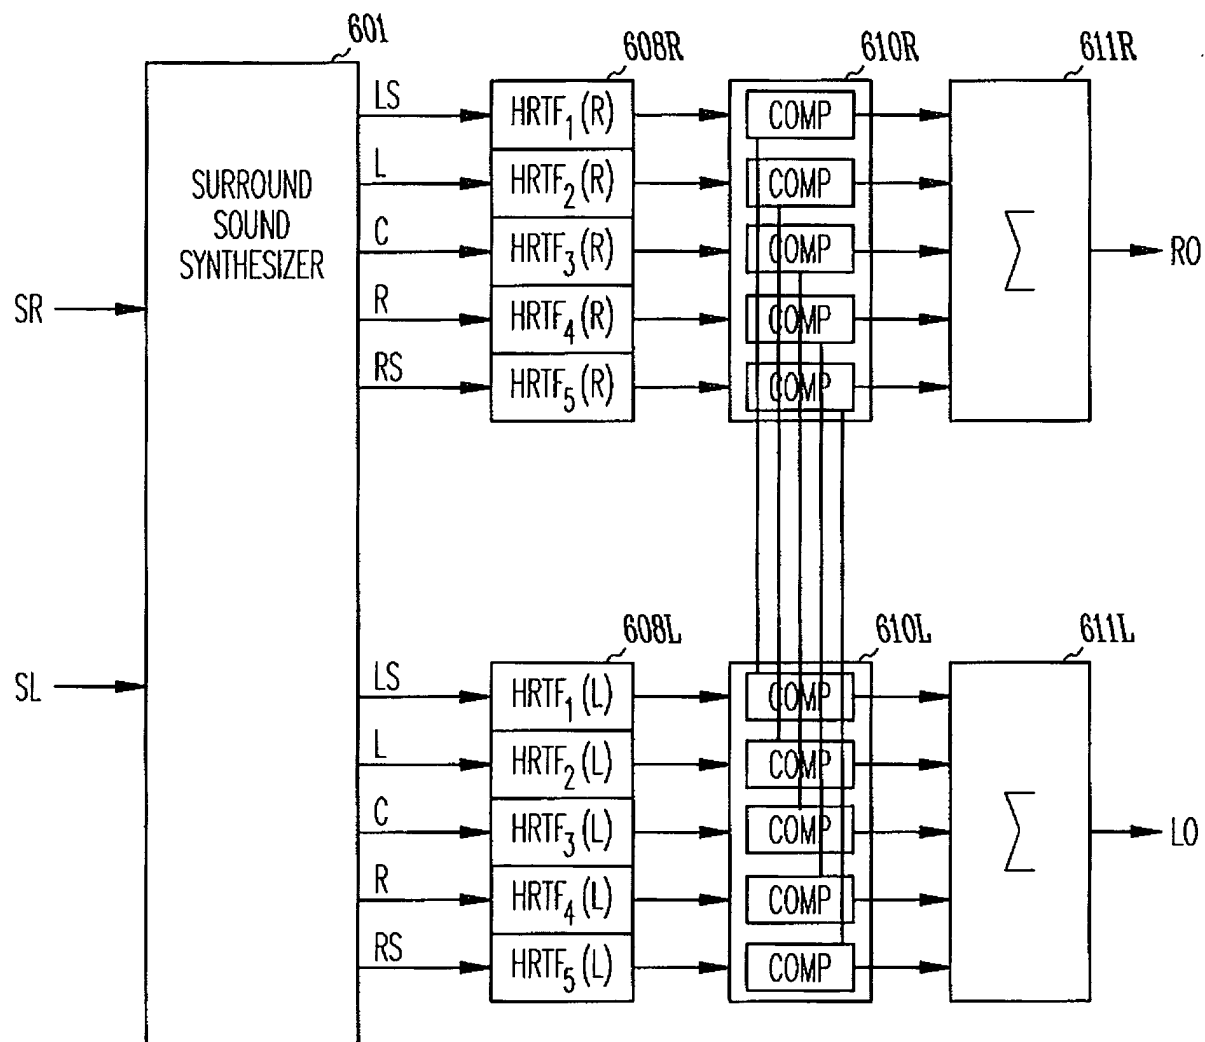


Fig. 9A

*Fig. 9B*

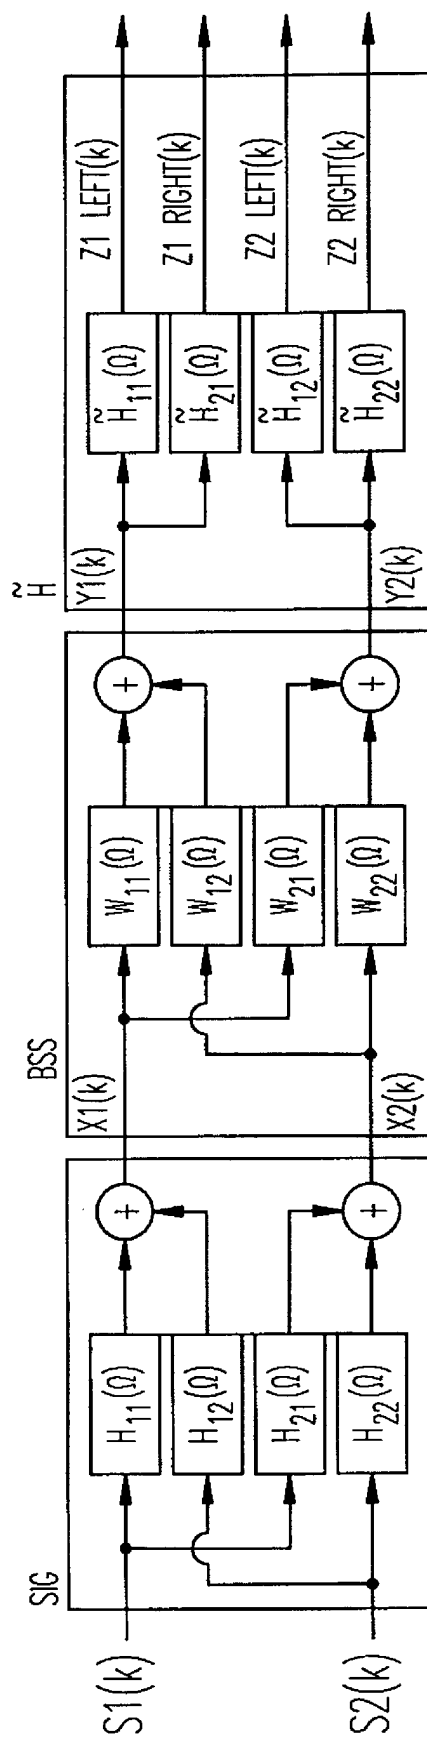


Fig. 10
(Prior Art)

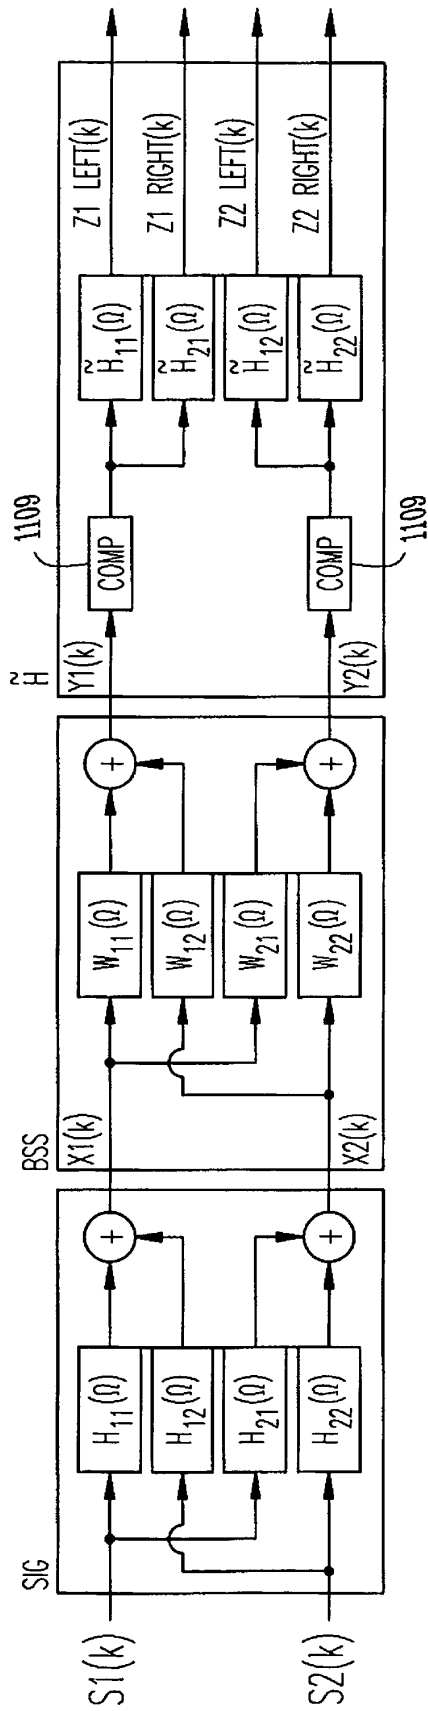


Fig. 11A

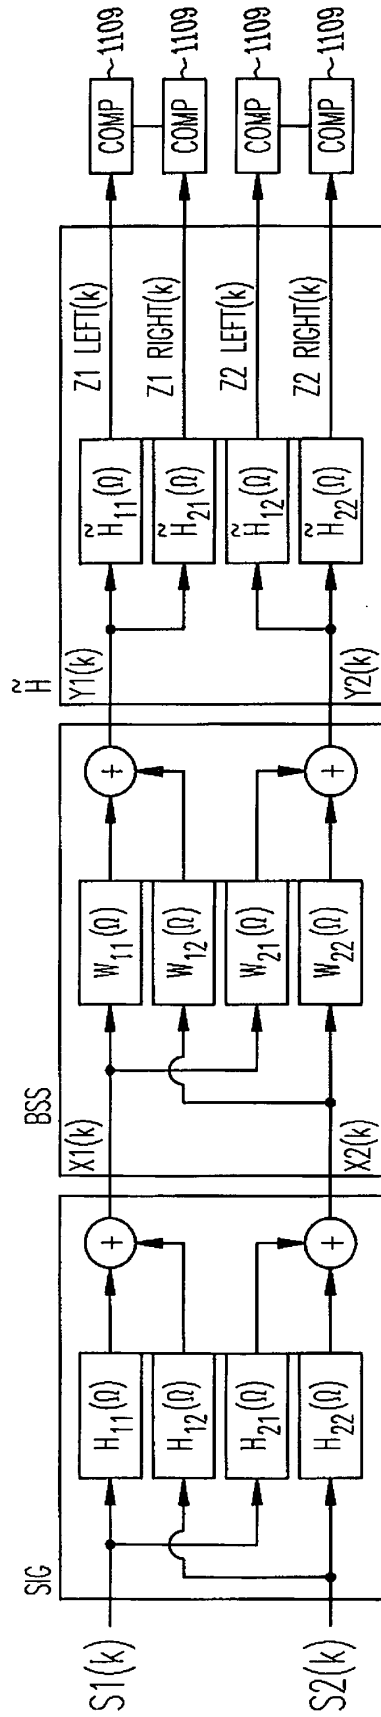


Fig. 11B

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 2131610 A [0009]
- US 6405163 B [0026]
- US 20070076902 A [0026]
- US 93593507 A [0028]

Non-patent literature cited in the description

- **STONE, M. A. ; MOORE, B. C.** Effects of spectro-temporal modulation changes produced by multi-channel compression on intelligibility in a competing-speech task. *J Acoust Soc Am*, 2008, vol. 123, 1063-1076 [0007]