PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 : G21F 9/16, C03B 5/027

A1

(11) International Publication Number: WO 91/16715

(43) International Publication Date: 31 October 1991 (31.10.91)

(21) International Application Number: PCT/US91/02637

(22) International Filing Date: 17 April 1991 (17.04.91)

(30) Priority data:
510,556 18 April 1990 (18.04.90) US

(60) Parent Application or Grant
(63) Related by Continuation
US 510,556 (CON)
Filed on 18 April 1990 (18.04.90)

(71) Applicant *(for all designated States except US):* GLASSTECH, INC. [US/US]; 995 Fourth Street, Ampoint Industrial Park, Perrysburg, OH 43552 (US).

(72) Inventor; and
(75) Inventor/Applicant *(for US only) :* RICHARDS, Ray, S. [US/US]; 4141 Stonehenge, Sylvania, OH 43560 (US).

(74) Agents: HEINL, Kevin, J. et al.; Brooks & Kushman, 1000 Town Center, 22nd Floor, Southfield, MI 48075 (US).

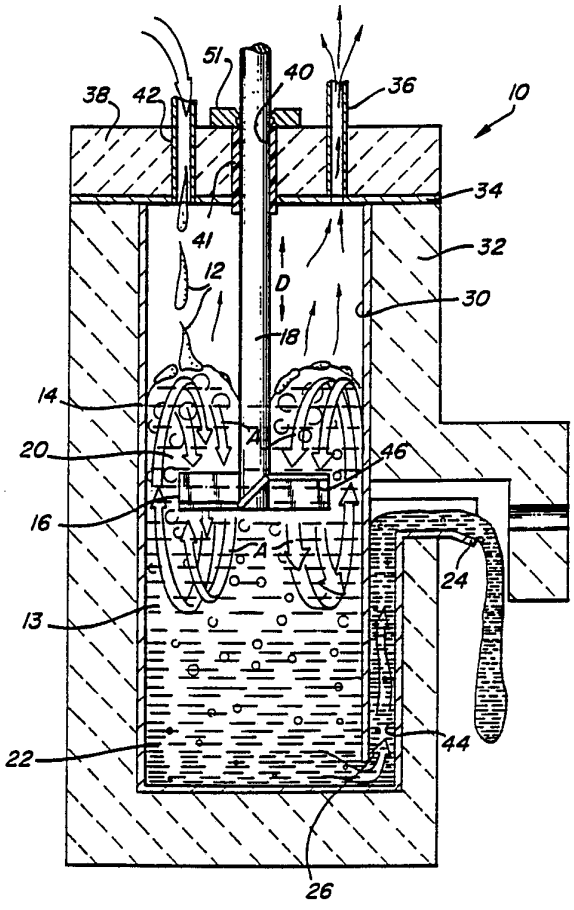
(81) Designated States: AT, AT (European patent), AU, BB, BE (European patent), BF (OAPI patent), BG, BJ (OAPI patent), BR, CA, CF (OAPI patent), CG (OAPI patent), CH, CH (European patent), CM (OAPI patent), DE, DE (European patent), DK, DK (European patent), ES, ES (European patent), FI, FR (European patent), GA (OAPI patent), GB, GB (European patent), GR (European patent), HU, IT (European patent), JP, KP, KR, LK, LU, LU (European patent), MC, MG, ML (OAPI patent), MR (OAPI patent), MW, NL, NL (European patent), NO, RO, SD, SE, SE (European patent), SN (OAPI patent), SU, TD (OAPI patent), TG (OAPI patent), US.

Published
With international search report.
With amended claims.

(54) Title: METHOD AND APPARATUS FOR WASTE VITRIFICATION

(57) Abstract

A waste vitrification apparatus (10) having rotatable mixer impeller (16) functioning as a shaft electrode (60) and metallic vessel (14) functioning as a vessel electrode (62). A stream (12) of waste material and vitrifiable material are mixed and melted in the vessel (14) for vitrification. The waste vitrification method converts a feed stream (12) by mixing the feed stream into a glass melt (13) and melting glass batch of the feed stream (12) to form a foamy mass. The stream is dispersed by the impeller (16) to form a foam which is then densified in a settling zone (22), recovered through a spout (24) and solidified in storage containers. Means are provided to adjust the location of the mixing impeller (16) in the vessel (14) to change the depth of the settling zone (22). The impeller (16) is mounted on a drive shaft (18) having a recirculating coolant flow.



FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	**ES**	Spain	**MG**	Madagascar
AU	Australia	**FI**	Finland	**ML**	Mali
BB	Barbados	**FR**	France	**MN**	Mongolia
BE	Belgium	**GA**	Gabon	**MR**	Mauritania
BF	Burkina Faso	**GB**	United Kingdom	**MW**	Malawi
BG	Bulgaria	**GN**	Guinea	**NL**	Netherlands
BJ	Benin	**GR**	Greece	**NO**	Norway
BR	Brazil	**HU**	Hungary	**PL**	Poland
CA	Canada	**IT**	Italy	**RO**	Romania
CF	Central African Republic	**JP**	Japan	**SD**	Sudan
CG	Congo	**KP**	Democratic People's Republic of Korea	**SE**	Sweden
CH	Switzerland			**SN**	Senegal
CI	Côte d'Ivoire	**KR**	Republic of Korea	**SU**	Soviet Union
CM	Cameroon	**LI**	Liechtenstein	**TD**	Chad
CS	Czechoslovakia	**LK**	Sri Lanka	**TG**	Togo
DE	Germany	**LU**	Luxembourg	**US**	United States of America
DK	Denmark	**MC**	Monaco		

METHOD AND APPARATUS FOR WASTE VITRIFICATION

TECHNICAL FIELD

The present invention relates to a method and apparatus for vitrifying wastes. More particularly, the present invention relates to a glass melting furnace having an impeller to mix and foam vitrifiable materials and waste materials which are fed to the melter, melted and recovered to form a solid vitrified mass.

BACKGROUND ART

Disposal of hazardous waste is a pressing environmental problem. Hazardous waste such as radioactive materials from nuclear reactors have long term radioactivity which makes conventional methods of solid waste disposal inappropriate. There is significant danger of such materials leaching from a solid waste disposal facility and entering the water supply.

Vitrification of hazardous solid wastes has been proposed and implemented on a relatively small scale. Problems associated with vitrification processes developed previously include low throughput resulting in a high disposal cost per unit of hazardous waste material. As used herein, radioactive wastes, hazardous wastes and toxic chemical waste shall be referred to as "hazardous waste".

The United States Department of Energy, working in conjunction with six other countries in a cooperative technical exchange, has developed a method of vitrifying radioactive waste material in boro-silicate glass. The U.S. Department of Energy project resulted in the development of an electric glass furnace. The glass

furnace developed was electrically powered and operated on an aqueous waste stream having 40 percent solids content. The solids in the waste stream were approximately 60 percent boro-silicate glass frit and 40 percent radioactive waste sludge. A primary problem with the resultant static glass furnace was that its output was limited to a rate of 4 pounds of vitrified waste per hour per square foot of furnace surface area.

Boro-silicate glass was selected for its chemical durability and low melting point. The special boro-silicate glass combines with the waste material to form a vitrified output that will be referred to herein as "waste glass".

The furnace included the use of Inconel 690 as electrodes and other parts of the furnace. (Inconel is a trademark of International Nickel Corporation).

In addition to the low throughput of the electric furnace, the cost of melters developed in the cooperative project was considerable. In addition, start-up and shut-down procedures require considerable time.

Soda lime glass melters having a mixing element and electrical heating have been developed for the purpose of improving productivity of soda lime glass manufacturing processes. An example of such a melter is disclosed in U.S. Patent No. 3,850,606 to Rough and U.S. Patent No. 3,819,350 to Pellett, et al.

Such melters were tried by Owens-Illinois but were abandoned due to the inability of the melters to produce high quality glass having an acceptable level of gaseous occlusions. The intended electrical flow path in the melters was between the electrodes extending upwardly

from the floor of the melter and the mixing element. This general arrangement resulted in problems including high electrical charge concentration at the tips of the impeller which resulted in excessive wear and consumption of the impeller. Further, high volume waste processing is adversely effected by the use of components which must be replaced.

These and other problems are overcome by the glass vitrification melter of the present invention as summarized below.

DISCLOSURE OF INVENTION

The present invention relates to a waste vitrification method performed in a vessel having a rotatable impeller. The process comprises the steps of introducing a feed stream into the vessel. The feed stream is then mixed into a glass melt in the vessel by the impeller to form a foamy mass. The glass melt is electrically heated in the vessel by application of electrical energy between the sides of the vessel and the impeller to melt the glass batch material and form a molten vitrified output. Finally, the molten vitrified output is recovered from the vessel.

The method may also include the step of densifying the foam material by passing the foam material into a quiescent zone where the foam material is separated into a densified material and gaseous materials.

The mixing and heating steps are preferably performed simultaneously in a mixing zone in the vessel. Heating is diminished through the densifying step while maintaining the residual heat in the densified material

to keep it in a pourable state until after the recovery step.

The quiescent zone may be in the same vessel as the mixing zone or, alternatively, the quiescent zone may be a separate vessel. If the quiescent zone is a separate vessel, the mixing zone and quiescent zone would be in fluid flow communication so that the foam material may pass by fluid flow from the mixing zone to the quiescent zone.

According to another aspect of the present invention, an apparatus for waste vitrification is disclosed. The waste vitrification apparatus vitrifies an aqueous stream having vitrifiable materials and waste materials to be disposed of in a suspension. The waste vitrification apparatus comprises a vessel formed of an electrically conductive material in which a mixing impeller is disposed which is also formed of an electrically conductive material. A drive shaft extends into the vessel and is connected to the mixing impeller. Means for rotating the drive shaft and impeller are provided for dispersing the constituents of the waste stream into the glass melt in the vessel. An electrical power circuit supplies sufficient voltage and current between the vessel and the impeller sufficient to heat the waste stream until the vitrifiable material melts to a liquid state and forms a solidifiable output including the waste material and the melted vitrifiable material. The apparatus includes an opening through which the solidifiable output is poured into a container for cooling and solidification.

The vessel preferably has a mixing zone located above a settling zone. As the aqueous stream is fed into the apparatus, it is mixed by the impeller and

simultaneously heated by the electrical current between the impeller and the walls of the vessel. As the materials are mixed and heated, water in the system is vaporized and other constituents release gases resulting in the creation of a foamed mass. As the process proceeds, the foam mass moves by gravity into a settling zone located below the mixing zone within the vessel where a portion of the gaseous material contained in the foam mass is eliminated leaving a densified solidifiable output.

According to one aspect of the invention, the drive shaft and impeller are positionable at various heights within the vessel. The mixing impeller may then be positionable at various heights within the container to control the density of the solidifiable output. While it is not necessary to completely eliminate gaseous occlusions in the solidifiable output, an acceptable density level would be 70 percent and preferably more than 90 percent of the true density of the waste glass.

It is an object of the present invention to provide a high throughput hazardous waste vitrifying method and apparatus which quickly melts vitrifiable batch materials.

Another object of the present invention is to provide a waste vitrification method and apparatus which is capable of converting an aqueous, 40 percent solid feed stock, including 60 percent boro-silicate glass batch and 40 percent wastes and produce a dense vitrified solidifiable output.

It is another object of the present invention to provide a small waste vitrification apparatus which can

be constructed as a portable or local hazardous waste processing unit.

It is another object of the present invention to provide a waste vitrification apparatus suitable for continuous or intermittent use depending on waste processing demands.

These and other objects of the present invention are achieved by the method and apparatus of the present invention as will be more fully understood upon review of the attached drawings in light of the following description of the best mode for carrying out the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 is a cross-sectional schematic view of the glass melting apparatus according to the present invention;

FIGURE 2 is a fragmentary perspective view of the glass melter of the present invention;

FIGURE 3 is a flow chart schematically illustrating the steps of the method of the present invention;

BEST MODE FOR CARRYING OUT THE INVENTION

Referring now to FIGURE 1, the waste vitrification apparatus 10 of the present invention is shown receiving a feed stream 12 preferably comprising an aqueous slurry of glass batch and waste materials. The feed stream 12 could also be dry glass batch or melted glass batch and waste materials fed into the apparatus 10.

The glass batch is preferably boro-silicate batch selected for its low melting point in the range of 950°C to 1050°C. Other compositions may be used depending upon the thermal and chemical limitations of the vessel. As used herein, the term glass batch is intended to encompass both raw materials for making glass and fused and partially fused materials used in making glass known as frit or cullet. The wastes to be disposed of are either radioactive wastes, hazardous chemical wastes, or other wastes which require a durable disposal medium.

A vessel 14 is provided to receive the feed stream 12 in a glass melt 13. A mixing impeller 16 is disposed in the vessel 14 on a drive shaft 18. The vessel 14 is preferably formed of an electrically conductive, high temperature nickel alloy such as Inconel 690 (Inconel is a trademark of International Nickel Corporation). The mixing impeller and drive shaft 18 are also preferably formed of Inconel 690. Other suitable high temperature, electrically conductive materials, such as molybdenum, platinum or other high temperature alloys can be used depending on the materials processed.

A mixing zone 20 is defined in the upper portion of the vessel 14. A settling zone 22 is provided below the mixing zone 20 in the vessel 14. Alternatively, a settling zone 22 could be provided in a separate vessel (not shown) in fluid communication with the mixing zone 20 of the vessel 14.

A spout 24 of the "tea pot" type is preferably provided on the vessel 14 for pouring off the output of the waste vitrification apparatus 10. An opening 26 is formed in the vessel 14 at the base of the settling zone 22. The output is recovered through the opening 26 and passed in a molten state to the spout 24.

Referring now to FIGURES 1 and 2, the waste vitrification apparatus 10 will be described in greater detail. The vessel 14 is surrounded by walls 30. The walls 30 are formed of refractory bricks or other insulation material. An Inconel layer 34 is provided on top of the vessel 14. Layer 34 is also insulated by a refractory lid 38.

A shaft opening 40 is provided through the layer 34 and the refractory lid 38 which receives the drive shaft 18. An inlet 42 is provided in the layer 34 and lid 38 through which the aqueous feed stream 12 enters the vessel 14. An outlet 36 is also provided in the vessel 14 or layer 34 and lid 38 for release of gases and vapors from the melt 13. The gases and vapors released are further treated by appropriate means depending on their composition. An electrically non-conductive bushing 41 lines the hole 40 to prevent the drive shaft 18 from contacting or short circuiting to the layer 34.

An outlet passage 44 is provided between the opening 26 and spout 24. The outlet passage 44 is preferably located within the walls 30 and is maintained at an elevated temperature to keep the solidifiable output of the apparatus 10 in a molten state during its passage from the opening 26 to the spout 24.

The mixing impeller 16 preferably has blades 46 which are oriented approximately 45 degrees to set up an axial mixing flow within the mixing zone 20. A flow induced by the mixing impeller 16 is shown by arrows A in FIGURE 1. The axial mixing flow fully disperses the constituents of the aqueous feed stream 12 upon entry into the glass melt 13. Other impeller designs can also be used to provided that adequate mixing of the feed stream in the glass melt occurs.

The location of the mixing impeller 16 within the vessel 14 is adjustable within a predetermined range. The adjustment of the location of the mixing impeller 16 changes the location of the mixing zone 20, and also allows expansion or contraction of the settling zone 22 to control the degree of densification of the solidifiable output of the apparatus 10. The drive shaft 18 is mounted on upper and lower insulative shaft mounts 48 and 50. Drive shaft 18 can be raised or lowered with the shaft mounts 48 and 50. A non-conductive mechanical seal 51 is preferably provided in the top 38 to seal the drive shaft 18. Arrows D illustrate the degree of displacement available within the predetermined range of adjustment of the mixing impeller 16 in the illustrated embodiment.

A drive motor 52 comprising a conventional electric motor is operatively connected to the drive shaft 18 by a drive belt 54. The drive belt 54 drives a shaft pulley 56 when rotated by a motor pulley 58.

The drive shaft 18 is preferably rotated at speeds to provide the intensive mixing required by the present invention. The mixing step of the present invention is different from prior art stirrers which at their outer perimeter rotate on the order of 50 feet per minute, or less, while the impeller 16 of the present invention is intended to rotate so that its outer perimeter moves at a speed of more than 250 feet per minute, and more preferably at more than 500 feet per minute.

The waste vitrification apparatus 10 electrically heats the glass melt 13 by electrical discharge through the melt 13 while in the vessel 14. A shaft electrical contact 60, preferably of the brush, or rotatable contact, type is connected to the drive shaft

18. The vessel 14 includes a vessel lead 62. A shaft cable 64 and vessel cable 66 are connected to the shaft electrical contact 60 and vessel lead 62, respectively, and are connected in an electrical circuit. The voltage and current must supply sufficient heat to convert the feed stream into a glass melt.

The drive shaft 18 is preferably a hollow shaft having coolant circulation. A cooling inlet 68 through which coolant water is introduced into a central tube of the drive shaft 18 and a coolant outlet 70 in communication with an outer tube portion of the drive shaft 18 is provided for flow of coolant fluid. Coolant fluid enters the coolant inlet 68 and exits the coolant outlet 70 after circulation through the drive shaft 18, preferably to a point below the layer 34 and above the level of the glass melt.

As shown in FIGURE 2, auxiliary preheating coil 72 may be provided for preheating the apparatus 10. Auxiliary preheating coils are intended for initial start-up of the apparatus 10. After the process is operational, the auxiliary preheating coil 72 will be turned off as sufficient heat is developed.

Outlet heating coils 74 are provided to guard against any freeze-up of the outlet port 24. A gas burner could also be used for heating the outlet port 24 depending upon the type of waste being processed. Other auxiliary heaters, not shown, may be provided as needed to keep the opening 26 or base of the apparatus 10 above the melting temperature of the waste glass.

Referring now to FIGURE 3, the method of the present invention will be explained. The method commences with introduction of an feed stream at 80 into the apparatus 10.

As the feed stream is received in the vessel 14, it is mixed into the glass melt 13 in the mixing zone 20 by the impeller 16 as indicated by reference numeral 82. Preferably simultaneously, the glass melt 13 is heated at reference numeral 80 to form a molten foam material by the combined action of the electrical discharge between the walls of the vessel 14 and the impeller 16 and the rapid rotation of the impeller 16.

After mixing and heating, the foam material passes to a settling zone where a densifying step 86 is performed wherein the foam material is separated into a densified material and in gaseous constituents. The densified material preferably is densified to between 70 and 90 percent (or preferably more than 95 percent) of theoretical density of the waste glass. The deviation from theoretical density results from bubbles caused by the gaseous occlusions contained in the vitrified waste glass.

The densified material is then recovered from the vessel as a solidifiable output at reference numeral 88. The output is then poured into containers at reference numeral 90, and cooled to form a solidified vitrified mass, thereby permanently encasing the waste materials to preclude leaching of the waste materials from a storage facility.

The composition of the aqueous feed stream in a test run with non-radioactive materials to simulate radioactive wastes was nominally 60 percent water and 40

percent solids by weight. The solids content was approximately 28 percent particulate sludge, 8 percent dissolved solids and 64 percent boro-silicate rich glass frit.

The composition in percent by weight of a vitrified output sample of the test run is shown below as analyzed by two analysis methods:

Constituent	Method A	Method B
CaO	1.5	1.5
CuO	0.2	0.2
MgO	1.0	1.0
MnO	2.3	2.4
ZnO	0.1	0.1
Al_2O_3	3.7	3.8
Fe_2O_3	12.1	12.0
Li_2O	3.9	3.7
Na_2O	11.2	-
NiO	0.9	1.0
TiO_2	0.8	0.8
K_2O	1.7	-
SiO_2	48.9	-
B_2O_3	8.1	-
SrO	-	0.02
Cr_2O_3	-	0.08
P_2O_5	-	0.05

It is expected that actual radioactive waste glass would be of comparable composition but would also include radioactive materials.

The preceding description is of the best mode of practicing the invention. Modifications of the method and apparatus described will be apparent to those skilled in the art. The scope of the invention should be construed by reference of the following claims.

I CLAIM:

1. A waste vitrification method performed in a vessel having a wall and a rotatable impeller comprising the steps of:

introducing a feed stream comprising waste material into the vessel;

mixing the feed stream into glass melt in the vessel with the impeller to disperse said feed stream in the melt to form a foamy mass;

heating the foamy mass in said vessel by passing electrical current through said foamy mass between the wall of the vessel and the impeller to form a molten vitrified output; and

recovering the molten vitrified output.

2. The waste vitrification method of claim 1 wherein said feed stream further comprises glass batch.

3. The waste vitrification method of claim 1 wherein said feed stream is an aqueous mixture.

4. The waste vitrification method of claim 3 wherein said feed stream is approximately 60 percent water and 40 percent solids by weight.

5. The waste vitrification method of claim 4 wherein said solids include frit.

6. The waste vitrification method of claim 2 wherein said feed stream comprises a first feed stream of waste materials and a second feed stream of glass batch.

7. The waste vitrification method of claim 1 wherein said step of mixing is performed by an impeller having outer surface portion moving at a speed of more than 250 feet per minute.

8. The waste vitrification method of claim 1 wherein said step of mixing is performed by an impeller having outer surface portion moving at a speed of more than 500 feet per minute.

9. The waste vitrification method of claim 1 wherein said steps of mixing and heating the foamed material are performed simultaneously in the vessel.

10. In the method of claim 1, the further step of densifying the foam material by passing the foam material into a quiescent zone where a portion of the gaseous content of the foamy mass is separated from the foamy mass to form the molten vitrifiable output.

11. The method of claim 10 wherein said heating continues through the densifying step to maintain the molten vitrified output in a pourable state until after the recovering step.

12. In the method of claim 10, further comprising the step of cooling the molten vitrified output to form a solidified vitreous mass.

13. The method of claim 1 wherein said feed stream includes radioactive material.

14. The method of claim 2 wherein said glass batch material is boro-silicate glass.

15. A waste vitrification method performed at least in part in a vessel having a wall and a rotatable impeller, said vessel having an electric circuit creating a current flow between two points in said vessel comprising the steps of:

introducing a mixture of solid waste material and glass batch into the vessel;

mixing the mixture in the vessel with the impeller;

heating the mixture in said vessel and melting the glass batch to form a foam material by application of electrical energy between the two points in the vessel;

densifying the foam material by passing the foam material into a quiescent zone where the foam material is separated into a densified portion and a gaseous portion; and

recovering the densified portion.

16. The waste vitrification method of claim 15 wherein said steps of mixing and heating the foam material are performed simultaneously in the vessel.

17. The method of claim 15 wherein residual heat is maintained through the densifying step to keep the densified material in a pourable state until after the recovering step.

18. A waste vitrification apparatus for vitrifying feed stream having vitrifiable materials and waste materials comprising:

a vessel at least partially formed of an electrically conductive material containing a glass melt and defining a mixing zone;

a mixing impeller at least partially formed of an electrically conductive material;

a drive shaft extending into said mixing zone of said vessel, said impeller being connected to said drive shaft;

means for rotating the drive shaft and said impeller in said mixing zone to disperse the constituents of the feed stream into the glass melt;

means for creating current flow between the vessel and said impeller sufficient to heat the waste feed stream until the vitrifiable material melts to a liquid state forming a solidifiable output including the waste material and the melted vitrifiable material;

an opening in the vessel, said solidifiable output being ported through the opening into a container for cooling and solidification.

19. In the apparatus of claim 18, a settling zone being provided in said vessel below said mixing zone, said opening being in direct fluid flow communication with the settling zone.

20. In the apparatus of claim 18, means for adjusting the location of the mixing impeller relative to the vessel to change the size of the settling zone and thereby modify the density of the solidifiable output.

21. In the apparatus of claim 18 wherein said electrically conductive material is a lining covering the inside of the vessel.

22. In the apparatus of claim 18 wherein said impeller and drive shaft are formed of metal.

23. In the apparatus of claim 18 wherein said feed stream is an aqueous slurry comprising glass batch and waste materials.

24. In the apparatus of claim 23 wherein said feed stream comprises approximately 60 percent water and 40 percent solids by weight.

25. In the apparatus of claim 18 wherein said feed stream comprises a first feed stream of waste materials and a second feed stream of glass batch.

26. In the apparatus of claim 18 wherein said impeller is rotatable at its outer perimeter at a speed of more than 250 feet per minute.

27. In the apparatus of claim 18 wherein said impeller is rotatable at its outer perimeter at a speed of more than 500 feet per minute.

AMENDED CLAIMS

[received by the International Bureau on 3 October 1991 (03.10.91) original claims 1,2,6,10,12 and 15 amended; new claim 28 added; other claims unchanged (6 pages)]

1. A waste vitrification method performed at least in part in a vessel having a wall and a rotatable impeller comprising the steps of:

introducing a feed stream comprising waste material into the vessel;

mixing the feed stream into a glass melt formed in the vessel with the impeller to disburse said feed stream in the melt to form a foamy mass;

said foamy mass comprising gaseous material released by the waste material into the glass melt;

completing an electrical circuit between the wall of the vessel and the impeller and including said foamy mass to form a molten vitrified output; and

recovering the molten vitrified output.

2. The waste vitrification method of claim 1 wherein said feed stream further comprises glass batch in solid form.

3. The waste vitrification method of claim 1 wherein said feed stream is an aqueous mixture.

4. The waste vitrification method of claim 3 wherein said feed stream is approximately 60 percent water and 40 percent solids by weight.

5. The waste vitrification method of claim 4 wherein said solids include frit.

6. The waste vitrification method of claim 2 wherein said feed stream comprises a first feed stream of waste materials and a second feed stream of glass batch.

7. The waste vitrification method of claim 1 wherein said step of mixing is performed by an impeller having outer surface portion moving at a speed of more than 250 feet per minute.

8. The waste vitrification method of claim 1 wherein said step of mixing is performed by an impeller having outer surface portion moving at a speed of more than 500 feet per minute.

9. The waste vitrification method of claim 1 wherein said steps of mixing and heating the foamed material are performed simultaneously in the vessel.

10. The method of claim 1, further comprising the step of densifying the foam material by passing the foam material into a quiescent zone where a portion of the gaseous material in the foamy mass separates from the foamy mass to form the molten vitrifiable output.

11. The method of claim 10 wherein said heating continues through the densifying step to maintain the molten vitrified output in a pourable state until after the recovering step.

12. The method of claim 10, further comprising the step of cooling the molten vitrified output to form a solidified vitreous mass.

13. The method of claim 1 wherein said feed stream includes radioactive material.

14. The method of claim 2 wherein said glass batch material is boro-silicate glass.

15. A continuous waste vitrification method performed at least in part in a vessel having a wall and a rotatable impeller comprising the steps of:

introducing a mixture of solid waste material and glass batch into the vessel;

mixing the mixture in the vessel with the impeller to form a foamy mass comprising gaseous material released by the waste material into the glass melt;

completing an electrical circuit from the wall of the vessel through said foamy mass to said impeller to provide heat which forms a molten vitrified output;

densifying the foam material by passing the foamy mass into a quiescent zone where the foamy mass separates into a densified portion and a gaseous portion; and

recovering the densified portion.

16. The waste vitrification method of claim 15 wherein said steps of mixing and heating the foam material are performed simultaneously in the vessel.

17. The method of claim 15 wherein residual heat is maintained through the densifying step to keep the densified material in a pourable state until after the recovering step.

18. A waste vitrification apparatus for vitrifying feed stream having vitrifiable materials and waste materials comprising:

a vessel at least partially formed of an electrically conductive material containing a glass melt and defining a mixing zone;

a mixing impeller at least partially formed of an electrically conductive material;

a drive shaft extending into said mixing zone of said vessel, said impeller being connected to said drive shaft;

means for rotating the drive shaft and said impeller in said mixing zone to disperse the constituents of the feed stream into the glass melt;

means for creating current flow between the vessel and said impeller sufficient to heat the waste feed stream until the vitrifiable material melts to a liquid state forming a solidifiable output including the waste material and the melted vitrifiable material;

an opening in the vessel, said solidifiable output being ported through the opening into a container for cooling and solidification.

19. In the apparatus of claim 18, a settling zone being provided in said vessel below said mixing zone, said opening being in direct fluid flow communication with the settling zone.

20. In the apparatus of claim 18, means for adjusting the location of the mixing impeller relative to the vessel to change the size of the settling zone and thereby modify the density of the solidifiable output.

21. In the apparatus of claim 18 wherein said electrically conductive material is a lining covering the inside of the vessel.

22. In the apparatus of claim 18 wherein said impeller and drive shaft are formed of metal.

23. In the apparatus of claim 18 wherein said feed stream is an aqueous slurry comprising glass batch and waste materials.

24. In the apparatus of claim 23 wherein said feed stream comprises approximately 60 percent water and 40 percent solids by weight.

25. In the apparatus of claim 18 wherein said feed stream comprises a first feed stream of waste materials and a second feed stream of glass batch.

26. In the apparatus of claim 18 wherein said impeller is rotatable at its outer perimeter at a speed of more than 250 feet per minute.

27. In the apparatus of claim 18 wherein said impeller is rotatable at its outer perimeter at a speed of more than 500 feet per minute.

28. A waste vitrification method performed at least in part in the vessel having a wall and a rotatable impeller comprising the steps of:

introducing a mixture of solid waste material and glass batch material into the vessel;

mixing the mixture in the vessel with the impeller to form a foamy mass comprising solid waste

material, glass batch material and gaseous material released by said solid waste material and glass batch material;

completing and electrical series circuit relationship including the wall of the vessel, the foamy mass and the impeller;

densifying the foam material by passing the foam material into a quiescent zone where the foam material separates into a densified portion and a gaseous portion; and

recovering the densified portion.

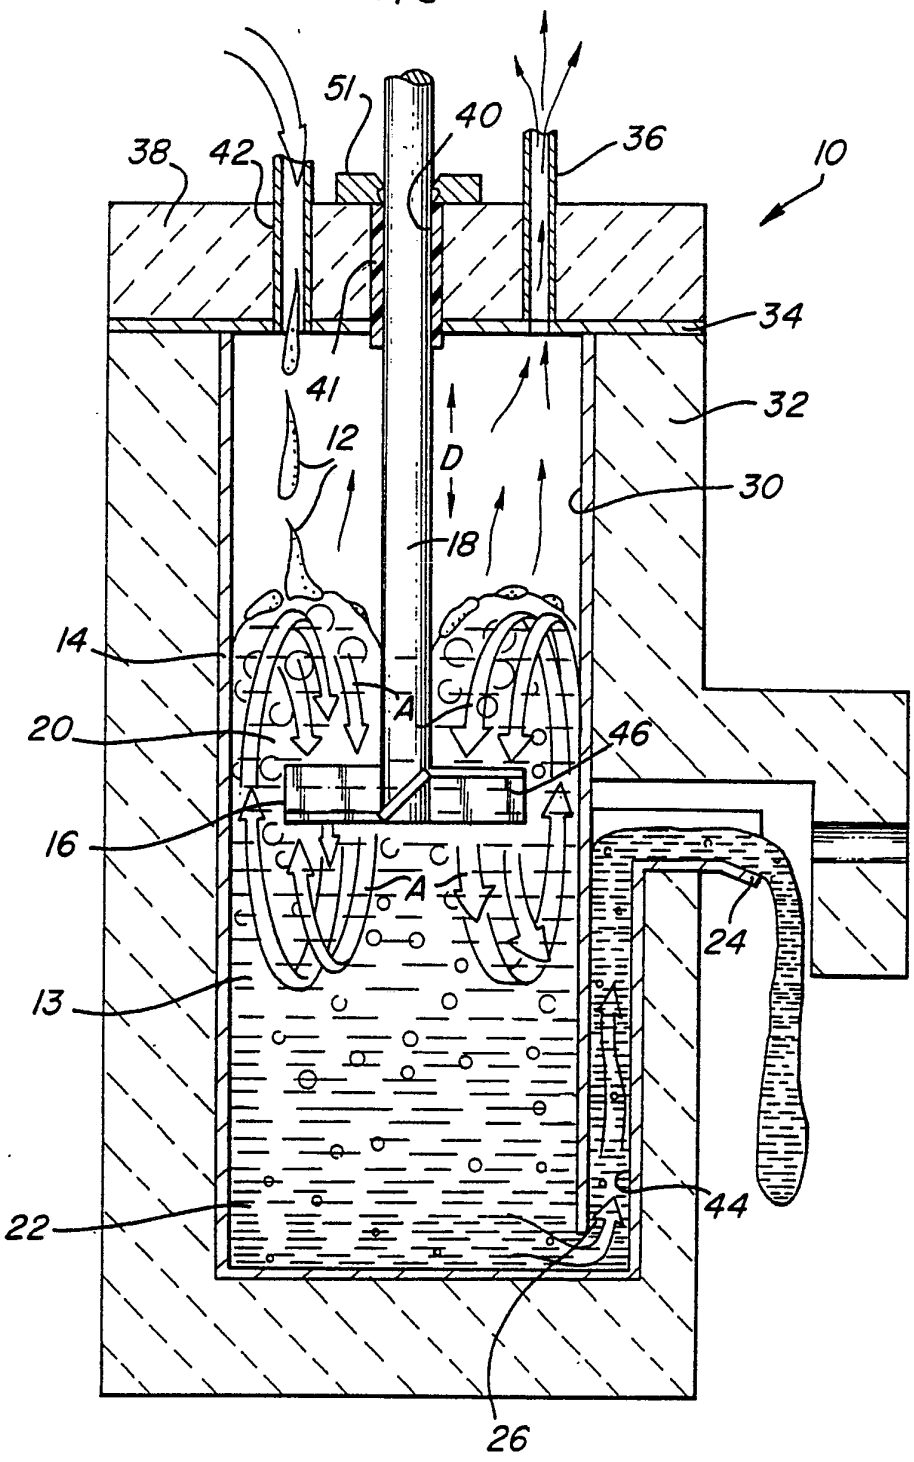


Fig-1

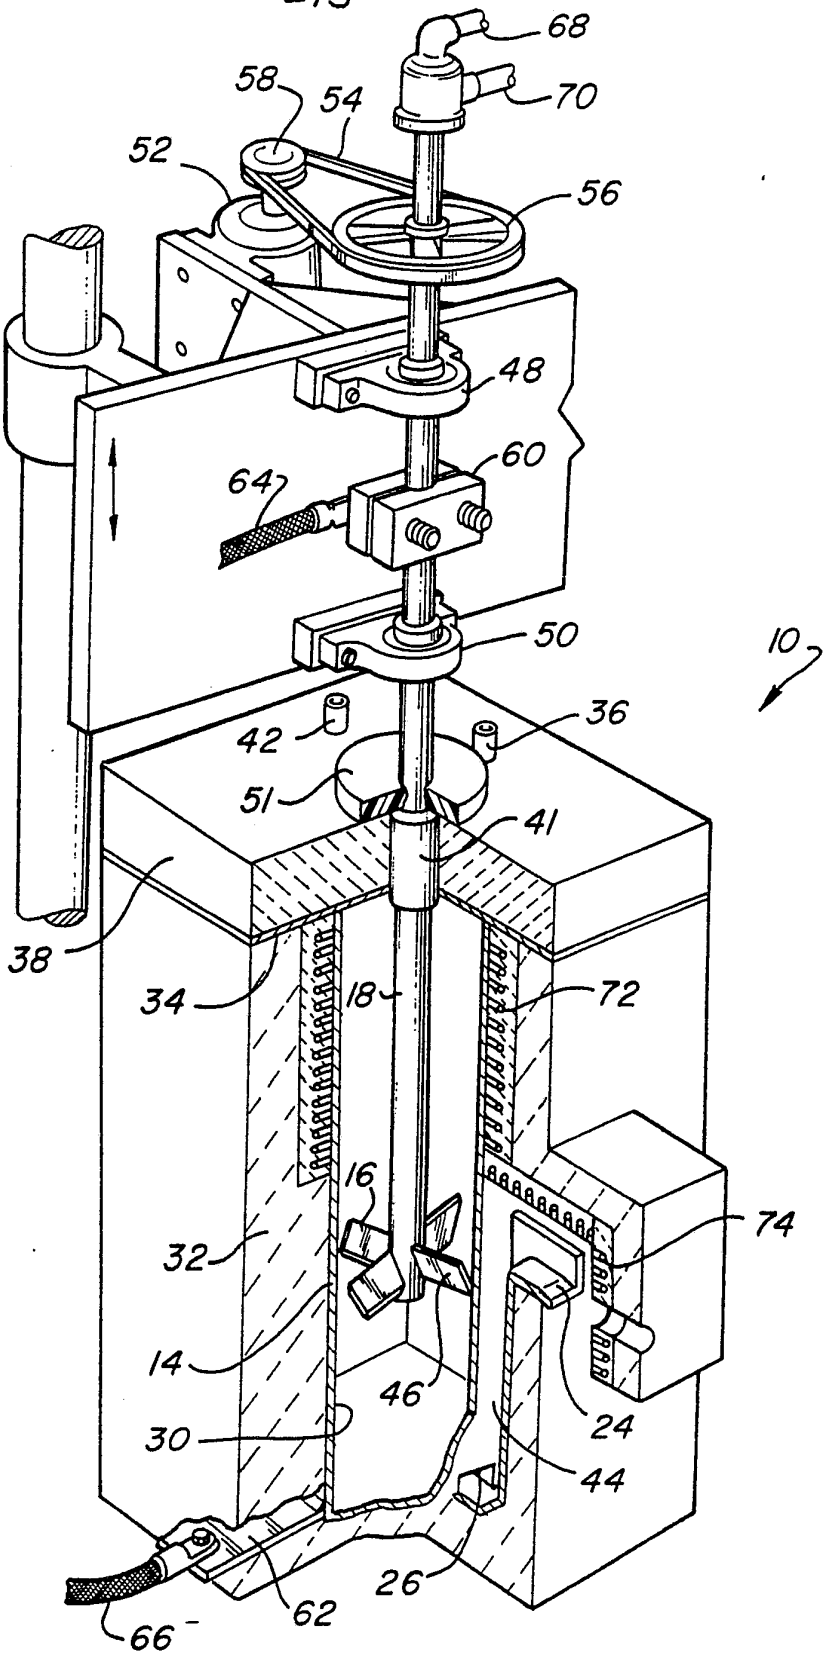

68
70
58
54
52
56
48
60
64
50
10
42
36
51
41
38
34
18
72
16
74
32
14
46
24
30
44
26
62
66

Fig-2

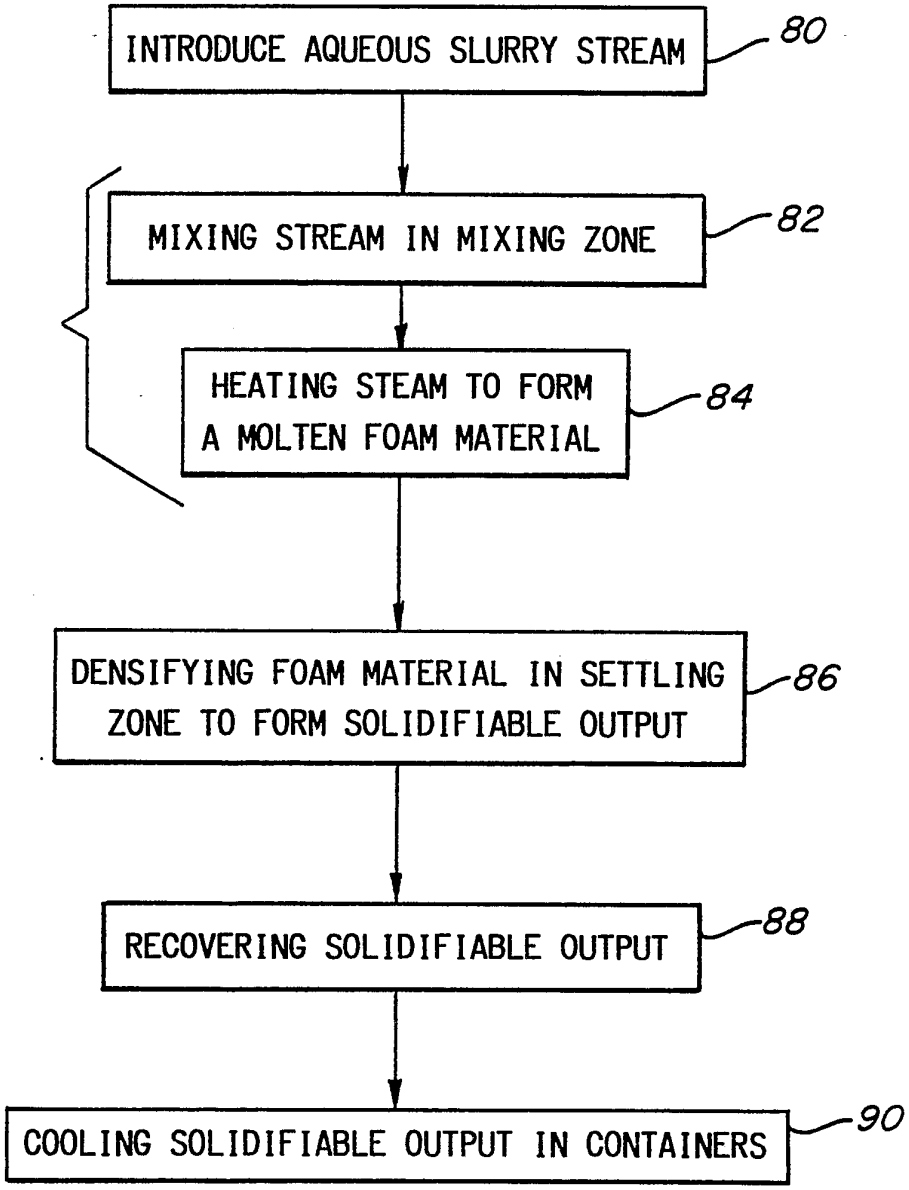

INTRODUCE AQUEOUS SLURRY STREAM
80
MIXING STREAM IN MIXING ZONE
82
HEATING STEAM TO FORM A MOLTEN FOAM MATERIAL
84
DENSIFYING FOAM MATERIAL IN SETTLING ZONE TO FORM SOLIDIFIABLE OUTPUT
86
RECOVERING SOLIDIFIABLE OUTPUT
88
COOLING SOLIDIFIABLE OUTPUT IN CONTAINERS
90

Fig-3

INTERNATIONAL SEARCH REPORT

International Application No. PCT/US91/02637

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) [6]

According to International Patent Classification (IPC) or to both National Classification and IPC

IPC G21f 9/16, C03B 5/027

U.S. Cl. 252/628 373/29

II. FIELDS SEARCHED

Minimum Documentation Searched [7]

Classification System	Classification Symbols
U.S. Cl.	252/628, 629, 373/39,30,36

Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched [8]

III. DOCUMENTS CONSIDERED TO BE RELEVANT [9]

Category *	Citation of Document, [11] with indication, where appropriate, of the relevant passages [12]	Relevant to Claim No. [13]
A	US, 3,754,886 Richards et al 28 August 1973.	1-27
A	US, 3,819,350 Pellett et al 25 June 1974.	1-27
Y	US, 3,850,606 Rough 26 November 1974.	1-27
Y	US, 3,988,138 Rough 26 October 1976.	1-27
Y	US, 4,139,360 Piper 13 February 1979.	1-17
A	US, 4,424,149 Bege et al 03 January 1984.	1-17
A	US, 4,366,571 Palmquist 28 December 1982.	18-27
A	US, 4,528,011 Macedo et al 09 July 1985.	1-17
Y	US, 4,627,069 Haryey et al 02 December 1986.	1-27
A	US, 4,725,383 Hayashi et al 16 February 1988.	1-17
A	US, 4,782,497 sASAKI et al 01 November 1988	18-27
A	US, 4,797,232 Aubert et al 10 January 1988	1-17
Y	US, 4,895,678 Ohtsuka et al 23 January 1990	1-27

* Special categories of cited documents: [10]

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

IV. CERTIFICATION

Date of the Actual Completion of the International Search

28 JUNE 1991

Date of Mailing of this International Search Report

30 JUL 1991

International Searching Authority

ISA/US

Signature of Authorized Officer

N. Mai

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)

Category *	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No
Y	Ceramie poulentin, Vol. 67, No.11, 1988 RICHARDS,RAYS, " RAPRID MEETING AND REFINING SYSTIME, PAGE 1806-1809.	18-27
T	ACS DALLAS, PAPER 3: JXIV-90, APRIL 23, 1990, RICHARDS RAY S. ET LA., " SMALL HIGH-SPEED GLASS MELTER FOR WATER VITRIFICATION",	18-27
A	PROCEEDING OF THE 1987 INTERNAITONAL WASTE MANAGEMENT CONFERENCE, ASME, " MELTERS AND FURNACE EQUIPMENT USED FOR READINATIVE WANTE CONDITIONG" PAGES 259-263.	18-27