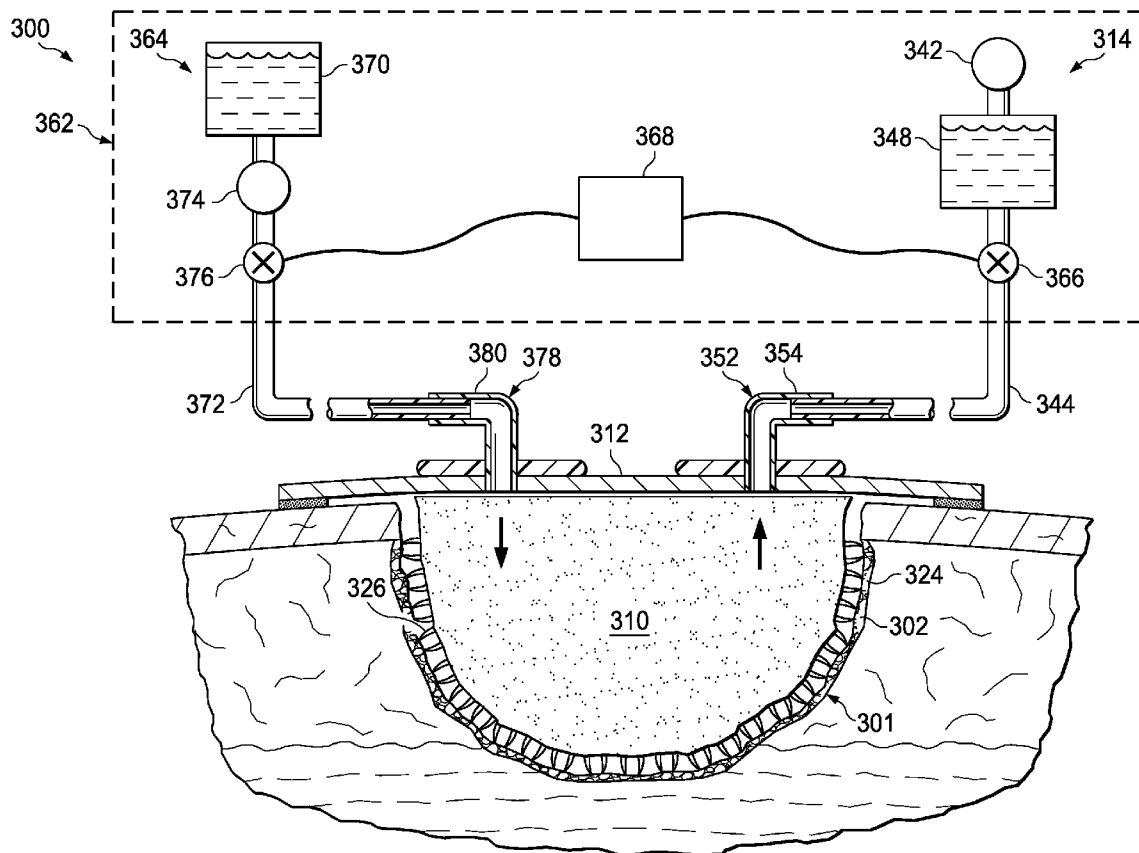


(43) **Pub. Date:** **Aug. 30, 2012**



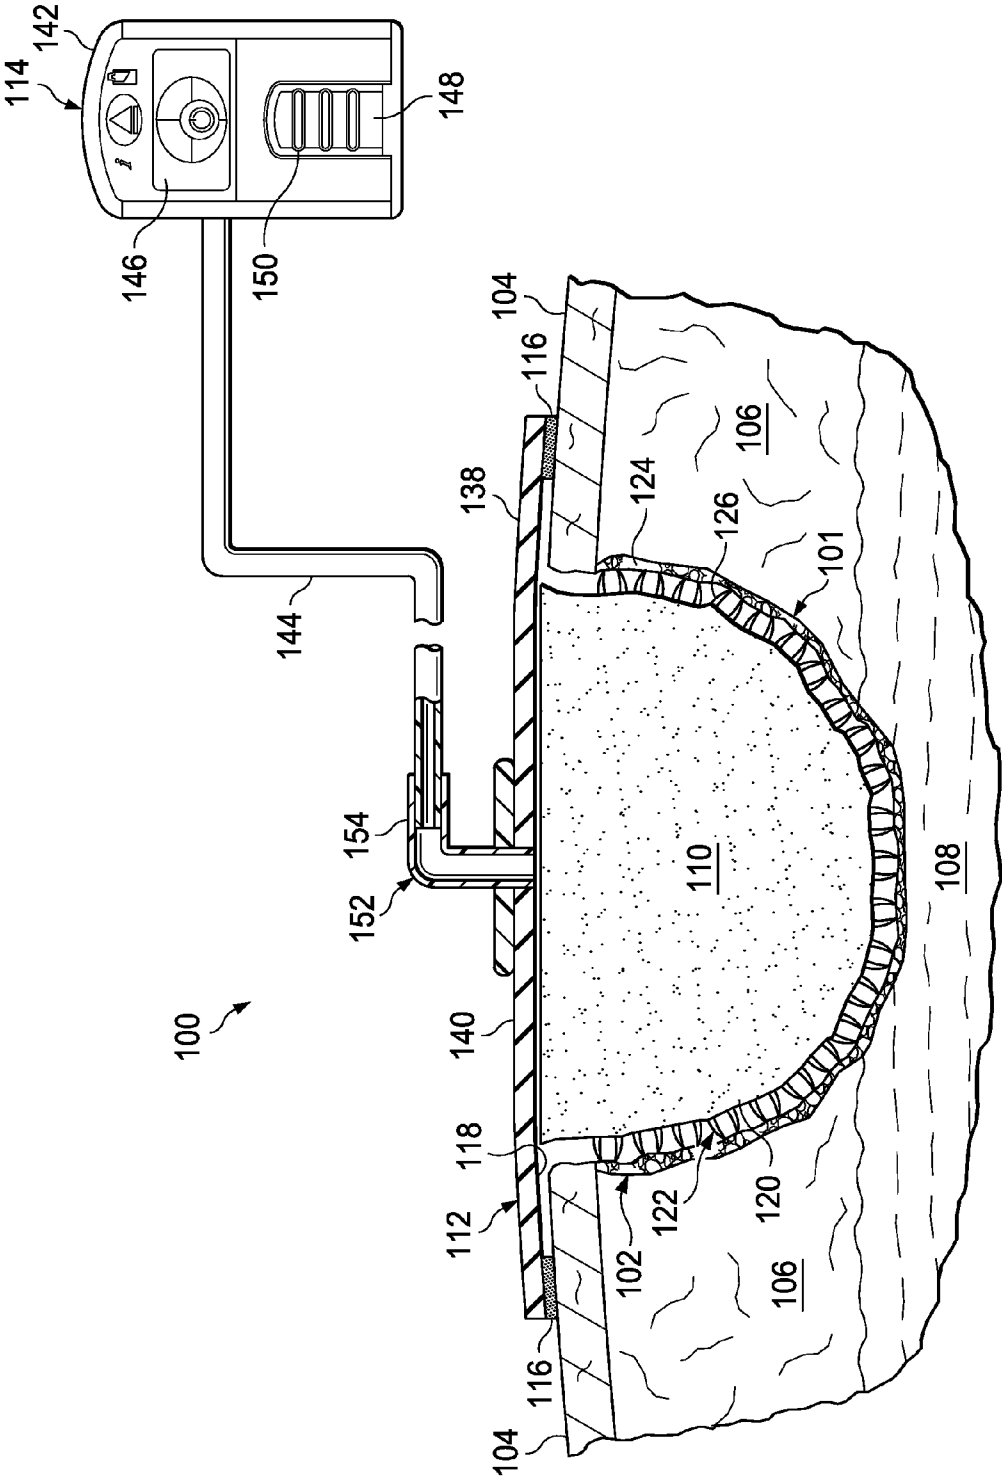


FIG. 1

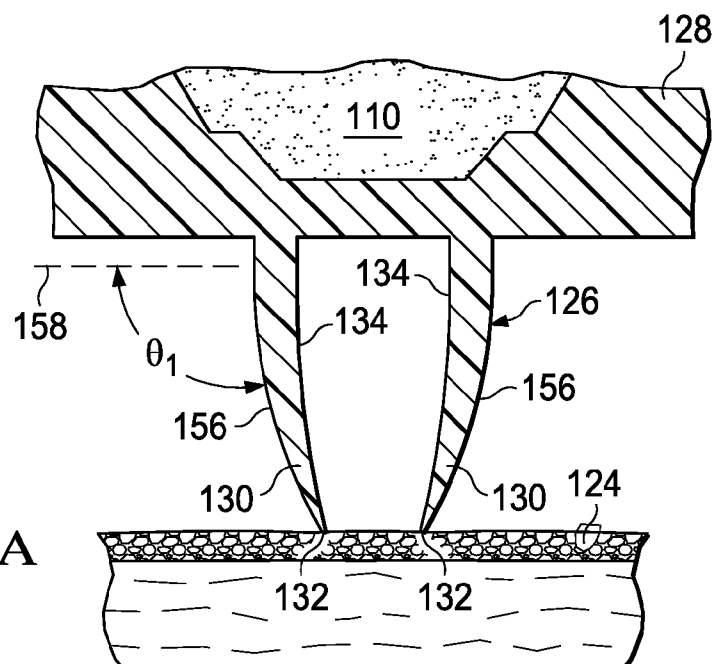


FIG. 2A

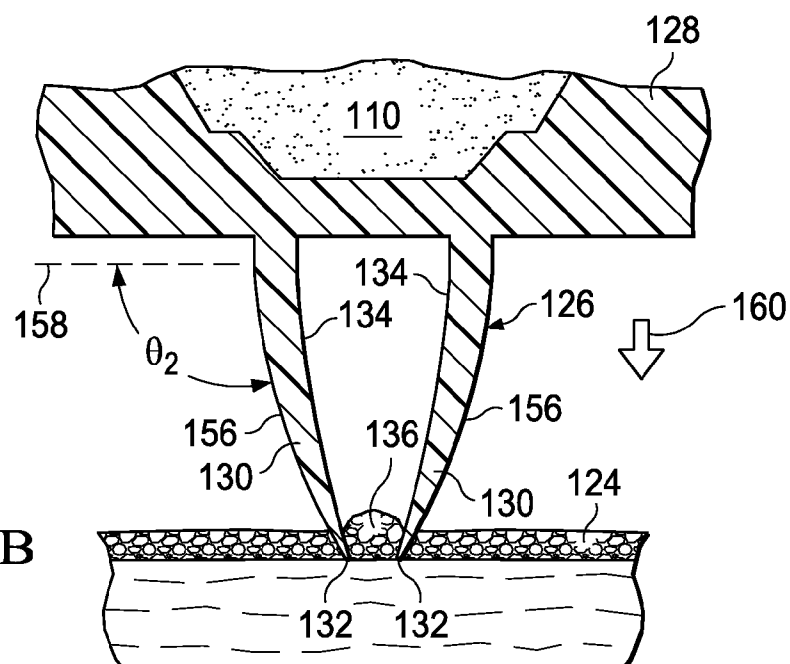
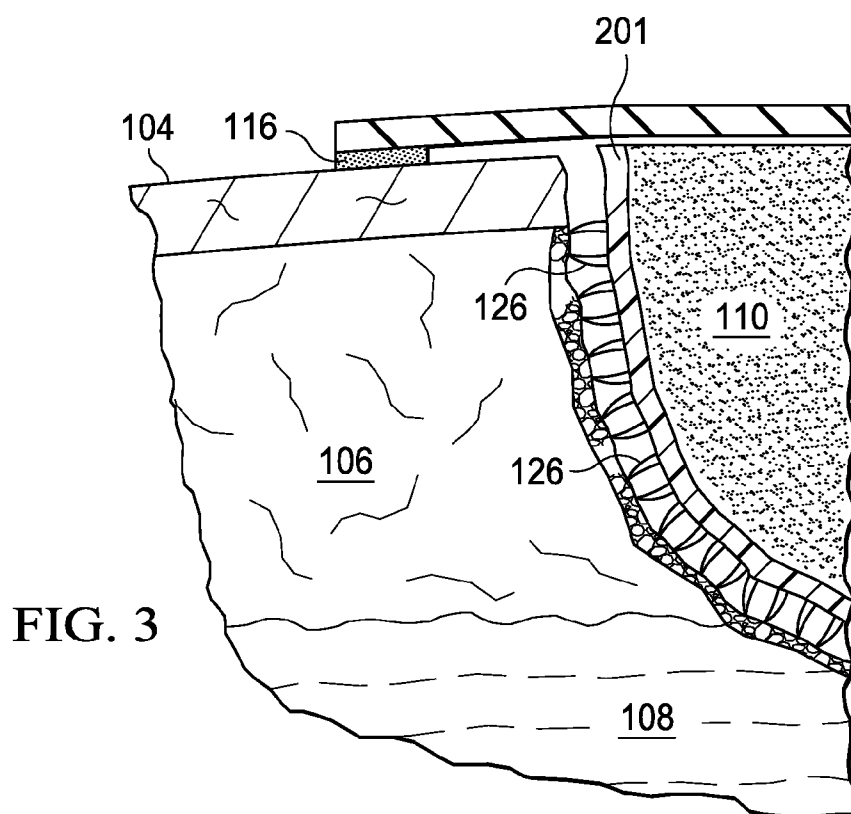
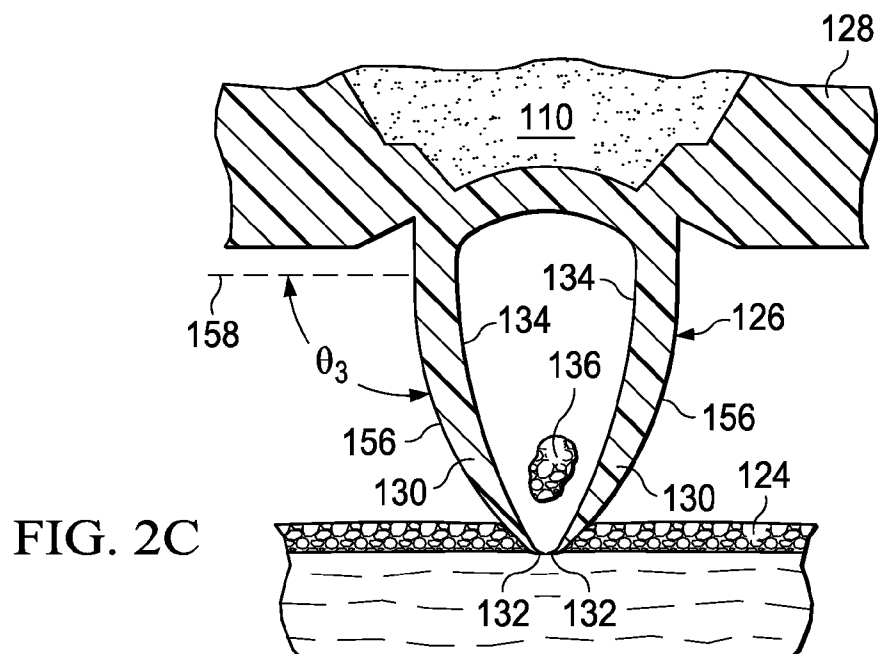
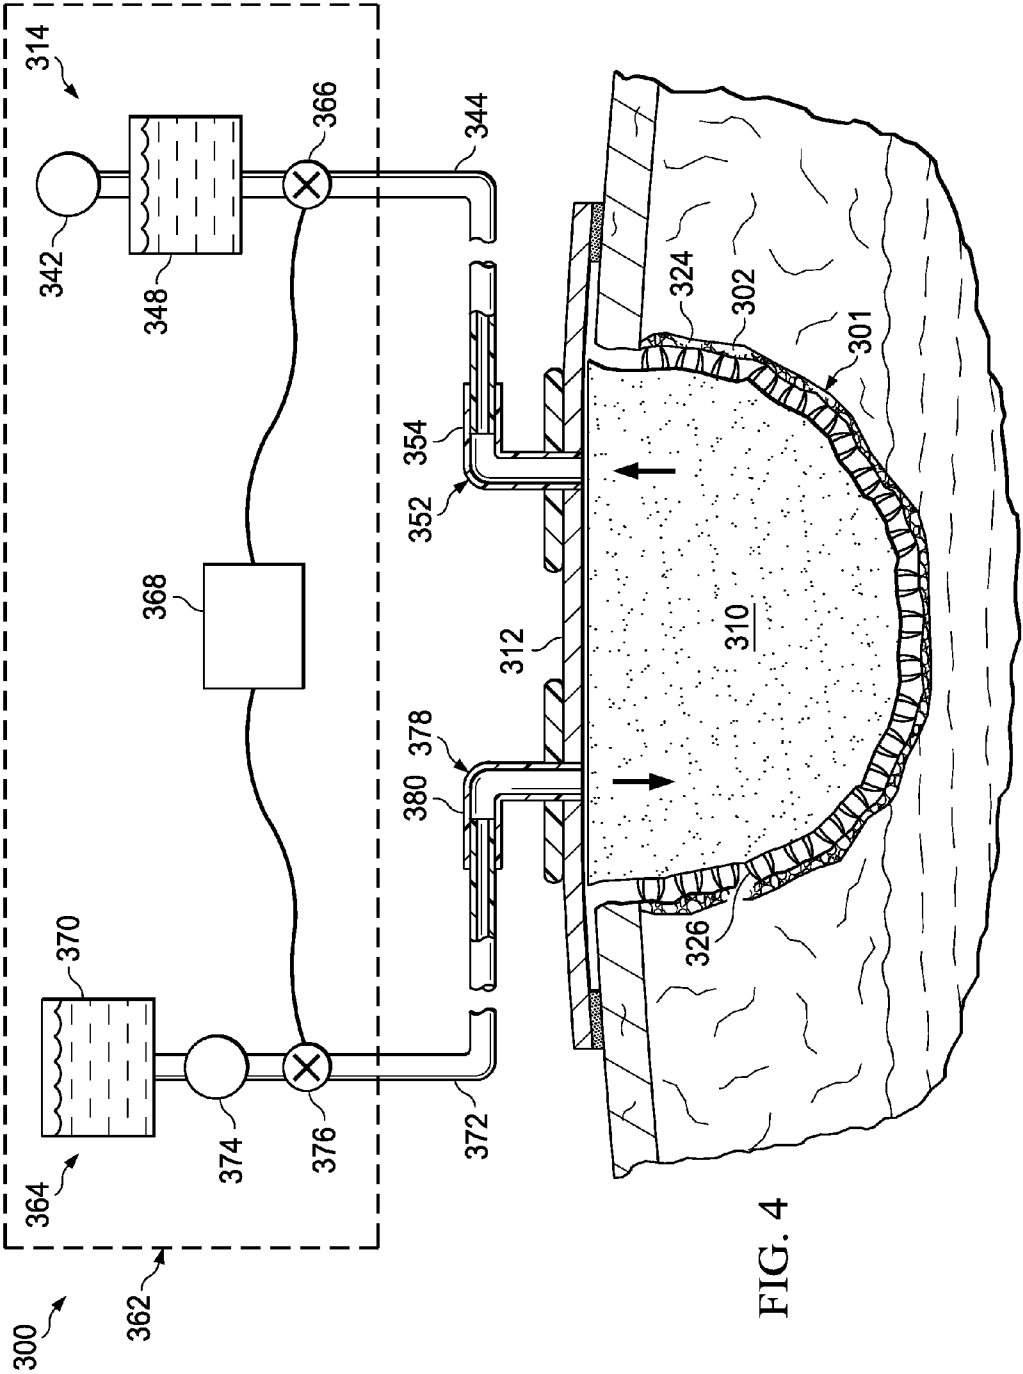


FIG. 2B





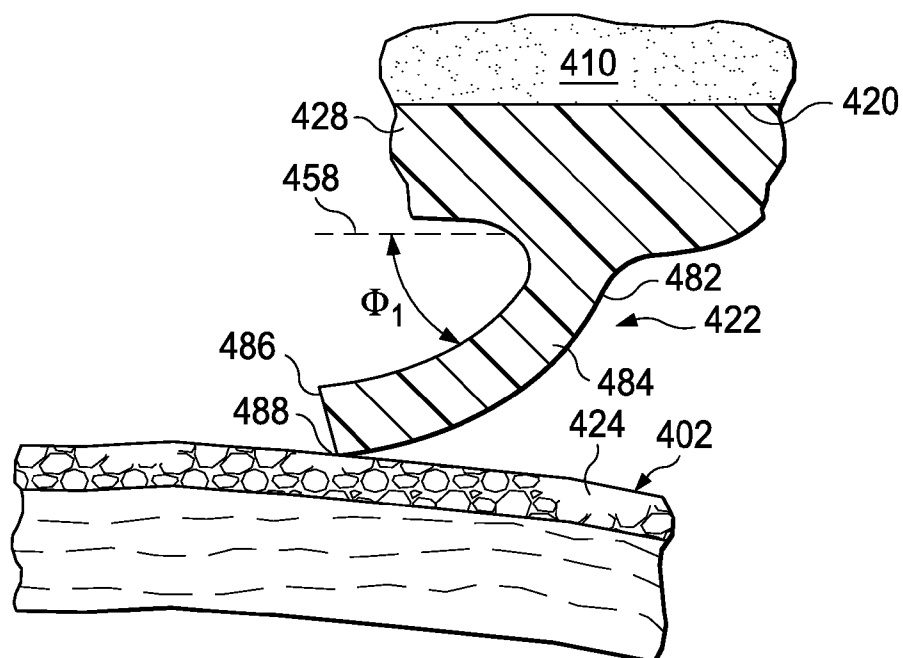


FIG. 5A

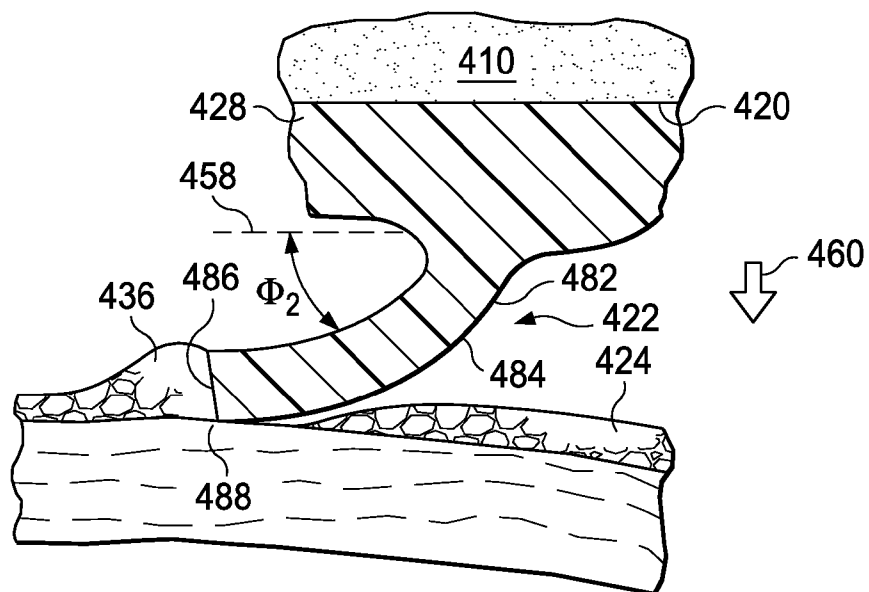


FIG. 5B

REDUCED-PRESSURE TREATMENT SYSTEMS AND METHODS EMPLOYING DEBRIDEMENT MECHANISMS

RELATED APPLICATIONS

[0001] The present application is a continuation of U.S. patent application Ser. No. 12/639,351, entitled “Reduced-Pressure Treatment Systems and Methods Employing Debridement Mechanisms,” filed on 16 Dec. 2009, which is incorporated herein by reference for all purposes, and which claims the benefit, under 35 U.S.C. §119(e), of the filing of U.S. Provisional Patent Application Ser. No. 61/140,654, entitled “Reduced-Pressure Treatment Systems and Methods Employing Debridement Mechanisms,” filed 24 Dec. 2008, which is incorporated herein by reference for all purposes.

BACKGROUND

[0002] Wounds frequently require debridement, or removal of undesirable tissue, to promote healing. Most debridement techniques suffer from a lack of specificity to the undesirable tissue. Therefore, healthy tissue may be removed along with the undesirable tissue, which frequently leads to longer healing times as well as discomfort and pain to the patient.

[0003] Maggot debridement therapy has long been noted for its ability to debride a wound such that undesirable tissue, such as necrotic tissue, is generally removed from the wound while leaving healthy tissue in tact. While maggot therapy may be useful for debriding a wound, it is a costly and time consuming procedure. Additionally, maggot therapy is labor intensive and is frequently objectionable to both health care providers and patients alike. Other shortcomings exist as well.

SUMMARY

[0004] Shortcomings with wound care systems and methods are addressed by the illustrative, non-limiting embodiments herein. According to one illustrative, non-limiting embodiment, a reduced-pressure treatment system for treating a tissue site on a patient includes a manifold member for distributing reduced pressure to the tissue site, a support member for disposing proximate the tissue site and the manifold, and a debridement mechanism coupled to the support member. The debridement mechanism is for debriding the tissue site. The system further includes a sealing drape for placing over the tissue site and manifold member. The sealing drape is operable to form a fluid seal over the tissue site and manifold member. The system also includes a reduced-pressure subsystem for delivering a reduced pressure to the sealing drape. The system may further include a chemical-debridement subsystem.

[0005] A manifold member for treating a tissue site on a patient includes a manifold material for distributing reduced pressure, a support member associated with the manifold material, and a debridement mechanism for debriding the tissue site. The debridement mechanism is coupled to the support member.

[0006] A method for treating a tissue site on a patient includes placing a manifold member proximate the tissue site. The manifold member includes a debridement mechanism for debriding the tissue site. The method further includes disposing a sealing drape over the manifold member and the patient's epidermis, forming a fluid seal between the sealing drape and the patient's epidermis, and providing a reduced

pressure to the manifold member. When reduced pressure is applied, the debridement mechanism debrides the tissue site.

[0007] A method of manufacturing a manifold member for treating a tissue site on a patient includes forming a manifold member for placing over a tissue site. The manifold member includes a support member. The method further includes coupling a debridement mechanism to the support member. The debridement mechanism is configured to debride a tissue site under the influence of reduced pressure.

[0008] Other features and advantages of the illustrative, non-limiting embodiments will become apparent with reference to the drawings and detailed description that follow.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] A more complete understanding may be obtained by reference to the following Detailed Description when taken in conjunction with the accompanying Drawings, wherein like numerals indicate like elements throughout, and wherein:

[0010] FIG. 1 is a schematic, diagram with a portion shown in cross section of an illustrative, non-limiting embodiment of a reduced-pressure treatment system employing a debridement mechanism;

[0011] FIG. 2A is a schematic, cross-sectional view of a pincer, which is shown in an open position, from the reduced-pressure treatment system of FIG. 1;

[0012] FIG. 2B is a schematic, cross-sectional view of the pincer of FIG. 2A shown after initiation of reduced pressure;

[0013] FIG. 2C is a schematic, cross-sectional view of the pincer of FIG. 2A shown in a closed position;

[0014] FIG. 3 is a schematic, cross-sectional view of an alternative embodiment of a portion of a reduced-pressure treatment system employing a debridement mechanism;

[0015] FIG. 4 is a schematic diagram with a portion shown in cross section of another illustrative, non-limiting embodiment of a reduced-pressure treatment system employing a debridement mechanism;

[0016] FIG. 5A is a schematic, cross-sectional view of an illustrative, non-limiting embodiment of a debridement implement, which is shown in a first position, for use as part of a reduced-pressure treatment system employing a debridement mechanism; and

[0017] FIG. 5B is a schematic, cross-sectional view of the debridement implement of FIG. 5A shown in a second position.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

[0018] In the following detailed description of the illustrative, non-limiting embodiments, reference is made to the accompanying drawings that form a part hereof. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention, and it is understood that other embodiments may be utilized and that logical structural, mechanical, electrical, and chemical changes may be made without departing from the spirit or scope of the invention. To avoid detail not necessary to enable those skilled in the art to practice the embodiments described herein, the description may omit certain information known to those skilled in the art. The following detailed description is, therefore, not to be taken in a limiting sense, and the scope of the illustrative, non-limiting embodiments are defined only by the appended claims.

[0019] Referring now primarily to FIG. 1-2C, a reduced-pressure treatment system **100** for treating a tissue site **101**, e.g., a wound **102**, is presented. The wound **102** may include, without limitation, any irregularity with a tissue, such as an open wound, surgical incision, or diseased tissue. The reduced-pressure treatment system **100** is presented in the context of a general tissue site **101** that includes the wound **102**, which is through the epidermis **104**, or generally skin, and the dermis **106** and reaching into a hypodermis, or subcutaneous tissue **108**. The reduced-pressure treatment system **100** may be used to treat a wound of any depth, as well as many different types of wounds including open wounds or other tissue sites. The tissue site **101** may be the bodily tissue of any human, animal, or other organism, including bone tissue, adipose tissue, muscle tissue, dermal tissue, vascular tissue, connective tissue, cartilage, tendons, ligaments, or any other tissue. Unless otherwise indicated, as used herein, “or” does not require mutual exclusivity. The wound **102** may include a layer of necrotic tissue **124**. In at least some instances, it may be desirable to remove the necrotic tissue **124** in order to promote healing of the wound **102**. While the illustrative, non-limiting embodiment shows the reduced-pressure treatment system **100** in the context of the wound **102** having a layer of necrotic tissue **124** therein, it will be appreciated that the reduced-pressure treatment system **100** may be used with any tissue site having undesirable tissue, such as, eschar, necrotic, damaged, infected, contaminated, or adherent tissue, or foreign material therein.

[0020] The reduced-pressure treatment system **100** includes a manifold member **110**, a sealing drape **112**, and a reduced-pressure subsystem **114**. The reduced-pressure treatment system **100** may also include an attachment device **116**. The manifold member **110** is positionable between a tissue-facing surface **118** of the sealing drape **112** and the tissue site **101**.

[0021] The term “manifold” as used herein generally refers to a substance or structure that is provided to assist in applying reduced pressure to, delivering fluids to, or removing fluids from a tissue site, e.g., the wound **102**. The manifold member **110** typically includes a plurality of flow channels or pathways that are interconnected to improve distribution of fluids provided to and removed from around the manifold member **110**. The manifold member **110** may be a biocompatible material that is capable of being placed in contact with tissue site, e.g., wound **102**, and distributing reduced pressure to the tissue site **101**. Examples of manifold members **110** may include, for example, without limitation, devices that have structural elements arranged to form flow channels, such as, for example, cellular foam, open-cell foam, porous tissue collections, liquids, gels, and foams that include, or cure to include, flow channels. The manifold member **110** may be porous and may be made from foam, gauze, felted mat, etc. The manifold member **110** may be formed from a porous material, e.g., a foam, or from a material that is made porous, e.g., a solid member in which apertures have been applied. In one illustrative, non-limiting embodiment, the manifold member **110** is a porous foam and includes a plurality of interconnected cells or pores that act as flow channels. The porous foam may be a polyurethane, open-cell, reticulated foam such as GranuFoam® material manufactured by Kinetic Concepts, Incorporated of San Antonio, Tex. Other embodiments might include “closed cells.” In some situations, the manifold member **110** may also be used to distribute fluids such as medications, antibacterials, growth factors, and vari-

ous solutions to the tissue site. Other layers may be included in or on the manifold member **110**, such as absorptive materials, wicking materials, hydrophobic materials, and hydrophilic materials.

[0022] A tissue-facing surface **120** of the manifold member **110** includes one or more debridement mechanisms **122** for debriding the tissue site **101**, e.g., the wound **102**. As used herein, the terms “debride,” “debriding,” and “debridement,” relate to the act of removing or the removal of undesirable tissue, such as, eschar, necrotic, damaged, infected, contaminated, or adherent tissue, or foreign material from a tissue site. In the illustrative, non-limiting embodiment, each debridement mechanism **122** is operable to remove necrotic tissue **124** from the wound **102**. However, it will be appreciated that each debridement mechanism **122** may be operable to remove any suitable type of undesirable tissue or foreign material from any suitable tissue site. In one embodiment, the debridement mechanism **122** is configured to allow the manifold member **110** to induce microstrain at the tissue site **101**, e.g., within the wound **102**. In another embodiment, the debridement mechanism **122** and the manifold member **110** are both operable to induce microstrain at the tissue site **101**, e.g., within the wound **102**.

[0023] The debridement mechanism **122** may be coupled to the manifold member **110**. As used herein, the term “coupled” includes coupling via a separate object and includes direct coupling. The term “coupled” also encompasses two or more components that are continuous with one another by virtue of each of the components being formed from the same piece of material. Also, the term “coupled” may include chemical, mechanical, thermal, or electrical coupling. Fluidly coupling means that fluid is in communication between the designated parts or locations. Alternatively, the debridement mechanism **122** may be associated proximate manifold member **110** without coupling.

[0024] In the illustrative, non-limiting embodiment, and as clearly shown in FIGS. 2A-2C, each debridement mechanism **122** may be a pincer **126**. In one embodiment, a plurality of pincers **126** are arranged in an array over the tissue-facing surface **120** of the manifold member **110**. However, it will be appreciated that any number of pincers **126** may be employed. The pincers **126** may be arranged in a pattern or randomly.

[0025] Each pincer **126** is typically a molded component of the manifold member **110**, but it will be appreciated that each pincer **126** may be a separate component that is otherwise associated or coupled to the manifold member **110**. In an alternative embodiment, as shown in FIG. 3, each pincer **126** may be a molded component of, or otherwise coupled to, a secondary manifold **201** that may be coupled to or associated with the manifold member **110**. The secondary manifold **201** may be similar in structure to the manifold member **110**, or may otherwise include one or more apertures (not shown) between or adjacent to one or more pincer blades **130** so that the secondary manifold **201** does not interfere with the previously described function of the manifold member **110**. In still another illustrative, non-limiting embodiment, the debridement mechanism includes a first jaw member coupled to the support member **128**; a second jaw member coupled to the support member **128** and spaced from the first jaw member; and wherein the first jaw member and second jaw member are operable to move from a first, open position to a second, biting position under the influence of reduced pressure.

[0026] Referring again primarily to FIGS. 2A-2C, each pincer 126 includes a support member 128 coupled to the manifold member 110. A pair of pincer blades 130 extends from the support member 128. While the illustrative, non-limiting embodiment shows each pincer blade 130 as extending substantially normal from the support member 128, it will be appreciated that each pincer blade 130 may extend from the support member 128 at any suitable angle. Each pincer blade 130 is shaped so that the pincer blade 130 tapers to a point 132; however, it will be appreciated that each pincer blade 130 may have any suitable shape. Furthermore, while the illustrative, non-limiting embodiment shows the pincer 126 as having a pair of pincer blades 130, it will be appreciated that the pincer 126 may have any suitable number of pincer blades 130. As will be discussed further below, the pincer 126 is configured such that, under the influence of reduced pressure, the pincer 126 will move from an open position (FIG. 2A) to a closed position whereby a portion 136 of necrotic tissue 124 is removed from the wound 102 (FIG. 2C). In moving from the open position to the closed position, the pincer 126 digs into, or scrapes, a portion 136 of the necrotic tissue 124 from the wound 102 (See FIG. 2B). In another embodiment, after the pincers 126 have moved to a closed position and under the continued influence of reduced pressure, the pincer blades 130 may move from a closed position to a collapsed position whereby the inner surface 134 of each pincer blade 130 confronts or approaches the tissue-facing surface 120 of the manifold member 110.

[0027] Referring again primarily to FIG. 1, the sealing drape 112 includes a first surface 140 and the tissue-facing surface 118. The sealing drape 112 may be sized so that the sealing drape 112 overlaps the wound 102 in such a manner that a drape extension 138 extends beyond the periphery of the wound 102. The sealing drape 112 may be any material that provides a fluid seal. "Fluid seal," or "seal," means a seal adequate to maintain reduced pressure at a desired site given the particular reduced-pressure source or subsystem involved. The sealing drape 112 may, for example, be an impermeable or semi-permeable, elastomeric material that has pore sizes less than about 20 microns. "Elastomeric" means having the properties of an elastomer. It generally refers to a polymeric material that has rubber-like properties. More specifically, most elastomers have ultimate elongations greater than 100% and a significant amount of resilience. The resilience of a material refers to the material's ability to recover from an elastic deformation. Examples of elastomers may include, but are not limited to, natural rubbers, polyisoprene, styrene butadiene rubber, chloroprene rubber, polybutadiene, nitrile rubber, butyl rubber, ethylene propylene rubber, ethylene propylene diene monomer, chlorosulfonated polyethylene, polysulfide rubber, polyurethane, EVA film, co-polyester, and silicones. Additional, specific examples of sealing member materials include a silicone drape, 3M Tegaderm® drape, acrylic drape such as one available from Avery Dennison, or an incise drape.

[0028] An attachment device 116 may be used to hold the sealing drape 112 against the patient's epidermis 104 or another layer, such as a gasket or additional sealing member. The attachment device 116 may take numerous forms. For example, the attachment device 116 may be a medically-acceptable, pressure-sensitive adhesive that extends about one or more drape extensions 138 of the sealing drape 112. Alternatively, the pressure-sensitive adhesive may span the entire width of the sealing drape 112. Alternative attachment

devices may include, but are not limited to, heat-activated adhesives, sealing tapes, double-sided sealing tapes, pastes, hydrocolloids, hydrogels, hooks, sutures, etc.

[0029] The reduced-pressure subsystem 114 includes a reduced-pressure source 142, which can take many different forms. The reduced-pressure source 142 provides reduced pressure as a part of the reduced-pressure treatment system 100. As used herein, "reduced pressure" generally refers to a pressure less than the ambient pressure at a tissue site that is being subjected to treatment. In most cases, this reduced pressure will be less than the atmospheric pressure at which the patient is located. Alternatively, the reduced pressure may be less than a hydrostatic pressure at the tissue site. Reduced pressure may initially generate fluid flow in the manifold member 110, a reduced-pressure conduit 144, or conduit 144, and proximate the tissue site 101, e.g., wound 102. As the hydrostatic pressure around the tissue site 101, e.g., wound 102, approaches the desired reduced pressure, the flow may subside, and the reduced pressure may be maintained. Unless otherwise indicated, values of pressure stated herein are gauge pressures. The reduced pressure delivered may be static, dynamic (patterned or random) and may be delivered continuously or intermittently. Although the terms "vacuum" and "negative pressure" may be used to describe the pressure applied to the tissue site, the actual pressure applied to the tissue site may be more than the pressure normally associated with a complete vacuum. Consistent with the use herein, an increase in reduced pressure or vacuum pressure typically refers to a relative reduction in absolute pressure.

[0030] The reduced-pressure subsystem 114 provides reduced pressure. The reduced-pressure subsystem 114 includes the reduced-pressure source 142 that may be any means of supplying a reduced pressure, such as a vacuum pump or wall suction. While the amount and nature of reduced pressure applied to a tissue site will typically vary according to the application, the reduced pressure will typically be between -5 mm Hg and -500 mm Hg.

[0031] In the illustrative, non-limiting embodiment, the reduced-pressure source 142 has a battery compartment 146 and a canister region 148 with windows 150 providing a visual indication of the level of fluid within canister 148. An interposed membrane filter, such as hydrophobic or oleophobic filter, might be interspersed between reduced-pressure conduit 144 and the reduced-pressure source 142.

[0032] The reduced pressure provided by the reduced-pressure source 142 is delivered through the reduced-pressure conduit 144 to a reduced-pressure interface 152, or interface 152, which may be an elbow port 154. In one illustrative, non-limiting embodiment, the elbow port 154 is a TRAC® technology port available from Kinetic Concepts, Inc. of San Antonio, Tex. The reduced-pressure interface 152 allows the reduced pressure to be delivered to the sealing drape 112 and realized within an interior portion of sealing drape 112 and the manifold member 110. In this illustrative, non-limiting embodiment, the elbow port 154 extends through the sealing drape 112 to the manifold member 110, but numerous arrangements are possible.

[0033] In operation, the manifold member 110 may be placed proximate the tissue site 101, e.g., wound 102. The manifold member 110 may be placed within the wound 102, or may overlay a portion of the wound 102. As clearly shown in FIG. 2A, when the manifold member 110 is initially placed in the wound 102, each pincer 126 is in an open position whereby the points 132 of two or more corresponding pincer

blades **130** are in spaced relationship relative to one another. Additionally, the point **132** of each pincer blade **130** abuts a portion of tissue within the wound **102** and preferably abuts necrotic tissue **124**. In the illustrative, non-limiting embodiment, the initial angle (θ_1) between the outer surface **156** of each pincer blade **130** and a horizontal (for the orientation shown) reference line **158** is between 70 and 110 degrees and more particularly between 80 and 100 degrees and still more particularly between 85 and 95 degrees. In one particular illustrative, non-limiting embodiment, the initial angle is approximately 90 degrees (90°). It will, however, be appreciated that the initial angle (θ_1) may be any suitable angle.

[0034] The sealing drape **112** may be placed over the manifold member **110** such that the drape extension **138** extends beyond the periphery of the wound **102**. The drape extension **138** may be secured to the patient's epidermis **104** by the attachment device **116** in order to form a fluid seal between the patient's epidermis **104** and the sealing drape **112**. The reduced-pressure interface **152** may then be applied, if not already installed, and the reduced-pressure conduit **144** fluidly coupled to the reduced-pressure interface **152**. The reduced-pressure conduit **144** is fluidly coupled to the reduced-pressure source **142**. The reduced-pressure source **142** may then be activated such that a reduced pressure is delivered to the interior of the sealing drape **112** and manifold member **110**.

[0035] As the reduced pressure is delivered, the manifold member **110** may contract to form a semi-rigid substrate. As reduced pressure is delivered and the manifold member **110** begins to contract, a compressive force develops, in the direction represented by force vector **160**, which begins to drive the points **132** of each pincer blade **130** into the necrotic tissue **124**. Additionally, as shown in FIG. 2B, the points **132** of two or more corresponding pincer blades **130** begin to be forced together whereby a portion **136** of necrotic tissue **124** is received between the corresponding pincer blades **130**. In the illustrative, non-limiting embodiment, when the points **132** of two or more corresponding pincer blades **130** begin to be forced together, the angle (θ_2) between the outer surface **156** of each pincer blade **130** and the horizontal reference line **158** is typically more than the initial angle ($\theta_2 > \theta_1$).

[0036] As shown in FIG. 2C, with continued delivery of reduced pressure and continued contraction of the manifold member **110**, each pincer **126** may be moved to a closed position wherein the points **132** of the corresponding pincer blades **130** are forced even closer together whereby the portion **136** of necrotic tissue **124** therebetween is removed from the wound **102**. In the illustrative, non-limiting embodiment, when a pincer **126** is moved to a closed position, the angle (θ_3) between the outer surface **156** of each pincer blade **130** and the horizontal reference line **158** is more than the angle when the pincer blades **130** begin to be forced together (i.e., θ_2), as well as less than the initial angle ($\theta_3 > \theta_2 > \theta_1$). The reduced pressure delivered to and through the manifold member **110** may help to remove any exudate and other fluids from the wound **102** as well as any free-floating or dislodged portions **136** of necrotic tissue **124**. As such, the reduced-pressure treatment system **100** may improve healing of the tissue site **101**, e.g., wound **102**. Further, in one embodiment, after one of the pincers **126** has been moved to a closed position and with continued delivery of reduced pressure and continued contraction of the manifold member **110**, each pincer blade **130** may move from a closed position to a collapsed position whereby the inner surface **134** of each pincer blade **130** con-

fronts or approaches the tissue-facing surface **120** of the manifold member **110** or folds on itself or the adjacent pincer **126**.

[0037] Referring again primarily to FIG. 3, if the manifold member **110** is used with a secondary manifold **201** associated with but not coupled to the manifold member **110**, the secondary manifold **201** may be placed proximate the tissue site **101** with pincers **126** abutting the tissue. Then, the manifold member **110** may be placed proximate the secondary manifold **201**. The operation may then proceed analogously to that described above.

[0038] Referring now primarily to FIG. 4, another illustrative, non-limiting embodiment of a reduced-pressure treatment system **300** is shown for treating a tissue site **301**, such as a wound **302**. The reduced-pressure treatment system **300** is analogous in most respects to the reduced-pressure treatment system **100** of FIGS. 1-2C and a correlation of parts is generally indicated in this embodiment by indexing the numerals in FIGS. 1-2C by 200.

[0039] The reduced-pressure treatment system **300** further includes a fluid-management subsystem **362**. The fluid-management subsystem **362** includes a reduced-pressure subsystem **314** and a chemical-debridement subsystem **364**. The reduced-pressure subsystem **314** is similar, or the same, as the reduced-pressure subsystem **114** of FIG. 1.

[0040] The reduced-pressure subsystem **314** includes a reduced-pressure source **342** for delivering a reduced pressure. The reduced-pressure subsystem **314** may also include a canister **348** for receiving exudate, portions of tissue, debriding chemical(s), etc. that may be drawn from the interior portion of the sealing drape **312**, tissue site **301**, or manifold member **310**. As will be discussed further below, delivery of the reduced pressure may be controlled by a controller **368** via a valve member **366**. Alternatively or in addition, any suitable operator, such as a nurse, doctor or patient, may manually operate the valve member **366** to control delivery of the reduced pressure. The valve member **366** may be any suitable device operable to control the delivery of reduced pressure from the reduced-pressure source **342** to the interior of the sealing drape **312** and manifold member **310**. Suitable valve members **366** include, without limitation, a clamp, stop valve, or check valve.

[0041] The reduced pressure developed by reduced-pressure source **342** is delivered through the reduced-pressure conduit **344** to a reduced-pressure interface **352**, or interface **352**, which may be an elbow port **354**. Exudate, portions of tissue, debriding chemical(s), etc. may be drawn from the interior portion of the sealing drape **312**, tissue site **301** (e.g., wound **302**), or manifold member **310** and delivered to the canister **348** via the interface **352** and reduced-pressure conduit **344**.

[0042] The chemical-debridement subsystem **364** includes a debriding chemical reservoir **370** in fluid communication with the interior portion of the sealing drape **312**. The debriding chemical reservoir **370** may be placed in fluid communication with the interior portion of the sealing drape **312** via a second conduit **372** and a second interface **378**, such as an elbow port **380**. The debriding chemical reservoir **370** contains a debriding chemical that is capable of softening, digesting, partially digesting, breaking down or partially breaking down undesirable tissue, e.g., necrotic tissue **324**, at the tissue site **301**, e.g., the wound **302**. Illustrative debriding chemicals, include, without limitation, collagenase, ficin, pepsin, trypsin, chymotrypsin, papain and elastase. Alternatively or

in addition, the debriding chemical may be one or more enzymes, or one or more analogues thereof, isolated from any suitable insect larvae. In one embodiment, the larvae are larvae from *Lucilia sericata*; however, it will be appreciated that any suitable insect larvae may be employed. In one aspect, the debriding chemical is operable to soften digest, partially digest, break down or partially break down undesirable tissue at the tissue site 301 while leaving the healthy tissue at the tissue site 301 intact.

[0043] A pump 374 may be operable to deliver the debriding chemical from the debriding chemical reservoir 370 to the interior portion of the sealing drape 312. Alternatively or in addition, the debriding chemical may be delivered from the debriding chemical reservoir 370 to the interior portion of the sealing drape 312 via gravity or pulled by operation of the reduced-pressure subsystem 314. In either case, delivery of the debriding chemical may be controlled by the controller 368 via a second valve member 376. Alternatively or in addition, any suitable operator, such as a nurse, doctor or patient, may manually operate the second valve member 376 to control delivery of the debriding chemical. The second valve member 376 may be any suitable device operable to control the delivery of the debriding chemical reservoir 370 to the interior of the sealing drape 312 and manifold member 310. Suitable second valve members 376 include, without limitation, a clamp, stop valve, or check valve.

[0044] While the illustrative, non-limiting embodiment employs a reduced-pressure conduit 344 and a second conduit 372, a single conduit may be employed for delivering both reduced pressure and the debriding chemical to the interior of the sealing drape 312 wherein the installation subsystem is configured to cycle between a debriding chemical delivery mode and a reduced-pressure mode. Moreover, in one embodiment, the fluid-management subsystem may include the V.A.C.® Instill® System developed by Kinetic Concepts, Inc. of San Antonio, Tex.

[0045] In operation of the reduced-pressure treatment system 300, the manifold member 310 and reduced-pressure subsystem 314 are arranged and installed as previously discussed in connection with the reduced-pressure treatment system 100 of FIG. 1. The second interface 378 may be applied, if not already installed, and the second conduit 372 fluidly coupled to the second interface 378. The second conduit 372 is also fluidly coupled to the pump 374, or debriding-chemical reservoir 370 if the debriding chemical is delivered via gravity or operation of the reduced-pressure subsystem 314.

[0046] The chemical-debridement subsystem 364 is operable to deliver a debriding chemical to the interior of the sealing drape 312 by the opening of, or partially opening of, the second valve member 376. The second valve member 376 may be operated by the controller 368 or any suitable operator. A pump 374, gravity, or operation of the reduced-pressure subsystem 314 may be utilized to move a debriding chemical from the debriding-chemical reservoir 370 to the interior of the sealing drape 312 and to the tissue site 301. The debriding chemical is operable to soften digest, partially digest, break down or partially break down undesirable tissue, e.g., necrotic tissue 324, at the tissue site 301, e.g., wound 302.

[0047] The reduced-pressure subsystem 314 delivers reduced pressure to the interior of the sealing drape 312 by the opening of, or partial opening of, the valve member 366. The valve member 366 may be operated by the controller 368 or any suitable operator. In one embodiment, the opening, or

partial opening, of the valve member 366 coincides with a closure, or partial closure, of the second valve member 376 whereby delivery of the debriding chemical ceases whilst a reduced-pressure is delivered to the interior of the sealing drape 312. The reduced-pressure subsystem 314 may be operated to remove fluids at a first pressure, followed by an increase in reduced-pressure so as to remove unwanted tissue; alternatively, the removal of fluids and unwanted tissue may be done with one operation.

[0048] Delivery of a reduced pressure may cause the pincers 326 to operate as previously discussed in connection with FIG. 1-2C, whereby the pincers 326 remove the softened digested, partially digested, broken down or partially broken down undesirable tissue, e.g., necrotic tissue 324, from the tissue site, e.g., wound 302. The reduced-pressure subsystem 314 may also be operable to draw exudate, portions of necrotic tissue, debriding chemical(s), etc. from the interior of the sealing drape 312 for receipt by the canister 348. Moreover, in one embodiment, the reduced-pressure subsystem 314 may also be operable to draw the debriding chemical from the debriding-chemical reservoir 370 to the interior of the sealing drape 312 for the delivery thereof.

[0049] The reduced-pressure treatment system 300 may be operated in a cyclical manner whereby a debriding chemical is delivered to the interior of the sealing drape 312, followed by a delivery of a reduced pressure and debridement by the pincers 326, which is, in turn, followed by a second delivery of a debriding chemical, and then, a second delivery of a reduce pressure and debridement by the pincers 326, etc.

[0050] In an alternative embodiment, the chemical-debridement subsystem 364 may include the debriding-chemical reservoir 370 that is in fluid communication with the reduced-pressure conduit 344 and a two-way valve may control when debridement chemical is delivered to the interface 352 and when reduced pressure is delivered from the reduced-pressure source 342. In this embodiment of the chemical-debridement subsystem 364, delivery is alternated between debridement chemical and reduced pressure to allow a single interface to be used.

[0051] Referring now primarily to FIGS. 5A and 5B, an alternative debridement mechanism 422 for use with a reduced-pressure pressure treatment system, such as reduced-pressure treatment systems 100, 300 (FIGS. 1-4), is shown. The debridement mechanism 422 includes a debridement implement 482, which may take numerous shapes and sizes to help remove tissue. The manifold member 410 may include any suitable number of debridement implements 482. In one embodiment, a plurality of debridement implements 482 is arranged in an array over the tissue-facing surface 420 of the manifold member 410. Alternatively, the manifold member 410 may include both one or more debridement implements 482 as well as one or more pincers 126 (FIGS. 1-4).

[0052] Each debridement implement 482 includes a debridement arm 484 with a face 486 at the distal end thereof. The proximal end of the debridement arm 484 may be integral with, or otherwise coupled to, a support member 428. The support member 428 may be integral with, or otherwise coupled to, or associated with the manifold member 410. The debridement implement 482 may extend from the manifold member 410 at any suitable angle. The debridement arm 484 has a distal end that is operable to engage undesired tissue.

[0053] The debridement arm 484 deforms under reduced pressure. The debridement implement 482 may be operable to

move from a first, or neutral, position, with a first angle (Φ_1) between the debridement arm **484** and a horizontal (for the orientation shown) reference line **458**, to a second, or debriding, position with a second angle (Φ_2) between the debridement arm **484** and the horizontal reference line **458**. In one embodiment, the second angle is less than the first angle ($\Phi_2 < \Phi_1$). In another illustrative, non-limiting embodiment, a debridement mechanism includes a debridement utensil operable to remove undesired tissue through direct action against the tissue of the collapsible debridement utensil. The debridement utensil deforms under the influence of reduced pressure to remove the undesired tissue.

[0054] In operation according to one illustrative, non-limiting embodiment, the manifold member **410** is placed proximate a tissue site, e.g., wound **402**, such that the edge **488** of the debridement face **486** abuts a portion of the tissue within the wound, e.g., necrotic tissue **424** (FIG. 5A). A sealing drape and reduced-pressure subsystem or fluid-management subsystem may be applied and activated as previously discussed. As reduced pressure is delivered, the manifold member **410** may contract to form a semi-rigid substrate. As reduced pressure is delivered and the manifold member **410** begins to contract, a compressive force develops in the direction represented by vector **460**, which begins to drive the edge **488** of the face **486** into the necrotic tissue **424** thereby moving the debridement implement **482** from a first, or neutral, position to a second, or debriding, position. As the debridement implement **482** is moved to the second, or debriding, position, a portion **436** of necrotic tissue **424** may be forced by the face **486** from the wound **402** (FIG. 5B).

[0055] In an alternative embodiment, the manifold member **410** may be sized smaller than the tissue site to be treated whereby cyclical application of reduced pressure causes each face **486** to “push off” of the immediate portion **436** of necrotic tissue **424** removed such that the debridement implement “steps” to a second portion of necrotic tissue **424** whereby the manifold member **410** “moves” across the wound **402**. In other words, each cycle of reduced pressure causes the manifold member **410** to advance laterally by one “step.”

[0056] The systems and methods described above may be employed in numerous ways and another general, illustrative method of treating a wound will now be described. The method may be employed by any one of the previously discussed reduced-pressure treatment systems **100**, **300** of FIGS. 1-5B, or by any other suitable device or means. The method may be a logic that is programmed into, or otherwise followed by, a controller, such as the controller **368** of FIG. 4. Alternatively, the method may be employed by any suitable operator, such as a doctor, nurse, or patient. First, a debriding chemical is introduced to a tissue site, e.g., a wound, having at least a portion of undesirable tissue for removal, e.g., necrotic tissue. The debriding chemical may be any chemical suitable for softening, digesting, partially digesting, breaking down or partially breaking down undesirable tissue at the tissue site. Illustrative debriding chemicals, include, without limitation, collagenase, ficin, pepsin, trypsin, chymotrypsin, papain, elastase, enzymes isolated from any suitable insect larvae, or one or more analogues thereof.

[0057] The debriding chemical may be held at the tissue site for a prescribed amount of time thereby allowing the debriding chemical to soften, digest, partially digest, break down or partially break down undesirable tissue at the tissue site. A reduced pressure may then be applied to the tissue site

whereby one or more debridement mechanisms debride the tissue site. The application of a reduced pressure to the tissue site may also serve to remove, or partially remove, exudate, the debriding chemical, free floating portions of undesirable tissue, etc. from the tissue site. Additionally, in one embodiment, the application of a reduced pressure to the tissue site is done in a cyclical manner; for example, the pressure may cycle between a first pressure at first pressure level and a second pressure at a second pressure level. The cycling may occur for a plurality of cycles.

[0058] After the application of a reduced pressure to the tissue site, a subsequent introduction of a debriding chemical to the tissue site may be performed. The subsequent introduction of a debriding chemical to the tissue site may serve to flush free floating portions of undesirable tissue from the tissue site as well as introduce a fresh batch of the debriding chemical to the tissue site for a subsequent softening, digesting, partially digesting, breaking down or partially breaking down of undesirable tissue at the tissue site. The debriding chemical may then be held at the tissue site for a prescribed amount of time and the process repeated. Alternatively or in addition, the tissue site may be flushed with a flushing agent, such as saline or any other medically acceptable fluid or solution, prior to a subsequent introduction of the debriding chemical or after a final debridement by the debridement mechanism.

[0059] Although the present invention and its advantages have been disclosed in the context of certain illustrative, non-limiting embodiments, it should be understood that various changes, substitutions, and alterations can be made without departing from the scope of the invention as defined by the appended claims.

1-19. (canceled)

20. A method for treating a tissue site on a patient, the method comprising:

- placing a manifold member proximate the tissue site, wherein the manifold member comprises a debridement mechanism for debriding the tissue site;
- disposing a sealing drape over the manifold member and the patient's epidermis;
- forming a fluid seal between the sealing drape and the patient's epidermis; and
- providing a reduced pressure to the manifold member whereby the debridement mechanism debrides the tissue site.

21. The method of claim 20, further comprising introducing a debriding chemical to the tissue site.

22. The method of claim 20, further comprising introducing a debriding chemical to the tissue site and wherein the debriding chemical is one or more enzymes isolated from insect larvae.

23. The method of claim 20, further comprising introducing a debriding chemical to the tissue site, wherein the debriding chemical is one or more enzymes isolated from insect larvae, and wherein the larvae are larvae from *Lucilia sericata*.

24. The method of claim 20, further comprising introducing a debriding chemical to the tissue site, and wherein the debriding chemical is one or more synthetic analogues of one or more enzymes isolated from insect larvae.

25. The method of claim 20, further comprising introducing a debriding chemical to the tissue site, wherein the debriding chemical is one or more synthetic analogues of one or

more enzymes isolated from insect larvae, and wherein the larvae are larvae from *Lucilia sericata*.

26. The method of claim 20, further comprising introducing a debriding chemical to the tissue site, wherein the debriding chemical is one or more enzymes isolated from insect larvae, and wherein the debriding chemical is a chemical selected from the group consisting of: collagenase, ficin, pepsin, trypsin, chymotrypsin, papain and elastase.

27. The method of claim 20, further comprising introducing a debriding chemical to the tissue site, and flushing the tissue site.

28. The method of claim 20, wherein the debridement mechanism comprises a pincer.

29. The method of claim 20, wherein the debridement mechanism comprises a pincer and wherein the pincer moves from an open position to a closed position under the influence of reduced pressure.

30. The method of claim 20, further comprising introducing a debriding chemical to the tissue site, and wherein the debridement mechanism comprises a debridement implement.

31. The method of claim 20, further comprising introducing a debriding chemical to the tissue site, and wherein the debridement mechanism comprises a debridement utensil.

32-36. (canceled)

37. A reduced-pressure treatment system for treating a tissue site on a patient, the system comprising:

- a manifold member for distributing reduced pressure to the tissue site;
- a support member for disposing proximate the tissue site and the manifold;
- a debridement implement coupled to the support member, the debridement implement for debriding the tissue site, wherein the debridement implement comprises a debridement arm having proximal end and a distal end, the proximal end coupled to the support member and the distal end operable to engage undesired tissue, and wherein the debridement arm deforms under reduced pressure;
- a sealing drape for placing over the tissue site and manifold member and operable to form a fluid seal over the tissue site and the manifold member; and
- a reduced-pressure subsystem for delivering a reduced pressure to the sealing drape.

38. The system of claim 37, further comprising a chemical-debridement subsystem for delivering a debriding chemical to the tissue site.

39. The system of claim 37, further comprising a chemical-debridement subsystem for delivering a debriding chemical to the tissue site, wherein the chemical-debridement subsystem comprises a debriding chemical reservoir in fluid communication with the sealing drape whereby the debriding chemical is delivered to the tissue site.

40. The system of claim 37, further comprising a chemical-debridement subsystem for delivering a debriding chemical

to the tissue site, wherein the debriding chemical is one or more enzymes isolated from insect larvae.

41. The system of claim 37, further comprising a chemical-debridement subsystem for delivering a debriding chemical to the tissue site, wherein the debriding chemical is a chemical selected from the group consisting of: collagenase, ficin, pepsin, trypsin, chymotrypsin, papain and elastase.

42. A manifold member for treating a tissue site on a patient, the manifold member comprising:

- a manifold material for distributing reduced pressure;
- a support member associated with the manifold material; and
- a debridement implement for debriding the tissue site, the debridement implement coupled to the support member, wherein the debridement implement comprises a debridement arm having proximal end and a distal end, the proximal end coupled to the support member and the distal end operable to engage undesired tissue, and wherein the debridement arm deforms under reduced pressure.

43. A method for treating a tissue site on a patient, the method comprising:

- placing a manifold member proximate the tissue site, wherein the manifold member comprises a debridement implement for debriding the tissue site, wherein the debridement implement comprises a debridement arm having proximal end and a distal end, the proximal end coupled to the support member and the distal end operable to engage undesired tissue, and wherein the debridement arm deforms under reduced pressure;
- disposing a sealing drape over the manifold member and the patient's epidermis;
- forming a fluid seal between the sealing drape and the patient's epidermis; and
- providing a reduced pressure to the manifold member whereby the debridement implement debrides the tissue site.

44. The method of claim 43, further comprising introducing a debriding chemical to the tissue site.

45. The method of claim 43, further comprising introducing a debriding chemical to the tissue site and wherein the debriding chemical is one or more enzymes isolated from insect larvae.

46. The method of claim 43, further comprising introducing a debriding chemical to the tissue site, wherein the debriding chemical is one or more enzymes isolated from insect larvae, and wherein the debriding chemical is a chemical selected from the group consisting of collagenase, ficin, pepsin, trypsin, chymotrypsin, papain and elastase.

47. The method of claim 43, further comprising introducing a debriding chemical to the tissue site, and flushing the tissue site.

* * * * *