



US011293132B2

(12) **United States Patent**
Kim et al.

(10) **Patent No.:** **US 11,293,132 B2**

(45) **Date of Patent:** **Apr. 5, 2022**

(54) **LAUNDRY MACHINE**

(71) Applicant: **LG ELECTRONICS INC.**, Seoul (KR)

(72) Inventors: **Sungryong Kim**, Seoul (KR);
Dongwon Kim, Seoul (KR);
Kyeonghwan Kim, Seoul (KR);
Heakyung Yoo, Seoul (KR); **Youngmin Kim**, Seoul (KR)

(73) Assignee: **LG Electronics Inc.**, Seoul (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **16/217,683**

(22) Filed: **Dec. 12, 2018**

(65) **Prior Publication Data**

US 2019/0112743 A1 Apr. 18, 2019

Related U.S. Application Data

(62) Division of application No. 15/251,970, filed on Aug. 30, 2016, now Pat. No. 10,179,964, which is a (Continued)

(30) **Foreign Application Priority Data**

Apr. 30, 2010 (KR) 10-2010-0040526

Apr. 30, 2010 (KR) 10-2010-0040527

(Continued)

(51) **Int. Cl.**

D06F 39/08 (2006.01)

D06F 29/00 (2006.01)

(Continued)

(52) **U.S. Cl.**

CPC **D06F 39/08** (2013.01); **D06F 29/00** (2013.01); **D06F 29/02** (2013.01); **D06F 39/12** (2013.01);

(Continued)

(58) **Field of Classification Search**

CPC D06F 29/02; D06F 29/00; D06F 39/08; D06F 39/085; D06F 39/10; D06F 39/12; A47L 15/0084

(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,030,788 A 6/1977 Bleeker 312/333

5,470,142 A * 11/1995 Sargeant A47L 15/4246 312/258

(Continued)

FOREIGN PATENT DOCUMENTS

CN 2260097 Y 8/1997
CN 1349012 A 5/2002

(Continued)

Primary Examiner — Michael E Barr


Assistant Examiner — Thomas Bucci

(74) *Attorney, Agent, or Firm* — Dentons US LLP

(57) **ABSTRACT**

A laundry apparatus including a cabinet; a first space provided in the cabinet, in which a first treating part provided to treat laundry is installed; a second space provided in the cabinet, in which a second treating part provided to treat laundry is installed; a drawer movably provided in the second space, in which the second treating part is installed; and a rail unit configured to limit vertical and horizontal movement of the drawer with respect to the second space and to guide the outward movement of the drawer. Therefore, laundry may be treated by using the first and second treating parts and vibration and noise generated in the second treating part may be reduced.

14 Claims, 34 Drawing Sheets

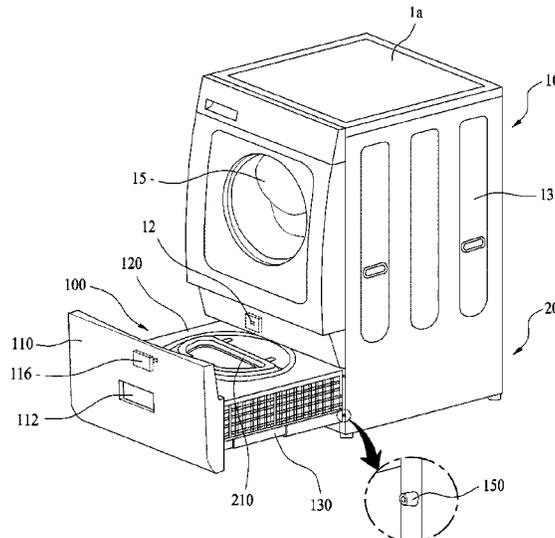

Related U.S. Application Data

division of application No. 13/097,934, filed on Apr. 29, 2011, now Pat. No. 10,081,898.

(30) **Foreign Application Priority Data**

Apr. 30, 2010 (KR) 10-2010-0040624
 Apr. 30, 2010 (KR) 10-2010-0040625
 May 4, 2010 (KR) 10-2010-0042004
 May 28, 2010 (KR) 10-2010-0050125

(51) **Int. Cl.**

D06F 39/12 (2006.01)
D06F 29/02 (2006.01)
D06F 37/42 (2006.01)
D06F 39/10 (2006.01)

(52) **U.S. Cl.**

CPC *D06F 37/42* (2013.01); *D06F 39/085* (2013.01); *D06F 39/10* (2013.01)

(58) **Field of Classification Search**

USPC 68/13 R, 208, 27, 207, 23.5, 3 R; 134/111, 200, 56 D; 312/228, 228.1
 See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,660,063 A 8/1997 Lee D06F 39/10
 210/167.01
 6,167,733 B1 1/2001 Lee D06F 39/085
 68/18 F
 6,618,887 B2* 9/2003 Kim D06F 33/38
 8/158
 6,857,295 B2* 2/2005 Hansen D06F 37/267
 68/3 R
 7,472,712 B2 1/2009 Ashton A47L 15/0084
 134/104.1
 8,028,548 B2 10/2011 Woo D06F 39/10
 68/12.13
 2001/0010165 A1 8/2001 Kubota et al. 68/12.12
 2002/0042957 A1* 4/2002 Kim D06F 23/04
 8/158
 2004/0083770 A1* 5/2004 Lyu D06F 37/267
 68/15
 2004/0148974 A1 8/2004 No D06F 39/10
 68/12.13
 2004/0163690 A1 8/2004 Kim 134/104.1
 2005/0120758 A1 6/2005 Thies D06F 39/10
 68/18 R
 2005/0229643 A1* 10/2005 Kim D06F 39/001
 68/3 R
 2005/0279141 A1* 12/2005 Kim D06F 39/04
 68/12.22
 2006/0086380 A1* 4/2006 Choi A47L 15/4225
 134/56 D
 2007/0240457 A1 10/2007 Jang D06F 39/083
 68/18 F
 2007/0246089 A1 10/2007 Welch A47L 15/0084
 134/56 D
 2008/0289368 A1 11/2008 Braz et al.
 2009/0007602 A1 1/2009 Woo D06F 39/10
 68/208
 2009/0113945 A1* 5/2009 Kim D06F 37/145
 68/5 C
 2009/0126415 A1* 5/2009 Lyu D06F 39/04
 68/15
 2009/0139273 A1* 6/2009 Kim D06F 29/00
 68/23.1
 2009/0139276 A1* 6/2009 Kim D06F 23/02
 68/17 R

2009/0145174 A1* 6/2009 Kim D06F 39/125
 68/27
 2009/0145175 A1* 6/2009 Kim D06F 39/125
 68/27
 2009/0145176 A1* 6/2009 Kim D06F 31/00
 68/27
 2009/0145177 A1* 6/2009 Kim D06F 39/125
 68/13 R
 2009/0146536 A1* 6/2009 Kim D06F 39/125
 312/228
 2009/0158784 A1* 6/2009 Kim D06F 31/00
 68/27
 2009/0199601 A1* 8/2009 Kim D06F 39/085
 68/208
 2010/0011609 A1* 1/2010 Park D06F 25/00
 34/88
 2010/0064736 A1* 3/2010 Jeong D06F 39/125
 68/13 R
 2010/0088828 A1 4/2010 Kim D06F 39/022
 8/159
 2010/0088829 A1 4/2010 Park et al. 8/159
 2010/0115709 A1 5/2010 Kim D06F 39/022
 8/159
 2010/0307200 A1* 12/2010 Jeong D06F 31/00
 68/13 R
 2011/0016738 A1 1/2011 Ashrafzadeh et al. 34/108
 2011/0016927 A1* 1/2011 Kim D06F 39/083
 68/15
 2011/0023555 A1* 2/2011 Murrell D06F 37/265
 68/13 R
 2011/0100071 A1 5/2011 Mazzon D06F 39/10
 68/208
 2012/0138107 A1 6/2012 Fountain A47L 15/0084
 134/111
 2013/0186437 A1 7/2013 Tuller A47L 15/4251
 134/99.1

FOREIGN PATENT DOCUMENTS

CN 2775090 Y 4/2006
 CN 101451294 A 6/2009
 DE 10-2008-058267 A1 6/2009
 DE 102008058269 A1 7/2009
 EP 0668389 A1 8/1995
 EP 2 063 012 A1 5/2009
 EP 2 063 031 A1 5/2009
 JP 10-211393 A 8/1998
 JP 2000-334192 A 12/2000
 JP 3443364 B 9/2003
 JP 2004-089339 A 3/2004
 JP 2007-120875 A 5/2007
 KR 20-0136087 Y1 7/1995
 KR 20-1998-0060623 U 11/1998
 KR 10-0151205 B1 12/1998
 KR 10-1999-0056859 A 7/1999
 KR 10-2001-0088210 A 9/2001
 KR 10-2003-0031343 A 4/2003
 KR 10-0381163 B1 4/2003
 KR 10-2003-0055973 A 7/2003
 KR 10-2004-0046973 A 5/2004
 KR 10-2006-0063394 A 6/2006
 KR 10-2007-0034818 A 3/2007
 KR 10-2007-0105054 A 10/2007
 KR 10-2007-0113432 A 11/2007
 KR 10-2008-0052964 A 6/2008
 KR 10-2008-0065762 A 7/2008
 KR 10-2008-0101380 A 11/2008
 KR 10-2008-0109488 A 12/2008
 KR 10-2009-0054787 A 1/2009
 KR 10-2009-0027111 A 3/2009
 KR 10-2009-0052457 A 5/2009
 KR 10-2009-0057791 A 6/2009
 KR 10-2009-0057792 A 6/2009
 KR 10-2009-0078983 A 7/2009
 KR 10-2010-0048343 A 5/2010

* cited by examiner

FIG. 1

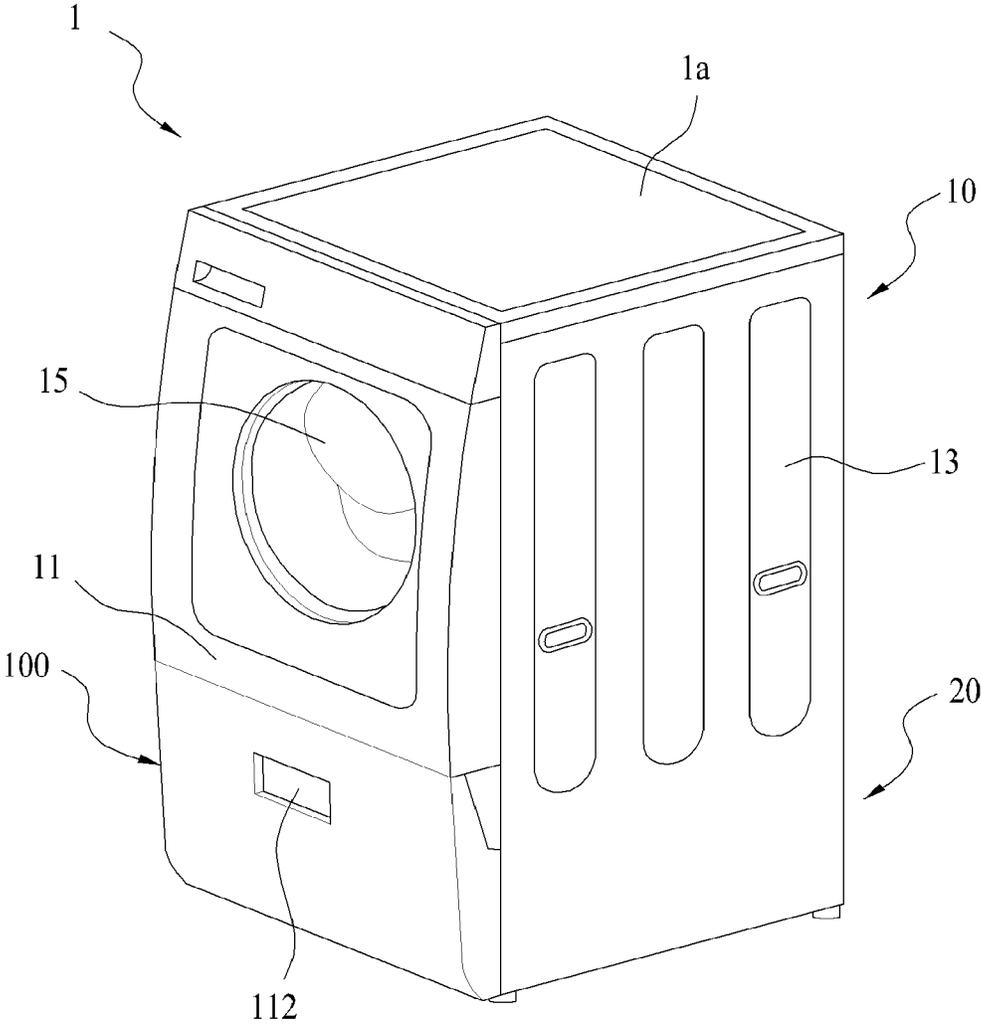


FIG. 2

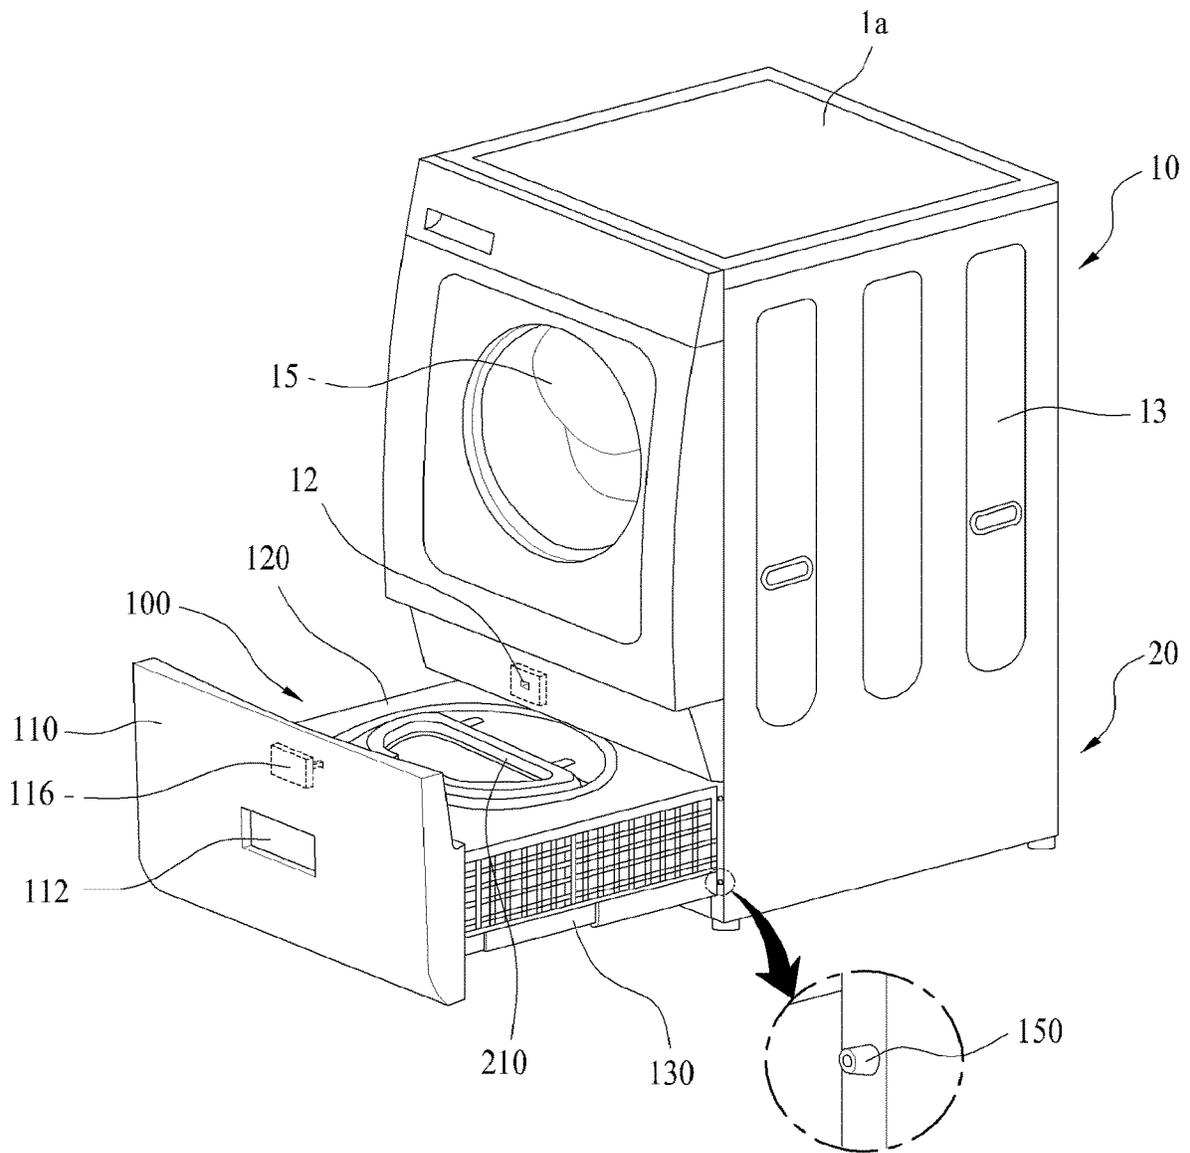


FIG. 3

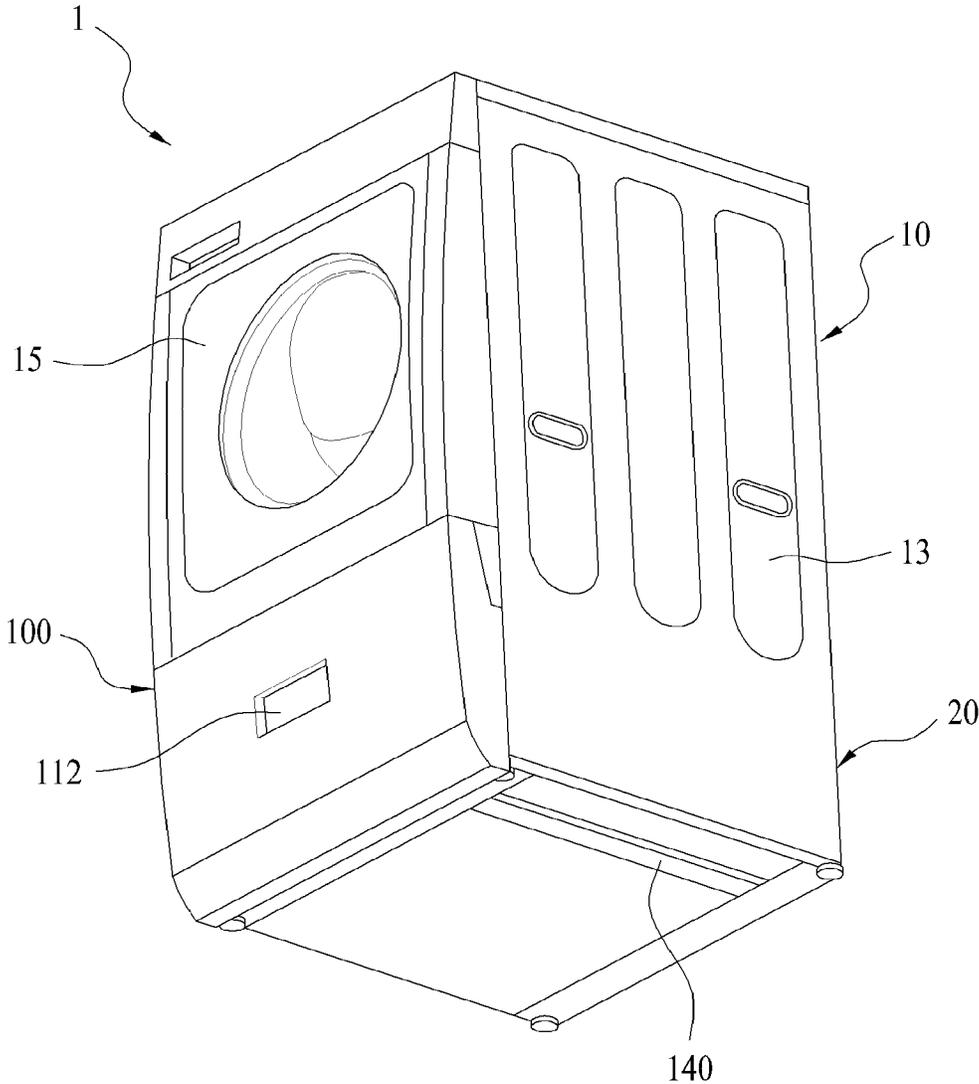


FIG. 4

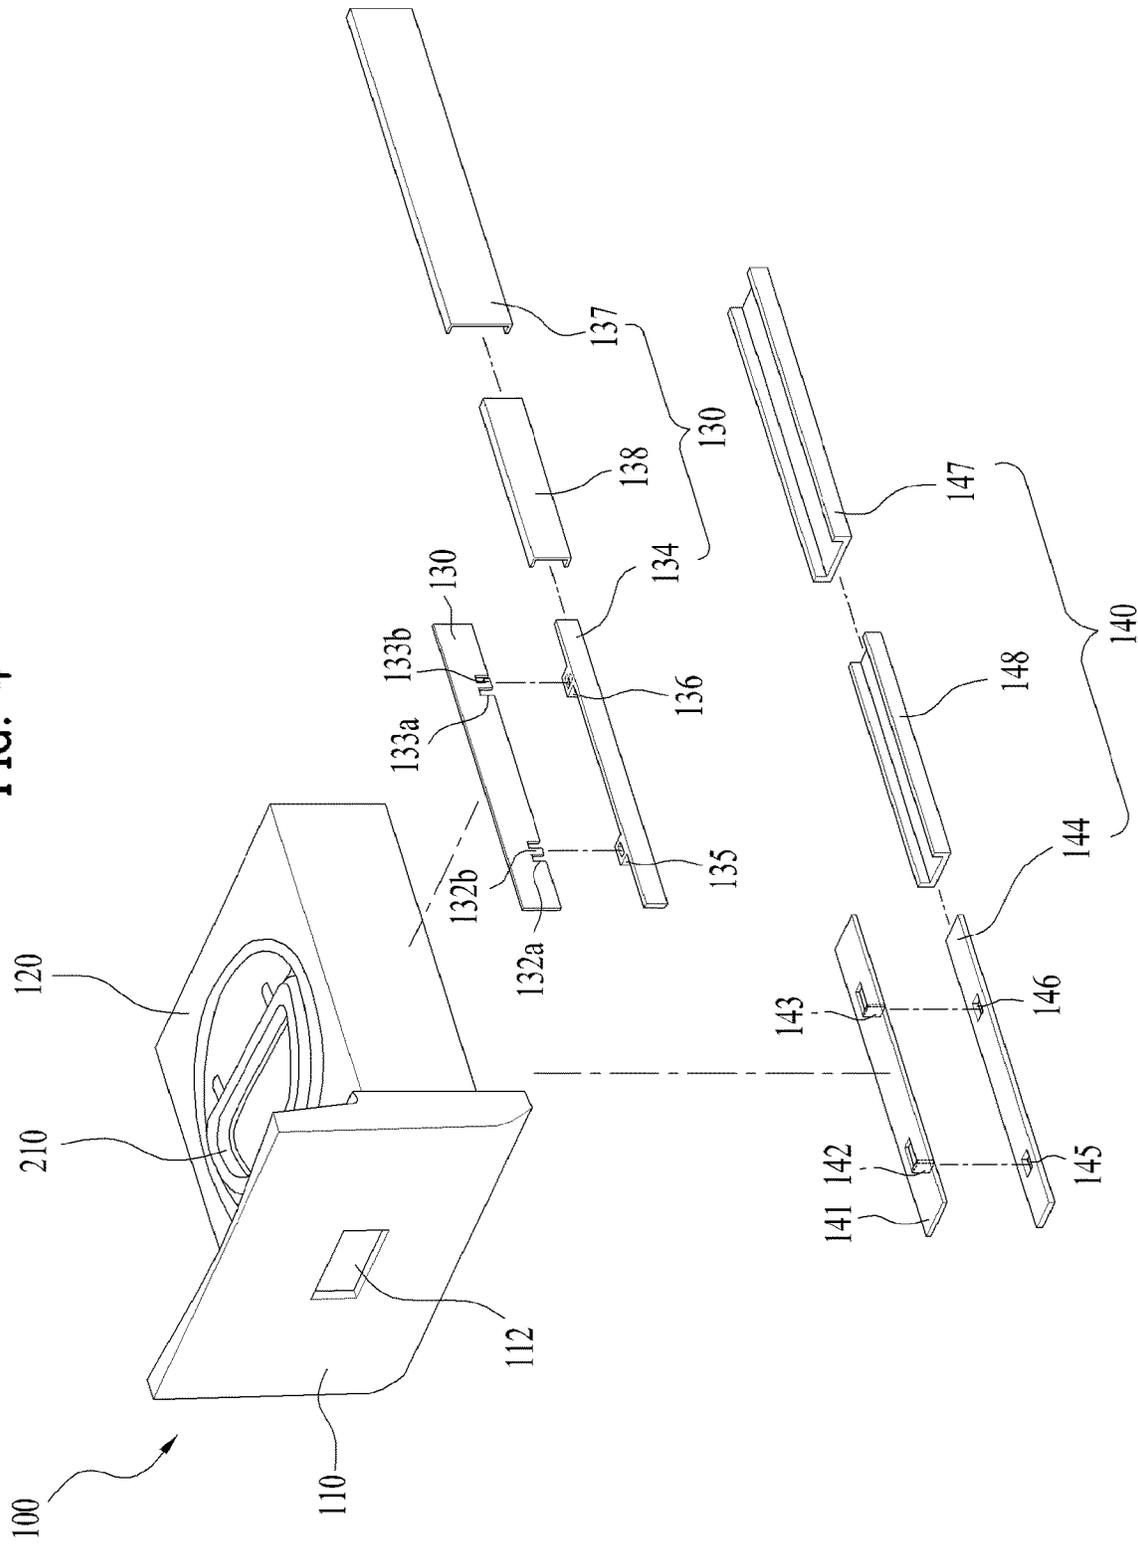


FIG. 5

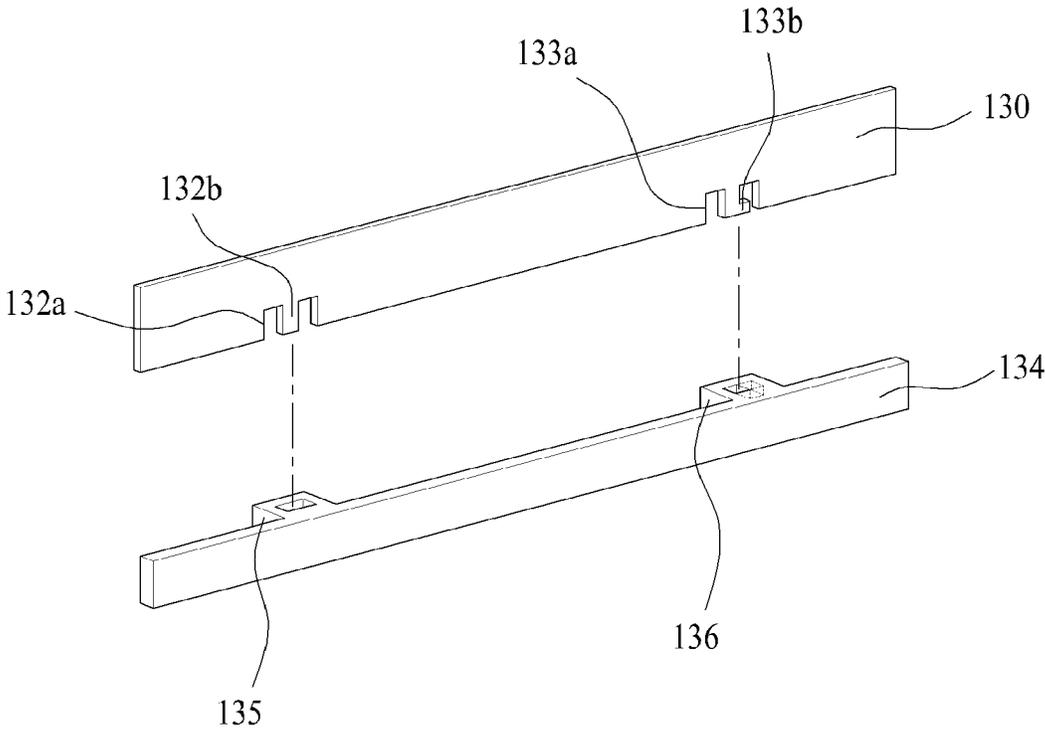


FIG. 6

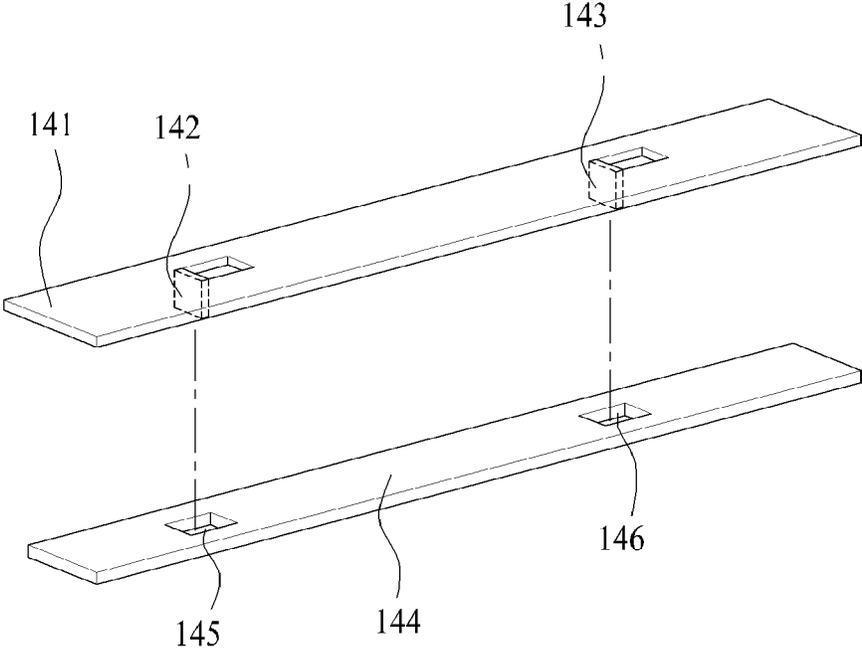


FIG. 7

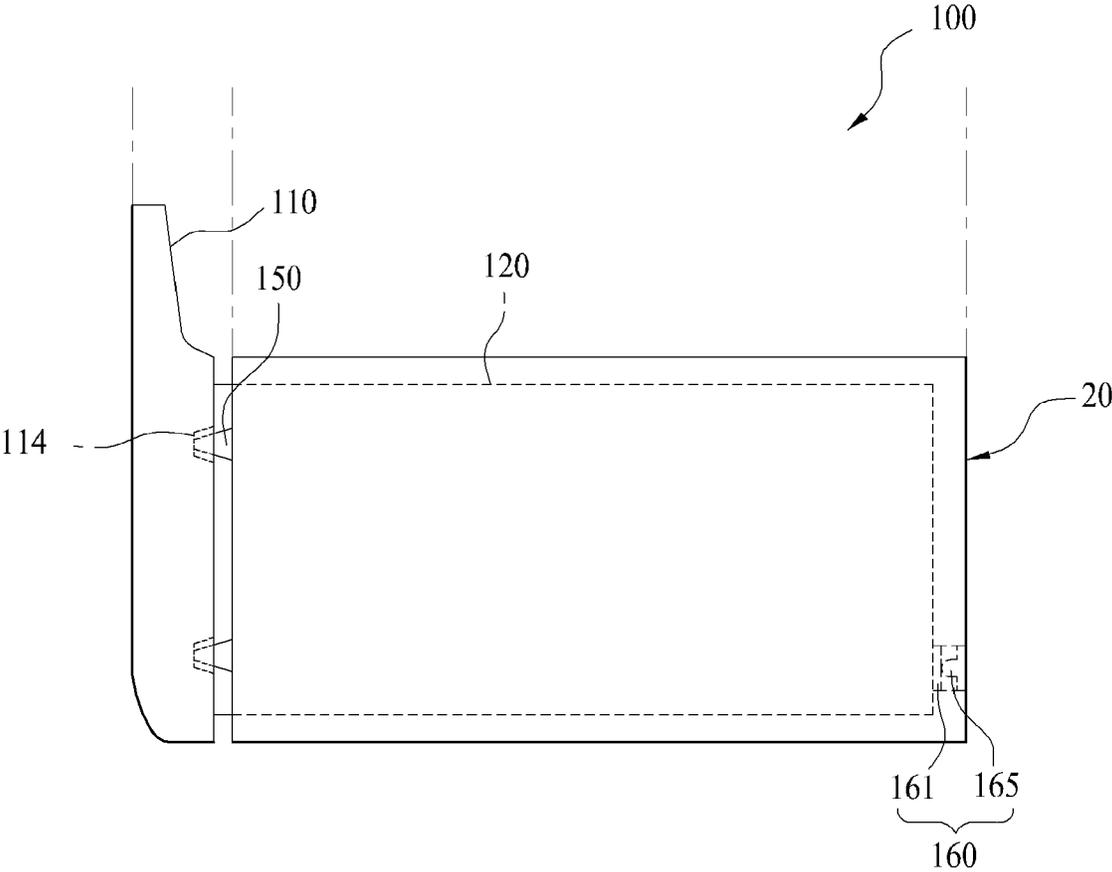


FIG. 8

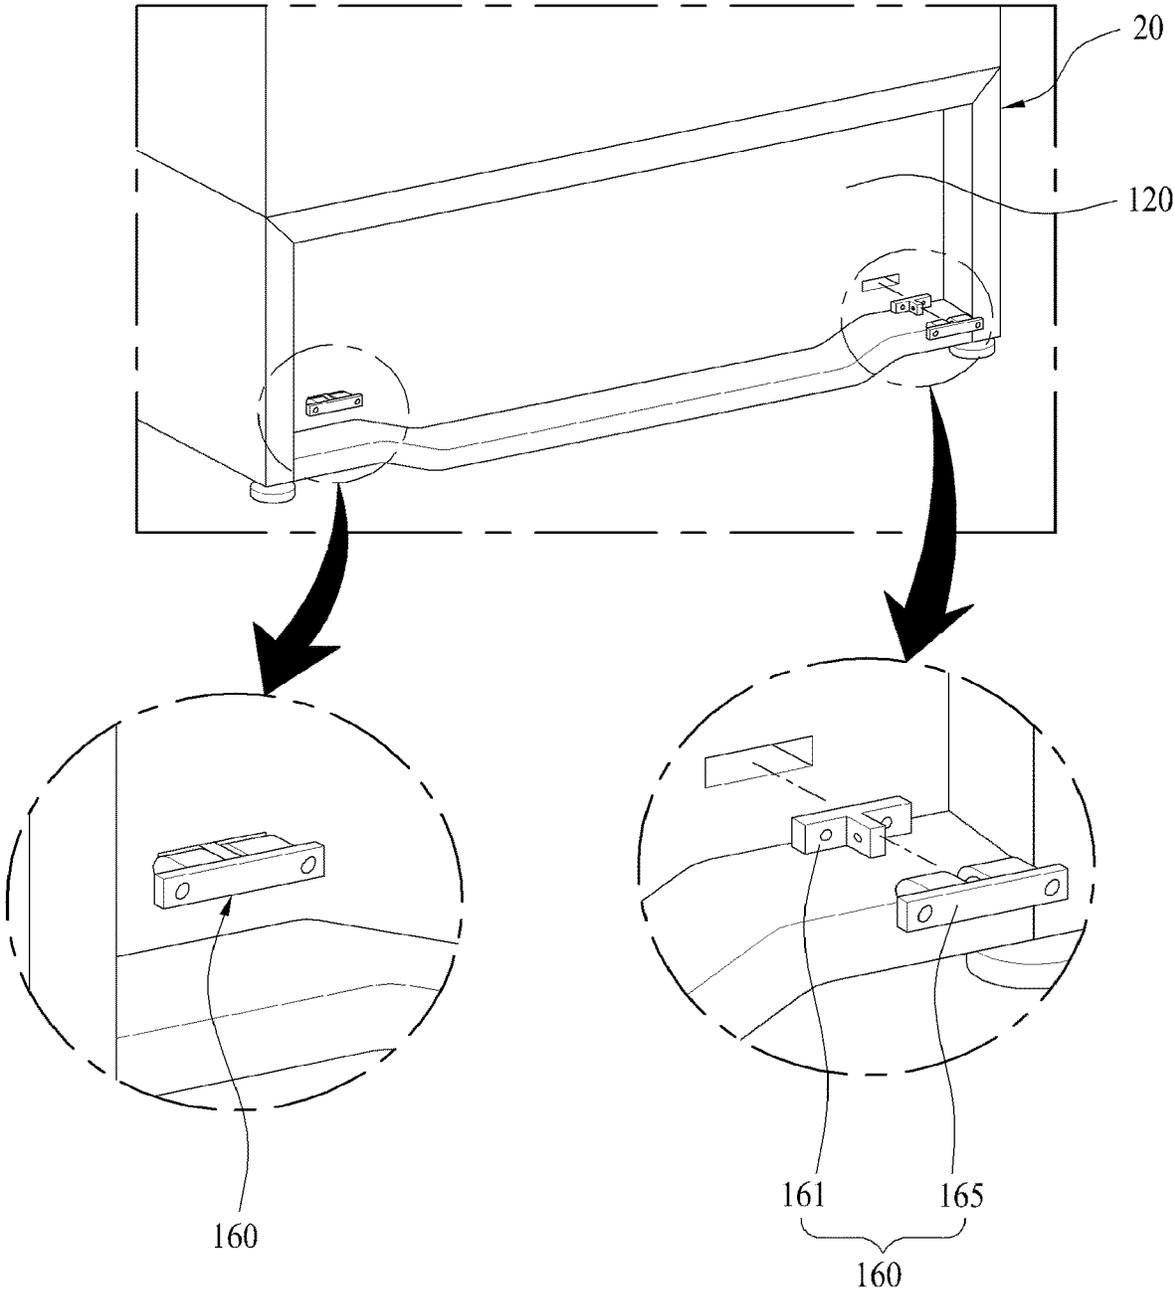


FIG. 9

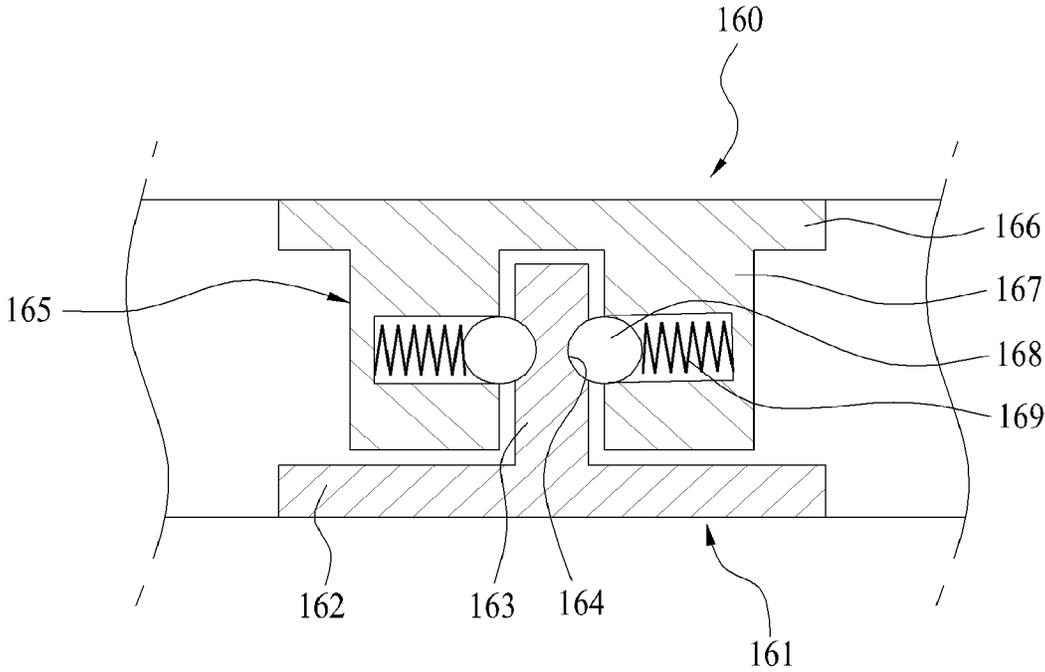


FIG. 10

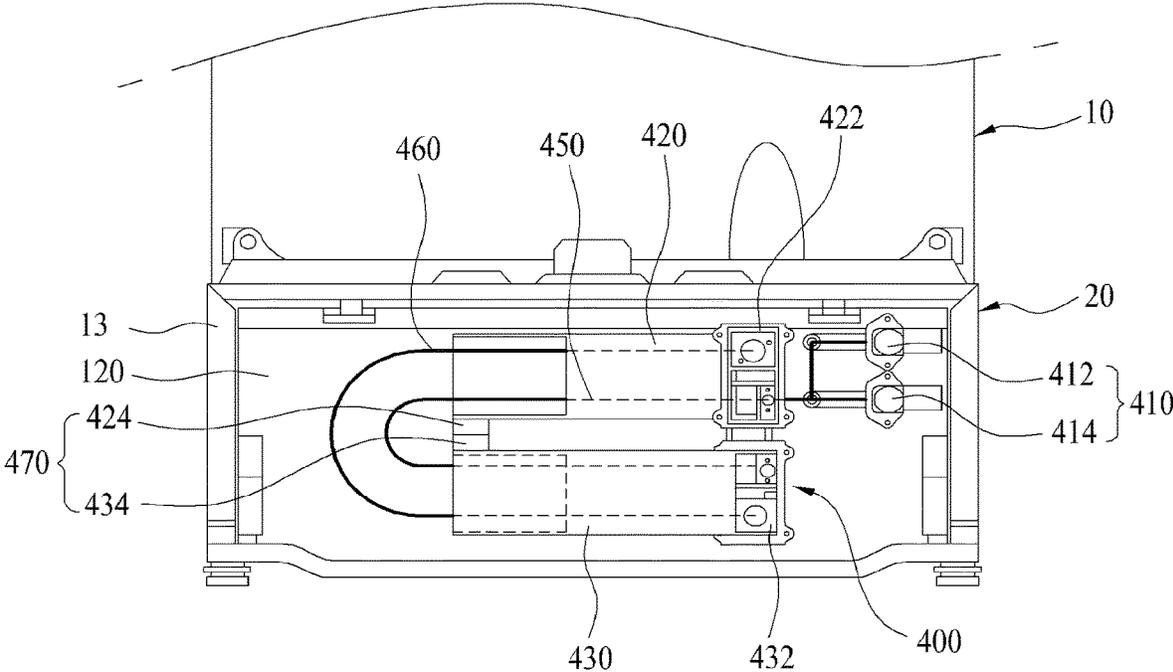


FIG. 11

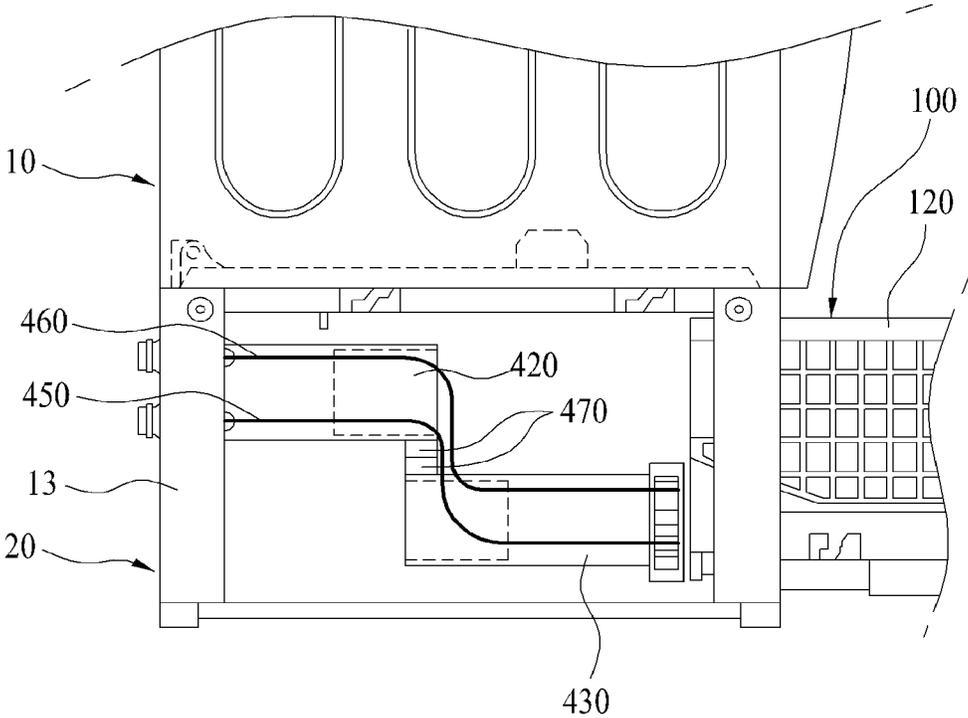


FIG. 12

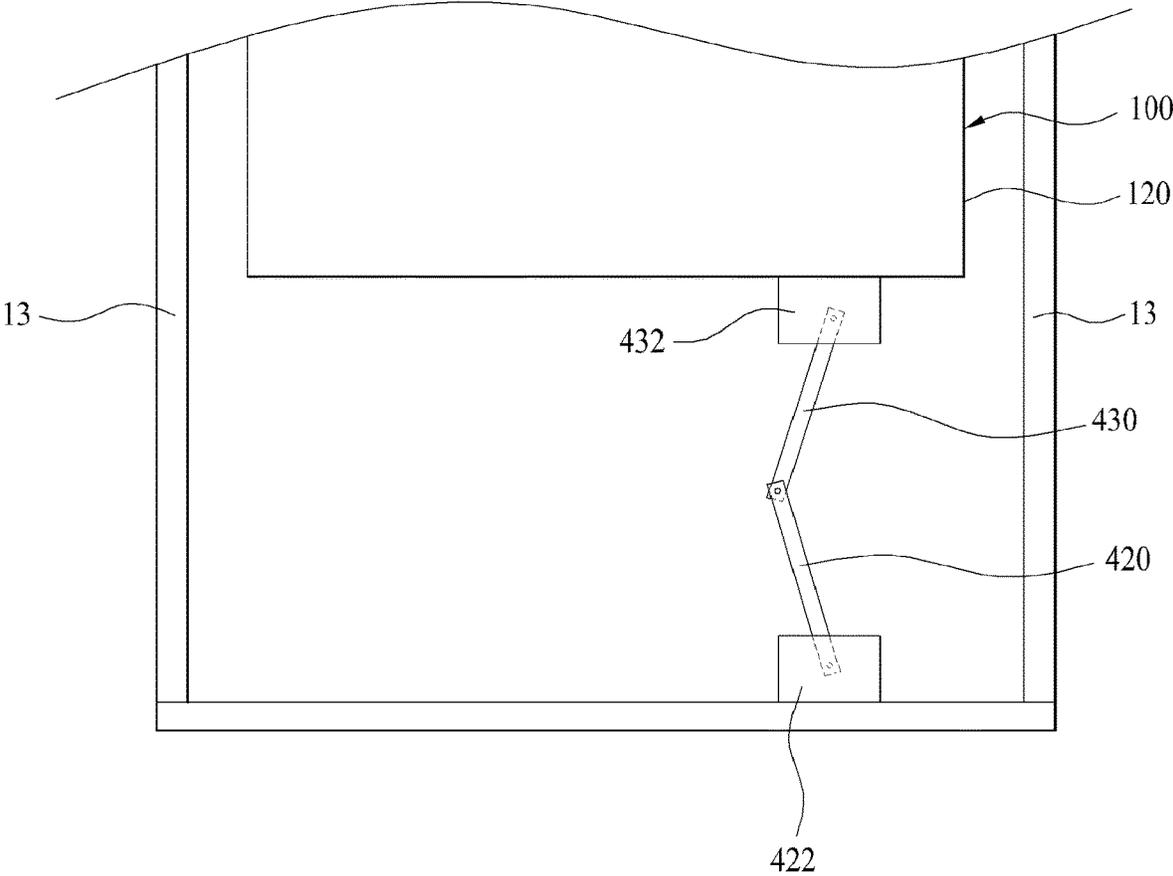


FIG. 13

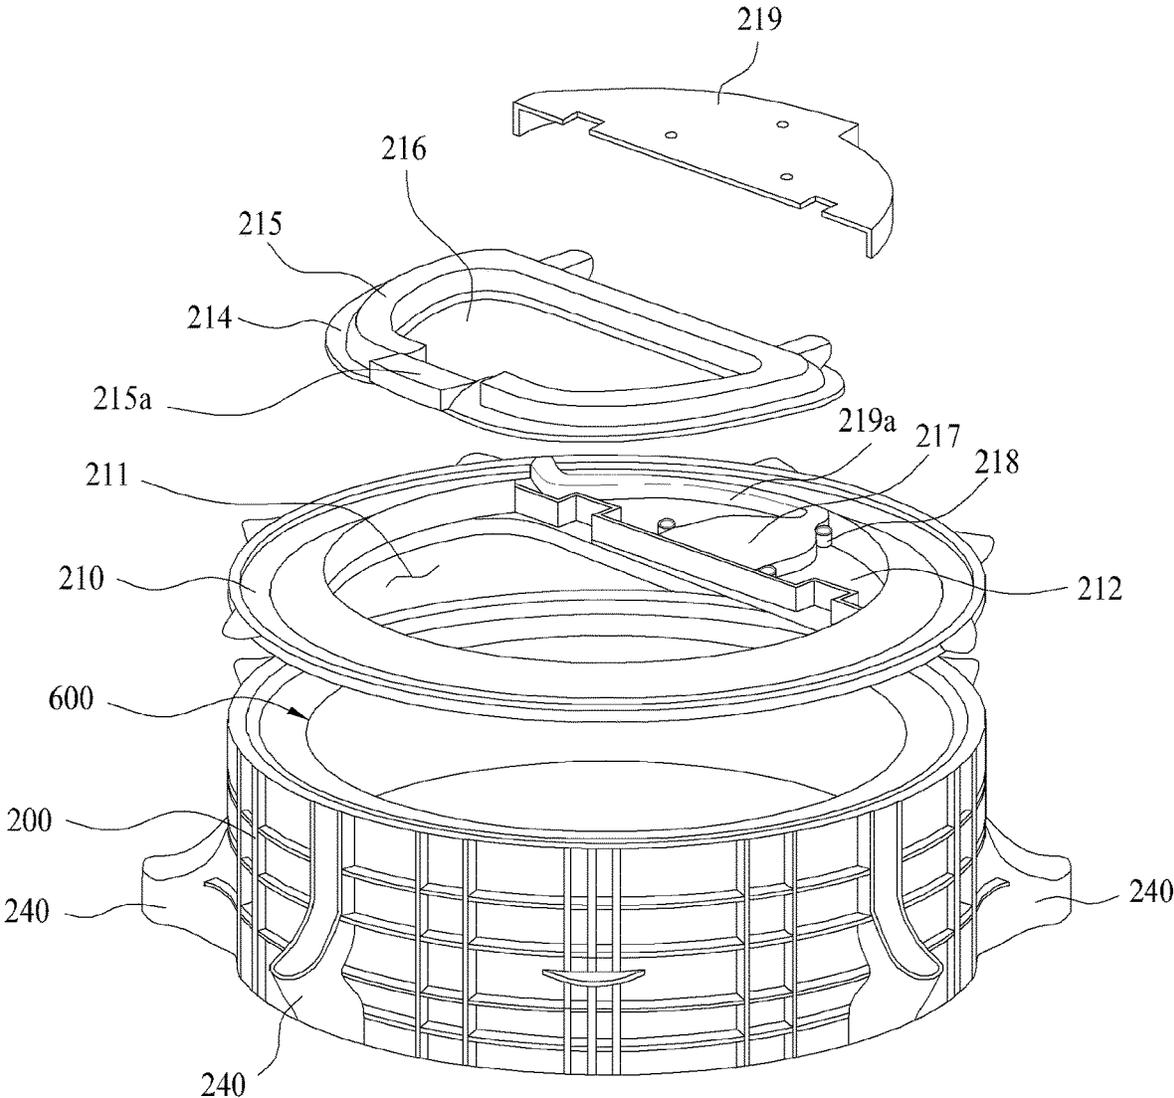


FIG. 14

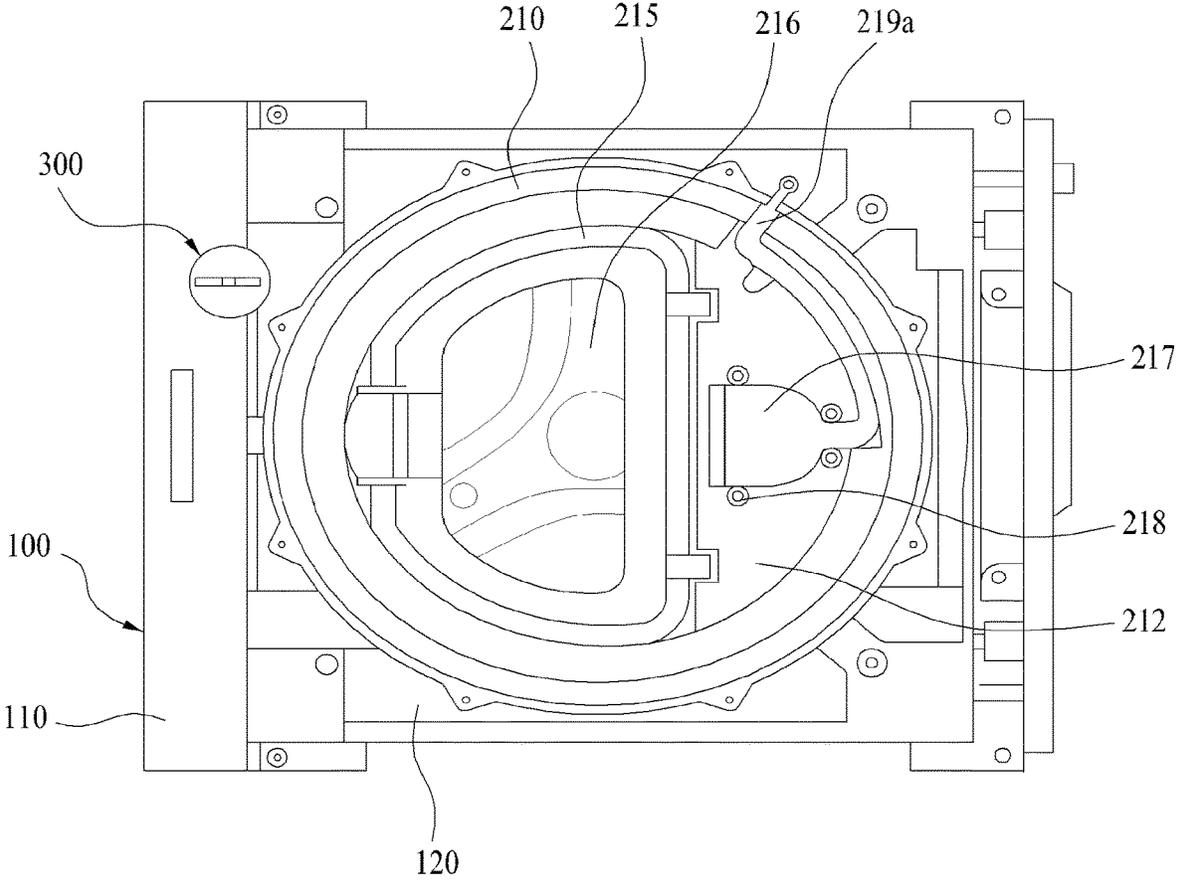


FIG. 15

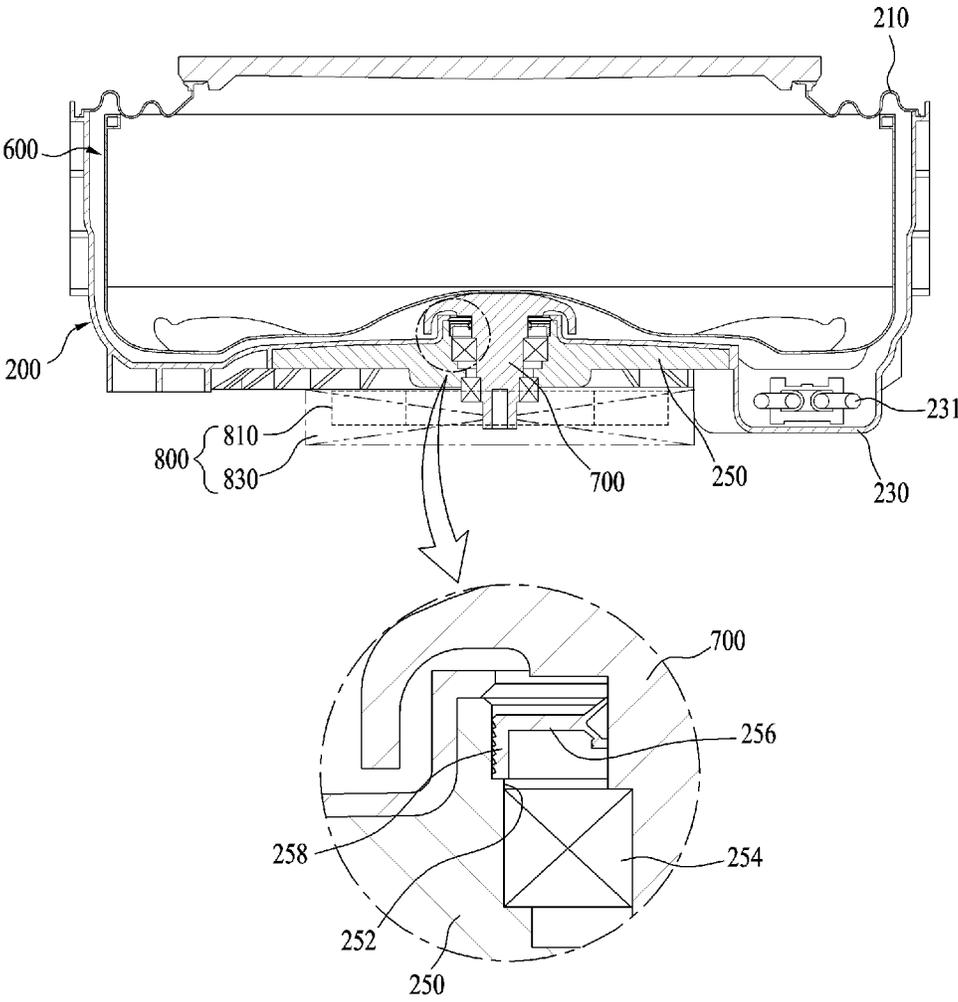


FIG. 16

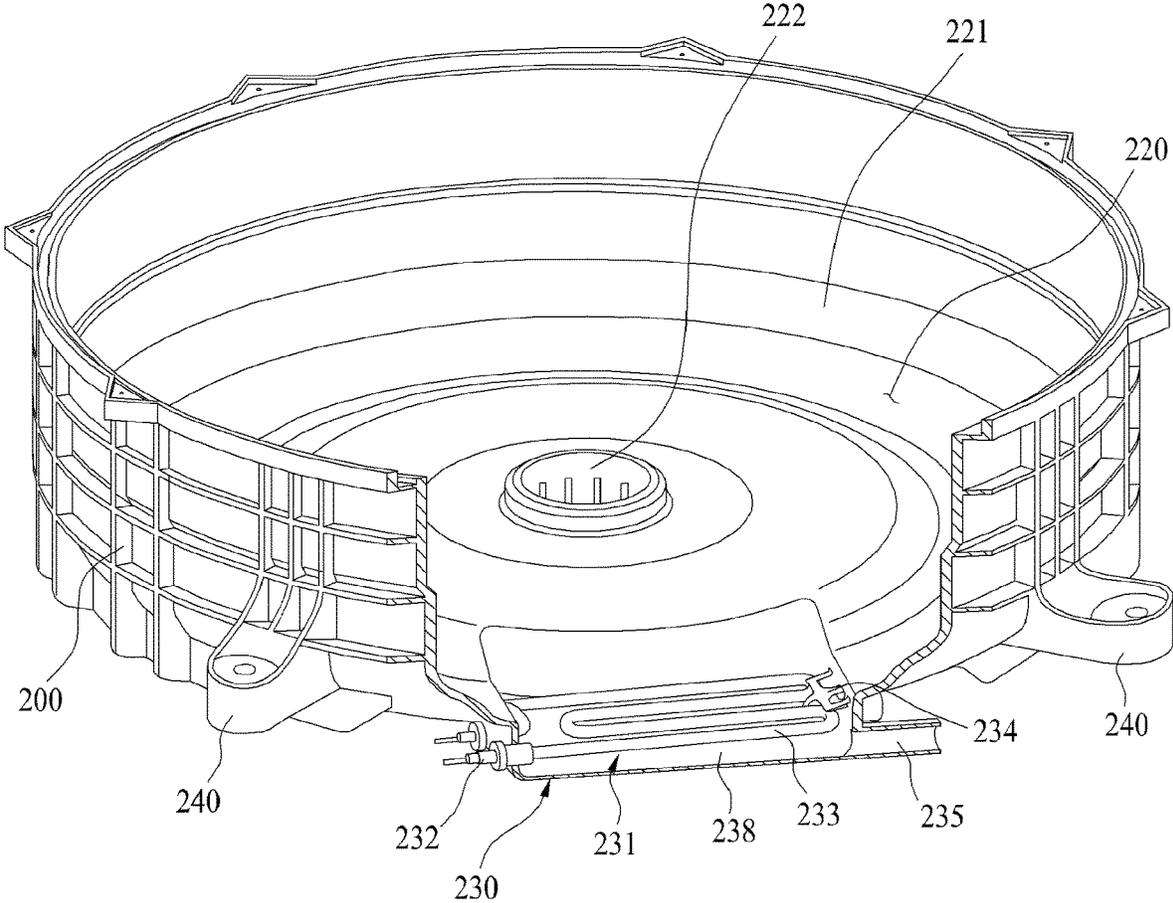


FIG. 17

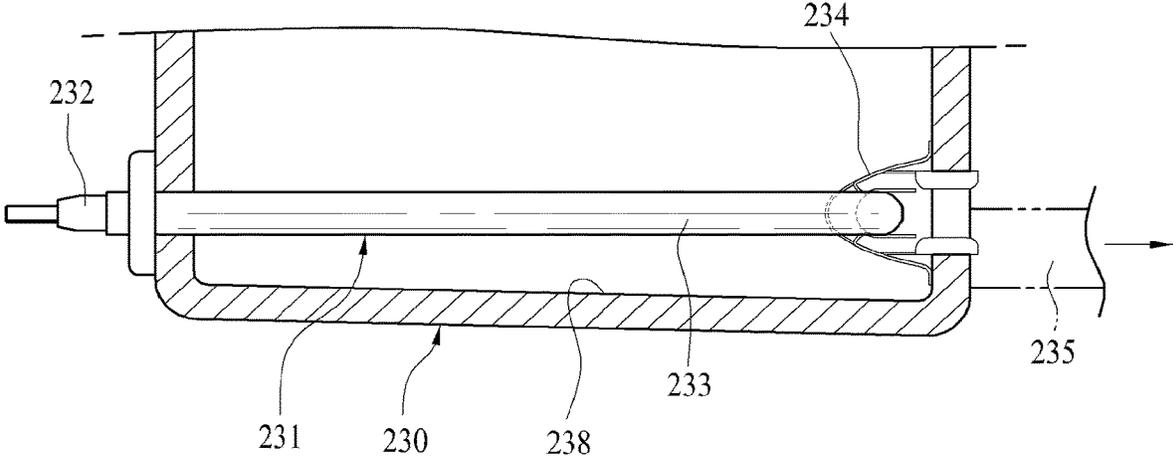


FIG. 18

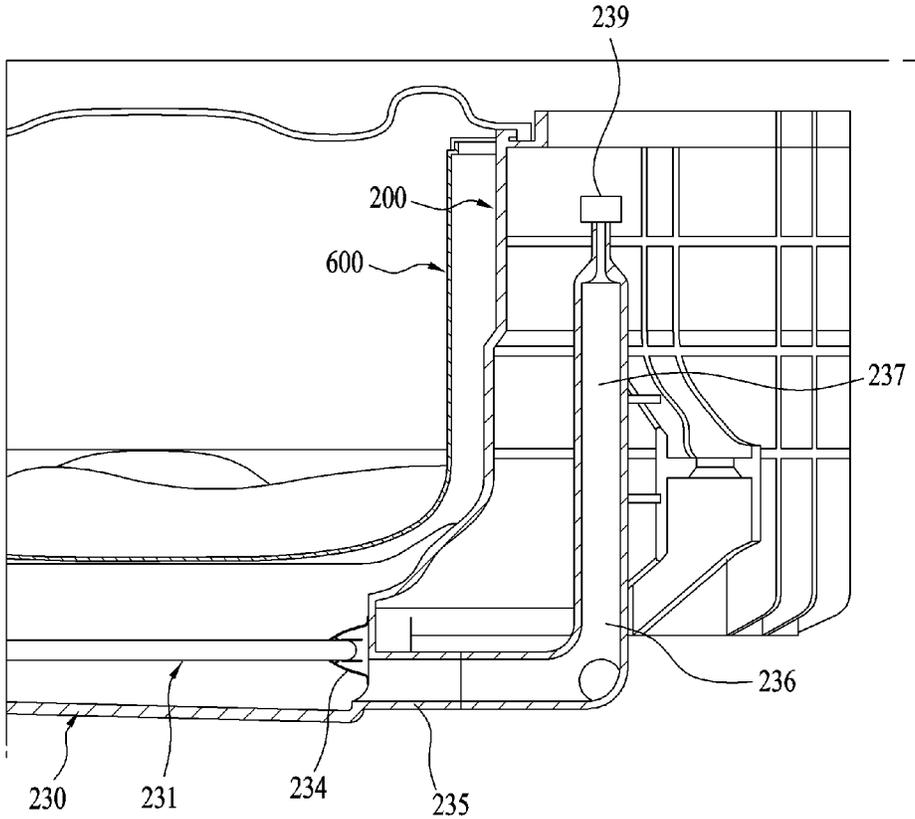


FIG. 19

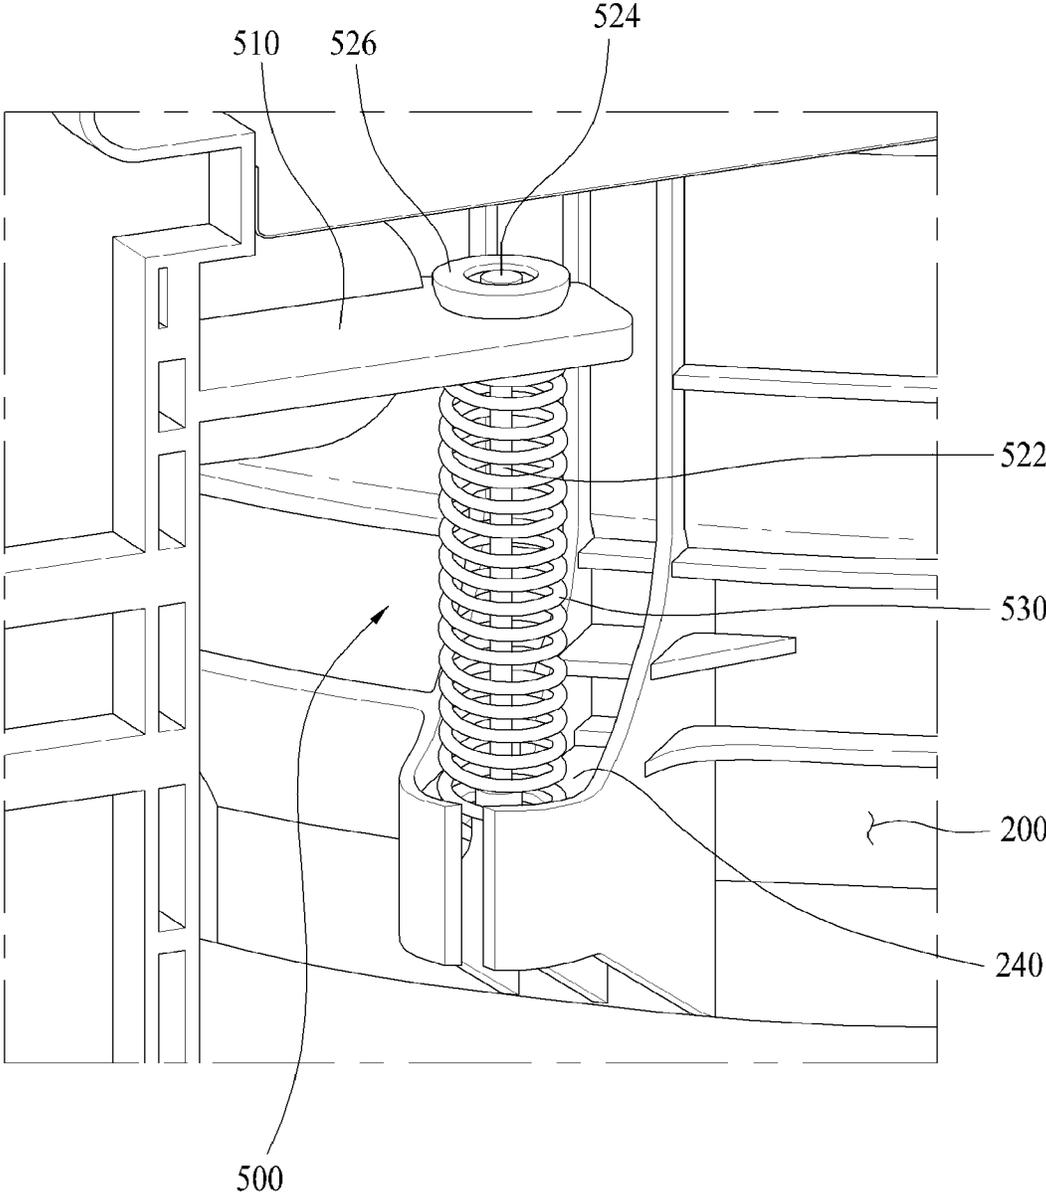


FIG. 20

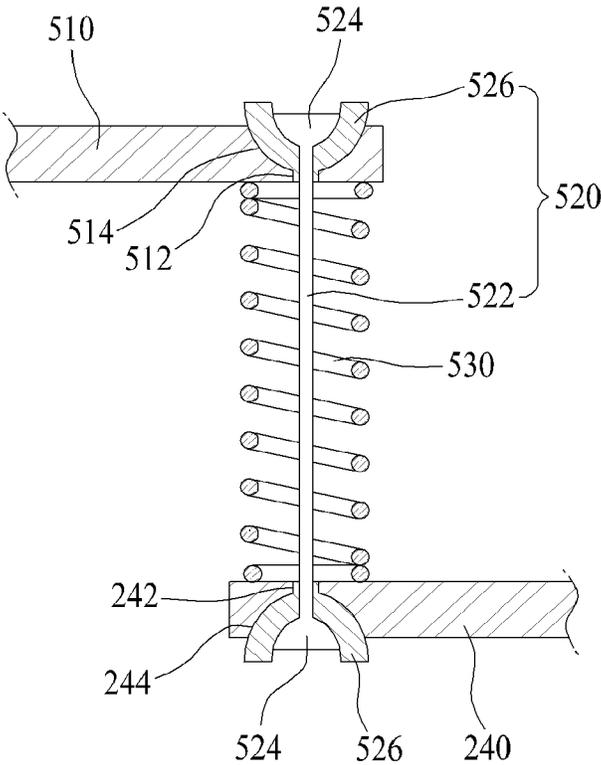


FIG. 21

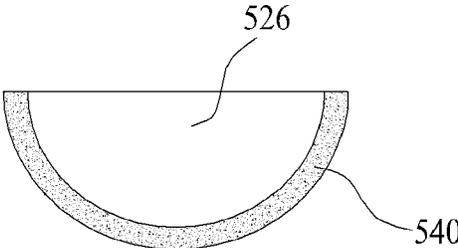


FIG. 22

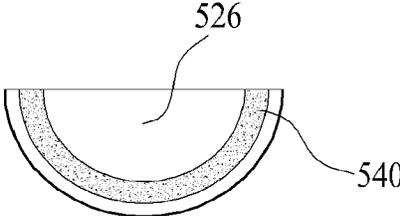


FIG. 23

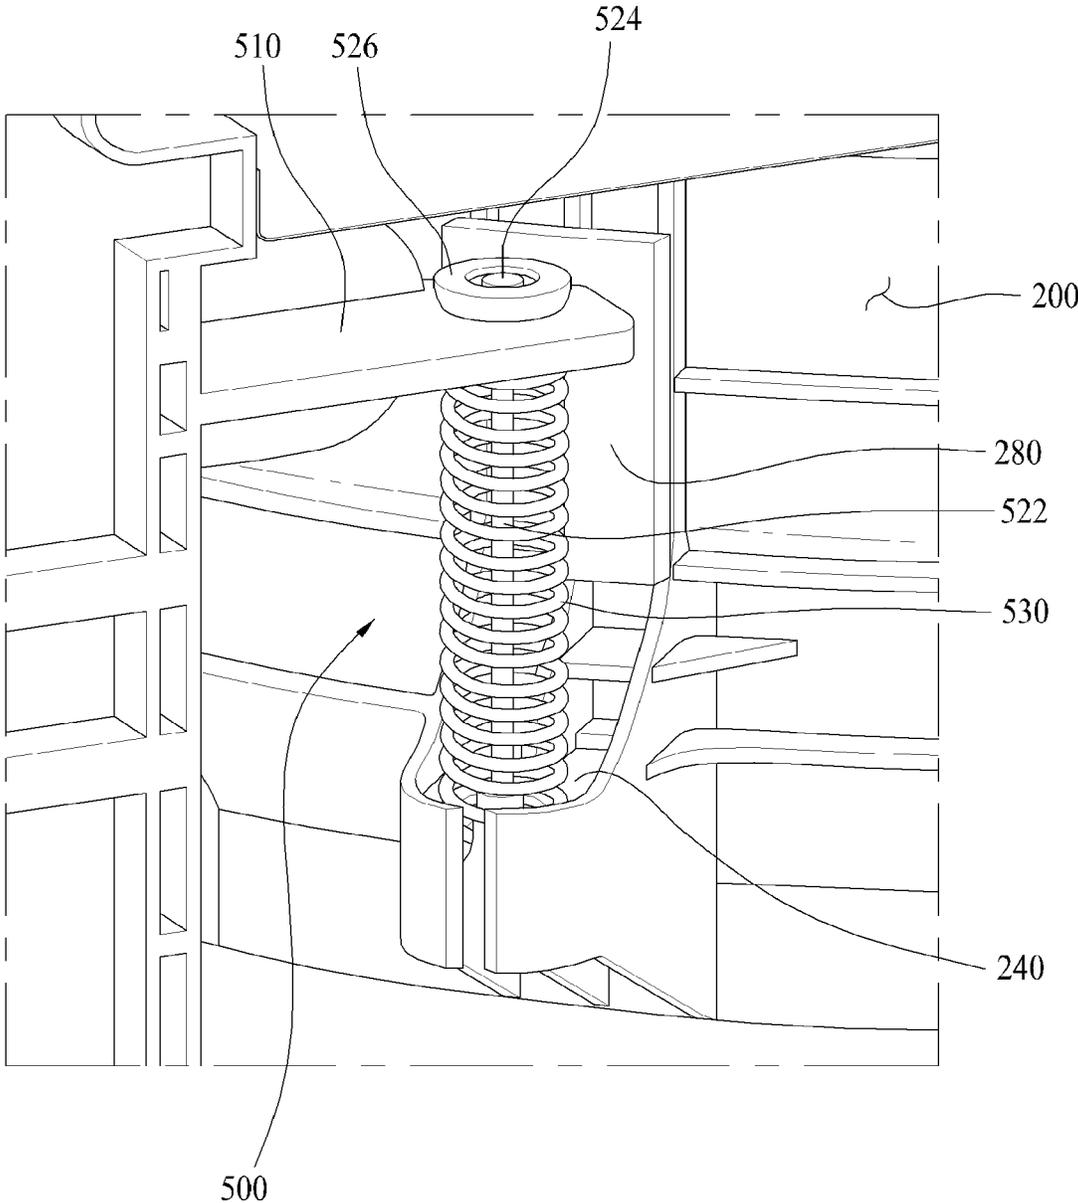


FIG. 24

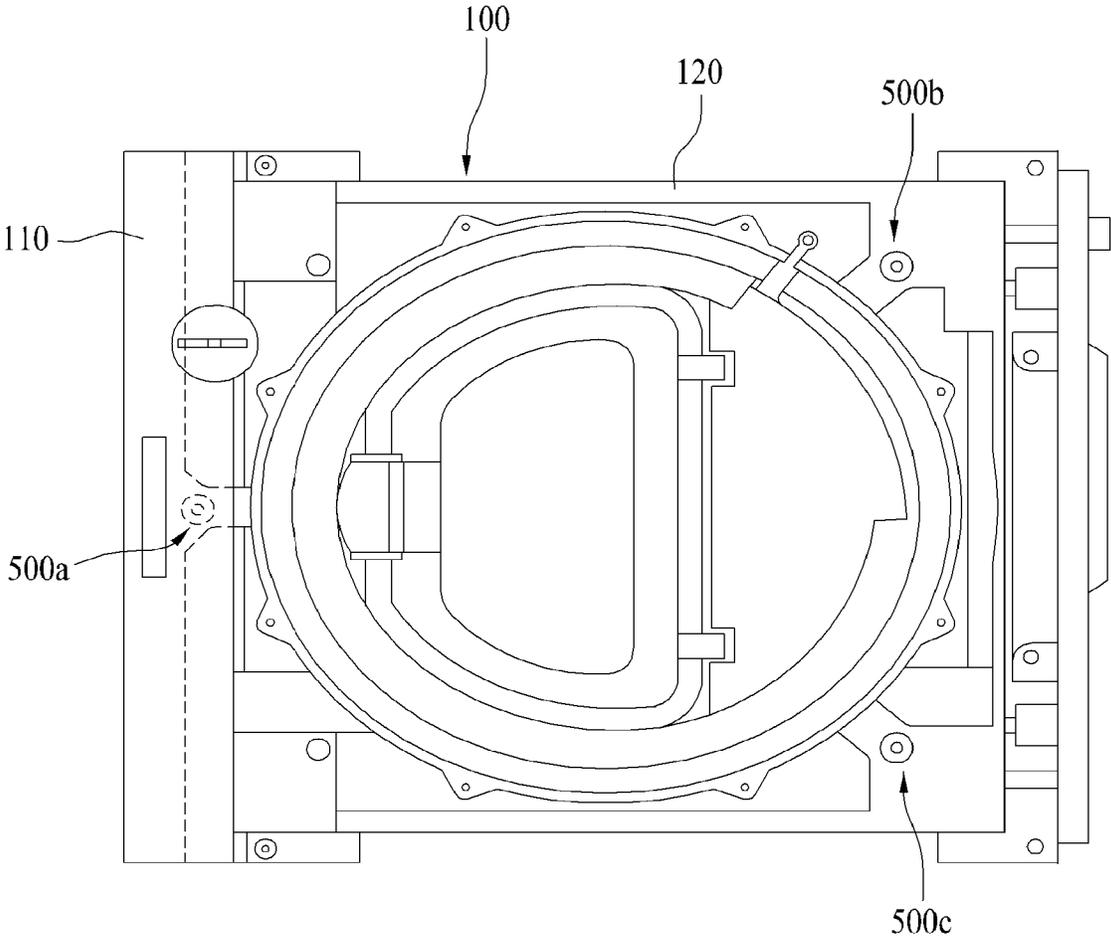


FIG. 25

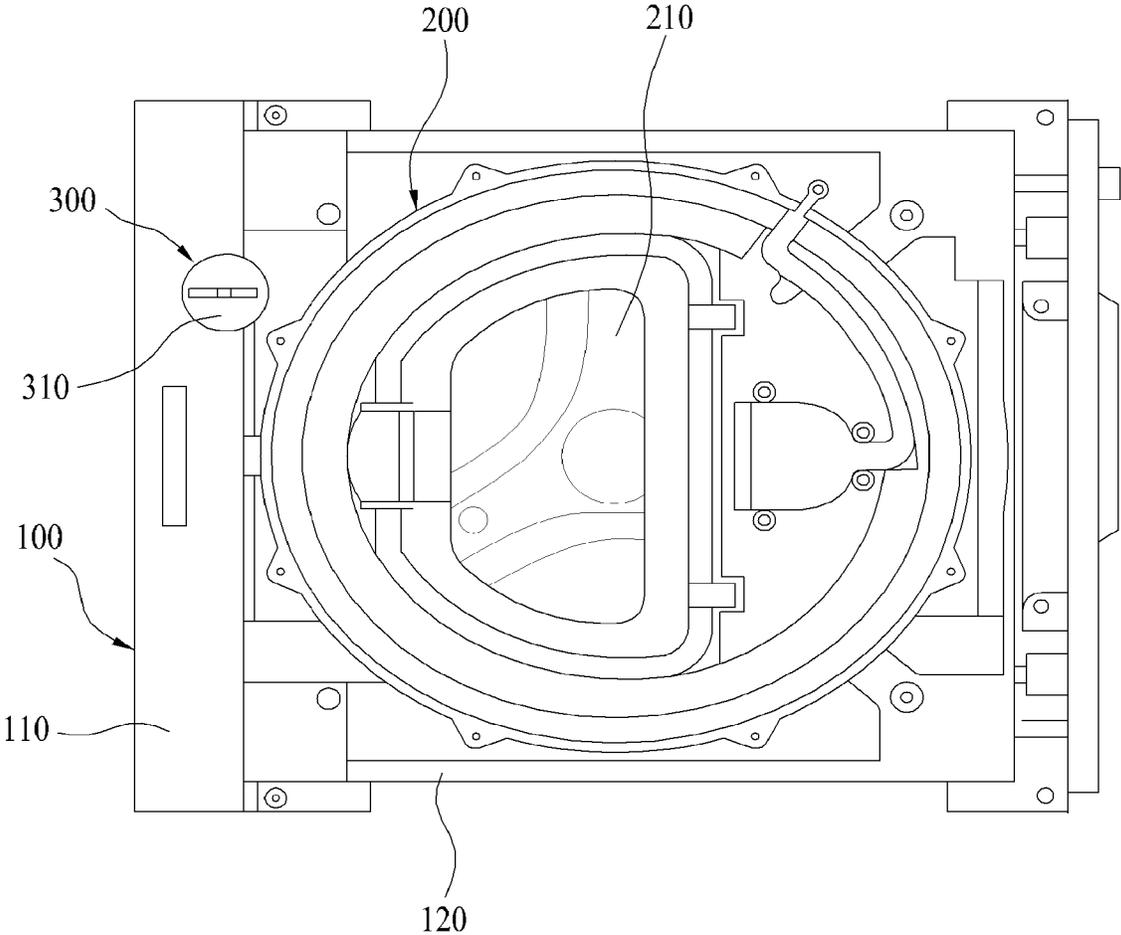


FIG. 26

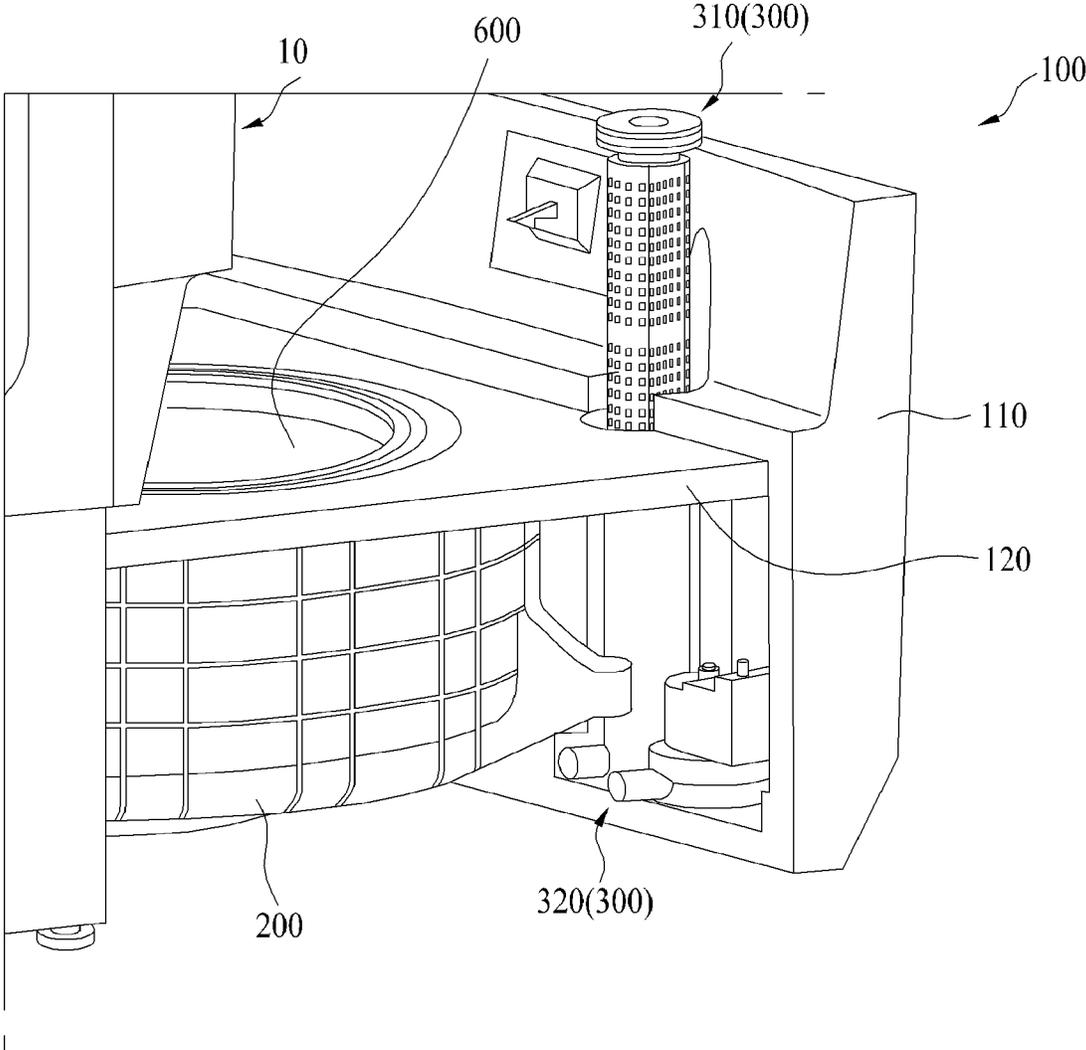


FIG. 27

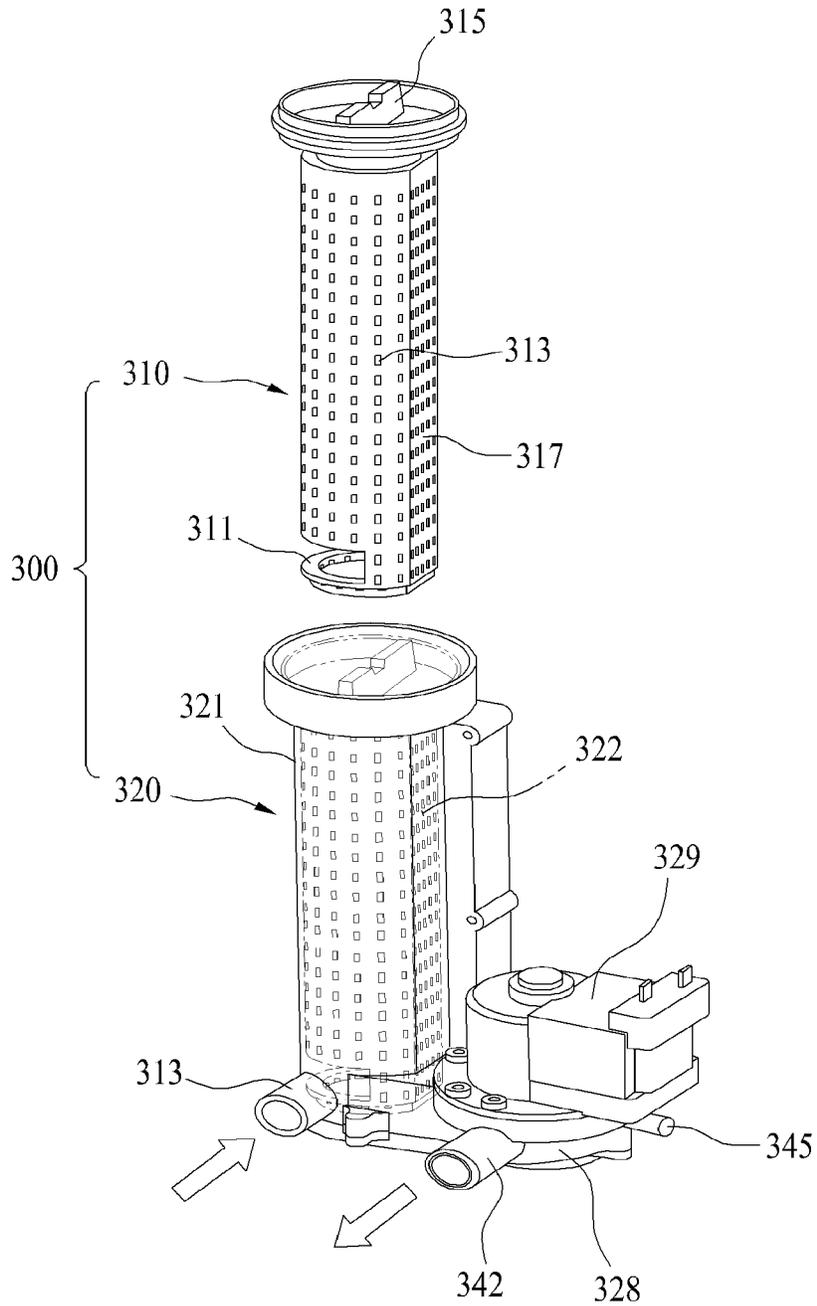


FIG. 28

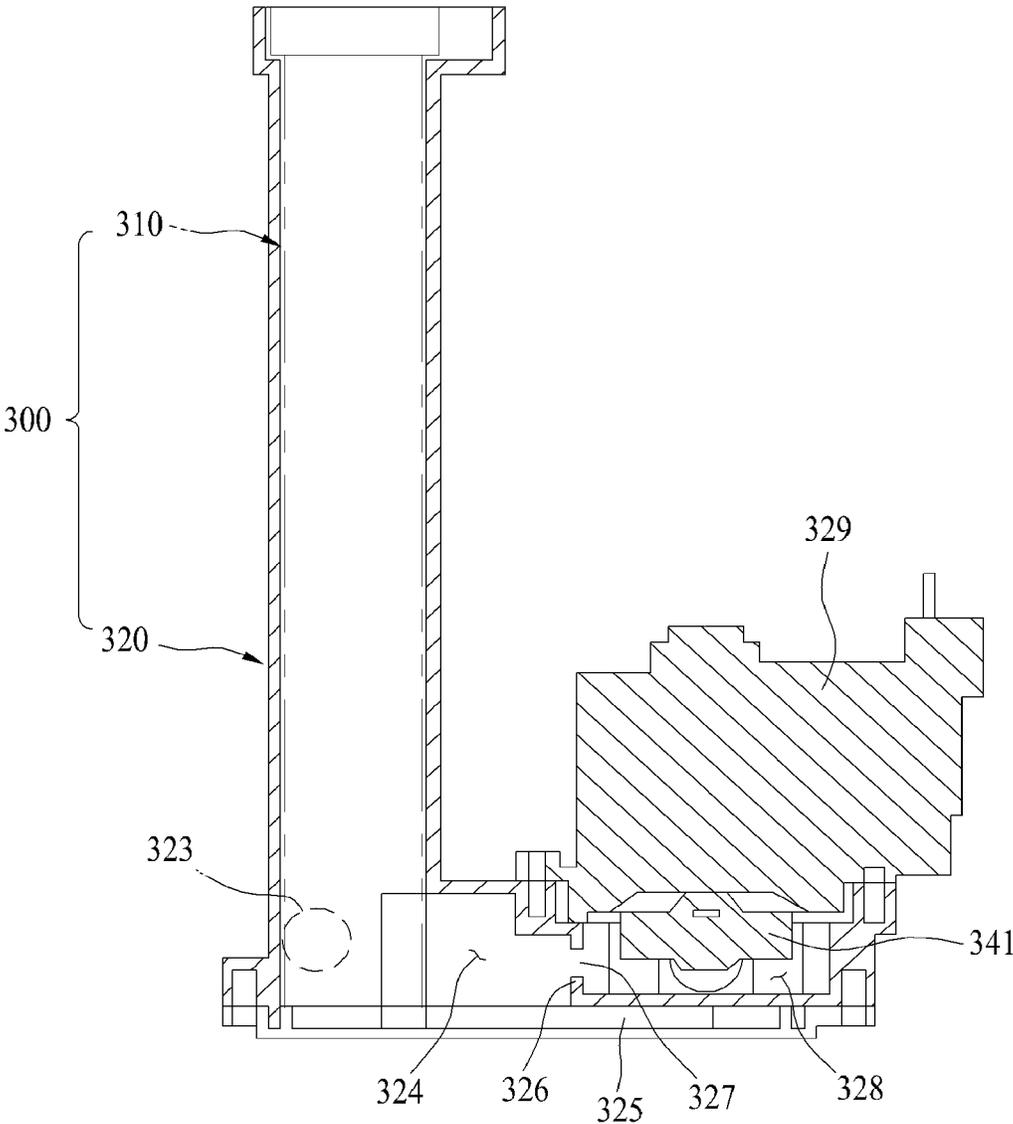


FIG. 29

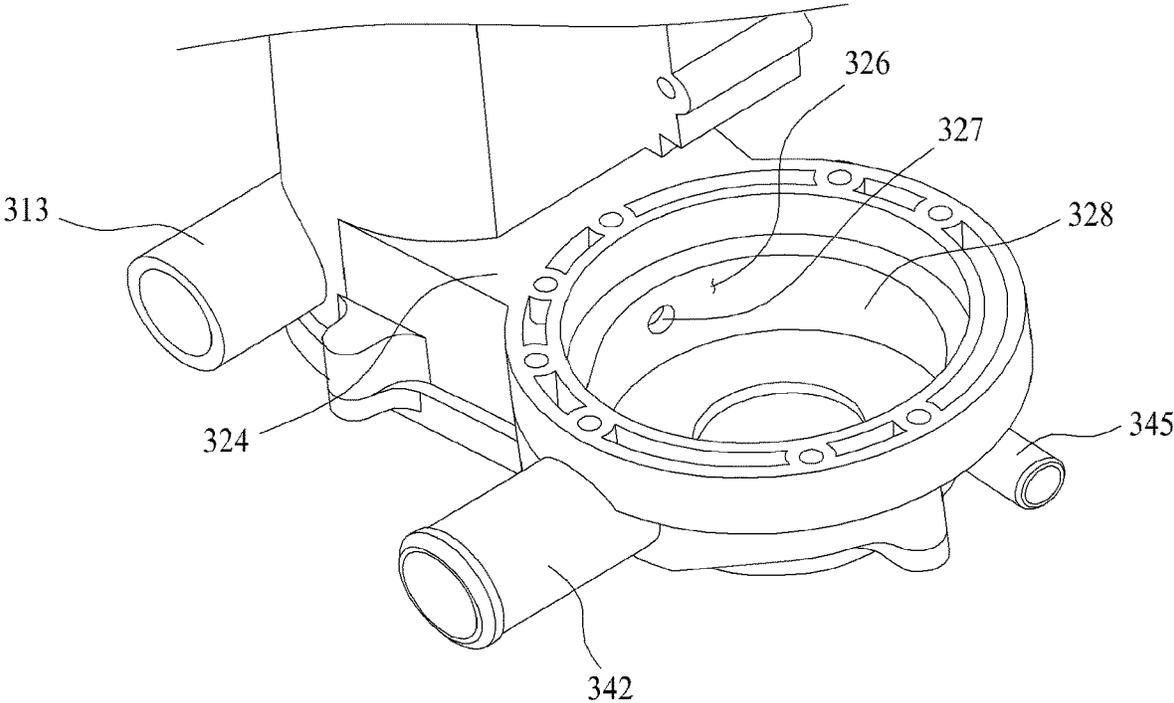


FIG. 30

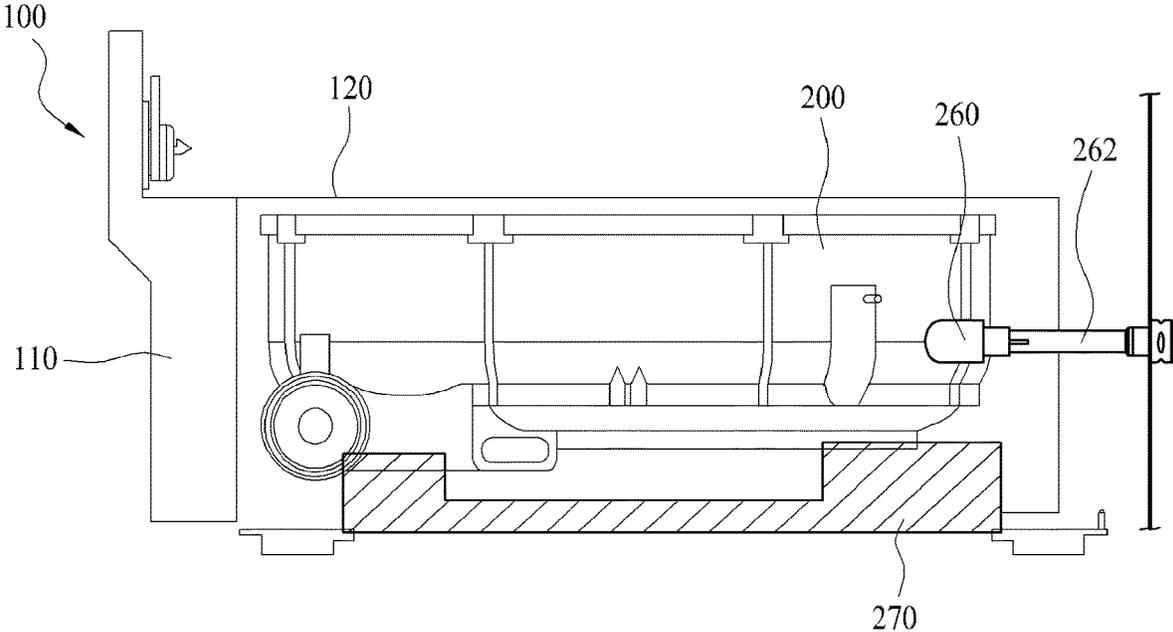


FIG. 31

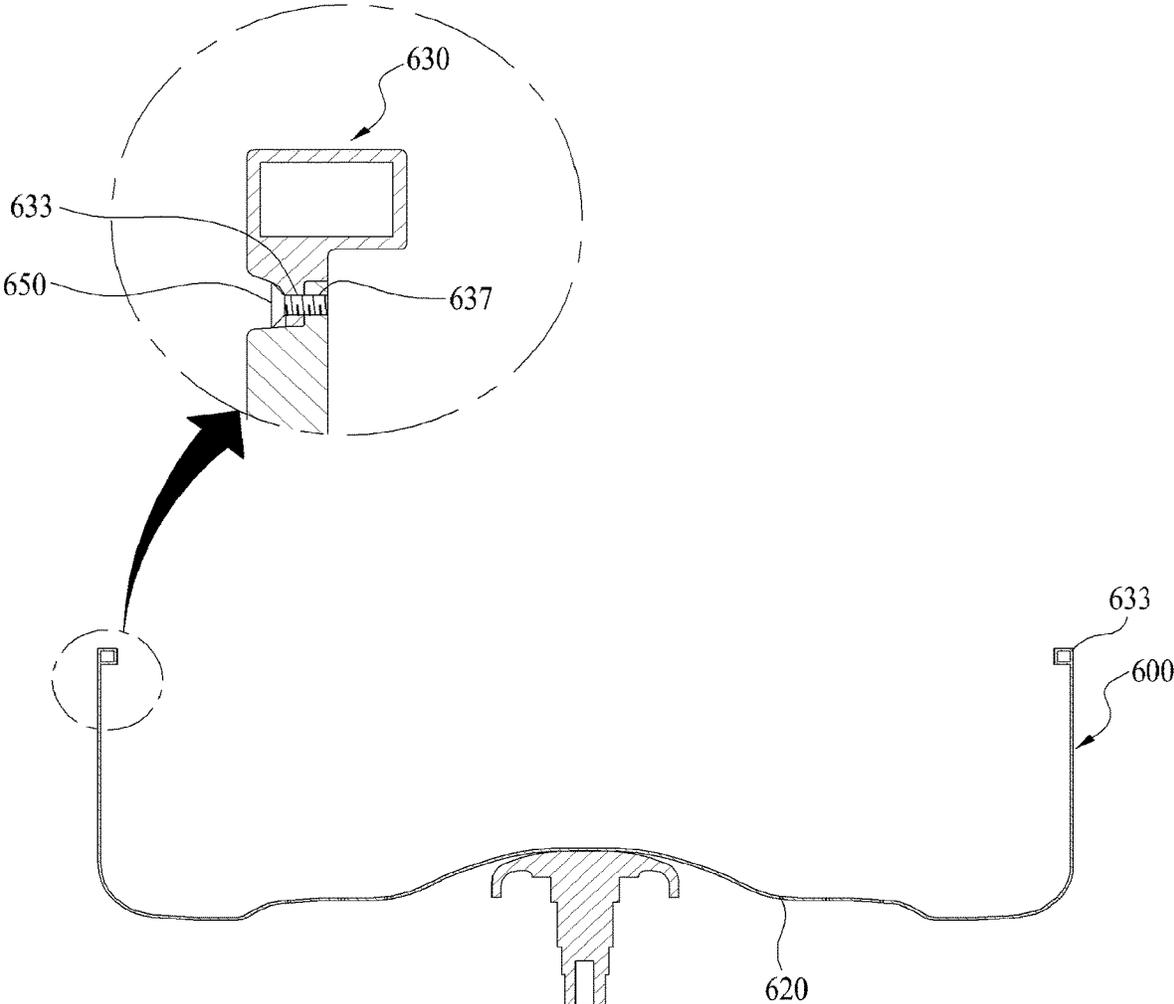


FIG. 32

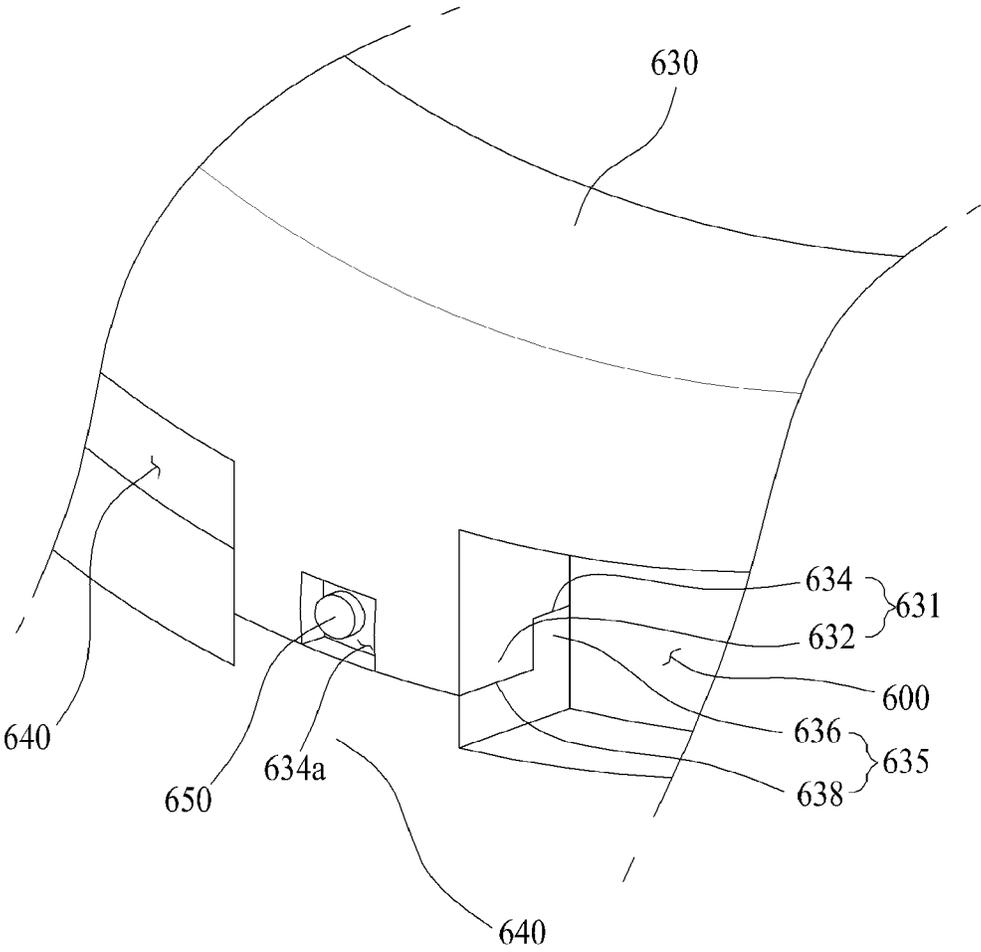


FIG. 33

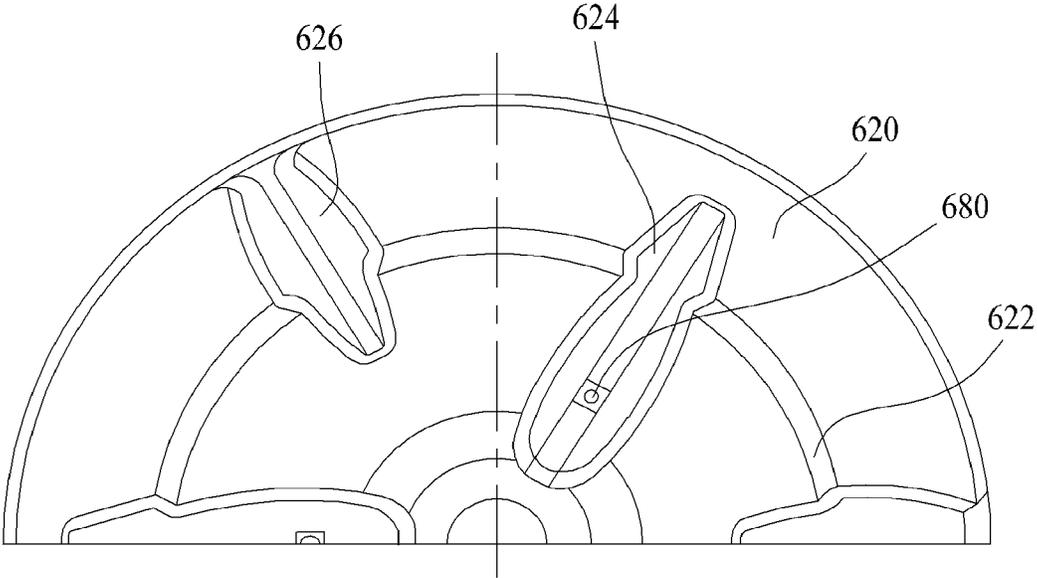


FIG. 34


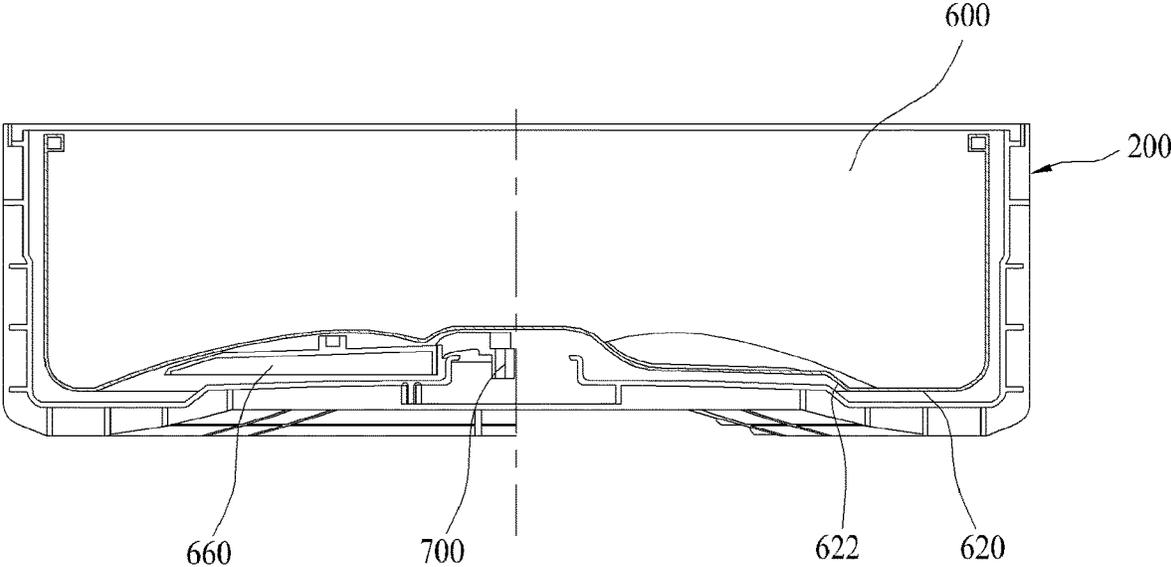


FIG. 35

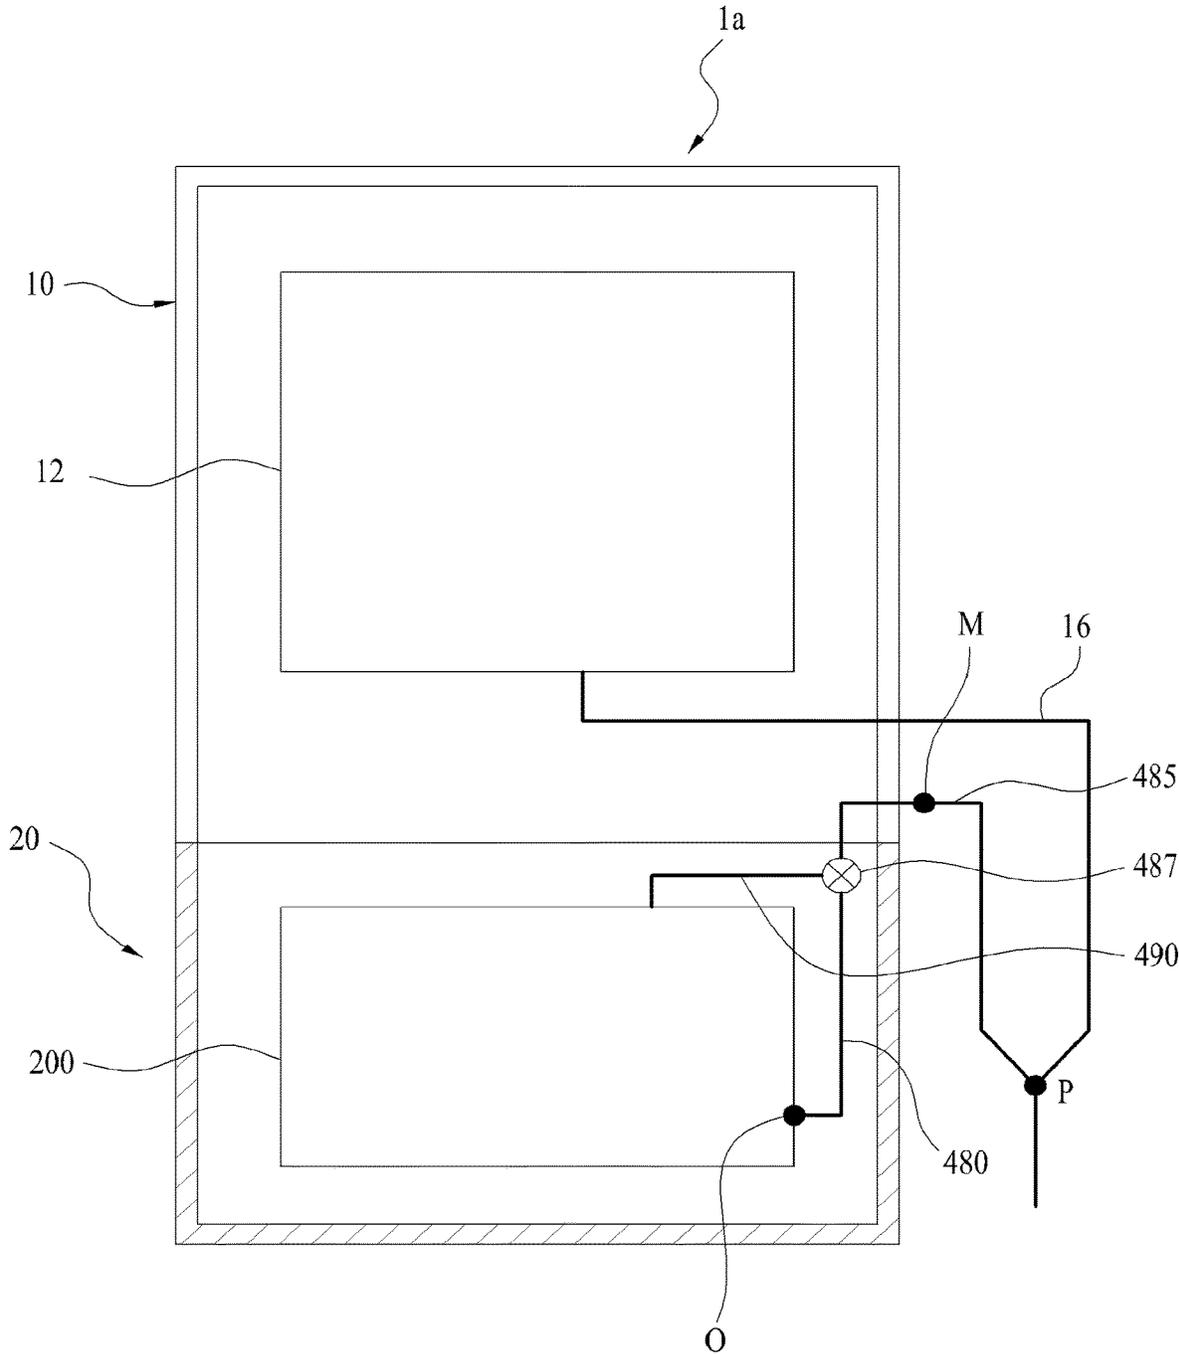

1

LAUNDRY MACHINE**CROSS REFERENCE TO RELATED APPLICATION**

This is a Divisional Application of U.S. patent application Ser. No. 15/251,970 filed on Aug. 30, 2016, which is a Divisional Application of U.S. patent application Ser. No. 13/097,934 filed on Apr. 29, 2011, now U.S. Pat. No. 10,081,898 issued on Sep. 25, 2018, and claims the benefit of Korean Application Nos. 10-2010-0040526, 10-2010-0040625, 10-2010-0040624 and 10-2010-0040527, all filed on Apr. 30, 2010 and Korean Application Nos. 10-2010-0042004 filed on May 4, 2010 and 10-2010-0050125 filed on May 28, 2010, all of which are incorporated by reference in their entirety as if fully set forth herein.

BACKGROUND OF THE DISCLOSURE**Field of the Disclosure**

Embodiments of the present invention relate to a laundry apparatus, more particularly, to a laundry apparatus including an auxiliary laundry device to treat clothes.

Discussion of the Related Art

In general, laundry apparatuses are electric appliances which can wash laundry by using both detergent and mechanical friction. Such laundry apparatuses can be used together with auxiliary devices for users to use them conveniently.

An auxiliary device may be provided beyond or below a washing apparatus and the auxiliary device provides a user with a variety of supplementary functions. However, the auxiliary devices are designed and manufactured as independent devices provided in the laundry apparatuses.

In the meanwhile, the laundry apparatus is directly installed in the floor. Especially, a front loading laundry apparatus has a laundry introduction opening located relatively low. Because of that, a user has an inconvenience when loading and unloading laundry into or out of the front loading laundry apparatus. To solve this inconvenience, a front loading laundry device has been proposed to include a stand provided there below.

Furthermore, various methods have been proposed to install an auxiliary laundry device in the stand, not simply using the stand as it is.

However, a lot of work may be required to use such a stand as an independent auxiliary device. Typically, the laundry apparatus having the auxiliary laundry device fails to have a good profile.

Compared with a main laundry device, the auxiliary laundry device utilizing the stand has various components configured to treat laundry which are installed in a relatively small space. Because of that, it is quite difficult to design and manufacture the auxiliary laundry device.

SUMMARY OF THE DISCLOSURE

Accordingly, embodiments of the present invention are directed to a laundry apparatus.

An object of an embodiment of the present invention is to provide a laundry apparatus including an auxiliary laundry device with an enhanced productivity and enhanced profile.

2

Another object of an embodiment of the present invention is to provide a laundry apparatus which can reduce vibration and noise, when the laundry apparatus includes an auxiliary laundry device.

5 A further object of further embodiments of the present invention is to provide a laundry apparatus which allows an inner configuration of an auxiliary laundry device to be installed efficiently, even if an inner space of the auxiliary laundry device is quite narrow.

10 Additional advantages, objects, and features of the disclosure will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following.

15 To achieve these objects and other advantages in accordance with the purpose of the invention, as embodied and broadly described herein, a laundry apparatus includes a cabinet; a first space provided in the cabinet, the first space in which a first treating part provided to treat laundry is installed; a second space provided in the cabinet, the first space in which a second treating part provided to treat laundry is installed; a drawer movably provided in the second space, the drawer in which the second treating part is installed; and a rail unit configured to limit vertical and horizontal movement of the drawer with respect to the second space to guide the outward movement of the drawer.

20 It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are included to provide a further understanding of the disclosure and are incorporated in and constitute a part of this application, illustrate embodiment(s) of the disclosure and together with the description serve to explain the principle of the disclosure.

40 In the drawings:

FIGS. 1 and 2 are perspective views illustrating a laundry apparatus according to an exemplary embodiment of the present invention;

45 FIG. 3 is a perspective view illustrating a bottom surface of the laundry apparatus;

FIG. 4 is an exploded perspective view illustrating a drawer provided in the laundry apparatus;

FIGS. 5 and 6 are perspective views illustrating a rail of the laundry apparatus;

50 FIG. 7 is a side sectional view illustrating a second cabinet of the laundry apparatus;

FIG. 8 is a perspective view illustrating an installation state of a rear lock provided in the laundry apparatus;

55 FIG. 9 is a sectional view illustrating the rear lock of the laundry apparatus;

FIG. 10 is a rear view illustrating a water supply and drainage device of the laundry apparatus;

FIG. 11 is a side view illustrating the water supply and drainage device of the laundry apparatus;

60 FIG. 12 is a plane view illustrating the water supply and drainage device of the laundry apparatus;

FIG. 13 is an exploded perspective view illustrating a second tub of the laundry apparatus;

65 FIG. 14 is plane view illustrating the second tub of the laundry apparatus;

FIG. 15 is a sectional view illustrating the second tub and a second drum of the laundry apparatus;

FIG. 16 is partially sectional view illustrating the second tub and the second drum of the laundry apparatus;

FIG. 17 is a sectional view illustrating a heater sump of the laundry apparatus;

FIG. 18 is a sectional view illustrating an air chamber of the laundry apparatus;

FIG. 19 is a partially perspective view illustrating a second tub supporting device of the laundry apparatus;

FIG. 20 is a sectional view illustrating the second tub supporting device of the laundry apparatus;

FIGS. 21 and 22 are sectional view illustrating a connected portion of the second tub supporting device;

FIG. 23 is a partially perspective view illustrating another embodiment of the second tub supporting device;

FIG. 24 is a plane view illustrating a second tub supporting device of the second tub supporting device according to another embodiment;

FIG. 25 is a plane view illustrating an installation location of a drainage pump provided in the laundry apparatus;

FIG. 26 is a perspective view illustrating an installation state of the drawing pump;

FIG. 27 is an exploded perspective view illustrating the drainage pump of the laundry apparatus;

FIG. 28 is a sectional view illustrating the drawing pump of the laundry apparatus;

FIG. 29 is a perspective view illustrating a drainage chamber of the drainage pump provided in the laundry apparatus;

FIG. 30 is a side sectional view illustrating a fixing state of the second tub provided in the laundry apparatus;

FIG. 31 is a sectional view illustrating a second drum of the laundry apparatus;

FIG. 32 is a perspective view illustrating a side wall of the second drum provided in the laundry apparatus;

FIG. 33 is a plane view illustrating a base of the second drum provided in the laundry apparatus;

FIG. 34 is a side sectional view illustrating the base of the second drum; and

FIG. 35 is a conceptual diagram illustrating a drainage structure of the laundry apparatus.

DETAILED DESCRIPTION

Exemplary embodiments of the present invention will be explained in reference to the accompanying drawings.

Reference will now be made in detail to the specific embodiments of the present invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

As shown in FIGS. 1 and 2, a laundry apparatus 1 includes a cabinet 1a configured to define a profile of the laundry apparatus 1. The cabinet 1a includes a first cabinet 10 where a first treating part 10a for treating laundry is formed and a second cabinet 20 where a second treating part 20a provided adjacent to the first cabinet 10 is formed to treat laundry.

In other words, a user loads laundry into the first cabinet 10 and/or the second cabinet 20 to perform washing, drying or refreshing. Here, the terminology 'refresh' may refer to a process of wrinkle removing, deodorizing, sanitizing, static electricity preventing or laundry warming, which uses air, heated air, steam, mist or water elements supplied to the laundry. In addition, clothes and laundry which will be mentioned in the present specification includes wearable objects including clothes, apparel, shoes, socks, gloves and hats and all kinds of washable objects having a washing process performed thereto.

In the meanwhile, the first treating part 10a may include a first tub (not shown) and/or a first drum (not shown) provided therein to wash laundry, that is, to perform washing, drying or refreshing with respect to the laundry, as mentioned above.

The second treating part 20a may include a second tub (200, see FIG. 16) configured to hold wash water therein and a second drum (600, see FIG. 16). The second treating part 20a may be provided adjacent to the first treating part 10a and it may be provided in a predetermined portion near the first treating part 10a. For example, the second treating part 20a may be provided below the first treating part 10a.

When the second treating part 20a is provided together with the first treating part 10a for washing the laundry, the first treating part 10a and the second treating part 20a may have the same washing capacity.

However, considering limitation of an installation space for the laundry apparatus 1 and production cost of the laundry apparatus 1, either of the first and second treating parts 10a and 20a may have a smaller capacity than the other one.

As shown in drawings, this embodiment illustrates that at least one of a washing capacity, a volume, or a height of the second treating part 20a may be smaller than at least one of a washing capacity, a volume or a height of the first treating part 10a. Because of that, the user may select one of the first and second treating parts 10a and 20a properly according to the amount of the laundry.

Moreover, the user may select the first treating part 10a or the second treating part 20a according to the types of laundry items. For example, sensitive laundry items such as infant clothes and lingerie which have to be separately washed or a small amount of laundry items may be washed by using the second treating part 20a and the other types of the laundry items may be washed in the first treating part 10a.

When the second treating part 20a is configured to have a smaller washing capacity than the first treating part 10a, the second treating part 20a may be provided below the first treating part 10a. Since the height of the first treating part 10a is increased by the second part 20a provided below the first treating part 10a, the user may load or unload the laundry into or out of the first treating part 10a more smoothly and more efficiently.

Moreover, when the laundry apparatus 1 includes the first treating part 10a and the second treating part 20a, the first cabinet 10, where the first treating part 10a is installed, and the second cabinet 20, where the second treating part 20a is installed, may be manufactured independently and connected with each other.

However, considering manufacture efficiency, in other embodiments the first cabinet 10, having the first treating part 10a installed therein, may be integrally formed with the second cabinet 20, having the second treating part 20a installed therein, to be a single cabinet 1a. In other words, a single cabinet 1a is shared and the first and second treating parts 10a and 20a may be provided in the single cabinet 1a. In this case, a partition wall (not shown) may be provided between the first treating part 10a and the second treating part 20a to separate them from each other.

Here, an internal space of the cabinet 1a may be partitioned off into the first and second cabinets 10 and 20 by the partition wall mentioned above. In some embodiments, the partition wall may include a predetermined opening (not shown) to allow the first treating part 10a and the second treating part 20a to communicate with each other.

In addition, configuration components provided in the second treating part **20a** may be extended to an inside of the first treating part **10a** via the opening. In other embodiments, configuration components provided in the first treating part **10a** may be extended to an inside of the second treating part **20a** via the opening.

As follows will be described an embodiment presenting that the first treating part **10a** and the second treating part **20a** are formed integrally as one body.

The first treating part **10a** may include a first door which can be opened selectively. The user can open the first door **15** to load the laundry into the first treating part **10a**.

A variety of components which will be described later may be provided in the second treating part **20a**. However, the components may have a structure with an easy access for users' convenience, maintenance and the like.

For example, as shown in the drawings, the second treating part **20a** may include a drawer **100** which can slide inward and outward. The drawer **100** is provided slidably such that the user may draw the drawer **100** forward to have an access to the inside of the second treating part **20a**.

As follows, the drawer of the second treating part according to the present invention will be described in detail in reference to the accompanying drawings.

In reference to FIGS. **2** and **3**, the drawer **100** may slide along an entry and exit space formed in the second cabinet **20** to open and close.

The laundry apparatus according to this embodiment includes a pair of side rail units **130** provided between the drawer **100** and the second cabinet **20** to guide the inward and outward movement of the drawer **100**. Especially, the laundry apparatus includes a lower rail unit **140** provided underneath the drawer **100**.

In the meanwhile, the side rail units **130** are provided between both side surfaces of the drawer **100**. The second cabinet **20** may limit upward and downward motion of the drawer **100** and may guide the inward and outward motion of the drawer **100**. The lower rail unit **140**, provided between a bottom surface of the drawer **100** and the second cabinet **20**, limits leftward and rightward motion of the drawer **100** and guides the inward and outward motion of the drawer **100**.

In reference to FIG. **4**, the drawer **100** is configured of a front portion **110**, forming a front surface of the drawer **100**, and a housing **120** where the second treating part **20a** will be installed. The front portion **110** is formed of a rectangular plate with a predetermined thickness and it is coupled to a front surface of the housing **120**. A handle **112** is formed in a front surface of the front portion **110** to allow the user to grasp, when the user is moving to open and close the drawer **100**.

As follows, the side rail units **130** installed between the housing **120** of the drawer **100** and the second cabinet **20** will be described in detail. Here, the side rail units **130** are symmetrically installed to both sides of the housing **120** in the same structure. Because of that, one of the rail units will be described first and description of the other rail unit will be omitted.

Side brackets **131** are provided in both sides of the housing **120**, to be coupled to the side rail units **130**, respectively. The side bracket **131** is formed of a bar having a predetermined length and it includes a front recess **132a** and a rear recess **133a** formed therein.

A front hooking member **132b** is formed in the front recess **132a** and a rear hooking member **133b** is formed in

the rear recess **133a**. The rear hooking member **133b** is bent in an 'L' shape and the front hooking member **132b** is formed straight.

The side rail unit **130** includes a moving rail **134** secured to the drawer **100**, a fixed rail **137** secured to an inner surface of a side panel **13** provided in the second cabinet **20** and a middle rail **138** secured between the moving rail **134** and the fixed rail **137**. A front coupling portion **135** and a rear coupling portion **136** are projected from a side of the moving rail **134**. Recesses or holes are formed in the front and rear coupling portions **135** and **136** to insert the front and rear hooking members **132b** and **133b** therein. It is preferable that the rear coupling portion **136** is coupled to the rear hooking member **133b** of the side bracket **132** and has a partially open top to prevent the inserted rear hooking member **133b** from being separated.

The moving rail **134** of the side rail unit **130** is secured to the side bracket **131** provided on the side of the housing **120**, the front hooking member **132b** and the rear hooking member **133b** of the side bracket **131** are inserted in the front and rear coupling portions **135** and **136** formed in the inner surface of the moving rail **134**, such that the drawer **100** may be secured to the moving rail **134**.

The fixed rail **137** of the side rail unit **130** is fixed to an inner surface of the side panel **13** provided in the second cabinet **20**. The fixed rail **137** may be fixed to the side panel **13** by a bolt or a screw. A location where the fixed rail **137** is secured is corresponding to a location where the moving rail **134** is secured. Here, the middle rail **138** is secured between the fixed rail **137** and the moving rail **134**.

The front hooking member **132b** is projected from a front portion of a lower surface of the side bracket **131** and the rear hooking member **133b** is projected from a rear portion thereof. A predetermined portion of the side bracket **131** may be cut out or bent to form the front and rear hooking members **132b** and **133b**.

In the meanwhile, the shapes of the front and rear hooking members **132b** and **133b** may be only an example and the present invention is not limited thereto. In other words, the front and rear hooking members **132b** and **133b** may be members used to secure the bracket to the moving rail and shapes of them may be varied properly.

A lower bracket **141** is provided in a bottom of the housing **120** to be secured to the lower rail unit **140**. Compared with the side rail unit **130**, the lower rail unit **140** has the same configuration, except a moving rail **144** having a different appearance. Front and rear coupling portions **145** and **146** are formed in an upper surface of the moving rail **144** to couple the lower bracket **141** thereto. The front and rear coupling portions **145** and **146** may be recesses or holes. The moving rail **144** of the lower rail unit **140** is secured to the lower bracket **141** provided in the bottom of the housing **120**. Front and rear hooking members **142** and **143** formed in the lower bracket **141** are inserted in the front and rear coupling portions **145** and **146** formed in the moving rail **144**, such that the drawer **100** may be secured to the moving rail **144**.

A fixed rail **147** of the lower rail unit **140** is fixed to an inner surface of a base (not shown) composing the second cabinet **20**. The fixed rail **147** may be fixed to the base by a bolt or a screw. A location where the fixed rail **147** is secured corresponds to a location where the moving rail **144** is secured. Together with that, a middle rail **148** is secured between the fixed rail **147** and the moving rail **144**.

Typically, the second treating part **20a** installed in the housing **120** is a top loading laundry device. The top loading laundry apparatus **100** includes a shaft **700** of a second drum

600 which is arranged perpendicular to the ground. When the second treating part 20a is put into operation, with the drawer 100 moved inwardly in the second cabinet 20, vibration would be generated in the second treating part 20a by the rotation of the second drum 600. Since the shaft 700 of the second drum 600 is arranged perpendicularly with respect to the ground, a lot of vibration might be generated in the drawer 100 including the second drum 600 in a direction parallel to the ground. Especially, this vibration is generated during a spinning cycle and more vibration is generated when the second drum 600 is eccentric.

When the side rail units 130 are secured to the drawer 100, the drawer 100 can move to a single degree of freedom along a forward and backward direction. In other words, vertical motion of the drawer 100 is limited by the securing of the moving rail 134, the middle rail 138 and the fixed rail 137 composing the side rail unit 130 and horizontal motion is also limited. However, the moving rail 134, the middle rail 138 and the fixed rail 137 composing the side rail unit 130 are secured to each other, spaced apart a predetermined distance from each other. Because of that, the drawer 100 can be moved along a leftward and rightward direction as much as the spaced distance and it might be vibrated in the leftward and rightward direction by the rotation of the second drum 600. The vibration is transferred to the laundry apparatus 1 including the first treating part 10a. As a result, durability of the laundry apparatus 1 will deteriorate and noise might be generated.

However, this embodiment of the present invention includes the lower rail unit 140, to limit the horizontal vibration of the drawer 100. In other words, the lower rail unit 140 not only guides the inner and outer motion of the drawer 100 but also limits the leftward and rightward vibration of the drawer 100. As a result, durability of the laundry apparatus 1 may be enhanced and noise may be reduced effectively.

The drawer 100 provided in the laundry apparatus according to this embodiment of the present invention may be completely separable from the second cabinet 20. In other words, when the second treating part 20a or the other parts located in the drawer 100 needs repairing, the drawer 100 can be detached from the second cabinet 20 to repair the second treating part 20a or the other parts smoothly and conveniently.

When the drawer 100 is detached, the drawer 100 is moved outward completely from the second cabinet 20. After that, the front portion of the drawer 100 is lifted a predetermined distance. At this time, the front hooking member 132b of the side bracket 131 is formed straight to be separated from the front coupling portion 135 of the moving rail 134 smoothly. However, the rear hooking member 133b is formed in the 'L' shape and it is not detached from the rear coupling portion 136, even the front portion 110 is lifted. The rear hooking member 133b may be sloping a predetermined angle along the direction in which the drawer 100 is lifted. At this time, when the drawer 100 is pulled along the sloping direction of the drawer 100, the rear hooking member 133b is detached from the rear coupling portion 136. Because of that, the drawer 100 is detached from the moving rail 134 to be completely detached from the second cabinet 20. Here, the front and rear hooking members 142 and 143 of the lower bracket 141 are formed straight. When the drawer 100 is lifted upwardly, the drawer 100 is detached from the moving rail 144 of the lower rail unit 140.

In the meanwhile, a locking assembly 116 and a locking securing part 12 are provided in the first cabinet 10 and the drawer 100 to limit the inner and outer motion of the drawer 100.

As shown in FIG. 2, the locking assembly 116 is provided in an upper portion of a rear surface of the front portion 110 to lock the drawer 100 when the drawer 100 is moved inwardly into the second cabinet 20 completely. Together with the locking assembly 116, the locking coupling portion 12 coupled to the locking assembly 116 is provided in a front panel 11 of the first cabinet 10. The locking coupling portion 12 is located opposite to the locking assembly 116.

The locking assembly 116 is coupled to the locking coupling part 12, to secure the drawer 100 not to move backward (that is, outward). The locking assembly 116 and the locking coupling portion 12 may be coupled to each other by hooking or any other suitable coupling method that is known to one of skill in the art.

When the drawer 100 is insertedly moved into the second cabinet 10 by the side rail units 130 and the lower rail unit 140, the side rail units 130 and the lower rail unit 140 reduce friction generated between the drawer 100 and the second cabinet 20. Because of that, when the drawer 100 is moved into the second cabinet 20, the drawer 100 may be easily accelerated by a little force applied thereto and it might collide with the second cabinet 20 by inertia.

This collision might apply a shock to the drawer 100 and the second treating part 20a, to damage to the components of the second treating part 20a. In addition, the shock might be transferred to the second cabinet 20, to damage the components of the first treating part 10a. As mentioned above, the shock generated in the drawer 100 and the second treating part happens to cause severe noise.

The laundry apparatus according to embodiments of the present invention include a shock preventing part 150 to solve that problem. The shock preventing part 150 is employed to relieve the shock generated by the collision of the drawer 100 against the second cabinet 20, when the drawer 100 is moved into the second cabinet 20.

In reference to FIGS. 2 and 7, the shock preventing part 150 is provided in the front of the cabinet 2 and it is formed in a trapezium shape, with a circular cross section. The shocking preventing part 150 may be any other suitable shape known to one of ordinary skill in the art. In some embodiments, two shock preventing parts 150 may be provided on both sides of the front portion of the second cabinet 20. In other embodiments, a total four shock preventing parts 150 may be attached or any other suitable number of shock preventing parts 150 known to one of skill in the art.

A bolt hole is formed in a center of the shock preventing part 150 and a bolt is inserted into the bolt hole to secure the shock preventing part 150 to the side of the front portion. It is preferable that the shock preventing part 150 is formed of an elastic material. In some embodiments, the shock preventing part 150 may be formed of rubber. In further embodiments, the shock preventing part 150 may be formed of an plastic or any other suitable elastic material known to one of skill in the art.

A receiving recess 114 is formed in the inner surface of the front portion 110 of the drawer 100 to receive the shock preventing part 150 therein. When the drawer 100 is moved into the second cabinet 20 completely, the front portion 110 of the drawer 100 may be designed to be spaced apart a predetermined distance from the side panel 13. The depth of the receiving recess 114 is smaller than the height of the shock preventing part 150 and it is preferable that the depth

of the receiving groove **114** is a half to two thirds with respect to the height of the shock preventing part **150**. Even if the shock preventing part **150** is pressed by collision with the drawer **100**, the front portion **110** of the drawer **100** may not collide with the side panel **13**.

Moreover, according to embodiments of the present invention, a rear lock **160** is further provided to secure the drawer **100** to prevent drawer **100** from sliding backwardly when moved into the second cabinet **20**.

In reference to FIGS. 7 to 9, the rear lock **160** is provided between a rear surface of the drawer **100** and a rear panel (not shown) of the second cabinet **20**. The rear lock **160** includes an engaging part **161** engaging with the housing **120** of the drawer **100** and a clamp **165** installed in the rear panel of the second cabinet **20**.

The engaging part **161** is configured of a support **162** having a bolt hole formed therein and a projection **163** coupled to the support **162**. The engaging part **161** is fixed to a rear surface of the housing **120** by a bolt. A cross section of the projection **163** is rectangular and the projection **163** is formed in a center of the support **162**. Arc-shaped engaging grooves **164** are formed in both sides of the projection **163**.

The clamp **165** receives and secures the engaging part **161** thereto, and it is configured of two ball housings **167** spaced apart a predetermined distance from each other and a support **166** secured to lower portions of the ball housings **167**. A bolt hole is formed in the support **166** and the clamp **165** is fixed to the rear panel by a bolt. A ball **168** is installed in the ball housing **167** and a hole is formed in the ball housing **167** to expose the ball **168** to the outside of the ball housing **167** partially there through. A diameter of the hole is smaller than a diameter of the ball **168** and a predetermined portion of the ball **168** is exposed via the hole. In addition, the ball **168** is supported by a spring **169** installed in the ball housing **167**. An end of the spring **169** is secured to the ball **168** and the other end of the spring **169** is secured to an inner surface of the ball housing **167**. The spring **169** is installed in a state of being compressed and the ball **168** is in close contact with the hole formed in the ball housing **167** by elasticity of the spring **169**.

According to an operational principle of the rear lock **160**, the projection **163** of the engaging part **161** is inserted between the ball housing **167** and the springs of the ball housing **167** are pressed accordingly. The elastic force which is strong in proportion to the pressed distances of the springs **169** is applied to the balls **168**. As illustrated in FIG. 9, a plurality of springs **169** are located in a pair of ball housings **167** and apply the elastic force to the balls **168** toward the projection **163** and the plurality of balls **168** apply a predetermined force along a direction toward a center of the projection **163** from both sides of the projection **163**. Because of that, the engaging part **161** is securely supported by the clamp **165**. Together with that, the drawer **100** having the engaging part **161** secured thereto is secured to the second cabinet **20** having the clamp **165** secured thereto. Here, the plurality of balls **168** are inserted in the grooves **164** formed in the projections **163** and they do not slip along a side surface of the projection **163** accordingly.

When the drawer **100** is kept in the second cabinet **20**, the drawer **100** may be secured between the locking assembly **116** provided in the front portion **110** of the drawer **100** and the locking securing part **12**. However, when laundry is treated in the second treating part **20a** installed in the drawer **100**, the second drum **600** of the second treating part **20a** rotates and vibration is generated accordingly. The vibration

cannot be eliminated by the locking assembly **116** enough, resulting in vibration generated in the entire portion of the laundry apparatus.

The laundry apparatus **1** according to embodiments of the present invention may include the rear lock **160** provided in the drawer **100** to secure the drawer **100** stably and to restrain vibration. In addition, it is preferable that the rear lock **160** is installed in a rear portion of the rear surface of the drawer **100**. Typically, the locking assembly **116** is arranged in the upper portion of the front portion **110** of the drawer **100**. The rear lock **160** is installed in the lower portion of the rear surface of the drawer **100**. The securing means of the drawer **100** may be arranged in symmetry in some embodiments. In other words, the locking assembly **116** and the rear lock **160** are arranged symmetrically, to secure the drawer **100** more stably.

As a result, the laundry apparatus according to embodiments of the present invention may include the rail provided in the bottom of the drawer to remove sideward-vibration generated when the auxiliary laundry device is put into operation. Because of that, durability of the laundry apparatus is enhanced and noise is effectively restrained.

Furthermore, the collision between the drawer and the cabinet which is generated by the inertia of the drawer motion when the drawer is moved into the cabinet may be prevented effectively.

Meanwhile, there may be several disadvantages when the drawer **100** is used to lead in and out the second treating part **20a**. The second treating part **20a** requires a water supply pipe to supply water to the second tub **200** and a drainage pipe to drain the wash water.

When the drawer **100** is led out, the second tub of the second treating part **20a** is led out together with the drawer **100**. At this time, the water supply pipe and the drainage pipe which are connected with the second tub **200** have to be extended. Therefore it may be necessary to provide a configuration used to extend or reduce the water supply pipe and the drainage pipe based on the leading-in and leading-out of the drawer **100**. If the water supply pipe and the drainage pipe are not arranged effectively, the water supply pipe and the drainage pipe might be caught by the rear surface of the drawer **100** in the inward motion of the drawer **100**. In addition, the water supply pipe and the drainage pipe might be torn or damaged by the drawer.

Because of the problem, the laundry apparatus **1** includes a water supply/drainage device **400** which is provided in a rear portion of the drawer **100** flexibly.

In reference to FIG. 10, the water supply/drainage device **400** includes a first link **420** and a second link **430** arranged below the first link **420**. The first link **420** and the second link **430** are rotatably coupled to each other by a hinge. It is preferable that the first link **420** is provided beyond the second link **430**.

Together with that, it is preferable that long axes of the first and second links **420** and **430** are arranged in parallel to a width direction of the second cabinet **20**. In other words, the width of the second cabinet **20** having the drawer **100** provided therein is structurally longer than the height of the second cabinet **20**. Because of that, the long axes of the first and second links **420** and **430** are arranged in parallel to the width direction of the second cabinet **20** and the first and second links **420** and **430** arranged vertically have an advantage in an aspect of space utilization.

The first link **420** and the second links **430** are symmetrical in a profile and a configuration. As follows, the same configuration elements of the second link **430** as those of the first link **420** will be omitted.

11

The first link **420** forms an internal space, with both open sides. A flexible water supply pipe **450** and a flexible drainage pipe **460** are insertedly installed in the both open sides of the first link **420**. In other words, the flexible water supply pipe **450** and the flexible drainage pipe **460** are provided in the internal space of the first link **420**.

An end of the first link **420** is connected to a rear panel (not shown) of the second cabinet **20** and the first link **420** is rotatably connected to the rear panel of the second cabinet **20**. More specifically, the end of the first link **420** is hingedly connected with a first bracket **422** and the first bracket **422** is fixedly connected with the rear panel.

The second link **430** is connected with the lower portion of the first link **420**. The profile and configuration of the second link **430** is identical to those of the first link **420**, except an end of the second link **430** which is hingedly connected with the rear surface of the housing **120** provided in the drawer **100**. More specifically, the end of the second link **430** is hingedly connected with a second bracket **432** and the second bracket **432** is fixedly connected with the rear surface of the housing **120**. Together with that, the other end of the second link **430** is hingedly connected with the first link **420**.

A hinge connecting part **470** is formed between the first link **420** and the second link **430** and a hinge shaft (not shown) is inserted in the hinge connecting part **470**. The hinge connecting part **470** may be a projection. The hinge connection part **470** may be configured of a first projection **424** formed in a bottom of the first link **420** and a second projection **434** formed in a top of the second link **430**. The first projection **424** and the second projection **434** may be integrally formed with the first link **420** and the second link **430**, respectively.

A water supply hole **410** is provided in a rear upper portion of the second cabinet **20** and the water supply hole **410** is configured of a hot water supply hole **412** for supplying hot water and a cold water supply hole **414** for supply cold water. The water supply hole **410** is in communication with the flexible water supply pipe **450**. The flexible water supply pipe **450** is branched to be two pipes. One of the branched pipes is connected with the hot water supply hole **412** and the other one is connected with the cold water supply hole **414**. The flexible water supply pipe **450** is inserted in the first and second links **420** and **430**. The flexible water supply pipe **450** may be arranged in a “C” shape entirely. In other words, the flexible water supply pipe **450** may be inserted in the end of the first link **420** and exhausted from the other end. The flexible water supply pipe **450** exhausted from the other end of the first link **420** is inserted in an end of the second link **430** to be exhausted from the other end of the second link **430**. The flexible water supply pipe **450** exhausted from the other end of the second link **430** may be connected with the second treating part **20a**, passing through the rear surface of the housing **120**.

The flexible drainage pipe **460** is installed in the same way as the flexible water supply pipe **450**. In other words, the flexible drainage pipe **460** may be arranged in the first and second links **420** and **430** in a “C” shape. An end of the flexible drainage pipe **460** is exhausted to a rear portion of the second cabinet **20**. In other words, a drainage portion of the flexible drainage pipe **460** configured to exhaust wash water outside is located in an outside of the second cabinet **20**. It is preferable that a through hole (not shown) is formed in the rear panel of the second cabinet **20** to exhaust the flexible drainage pipe **460** there through.

It is preferable that the flexible water supply pipe **450** and the flexible drainage pipe **460** are formed of a flexible

12

material which can be flexed according to the rotation of the first and second links **420** and **430**.

Although not shown in the drawings, the first and second links **420** and **430** may guide a control line (not shown) and the control line includes an electricity line or a control line.

Moreover, it is described above that the end of the first link **420** located upper is connected with the rear panel and that the end of the second link **430** located lower is connected with the rear surface of the housing **120**. Alternatively, the end of the first link **420** located upper is connected with the rear surface of the housing **120** and the end of the second link **430** located lower is connected with the rear panel.

As follows, an operational state of the water supply/drainage device **400** mentioned above will be described.

FIG. **10** is a rear view illustrating the drawer **100** which is moved into the second cabinet **20** completely and FIGS. **11** and **12** are side sectional and plane views illustrating the drawer **100** which is moved outward completely from the second cabinet **20**.

In reference to FIG. **10**, the first link **420** and the second link **430** are folded to be arranged on the same perpendicular plane. In other words, the first link **420** and the second link **430** are arranged in parallel to the rear surface of the housing **120**. Together with that, the flexible water supply pipe **450** and the flexible drainage pipe **460** are bent in a “C” shape near the hinge-connecting portion of the first and second links **420** and **430**. In other words, the flexible water supply pipe **450** and the flexible drainage pipe **460** exhausted from the first end of the first link **420** are bent gently to be inserted in the end of the second link **430**.

In reference to FIG. **11**, when the drawer **100** is led out, the first and second links **420** and **430** connected to the drawer **100** are not located on the same perpendicular plane anymore. In other words, the first link **420** is rotated about the connected portion with the rear panel of the second cabinet **20** and the second link **430** is rotated about the connected portion with the housing **120**. Here, the second link **430** is rotated about all of the connected portions with the housing **120** and with the first link **420**. In contrast, the first link **420** is only rotated about the connected portion with the rear panel.

In reference to FIG. **12**, when the drawer **100** is led out completely, the first and second links **420** and **430** are located on the same perpendicular plane again. However, the second link **430** is not located underneath the first link **420** but at a diagonal angle with respect to the first link **420**. It is preferable that the first and second links **420** and **430** maintain a predetermined angle, not located on the same perpendicular plane completely, when the drawer **100** is moved outward completely. In other words, if the first and second links **420** and **430** are placed on the same perpendicular plane in the state of the drawer **100** being led out completely, the first and second links **420** and **430** might not be rotated relatively when the drawer is led in again. In other words, if the first and second links **420** and **430** are located on the same perpendicular plane, a moment for rotating the first and second links **420** and **430** cannot be formed. Because of that, if the first and second links **420** and **430** maintain a predetermined angle when the drawer **100** is led out completely, the first and second links **420** and **430** may be rotated smoothly when leading in the drawer **100**.

As a result, the water supply pipe **450** and the drainage pipe **460** of the auxiliary laundry device may be arranged effectively by the hinge assembly configured of the pair of the links. Twist or damage of the water supply pipe and the

drainage pipe generated when leading in or out the drawer may be prevented accordingly.

When the second treating part **20a** is formed in the drawer **100** as described above, the auxiliary laundry device may be a top loading type which allows the user to load laundry via a top thereof vertically. Because of that, the user may load or unload the laundry into or out of the drum **600** smoothly and conveniently after leading out the drawer **100**.

As follows, the second tub and the second drum according to embodiments of the present invention will be described in detail in reference to the accompanying drawings.

In reference to FIGS. **13** and **14**, the second treating part **20a** includes a second tub **200**, a second drum **600** rotatably mounted in the second tub **200**, a tub cover **210** coupled to a top surface of the second tub **200**, a cover **214** coupled to the tub cover **210**, a water chamber **217** and a water supply hose **219a** configured to supply wash water to the second drum **600**, and a water chamber cover **219** configured to cover the water chamber **217**. The water chamber **217** is configured to reduce the speed of the wash water, which will be described in detail later.

The second tub **200** and the second drum **600** have open tops. The second tub **200** surrounds the second drum **600** and it prevents the wash water from leaking outside. The second drum **600** is rotatable within the second tub **200**. The second drum **600** holds laundry and it is provided with the wash water. A plurality of ribs may be projected from an outer circumferential surface of the second tub **200** to reinforce the strength of the second tub **200**.

The tub cover **210** prevents the wash water and the laundry from being thrown outside during the washing, and it is coupled to a top surface of the second tub **200**. A semicircular-shaped opening **211** is formed in an inner circumference of the tub cover **210** and the opening **211** is an introduction space for the laundry to be loaded or unloaded. The opening **211** is opened and closed by the cover **214**. The cover **214** is hingedly coupled to the tub cover **210** and the cover **214** is configured of a frame **215** and a transparent window **216** secured in the frame **215**. A handle **215a** used to open and close the cover **214** is provided in a center of the frame **215**. The transparent window **216** is formed of a transparent material and it allows the user to identify the state of the laundry and wash water inside the second drum **600**. The user opens the cover **214** before starting the washing process and he or she loads the laundry into the second drum **600**. After the washing process, the user opens the cover **214** and he or she takes out the laundry from the second drum **600**. During the washing process, the cover **214** is kept being closed.

A chamber support **212** is formed in a rear portion of the semicircular opening **211** formed in the tub cover **210** and the water chamber **217** is installed in the chamber support **212**. A hinge is provided in the chamber support **212** to connect the cover **214** to the second cover.

The water chamber **217** is a device configured to supply the wash water to the second drum **600** and it is located in the center of the chamber support **212**, adjacent to the opening **211**. Here, the water chamber **217** communicates with an end of the water supply hose **219a**. The water supply hose **219a** is inserted in a predetermined portion of the tub cover **210** and it is arranged along an inner surface of the tub cover **210**, that is, an outer surface of the chamber support **212**. Together with that, the water supply hose **219a** is bent at a center of the outer surface of the chamber support **212** to communicate with the water chamber **217**. The other end of the water supply hose **219a** is in communication with the flexible water supply pipe **450**.

A support cover **213** is coupled to the chamber support and the support cover **213** is coupled with the chamber support **212**, to form a predetermined internal space where the water chamber **217** is installed.

In the meanwhile, fixers **218** for fixing the water chamber **217** are formed around the water chamber **217** and bolt grooves are formed in the fixers **218** to couple the support cover **213** to the chamber support **212**. The fixers **218** may be integrally formed with the support cover **213**.

A cross section of the water chamber **217** is larger than a cross section of the water supply hose **219a**. As the wash water is moving at a high speed via the water supply hose **219a**, the speed of the wash water is decreased drastically at the water chamber **217**. Because of that, the wash water may be supplied to the second drum **600** not at a high speed but at a relatively low speed.

According to the conventional laundry device, wash water is supplied to a drum from a predetermined portion of the second tub **200** or of the tub cover **210**. Typically, most of the laundry is located in a center of the second drum **600** and the conventional laundry apparatus consumes quite a lot of time to dampen the laundry. However, according to an embodiment of the present invention, the water chamber **217** for supplying the wash water is arranged near the center of the second drum **600**, to supply the wash water to the center of the second drum **600**. Because of that, the time required for the wash water to dampen the laundry may be reduced effectively.

In the meanwhile, the opening **211** is approximately semicircular and the angle at the circumference is over 180 degrees, exactly. In other words, the opening **211** formed in the tub cover **210** may be larger than the space occupied by the chamber support **212**. Because of that, the space for loading and unloading the laundry may be secured as much as possible.

As a result, the water chamber is arranged in the center of the drum according to the present invention to supply the wash water to the center of the drum, such that the laundry may be dampened more quickly.

In the meanwhile, as shown in FIG. **15**, a shaft **700** passing through the second tub **200** is provided in a lower portion of the second tub **200**. An upper end of the shaft **700** is connected with the drum **600** mounted in the second tub **200** such that the second drum **600** may be rotated along the rotation of the shaft **700**. A motor **800** is installed underneath the second tub **200** to rotate the shaft **700**.

Within the drawer **100**, the second tub **200** is elastically supported by an auxiliary supporting device (**500**, see FIG. **19**), which will be described later. Vibration generated by the rotation of the second drum **600** to be transferred to the second tub **200** may be suspended and reduced by the supporting device **500**.

A through hole **222** to pass the shaft **700** there through may be formed in the center of the second tub **200**. In addition, a bearing housing **250** configured to support the shaft **700** is inserted in a bottom of the second tub **200**. Preferably, the bearing housing **250** is integrally formed with the second tub **200** when the second tub **200** is molded. Here, when the second tub **200** is formed according to injection molding, the bearing housing **250** may be insert-molded when the second tub **200** is injection-molded. Here, shaft holes **252** to pass the shaft **700** there through are formed in a center of the bearing housing **250** and a pair of bearings **254** to rotatably support the shaft **700** are inserted in the shaft holes **252**. A water seal **256** is provided in the shaft hole **252** of the bearing housing **250** to maintain air tightness between the shaft **700** and the second tub **200**, in

contact with the shaft **700**. The water seal **256** is formed in a ring shape, fixed to an inner circumferential surface of the bearing housing **250**, and a sealing rib **258** is projected from an inner circumferential surface of the water seal **256** to maintain the air tightness.

The motor **800** is installed underneath the second tub **200** and it rotates the shaft **700** supported by the bearing housing **250**. Here, the motor **800** may be an outer rotor type motor including a stator **810** fixed to an outer circumferential surface of the second tub **200** and a rotor **830** fixed to the shaft, surrounding the stator **810**.

As shown in FIGS. **16** to **18**, a heater sump **230** may be formed in an inner lower surface of the second tub **200**. A heater **231** is installed in the heater sump **230** to heat the wash water held in the second tub **200**. A drainage part **235** is provided in the heater sump **230** to drain the wash water held in the second tub **200** and an air chamber **237** is installed in the drainage part **235** to sense the amount of the wash water held in the second tub **200**.

Here, in reference to FIGS. **16** and **17**, a sloping surface **238** is formed in the bottom of the second tub **200** to allow the wash water of the second tub **200** to be collected in the heater sump **230**. In other words, when the wash water held in the second tub **20** is drained, the sloping surface **238** formed in the bottom of the second tub **200** helps the wash water collect in the heater sump **230** to be drained via the heater sump **230**.

When the wash water held in the second tub **200** is heated, the sloping surface **238** collects the wash water in the heater sump **230** to be heated. In this case, even if the wash water is insufficient when heating the wash water, the wash water is collected in the heater sump **230** by the sloping surface **130**. Because of that, overheating of the heater **231** and damage to the heater **231** may be prevented.

The heater sump **230** mentioned above cannot be formed at the relatively least space formed by the second tub **200** installed in the limited space of the drawer **100**. In other words, only the least space having the heater **231** formed therein is used to form the heater sump **230**.

In this case, the installation of the heater **231** itself may be a problem. The heater **231** includes a heater terminal **232** connected with the power source and a heating road **233**. Simultaneously, the heater terminal **232** fixes the heater **231**. Because of that, the size of the heater terminal **232** is relatively larger than the size of the heating road **233**. Typically, the heater terminal **232** is bent along a perpendicular direction with respect to the heating road **233** for installation efficiency. However, according to the present invention, the heater terminal **232** is formed in the same direction as the heating road **233** because of the small space. As a result, even when the heater sump **230** is projected toward the lower portion of the second tub **200**, the heater terminal **232** of the heater **231** is caught by the rib for reinforcing the strength of the second tub **200** when the motor **231** is installed and it interferes with the inserting path of the heater **232**, which makes it difficult to install the heater **231**.

Because of that, when the motor **231** is installed, the installation direction of the heater **231** is sloping from a lower portion of the heater sump **230** toward an upper portion. In other words, when the heater **231** is inserted, the heater **231** is inserted in the heater sump **230** with an end of the heating road **233** being upward and the heater terminal **232** being downward. After the heating road **233** is inserted completely, the heating road **233** is rotated horizontally to fix the heater terminal **232** to the heater sump **230**.

Meanwhile, an auxiliary heater clamp **234** for fixing the heating road **233** of the inserted heater **231** may be installed in an inner surface of the heater sump **230**. The heater clamp **234** supports the heater in a rightward and leftward direction.

Such the heater clamp **234** and the second tub **200** are manufactured independently and the heater clamp **234** is inserted in the heater sump **230** in advance before the heater **231** is installed. The heater clamp **234** is located in a predetermined position opposed to the inserting direction of the heater **231** and it fixes an end of the heating road of the heater **231**. Here, the heater clamp **234** is inserted in the installation hole provided in the heater sump **230** by a predetermined elasticity and a hooking projection is projected in the end of the heater sump **230** to prevent the separation of the heater sump **230**.

Additionally, because of the limited small space of the heater **231**, the direction of the heater terminal **232** is identical to the direction of the heating road **233** to connect the power terminal (not shown) to the heater terminal **232**.

In other words, when the direction of the heater terminal **232** is perpendicular to the direction of the heating road **233**, like the conventional heater, the space formed between the second tub **200** and the drawer **100** is narrow and it is difficult to connect the power terminal with the heater terminal.

However, when the direction of the heater terminal **232** is identical to the direction of the heating road **233**, the power terminal is inserted along the installation direction of the heater **231**, to be connected with the heater terminal **232** smoothly.

As shown in FIG. **18**, the drainage part **235** is provided in a bottom of the heater sump **230** to drain the wash water held in the second tub **200** such the drainage part **235** is connected with a drainage device (not shown) and the wash water collected in the heater sump **230** is drained by a drainage pump (**300**, see FIG. **26**) provided in the drainage device. The drainage pump **300** will be described in detail later.

Here, a branched pipe **236** branched toward an upper portion of the drainage part **235** is formed in the drainage part **235** and a pressure water level sensor (**239**, for example, a diaphragm pressure sensor) is connected with the branched pipe **236** to sense a water level of the wash water stored in the second tub **200**. The air chamber **237** is provided between the branched pipe **236** and the pressure water level sensor. The air chamber **237** allows the pressure water level sensor to detect pressure changes of the branched pipe **236** by using a volume.

Meanwhile, the conventional laundry apparatus includes a suspension system which supports the drum and the tub and which reduces vibration generated by the rotation of the drum, such as a cylinder and a piston or a spring and a damper. Such a conventional suspension system is flexible according to the weights of the drum and the tub, to support the drum and the tub. Because of that, the drum and the tub may move downwardly a predetermined distance or more.

As a result, it is limited to install and drive the conventional suspension system in the narrow space of the second cabinet **20**. As follows will be described a supporting device which is provided in the second cabinet **20** of the laundry apparatus **1** according to the above embodiments, to support the second drum **600** and the second tub **200** and to suspend the vibration generated by the rotation of the second drum **600** to limit the movement of the second drum **600** and the second tub **200**.

In reference to FIGS. 19 and 20, a supporting device 500 according to an embodiment may maintain the distance between the second tub 200 and the second cabinet 20 in a predetermined range. In other words, the supporting device 500 may prevent the second tub 200 and the second cabinet 20 from being spaced apart over the predetermined range or from being too closed over the range.

Here, when the drawer 100 is provided in the second cabinet 20 as mentioned above, the supporting device 500 is provided between the second tub 200 and the drawer 100 and it can maintain the distance between the drawer 100 and the second tub 200 in a predetermined range. In other words, according to an embodiment not including the drawer 100, the supporting device 500 may be provided between the second tub 200 and the second cabinet 20. According to an embodiment including the drawer 100, the supporting device 500 may be provided between the second tub 200 and the drawer 100. The embodiment including the drawer 100 provided in the second cabinet and the supporting device 500 provided between the second tub 200 and the drawer 100 will be described.

As a result, the supporting device according to this embodiment limits the movement of the second tub 200 and it can suspend horizontal vibration and/or vertical vibration which are generated by the rotation of the second drum 600. More specifically, the supporting device 500 may be provided between a first fixing part 510 provided in the drawer 100 and the sloping surface 240 provided in the second tub 200. In this case, the supporting device 500 may maintain the distance between the first fixing part 510 and the sloping surface 240 in a predetermined range. As follows, a specific configuration of the supporting device 500 will be described in reference to the drawings.

The supporting device 500 according to an embodiment includes a first supporting part 520 configured to limit downward movement and horizontal movement of the second tub 200 and a second supporting part 530 configured to limit upward movement of the second tub 200. The supporting device 500 according to the embodiment may include a supporting part configured to limit movement of the second tub according to vibration of the second tub generated by the rotation of the second drum 600, that is, a direction of movement of the second tub 200. Here, the first supporting part 520 may limit downward movement and leftward-and-rightward movement of the second tub 200. The second supporting part 530 may limit upward movement of the second tub 200.

In the meanwhile, the second drum 600 and the second tub 200 may be vibrated along various directions by the rotation of the second drum 600. For example, they may be vibrated along a vertical direction or a horizontal direction. Even when they are vibrated along the vertical direction, the second drum 600 and the second tub 200 may be vibrated linearly or curvedly, and vice versa when they are vibrated along the horizontal direction. By extension, when the second tub 200 and the second drum 600 are rotated, only a single direction rotation will occur rarely and vibration having complex directional elements will usually be generated. For example, they are vibrated vertically and vibrated horizontally along a curvature at the same time.

When limiting the downward and horizontal movement of the second tub 200, the first supporting part 520 can limit the upward movement of the second tub 200 simultaneously. Here, the first supporting part 520 can limit the downward and horizontal vibration of the second tub 200 mainly, with limiting the upward movement of the second tub 200 additionally. This can be applied to the second supporting

part 530. In other words, the second supporting part 520 can limit the upward movement of the second tub 200 mainly, with limiting the downward and/or horizontal movement of the second tub 200 additionally.

The first and second supporting parts 520 and 530 mentioned above may be provided between the second tub 200 and the drawer 100. For example, the first and second supporting parts 520 and 530 may be provided between the first fixing part 510 provided in the side wall of the second tub 200 and the sloping surface 240 provided in the inner wall of the drawer 100. The first fixing part 510 may be integrally formed with the side wall of the second tub 200 and the sloping surface 240 may be integrally formed with the inner wall of the drawer 100.

In the meanwhile, to provide the first and second supporting parts 520 and 530 between the first fixing part 510 and the sloping surface 240, the first fixing part 510 may face the sloping surface 240 in opposite. Furthermore, they may face each other in opposite along a perpendicular direction. The first and second supporting parts 520 and 530 may be provided along a perpendicular direction accordingly.

For example, as shown in FIG. 19, the first fixing part 510 is provided in an upper portion of the supporting device 500 and the sloping surface 240 is provided lower than the first fixing part 510, such that they are opposing each other along a perpendicular direction. The first fixing part 510 may be extended outwardly from the side wall of the second tub 200 and the sloping surface 240 may be extended toward the second tub 200 from the inner wall of the drawer 100.

Here, the first supporting part 520 may include a supporting bar 522 configured to limit the moving distance of the second tub 200 according to a moving direction and a connecting portion 526. In other words, the supporting bar 522 is configured to limit the downward movement of the second tub 200 and the connecting portion 526 is configured to limit the rightward and leftward movement of the second tub 200.

Specifically, the supporting bar is substantially formed of a rigid material and both ends of the supporting bar 522 may be connected with the first fixing part 510 and the sloping surface 240, respectively. First and second inserting portions 512 and 242 may be provided in the first fixing part 510 and the sloping surface 240, respectively, to connect the ends of the supporting bar 522 there with. Because of that, the ends of the supporting bar 522 may be connected with the first fixing part 510 and the sloping surface 240, passing through the first and second inserting portions 512 and 242. In addition, a separation preventing portions 524 may be provided in the ends of the supporting parts to prevent the ends from separating from the first fixing part 510 and the sloping surface 240. Here, the connecting portions 526 may be provided between the separation preventing portion 524 and the first fixing part 510 and between the separation preventing portion 524 and the sloping surface 240, respectively.

According to this embodiment, the first fixing part 510 and the sloping surface 240 may be opposite to each other along a perpendicular direction and the supporting bar 522 provided between them may be provided along a perpendicular direction. Because of that, when the laundry is accommodated in the second drum 600 and the wash water is held in the second tub 200, a predetermined tension may be applied to the supporting bar 522 by the loads of the second drum 600 and the second tub 200.

Meanwhile, the supporting bar 522 may be substantially formed of a rigid body and both ends of the supporting bar 522 may be prevented from being separated from the first fixing part 510 and the sloping surface 240. Even when the

tension is applied to the supporting bar 522 along the perpendicular direction by the loads of the second drum 600 and the second tub 200, the supporting bar 522 may stop the second tub 200 from moving downwardly as far as the length of the supporting bar 522, or farther than the length. In other words, even if the second tub 200 is moved downwardly by the rotation or vibration of the second drum 600, the downward movement of the second tub 200 may be limited by the supporting bar 522.

In the meanwhile, the upward movement of the second tub 200 generated by the rotation or vibration of the second drum 600 may be limited by the second supporting part 530. Here, the second supporting part 530 may be provided between the first fixing part 510 and the sloping surface 240 and it may be formed of an elastic member capable of providing an elastic force to both ends thereof. In other words, the second supporting part 530 may be compressed between the first fixing part 510 and the sloping surface 240 and it supplies the elastic force to the ends thereof, that is, to the first fixing part 510 and the sloping surface 240. As a result, the upward movement of the second tub 200 may be limited by the elastic force of the second supporting part 530. In addition, the separation preventing portions 524 provided at the ends of the supporting bar 522 may be in close contact with the connecting portion 526 by the elastic force of the second supporting part 530, such that the connecting portions 526 may be in close contact with the first fixing part 510 and the sloping surface 240. Because of that, the distance between the first fixing part 510 and the sloping surface 240 may be maintained in the predetermined range by the supporting bar 522 and the elastic material 540, only to limit the vertical movement of the second tub 200. When the second supporting part 530 is provided between the first fixing part 510 and the sloping surface 240, the second supporting part 530 may be provided along an outer circumference of the supporting bar 522.

Moreover, the horizontal movement of the second tub 200 generated by the rotation of the second drum 600 may be limited by the connecting portion 526 of the first supporting part 520 mentioned above. Here, the connecting portions 526 may be provided in both ends of the supporting bar 522 and they may limit the horizontal movement of the second tub 200 by using a frictional force with the fixing part 510 and the sloping surface 240. For example, the second tub 200 is vibrated to receive a predetermined force for moving horizontally. If then, the supporting bar 522 may receive a moment to be rotated between the first fixing part 510 and the sloping surface 240. In this case, if the supporting bar 522 is not configured to be rotated at all, the moment applies a tension to the supporting bar 522 and damage to the supporting bar 522 might occur.

Because of that, the supporting bar 522 may be configured to be rotatable to a predetermined angle with respect to the first fixing part 510 and the sloping surface 240. In this case, the rotation of the supporting bar 522 may be limited by the connecting portions provided at the ends of the supporting bar 522 and the frictional force between the first fixing part 510 and the sloping surface 240. As a result, the horizontal movement of the second tub 200 may be prevented.

The configuration of the rotatable supporting bar 522 will be specifically described as follows. First and second seating portions 244 and 514 may be provided in the first fixing part 510 and the sloping surface 240 to seat at least a predetermined portion of the connecting portions thereon. The connecting portion 526 may have a semicircular, circular or curved shape and the first and second seating portions 244 and 514 may have corresponding shapes with respect to the

connecting portions 526, respectively. As a result, the shape of the connecting portions 526 provided at the ends of the supporting bar 522 and the shapes of the first and second seating parts 244 and 514 enable the supporting bar 522 to perform the rotation to a predetermined angle. The frictional force generated between contacting surfaces may be calculated according to a following mathematical equation:

$$F = \mu N \quad \text{Mathematical Equation}$$

Here, 'μ' refers to a frictional coefficient and 'N' refers to a normal force. To increase the frictional force between the connecting portions 526 and the first fixing part 510 and the sloping surface 240, specifically, the frictional force between the connecting portion 526 and the first fixing part 510 and between the connecting portion 526 and the sloping surface 240, the connecting portions 526 and the first and second seating portions 244 and 514 may be formed of a material having a high frictional coefficient. To increase the normal force, the connecting portions 526 and the first and second seating portions 244 and 514 are contacting with each other as closely as possible.

According to the supporting device 500 of this embodiment, surfaces of the connecting portions 526 and/or surfaces of the first and second seating portions 244 and 514 provided in the sloping surface 240 and the first fixing part 510 may be formed of a material having a high frictional coefficient. According to this embodiment, to increase the normal force, the connecting portions 526 and the first and second seating portions 244 and 514 may contact with each other as closely as possible and at least one of the connecting portions 526 or the first and second seating portions 244 and 514 may include an elastic member to prevent any gap from being generated between them. In other words, the elastic force of the second supporting part 530 mentioned above enables the first fixing part 510 and the sloping surface 240 to be in close contact with the connecting portions 526, and the elastic member enables the connecting portions 526 and the first and second seating portions 244 and 514 to contact with each other as closely as possible, to increase the normal force.

FIGS. 21 and 22 are diagrams schematically illustrating a connecting member including the elastic member.

The elastic member 540 may be exposed along an outer circumference of the connecting portion 526 as shown in FIG. 21 or at least a predetermined portion of the elastic member 540 may be embedded in the connecting portion 526 as shown in FIG. 22. When the elastic member 540 is embedded in the connecting portion 526, it is preferable that the elastic member 540 is not embedded in the connecting portion 526 more than a predetermined depth, to allow the connecting portion 526 to be in contact with the first and second seating portions 244 and 514 closely by the elastic force thereof.

When the horizontal vibration of the second tub 200 is generated by the rotation of the second drum 200, the second tub 200 happens to contact with the supporting device 500, to generate interference with each other. Especially, according to the above embodiments of the laundry apparatus, the second cabinet 20 has a relatively narrow internal space and the distance between the second tub 200 and the drawer 100 could be relatively narrow, compared with the conventional laundry apparatus. Because of that, the supporting device 500 provided between the second tub 200 and the drawer 100 may be provided adjacent to the second tub 200 closely. If the interference is generated between the second tub 200 and the supporting device 500 by the horizontal vibration of the second tub 200, there might be damage to an outer wall

21

of the second tub **200** and damage to the supporting device **500**. Because of that, the supporting device **500** cannot function well and noise and vibration of the laundry apparatus **1** might then increase. As follows will be described a configuration used to prevent the interference between the second tub **200** and the supporting device **500** even if vibration is generated in the second tub **200**.

In reference to FIG. **23**, a laundry apparatus **1** according to another embodiment may include a damping material **280** configured to maintain a predetermined distance or more between the supporting device **500** and the second tub **200** to prevent interference generated between them. The damping material **280** may have a predetermined elastic force and it is provided between the supporting device **500** and the second tub **200**, to prevent the interference between the second tub **200** and the supporting device **500** even if the second tub **200** is vibrated. The damping material **280** may be provided in at least one of the supporting device **500** and the second tub **200**, for example, it may be provided along an outer circumference of the second tub **200** as shown in FIG. **23**.

Meanwhile, the supporting device **500** provided in the laundry apparatus **1** according to some embodiments damps the vibration of the second tub **200**. However, in case of damping the vertical and/or horizontal vibration of the second tub **200**, the supporting device **500** may be provided along at least three portions or more along the outer circumference of the second tub **200**. When the plurality of the supporting devices **500** are provided at two portions along the outer circumference of the second tub **200**, a yawing phenomenon might be generated with respect to the supporting device **500**.

FIG. **24** is a plane view of the drawer **100** when the drawer **100** is provided in the second cabinet **20**. FIG. **24** illustrates three supporting devices **500** provided in the laundry apparatus along the outer circumference of the second tub **200**.

In reference to FIG. **24**, the supporting device **500** according to this embodiment includes a first supporting device **500a** provided in a front surface of the second tub **200** and second and third supporting devices **500b** and **500c** provided to form the same angle with the first supporting device **500a**. For example, the second and third supporting devices **500b** and **500c** may be located approximately adjacent to rear corners of the drawer **100**. An angle formed between the first supporting device **500a** and the second supporting device **500b** and an angle formed between the first supporting device **500a** and the third supporting device **500c** may be approximately 120° ~ 60° . An angle formed between the second supporting device **500b** and the third supporting device **500c** may be approximately 120° ~ 60° .

As mentioned above, the laundry apparatus **1** according to the present invention includes the supporting device **500** configured to prevent the vibration of the second tub **200**, to reduce noise and vibration generated therein.

When the second cabinet **20** is provided, the laundry apparatus **1** according to the present invention may include the supporting device **500** which can be installed in the narrow internal space of the second cabinet **20** smoothly.

Meanwhile, it is necessary to provide a drainage pump **300** provided in the second tub **200** of the second treating part **20a** to drain the wash water having treated the laundry. The wash water drained from the second treating part **20a** is drained via a second drainage pipe **480** and an auxiliary drainage pump **300** for smooth drainage of the wash water. The drainage pump **300** mentioned above is configured to perform drainage of wash water and to filter dirt drained together with the wash water simultaneously. However, this

22

embodiment requires a new structured drainage pump **300** because of the narrow installation space formed in the second treating part **20a**.

As follows, the drainage pump **300** according to this embodiment will be described in detail in reference to the accompanying drawings.

As shown in FIG. **25**, the drainage pump **300** according to an embodiment of the present invention is installed in a front edge portion of the drawer **100**. The drainage pump is configured of a filter part **310** and a pump part **320**. The pump part **320** is installed in the drawer **100** and the filter part **310** is detachably installed in an upper horizontal direction of the drawer **100**.

The reason why the filter part **310** is detachably in an upper portion of the drawer **100** vertically is that the installation space for the pump part **320** installed in the drawer is very narrow. In other words, if the filter part **310** is detachable forward or sideward with respect to the drawer **100**, a filtering area of the filter part **310** is reduced possibly making it difficult to perform smooth filtering. However, if the filtering effect of the filter part **310** is enough, the filter part **310** could be detached along a forward or sideward direction of the drawer **100**.

As shown in FIGS. **26** to **29**, the filter part **310** and the pump part **320** of the drainage pump may be detached vertically.

Here, the filter part **310** is formed in a cylindrical shape having a hollow formed therein and it includes an inlet hole **311** formed in a lower portion thereof to draw the wash water therein and a plurality of filter holes **313** formed in an outer circumferential surface thereof, except the inlet hole **311**, to filter the wash water. A handle **315** is provided in a top of the filter part **310** to detach the filter part **310** from the pump part **320**. Here, a cut-out plane surface **317** is formed in a body of the filter part **310** to limit the insertion direction of the filter part **310**.

In the meanwhile, the pump part **320** includes a filter coupling part **321** configured to couple the filter part **310** thereto insertedly, a drainage chamber **328** in communication with the filter coupling part **321** and a pump **329** provided in the drainage chamber **328** to generate a pumping power.

Here, the filter coupling part **321** is formed in a cylindrical shape, with an open top to allow the filter part **310** to be inserted therein and a hollow formed therein. A raised surface **322**, corresponding to the cut-out surface **317** formed in the filter part **310**, is formed in an inner surface of the filter coupling part **321**. The insertion direction of the filter part **310** inserted in the filter coupling part **321** is determined by the shape of the raised surface **322** and the shape of the cut-out surface **317** corresponding to the raised surface **322**.

The filter coupling part **321** forms a relatively broad space, compared with the filter part **310**. A predetermined space where the wash water drawn via the inlet hole of the filter **310** passes the filter hole **313** of the filter part **310** is formed in the filter part **310**.

Meanwhile, a water inlet hole **323** corresponding to the inlet hole **311** of the filter part **310** is formed in a lower portion of the filter coupling part **321** to draw the wash water therein. It is preferable that the water inlet hole **323** contacts with the inlet hole **311** formed in the filter part **310** closely to supply the wash water drawn via the water inlet hole **323** toward the inlet hole **311**.

A wash water staying space **324** extending from the filter coupling part **321** is formed in the lower portion of the filter coupling part **321**. A drainage path **325** to pass the wash

water filtered by the filter part 310 therein is formed underneath the wash water staying space 324. The drainage path 325 forms a moving passage of the wash water toward a lower center of the drainage chamber 328 which will be described later, specifically, a center of an impeller 341 of the pump 329 which will be described later.

The drainage chamber 328 is located adjacent to the filter coupling part 321, beyond the drainage path 325 extended from the lower portion of the filter coupling part 321. The pump 329 is installed in the drainage chamber 328 and an impeller 341, rotated by the rotation of the pump 329, is located in the drainage chamber 328.

Moreover, a water outlet hole 342 is formed in a predetermined portion of the drainage chamber 328 to drain the wash water therethrough by the rotation of the impeller 341. A drainage hole 345 is additionally formed in an opposite portion of the water outlet hole 342 to drain the wash water remaining in the drainage chamber 328 in the maintenance of the drainage pump 300. The drainage hole 345 may be closed by an auxiliary cap (not shown).

In the meanwhile, when the drainage pump 300 is driven at a high speed in the above structure of the drainage chamber 328, a pressure inside the drainage chamber 328 may be varied by the rotation of the impeller 341. In other words, the pressure of the portion inside the drainage chamber 328 where the wash water is drained may be increased by the impeller 341 and the pressure of the portion where the wash water is drawn may be decreased by the suction of the impeller 341.

Here, when the pressure is decreased by the suction of the impeller 341, vapors might be generated in the wash water by the lowering pressure. The vapor generated in the drainage chamber 328 might affect the operation of the impeller 341, only to result in poor water drainage and noise generated by the vapors during the rotation of the impeller 341.

In the meanwhile, a partition wall 326 is located between the wash water staying space 324 and the drainage chamber 328 to partition off a predetermined space into the wash water staying space 234 and the drainage chamber 328. The partition wall 326 includes a through hole 327 to allow the wash water staying space 324 to communicate with the drainage chamber 328, rather than the drainage path 325.

When the pressure inside the drainage chamber 328 is decreased by the rotation of the impeller 341, the through hole 327 draws the wash water inside the wash water staying space 324 into the drainage chamber 328 to prevent the pressure inside the drainage chamber 328 from decreasing. Because of that, the pressure inside the drainage chamber 328 is decreased by the rotation of the impeller 341 and the smooth driving of the pump may be maintained.

Meanwhile, the second treating part 20a of the laundry apparatus 1 described above is movably supported by the supporting device 500. In this case, the second tub 200 is moved by a shock generated by the movement of the laundry apparatus 1 and it might collide with the inside of the drawer 100 to cause damage and breakage thereof. As a result, a fixing material configured to prevent the movement of the second tub 200 when the laundry apparatus 1 is moved is required.

As shown in FIG. 30, a transit bolt securing part 260 for securing the vibration of the second tub 200 when the laundry apparatus 1 is moved may be further formed in a predetermined portion of an outer circumferential surface of the second tub 200. It is preferable that the transit bolt securing part 260 is formed in a rear portion of the second tub 200. When the laundry apparatus 1 is moved, a transit bolt 262 passing through the second cabinet 20 is secured to

the transit bolt securing part 260 formed in the rear portion of the second tub 200, to prevent vibration of the second tub 200.

Alternatively, a transit bolt 262 passing through the drawer 100 and the second cabinet 20 is secured to the transit securing part 260. In this case, vibration of the second tub 200 is prevented by the transit bolt 262 secured via the drawer 100 and vibration of the second cabinet 20 and the drawer 100 are prevented from being open from the second cabinet 20, when the laundry apparatus 1 is moved.

Moreover, the securing process of the second tub 200 secured by the transit bolt 262 as mentioned above may prevent the horizontal vibration of the second tub 200. However, the horizontal and vertical vibration might be generated complicatedly, when the laundry apparatus 1 is moved. Because of that, it is necessary to prevent the vertical vibration of the second tub 200. The bottoms of the second cabinet 10 and the drawer 100 are open and an auxiliary vibration preventing material 270 is inserted in the open bottoms of the second cabinet 20 and the drawer 100, to prevent the vertical vibration of the second tub 200.

The auxiliary vibration preventing material 270 is formed of a predetermined material such as Styrofoam having a shape corresponding to the shape of space located between the second tub 200 and the drawer. The auxiliary vibration preventing material 270 is inserted into the drawer 100 from the bottom of the second cabinet 20, to fix the second tub 200. As a result, the vibration of the second tub 200 may be prevented by the transit bolt 262 and the auxiliary vibration preventing material 270 mentioned above, when the laundry apparatus 1 is moved.

Meanwhile, when the drum is rotated, a balancer used to reduce eccentricity of the drum may be provided. However, the second cabinet 20 provided in the laundry apparatus according to some embodiments may have a smaller washing capacity, that is, at least one of a smaller volume and a smaller height than the first cabinet 20. In case of providing a balancer at the second drum 600, the space for installing the balancer makes the capacity of the second drum 600 smaller or the installation space of the balancer itself may be insufficient.

As a result, in case a ball balancer is provided in the second drum 600 of the second cabinet 20, the present invention provides a balancer capable of reducing an installation space. For that, the balancer according to an embodiment may be employed as at least a part of an outer wall of the drum 600.

If the balancer is provided in the drum like the conventional laundry apparatus, a part of the volume inside the drum is used as an installation space for the balancer and the drum capacity decrease cannot be avoided. In contrast, if the balancer is provided outside the drum, the internal space of the second cabinet 20 is narrow and it is difficult to secure an enough space with the tub.

As a result, an outer wall of the balancer may be used as a part of an outer wall of the second drum 600, not to reduce the capacity of the second drum 600 and to secure the installation space for the balancer. As follows, the balancer will be described in detail in reference to the accompanying drawings.

In reference to FIGS. 31 and 32, a balancer 630 according to an embodiment is provided at a top of the drum 600 to be substantially employed as a predetermined portion of a wall of the second drum 600. In other words, the balancer 630 is provided at the top of the drum 600. It can be expected that the top of the drum second drum 600 is extended as much as the height of the balancer 630. For that, the balancer 630

25

may be projected from the top of the second drum 600 a predetermined distance. In other words, the balancer 630 according to some embodiments may be projected from a top end of the second drum 600, rather than provided inside or outside the second drum 600.

In this case, as shown in FIG. 31, an outer circumferential surface of the balancer 630 may be substantially continuous from an outer circumferential surface of the second drum 600. The outer circumferential surface of the balancer 630 may be provided along the same surface which is identical to the outer circumferential surface of the second drum 600, that is, a predetermined virtual surface. If the balancer 630 is projected outwardly from the second drum 600, the internal space of the second cabinet 20 is narrow and interference between the balancer 630 and the second tub 200 might be generated during rotation of the second drum 600, to cause an error. Since the balancer 630 according to some embodiments forms at least a part of the wall of the second drum 600, the balancer 630 may minimize the capacity decrease of the second drum 600.

The connection between the balancer 630 and the second drum 600 will be described as follows. For example, at least one first connecting portion 631 is provided in a bottom of the balancer 630 and at least one second connecting portion 635 corresponding to the first connecting portion 631 may be provided in the top of the second drum 600. Here, the first connecting portion 631 may include a first extended portion 632 extending from the bottom of the balancer 630 downwardly and a first seating portion 643. The second connecting portion 635 includes a second extended portion 636 extending from the top of the second drum 600 upwardly and a second seating portion 638. The first and second extended portions 632 and 636 may include first and second connecting holes 633 and 637, respectively.

When the balancer 630 is connected with the second drum 600, the first extended portion 632 of the balancer 630 may be seated on the second seating portion 638 of the second drum 600 and the second extended portion 636 of the second drum 600 may be seated on the first seating portion 634 of the balancer 630. In other words, when the first and second extended portions 632 and 636 are seated on the second and first seating portions 638 and 634, respectively, the first connecting hole 633 is in communication with the second connecting hole 637. Because of that, a fastening material passing through the first and second connecting holes 633 and 637 may be fastened to connect the balancer 630 to the second drum 600.

In the meanwhile, if the fastening material 650 is projected toward the outside of the second drum 600, interference with the second tub 200 might be generated during the rotation of the second drum 600. Because of that, a concave portion 634a may be provided to prevent the fastening material 650 from being projected toward the outside of the second drum 600. The concave portion 634a may be provided between the first connecting portion 631 and the second connecting portion 635. When it is fastened, the fastening material 650 is inserted in the concave portion 634a and it is prevented from being projected toward the outside of the second drum 600.

The second cabinet 20 of the laundry apparatus 1 according to an embodiment may have at least one of a smaller volume and a smaller height than the first cabinet 10. The height of the second drum 600 may be smaller than that of the first drum. In some embodiments, the balancer 630 is provided on the top of the second drum 600, the height of the second drum 600 may be smaller than a diameter of the second drum 600. In other words, the balancer 630 forms a

26

predetermined part of the outer wall of the second drum 600 and the height of the second drum 600 itself may be smaller accordingly. As a result, the height of the second drum 600 may be smaller than the diameter of the second drum 600.

When the height of the second drum 600 is smaller as mentioned above, compared with that of the conventional drum, it could be difficult to manufacture the second drum 600 according to a conventional method. In other words, a plate type side wall is rolled to be circular and the conventional drum is formed. A base is manufacture independently and the base is connected with the side wall. The height of the second drum 600 according to this embodiment is smaller than that of the conventional drum. The second drum 600 may not be properly manufactured if a side wall and a base are independent and then connect with each other to form the drum. Because of that, to manufacture the second drum 600 of the laundry apparatus according to some embodiments, a single metal sheet is provided and the single metal sheet is used to manufacture the second drum 600 via a drawing process. This is because the height of the second drum 600 is relatively smaller. It is possible to manufacture the second drum 600 in the drawing process and it is further possible to manufacture the second drum 600 according to the embodiment in a single drawing process. As a result, a side wall and a base may be integrally formed as one body to be the second drum 600 according to the embodiment.

The conventional drum provided in the laundry apparatus includes a plurality of drainage holes formed in the side wall thereof to drain water inside the drum. When the drum is rotated, the water inside the drum is drained toward the tub to perform washing and rinsing more smoothly. To form the plurality of the drainage holes, the drum is punched from the inside toward the outside.

However, the second drum 600 according to one embodiment may be integrally manufactured as one body via the drawing process, with a reduced height. If the side wall of the second drum 600 is punched to form drainage holes, portions near the drainage holes might be distorted. In a severe case, a circular profile of the second drum might be distorted during punching of the side wall to form drainage holes. If the profile of the second drum is not uniformly even, the distance with the tub may not be uniform when the drum is rotated, which may cause an error.

To solve this potential problem, the second drum 600 according to some embodiments may not include drainage holes formed along the side wall. Rather, the second drum 600 may include only a drainage hole formed in a drum base 620. When the drum base 620 of the second drum 600 is rotated, the distance with the tub 200 is not so fatal, compared with the side wall, and it is possible to form the drainage hole in the drum base 620.

However, when only the drum base 620 includes the drainage hole, water inside the second drum 600 might leak outside via the top of the second drum 600 by a centrifugal force during the rotation of the second drum 600 and the water might leak outside the second tub 200 according to the rotational speed of the second drum 600.

As a result, auxiliary means for drain the water inside the second drum 600 may be further provided in the side wall to circulate the water via the space with the second tub 200.

For example, according to an embodiment, an opening 640 is provided between the second drum 600 and the balancer 630 to drain the water inside the second drum toward the second tub 200 during the rotation of the second drum 600. In other words, as shown in FIG. 32, the balancer 630 and the second drum 600 may be connected via the first and second connecting portions 631 and 635. The opening

640 may be provided between the first and second connecting portions 631 and 635. When the water is lifted toward an inner wall of the second drum 600 by the centrifugal force, the water inside the second drum 600 may be drained to a predetermined space formed between the second tub 200 and the second drum 600 via the opening 640. The drained water may be stored in the space formed between the second tub 200 and the second drum 600 or it may be re-supplied to the inside of the second drum 600 via the drainage hole provided in the drum base 620 of the second drum 600.

Meanwhile, the drum integrally manufactured as one body in the drawing process may have a deterioration in strength in comparison with a drum manufactured in a conventional process. Also, the internal volume of the second cabinet 20 is narrow and the volume, that is, the washing capacity of the second tub 200 provided in the second cabinet may be decrease. The second drum 600 according to this embodiment includes a structure capable of solving these disadvantages, which will be described as follows.

In reference to FIGS. 33 and 34, the second drum 600 according to some embodiments may reinforce the strength of the drum itself and it may include a stepped portion 622 provided in the drum base 620 to enhance the washing capacity of the second drum 600. Here, the stepped portion 622 may be provided to make an outer portion of the drum base 620 lower than a center thereof. The stepped portion 622 is provided to reinforce the strength of the second drum 600 and to make the second drum 600 getting lower as coming toward the outer portion. Because of that, the internal volume of the second drum 600 may be increased.

Moreover, to reinforce the strength of the second drum 600, the second drum 600 according to this embodiment includes a first convex portion 624 extending towards the center of the drum base 620 from an outer portion of the drum base 620. For example, at least one convex portion 624 may be provided and the at least one convex portion 624 may be extended toward the center from the outer portion of the drum base 620. In this case, the first convex portion 624, extending toward the center of the drum base 620, may be connected with the stepped portion 622 of the drum base 620. As a result, the strength of the second drum according to this embodiment may be reinforced by the stepped portion 622 provided in the drum base 620 and the first convex portion connected with the stepped portion 622.

In the meanwhile, the second drum 600 may be rotatable within the second tub 200. In this case, the second drum 600 may include a connecting portion 660 extended from the shaft 700 to be connected therewith, in communication with the shaft 700, to allow the second drum 600 to be rotatable. The connecting portion 660 may be connected with the second drum 600 by a fastening material (229, see FIG. 33) such as a bolt. The connecting portion 660 extends from the shaft 700 provided in the center of the drum base 620 in a radial direction. A seating portion may be provided in the drum base 620 of the second drum 600 to seat the connecting portion 660 thereon. The seating portion may be created to be a second convex portion 626 extending outwardly from the center of the drum base 620. In other words, the connecting portion 660 may be seated in a lower portion of the second convex portion 626 and it may be connected with the second drum 600 by the fastening material 650.

When the stepped portion 622 is provided in the drum base 620 of the second drum 600 as mentioned above, a stepped portion 221 may be provided in a tub base 220 of the second tub 200 to maintain the predetermined distance with

the second drum 600 and to reinforce the strength of the second tub 200. The stepped portion has an outer portion lower than a center portion.

According to the laundry apparatus 1 described above, the balancer 630 forming at least a predetermined part of the wall of the drum may be provided. Because of that, when the second cabinet 20 is provided, the second drum 600 may be installed in the second cabinet 20 having a relatively narrow internal space and the drum capacity decrease may be minimized.

Meanwhile, drainage of the wash water may be performed in the first treating part 10a located beyond the second treating part and the second treating parts 20a. At this time, the wash water drained from the first treating part 10a might flow backward to the second treating part 20a. It is required to improve the drainage structure of the first and second treating parts 10a and 20a.

As follows, the drainage structure of the first and second treating parts 10a and 20a provided in the laundry apparatus 1 according to embodiments of the present invention will be describe in detail in reference to the accompanying drawings.

As shown in FIG. 13, a first drainage pipe 16 is provided in the first treating part 10a to drain the wash water used in the first treating part 10a. The first drainage pipe 16 is in communication with the first tub of the first treating part 10a. A second drainage pipe 480 is provided in the second treating part 20a to drain the wash water used in the second treating part 20a. The second drainage pipe 480 is in communication with the second tub 200. The first drainage pipe 16 of the first treating part 10a and the second drainage pipe 480 of the second treating part 20a may be integrated outside the cabinet 1a. A junction pipe 485 is provided at a junction point (P) and the junction pipe 485 is arranged in a "U" shape, to prevent the drained wash water from flowing backward.

Together with that, the second drainage pipe 480 of the second treating part 20a is upward with respect to the ground for a predetermined period and downward again to be integrated with the first drainage pipe 16 of the first treating part 10a. The second drainage pipe 480 has an outlet point (O) led out from the bottom of the second tub 200, a maximum point (M) of the highest position with respect to the ground and a junction point (P) integrated with the first drainage pipe 16 of the first treating part 10a.

Here, the outlet point (O) and the junction point (P) are located higher than the maximum point (M). In other words, the maximum point (M) is located higher than the outlet point (O) and the junction point (P). As a result, the wash water of the junction point (P) may be prevented from flow backward into the second tub 200 against the drainage direction.

When the laundry is washed by using the second treating part 20a, too many bubbles might be generated in the second tub 200. When too many bubbles are generated in the second tub 200, a friction may be generated by the bubbles located between the second drum 600 and the second tub 200. The friction interferes with efficient rotation of the second drum 600.

Because of that, the second treating part 20a may include a bubble outlet pipe 490 to discharge the bubbles generated in the second tub 200. An end of the bubble outlet pipe 490 is coupled to a predetermined portion of the top of the second tub 200 and the other end is connected with the second drainage pipe 480. Preferably, the end of the bubble outlet pipe 490 is coupled to a top surface of the top cover 210 of the second tub 200.

In addition, a check valve **487** may be provided at a connected point between the bubble outlet pipe **490** and the second drainage pipe **480**. The check valve **487** may be selectively closed according to a case of discharging bubbles or a case of discharging wash water.

In the meanwhile, the bubble outlet pipe **490** may be used to discharge too much steam generated in the second tub **200**. The feature used to discharge the too much steam generated in the second tub **200** is the same as the feature used to discharge the bubbles and detailed description thereof will be omitted accordingly.

It will be apparent to those skilled in the art that various modifications and variations can be made in embodiments of the present invention without departing from the spirit or scope of the inventions. Thus, it is intended that embodiments of the present invention cover the modifications and variations of embodiments of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A laundry treating apparatus comprising:
a cabinet;
a drawer adapted to be drawn from the cabinet;
a tub provided in the drawer to store water;
a drum rotatably provide in the tub to receive laundry;
a motor mounted on a bottom surface of the tub;
a rotating shaft configured to penetrate the bottom surface of the tub to connect the motor to the drum;
a heat sump protruding downwardly from a bottom surface of the tub, and having a first side surface provided with an insertion hole into which a heater is inserted so as the heater is received in a space provided therein;
a drainage part connected to a lower portion of a second side surface of the heat sump opposite to the first side surface of the heat sump and configured to drain the water from the heat sump to the outside of the tub; and
a drainage pipe fluidly connected to the drainage part to guide the water discharged from the heat sump to the outside of the cabinet,
wherein the drainage part is a pipe extended from the heat sump along a direction parallel to a bottom surface of the cabinet.
2. The laundry treating apparatus of claim 1, further comprising:
a sloping surface that is provided in the tub to guide the water in the tub to the heat sump.
3. The laundry treating apparatus of claim 1, wherein a length between the bottom surface of the tub and a bottom surface of the heat sump is shorter than a length between the bottom surface of the tub and a bottom surface of the motor.
4. The laundry treating apparatus of claim 3, wherein the motor comprises a stator mounted on the bottom surface of the tub and located outside the tub; and a rotor, to which one end of the rotating shaft is fixed, configured to surround the stator to be rotatable by the stator, and

a length between the bottom surface of the tub and the bottom surface of the heat sump is shorter than a length between the bottom surface of the tub and a bottom surface of the rotor.

5. The laundry treating apparatus of claim 3, wherein the motor comprises a stator mounted on the bottom surface of the tub and located outside the tub; and a rotor, to which one end of the rotating shaft is fixed, configured to surround the stator to be rotatable by the stator, and
the bottom surface of the heat sump is configured to locate at a height between an upper end of the rotor and a bottom surface of the rotor.
6. The laundry treating apparatus of claim 1, further comprising:
a branched pipe branched from the drainage part and extended upwardly along a height direction of the tub.
7. The laundry treating apparatus of claim 1, further comprising:
a drainage pump to connect the drainage part through the drainage pipe, wherein the drainage pump is located in a corner of the drawer formed between the tub and the drawer in a corner of the drawer.
8. The laundry treating apparatus of claim 1, further comprising:
a securing part provided in the tub; and
a transit bolt configured to couple the securing part passing through the drawer to fix the tub to the cabinet.
9. The laundry treating apparatus of claim 6, wherein the branched pipe includes an air chamber having a volume therein.
10. The laundry treating apparatus of claim 9, further comprising:
a water level sensor configured to sense a water level in the tub and disposed on the air chamber.
11. The laundry treating apparatus of claim 1, wherein the heater comprises:
a heating rod inserted into the heater sump from the insertion hole of the first side surface toward the second side surface, and
a heater terminal configured to fix a first end of the heating rod to the first side surface of the heat sump and connect to a power terminal,
wherein the heater terminal is provided to face a same direction as a direction to which the heating rod faces.
12. The laundry treating apparatus of claim 11, wherein a second end of the heating rod is configured to be upward and the heater terminal is configured to be downward so that an installation direction of the heater becomes sloping.
13. The laundry treating apparatus of claim 11, further comprising:
a heater clamp provided at the second side surface of the heat sump to fix the heating rod to the heat sump.
14. The laundry treating apparatus of claim 13, wherein a length from the first side surface to the second side surface of the heat sump is shorter than a sum of a length of the heater and a length of the heater clamp.

* * * * *