

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 January 2004 (29.01.2004)


PCT

(10) International Publication Number
WO 2004/010573 A1

- (51) International Patent Classification⁷: H03D 1/04, 1/06, H03K 5/01, 6/04, H04B 1/10, H04L 1/00, 25/08
- (21) International Application Number: PCT/US2003/022652
- (22) International Filing Date: 18 July 2003 (18.07.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/397,361 19 July 2002 (19.07.2002) US
- (71) Applicant: INTERDIGITAL TECHNOLOGY CORPORATION [US/US]; 300 Delaware Avenue, Suite 527, Wilmington, Delaware 19801 (US).
- (72) Inventors: KWAK, Jaeyoung; 447 9th Street, 2nd Floor, Palisades Park, New Jersey 07650 (US). PAN, Jung-Lin; 15 Court Street, Selden, New York 11784 (US). ZEIRA, Ariela; 239 West Neck Road, Huntington, New York 11743 (US).
- (74) Agents: VOLPE, Anthony, S. et al.; Volpe and Koenig, P.C., United Plaza, Suite 1600, 30 South 17th Street, Philadelphia, PA 19103 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: GROUPWISE SUCCESSIVE INTERFERENCE CANCELLATION FOR BLOCK TRANSMISSION WITH RECEPTION DIVERSITY

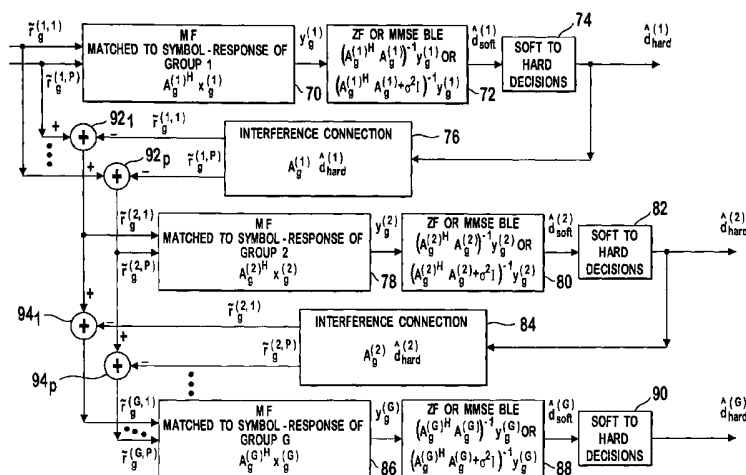

(57) Abstract: A plurality of data signals are received over an antenna array having a plurality of antenna elements. The data signals are transmitted over a shared spectrum in a wireless communication system. A signal having each of the data signals is received over each antenna element. The plurality of data signals are grouped into a plurality of groups. The received signals of the antenna elements are matched filtered (70) for a first group of the plurality of groups, producing a matched filtered result. Data is jointly detected of the first group using the matched filtered result. An interference correction signal is constructed (76) using the detected data for each antenna element. The interference cancelled result is subtracted (92) from the received signal of each antenna element, producing an interference cancelled result for each antenna element. Data is successively detected for remaining groups using the interference cancelled result for each antenna element.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

[0001] GROUPWISE SUCCESSIVE INTERFERENCE CANCELLATION
FOR BLOCK TRANSMISSION WITH RECEPTION DIVERSITY

[0002] FIELD OF INVENTION

[0003] The invention generally relates to wireless communication systems. In particular, the invention relates to joint detection of multiple user signals in a wireless communication system.

[0004] BACKGROUND

[0001] Figure 1 is an illustration of a wireless communication system 10. The communication system 10 has base stations 12₁ to 12₅ which communicate with wireless transmit/receive units (WTRUs) 14₁ to 14₃. Each base station 12₁ has an associated operational area where it communicates with WTRUs 14₁ to 14₃ in its operational area.

[0002] In some communication systems, such as code division multiple access (CDMA) and time division duplex using code division multiple access (TDD/CDMA), multiple communications are sent over the same frequency spectrum. These communications are typically differentiated by their chip code sequences. To more efficiently use the frequency spectrum, TDD/CDMA communication systems use repeating frames divided into time slots for communication. A communication sent in such a system will have one or multiple associated codes and time slots assigned to it based on the communication's bandwidth.

[0003] Since multiple communications may be sent in the same frequency spectrum and at the same time, a receiver in such a system must distinguish between the multiple communications. One approach to detecting such signals is matched filtering. In matched filtering, a communication sent with a single code is detected. Other communications are treated as interference. To detect multiple codes, a respective number of matched filters are used. Another approach is successive interference cancellation (SIC). In SIC, one communication is detected and the contribution of that communication is

subtracted from the received signal for use in detecting the next communication.

[0004] In some situations, it is desirable to be able to detect multiple communications simultaneously in order to improve performance. Detecting multiple communications simultaneously is referred to as joint detection. Some joint detectors use Cholesky decomposition to perform a minimum mean square error (MMSE) detection or zero-forcing block equalizers (ZF-BLEs). Other joint detection receivers use fast Fourier transform based implementations to reduce the complexity further.

[0005] Accordingly, it is desirable to have alternate approaches to multi-user detection.

[0005] SUMMARY

[0006] A plurality of data signals are received over an antenna array having a plurality of antenna elements. The data signals are transmitted over a shared spectrum in a wireless communication system. A signal having each of the data signals is received over each antenna element. The plurality of data signals are grouped into a plurality of groups. The received signals of the antenna elements are matched filtered for a first group of the plurality of groups, producing a matched filtered result. Data is jointly detected of the first group using the matched filtered result. An interference correction signal is constructed using the detected data for each antenna element. The interference cancelled result is subtracted from the received signal of each antenna element, producing an interference cancelled result for each antenna element. Data is successively detected for remaining groups using the interference cancelled result for each antenna element.

[0007] BRIEF DESCRIPTION OF THE DRAWING(S)

[0008] Figure 1 is a simplified illustration of a wireless communication system.

[0009] Figure 2 is a simplified block diagram of a transmitter and a joint detection group successive interference canceller receiver having multiple

antenna elements.

[0010] Figure 3 is an illustration of a communication burst.

[0011] Figure 4 is a flow chart for joint detection group successive interference canceling for a receiver having multiple antenna elements.

[0012] Figure 5 is a simplified block diagram of a joint detection group successive interference canceller.

[0013] DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT(S)

[0014] Hereafter, a wireless transmit/receive unit (WTRU) includes but is not limited to a user equipment, mobile station, fixed or mobile subscriber unit, pager, or any other type of device capable of operating in a wireless environment.

When referred to hereafter, a base station includes but is not limited to a base station, Node-B, site controller, access point or other interfacing device in a wireless environment.

[0006] Figure 2 illustrates a simplified transmitter 26 and receiver 28 using an adaptive combination of joint detection (JD) and group-wise successive interference cancellation (GSIC), "GSIC-JD", where reception diversity is used. In a typical system, a transmitter 26 is in each WTRU 14₁ to 14₃ and multiple transmitting circuits 26 sending multiple communications are in each base station 12₁ to 12₅. A base station 12₁ will typically require at least one transmitting circuit 26 for each actively communicating WTRU 14₁ to 14₃. The GSIC-JD receiver 28 may be at a base station 12₁, WTRUs 14₁ to 14₃ or both, although the more common implementation is at a base station, where the use of multiple antenna elements is more common. The GSIC-JD receiver 28 receives communications from multiple transmitters 26 or transmitting circuits 26.

[0007] Although GSIC-JD is described in conjunction with the preferred application to a slotted CDMA system, such as TDD/CDMA or time division synchronous CDMA (TD-SCDMA), it can be applied to any wireless system where multiple communications share the same frequency band, such as frequency division duplex (FDD)/CDMA and CDMA 2000.

[0008] Each transmitter 26 sends data over a wireless radio channel 30. A data generator 32 in the transmitter 26 generates data to be communicated over a reference channel to a receiver 28. Reference data is assigned to one or multiple codes and/or time slots based on the communications bandwidth requirements. A modulation and spreading device 34 spreads the reference data and makes the spread reference data time-multiplexed with a training sequence in the appropriate assigned time slots and codes, for slotted systems. In non-slotted systems, the reference signal may not be time-multiplexed, such as an almost continuous global pilot. The resulting sequence is referred to as a communication burst. The communication burst is modulated by a modulator 36 to radio frequency. An antenna 38 radiates the RF signal through the wireless radio channel 30 to an antenna array 40 of the receiver 28. The type of modulation used for the transmitted communication can be any of those known to those skilled in the art, such as direct phase shift keying (DPSK), quadrature phase shift keying (QPSK) or M-ary quadrature amplitude modulation (QAM).

[0009] In slotted systems, a typical communication burst 16 has a midamble 20, a guard period 18 and two data fields 22, 24, as shown in Figure 3. The midamble 20 separates the two data fields 22, 24 and the guard period 18 separates the communication bursts to allow for the difference in arrival times of bursts transmitted from different transmitters. The two data fields 22, 24 contain the communication burst's data and are typically the same symbol length. The midamble 20 contains a training sequence.

[0010] The antenna array 40 of the receiver 28 receives various radio frequency signals. The antenna array 40 has P antenna elements 41_1 to 41_P . The received signals are demodulated by demodulators 42_1 to 42_P to produce baseband signals. The baseband signals are processed, such as by a channel estimation device 44 and a GSIC-JD device 46, in the time slots and with the appropriate codes assigned to the communication bursts of the corresponding transmitters 26. The channel estimation device 44 uses the training sequence component in the baseband signals to provide channel information, such as channel impulse responses. The channel information is used by the GSIC-JD

device 46 to estimate the transmitted data of the received communication bursts as either hard or soft symbols.

[0011] Figure 4 is a simplified diagram of a GSIC-JD device 46. For the following, sequences, vectors, and matrices are in boldface and $(\cdot)^H$ denotes the complex conjugate transpose operation and $(\cdot)^T$ denotes the real transposition.

[0012] K signal bursts are simultaneously active in the same frequency band of width B. The K bursts are separated by their different codes. In a UMTS TDD/CDMA system, the codes may consist of a cell specific scrambling code and a single or multiple channelization codes. The finite transmitted data symbol sequence, $\mathbf{d}^{(k)}$, of length N is per Equation 1.

$$\mathbf{d}^{(k)} = (d_1^{(k)} \ d_2^{(k)} \ \dots \ d_N^{(k)})^T, \quad d_n^{(k)} \in V,$$

where $k = 1, 2, \dots, K$ and $n = 1, 2, \dots, N$

Equation 1

[0013] Each data symbols $d_n^{(k)}$ has a duration T_b and each data symbols $d_n^{(k)}$ is taken from a complex M -ary set, V , having M potential values per Equation 2.

$$V = \{v_1 \ v_2 \ \dots \ v_M\}$$

Equation 2

[0014] Each data symbol sequence, $\mathbf{d}^{(k)}$, is spread by the code $\mathbf{c}^{(k)}$. $\mathbf{c}^{(k)}$ is per Equation 3.

$$\mathbf{c}^{(k)} = (c_1^{(k)} \ c_2^{(k)} \ \dots \ c_Q^{(k)})^T, \text{ where } k = 1, 2, \dots, K \text{ and } q = 1, 2, \dots, Q$$

Equation 3

[0015] Each code, $\mathbf{c}^{(k)}$, consists of Q complex chips $c_q^{(k)}$ of duration T_c , where $T_b = T_c / Q$. Each data field of each burst is filled by a chip sequence of length $N \times Q$. Q is the spreading factor. Although the following discussion uses a uniform spreading factor for all the K bursts, it is also readily extendable for variable spreading factors for the bursts. After modulating the data with their respective

codes, the bursts are typically passed through a transmitter (TX) filter for pulse shaping. The receiving antenna array has P antenna elements.

[0016] The K signal bursts pass through K x P linearly independent radio channels having time-variant complex impulse responses, $\tilde{\mathbf{h}}^{(k,p)}$, where $k = 1, 2, \dots, K$ and $p = 1, 2, \dots, P$. $\tilde{\mathbf{h}}^{(k,p)}$ represents the connection of a transmitter k with an antenna element p. These channel output sequences of K bursts are superposed into P received sequences at each antenna element. Each superposed sequence is filtered by the receiver (RX) filter for band limitation and noise suppression and sampled at the chip rate $1/T_c$. The discrete channel impulse responses $\mathbf{h}^{(k,p)}$ for each transmitter and each antenna element is represented as a vector per Equation 4.

$$\mathbf{h}^{(k,p)} = (h_1^{(k,p)} \quad h_2^{(k,p)} \quad \dots \quad h_W^{(k,p)})^T,$$

where $k = 1, 2, \dots, K, p = 1, 2, \dots, P$ and $w = 1, 2, \dots, W$

Equation 4

[0017] W is the length of the impulse response. Each of the W complex samples, $h_w^{(k,p)}$, is taken at the chip rate $1/T_c$, where $W > T_b$. However, this approach can be readily extended to multiple chip rate sampling. Since W may be greater than T_b , inter-symbol interference (ISI) may be present. Typically, the channel impulse responses, $\mathbf{h}^{(k,p)}$, is estimated using a reference sequence, such as a midamble sequences. The symbol responses $\mathbf{b}^{(k,p)}$ for each burst and each antenna are per Equation 5.

$$\mathbf{b}^{(k,p)} = (b_1^{(k,p)} \quad b_2^{(k,p)} \quad \dots \quad b_{Q+W-1}^{(k,p)})^T \equiv \mathbf{h}^{(k,p)} \otimes \mathbf{c}^{(k)},$$

where $k = 1, 2, \dots, K, p = 1, 2, \dots, P$ and $l = 1, 2, \dots, Q + W - 1$

Equation 5

The symbol responses, $\mathbf{b}^{(k,p)}$, have a length of $Q + W - 1$ chips and represent the tail of chips left by a unit symbol.

[0018] Prior to processing each data field, the effect of the midamble on the data field is canceled using a midamble cancellation algorithm. At each antenna element, the received sequence, $\mathbf{r}^{(p)}$, where $p = 1, 2, \dots, P$, is of length $(N Q + W - 1)$. Each $\mathbf{r}^{(p)}$ is effectively a sum of the K bursts and a noise sequence per Equation 6.

$$\mathbf{n}^{(p)} = \begin{pmatrix} n_1^{(p)} & n_2^{(p)} & \dots & n_{N Q + W - 1}^{(p)} \end{pmatrix}^T,$$

where $p = 1, 2, \dots, P$ and $i = 1, 2, \dots, (N Q + W - 1)$

Equation 6

[0019] The zero mean and covariance matrix is per Equation 7.

[0020] $\mathbf{R}_n^{(p)(p)} = E \left\{ \mathbf{n}^{(p)} \mathbf{n}^{(p)H} \right\}$, where $p = 1, 2, \dots, P$

Equation 7

[0021] The transfer system matrix for each burst as received over each antenna element is $\mathbf{A}^{(k,p)}$ and is of size $(N Q + W - 1) \times N$. The transfer system matrix, $\mathbf{A}^{(k,p)}$, is a convolution of the transmitted burst with the channel response, $\mathbf{h}^{(k,p)}$. Each element of the transfer system matrix, $(A_{ij}^{(k,p)})$, is per Equation 8.

$$\mathbf{A}^{(k,p)} = \begin{pmatrix} A_{ij}^{(k,p)} \end{pmatrix}, \text{ where } k = 1, 2, \dots, K, p = 1, 2, \dots, P,$$

$i = 1, 2, \dots, (N Q + W - 1)$ and $j = 1, 2, \dots, N$

$$\text{where } A_{Q(n-1)+l, n}^{(k,p)} = \begin{cases} b_l^{(k,p)} & \text{for } k = 1, 2, \dots, K \\ & p = 1, 2, \dots, P \\ & l = 1, 2, \dots, Q + W - 1 \\ & n = 1, 2, \dots, N \\ 0 & \text{otherwise} \end{cases}$$

Equation 8

[0022] The $(N Q + W - 1) \times K N$ transfer system matrix $\mathbf{A}^{(p)}$ for antenna p is per Equation 9.

$$\mathbf{A}^{(p)} = [\mathbf{A}^{(1,p)} \quad \mathbf{A}^{(2,p)} \quad \dots \quad \mathbf{A}^{(K,p)}], \text{ where } k = 1, 2, \dots, K \text{ and } p = 1, 2, \dots, P$$

Equation 9

[0023] The $P(NQ + W - 1) \times N$ transfer system matrix $\mathbf{A}^{(k)}$ for burst k is per Equation 10.

$$\mathbf{A}^{(k)} = \begin{bmatrix} \mathbf{A}^{(k,1)^T} & \mathbf{A}^{(k,2)^T} & \dots & \mathbf{A}^{(k,P)^T} \end{bmatrix}^T, \text{ where } k = 1, 2, \dots, K \text{ and } p = 1, 2,$$

..., P Equation 10

[0024] The received sequence $\mathbf{r}^{(p)}$ at antenna p is per Equation 11.

$$\begin{aligned} \mathbf{r}^{(p)} &= (r_1^{(p)} \quad r_2^{(p)} \quad \dots \quad r_{NQ+W-1}^{(p)})^T \\ &= \mathbf{A}^{(p)} \mathbf{d} + \mathbf{n}^{(p)} = \sum_{k=1}^K \mathbf{A}^{(k,p)} \mathbf{d}^{(k)} + \mathbf{n}^{(p)} \end{aligned}$$

Equation 11

[0025] The overall data symbol vector is per Equation 12.

$$\begin{aligned} \mathbf{d} &= (\mathbf{d}^{(1)^T} \quad \mathbf{d}^{(2)^T} \quad \dots \quad \mathbf{d}^{(K)^T})^T \\ &= (d_1 \quad d_2 \quad \dots \quad d_{KN})^T \end{aligned}$$

Equation 12

[0026] The components of \mathbf{d} are per Equation 13.

$$d_{N(K-1)+n} = d_n^{(k)}, \text{ where } k = 1, 2, \dots, K \text{ and } n = 1, 2, \dots, N.$$

Equation 13

[0027] The $P(NQ + W - 1) \times KN$ overall transfer system matrix \mathbf{A} is per Equation 14.

$$\mathbf{A} = (\mathbf{A}^{(1)^T} \quad \mathbf{A}^{(2)^T} \quad \dots \quad \mathbf{A}^{(P)^T})^T$$

Equation 14

[0028] The overall noise vector \mathbf{n} is per Equation 15.

$$\begin{aligned}\mathbf{n} &= \begin{pmatrix} \mathbf{n}^{(1)T} & \mathbf{n}^{(2)T} & \dots & \mathbf{n}^{(P)T} \end{pmatrix}^T \\ &= \begin{pmatrix} n_1 & n_2 & \dots & n_{P(NQ+W-1)} \end{pmatrix}^T\end{aligned}$$

Equation 15

[0029] The components of \mathbf{n} are per Equation 16.

$$n_{(NQ+W-1)(P-1)+i} = n_i^{(P)}, \text{ where } p = 1, 2, \dots, P \text{ and } i = 1, 2, \dots, (NQ + W - 1)$$

Equation 16

[0030] The covariance matrix of the total noise vector \mathbf{n} is per Equation 17.

$$\mathbf{R}_n = E\{\mathbf{n} \mathbf{n}^H\}$$

$$= \begin{bmatrix} \mathbf{R}_n^{(1)(1)} & \mathbf{R}_n^{(1)(2)} & \dots & \mathbf{R}_n^{(1)(P)} \\ \mathbf{R}_n^{(2)(1)} & \mathbf{R}_n^{(2)(2)} & \dots & \mathbf{R}_n^{(2)(P)} \\ \vdots & \vdots & \ddots & \vdots \\ \mathbf{R}_n^{(P)(1)} & \mathbf{R}_n^{(P)(2)} & \dots & \mathbf{R}_n^{(P)(P)} \end{bmatrix}$$

$$\text{where } \mathbf{R}_n^{(i)(j)} = E\{\mathbf{n}^{(i)} \mathbf{n}^{(j)H}\}, \text{ where } i = 1, 2, \dots, P \text{ and } j = 1, 2, \dots, P$$

Equation 17

[0031] The overall received sequence is represented per Equation 18.

$$\begin{aligned}\mathbf{r} &= \begin{pmatrix} \mathbf{r}^{(1)T} & \mathbf{r}^{(2)T} & \dots & \mathbf{r}^{(P)T} \end{pmatrix}^T \\ &= \begin{pmatrix} r_1 & r_2 & \dots & r_{P(NQ+W-1)} \end{pmatrix}^T \\ &= \mathbf{A} \mathbf{d} + \mathbf{n}\end{aligned}$$

Equation 18

[0032] The components of \mathbf{r} are per Equation 19.

$$r_{(NQ+W-1)(P-1)+i} = r_i^{(P)}, \text{ where } p = 1, 2, \dots, P \text{ and } i = 1, 2, \dots, (NQ + W - 1)$$

Equation 19

[0033] The overall received sequence \mathbf{r} is per Equation 20.

$$\begin{aligned}\mathbf{r} &= \sum_{k=1}^K \mathbf{r}^{(k)} + \mathbf{n} \\ &= \sum_{k=1}^K \mathbf{A}^{(k)} \mathbf{d}^{(k)} + \mathbf{n}\end{aligned}$$

Equation 20

[0034] $\mathbf{r}^{(k)} = \mathbf{A}^{(k)} \mathbf{d}^{(k)}$ represents the contribution of user k's signal in the received sequence. The overall received vector \mathbf{r} is preferably processed by a GSIC using the block linear equalizer in order to determine the continuous valued estimates $\hat{\mathbf{d}}$, per Equation 21.

$$\begin{aligned}\hat{\mathbf{d}} &= \begin{pmatrix} \hat{\mathbf{d}}^{(1)T} & \hat{\mathbf{d}}^{(2)T} & \dots & \hat{\mathbf{d}}^{(K)T} \end{pmatrix}^T \\ &= \begin{pmatrix} \hat{d}_1 & \hat{d}_2 & \dots & \hat{d}_{KN} \end{pmatrix}^T\end{aligned}$$

Equation 21

[0035] Two approaches to using GSIC use block linear equalizers with reception diversity, although others may be used. One approach uses a zero forcing (ZF) criterion and another uses a minimum mean squared error (MMSE) criterion.

[0036] For the following, the additive noise is assumed to be spatially and temporally white and the covariance matrix of the overall noise vector is $\mathbf{R}_n = \sigma^2 \mathbf{I}$. σ^2 is the variance of the additive noise and \mathbf{I} is the identity matrix with size $K N \times K N$. With reception diversity, the ZF-BLE can be derived by minimizing the quadratic cost function $J(\hat{\mathbf{d}}_{ZF})$, per Equation 22.

$$J(\hat{\mathbf{d}}_{ZF}) = (\mathbf{r} - \mathbf{A} \hat{\mathbf{d}}_{ZF})^H (\mathbf{r} - \mathbf{A} \hat{\mathbf{d}}_{ZF})$$

Equation 22

[0037] $\hat{\mathbf{d}}_{ZF}$ is the continuous valued estimates of \mathbf{d} and “-1” denotes the matrix inverse. The minimum of $J(\hat{\mathbf{d}}_{ZF})$ leads to the continuous valued and unbiased estimate $\hat{\mathbf{d}}_{ZF}$, per Equation 23.

$$\begin{aligned}\hat{\mathbf{d}}_{ZF} &= (\mathbf{A}^H \mathbf{A})^{-1} \mathbf{A}^H \mathbf{r} \\ &= \mathbf{d} + (\mathbf{A}^H \mathbf{A})^{-1} \mathbf{A}^H \mathbf{n}\end{aligned}$$

Equation 23

[0038] The MMSE-BLE minimizes the quadratic cost function $J(\hat{\mathbf{d}}_{MMSE})$, per Equation 24.

$$J(\hat{\mathbf{d}}_{MMSE}) = E \left\{ (\hat{\mathbf{d}}_{MMSE} - \mathbf{d})^H (\hat{\mathbf{d}}_{MMSE} - \mathbf{d}) \right\}$$

Equation 24

[0039] $\hat{\mathbf{d}}_{MMSE}$ is the continuous valued estimates of $\hat{\mathbf{d}}$. With the covariance matrix of data symbols $\mathbf{R}_d = E \{ \mathbf{d} \mathbf{d}^H \} = \mathbf{I}$ and the covariance matrix of the overall background noise vector $\mathbf{R}_n = \sigma^2 \mathbf{I}$, the minimum of $J(\hat{\mathbf{d}}_{MMSE})$ leads to the continuous valued estimate $\hat{\mathbf{d}}_{MMSE}$, per Equation 25.

$$\hat{\mathbf{d}}_{MMSE} = (\mathbf{A}^H \mathbf{A} + \sigma^2 \mathbf{I})^{-1} \mathbf{A}^H \mathbf{r}$$

Equation 25

[0040] \mathbf{I} denotes the $K N \times K N$ identity matrix. Since $\mathbf{A}^H \mathbf{A}$ is a banded block Toeplitz matrix, one approach to solve for the data vector uses an approximate Cholesky formulation. The Cholesky formulation reduces the complexity with negligible loss in performance as compared to an exact solution.

[0041] Preferably, to reduce the complexity and to remove ISI and multiple access interference (MAI), simultaneously, BLEs and GSIC are combined (GSIC-BLE). In GSIC-BLE, K bursts are divided into a small group, preferably, according to the received power. Typically, bursts having roughly same received power get grouped together. Bursts of roughly the same power are bursts that have a combined power as received over the P antenna elements of equivalent power.

[0042] In each interference cancellation stage, GSIC-BLE considers the ISI and MAI of only a subset (group) of the K bursts, and jointly detects the data symbols of this group. The detected symbols of this group are used to generate MAI that this group imparts on the other groups for subsequent stages. This MAI is removed using interference cancellation. If the group size is chosen to be

K, the GSIC-BLE becomes a single user BLE. All of the data is determined in one step.

[0043] As a result, the grouping threshold provides a trade-off between complexity and performance. In the extreme, each K burst can be assigned its own stage. This approach provides the lowest complexity. Conversely, all K bursts can be assigned to a single stage, having the highest complexity.

[0044] Figure 4 is a flow chart of GSIC-BLE with reception diversity. In GSIC-BLE with reception diversity, preferably, all bursts are ordered by the strength of their received power or amplitude, with burst 1 being the strongest, step 50. Such an ordering can be based upon either an apriori knowledge at the receiver or by other estimation schemes commonly employed in the context of SIC or MUD receivers, such as burst-specific channel estimation from a burst-specific training sequence, bank of matched filters, etc. In one implementation, using the known channel, the descending order can be decided per Equation 25.

$$\sum_{p=1}^P \mathbf{h}^{(k,p)H} \mathbf{h}^{(k,p)}, \text{ where } k = 1, 2, \dots, K$$

Equation 25

[0045] Using the list of order, GSIC-BLE divides bursts that have roughly the same power, i.e., within a certain threshold of each other, into G groups, step 52. The groups are arranged in descending order of their received power. The order can be represented as $i = 1 \dots G$. n_i is the number of bursts in the i^{th} group, such as $\sum_{i=1}^G n_i = K$. The receiver consists of G stages. Initially, a joint detection is started with group, $i = 1$.

[0046] For each group, one groupwise BLE matrix is per Equation 26 for a ZF-BLE.

$$\mathbf{M}_{g,ZF}^{(i)} = \left(\mathbf{A}_g^{(i)H} \mathbf{A}_g^{(i)} \right)^{-1} \mathbf{A}_g^{(i)H}, \text{ where } i = 1, 2, \dots, G$$

Equation 26

The second groupwise BLE matrix is per Equation 27 for MMSE-BLE.

$$\begin{aligned}\mathbf{M}_{g,MMSE}^{(i)} &= \left(\mathbf{A}_g^{(i)H} \mathbf{A}_g^{(i)} + \sigma^2 \mathbf{I}_N \right)^{-1} \mathbf{A}_g^{(i)H}, \text{ where } i = 1, 2, \dots, G \\ &= \mathbf{W}_g^{(i)} \mathbf{M}_{g,ZF}^{(i)}\end{aligned}$$

Equation 27

[0047] The wiener estimator of the i^{th} group, $\mathbf{W}_g^{(i)}$, $i = 1 \dots G$, is per Equation 28.

$$\mathbf{W}_g^{(i)} = \left(\mathbf{I}_N + \sigma_g^2 \left(\mathbf{A}_g^{(i)H} \mathbf{A}_g^{(i)} \right)^{-1} \right)^{-1}$$

Equation 28

\mathbf{I}_N is identity matrix of size $N \times N$ where N is the number of symbols in each data field of each burst.

[0048] In the first stage, the transfer system matrix of the first group $\mathbf{A}_g^{(1)}$ is determined. $\mathbf{A}_g^{(1)}$ is akin to the overall transfer system matrix \mathbf{A} , except that it only contains the symbol responses corresponding to bursts in the first group. In the first stage, the input sequence for the group 1 is given by the overall received sequence per Equation 29.

$$[0049] \quad \mathbf{x}_g^{(1)} = \mathbf{r}$$

Equation 29

[0050] To remove the ISI, MAI, and the near-far effect of bursts in the first group, a multiuser BLE (ZF-BLE or MMSE-BLE) with $\mathbf{A}_g^{(1)}$ is performed. The soft decision symbols for the group 1 $\mathbf{d}_{g,soft}^{(1)}$ are obtained per Equation 30, step 54.

$$\hat{\mathbf{d}}_{g,soft}^{(1)} = \mathbf{M}_g^{(1)} \mathbf{r}$$

Equation 30

where $\mathbf{M}_g^{(i)}$, $i = 1, 2, \dots, G$, can be either $\mathbf{M}_{g,ZF}^{(i)}$ or $\mathbf{M}_{g,MMSE}^{(i)}$.

[0051] $\hat{\mathbf{d}}_{g,soft}^{(1)}$ is a continuous valued estimator of $\mathbf{d}_g^{(i)}$ that represents the sequence of information bearing symbols carried by all bursts in the first group. Based on $\hat{\mathbf{d}}_{g,soft}^{(1)}$, hard decisions are performed to form $\hat{\mathbf{d}}_{g,hard}^{(1)}$, step 56. Using the

hard decision variable $\hat{\mathbf{d}}_{g,soft}^{(1)}$, the contribution $\hat{\mathbf{r}}_g^{(1)}$ of the first group to \mathbf{r} is estimated per Equation 31, step 58.

$$\begin{aligned}\hat{\mathbf{r}}_g^{(1)} &= \begin{bmatrix} \hat{\mathbf{r}}_g^{(1,1)T} & \hat{\mathbf{r}}_g^{(1,2)T} & \dots & \hat{\mathbf{r}}_g^{(1,P)T} \end{bmatrix}^T \\ &= \mathbf{A}_g^{(1)} \hat{\mathbf{d}}_{g,hard}^{(1)}\end{aligned}$$

Equation 31

[0052] $\hat{\mathbf{r}}_g^{(1,p)}$ $p = 1, 2, \dots, P$, is the contribution of the first group to the received sequence at antenna p . For the second stage, the interference-corrected input sequence is obtained by canceling out this MAI from the overall received sequence, per Equation 32.

$$\begin{aligned}\mathbf{x}_g^{(2)} &= \begin{bmatrix} \tilde{\mathbf{r}}_g^{(2,1)T} & \tilde{\mathbf{r}}_g^{(2,2)T} & \dots & \tilde{\mathbf{r}}_g^{(2,P)T} \end{bmatrix}^T \\ &= \mathbf{x}_g^{(1)} - \hat{\mathbf{r}}_g^{(1)} \\ &= (\mathbf{I}_g - \Phi_g^{(1)})\mathbf{r}\end{aligned}$$

Equation 32

$\Phi_g^{(i)}$ is per Equation 33 for a ZF-BLE.

$$\Phi_g^{(i)} \equiv \mathbf{A}_g^{(i)} \left(\mathbf{A}_g^{(i)H} \mathbf{A}_g^{(i)} \right)^{-1} \mathbf{A}_g^{(i)H}$$

Equation 33

$\Phi_g^{(i)}$ is per Equation 34 for a MMSE-BLE.

$$\Phi_g^{(i)} \equiv \mathbf{A}_g^{(i)} \left(\mathbf{A}_g^{(i)H} \mathbf{A}_g^{(i)} + \sigma^2 \mathbf{I} \right)^{-1} \mathbf{A}_g^{(i)H}$$

Equation 34

[0053] \mathbf{I}_g is an identity matrix of size $(NQ + W - 1) \times (NQ + W - 1)$. $\tilde{\mathbf{r}}_g^{(2,p)}$ is a new interference-corrected input sequence for antenna p by subtracting $\hat{\mathbf{r}}_g^{(1,p)}$ from the interference-corrected vector $\tilde{\mathbf{r}}_g^{(1,p)}$ of the first stage input sequence for antenna p (the received sequence at antenna p).

[0054] For subsequent stages, such as an i^{th} stage, a new interference-corrected input sequence is determined by subtracting the MAI of the previous group from the interference-corrected input sequence of the previous stage, $\mathbf{x}_g^{(i-1)}$, per Equation 35.

$$\begin{aligned}\mathbf{x}_g^{(i)} &= \mathbf{x}_g^{(i-1)} - \hat{\mathbf{r}}_g^{(i-1)} \\ &= (\mathbf{I}_g - \Phi_g^{(i-1)}) \mathbf{x}_g^{(i-1)} \\ &= \left[\prod_{j=1}^{i-1} (\mathbf{I}_g - \Phi_g^{(j)}) \right] \mathbf{r}\end{aligned}$$

Equation 35

The product matrices are per Equation 36.

$$\prod_{j=a}^b \mathbf{X}_j = \begin{cases} \mathbf{X}_b \mathbf{X}_{b-1} \cdots \mathbf{X}_{a+1} \mathbf{X}_a, & \text{if } a \leq b \\ \mathbf{I} & \text{if } a > b \end{cases}$$

Equation 36

[0055] Similar to the first stage, $\mathbf{x}_g^{(i)}$ consists of $\tilde{\mathbf{r}}_g^{(i,p)}$, $p = 1, 2, \dots, P$ for each antenna. Single user or multiuser BLE is performed to get rid of the MAI, ISI and the near-far problem of the i^{th} group itself. The soft decision symbols are represented as per Equation 37, step 60.

$$\hat{\mathbf{d}}_{g,\text{soft}}^{(i)} = \mathbf{M}_g^{(i)} \mathbf{x}_g^{(i)}$$

Equation 37

[0056] Using the soft decision symbols, hard decision symbols $\hat{\mathbf{d}}_{g,\text{hard}}^{(i)}$ are produced by making hard decisions, step 62. The hard symbols are used to generate the contribution $\hat{\mathbf{r}}_g^{(i)}$ of the i^{th} group in \mathbf{r} , per Equation 38, step 64.

$$\hat{\mathbf{r}}_g^{(i)} = \mathbf{A}_g^{(i)} \hat{\mathbf{d}}_{g,\text{soft}}^{(i)}$$

Equation 38

[0057] Similar to the first stage, $\hat{\mathbf{r}}_g^{(i)}$ consists of $\hat{\mathbf{r}}_g^{(i,p)}$, $p = 1, 2, \dots, P$ for each antenna. For the next stage, the interference-corrected input sequence is

obtained by subtracting this MAI from the i^{th} input sequence, as per Equation 39, step 66.

$$\begin{aligned}\mathbf{x}_g^{(i+1)} &= \mathbf{x}_g^{(i)} - \hat{\mathbf{r}}_g^{(i)} \\ &= \left[\prod_{j=1}^i (\mathbf{I}_g - \Phi_g^{(j)}) \right] \mathbf{r}\end{aligned}$$

Equation 39

[0058] In the last stage, the input sequence becomes Equation 40.

$$\begin{aligned}\mathbf{x}_g^{(G)} &= \mathbf{x}_g^{(G-1)} - \hat{\mathbf{r}}_g^{(G-1)} \\ &= \left[\prod_{j=1}^{G-1} (\mathbf{I}_g - \Phi_g^{(j)}) \right] \mathbf{r}\end{aligned}$$

Equation 40

[0059] By performing single or multiuser BLE, the soft decision symbol is obtained as per Equation 41.

$$\hat{\mathbf{d}}_{g,soft}^{(G)} = \mathbf{M}_g^{(G)} \mathbf{x}_g^{(G)}$$

Equation 41

[0060] The hard decision symbols $\hat{\mathbf{d}}_{g,hard}^{(G)}$ of the final stage are obtained from these soft decision symbols using hard decisions. By considering each stage as a linear filtering of the received sequence, the linear filter $\mathbf{e}_g^{(i)}$, $i=1 \dots G$ for each stage is per Equation 42.

$$\mathbf{e}_g^{(i)} = \left[\prod_{j=1}^{i-1} (\mathbf{I} - \Phi_g^{(j)}) \right]^H \mathbf{M}_g^{(i)H}$$

Equation 42

[0061] The soft decision symbol at each stage is per Equation 43.

$$\begin{aligned}\hat{\mathbf{d}}_{g,soft}^{(i)} &= \mathbf{M}_g^{(i)} \left[\prod_{j=1}^{i-1} (\mathbf{I} - \Phi_g^{(j)}) \right] \mathbf{r} \\ &= \mathbf{e}_g^{(i)H} \mathbf{r} \\ &= \text{diag}(\mathbf{e}_g^{(i)H} \mathbf{A}) \mathbf{d} + \overline{\text{diag}(\mathbf{e}_g^{(i)H} \mathbf{A})} \mathbf{d} \\ &\quad + \mathbf{e}_g^{(i)H} \mathbf{n}\end{aligned}$$

Equation 43

[0062] $\text{diag}(\mathbf{X})$ represents a diagonal matrix containing only the diagonal elements of the matrix \mathbf{X} . $\overline{\text{diag}}(\mathbf{X})$ represents a matrix with zero diagonal elements, containing all but the diagonal elements of \mathbf{X} .

[0063] In Equation 43, the first term represents the desired symbols of the i^{th} group, the second term represents the ISI and MAI term of the i^{th} group, and the last term is the background noise term at the output of the i^{th} stage. The first term is a vector whose j^{th} component is the j^{th} component of the transmitted data symbol vector of the i^{th} group $\mathbf{d}_g^{(i)}$, multiplied by a scalar. The second term due to the MAI and ISI is a vector whose j^{th} component is a weighted sum of all other transmitted symbols in the overall transmitted data symbol vector \mathbf{d} . The correlation of the background noise term is given by its covariance matrix $\mathbf{e}_g^{(i)H} \mathbf{R}_n \mathbf{e}_g^{(i)}$, where \mathbf{R}_n is the covariance of the additive noise in the overall received sequence. The SINR (Signal to Interference and Noise Ratio) per data symbol at the output of each stage is per Equation 44.

$$\gamma_n^{(k)} = \frac{E\left\{d_n^{(k)}\right\}^2 \left(\left[\mathbf{F}_g^{(i)}\right]_{j,j}\right)^2}{\left[\mathbf{F}_g^{(i)} \mathbf{R}_d \mathbf{F}_g^{(i)H}\right]_{j,j} - 2 \operatorname{Re}\left\{\left[\mathbf{F}_g^{(i)} \mathbf{R}_d\right]_{j,j}\right\} \left[\mathbf{F}_g^{(i)}\right]_{j,j} + E\left\{d_n^{(k)}\right\}^2 \left(\left[\mathbf{F}_g^{(i)}\right]_{j,j}\right)^2 + \left[\mathbf{e}_g^{(i)} \mathbf{R}_n \mathbf{e}_g^{(i)H}\right]_{j,j}},$$

$$\text{where } \mathbf{F}_g^{(i)} = \mathbf{e}_g^{(i)H} \mathbf{A}$$

$$j = n + N(k-1), \quad i = 1, 2, \dots, G,$$

$$k = 1, 2, \dots, n_i, \quad n = 1, 2, \dots, N$$

Equation 44

[0064] $\operatorname{Re}\{\}$ denotes the real part. $[\mathbf{X}]_{j,j}$ denotes the element in the j^{th} row and the j^{th} column of the matrix \mathbf{X} . $\mathbf{R}_d = E\{\mathbf{d}\mathbf{d}^H\}$ is the covariance matrix of \mathbf{d} .

[0065] In simulations, full BLEs FBLEs (BLEs having only a single stage) show better performance than GSIC-BLEs. When considering the coding gain for a 1% to 10% uncoded Bit Error Rate (BER), the performance of GSIC-BLE is close to the FBLEs.

[0066] The GSIC-BLE is also suited for the multi-code scenario where some or all users transmit multiple codes. Multi-codes from the same user can be grouped together and multiuser BLE is performed on each group. The MAI between groups is canceled by SIC. GSIC-BLE achieves better performance than conventional SIC in two ways. First, unlike conventional SIC, it maintains performance in the absence of a near-far effect by performing multiuser BLE of bursts received with similar power. Second, unlike conventional RAKE-based SIC receivers, it better accounts for the ISI of each burst via multiuser BLE of each group. The optimal mitigation of ISI leads to a more effective cancellation of MAI between groups, especially in channels with large delay spreads.

[0067] GSIC-BLE typically achieves a complexity that varies linearly with the number of bursts, K , which is substantially less than that of FBLE. Since this case accounts for the ISI in each burst, it potentially leads to a better performance than SIC receivers based on a RAKE. This performance advantage increases in channels with large delay spreads, i.e., when the ISI is significant. Even for large delay spread channels, a near-far effect of the order of 0 to 2 dB between bursts appears to be enough to achieve a performance comparable to FBLE.

[0068] Figure 5 is a simplified block diagram of a GSIC-BLE for use with receive diversity. The received vector, $\tilde{r}_g^{(1,1)}$ to $\tilde{r}_g^{(1,P)}$, from each of the P antenna elements are input into the GSIC-BLE. A group 1 matched filter 70 match filters, $A_g^{(1)H} x_g^{(1)}$, the received vectors for group 1. A result of the matched filtering, $y_g^{(1)}$, is processed by a BLE, such as a ZF, $(A_g^{(1)H} A_g^{(1)})^{-1} y_g^{(1)}$, or MMSE, $(A_g^{(1)H} A_g^{(1)} + \sigma^2 I)^{-1} y_g^{(1)}$. A result of the BLE 72, $\hat{d}_{soft}^{(1)}$, is converted to hard symbols, $\hat{d}_{hard}^{(1)}$, by a soft to hard decision device 74. An interference correction device 76 uses the hard symbols, $\hat{d}_{hard}^{(1)}$, to produce a vector, $\hat{r}_g^{(1,1)}$ to $\hat{r}_g^{(1,P)}$, for each antenna representing the contribution of group 1 to that antenna's received vector. For each antenna, a subtractor 92₁ to 92_P subtracts the contribution from group 1,

$\hat{r}_g^{(1,1)}$ to $\hat{r}_g^{(1,P)}$, from the received vectors, $\tilde{r}_g^{(1,1)}$ to $\tilde{r}_g^{(1,P)}$, to produce an interference cancelled vector, $\tilde{r}_g^{(2,1)}$ to $\tilde{r}_g^{(2,P)}$, for each antenna.

[0069] A group 2 matched filter 78 match filters, $A_g^{(2)H} x_g^{(2)}$, the interference cancelled vectors. A result of the matched filtering, $y_g^{(2)}$, is processed by a BLE 80, such as a ZF, $(A_g^{(2)H} A_g^{(2)})^{-1} y_g^{(2)}$, or MMSE, $(A_g^{(2)H} A_g^{(2)} + \sigma^2 I)^{-1} y_g^{(2)}$. A result of the BLE, $\hat{d}_{soft}^{(2)}$, is converted to hard symbols, $\hat{d}_{hard}^{(2)}$, by a soft to hard decision device 82.

An interference correction device 84 uses the hard symbols, $\hat{d}_{hard}^{(2)}$, to produce a vector, $\hat{r}_g^{(2,1)}$ to $\hat{r}_g^{(2,P)}$, for each antenna representing the contribution of group 2 to that antenna's received vector. For each antenna, a subtractor 94₁ to 94_P subtracts the contribution from group 2, $\hat{r}_g^{(2,1)}$ to $\hat{r}_g^{(2,P)}$, from the received vectors, $\tilde{r}_g^{(2,1)}$ to $\tilde{r}_g^{(2,P)}$, to produce an interference cancelled vector, $\tilde{r}_g^{(3,1)}$ to $\tilde{r}_g^{(3,P)}$, for each antenna.

[0070] The estimation of data for the remaining groups, groups 3 to G-1, and interference cancellation is successively performed until the final group G. For group G, a group G matched filter 86 match filters, $A_g^{(G)H} x_g^{(G)}$, the interference cancelled vectors. A result of the matched filtering, $y_g^{(G)}$, is processed by a BLE 88, such as a ZF, $(A_g^{(G)H} A_g^{(G)})^{-1} y_g^{(G)}$, or MMSE, $(A_g^{(G)H} A_g^{(G)} + \sigma^2 I)^{-1} y_g^{(G)}$. A result of the BLE, $\hat{d}_{soft}^{(G)}$, is converted to hard symbols, $\hat{d}_{hard}^{(G)}$, by a soft to hard decision device 90.

*

*

*

CLAIMS

What is claimed is:

1. A method for receiving a plurality of data signals over an antenna array having a plurality of antenna elements, the data signals transmitted over a shared spectrum in a wireless communication system, the method comprising:
 - receiving a signal over each antenna element having each of the data signals;
 - grouping the plurality of data signals into a plurality of groups;
 - matched filtering the received signals of the antenna elements for a first group of the plurality of groups, producing a matched filtered result;
 - jointly detecting data of the first group using the matched filtered result;
 - constructing an interference correction signal using the detected data for each antenna element;
 - subtracting from the received signal of each antenna element the interference correction signal for that element, producing an interference cancelled result for each antenna element; and
 - successively detecting data of remaining groups using the interference cancelled result for each antenna element.
2. The method of claim 1 wherein the grouping of the plurality of data signals comprises measuring a combined power of each data signal as received by each antenna element and grouping together data signals having a substantially similar combined power.
3. The method of claim 1 wherein the jointly detecting data is performed using a zero forcing block linear equalizer.
4. The method of claim 1 wherein the jointly detecting data is performed using a minimum mean square error block linear equalizer.

5. The method of claim 1 wherein the jointly detecting data produces soft symbols and the method further comprising converting the soft symbols into hard symbols prior to interference correction signal construction.

6. A base station for receiving a plurality of data signals over an antenna array having a plurality of antenna elements, the data signals received over a shared spectrum in a wireless communication system, the base station comprising:

- each antenna element for receiving a signal having each of the data signals;

- means for grouping the plurality of data signals into a plurality of groups;

- means for matched filtering the received signals of the antenna elements for a first group of the plurality of groups, producing a matched filtered result;

- means for jointly detecting data of the first group using the matched filtered result;

- means for constructing an interference correction signal using the detected data for each antenna element;

- means for subtracting from the received signal of each antenna element the interference correction signal for that element, producing an interference cancelled result for each antenna element; and

- means for successively detecting data of remaining groups using the interference cancelled result for each antenna element.

7. The base station of claim 6 wherein the means for grouping of the plurality of data signals comprises means for measuring a combined power of each data signal as received by each antenna element and means for grouping together data signals having a substantially similar combined power.

8. The base station of claim 6 wherein the means for jointly detecting data uses a zero forcing block linear equalizer.

9. The base station of claim 6 wherein the means for jointly detecting data uses a minimum mean square error block linear equalizer.

10. The base station of claim 6 wherein the means for jointly detecting data produces soft symbols and the base station further comprising a soft to hard decision device for converting the soft symbols into hard symbols prior to input into the means for interference correction signal construction.

11. A base station for receiving a plurality of data signals over an antenna array having a plurality of antenna elements, the data signals received over a shared spectrum in a wireless communication system, the base station comprising:

- each antenna element for receiving a signal having each of the data signals;

- a matched filter for matched filtering the received signals of the antenna elements for a first group of a plurality of groups, producing a first matched filtered result, the plurality of data signals are grouped into the plurality of groups;

- a first joint detector for jointly detecting data of the first group using the first matched filtered result;

- an interference correction construction device for constructing an interference correction signal using the detected data for each antenna element;

- a plurality of subtractors for subtracting from the received signal of each antenna element the interference correction signal for that element, producing an interference cancelled result for each antenna element; and

- a matched filter for matched filtering the produced interference cancelled result of the antenna elements for a second group of the plurality of groups, producing a second matched filtered result, the plurality of data signals are grouped into the plurality of groups; and

- a second joint detector for jointly detecting data of the second group using the second matched filtered result.

12. The base station of claim 11 wherein the grouping of the plurality of data signals comprises measuring a combined power of each data signal as received by each antenna element and grouping together data signals having a substantially similar combined power.

13. The base station of claim 11 wherein the first and second joint detectors use a zero forcing block linear equalizer.

14. The base station of claim 11 wherein the first and second joint detectors use a minimum mean square error block linear equalizer.

15. The base station of claim 11 wherein the first and second joint detectors produce soft symbols and the base station further comprising a first and second soft to hard decision devices for converting the soft symbols into hard symbols.

16. A wireless transmit/receive unit for receiving a plurality of data signals over an antenna array having a plurality of antenna elements, the data signals received over a shared spectrum in a wireless communication system, the wireless transmit/receive unit comprising:

each antenna element for receiving a signal having each of the data signals;

means for grouping the plurality of data signals into a plurality of groups;

means for matched filtering the received signals of the antenna elements for a first group of the plurality of groups, producing a matched filtered result;

means for jointly detecting data of the first group using the matched filtered result;

means for constructing an interference correction signal using the detected data for each antenna element;

means for subtracting from the received signal of each antenna element the interference correction signal for that element, producing an interference cancelled result for each antenna element; and

means for successively detecting data of remaining groups using the interference cancelled result for each antenna element.

17. The wireless transmit/receive unit of claim 16 wherein the means for grouping of the plurality of data signals comprises means for measuring a combined power of each data signal as received by each antenna element and means for grouping together data signals having a substantially similar combined power.

18. The wireless transmit/receive unit of claim 16 wherein the means for jointly detecting data uses a zero forcing block linear equalizer.

19. The wireless transmit/receive unit of claim 16 wherein the means for jointly detecting data uses a minimum mean square error block linear equalizer.

20. The wireless transmit/receive unit of claim 16 wherein the means for jointly detecting data produces soft symbols and the wireless transmit/receive unit further comprising a soft to hard decision device for converting the soft symbols into hard symbols prior to input into the means for interference correction signal construction.

21. A wireless transmit/receive unit for receiving a plurality of data signals over an antenna array having a plurality of antenna elements, the data signals received over a shared spectrum in a wireless communication system, the wireless transmit/receive unit comprising:

each antenna element for receiving a signal having each of the data signals;

a matched filter for matched filtering the received signals of the antenna elements for a first group of a plurality of groups, producing a first matched filtered result, the plurality of data signals are grouped into the plurality of groups;

a first joint detector for jointly detecting data of the first group using the first matched filtered result;

an interference correction construction device for constructing an interference correction signal using the detected data for each antenna element;

a plurality of subtractors for subtracting from the received signal of each antenna element the interference correction signal for that element, producing an interference cancelled result for each antenna element; and

a matched filter for matched filtering the produced interference cancelled result of the antenna elements for a second group of the plurality of groups, producing a second matched filtered result, the plurality of data signals are grouped into the plurality of groups; and

a second joint detector for jointly detecting data of the second group using the second matched filtered result.

22. The wireless transmit/receive unit of claim 21 wherein the grouping of the plurality of data signals comprises measuring a combined power of each data signal as received by each antenna element and grouping together data signals having a substantially similar combined power.

23. The wireless transmit/receive unit of claim 21 wherein the first and second joint detectors use a zero forcing block linear equalizer.

24. The wireless transmit/receive unit of claim 21 wherein the first and second joint detectors use a minimum mean square error block linear equalizer.

25. The wireless transmit/receive unit of claim 21 wherein the first and second joint detectors produce soft symbols and the wireless transmit/receive unit

further comprising a first and second soft to hard decision devices for converting the soft symbols into hard symbols.

1/4

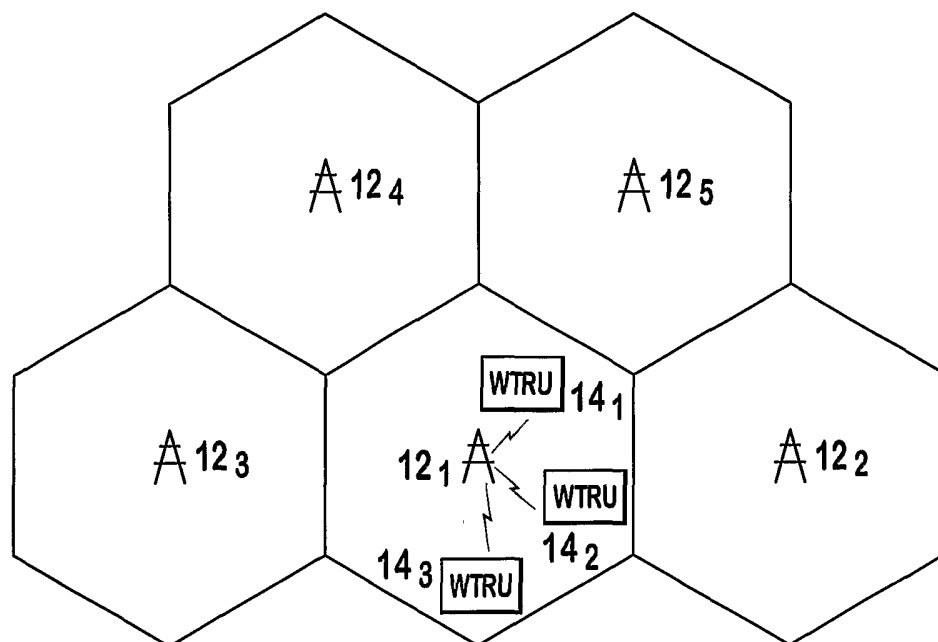


FIG. 1

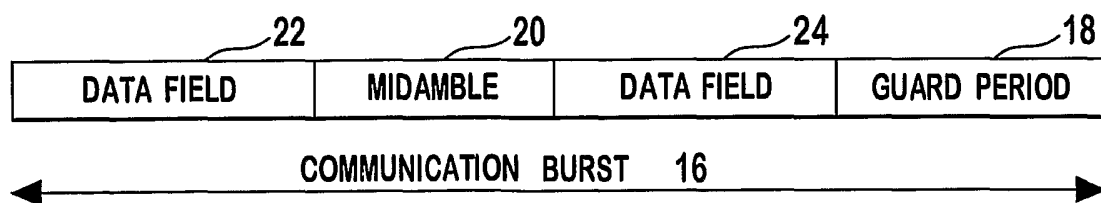


FIG. 3

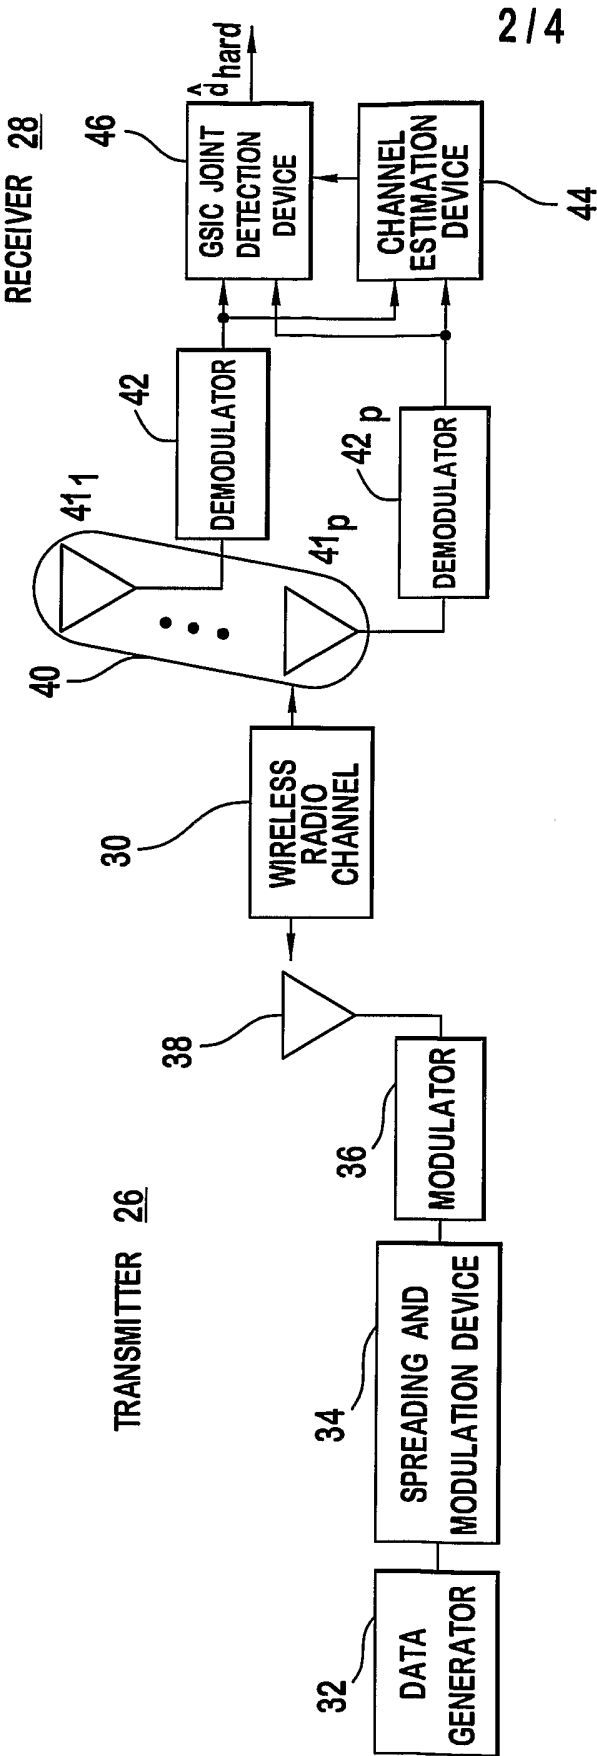


FIG. 2

3/4

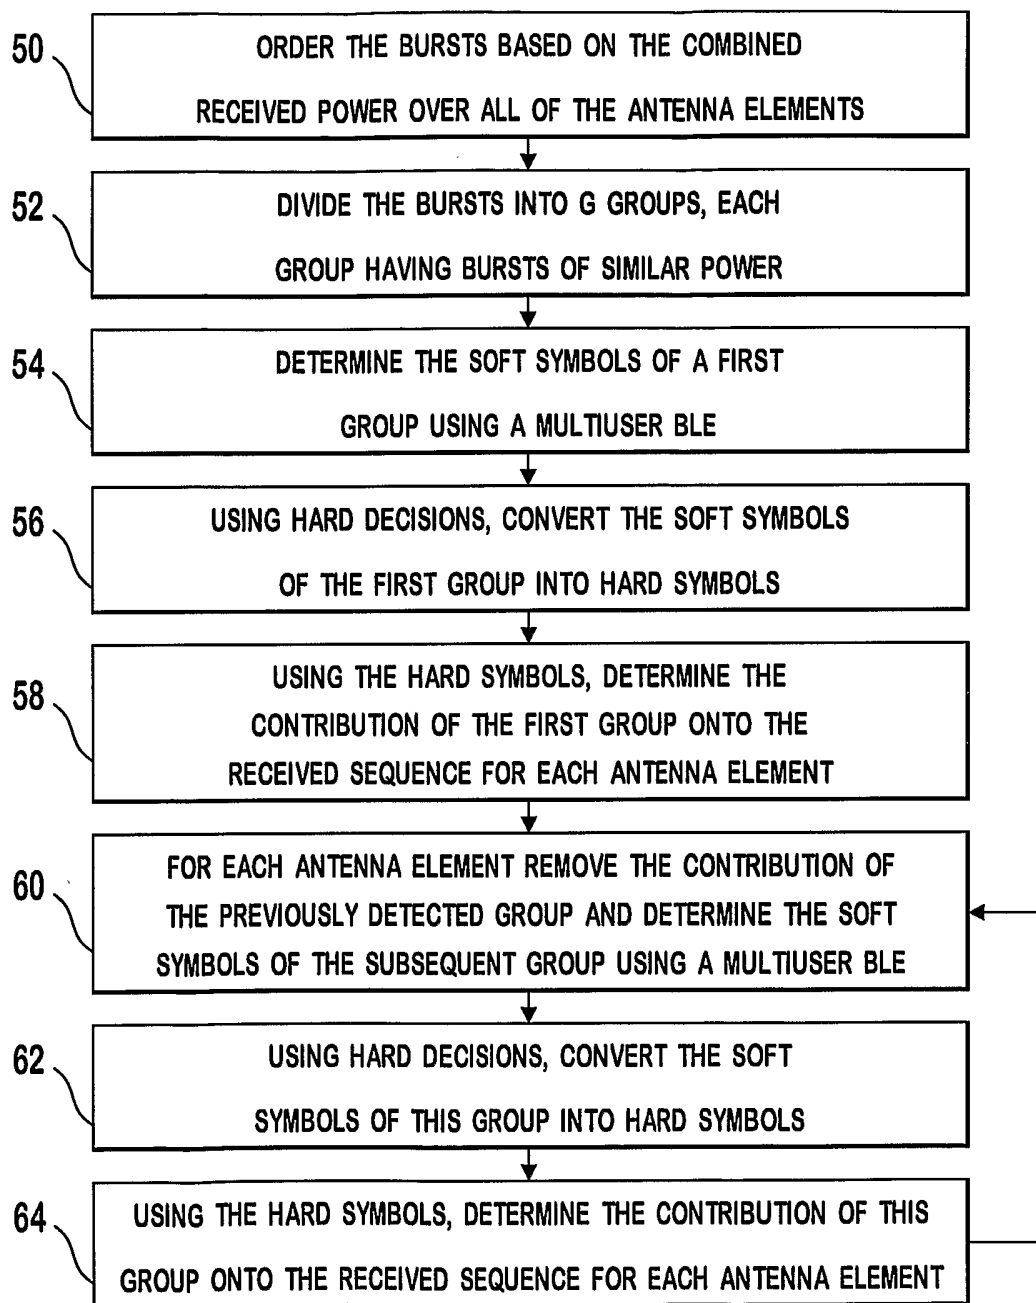


FIG. 4

4/4

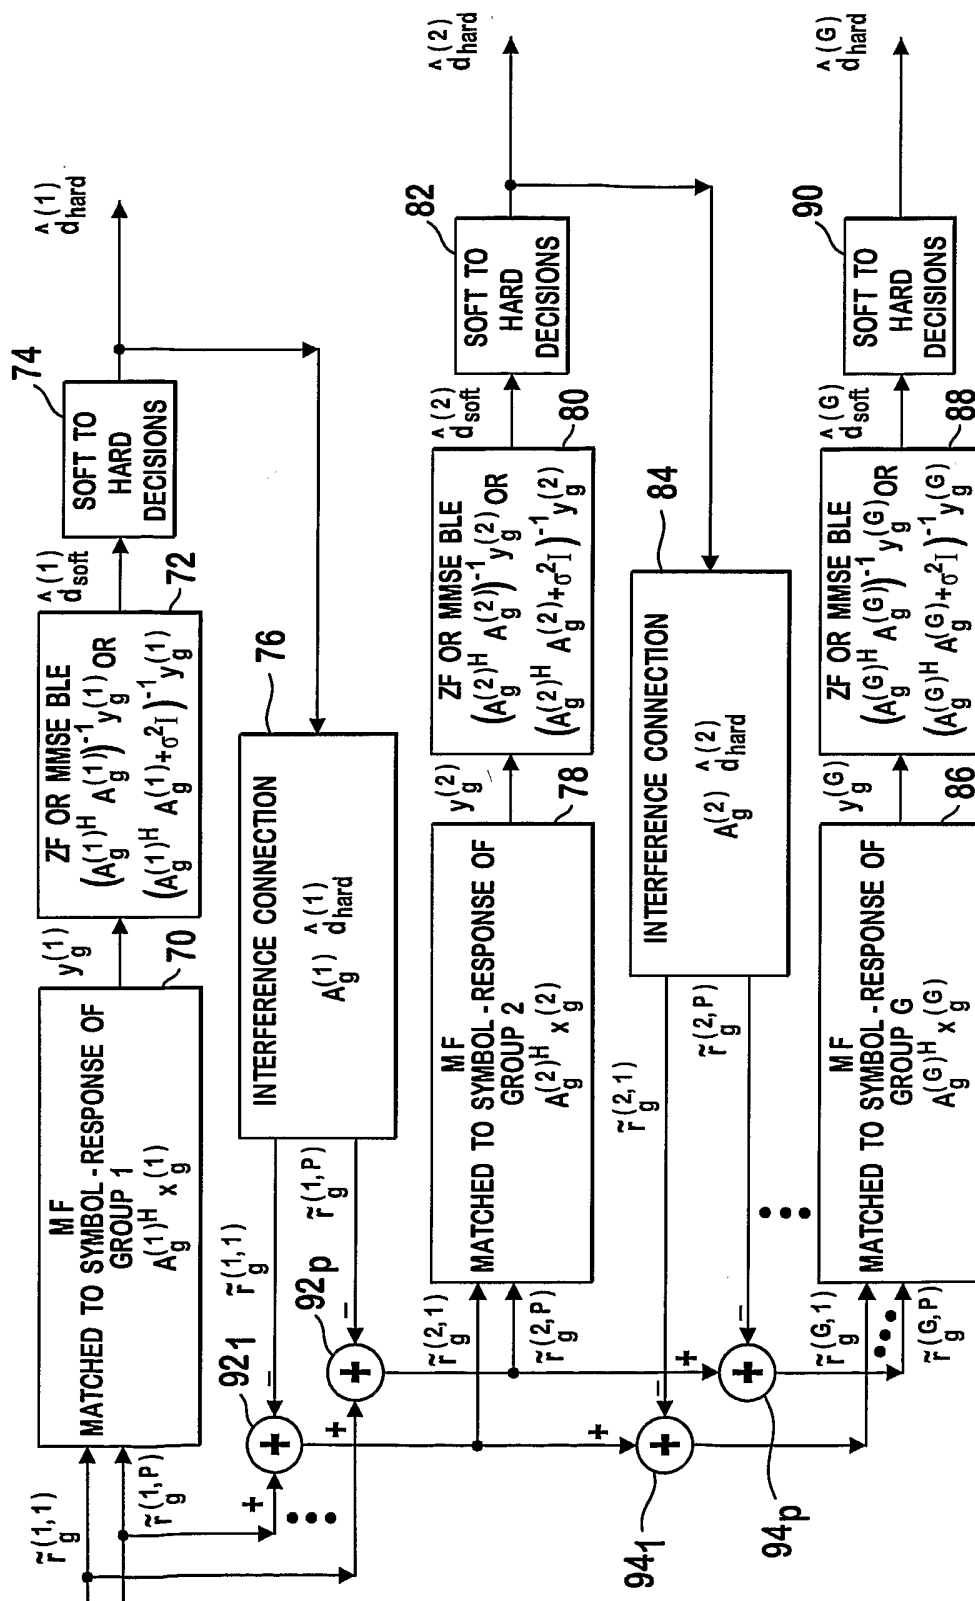


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/22652

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : H03D 1/04, 1/06; H03K 5/01, 6/04; H04B 1/10; H04L 1/00, 25/08
US CL : 375/346

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 375/346, 295, 267

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X, P	US 2003/0108117 A1 (KETCHUM et al.) 12 June 2003 (12.06.2003) pg. 6, paragraph 0076-pg. 11, paragraph 0169.	1, 3, 4, 6, 8, 9, 16, 18, and 19
A, P	US 2003/0035491 A1 (WALTON et al.) 20 February 2003 (20.02.2003) pg. 11, paragraph 0115-pg. 15, paragraph 0175	1-25



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T"

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&"

document member of the same patent family

Date of the actual completion of the international search

13 November 2003 (13.11.2003)

Date of mailing of the international search report

12 DEC 2003

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US
Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450

Facsimile No. (703)305-3230

Authorized officer

Curtis B. Odom

Telephone No. 703-305-3900