



Published:

- *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*

REUSABLE FIELD-ATTACHABLE WELLHEAD PENETRATOR AND METHOD OF ASSEMBLY AND USE

Field of Invention

5 The present application relates to a wellhead penetrator allowing the transmission of electrical energy through a wellhead to supply an electric submersible pump, or to heat mineral insulated cable within the wellbore. More specifically, this application describes a sealed wellhead penetrator which may be reused while remaining capable of use on any number of existing wellhead penetrator mandrels currently on the market.

10 Background of the Invention

 The delivery of electrical service within a well creates a variety of problems. Ideally, the conductors coming from the electrical submersible pump (ESP) should continue through the wellhead to a surface power supply or junction. Utilizing splices of electrical cables within the wellbore often leads to disastrous short circuits because of the effect of
15 vapors on the splice materials. The present invention allows a continuous cable run through a wellhead and provides a seal to the mandrel penetrating wellhead. Any number of existing mandrel penetrators may be retrofitted and reused for this purpose. This low-cost alternative to existing penetrator systems is therefore useful and provides a means of rapidly providing a new electrical connection for ESP or heater cable installations for the
20 oil fields of the world.

Summary of the Claimed Invention

 The wellhead penetrator system described in this application comprises a tubular mandrel insertable in a wellhead providing threads on an upper end extending from the wellhead permitting the passage of a plurality of electrical conductors used to power a

electric submersible pump or a mineral insulated heater cable through the wellhead. A plug-in wellhead penetrator system can comprise a plurality of electrical conductors extending through a wellhead; means for attaching each electrical conductor to a surface cable electrical conductor; and, means for connecting a sealed electrical conductor non-
5 conductive protective sleeve enclosing the electrical conductors extending from the well to the surface electrical conductors.

This system specifically features an insertable tubular mandrel in a wellhead providing threads on an upper end extending from the wellhead allowing the passage of a plurality of electrical conductors used to power an ESP through the wellhead; a rubber seal
10 enclosing each of the electrical conductors inserted in the upper end of the mandrel; a non-ferromagnetic guide enclosing each of the electrical conductors extending from the rubber seal within the upper end of the tubular mandrel; an offset coupling attached to the upper end of the tubular mandrel having an internal shoulder compressing the non-ferromagnetic guide and providing internal threads to attach to the mandrel and tapered internal threads
15 on an upper end of an offset connector; a housing having tapered outer threads for connection to the offset coupling; a polymeric insulator block providing a least three internal paths inserted in the housing; and, a transition collar lock nut for retaining the polymeric insulator block and a transition cable connection providing a bottom ring for locking the transition cable connection within the housing.

20 The housing of the wellhead penetrator system can be vented. The offset coupling can be angled at 10°, 45° or 90° to permit clearance of the wellhead and flanges located on the wellhead. Moreover, the tubular mandrel can be internally-coated with

tetrafluoroethylene or other slick components to allow the mandrel to be cleaned of epoxy or other materials used to complete the seal.

The wellhead penetrator system can be assembled using epoxy packed between the non-ferromagnetic guide and the rubber seal. Alternatively, epoxy can be packed around an
5 armored cable inserted into the tubular mandrel and the stripped ends of the conductors extending from the armored cable to the rubber seal.

The present application also claims a method for installation of a plug in, re-useable, field available, wellhead penetrator by fabricating a pigtail from an ESP cable into a cable transition body and attaching it to conductors extending from the wellhead by: stripping an
10 armored cable exposing the plurality of insulated conductors; attaching sockets to the end of the conductors; affixing the socketed conductors extending through the transition collar to the electrical conductors extending from the well head; and moving the insulator block, which can be composed of tetrafluoroethylene, polyether ether ketone (PEEK), or polyoxymethylene, or other suitable substitutes to cover each of the connectors; and
15 locking the insulator block within the housing by screwing the transition collar lock-nut onto the housing.

Brief Description of the Drawings

Fig. 1 is a cross-sectional view of one embodiment of the plug in, re-usable wellhead penetrator.

Description of the Apparatus

Fig. 1 shows a cross-sectional view of one embodiment of the claimed invention. An ESP cable **23**, which can be either round or flat metal clad CLX cable, is preferably continuous from the ESP in the wellbore and is inserted into the down-hole side of a

wellhead mandrel **16**. The wellhead mandrel **16** provides threads onto which is affixed a connection nipple **6** at the surface. The armored cable **23** is pre-stripped from each electrical conductor **19** (only two of the three normally found are shown in this view) in a length approximately one-half of the length of the mandrel **16**. Each leg of the three electrical conductors **19** is fed through a compressible rubber seal **10** fabricated from ethylene propylene diene monomer (EPDM), and inserted in a non-ferromagnetic guide **17**. The non-ferromagnetic guide **17** of this embodiment is made of brass coated with electroless nickel plating. An epoxy **18** is packed around each leg of the conductors **19** before they enter the rubber seal **10** and between the rubber seal **10** and the non-ferromagnetic guide **17**. Additionally, there are a plurality of O-rings **45** to seal against the wellhead on the outside of the mandrel **16**. The adapter nut or connection nipple **6** can be no larger than the outer diameter of the mandrel **16** itself. Epoxy **18** can be applied on the upper interior end of the mandrel. Epoxy **18** may be placed on each side of the rubber seal **10** or just on the down hole side of the rubber seal **10**. The non-ferromagnetic guide **17** is inserted on the interior of the mandrel **16** and retained there by offset coupling or connection nipple **6**. Alternatively, a mandrel lock nut could be screwed onto the threads shown on the mandrel **16**. The alternative placement of epoxy **18** on the interior of the mandrel covering both the end of the armored ESP cable supports the extending conductor coming through the armored cable **23** and the rubber seal **10** from rapid decompression. Since the interior of mandrel **16** is intended to be coated with tetrafluoroethylene or other slick components, epoxy **18** can be readily removed from the mandrel **16** allowing its reuse as a wellhead penetrator. The entire assembly can also be packed with DC-4 or DC-11

silicone compound (both insulating products of Dow Corning) adding to the ease of removal while maintaining an insulated passage for the conductors through the wellhead.

Outside the wellhead, a surface cable **24** is inserted through a transition collar **1** and stripped of armoring. The armor-stripped surface conductors **24a**, are further stripped of insulation and inserted into sockets **7**. The field-fabricated pigtail **20** can be fashioned from either flat or round ESP cable or CLX cable as available. For flat cable, the F-T-R (flat to round) transition collar **1** is packed with epoxy **18** providing a secure and insulated connection. Sockets **7** installed on the pig-tail conductors **24a** coming through the transition collar **1** can be either attached with set screws **15** or crimped on the stripped ends of each conductor.

Each leg of the conductor **19** extending through the wellhead mandrel **16** is then inserted through a threaded nipple **13** which in turn is threadably attached to the wellhead nipple **6** on the wellhead side and through a union assembly **12** compressed against a second threaded nipple **13**. An elbow **11** of the needed degree depending on the wellhead clearance is then threaded onto the union assembly **12**.

In the embodiment shown the electrical conductors **19** extending through the wellhead are inserted through an EPDM spacer **2** and into tubes **8**, carried within the insulator housing **4** restrained at its bottom by the vented insulator housing adapter **5**. Each of the insulated electrical conductors **19** extending through the wellhead (not shown in this view) is then stripped and an EDC connector pin **14** is attached to the stripped conductor **19** with set screws **15**. The installer will then insert the pins **14** into the prepared pigtail connectors **7** and move each into the insulator block or sleeve **3**.

The vented insulator housing adapter **5** is threaded to the elbow. The sockets **7** are then covered by insulator block **3**. The transition collar **1** also provides a shoulder **21** that is formed by welding to a standard transition collar. A transition collar lock nut **22** is then threaded on the housing **4** retaining the conductors **24a** and insulator **3**. The housing **4** is further sealed to the elements by a vent hood **30** capping the vented insulator housing adapter **5**. Vent holes can be formed anywhere above the cable seal **10** to permit gas coming through the mandrel system to prevent migration down the surface cable **24**. Tightening the transition cable to housing lock nut **22** completes the installation.

Claims

1. A plug-in wellhead penetrator system comprising:

a plurality of electrical conductors extending through a wellhead;

means for attaching each electrical conductor to a surface cable electrical conductor;

5 and,

a sealed non-conductive electrical conductor protective sleeve providing means for

connecting the enclosed plurality of electrical conductors extending from the well to the
surface electrical conductors.

2. A wellhead penetrator system comprising:

10 a tubular mandrel insertable in a wellhead providing threads on an upper end extending

from the wellhead permitting the passage of a plurality of electrical conductors used to
power an electric submersible pump through the wellhead;

a rubber seal enclosing each of the electrical conductors inserted in the upper end of the
mandrel;

15 a non-ferromagnetic guide enclosing each of the electrical conductors extending from the
rubber seal within the upper end of the tubular mandrel;

an offset coupling attached to the upper end of the tubular mandrel having an internal
shoulder compressing the non-ferromagnetic guide and providing internal threads to
attach to the mandrel and tapered internal threads on an upper end of an offset

20 connector;

a housing having tapered outer threads for connection to the offset coupling;

a polymeric insulator block providing a least three internal paths inserted in the housing;
and,

a transition collar lock nut for retaining the polymeric insulator block and a transition cable connection providing a bottom ring for locking the transition cable connection within the housing.

3. The wellhead penetrator system of claim 2 wherein the housing is vented.

5 4. The wellhead penetrator system of claim 2 wherein the offset coupling is angled at 45°.

5. The wellhead penetrator system of claim 2 wherein the offset coupling is angled at 90°.

10 6. The wellhead penetrator system of claim 2 wherein the offset coupling is angled at 10°.

7. The wellhead penetrator system of claim 2 wherein the tubular mandrel is internally coated with tetrafluoroethylene.

8. The wellhead penetrator system of claim 2 further comprising epoxy packed between the non-ferromagnetic guide and the rubber seal.

15 9. The wellhead penetrator system of claim 7 further comprising epoxy packed around an armored cable inserted into the tubular mandrel and the stripped ends of the conductors extending from the armored cable to the rubber seal.

20 10. A method for installation of a re-useable, field available, wellhead penetrator by fabricating a pigtail from ESP cable into a cable transition body and attaching it to conductors extending the wellhead comprising:

stripping an armored cable exposing the plurality of insulated conductors;

attaching sockets to the end of the conductors;

affixing the socketed conductors extending through a transition collar to the electrical conductors extending from the well head;
moving a tetrafluoroethylene insulator block to cover each of the connectors;
locking the insulator block within the housing by screwing the transition collar lock-nut
5 onto the housing.

1/1

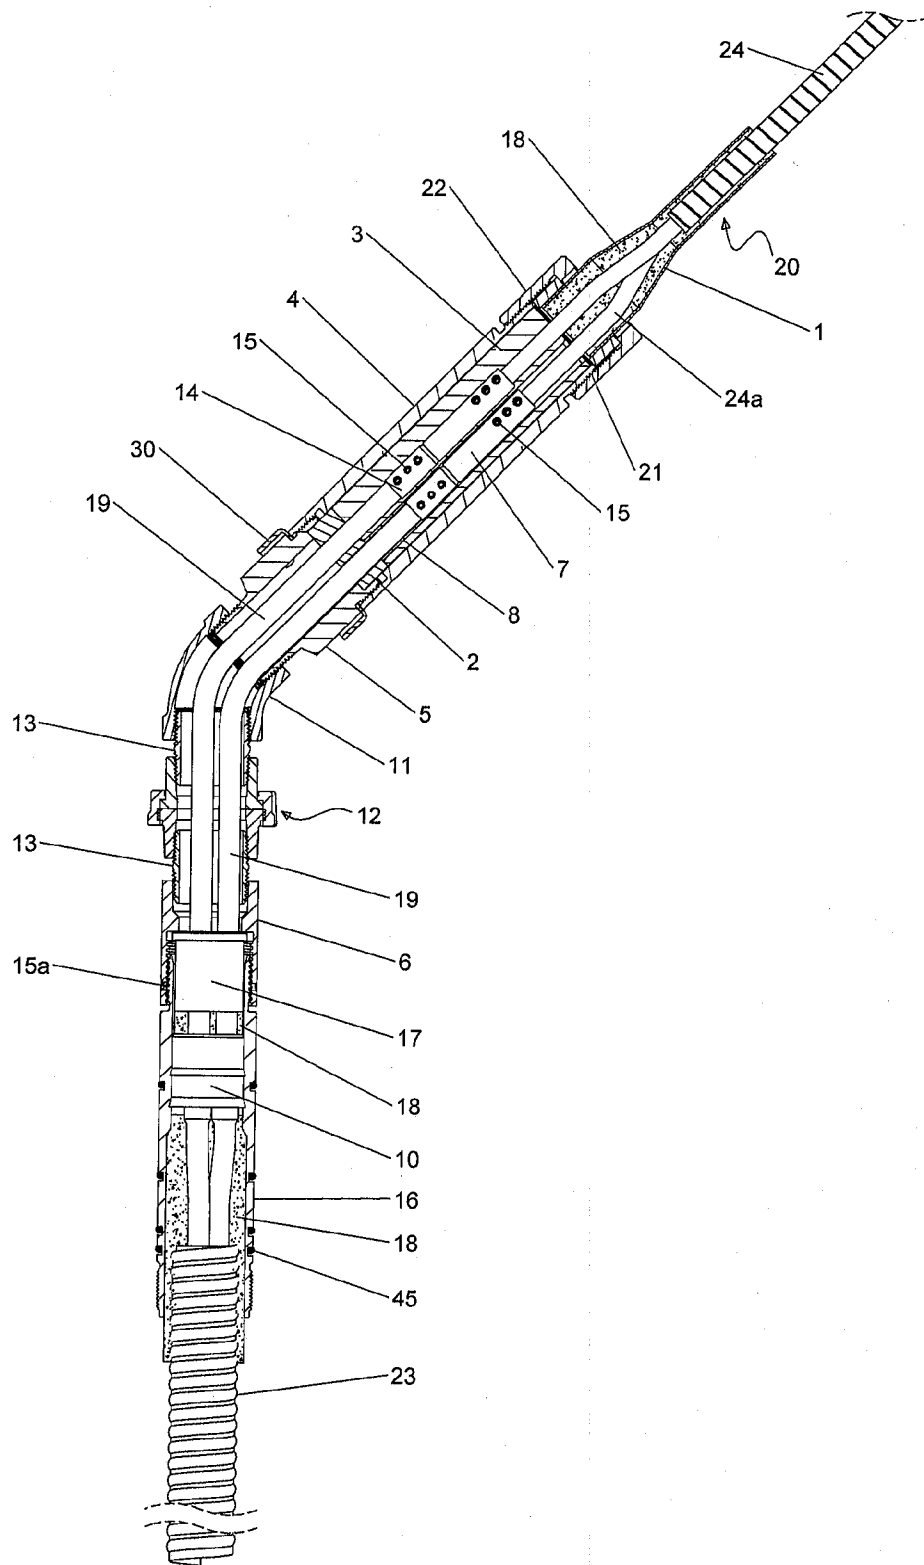


Fig. 1