




(86) Date de dépôt PCT/PCT Filing Date: 1997/05/26
 (87) Date publication PCT/PCT Publication Date: 1998/06/25
 (45) Date de délivrance/Issue Date: 2003/12/02
 (85) Entrée phase nationale/National Entry: 1999/06/15
 (86) N° demande PCT/PCT Application No.: CA 1997/000359
 (87) N° publication PCT/PCT Publication No.: 1998/027606
 (30) Priorité/Priority: 1996/12/18 (08/768,650) US

(51) Cl.Int.⁶/Int.Cl.⁶ H01M 4/96, H01M 4/86, H01M 8/02
 (72) Inventeurs/Inventors:
 CAMPBELL, STEPHEN ALAN, CA;
 STUMPER, JUERGEN, CA;
 WILKINSON, DAVID P., CA;
 DAVIS, MICHAEL T., CA
 (73) Propriétaire/Owner:
 BALLARD POWER SYSTEMS INC., CA
 (74) Agent: RUSSELL REYNEKE

(54) Titre : SUBSTRAT D'ELECTRODE POREUX POUR CELLULE ELECTROCHIMIQUE
 (54) Title: POROUS ELECTRODE SUBSTRATE FOR AN ELECTROCHEMICAL FUEL CELL

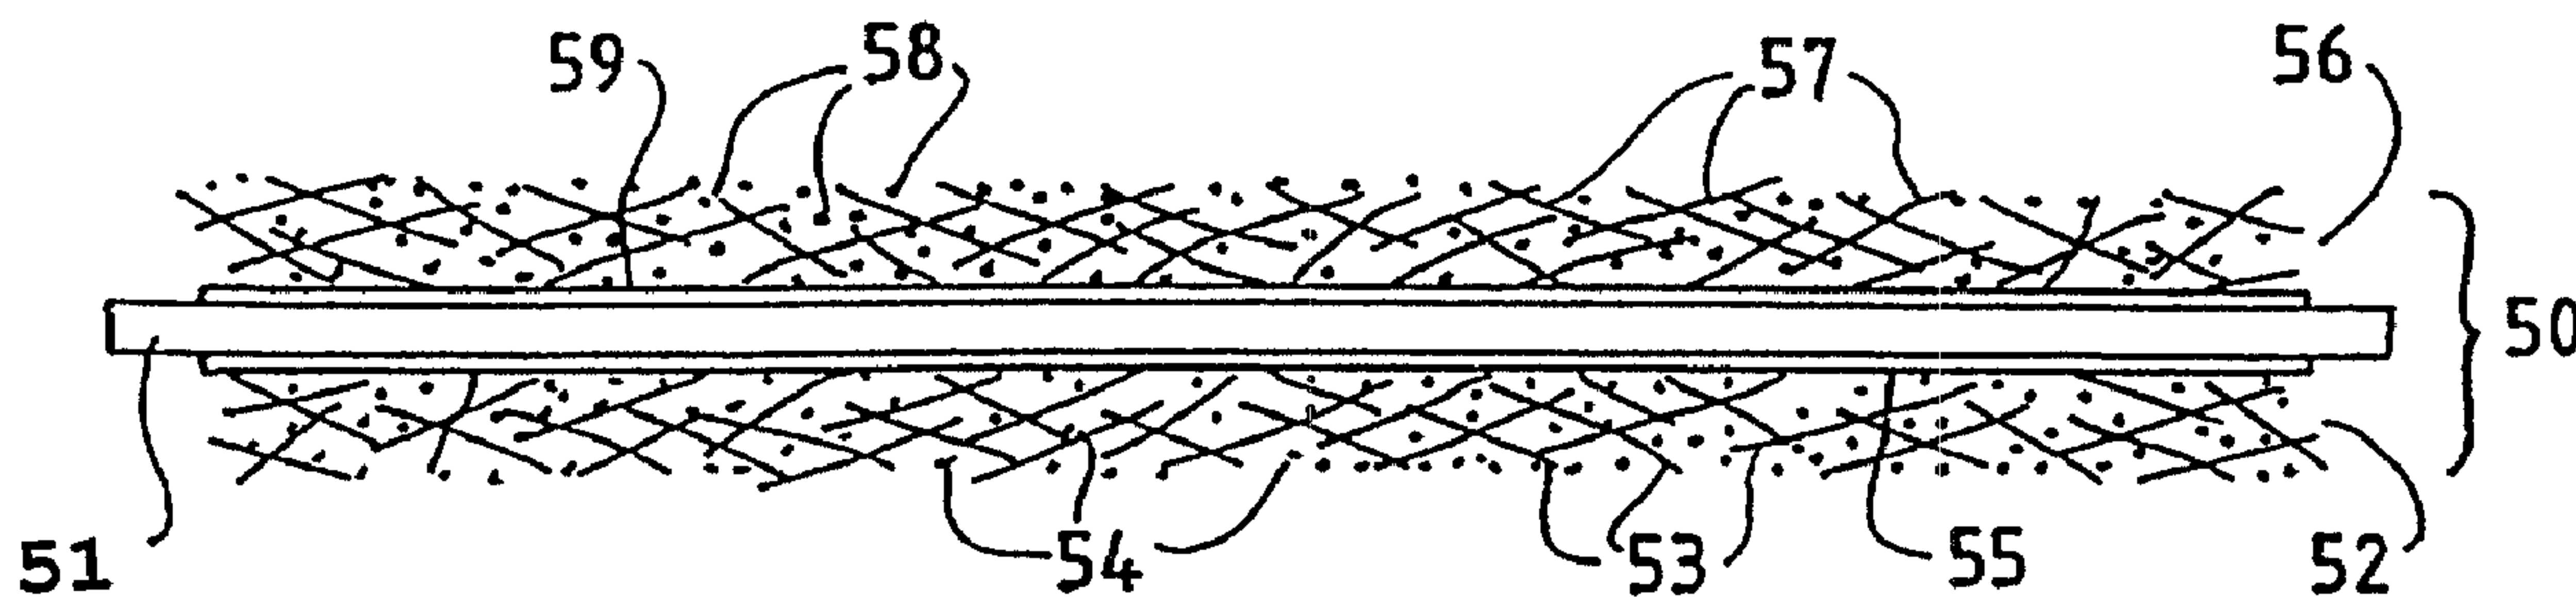

(57) Abrégé/Abstract:


A porous electrode substrate for an electrochemical fuel cell comprises at least one preformed web having low or poor electrical conductivity (e.g. having a through-plane resistivity of greater than 1 ohm.cm). The web contains an electrically conductive filler. A method for preparing a porous electrode substrate for an electrochemical fuel cell comprises the step of filling a preformed web, the web having low or poor electrical conductivity, with an electrically conductive filler.

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : H01M 4/96, 4/86, 8/02</p>	A1	<p>(11) International Publication Number: WO 98/27606</p> <p>(43) International Publication Date: 25 June 1998 (25.06.98)</p>
<p>(21) International Application Number: PCT/CA97/00359</p> <p>(22) International Filing Date: 26 May 1997 (26.05.97)</p> <p>(30) Priority Data: 08/768,650 18 December 1996 (18.12.96) US</p> <p>(71) Applicant (for all designated States except US): BALLARD POWER SYSTEMS INC. [CA/CA]; 9000 Glenlyon Parkway, Burnaby, British Columbia V5J 5J9 (CA).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): CAMPBELL, Stephen, A. [GB/CA]; 11323 261st Street, Maple Ridge, British Columbia V2X 7E6 (CA). STUMPER, Juergen [DE/CA]; 3538 Copley Street, Vancouver, British Columbia V5N 5B2 (CA). WILKINSON, David, P. [CA/CA]; 1391 Coleman Street, North Vancouver, British Columbia V7R 1W4 (CA). DAVIS, Michael, T. [CA/CA]; #18 - 1370 Riverwood gate, Port Coquitlam, British Columbia V3B 7V7 (CA).</p> <p>(74) Agent: DE KOCK, Elbie, R.; Russell Reyneke, Two Bentall Centre, Suite 700, 555 Burrard Street, Vancouver, British Columbia V7X 1M8 (CA).</p>		<p>(81) Designated States: AU, CA, DE, GB, JP, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>With international search report.</i></p>

(54) Title: POROUS ELECTRODE SUBSTRATE FOR AN ELECTROCHEMICAL FUEL CELL

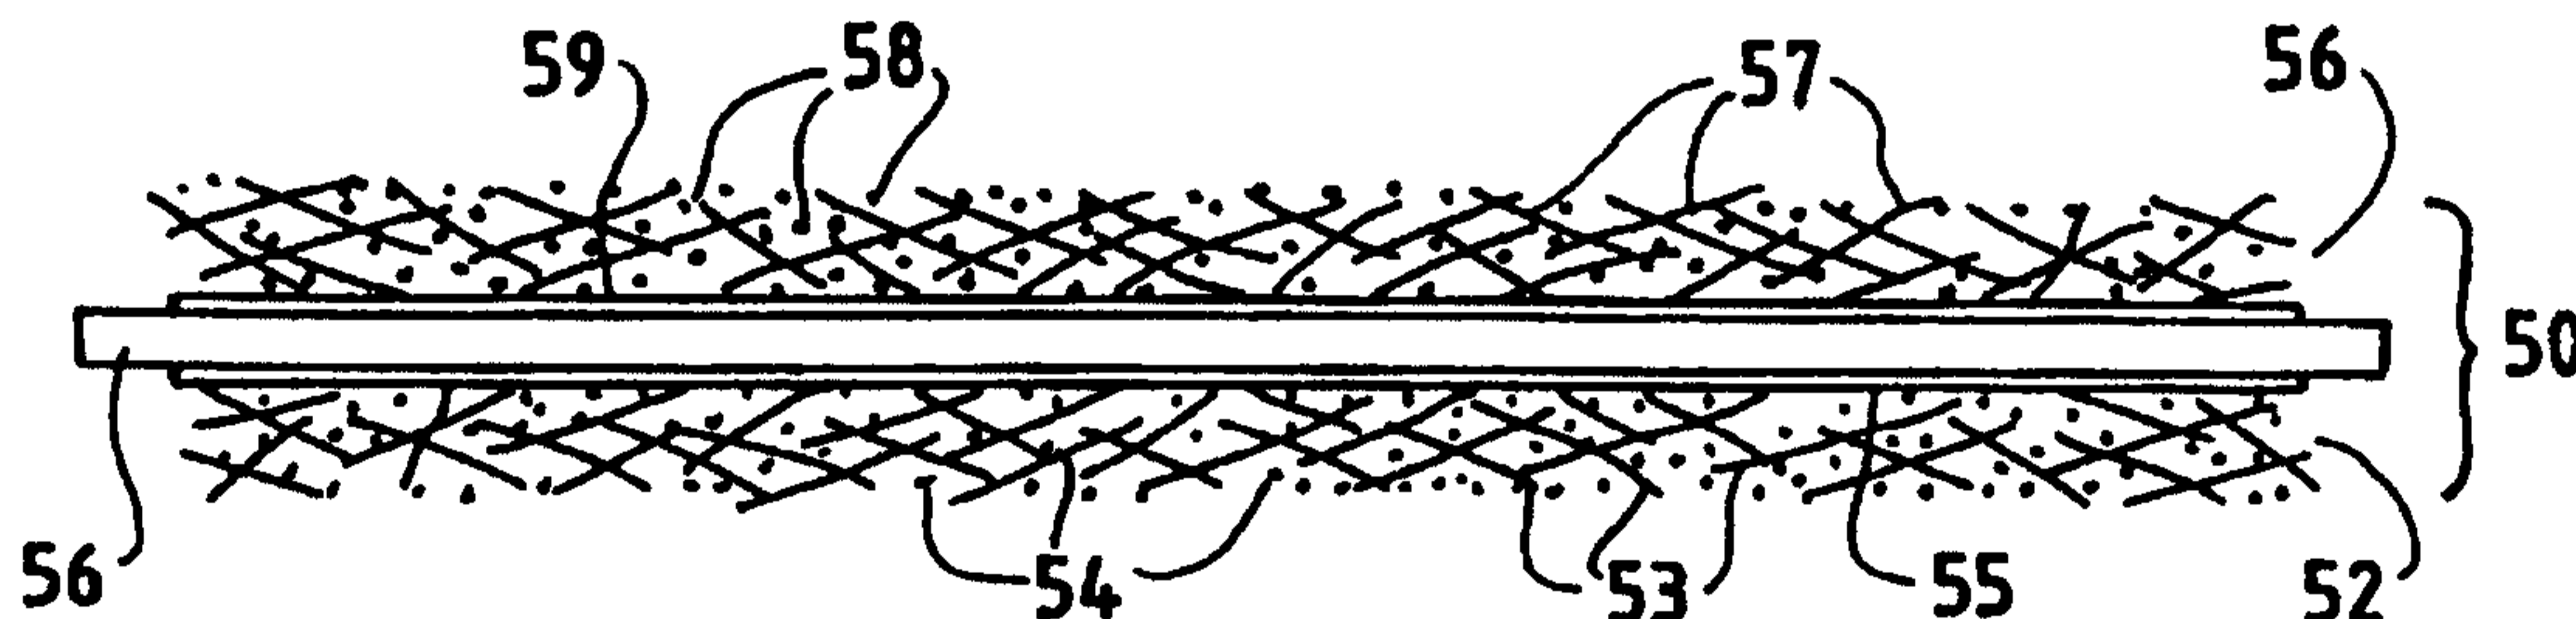

(57) Abstract

A porous electrode substrate for an electrochemical fuel cell comprises at least one preformed web having low or poor electrical conductivity (e.g. having a through-plane resistivity of greater than 1 ohm.cm). The web contains an electrically conductive filler. A method for preparing a porous electrode substrate for an electrochemical fuel cell comprises the step of filling a preformed web, the web having low or poor electrical conductivity, with an electrically conductive filler.

**POROUS ELECTRODE SUBSTRATE
FOR AN ELECTROCHEMICAL FUEL CELL**

5

Field Of The Invention

10

This invention relates generally to electrochemical fuel cells and, more particularly, to an electrochemical fuel cell with a porous electrode substrate layer comprising a preformed web having low electrical conductivity and an electrically conductive filler.

15

Background Of The Invention

20


Electrochemical fuel cells convert fuel and oxidant to electricity and reaction product. Solid polymer electrochemical fuel cells generally employ a membrane electrode assembly ("MEA") comprising a solid polymer electrolyte or ion exchange membrane disposed between two electrode layers or substrates formed of electrically conductive sheet material. The electrode substrate has a porous structure which renders it permeable to fluid reactants and

25

- 2 -


products in the fuel cell. The MEA also includes an electrocatalyst, typically disposed in a layer at each membrane/electrode layer interface, to induce the desired electrochemical reaction in the fuel cell. The electrodes are electrically coupled to provide a path for conducting electrons between the electrodes through an external load. At the anode, the fluid fuel stream moves through the porous anode substrate and is oxidized at the anode electrocatalyst. At the cathode, the fluid oxidant stream moves through the porous cathode substrate and is reduced at the cathode electrocatalyst.

In electrochemical fuel cells employing hydrogen as the fuel and oxygen as the oxidant, the catalyzed reaction at the anode produces hydrogen cations (protons) from the fuel supply. The ion exchange membrane facilitates the migration of protons from the anode to the cathode. In addition to conducting protons, the membrane isolates the hydrogen-containing fuel stream from the oxygen-containing oxidant stream. At the cathode electrocatalyst layer, oxygen reacts with the protons that have crossed the membrane to form water as the reaction product. The anode and cathode reactions in hydrogen/oxygen fuel cells are shown in the following equations:

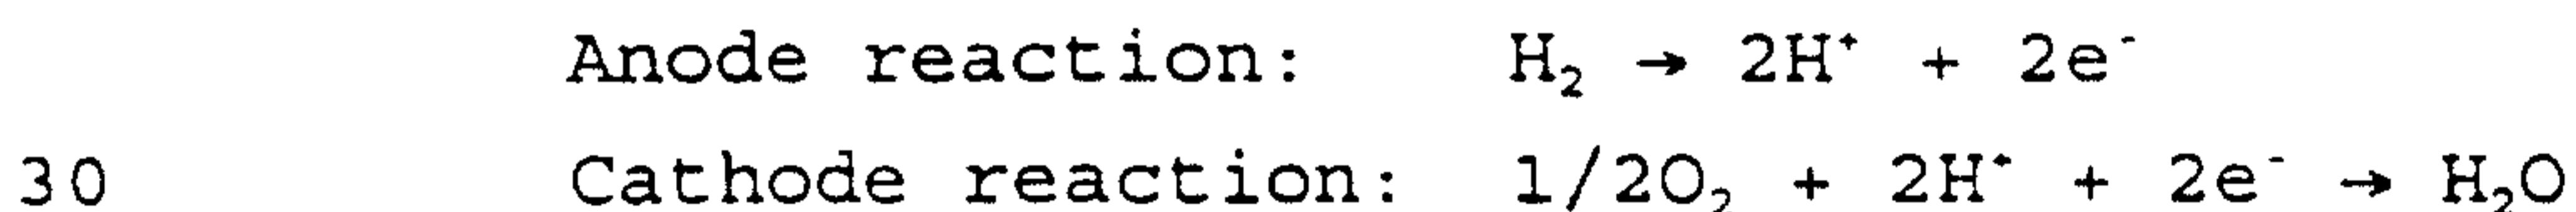

In electrochemical fuel cells employing methanol as the fuel supplied to the anode (so-called "direct methanol" fuel cells) and an

oxygen-containing oxidant stream, such as air (or substantially pure oxygen) supplied to the cathode, the methanol is oxidized at the anode to produce protons and carbon dioxide. Typically, the methanol is supplied to the anode as an aqueous solution or as a vapor. The protons migrate through the ion exchange membrane from the anode to the cathode, and at the cathode electrocatalyst layer, oxygen reacts with the protons to form water. The anode and cathode reactions in this type of direct methanol fuel cell are shown in the following equations:

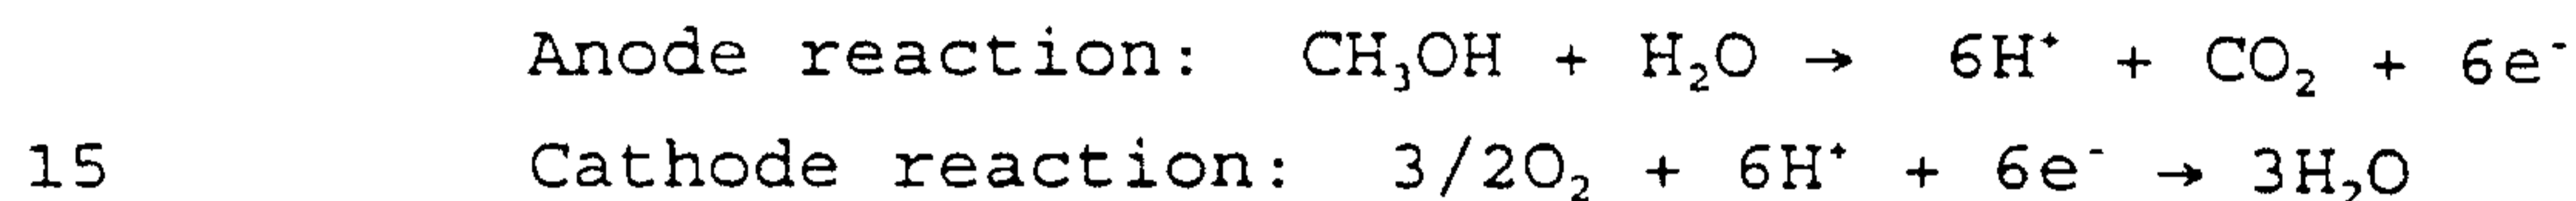

In electrochemical fuel cells, the MEA is typically interposed between two separator plates or fluid flow field plates (anode and cathode plates). The plates typically act as current collectors and provide support to the MEA. Fluid flow field plates typically have channels, grooves or passageways formed therein to provide means for access of the fuel and oxidant streams to the porous anode and cathode layers, respectively.

The porous electrode substrate material is electrically conductive to provide a conductive path between the electrocatalyst reactive sites and the current collectors. Materials commonly used as electrode substrate materials in solid polymer electrochemical fuel cells include:

- (a) carbon fiber paper;
- (b) woven carbon fabric - optionally filled with carbon particles and a binder;

(c) metal mesh or gauze - optionally filled with carbon particles and a binder.

Thus typical electrode substrate materials are preformed, highly electrically conductive,
5 macroporous sheet materials which may contain a particulate electrically conductive material and a binder.

For electrode substrates comprising a macroporous sheet material (hereinafter referred to
10 as a "web") filled with electrically conductive materials, the web need not be highly electrically conductive and in fact may be an electrical insulator. Electrode substrates which are made from filled, poorly electrically conductive webs
15 have performance characteristics in fuel cells approaching those of conventional substrates. However, the use of preformed webs which are made from poorly conducting or insulating materials in the electrode substrate can offer offsetting
20 advantages such as reduced cost, improved chemical compatibility and resistance to degradation and corrosion in fuel cell operation, improved mechanical properties including strength, durability and dimensional stability, and improved
25 manufacturability.

Summary Of The Invention

A porous electrode substrate for an electrochemical fuel cell comprises at least one
30 preformed web having low electrical conductivity, the web containing an electrically conductive filler.

In one embodiment the porous electrode substrate comprises at least two preformed webs,

and the substrate is a multi-layer structure.

The web comprises a macroporous sheet material, such as, for example a woven fabric, a non-woven fabric, or a mesh (a continuous sheet of substantially non-porous material which has been perforated). "Macroporous" as used herein indicates that the web has pores or voids therein which preferably have dimensions greater than approximately 10^{-4} m. The bulk porosity of the web is preferably greater than 60% and more preferably greater than 80%.

In a preferred embodiment the web is a non-woven fabric comprising carbon fibers and a binder. Examples of suitable low conductivity carbon fiber mats include non-graphitized materials, such as those available from Technical Fibre Products, Kendal, UK in the Optimat 203 Series.

The web having low electrical conductivity may be an electrical insulator. In a first preferred embodiment the preformed web comprises glass fibers, for example, the web is a non-woven glass fiber mat. In a second preferred embodiment the preformed web consists essentially of a polymeric material. Preferred polymeric materials include polyolefins such as, for example, polyethylene or polypropylene, nylon and polyparaphenylene terephthalamide (Kevlar®). A particularly preferred polymeric material is polytetrafluoroethylene (PTFE).

In one embodiment of a porous electrode substrate for an electrochemical fuel cell, the substrate comprising at least one preformed web having low electrical conductivity containing an

electrically conductive filler, the electrically
conductive filler does not comprise electrocatalyst
for promoting the electrochemical reaction in the
fuel cell. In this embodiment, the electrocatalyst
5 necessary in a solid polymer fuel cell MEA is
typically disposed at the interface of the membrane
electrolyte and porous electrode substrate, for
example, by deposition on the surface of the
membrane electrolyte and/or on the surface of the
10 electrode substrate.

In an alternative embodiment of a porous
electrode substrate the electrically conductive
filler comprises electrocatalyst for promoting the
electrochemical reaction in the fuel cell. In a
15 preferred aspect of this embodiment the
electrically conductive filler further comprises an
ionomer.

In another embodiment of a porous electrode
substrate, the electrically conductive filler
20 comprises a catalyst for promoting a chemical
reaction (other than the electrochemical fuel cell
reaction), such as, for example, selective
oxidation of carbon monoxide.

Preferred non-catalytic components of the
25 filler include carbon particles, such as carbon
blacks or graphite particles, and boron carbide.
These and other particulate components of the
filler may be various forms including powders,
flakes and fibers.

30 Preferably the electrically conductive filler
comprises a binder to bind particulate components
of the filler together and to retain the filler in
the web. Polytetrafluoroethylene is a suitable
binder.

The composition of the filler and the extent to which the web is filled with the filler is selected so that the electrode substrate is suitably porous and permeable to the fuel cell reactants and products, but has adequate electrical conductivity. The terms "filled" and "filling", as used herein, indicate that a substantial portion of the pores or voids of the web material are to contain the filler material, i.e., some filler is present in the thickness of the web, not just as a surface coating.

A method for preparing a porous electrode substrate for an electrochemical fuel cell comprises the step at least partially filling a preformed web with an electrically conductive filler. The web is of low electrical conductivity or is an electrical insulator.

In one embodiment of the method, perforations are formed in the preformed web prior to the filling step. The size of the perforations is preferably larger than the average pore size of the preformed web.

In another embodiment of the method, the preformed web is coated with a hydrophillic coating prior to the filling step. In yet another embodiment of the method the preformed web is coated with a hydrophobic coating prior to the filling step. The hydrophobic coating preferably comprises polytetrafluoroethylene.

Coating the preformed web with a hydrophobic or a hydrophillic material can offer advantages, such as, for example, improved water and other fluid transport properties in the electrode substrate which can enhance fuel cell performance.

Use of a hydrophobic coating can result in improved electrocatalyst utilization, as there is less tendency for an electrocatalyst ink applied to the surface of the filled substrate to soak into the substrate, and therefore more of the catalyst is retained at the membrane/electrode substrate interface.

Preferably the electrically conductive filler comprises a binder and the method optionally further comprises the step of heat treating the electrode substrate after the filling step.

The temperature at which the electrode substrate is heat treated is preferably selected to be above the softening point of the binder, so that the binder at least partially melts and binds the electrically conductive material together and to the web.

Various techniques may be used to fill the preformed web with electrically conductive filler, including, but not limited to, roll-coating and screen-printing.

In a method of preparing a multi-layer porous electrode substrate the method comprises the steps of:

- (a) filling at least two preformed webs, the webs of low electrical conductivity, with an electrically conductive filler;
- (b) laminating the at least two filled webs together.

Steps (a) and (b) are preferably performed consecutively.

The lamination step may further comprise stacking the at least two filled webs and applying pressure and temperature, whereby a consolidated

multi-layer electrode substrate is formed.

Brief Description Of The Drawings

5 FIG. 1 is an exploded side view of a typical solid polymer electrochemical fuel cell showing an MEA interposed between two flow field plates.

10 FIG. 2A is a side sectional view of a porous electrode substrate comprising a non-woven, poorly electrically conductive or electrically insulating web containing an electrically conductive filler.

15 FIG. 2B is a side sectional view of a porous electrode substrate comprising a woven, poorly electrically conductive or electrically insulating web containing an electrically conductive filler.

20 FIG. 3 is a side sectional view of an MEA comprising a membrane electrolyte interposed between two porous electrode substrates, with a layer of electrocatalyst disposed at each membrane/electrode substrate interface.

25 FIG. 4 is a side sectional view of a multi-layer porous electrode substrate comprising two laminated layers, each layer comprising a woven, poorly electrically conductive or electrically insulating web containing an electrically conductive filler.

30 FIG. 5 is a side sectional view of a porous electrode substrate comprising a perforated, poorly electrically conductive or electrically insulating web containing an electrically conductive filler.

FIG. 6 is a side sectional view of a porous electrode substrate comprising a poorly electrically conductive or electrically insulating web, wherein the web is a mesh containing an electrically conductive filler.

- 10 -

FIG. 7 is a plot of voltage as a function of current density in an electrochemical fuel cell employing, in one test, a cathode substrate made by filling a poorly conducting carbon fiber mat with carbon black and PTFE binder and, in a comparative test, a conventional catalyzed carbon fiber paper cathode substrate.

FIG. 8 is a plot of voltage as a function of current density in an electrochemical fuel cell employing, in one test, a cathode substrate made by filling an electrically insulating glass fiber mat with carbon black and PTFE binder and, in a comparative test, a conventional catalyzed carbon fiber paper cathode substrate.

FIG. 9 is a plot of voltage as a function of current density in an electrochemical fuel cell employing, in one test, a cathode substrate made by filling an electrically insulating, expanded PTFE mesh with carbon black and a copolymeric binder and, in a comparative test, a conventional catalyzed carbon fiber paper cathode substrate.

Detailed Description Of The Preferred Embodiments

FIG. 1 illustrates a typical solid polymer fuel cell 10. Fuel cell 10 includes an MEA 12 consisting of an ion exchange membrane 14 interposed between two porous, electrically conductive electrode substrates, namely, an anode substrate 16 and a cathode substrate 17. In the illustrated fuel cell, each substrate has a thin layer of electrocatalyst 20, 21 disposed at the interface with the membrane 14. The MEA is interposed between anode flow field plate 22 and cathode flow field plate 24. Anode flow field

- 11 -

plate 22 has at least one fuel flow channel 23 formed in its surface facing the anode substrate, and cathode flow field plate 24 has at least one oxidant flow channel 25 formed in its surface facing the cathode substrate. When assembled against the cooperating surfaces of the electrode substrates 16 and 17, channels 23 and 24 form reactant flow field passages for the fuel and oxidant, respectively.

10 FIG. 2A illustrates a porous electrode substrate 30 comprising a preformed non-woven web shown as a network of interlocking fibers 32, which are optionally held together by a binder (not shown). The web is poorly electrically conductive or is electrically insulating, and contains
15 particulate electrically conductive material 34 and optionally a binder (not shown) to retain the particulate material in the web. The particulate electrically conductive material preferably
20 comprises carbon, and optionally further comprises an electrocatalyst and/or other catalytic material.

FIG. 2B illustrates a porous electrode substrate 40 comprising a preformed woven web shown as a fabric of cross-woven fibers 42. The web is
25 poorly electrically conductive or is electrically insulating, and contains particulate electrically conductive material 44 and optionally a binder (not shown) to retain the particulate material in the web.

30 FIG. 3 illustrates an MEA 50, comprising a membrane electrolyte 51 interposed between an anode substrate 52 and a cathode substrate 56. Anode substrate 52 comprises a preformed non-woven web shown as a network of interlocking fibers 53, which

are optionally held together by a binder (not shown). The web is poorly electrically conductive or is electrically insulating, and contains particulate electrically conductive material 54 and optionally a binder (not shown) to retain the particulate material in the web. Similarly cathode substrate 56 comprises a preformed non-woven web shown as a network of interlocking fibers 57, which are optionally held together by a binder (not shown). The web is poorly electrically conductive or is electrically insulating, and contains particulate electrically conductive material 58 and a binder (not shown) to retain the particulate material in the web. In this embodiment the particulate electrically conductive material does not include electrocatalyst. A layer of electrocatalyst 55 and 59 is disposed at the membrane/anode substrate interface and the membrane/cathode substrate interface respectively.

FIG. 4 illustrates a multi-layer porous electrode substrate 60 comprising two laminated layers 62a and 62b, each layer comprising a preformed woven web shown as a fabric of woven fibers 62. The web is poorly electrically conductive or is electrically insulating, and contains particulate electrically conductive material 64 and optionally a binder (not shown) to retain the particulate material in the web.

This type of laminated multi-layer electrode substrate can offer advantages. It may be possible to improve the electrical conductivity of the substrate because thinner web layers are more easily filled throughout their thickness with the electrically conductive material and binder, and

they can then be stacked to give the desired thickness of electrode substrate. Also, the multi-layer substrate can contain layers comprising webs made of different materials or having
5 different structures, and/or layers containing fillers of compositions. Thus, the composition and properties of the substrate can be readily varied in the through-plane direction.

FIG. 5 illustrates a porous electrode
10 substrate 70 comprising a perforated preformed non-woven web shown as a network of interlocking fibers 72, which are optionally held together by a binder (not shown), with perforations 73 extending through the thickness of the web. The web is
15 poorly electrically conductive or is electrically insulating. The voids in the web, including the perforations contain particulate electrically conductive material 74 and optionally a binder (not shown) to retain the particulate material in the
20 web.

Perforating the web material prior to filling it with conductive material can increase the electrical conductivity of the final electrode substrate. The diameter of the perforations is
25 preferably larger than the average pore diameter of the web material.

FIG. 6 illustrates a porous electrode
substrate 80 comprising a web, wherein the web is a mesh 82. The web contains particulate electrically
30 conductive material 84 and optionally a binder (not shown) within its perforations. The web is poorly electrically conductive or is electrically insulating. Suitable plastic (insulating) mesh materials of this type are available from Exmet

Corporation, Naugatuck, CT, for example PTFE meshes in various mesh sizes from approximately $5 \cdot 10^{-4}$ m to $2.5 \cdot 10^{-3}$ m.

The in-plane and through-plane electrical conductivity of the electrode substrate is an important factor in fuel cell performance. Satisfactory electrical conductivity can be obtained for an electrode substrate comprising a low conductivity or insulating web containing an electrically conductive filler. A highly conductive web component is not required.

As used herein, the terms "low electrical conductivity" and "poorly electrically conductive" are used interchangeably. In general, a web material is very poorly conductive when its through-plane resistivity is greater than approximately $10 \Omega \cdot \text{cm}$. Web materials having through-plane resistivities greater than approximately $1 \Omega \cdot \text{cm}$ are generally considered to be poorly conductive.

Table 1 shows approximate values for the specific resistance (at 20°C) of materials commonly used in preformed webs in electrode substrates. Table 2 shows approximate values for the specific resistance (at 20°C) of some of the electrically insulating materials found to be suitable for use in preformed webs in electrode substrates.

TABLE 1

30	Carbon (black)	$10^{-1} \Omega \cdot \text{cm}$
	Carbon (graphite)	$10^{-3} \Omega \cdot \text{cm}$
	Metals	$< 10^{-5} \Omega \cdot \text{cm}$

- 15 -

TABLE 2

Glass		10^{13} $\Omega \cdot \text{cm}$
Polyethylene, polypropylene	>	10^{14} $\Omega \cdot \text{cm}$
Polytetrafluoroethylene		10^{18} $\Omega \cdot \text{cm}$

5

Table 3 shows specific resistivity measured in the through-plane direction, using the method described below, for conventional electrode substrate materials (carbon fiber paper and carbon cloth), a non-woven carbon fiber mat (unfilled) and electrode substrates prepared by filling a poorly conducting web or insulating web with an electrically conductive material and binder (Shawinigan carbon black and PTFE binder).

Approximate values for the area density of the web, the percentage by weight of PTFE binder in the electrically conductive fill, and the area loading of carbon are included in Table 3. Table 3 illustrates that electrode substrates incorporating a poorly conducting or insulating web can be made which have through-plane electrical resistivity comparable to those of conventional electrode substrate materials. It has been found that the unfilled non-woven carbon fiber mat is not sufficiently conductive to give satisfactory performance in a fuel cell.

10

15

20

25

TABLE 3

30

35

	Thickness m	Area loading of carbon mg/cm ²	PTFE content of fill % wt	Through- plane resistivity $\Omega \cdot \text{cm}$
Carbon fiber paper	285	--	--	0.17
Carbon cloth (115 g/m ²)	179	2.65	--	0.21

AMENDED SHEET

- 16 -

	Non-woven carbon fiber mat (17 g/m ²)	109	--	--	2.27
5	Non-woven carbon fiber mat (17 g/m ²)	79	1.7	6.7%	0.76
10	Glass fiber mat (17 g/m ²)	157	5.7	6%	0.56
	PTFE mesh (EXMET 2TF6-4/0)	50	3	6%	0.31
15					

The through-plane resistivity values reported
 in Table 3 were determined as follows: samples of
 the materials were placed between a pair of gold
 blocks (area 6.17 cm²) with an applied pressure of
 41 psi (282.7 kN/m²). A current of 3 amps was passed
 through the material and the voltage drop between
 the blocks was measured. Both through-plane
 resistance and contact resistance contribute to the
 value determined by this method.

The following examples are for purposes of

GEÄNDERTES BLATT

- 17 -

illustration and are not intended to limit the invention. The examples describe the preparation of electrode substrates and compare the results obtained in tests employing those electrode substrates versus conventional electrode substrates in an electrochemical fuel cell.

EXAMPLE 1

A porous electrode substrate was prepared as follows: a paste was prepared by mixing Shawinigan carbon and an aqueous suspension of PTFE binder (to give 6% PTFE by weight of solids). The paste was spread on and pressed into the pores of a sheet of non-woven carbon fiber mat (Optimat 203, 17 g*m⁻² from Technical Fibre Products, Kendal, UK). The substrate was pressed at 500 psi (3447.4 kN/m²) for two minutes, and then placed between two niobium sheets in an oven where the temperature was raised slowly to 340°C and held for 15 minutes. The substrate contained 6.2 mg*cm⁻² carbon. The layer of electrocatalyst (40% platinum on carbon) was deposited on one face of the substrate, and the catalyzed substrate was incorporated as the cathode in a consolidated MEA with a conventional anode (electrocatalyst layer on carbon fiber paper) and Nafion™ 115 ion exchange membrane. The MEA was placed between two flow field plates and tested in a fuel cell assembly. FIG. 7 shows a polarization plot of voltage as a function of current density for the fuel cell employing the MEA prepared as described above (plot A), and for a fuel cell employing an MEA with conventional catalyzed carbon fiber paper electrode substrates (plot B) with approximately the same electrocatalyst loading

under substantially the same operating conditions.

EXAMPLE 2

A porous electrode substrate was prepared by
5 filling a sheet of glass fiber mat ($17 \text{ g}\cdot\text{m}^{-2}$
containing 10% by weight polyvinylalcohol binder
from Technical Fibre Products) with a paste of
Shawinigan carbon and an aqueous suspension of PTFE
binder (to give 6% PTFE by weight of solids) as
10 described in Example 1. The substrate contained
 $4.85 \text{ mg}\cdot\text{cm}^{-2}$ carbon. A layer of electrocatalyst
(40% platinum on carbon) was deposited on one face
of the substrate, and the catalyzed substrate was
incorporated as the cathode in a consolidated MEA
15 with a conventional anode (electrocatalyst layer on
carbon fiber paper) and a proprietary Dow ion
exchange membrane (Trade designation XUS 13204.10).
The MEA was placed between two flow field plates
and tested in a fuel cell assembly. FIG. 8 shows a
20 polarization plot of voltage as a function of
current density for the fuel cell employing the MEA
prepared as described above (plot C), and for a
fuel cell employing an MEA with conventional
catalyzed carbon fiber paper electrode substrates
25 (plot D) with approximately the same
electrocatalyst loading under substantially the
same operating conditions.

EXAMPLE 3

30 A porous anode substrate containing a catalyst
for selective oxidation of carbon monoxide was
prepared by filling a sheet of glass fiber mat (17
 $\text{g}\cdot\text{m}^{-2}$ containing 10% by weight polyvinylalcohol
binder from Technical Fibre Products) with a paste

of a supported platinum catalyst (20% on carbon),
Shawinigan carbon and an aqueous suspension of PTFE
binder (to give 18% PTFE by weight of solids) as
described in Example 1. The substrate contained
5 approximately 0.25 mg*cm⁻² platinum and 3.9 mg*cm⁻²
uncatalyzed carbon. A layer of electrocatalyst
(20% platinum/10% ruthenium on carbon) was
deposited on one face on the substrate, and the
substrate was incorporated in a consolidated MEA
10 with a conventional cathode (electrocatalyst layer
on carbon fiber paper) and a proprietary Dow ion
exchange membrane (Trade designation XUS 13204.10).
The MEA was placed between two flow field plates in
a fuel cell assembly, and gave satisfactory
15 performance (comparable to that of a fuel cell, with
a conventional catalyzed carbon fiber paper anode
substrate with a selective oxidation catalyst layer
underneath the electrocatalyst layer) on air-
hydrogen, and air-reformate (40 ppm carbon
20 monoxide).

EXAMPLE 4

A porous electrode substrate was prepared as
follows: a paste was prepared by mixing Shawinigan
25 carbon and an aqueous suspension of FEP120 binder
(a fluorinated ethylene-propylene copolymer
available from DuPont, which sinters at a lower
temperature than PTFE, to give 40% FEP by weight of
solids. A sheet of expanded PTFE mesh (5TF6-4/0
30 from Exmet Corporation) was prestretched laterally
by 18% in the expanded direction, and was then
filled as described in Example 1. The substrate was
pressed at 500 psi (3447.4 kN/m² for two minutes, and
then placed between two niobium sheets in an oven where

- 20 -

the temperature was raised slowly to 275°C and held for 15 minutes. The substrate contained 8.5 mg*cm⁻² carbon. A layer of electrocatalyst (40% platinum on carbon) was deposited on one face of the substrate, and the catalyzed substrate was incorporated as the cathode in a consolidated MEA with a conventional anode (electrocatalyst layer on carbon fiber paper) and Nafion™ 115 ion exchange membrane. The MEA was placed between two flow field plates and tested in a fuel cell assembly. FIG. 9 shows a polarization plot of voltage as a function of current density for the fuel cell employing the MEA prepared as described above (plot E), and for a fuel cell employing an MEA with conventional catalyzed carbon fiber paper electrode substrates (plot F) with approximately the same electrocatalyst loading under substantially the same operating conditions.

Electrode substrates of the present invention are particularly suitable for use in solid polymer electrochemical fuel cells, but may also be used in other types of electrochemical cells and fuel cells.

- 21 -

What is claimed is:

1. A membrane electrode assembly for an electrochemical fuel cell, the assembly comprising
5 a pair of electrodes and an ion exchange membrane interposed therebetween, at least one of said electrodes comprising a porous electrode substrate comprising at least one preformed macroporous web having a through-plane resistivity of greater than
10 $1 \Omega \cdot \text{cm}$, said at least one web containing an electrically conductive filler.
2. The membrane electrode assembly of claim 1 wherein said at least one web has a through-plane
15 resistivity of greater than $10 \Omega \cdot \text{cm}$.
3. The membrane electrode assembly of claim 1 wherein said at least one web is an electrical
20 insulator.
4. The membrane electrode assembly of claim 1 wherein said at least one web is a woven fabric.
5. The membrane electrode assembly of claim
25 1 wherein said at least one web is a non-woven fabric.
6. The membrane electrode assembly of claim
5 wherein said non-woven fabric comprises carbon
30 fibers and a binder.
7. The membrane electrode assembly of claim

AMENDED SHEET

- 22 -

6 wherein said non-woven fabric is non-graphitized carbon fiber mat.

8. The membrane electrode assembly of claim
5 1 wherein said at least one web is a mesh.

9. The membrane electrode assembly of claim
1 wherein said substrate comprises at least two
preformed macroporous webs, and said substrate is a
10 multi-layer structure.

10. The membrane electrode assembly of claim
9 wherein said substrate comprises a first web and
a second web, said first web substantially
15 identical to said second web.

11. The membrane electrode assembly of claim
9 wherein said substrate comprises a first web
containing a first electrically conductive filler
20 and a second web containing a second electrically
conductive filler, said first filler different in
composition from said second filler.

12. The membrane electrode assembly of claim
25 3 wherein said at least one web comprises glass
fibers.

13. The membrane electrode assembly of claim
12 wherein said at least one web is non-woven glass
30 fiber mat.

14. The membrane electrode assembly of claim

AMENDED SHEET

- 23 -

3 wherein said at least one web consists essentially of a polymeric material.

5 15. The membrane electrode assembly of claim 14 wherein said at least one web consists essentially of polytetrafluoroethylene.

10 16. The membrane electrode assembly of claim 15 wherein said at least one web is polytetrafluoroethylene mesh.

15 17. The membrane electrode assembly of claim 14 wherein said at least one web consists essentially of polyparaphenylene terephthalamide.

18. The membrane electrode assembly of claim 14 wherein said at least one web consists essentially of a polyolefin.

20 19. The membrane electrode assembly of claim 1 wherein said electrically conductive filler comprises carbon particles.

25 20. The membrane electrode assembly of claim 1 wherein said electrically conductive filler comprises boron carbide.

30 21. The membrane electrode assembly of claim 1 wherein said electrically conductive filler comprises a catalyst.

22. The membrane electrode assembly of claim 21 wherein said catalyst is an electrocatalyst.

AMENDED SHEET

- 25 -

is an electrical insulator.

5 30. The method of claim 28 wherein perforations are formed in said web prior to said filling step.

10 31. The method of claim 28 wherein said web is coated with a hydrophilic coating prior to said filling step.

 32. The method of claim 28 wherein said web is coated with a hydrophobic coating prior to said filling step.

15 33. The method of claim 32 wherein said hydrophobic coating comprises polytetrafluoroethylene.

20 34. The method of claim 28 wherein said electrically conductive filler comprises a binder.

 35. The method of claim 34 further comprising the step of heat treating said electrode substrate after said filling step.

25 36. The method of claim 28 wherein said filling step comprises roll-coating said web with said electrically conductive filler.

30 37. The method of claim 28 wherein said filling step comprises screen-printing said electrically conductive filler on to said web.

AMENDED SHEET

- 26 -

- 38. The method of claim 28 wherein said consolidating step comprises applying heat and pressure to said electrode pair and said ion exchange membrane.

5

AMENDED SHEET

1/4

FIG. 1

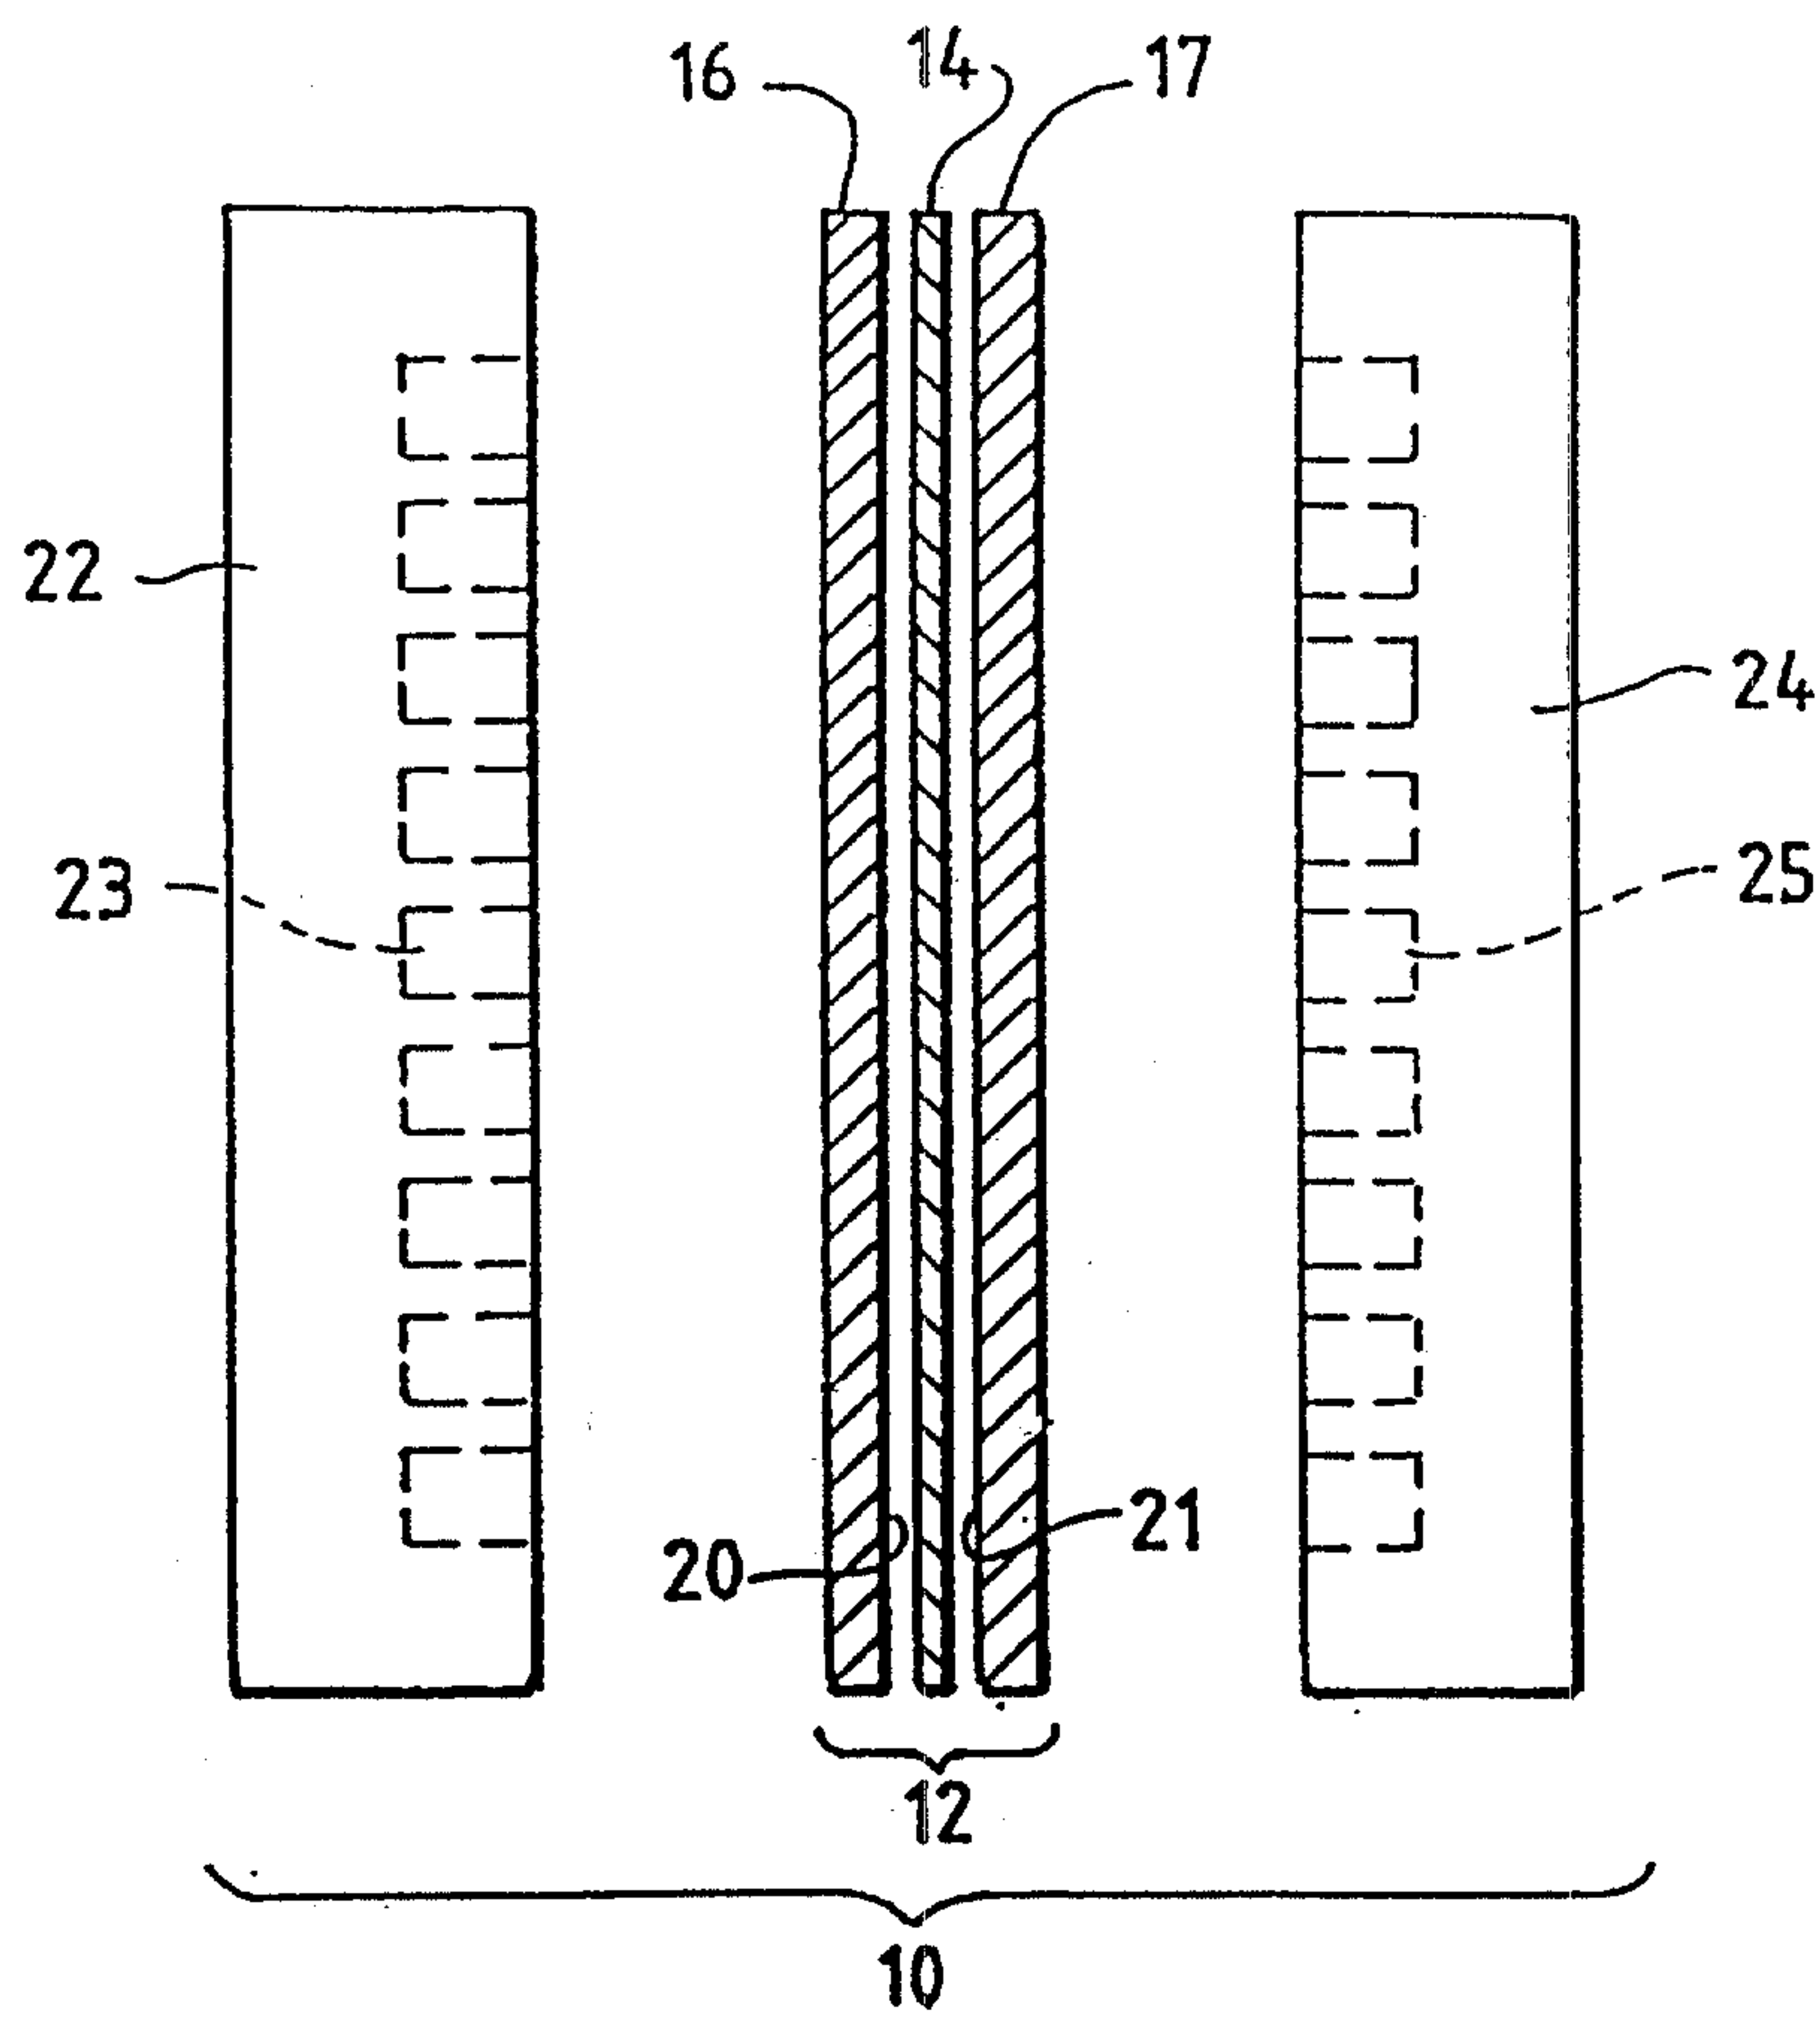


FIG. 2A

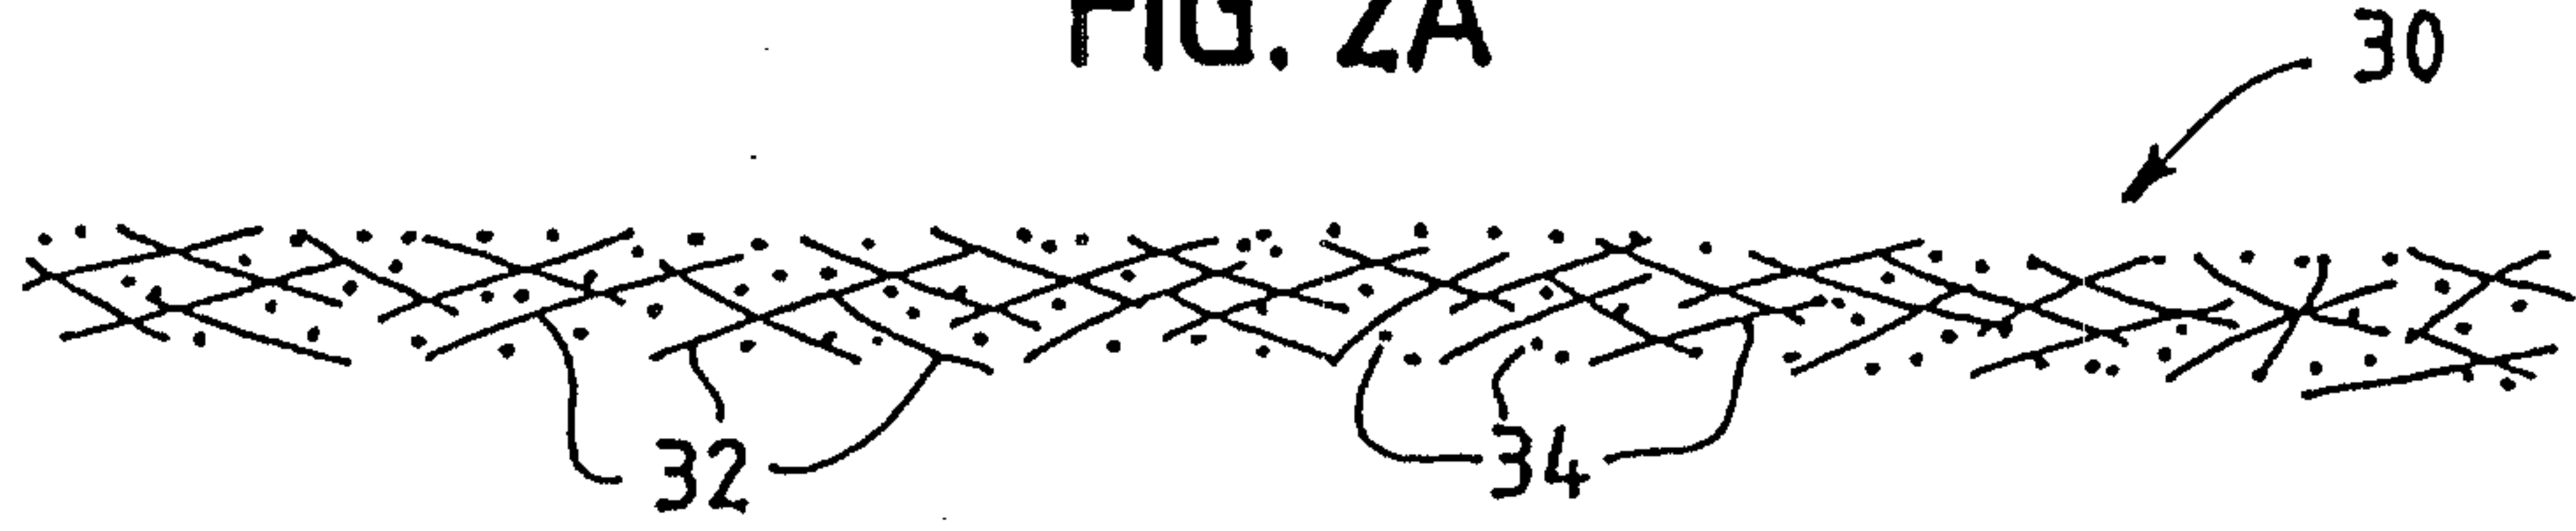


FIG. 2B

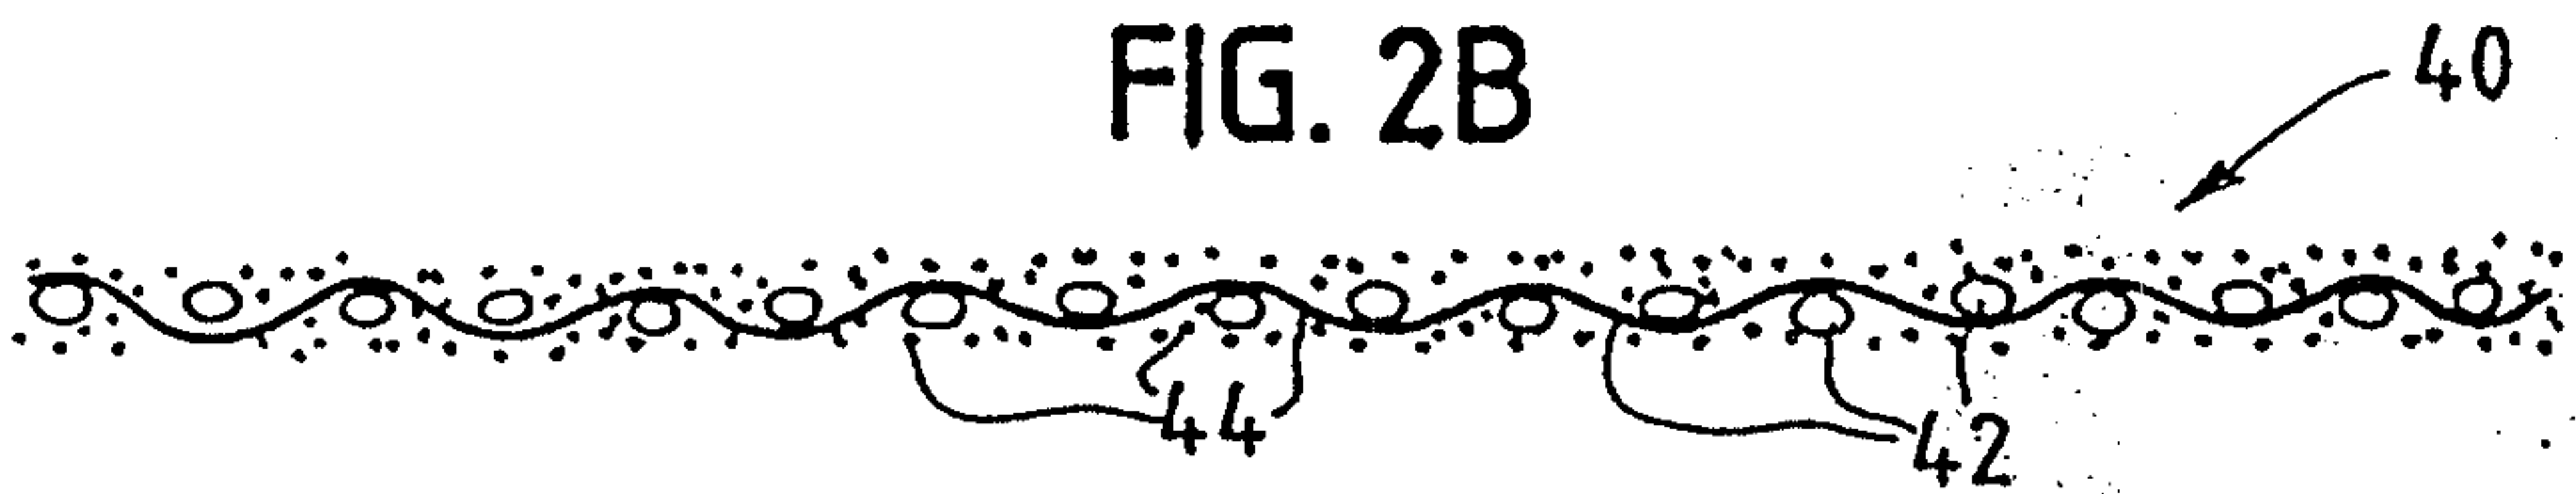


FIG. 3

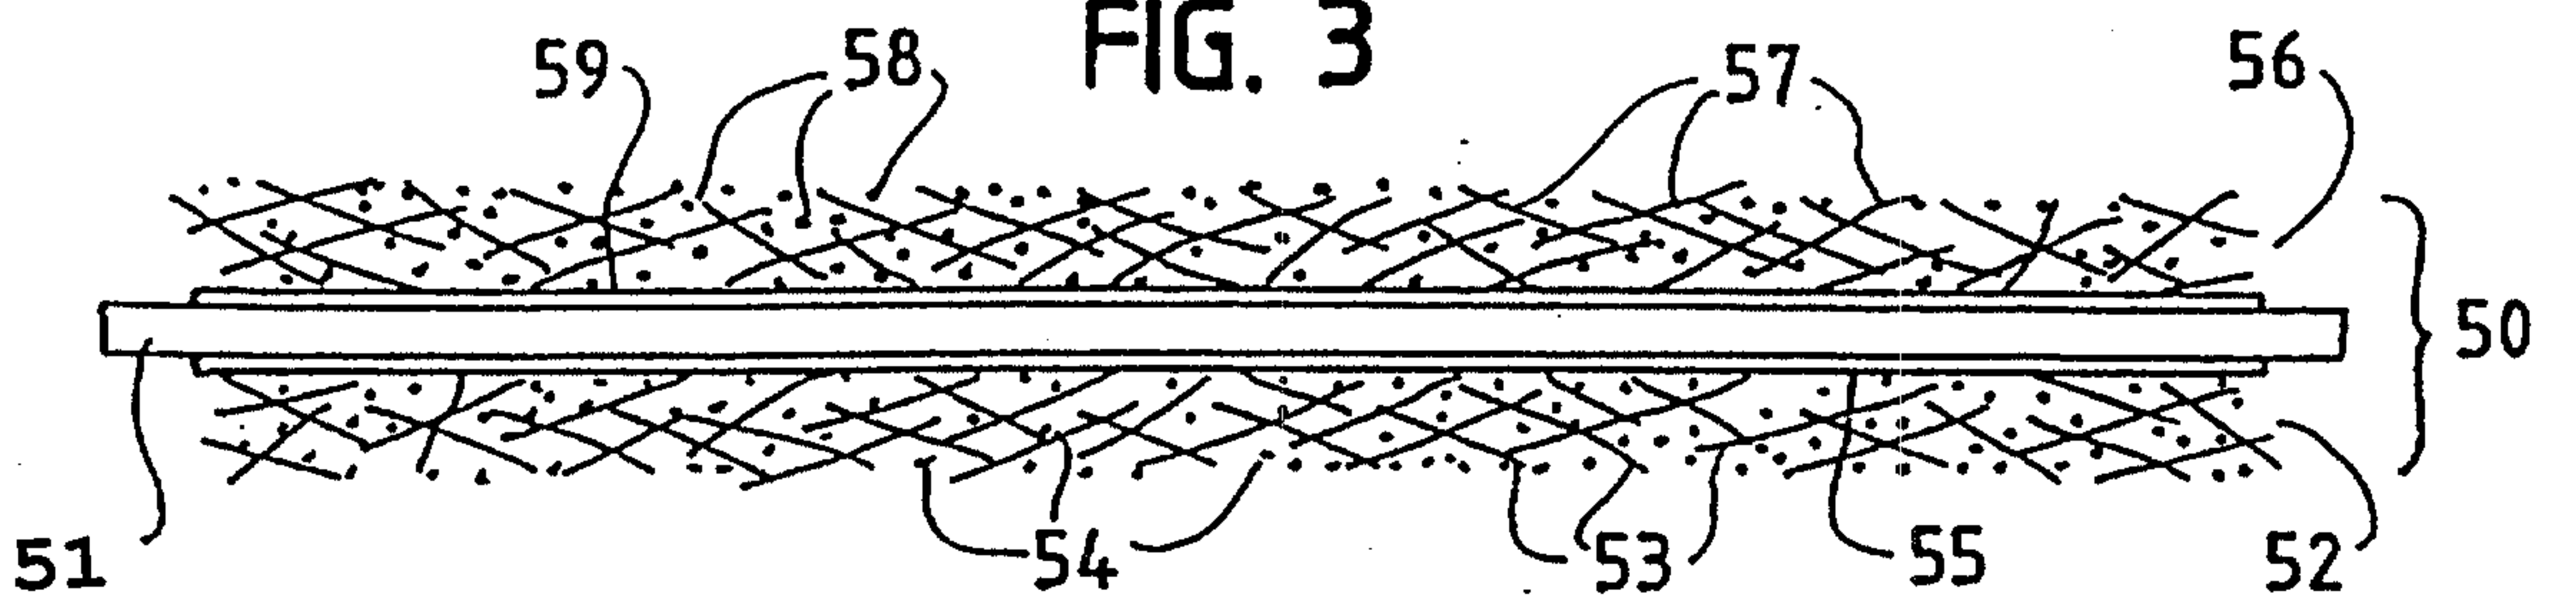


FIG. 4

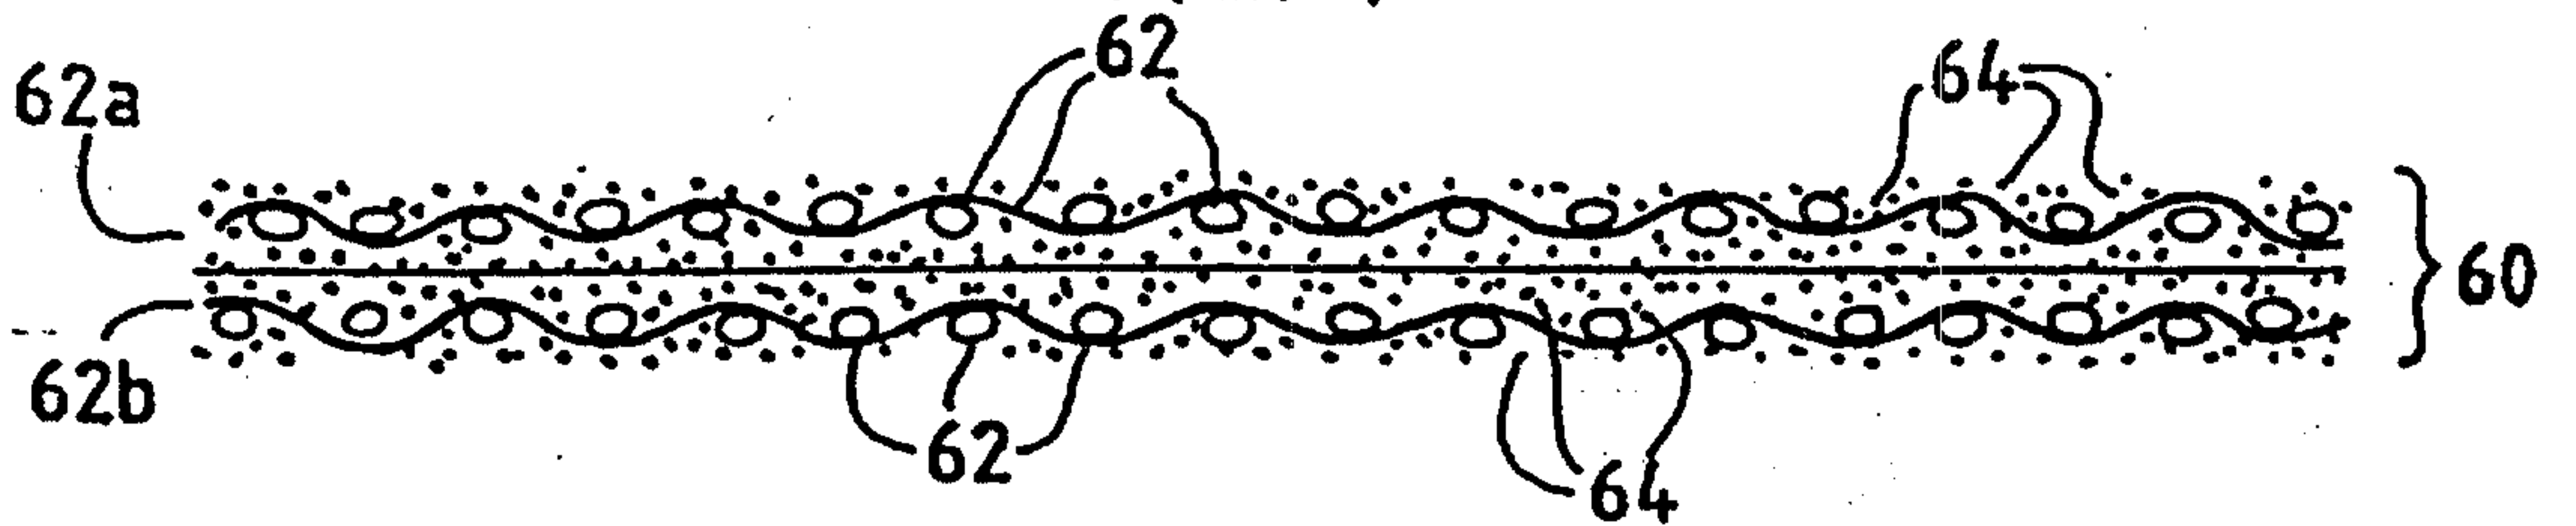


FIG. 5


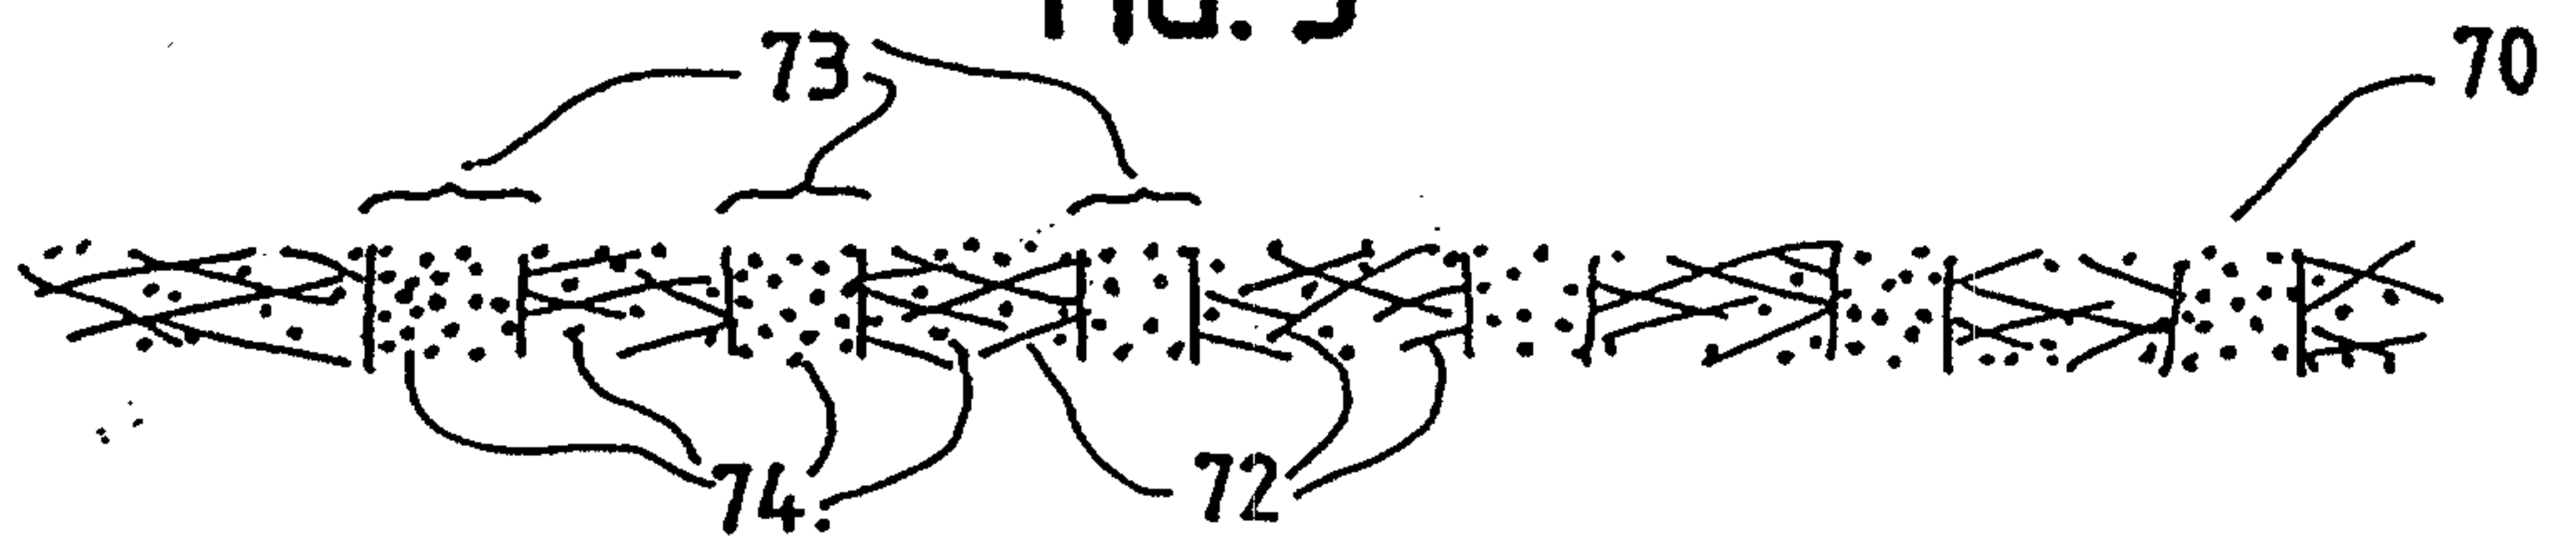


FIG. 6

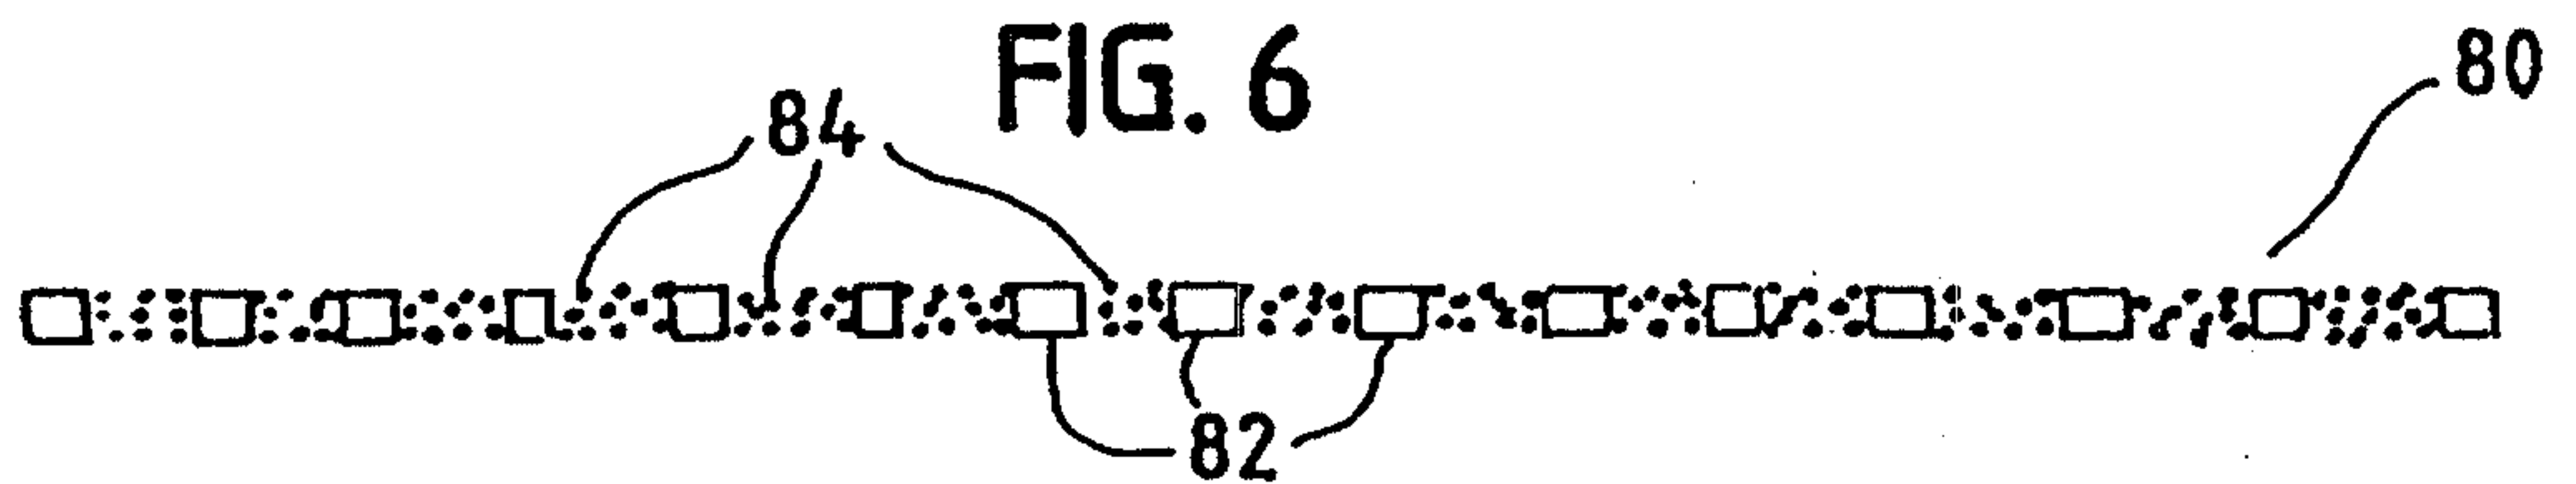

3/4

FIG. 7


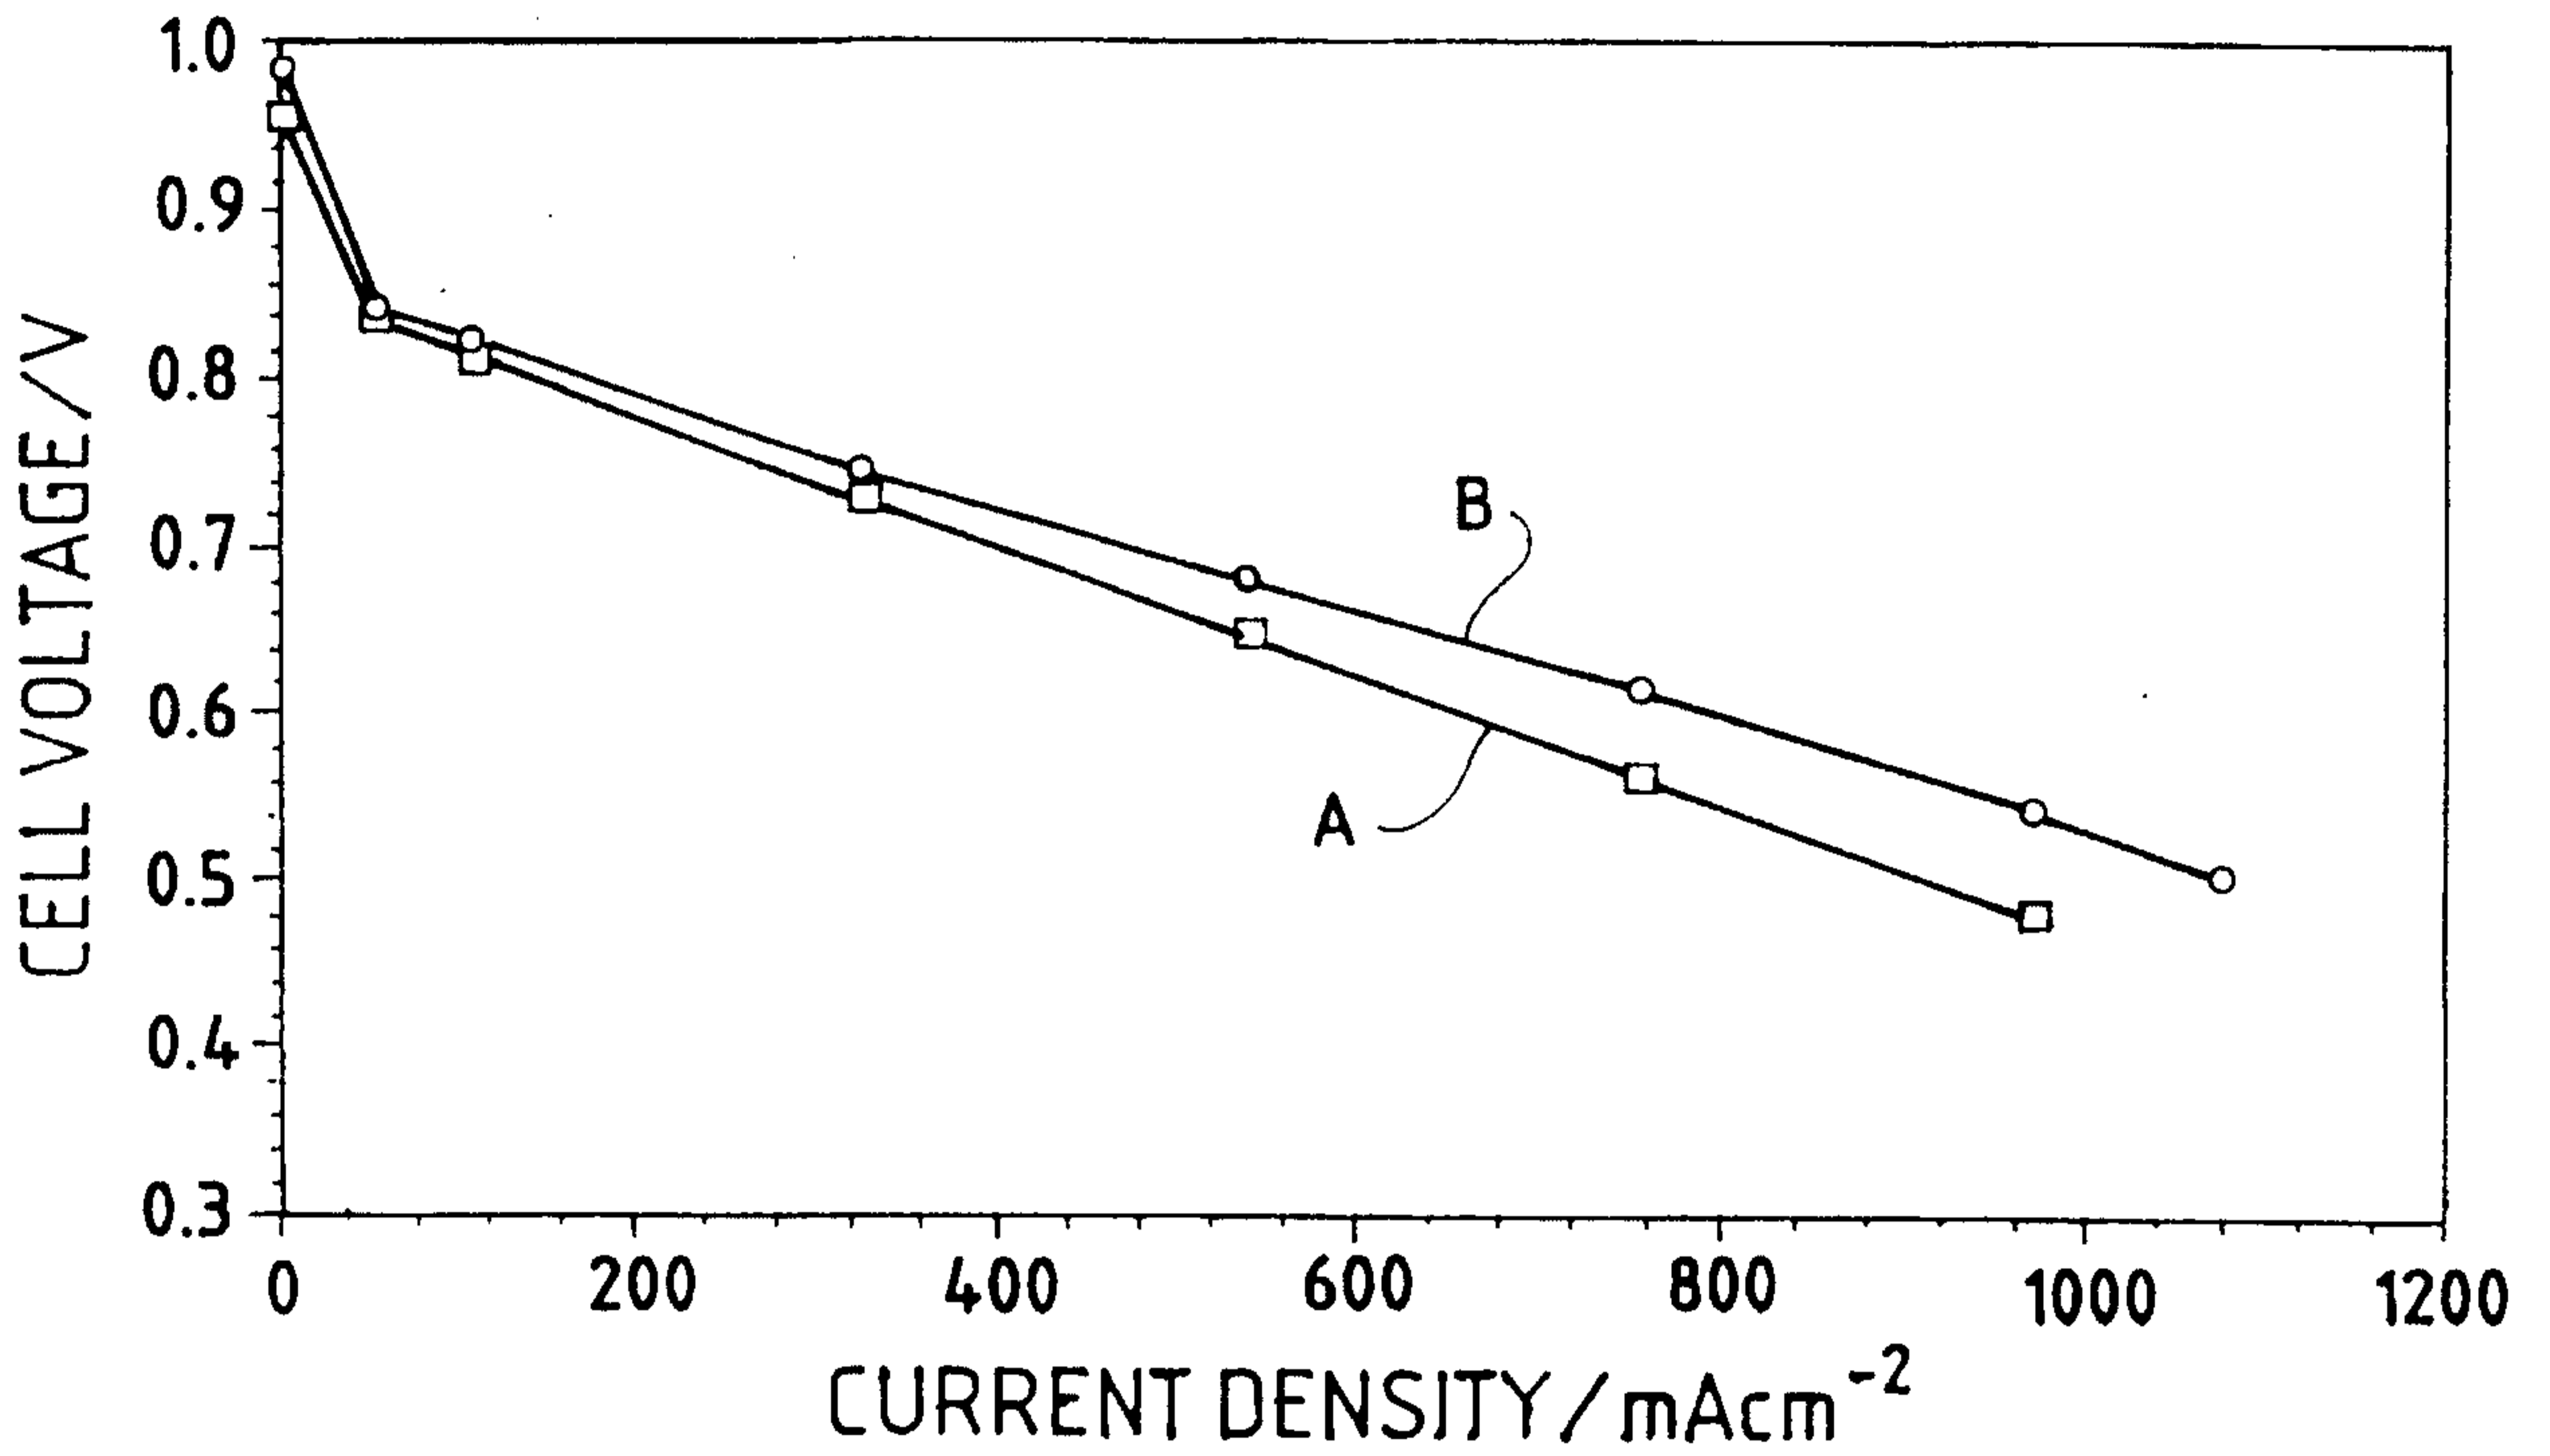


FIG. 8



4/4

FIG. 9

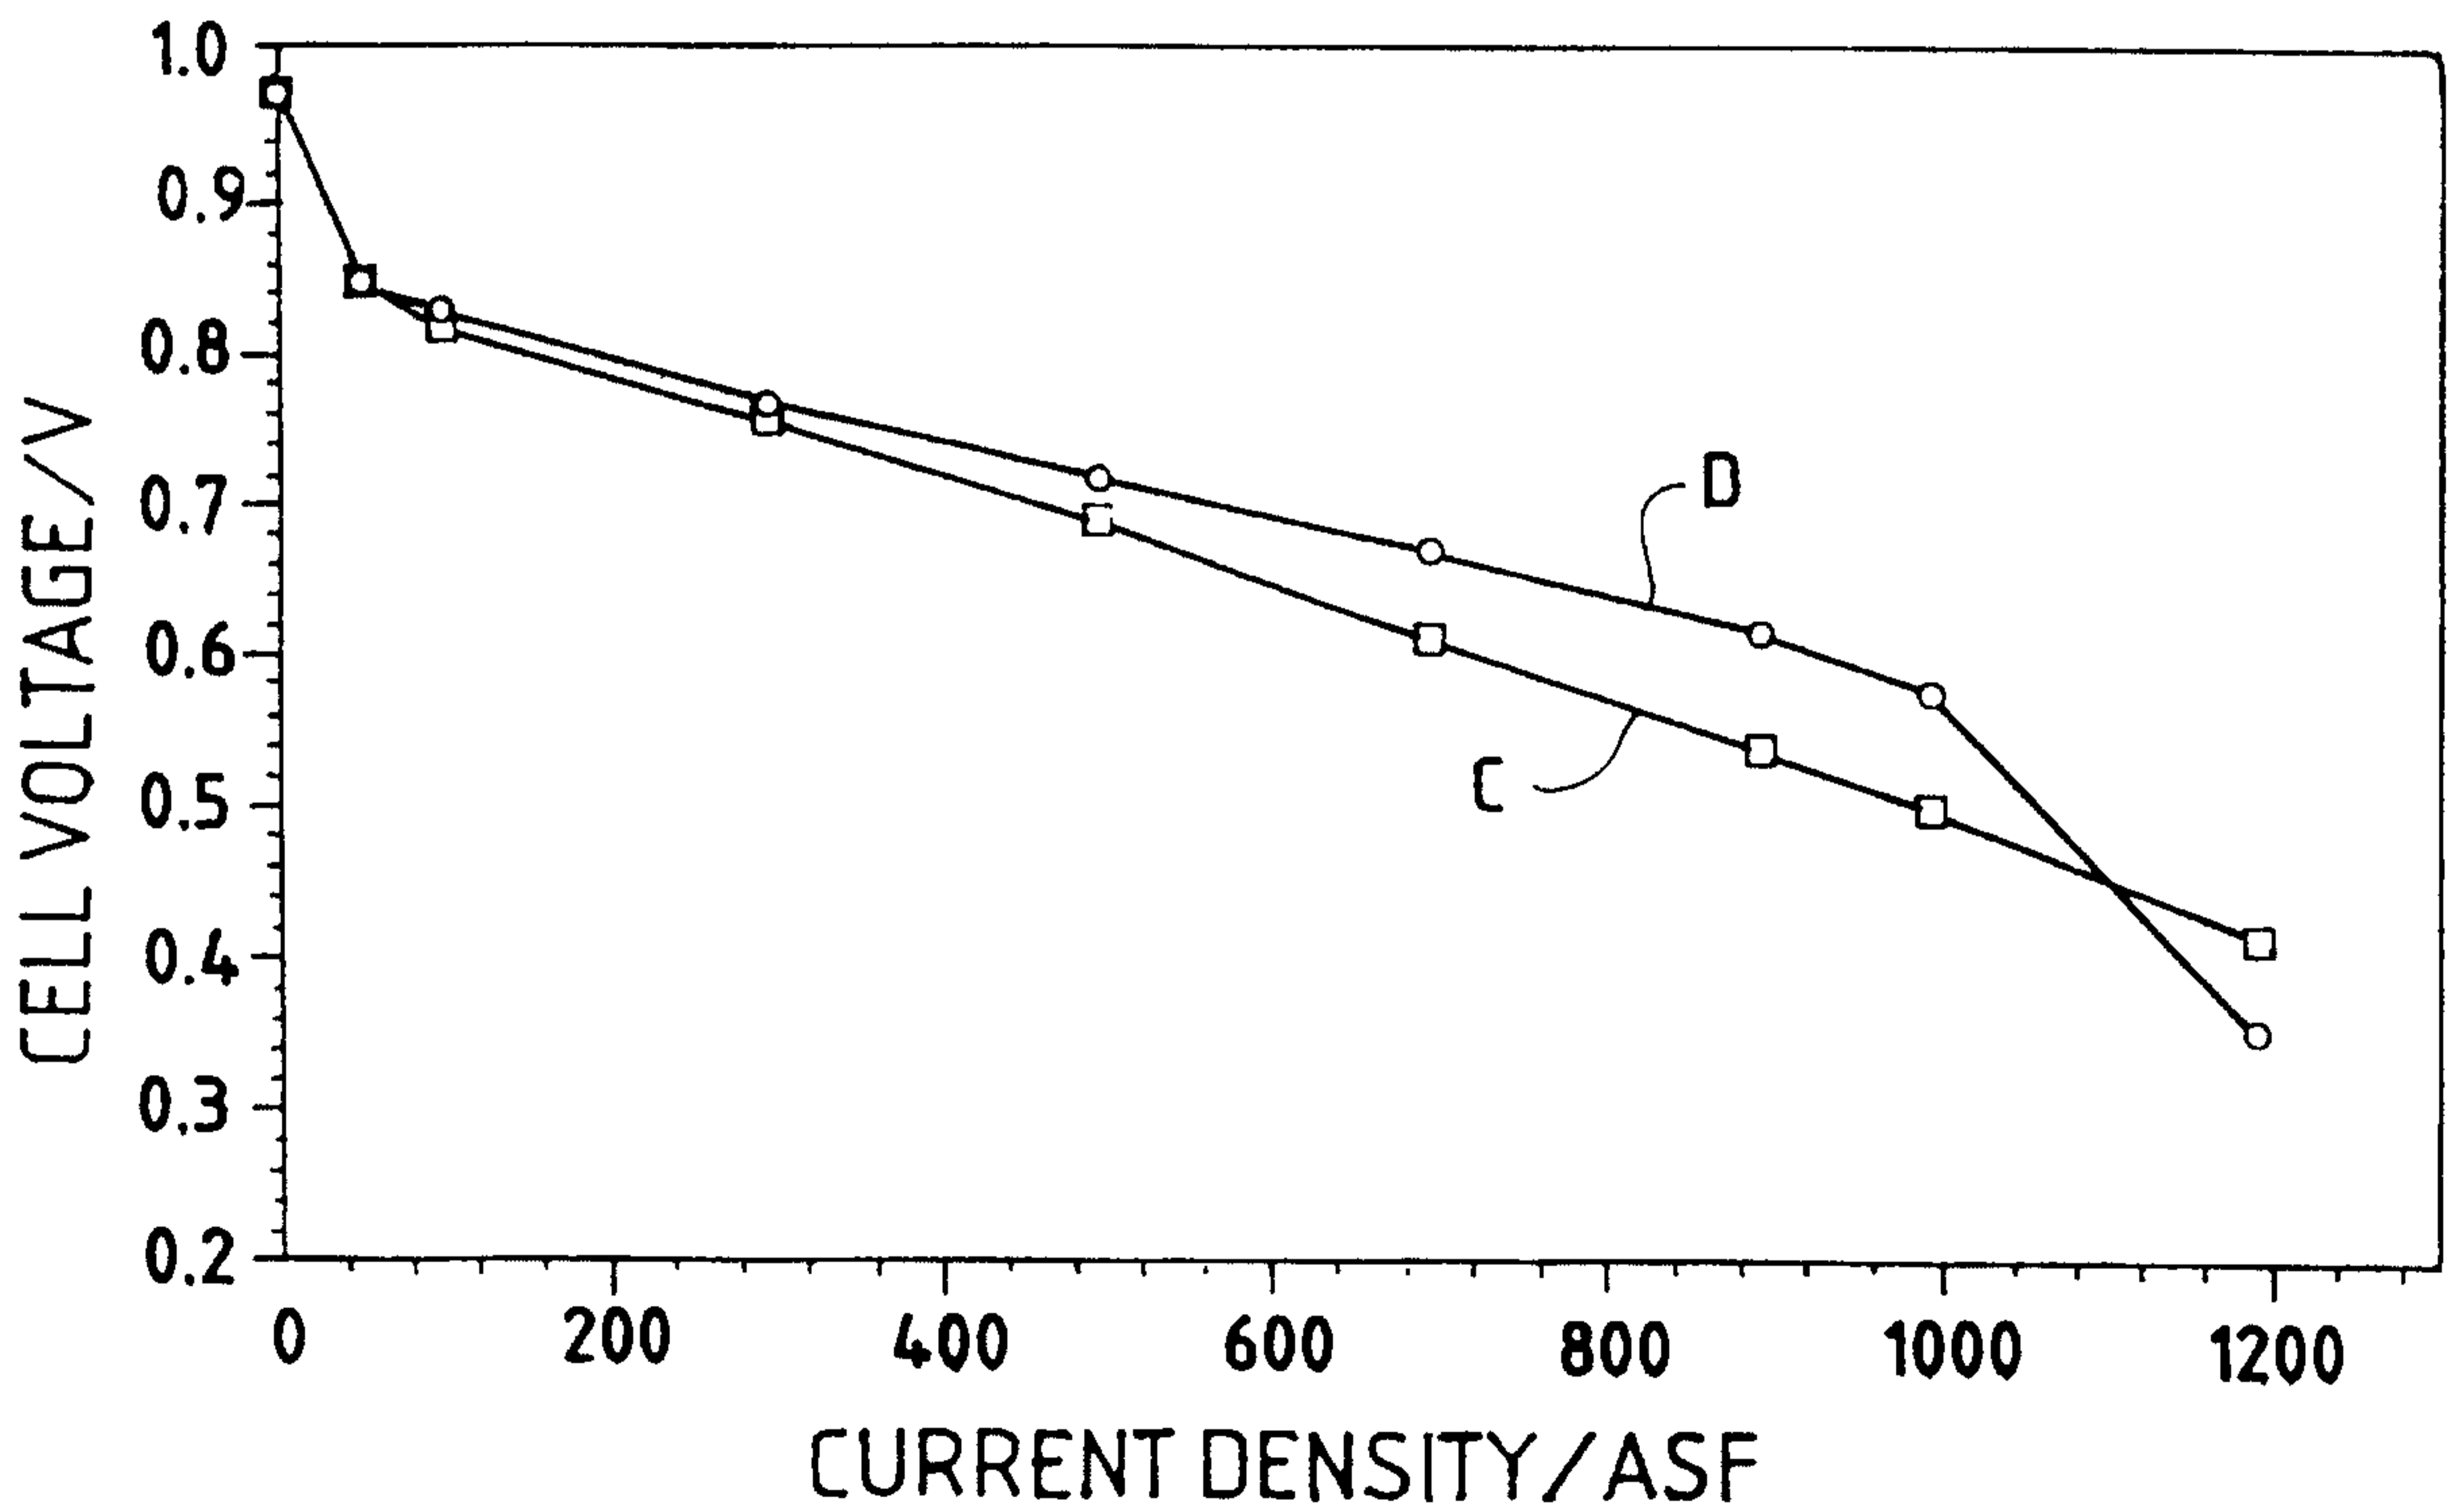