




(86) **Date de dépôt PCT/PCT Filing Date:** 2018/05/29
(87) **Date publication PCT/PCT Publication Date:** 2018/12/20
(45) **Date de délivrance/Issue Date:** 2020/06/30
(85) **Entrée phase nationale/National Entry:** 2019/12/16
(86) **N° demande PCT/PCT Application No.:** US 2018/034825
(87) **N° publication PCT/PCT Publication No.:** 2018/231501
(30) **Priorité/Priority:** 2017/06/16 (US15/625,166)

(51) **Cl.Int./Int.Cl. F16K 15/03** (2006.01),
F16K 27/02 (2006.01)
(72) **Inventeur/Inventor:**
NGUYEN, DUY D., US
(73) **Propriétaire/Owner:**
CANTEX INTERNATIONAL, INC., US
(74) **Agent:** SMART & BIGGAR LLP

(54) **Titre : CLAPET A BATTANT**
(54) **Title: FLAPPER VALVE**

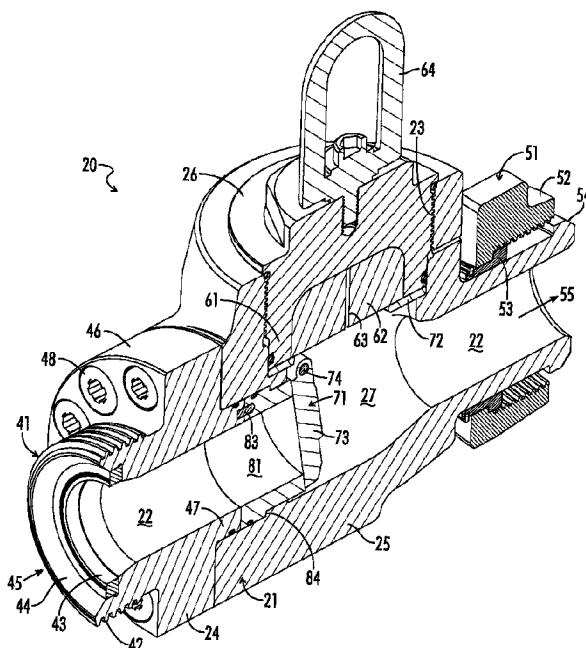

(57) **Abrégé/Abstract:**

Flapper valves may be provided in fluid transportation systems. The flapper valves comprise a body adapted for assembly into the system. The body comprises a first sub and a second sub which are removably assembled to each other. A passage is defined in the body which extends through the first and second subs. A seat is removably mounted in the passage. The seat is accessible by disassembling the first sub and the second sub. The valve also has a service port. A cap removably closes the port. A flapper is removably mounted within the service port for pivoting movement between a closed position and an open position. In the closed position the flapper shuts off back flow through the passage. In the open position, the flapper allows fluid flow through the valve. The flapper is accessible by removing the cap from the service port.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
20 December 2018 (20.12.2018)



(10) International Publication Number
WO 2018/231501 A1

- (51) International Patent Classification:
F16K 15/03 (2006.01) *F16K 27/02* (2006.01)
- (21) International Application Number:
PCT/US2018/034825
- (22) International Filing Date:
29 May 2018 (29.05.2018)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
15/625,166 16 June 2017 (16.06.2017) US
- (71) Applicant: CANTEX INTERNATIONAL, INC.
[US/US]; 3131 West Little York Road, Houston, TX 77901 (US).
- (72) Inventor: NGUYEN, Duy D.; 18319 Red Oak Manor Lane, Cypress, TX 77433 (US).
- (74) Agent: WILLHELM, Keith B.; Attorney at Law, 681 N. Post Oak Lane, Houston, TX 77024 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH,

(54) Title: FLAPPER VALVE

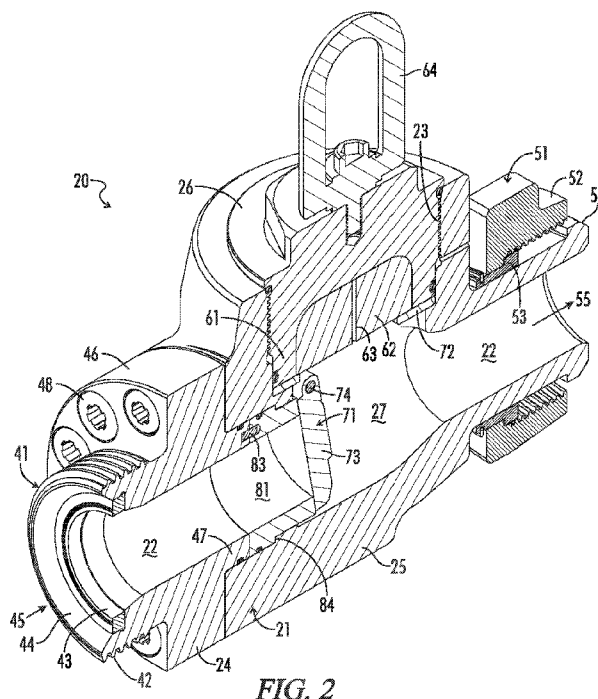


FIG. 2

(57) Abstract: Flapper valves may be provided in fluid transportation systems. The flapper valves comprise a body adapted for assembly into the system. The body comprises a first sub and a second sub which are removably assembled to each other. A passage is defined in the body which extends through the first and second subs. A seat is removably mounted in the passage. The seat is accessible by disassembling the first sub and the second sub. The valve also has a service port. A cap removably closes the port. A flapper is removably mounted within the service port for pivoting movement between a closed position and an open position. In the closed position the flapper shuts off back flow through the passage. In the open position, the flapper allows fluid flow through the valve. The flapper is accessible by removing the cap from the service port.

[Continued on next page]



WO 2018/231501 A1

WO 2018/231501 A1

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to the identity of the inventor (Rule 4.17(i))*
- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*

FLAPPER VALVE

FIELD OF THE INVENTION

The present invention relates generally to flapper valves, and especially to flapper check valves for fluid transportation systems conveying fluids under high pressure as are common, for example, in the oil and gas industry.

BACKGROUND OF THE INVENTION

Hydrocarbons, such as oil and gas, may be recovered from various types of subsurface geological formations. The formations typically consist of a porous layer, such as limestone and sands, overlaid by a nonporous layer. Hydrocarbons cannot rise through the nonporous layer. Thus, the porous layer forms a reservoir, that is, a volume in which hydrocarbons accumulate. A well is drilled through the earth until the hydrocarbon bearing formation is reached. Hydrocarbons then are able to flow from the porous formation into the well.

In what is perhaps the most basic form of rotary drilling methods, a drill bit is attached to a series of pipe sections referred to as a drill string. The drill string is suspended from a derrick and rotated by a motor in the derrick. A drilling fluid or “mud” is pumped down the drill string, through the bit, and into the well bore. This fluid serves to lubricate the bit and carry cuttings from the drilling process back to the surface. As the drilling progresses downward, the drill string is extended by adding more pipe sections.

A modern oil well typically includes a number of tubes extending wholly or partially within other tubes. That is, a well is first drilled to a certain depth. Larger diameter pipes, or casings, are placed in the well and cemented in place to prevent the sides of the borehole from caving in. After the initial section has been drilled, cased, and cemented, drilling will proceed with a somewhat smaller well bore. The smaller bore is lined with somewhat smaller pipes or “liners.” The liner is suspended from the original or “host” casing by an anchor or “hanger.” A well may include a series of smaller liners, and may extend for many thousands of feet, commonly up to and over 25,000 feet.

Hydrocarbons, however, are not always able to flow easily from a formation to a well. Some subsurface formations, such as sandstone, are very porous. Hydrocarbons are able to flow easily from the formation into a well. Other formations, however, such as shale rock, limestone, and coal beds, are only minimally porous. The formation may

1 contain large quantities of hydrocarbons, but production through a conventional well may
2 not be commercially practical because hydrocarbons flow through the formation and collect
3 in the well at very low rates. The industry, therefore, relies on various techniques for
4 improving the well and stimulating production from formations. In particular, various
5 techniques are available for increasing production from formations which are relatively
6 nonporous.

7 Perhaps the most important stimulation technique is the combination of horizontal
8 well bores and hydraulic fracturing. A well will be drilled vertically until it approaches a
9 formation. It then will be diverted, and drilled in a more or less horizontal direction, so
10 that the borehole extends along the formation instead of passing through it. More of the
11 formation is exposed to the borehole, and the average distance hydrocarbons must flow to
12 reach the well is decreased. Fractures then are created in the formation which will allow
13 hydrocarbons to flow more easily from the formation.

14 Fracturing a formation is accomplished by pumping fluid, most commonly water,
15 into the well at high pressure and flow rates. Proppants, such as grains of sand, ceramic or
16 other particulates, usually are added to the fluid along with gelling agents to create a slurry.
17 The slurry is forced into the formation at rates faster than can be accepted by the existing
18 pores, fractures, faults, vugs, caverns, or other spaces within the formation. Pressure builds
19 rapidly to the point where the formation fails and begins to fracture. Continued pumping
20 of fluid into the formation will tend to cause the initial fractures to widen and extend further
21 away from the well bore, creating flow paths to the well. The proppant serves to prevent
22 fractures from closing when pumping is stopped.

23 A formation rarely will be fractured all at once. It typically will be fractured in
24 many different locations or zones and in many different stages. Fluids will be pumped into
25 the well to fracture the formation in a first zone. After the initial zone is fractured, pumping
26 is stopped, and a plug is installed in the liner at a point above the fractured zone. Pumping
27 is resumed, and fluids are pumped into the well to fracture the formation in a second zone
28 located above the plug. That process is repeated for zones further up the formation until
29 the formation has been completely fractured.

30 Once the well is fractured, large quantities of water and sand that were injected into
31 the formation eventually must be allowed to flow out of the well. The water and sand will

1 be separated from hydrocarbons produced by the well to protect downstream equipment
2 from damage and corrosion. The production stream also may require additional processing
3 to neutralize corrosive agents in the stream.

4 Systems for successfully performing a fracturing operation, therefore, are extensive
5 and complex, as may be appreciated from **FIG. 1**. **FIG. 1** illustrates schematically a
6 common, conventional frac system. Water from tanks **1** and gelling agents dispensed by a
7 chemical unit **2** are mixed in a hydration unit **3**. The discharge from hydration unit **3**, along
8 with sand carried on conveyors **4** from sand tanks **5** is fed into a blending unit **6**. Blender
9 **6** mixes the gelled water and sand into a slurry. The slurry is discharged through low-
10 pressure hoses **7** which convey it into two or more low-pressure lines **8** in a frac manifold
11 **9**. The low-pressure lines **8** in frac manifold **9** feed the slurry to an array of pumps **10**,
12 perhaps as many as a dozen or more, through low-pressure “suction” hoses **11**.

13 Pumps **10** take the slurry and discharge it at high pressure through individual high-
14 pressure “discharge” lines **12** into two or more high-pressure lines or “missiles” **13** on frac
15 manifold **9**. Missiles **13** flow together, *i.e.*, they are manifolded on frac manifold **9**. Several
16 high-pressure flow lines **14** run from the manifolded missiles **13** to a “goat head” **15**. Goat
17 head **15** delivers the slurry into a “zipper” manifold **16** (also referred to by some as a “frac
18 manifold”). Zipper manifold **16** allows the slurry to be selectively diverted to, for example,
19 one of two well heads **17**. Once fracturing is complete, flow back from the fracturing
20 operation discharges into a flowback manifold **18** which leads into flowback tanks **19**.

21 Frac systems are viewed as having “low-pressure” and “high-pressure” sides or,
22 more simply, as having low sides and high sides. The low side includes the components
23 upstream of the inlet of pumps **10**, *e.g.*, water tanks **1**, hydration unit **3**, blending unit **6**,
24 and the low-pressure lines **8** of frac manifold **9**, which operate under relatively low
25 pressures. The high side includes all the components downstream of the discharge outlets
26 of pumps **10**, *e.g.*, the high-pressure missiles **13** of frac manifold **9** and flow lines **14**
27 running to goat head **15**, which operate under relatively high pressures.

28 The flow lines and units making up the high-side of a frac system, such as pump
29 discharge lines **12** and flow line **14**, typically are assembled from a large number of
30 individual components often referred to as “frac iron,” “flow iron,” or “ground iron.” Such
31 components include straight steel pipe, fittings for splitting, combining, or changing

1 direction of a line, gauges and other monitoring equipment, and valves and other control
2 devices. Flow iron components are fabricated from heavy, high tensile steel and are quite
3 rugged. They may be rated for high-pressure service up to 20,000 psi.

4 Because frac systems are required at a site for a relatively short period of time, frac
5 iron components often are joined by unions. Unions allow the components to be connected
6 ("made up") and disconnected ("broken down") relatively quickly. The three types of
7 unions commonly used in frac systems are hammer (or "Weco®") unions, clamp (or
8 "Greyloc®") unions, and flange unions. Though spoken of in terms that may imply they
9 are discreet components, unions are actually interconnected subassemblies of the
10 components joined by the union. A male sub will be on one component, and a mating
11 female sub will be on the other. The subs then will be connected to each other to provide
12 the union.

13 The optimal volume, pumping rate, and pumping schedule for a fracturing
14 operation will be determined in view of the physical properties of the formation, the depth
15 at which it will be fractured, and the fluid that will be pumped into the formation. Such
16 pumping regimens may vary considerably and, as noted above, typically proceeds in
17 multiple stages. Thus, fluid flow through the frac system is carefully controlled and
18 monitored throughout the operation.

19 Fluid is designed to flow through most of a frac system in only one direction:
20 towards the well. Once pumping is stopped, however, large quantities of slurry will flow
21 out of the well at rates and pressures at least initially comparable to those used to fracture
22 the well. Shut off valves will be installed in the system to divert that return flow into
23 recovery tanks and to protect upstream portions of the system. In particular, pumps must
24 be protected against back flow. Actuating shut off valves, however, may take some time.
25 Operators also may neglect to open or shut the appropriate valves. Thus, frac systems
26 commonly will incorporate various automatic check valves to ensure that fluid is able to
27 travel in only one direction through a particular part of the system.

28 The check valves in frac systems generally are "flapper" style check valves.
29 Flapper valves, as their name suggests, incorporate a pivoting flapper. The flapper
30 normally hangs down, under the influence of gravity, across the face of a seat provided in
31 the valve conduit. Fluid flowing through the valve conduit in the desired direction will

1 push against the flapper, causing it to swing up and allow fluids to pass through the valve.
2 Flow in the opposite, undesired direction, however, will cause the flapper to bear and seal
3 against the seat, shutting off back flow through the valve.

4 Flapper valves are better suited than other check valves, such as dart check valves,
5 for systems handling particulate laden, abrasive fluids such as frac fluids. Particulate
6 matter is less likely to interfere with the operation of flapper valves. Eventually, however,
7 the flapper and seat can become eroded such that the ability of the valve to check flow in
8 the opposite direction is impaired. Thus, many conventional flapper valves have designs
9 which allow the flapper and the seat to be replaced periodically. Such valves include what
10 may be referred to as inlet entry and top entry designs.

11 Inlet entry designs, such as Weco® flapper check valves available from FMC
12 Technologies, Inc, Houston, Texas, have a replaceable assembly that includes both the seat
13 and the flapper. The seat-flapper assembly is carried within the valve conduit. The
14 assembly may be accessed for replacement by disassembling a two-part valve body. Once
15 the inlet end of the valve body is removed, the seat-flapper assembly may be pulled out of
16 the outlet end, and a new assembly inserted. Necessarily, however, the valve must be
17 disassembled from the flow line in order to replace either the flapper or the seat.

18 Top entry designs have separate flappers and seats which may be accessed through
19 a service port. Examples of such top entry flapper valves include those available from
20 Tech-Seal International (TSI Flow Products), Houston, Texas, Weco top entry valves
21 available from FMC Technologies, and SPM® 1502 clapper valves available from S.P.M.
22 Flow Control, Inc., Fort Worth, Texas. In top entry valves, the valve body is a single
23 integral piece which is provided with a service port extending from the top of the valve
24 into the valve conduit. The service port is covered by a cap which can be removed to access
25 the flapper and seat. The seat, for example, may be carried in the inlet end of the valve
26 conduit. The flapper may be mounted on a bracket which rests on a shoulder in the service
27 port and is held there by the access cap.

28 A primary advantage of top entry valves is that the flapper and seat may be replaced
29 without removing the valve from a flow line. A disadvantage lies in the installation of the
30 seat. The seat must be installed securely so that it is not displaced as fluid flows through
31 the valve. Threaded seats are difficult to align with the flapper, and so typically threaded

1 seats are provided with vertical seat faces. Pressure fitted seats may be difficult to install
2 and remove. With both approaches, special tools may be required.

3 Flapper valves, like other flow iron components, are fabricated from steel and are
4 quite rugged. Nevertheless, they can suffer shortened service life or failure due to the harsh
5 conditions to which they are exposed. Not only are fluids pumped through the system at
6 very high pressure and flow rates, but the fluid is abrasive and corrosive. Components may
7 suffer relatively rapid erosion. Any failure of flapper valves on site may interrupt
8 fracturing, potentially reducing its effectiveness and inevitably increasing the amount of
9 time required to complete the operation.

10 Frac jobs also have become more extensive, both in terms of the pressures required
11 to fracture a formation and the time required to complete all stages of an operation. Prior
12 to horizontal drilling, a typical vertical well might require fracturing in only one, two or
13 three zones at pressures usually well below 10,000 psi. Fracturing a horizontal well,
14 however, may require fracturing in 20 or more zones. Horizontal wells in shale formations
15 such as the Eagle Ford shale in South Texas typically require fracturing pressures of at
16 least 9,000 psi and 6 to 8 hours or more of pumping. Horizontal wells in the Haynesville
17 shale in northeast Texas and northwest Louisiana require pressures around 13,500 psi.
18 Pumping may continue near continuously – at flow rates of 2 to 3 thousand gallons per
19 minute (gpm) – for several days before fracturing is complete.

20 A problem with all flapper valves derives from the fact that they necessarily require
21 an enlarged area within the passage to accommodate installation and operation of the seat
22 and flapper. That is especially true for inlet entry designs. The enlarged portion of the
23 passage in turn cause turbulence in fluids flowing through the valve. Turbulence in the
24 valve not only creates pressure losses in the flowline, but can dramatically increase the rate
25 of erosion in the valve, especially when the fluids are laden with abrasive particulates. The
26 seat and flapper in particular are highly exposed to turbulence in the valve and its attendant
27 erosion.

28 The statements in this section are intended to provide background information
29 related to the invention disclosed and claimed herein. Such information may or may not
30 constitute prior art. It will be appreciated from the foregoing, however, that there remains
31 a need for new and improved pressure release valves and methods for protecting high-

1 pressure flowlines from excessive pressure. Such disadvantages and others inherent in the
2 prior art are addressed by various aspects and embodiments of the subject invention.

3 SUMMARY OF THE INVENTION

4 The subject invention, in its various aspects and embodiments, relates generally to
5 flapper check valves and encompasses various embodiments and aspects, some of which
6 are specifically described and illustrated herein. One broad aspect of the invention
7 provides for a flapper valve for fluid transportation systems. The flapper valve comprises
8 a body adapted for assembly into the system. The body comprises a first sub, such as an
9 inlet sub, and a second sub, such as an outlet sub, which are removably assembled to each
10 other. A passage is defined in the body. The body extends through the first and second
11 subs and is adapted to conduct fluids transported through the system. A seat is removably
12 mounted in the passage. The seat is accessible by disassembling the first sub and the
13 second sub. The valve also comprises a service port. A cap removably closes the service
14 port. A flapper is removably mounted within the service port for pivoting movement
15 between a closed position and an open position. In the closed position, the flapper bears
16 on the seat and shuts off back flow through the passage. In the open position, the flapper
17 is pivoted away from the seat and allows fluid flow through the valve. The flapper is
18 accessible by removing the cap from the service port.

19 Other embodiments provide flapper valves where the body is adapted for assembly
20 into the system by hammer unions or by other conventional unions.

21 In other embodiments, the first sub of the flapper valve comprises a flange. The
22 flange has a plurality of holes adapted to accommodate threaded connectors and the first
23 sub is assembled to the second sub by threaded connectors extending through the holes.

24 Yet other embodiments include such flapper valves where the passage is
25 substantially cylindrical.

26 In other aspects and embodiments, the invention provides flapper valves where the
27 seat is provided on an insert slidably received in the passage, where the insert is received
28 in the second sub, where the insert is captured in the passage between the first sub and the
29 second sub, where the insert is restricted from rotating within the passage, and/or the insert
30 is restricted from rotating within the passage by a pin extending between the insert and the
31 first sub.

1 Other embodiments provide such flapper valves where the seat is angled off vertical
2 or the seat is provided on a beveled surface of the insert.

3 Still other embodiments provide flapper valves where the cap has a skirt depending
4 therefrom and extending downward into the port and the skirt defines a blind chamber
5 within the cap. In other embodiments, the flapper valves comprise a filler body disposed
6 within the chamber in the cap. Additional embodiments provide such flapper valves where
7 clearances are provided between the filler body and the skirt.

8 The subject invention in other aspects and embodiments provide flapper valves
9 where the flapper is pivotally connected to a bracket. The bracket is mounted on an upward
10 facing lip provided in the service port and is held thereon by the cap. Other embodiments
11 provide such flapper valves where the flapper is pivotally connected to the bracket by a pin
12 extending through a plurality of knuckles provide on the bracket and the flapper or where
13 the knuckles extend substantially continuously along the length of the pin.

14 Still other embodiments provide flapper valves where the service port comprises a
15 lip adapted to receive the bracket. The lip defines an opening having a rectilinear end and
16 an arcuate end approximating the periphery of the flapper.

17 In other aspects and embodiments, the invention provides for flapper valves for
18 fluid transportation systems which comprise a body adapted for assembly into the system.
19 A passage is defined in the body. The passage is adapted to conduct fluids transported
20 through the system. The valve also comprises a service port. A cap removably closes the
21 port. The cap has a skirt depending therefrom and extending downward into the service
22 port. The skirt defines a blind chamber within the cap. A filler body is disposed within
23 the chamber in the cap.

24 Other embodiments provide such flapper valves where the filler body occupies
25 substantially the entire volume of the chamber or where clearances are provided between
26 the filler body and the chamber, the clearances allowing the cap to be energized by fluid
27 flowing through the valve.

28 In additional aspects, the novel flapper valves incorporate various combinations of
29 such features as will be apparent to workers in the art.

30

85843656

1 Still other embodiments of the invention provide for flow lines for a high-pressure
2 fluid transportation system. The flow lines comprise the novel flapper valves. Additional
3 embodiments provide high-pressure fluid transportation systems which comprise the novel
4 flow lines, including systems for fracturing a well.

5 The invention also provides embodiments directed to methods for controlling flow
6 through a fluid transportation system which comprise a flow line. The method comprises
7 providing the flow line with a novel flapper valve and transporting fluid through the flow line.

8 According to some embodiments of the invention, there is provided a flapper valve
9 for fluid transportation systems, said flapper valve comprising: (a) a body adapted for assembly
10 into said system, said body comprising a first sub and a second sub removably assembled to each
11 other; (b) a passage defined in said body and extending through said first and second subs, said
12 passage being adapted to conduct fluids transported through said system; (c) a seat removably
13 mounted in said passage, said seat being accessible by disassembling said first sub and said
14 second sub; (d) a service port and a cap removably closing said port; (e) a flapper removably
15 mounted within said service port for pivoting movement between a closed position, in which said
16 flapper bears on said seat and shuts off back flow through said passage, and an open position, in
17 which said flapper is pivoted away from said seat and allows fluid flow through said valve; said
18 flapper being accessible by removing said cap from said service port.

19 According to some embodiments of the invention, there is provided a flapper valve
20 for fluid transportation systems, said flapper valve comprising: (a) a valve body adapted for
21 assembly into said system; (b) a passage defined in said body adapted to conduct fluids
22 transported through said system; (c) a seat; (d) a flapper mounted for pivoting movement between
23 a closed position, in which said flapper bears on said seat and shuts off back flow through said
24 passage, and an open position, in which said flapper is pivoted away from said seat and allows
25 fluid flow through said valve; (e) a service port and a cap removably closing said port, said cap
26 having a skirt depending therefrom and extending downward into said port, said skirt defining a
27 blind chamber within said cap, said cap having a continuous inner surface enclosing said blind
28 chamber; (f) a filler body disposed within said chamber in said cap and occupying substantially
29 the entire volume of said chamber, wherein clearances are provided between said filler body and
30 said chamber, said clearances allowing said cap skirt to be energized radially outward by fluid
31 flowing through said valve.

85843656

1 Finally, still other aspects and embodiments of the invention provide apparatus and
2 methods having various combinations of such features as will be apparent to workers in the
3 art.

4 Thus, the present invention in its various aspects and embodiments comprises a
5 combination of features and characteristics that are directed to overcoming various
6 shortcomings of the prior art. The various features and characteristics described above, as well
7 as other features and characteristics, will be readily apparent to those skilled in the art upon
8 reading the following detailed description of the preferred embodiments and by reference to
9 the appended drawings.

10 Since the description and drawings that follow are directed to particular
11 embodiments, however, they shall not be understood as limiting the scope of the invention.
12 They are included to provide a better understanding of the invention and the manner in which
13 it may be practiced. The subject invention encompasses other embodiments consistent with
14 the claims set forth herein.

15 BRIEF DESCRIPTION OF THE DRAWINGS

16 **FIGURE 1** (prior art) is a schematic view of a system for fracturing a well and
17 receiving flowback from the well, which system includes various high-pressure flow lines,
18 such as flow lines **12** and **14**.

19 **FIG. 2** is an isometric, axial cross-sectional view of a first preferred embodiment **20**
20 of the flapper valves of the subjection invention taken generally above, in front of, and from
21 one side of flapper valve **20**. Flapper valve **20** is shown oriented as it would be if installed, for
22 example, in a fluid transportation system such as the fracturing system shown in **FIG. 1**.

23 Flapper **73** in its normal, "closed" position.

85843656

1 **FIG. 3** is an axial, side cross-sectional view of flapper valve **20** shown in **FIG. 2**,
2 again showing flapper valve **20** in its installed orientation.

3 **FIG. 4** is a transverse cross-sectional view of flapper valve **20** taken along line 4-4
4 of **FIG. 3**.

5 **FIG. 5** is an isometric, axial cross-sectional view of flapper valve **20** taken
6 generally from below valve **20** and in which flapper **73** is shown in its pivotally upward,
7 “open” position.

8 **FIG. 6** is an axial cross-sectional view of flapper valve **20** taken below valve **20** in
9 which flapper **73** is in its pivotally upward, open position.

10 **FIG. 7** is a top view of valve **20** in which cap **26** and bracket **72** have been removed
11 to reveal details of service port **23**.

12 **FIG. 8** is an isometric view, taken generally from below, of a flapper assembly **73**
13 which is incorporated into flapper valve **20**.

14 **FIG. 9** is an isometric view of seat insert **81** which is incorporated into flapper
15 valve **20**.

16 In the drawings and description that follows, like parts are identified by the same
17 reference numerals. The drawing figures are not necessarily to scale. Certain features of
18 the embodiments may be shown exaggerated in scale or in somewhat schematic form and
19 some details of conventional design and construction may not be shown in the interest of
20 clarity and conciseness.

21 **DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS**

22 The subject invention, in various aspects and embodiments, is directed generally to
23 flapper valves for flowlines, and especially for high-pressure flowlines. Specific
24 embodiments will be described below. For the sake of conciseness, however, all features
25 of an actual implementation may not be described or illustrated. In developing any actual
26 implementation, as in any engineering or design project, numerous implementation-
27 specific decisions must be made to achieve a developers' specific goals. Decisions usually
28 will be made consistent within system-related and business-related constraints, and specific
29 goals may vary from one implementation to another. Development efforts might be
30 complex and time consuming and may involve many aspects of design, fabrication, and

1 manufacture. Nevertheless, it should be appreciated that such development projects would
2 be a routine effort for those of ordinary skill having the benefit of this disclosure.

3 Broad embodiments of the novel valves are directed to valves which may be used
4 in fluid transportation systems. They comprise a body which is adapted for assembly into
5 a flow line and comprises two subs which may be assembled and disassembled. A
6 replaceable seat may be accessed by disassembling the body subs. A replaceable flapper
7 assembly may be accessed through a service port. Other broad embodiments include
8 flapper valves where the service port is covered by a removeable cap. The cap has a skirt
9 extending downward into the service port. A filler body is mounted within the skirt. It is
10 believed that the novel flapper valves will offer longer service life and may be rebuilt more
11 easily.

12 The novel flapper valves may be used in a variety of systems. They are particularly
13 useful in high pressure flow lines as are common in chemical and other industrial plants,
14 on marine dredging vessels, strip mines, and especially in the oil and gas industry. Certain
15 embodiments are particularly well suited as components of temporary pipe and flow line
16 installations. Hydraulic fracturing systems, such as those shown in **FIG. 1**, are a very
17 common application where flapper valves are a practical necessity. They may be
18 assembled into portions of the high-pressure side of a frac system where fluid is intended
19 to flow only in one direction. The novel flapper valves readily allow flow in the desired
20 direction. If downstream conditions otherwise would induce back flow through the system,
21 however, the novel valves will automatically shut off and substantially preclude back flow
22 through the system.

23 For example, the novel flapper valves may be assembled at point **A** into the high-
24 pressure flow line running from goat head **15** to zipper manifold **16** in the frac system
25 shown in **FIG. 1**. Flow at point **A** is intended to go in only one direction: from goat head
26 **15** into zipper manifold **16**. In the absence of a flapper valve, back flow through the flow
27 line may damage pumps **10**.

28 A preferred flapper valve **20** is shown in greater detail in **FIGS. 2-9**. As shown
29 therein, valve **20** generally comprises a valve body **21** which is assembled from an inlet
30 sub **24** and an outlet sub **25**. Valve body **21** defines a central passage **22** and a service port
31 **23**. Service port **23** is closed by a removable cap **26**. Valve body **21** also provides a

85843656

1 housing for various internal components of valve **20**, including a replaceable flapper
2 assembly **71** and a replaceable seat insert **81**. As described further below, flapper assembly
3 **71** will allow flow in only one direction through passage **22** and valve **20**. Flapper
4 assembly **71** can be accessed and replaced through service port **23** by removing cap **26**.
5 Seat insert **81** can be accessed and replaced by disassembling inlet sub **24** and outlet sub
6 **25**.

7 Flapper valve **20** is adapted for assembly into flow lines of systems such as the
8 frac system shown in **FIG. 1**. Thus, flapper valve **20** is provided with hammer union ends
9 which will allow it to be quickly and easily made up or broken down from the system.
10 More particularly, a female hammer union sub or end **41** is provided at the outer end of
11 inlet sub **24**. Female end **41** has external threads **42**, an elastomeric seal **43**, and an annular
12 bearing surface **44**. A male hammer union sub or end **51** is provided at the outer end of
13 outlet sub **25**. Male end **51** has an internally threaded annular lug nut **52**, which is mounted
14 thereon via a plurality of retainer segments **53**, and an annular bearing surface **54**. Female
15 end **41** and male end **51** allow flapper valve **20** to be made up and broken down from flow
16 lines via hammer unions with other flowline components.

17 The design and configuration of such hammer unions are well known in the art and
18 will not be further described herein. Suffice it to say, however, that any conventional
19 hammer union design may be incorporated into the novel valves. Valves may be provided
20 with male ends on the inlet and female ends on the outlet, or with either male or female
21 ends on both the inlet and outlet. Likewise, the valves may be provided with ends that
22 allow them to be made up and broken down by conventional clamp or flange unions, by
23 threaded connections, or by any other conventional assembly methods.

24 As its name implies, valve body **21** comprises the major structural portion of flapper
25 valve **20** and defines many of its primary features. In particular, central passage **22**
26 provides a conduit for fluids conveyed through valve **20** and the flow line into which it is
27 assembled. Central passage **22** has a generally cylindrical shape and extends from an inlet
28 **45** on inlet sub **24** to an outlet **55** on outlet sub **25**. It has a substantially smooth and uniform
29 inner surface for much of its extent. Ideally, it would be smooth and uniform along its
30 entire length. Passage **22**, however, is enlarged somewhat in the central portion of valve

1 **20** to provide room for flapper assembly **71** to function. That enlarged portion of passage
2 **22** may be referred to as flapper chamber **27**.

3 Flapper assembly **71**, as best seen in **FIG. 8**, comprises a bracket **72**, a flapper **73**,
4 and a pin **74**. Bracket **72** has a relatively thin, substantially annular base **75** which is
5 provided with a pair of hinge knuckles **76**. Flapper **73** is a somewhat thick, generally disc
6 shaped closure member **77** with a knuckle **78** extending rectilinearly from one side thereof.
7 Pin **74** extends through cylindrical openings in knuckles **76** and **78**. Flapper **73** is able to
8 pivot about pin **74** to automatically open or close valve **20**.

9 As seen best in **FIG. 9**, seat insert **81** is a generally open, relatively short
10 cylindrically shaped component. The inner surface of insert **81** preferably is substantially
11 smooth, continuous, and lacking in internal profiles. Its internal diameter, as appreciated
12 from **FIGS. 2-3**, is sized to approximate the internal diameter of passage **22** as it extends
13 through inlet sub **24** and the male end **51** of outlet sub **25**. The inner end of insert **81** is
14 beveled to provide a substantially flat, angled seating surface **82**.

15 Flapper valve **20** is designed to allow flow in only one direction: into inlet **45** and
16 outlet **55**. It will automatically shut off back flow, *i.e.*, flow from outlet **55** toward inlet
17 **45**. The manner in which it does so may be appreciated by first referencing, for example,
18 **FIGS. 2-3**. Those figures show valve **20** as it would be oriented for assembly into a flow
19 line. That is, service port **23** and cap **26** are on top of valve **20**. Flapper **73** will hang down
20 on pin **74** into flapper chamber **27** under the influence of gravity. The relative location of
21 flapper pin **74** and insert **81** is such that seat **82** extends through and beyond the center of
22 gravity of flapper **73**. Insert **81** also is oriented such that seat **82** is normal to a vertical
23 plane through passage **22**, but at a slight angle off of vertical. Flapper closure **77**, therefore,
24 will tend to rest on seat **82**.

25 In this “normal” or “shut” position, fluid entering outlet **55** of valve **20** will cause
26 closure **77** of flapper **73** to bear against seat **82** of insert **81**, thus shutting off back flow
27 through valve **20**. Fluid flowing into valve **20** through inlet **45**, however, will cause flapper
28 **73** to pivot up through chamber **27** toward bracket **72**, allowing fluid to flow through valve
29 **20**.

30 Flapper assembly **71**, as noted above, may be removed without any special tools
31 and can be accessed and replaced through service port **23**. Service port **23** extends through

1 an upward extension on valve body **21** and is has a run of inner threads, such as ACME
2 threads, along its upper portion. Cap **26** is provided with corresponding outer threads such
3 that cap **26** may be threaded into and out of service port **23**. A pressure seal preferably is
4 provided between cap **26** and service port **23** to ensure that cap **26** provides a leak-proof
5 closure for service port **23**. For example, elastomeric o-rings and backup rings may be
6 provided in a groove extending around the outer surface at the lower end of cap **26**. Seals
7 also may be provided at the top of cap **23** to protect the threads from dirt. Service port **23**
8 is not intended to conduct fluids out of valve **20**, and is instead provided to allow access to
9 flapper assembly **71**.

10 Flapper assembly **71** is removably mounted within service port **23**. For example,
11 service port **23** is provided with a ledge or lip **31** which extends radially inward at the lower
12 end of port **23**. Base **75** of bracket **72** rests on lip **31** and is held there by cap **26**, the lower
13 end of which will bear on base **75** when cap **26** is threaded fully into port **23**. Lip **31** also
14 defines an opening which can accommodate flapper **73** when it has pivoted up into its
15 “open” position. The opening, as best seen in **FIG. 7**, is rectilinear at one end and arcuate
16 at the other. The arcuate end will closely accommodate the end of flapper **73** in its upward,
17 open position. The opening defined by lip **31**, and service port **23**, however, are sized such
18 that flapper assembly may be easily installed and removed simply by removing cap **26**.

19 Flapper assembly **71** and its components **72/73/74** have simple designs which allow
20 flapper assembly **71** to perform efficiently and reliably. They may be mounted simply and
21 easily in valve **20**, and have other advantages discussed elsewhere herein. The invention,
22 however, is not limited to the specific designs of flapper **73** or flapper assembly **71**
23 illustrated herein, or the specific way in which those components are mounted within
24 service port **23**. A variety of designs are known and may be adapted for use in the novel
25 valves.

26 As noted above, seat insert **81** can be accessed and replaced by disassembling inlet
27 sub **24** and outlet sub **25**. Thus, for example, inlet sub **24** is provided with an annular flange
28 **46** and an annular boss **47**. Annular flange **46** extends around a midportion of inlet sub **24**.
29 Annular boss **47** extends inward from flange **46** at the inner end of inlet sub **24**. Thus, inlet
30 sub **24** may be joined to outlet sub **25** by inserting annular boss **47** on inlet sub **24** into an
31 enlarged diameter portion of passage **22** in outlet sub **25**. A pressure seal preferably is

1 provided between boss 47 and passage 22, for example, by mounting elastomeric o-rings
2 and backup rings in a groove extending around the outer surface of annular boss 47.

3 Inlet sub 24 then may be secured to outlet sub 25, for example, by threaded bolts
4 48 which extend through openings in flange 46 and into threaded openings (not shown) in
5 the inner end of outlet sub 25. Alternately, outlet sub 25 may be provided with standing
6 bolts and inlet sub 24 secured by nuts. Inlet sub 24 also may be threaded into outlet sub
7 25, or vice versa. Other conventional means may be used to assemble inlet sub 25 and
8 outlet sub 26 such that they may be disassembled.

9 Seat insert 81 is removably mounted in the enlarged portion of passage 22 at the
10 inner end of outlet sub 25. More particularly, as will be appreciated from FIGS. 2-3, insert
11 81 may be slid into the enlarged portion of passage 22 which opens at the inner end of
12 outlet sub 25. A pressure seal preferably is provided between insert 81 and passage 22, for
13 example, by mounting elastomeric o-rings and backup rings in a groove extending around
14 the outer surface of insert 81.

15 As best seen in FIGS. 2-3 and 9, the outer surface of seat insert 81 has a reduced
16 diameter inner portion which defines an inward facing shoulder 84. When inserted into
17 passage 22, inward facing shoulder 84 on insert 81 will abut and bear on a corresponding,
18 outward facing shoulder provided in passage 22. Annular boss 47 on inlet sub 24 will bear
19 on the outer end of insert 81, such that insert 81 will be securely mounted in valve 20 when
20 inlet sub 24 is assembled to outlet sub 25. In essence, insert 81 is captured between inlet
21 sub 24 and outlet sub 25. More specifically, the enlarged outer diameter portion of insert
22 81 is captured between annular boss 47 and the outward facing shoulder in passage 22.
23 Though not readily apparent in the figures, the extension of annular boss 47 is such that a
24 clearance will be maintained between the inner surface of flange 46 and the inner end of
25 outlet sub 25, thus ensuring that annular boss 47 will bear on insert 81.

26 Preferably, insert 81 will fit closely with passage 22, but loosely enough to allow
27 insert 81 to be inserted and removed from passage 22 by hand and without the need for
28 special tools. A pin 83 extending into corresponding holes in insert 81 and inlet sub 24
29 preferably is provided to ensure proper alignment of insert 81 with flapper 73. Other
30 alignment means, such as keys and grooves, however, may be provided.

1 In the event that seat **82** on insert **81** is unacceptably compromised by erosion, inlet
2 end **24** may be disassembled from outlet end **25** to allow replacement of seat insert **81**.
3 Insert **81** preferably will be removeable by hand without the need for special tools. If
4 desired, however, other conventional means of mounting a seat within the inlet portion of
5 the valve passage may be provided, such as threading an insert into, or pressure fitting it
6 with the passage.

7 Cap **26** preferably provides self-energizing seals with service port **23**. That is, cap
8 **26** has what may be viewed as an annular skirt **61** which depends from the upper portion
9 of cap **26**. When cap **26** is threaded into service port **23**, skirt **61** of cap **26** will extend
10 through the lower portion of service port **23** and bear on flapper bracket **72**. Skirt **61** defines
11 a blind chamber within cap **26**. A filler body **62** is disposed therein. Preferably, filler **62**
12 substantially occupies the entire volume of the blind chamber within cap **26** such that
13 together with cap **26**, there is substantially no open space above flapper assembly **71**. Filler
14 **62** also fits closely within the chamber in cap **26** so as to substantially preclude circulation
15 of fluid in the chamber. At the same time, clearances preferably are provided between
16 filler **62** and skirt **61** and the rest of cap **26** so that some small amounts of fluid are able to
17 enter the clearances to energize cap **26**. Filler **62** preferably is provided with a passage **63**
18 to facilitate ingress of fluids and, given the tight clearances, to facilitate insertion of filler
19 **62** into the chamber. When assembled, filler **62** necessarily will be held securely in place,
20 but adhesives and the like may be used to hold filler **62** in place when cap **26** is removed
21 from valve **20**.

22 It will be appreciated that in conventional valves having caps similar to cap **26**, but
23 lacking a filler body such as filler **62**, fluid is able to freely circulate within the chamber in
24 the cap. By allowing fluid into the chamber, the cap will be energized. That is, hydraulic
25 pressure will be applied radially outward onto the skirt, thus enhancing the seal between
26 the cap and the service port. On the other hand, by allowing fluid to circulate within the
27 cap, turbulence in the valve is greatly increased. In contrast, by providing a closely fitting
28 filler body, such as filler **62**, embodiments of the novel valves obtain the benefits of a self-
29 energizing cap without the detrimental effects of increased turbulence.

30 It also will be appreciated that embodiments of the novel valves are able to
31 minimize the volume of the enlarged flapper chamber with the valves while providing

85843656

1 important additional benefits. For example, mounting seat insert **81** within passage **22** and
2 accessing it by disassembling inlet sub **24** allows seat insert **81** to be mounted in such as
3 fashion as will allow for easy installation without the need for any special tools. Because
4 flapper assembly **71** is still accessed through service port **23**, however, flapper chamber **27**
5 need not be as large as with conventional inlet entry designs. Minimizing the size of flapper
6 chamber **27**, other factors being equal, will tend to reduce turbulence through valve **20** and
7 attendant erosion.

8 Valve **20** is provided with other features which help to reduce turbulence or
9 otherwise reduce erosion. The portion of passage **22** extending through inlet sub **24** and
10 the smooth, continuous inner surface of seat insert **81** provides a relatively long conduit
11 which will encourage more laminar flow into valve **20**. As seen best in **FIGS. 5-6**, when
12 flapper **73** is in its up or open position, the opening defined by lip **31** in service port **23** will
13 closely accommodate a substantial portion, approximately half of the circumference of
14 flapper **73**. That will not only protect flapper **73** from erosive flow, but it will help
15 minimize turbulence through chamber **27**. It also will be noted that knuckles **76** and **78** on,
16 respectively, bracket **72** and flapper **73** more or less abut end-to-end such that pin **74** is
17 substantially enclosed therein and protected from fluid flow.

18 In general, the various components of the novel unions may be fabricated by
19 methods and from materials commonly used in manufacturing flowline components.
20 Given the extreme stress and the corrosive and abrasive fluids to which flowline
21 components are exposed, especially those designed for high-pressure flow lines, suitable
22 materials will be hard and strong. For example, excepting their seals, the components of
23 novel pressure relieve valves may be fabricated from 4130 and 4140 chromoly steel or
24 from somewhat harder, stronger steel such as 4130M7, high end nickel alloys, and stainless
25 steel. The flapper assembly and seat inserts preferably will be fabricated from stainless
26 steel or the other harder steels. The components may be made by any number of
27 conventional techniques, but typically and in large part will be made by forging, extruding,
28 or mold casting a blank part and then machining the required features into the part.

29 A suitable filler body may be made of any relatively durable material. It may be
30 made of steel, for example, but typically it will be made from less dense materials so as to
31 reduce the overall weight of the valve. Hard plastics, such as polypropylene,

1 polycarbonates, and Nylon 6, Nylon 66, and other polyamides, may be used. Hard rubbers,
2 such as butadiene rubbers and ebonite also may be used. In addition, coatings or coverings
3 may be applied to the flapper to protect it from erosion. For example, it may be provided
4 with a rubber covering, such as carboxylated nitrile butadiene rubber (XNBR) or urethane
5 rubber.

6 The novel valves also have been illustrated as assembled from various components.
7 For example, valve body **21** is assembled from inlet sub **24** and outlet sub **25**. If desired,
8 however, additional subs may be used to assemble valve body **21**, for example, to facilitate
9 fabrication of the subs. Other embodiments may have an integral, one-piece valve body.
10 Similarly, some embodiments may employ other conventional cap designs to removably
11 close the service port, or they use the illustrated design without a filler body.

12 The novel valves also will incorporate various features of conventional valves and
13 connections. For example, flapper valves are quite heavy and, therefore, preferably
14 incorporate components which make it easier to handle and manipulate the valve. Valve
15 **20**, for example, is provided with a lifting eye **64** which is threaded into service port cap
16 **26**. The exemplified valves have been described as incorporating various seals and specific
17 unions. Other conventional features, however, may be incorporated into the novel valves
18 as will be readily appreciated by workers in the art having the benefit of this disclosure.

19 Similarly, the novel valves have been described in the context of frac systems.
20 While frac systems in particular and the oil and gas industry in general rely on flapper
21 valves, especially in high-pressure applications, the novel valves are not limited to such
22 applications or industries. Likewise, they are not limited in their application to the specific,
23 exemplified tap lines or to the mentioned pressure ratings. Suffice it to say that the novel
24 flapper valves have wide applicability wherever flapper valves have been conventionally
25 applied.

26 It also will be appreciated that the terms such as “upper,” “lower,” “inner,” and
27 “outer,” are made with reference to the orientation in which the novel valves are will be
28 when assembled into a flowline, for example, as illustrated in **FIG. 3**. The novel valves
29 necessarily will be installed with the central passage running substantially horizontally if
30 the flapper is to operate as intended.

1 While this invention has been disclosed and discussed primarily in terms of specific
2 embodiments thereof, it is not intended to be limited thereto. Other modifications and
3 embodiments will be apparent to the worker in the art.

4

5

85843656

CLAIMS:


1. A flapper valve for fluid transportation systems, said flapper valve comprising:
 - (a) a valve body adapted for assembly into said system, said body comprising a first sub and a second sub removably assembled to each other;
 - (b) a passage defined in said body and extending through said first and second subs, said passage being adapted to conduct fluids transported through said system;
 - (c) a seat removably mounted in said passage, said seat being accessible for replacement only by disassembling said first sub and said second sub;
 - (d) a service port and a cap removably closing said port;
 - (e) a flapper removably mounted within said service port for pivoting movement between a closed position, in which said flapper bears on said seat and shuts off back flow through said passage, and an open position, in which said flapper is pivoted away from said seat and allows fluid flow through said valve; said flapper being accessible for replacement only by removing said cap from said service port.
2. The flapper valve of claim 1, wherein said first sub comprises a flange comprising a plurality of holes adapted to accommodate threaded connectors and said first sub is assembled to said second sub by threaded connectors extending through said holes.
3. The flapper valve of claim 1 or 2, wherein said seat is provided on an insert slidably received in said passage.
4. The flapper valve of claim 3, wherein said insert is received in said second sub.
5. The flapper valve of claim 3 or 4, wherein said insert is captured in said passage between said first sub and said second sub.
6. The flapper valve of any one of claims 3 to 5, wherein said insert is restricted from rotating within said passage.
7. The flapper valve of claim 6, wherein said insert is restricted from rotating within said passage by a pin extending between said insert and said first sub.
8. The flapper valve of any one of claims 3 to 7, wherein said seat is provided on a beveled surface of said insert.

85843656

- 1 9. The flapper valve of any one of claims 1 to 8, wherein said cap has a skirt depending
2 therefrom and extending downward into said port, said skirt defining a blind chamber within
3 said cap.
- 4 10. The flapper valve of claim 9, wherein said valve comprises a filler body disposed within said
5 chamber in said cap.
- 6 11. The flapper valve of claim 10, wherein clearances are provided between said filler body and
7 said skirt.
- 8 12. The flapper valve of claim 10, wherein said filler body is adapted to substantially preclude
9 circulation of fluid in said chamber.
- 10 13. A flapper valve for fluid transportation systems, said flapper valve comprising:
11 (a) a valve body adapted for assembly into said system;
12 (b) a passage defined in said body adapted to conduct fluids transported through said system;
13 (c) a seat;
14 (d) a flapper mounted for pivoting movement between a closed position, in which said
15 flapper bears on said seat and shuts off back flow through said passage, and an open position,
16 in which said flapper is pivoted away from said seat and allows fluid flow through said valve;
17 (e) a service port and a cap removably closing said port, said cap having a skirt depending
18 therefrom and extending downward into said port, said skirt defining a blind chamber within
19 said cap, said cap having a continuous inner surface enclosing said blind chamber;
20 (f) a filler body disposed within said chamber in said cap and occupying substantially the
21 entire volume of said chamber, wherein clearances are provided between said filler body and
22 said chamber, said clearances allowing said cap skirt to be energized radially outward by
23 fluid flowing through said valve.
- 24 14. The flapper valve of claim 13, wherein said filler body comprises a passage to facilitate
25 ingress of fluids into said clearances.
- 26 15. A flow line for a high-pressure fluid transportation system, said flow line comprising the
27 flapper valve of any one of claims 1 to 14.
- 28 16. A high-pressure fluid transportation system, said system comprising the flow line of claim 15.
- 29 17. The system of claim 16, wherein said system is a system for fracturing a well.
- 30 18. A flow line for a high-pressure fluid transportation system for fracturing a well, said flow line
31 comprising the flapper valve of any one of claims 1 to 14.

85843656

- 1 19. A method for controlling flow through a fluid transportation system comprising a flow line,
- 2 wherein said method comprises:
- 3 (a) providing a flapper valve of any one of claims 1 to 14 in said flow line; and
- 4 (b) transporting fluid through said flow line.

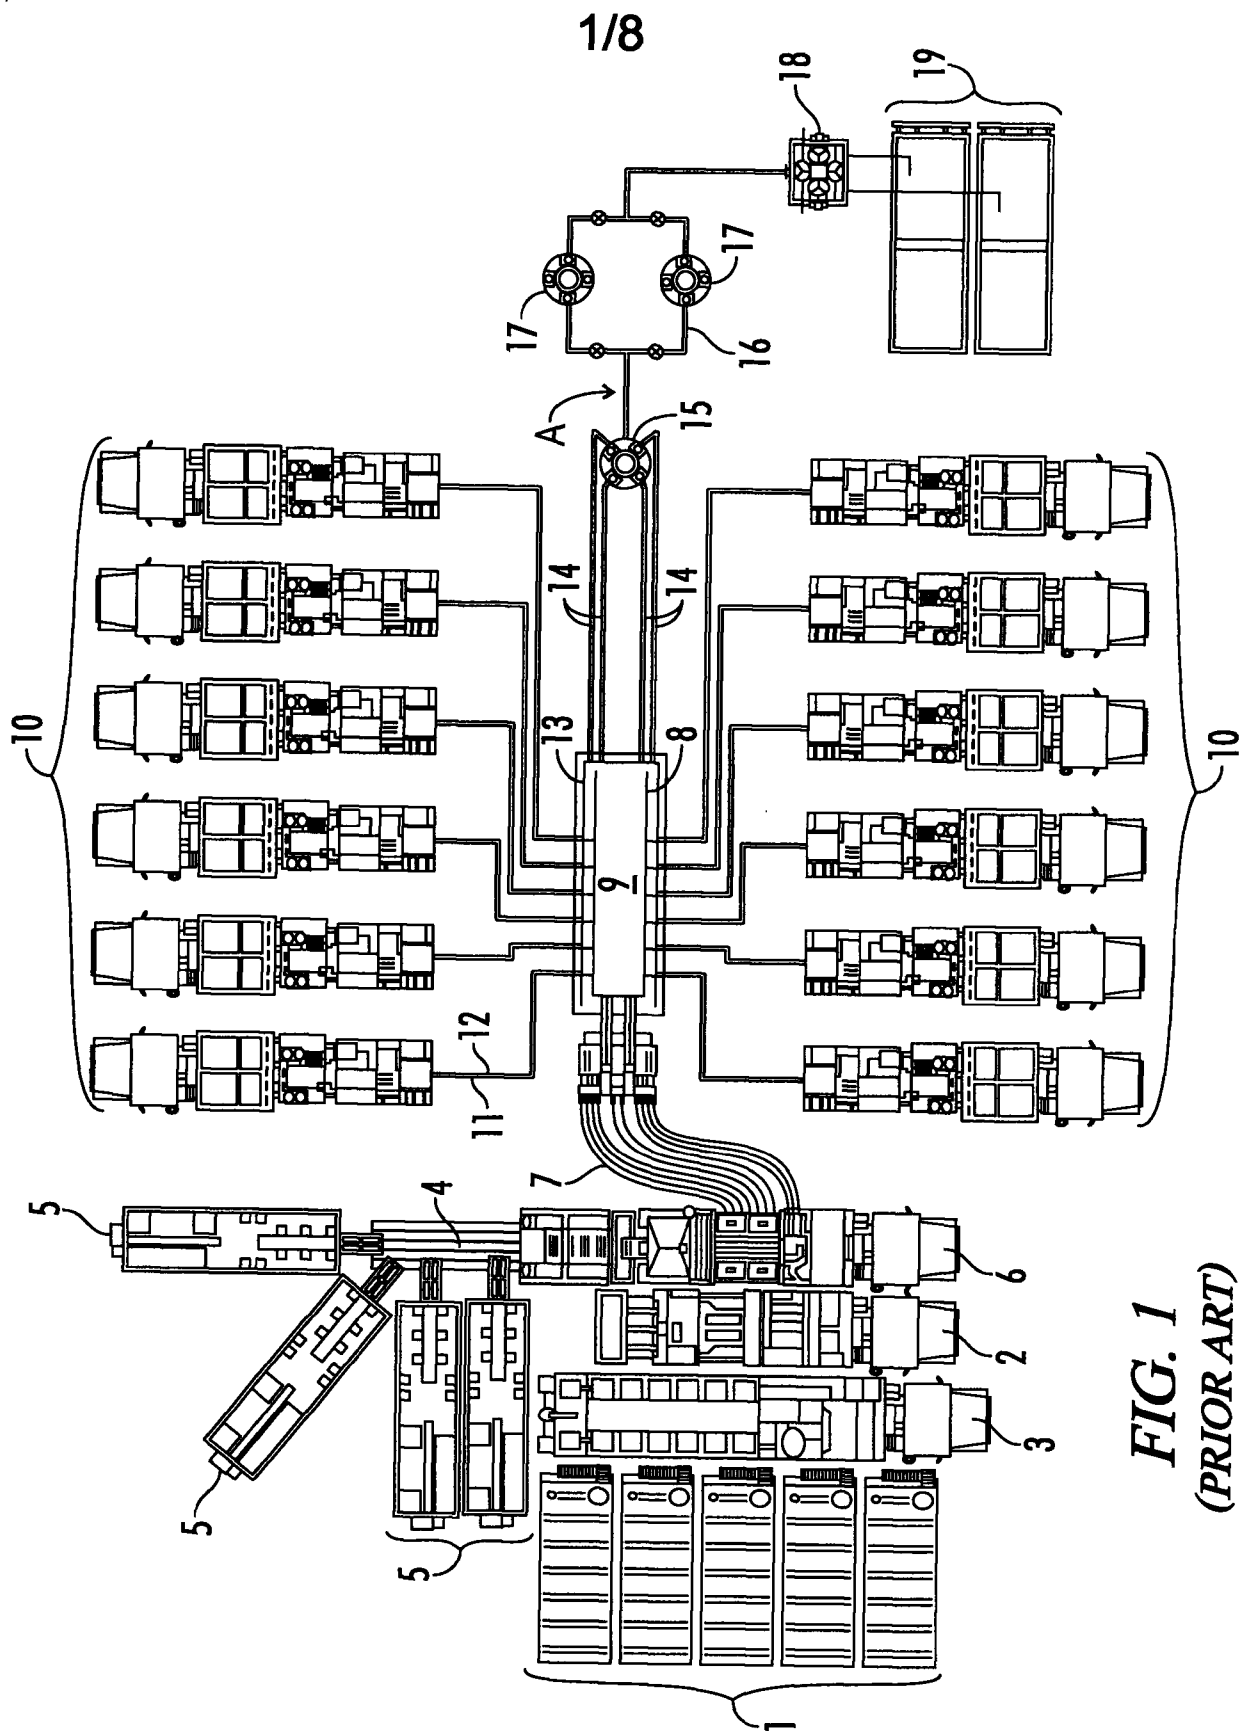

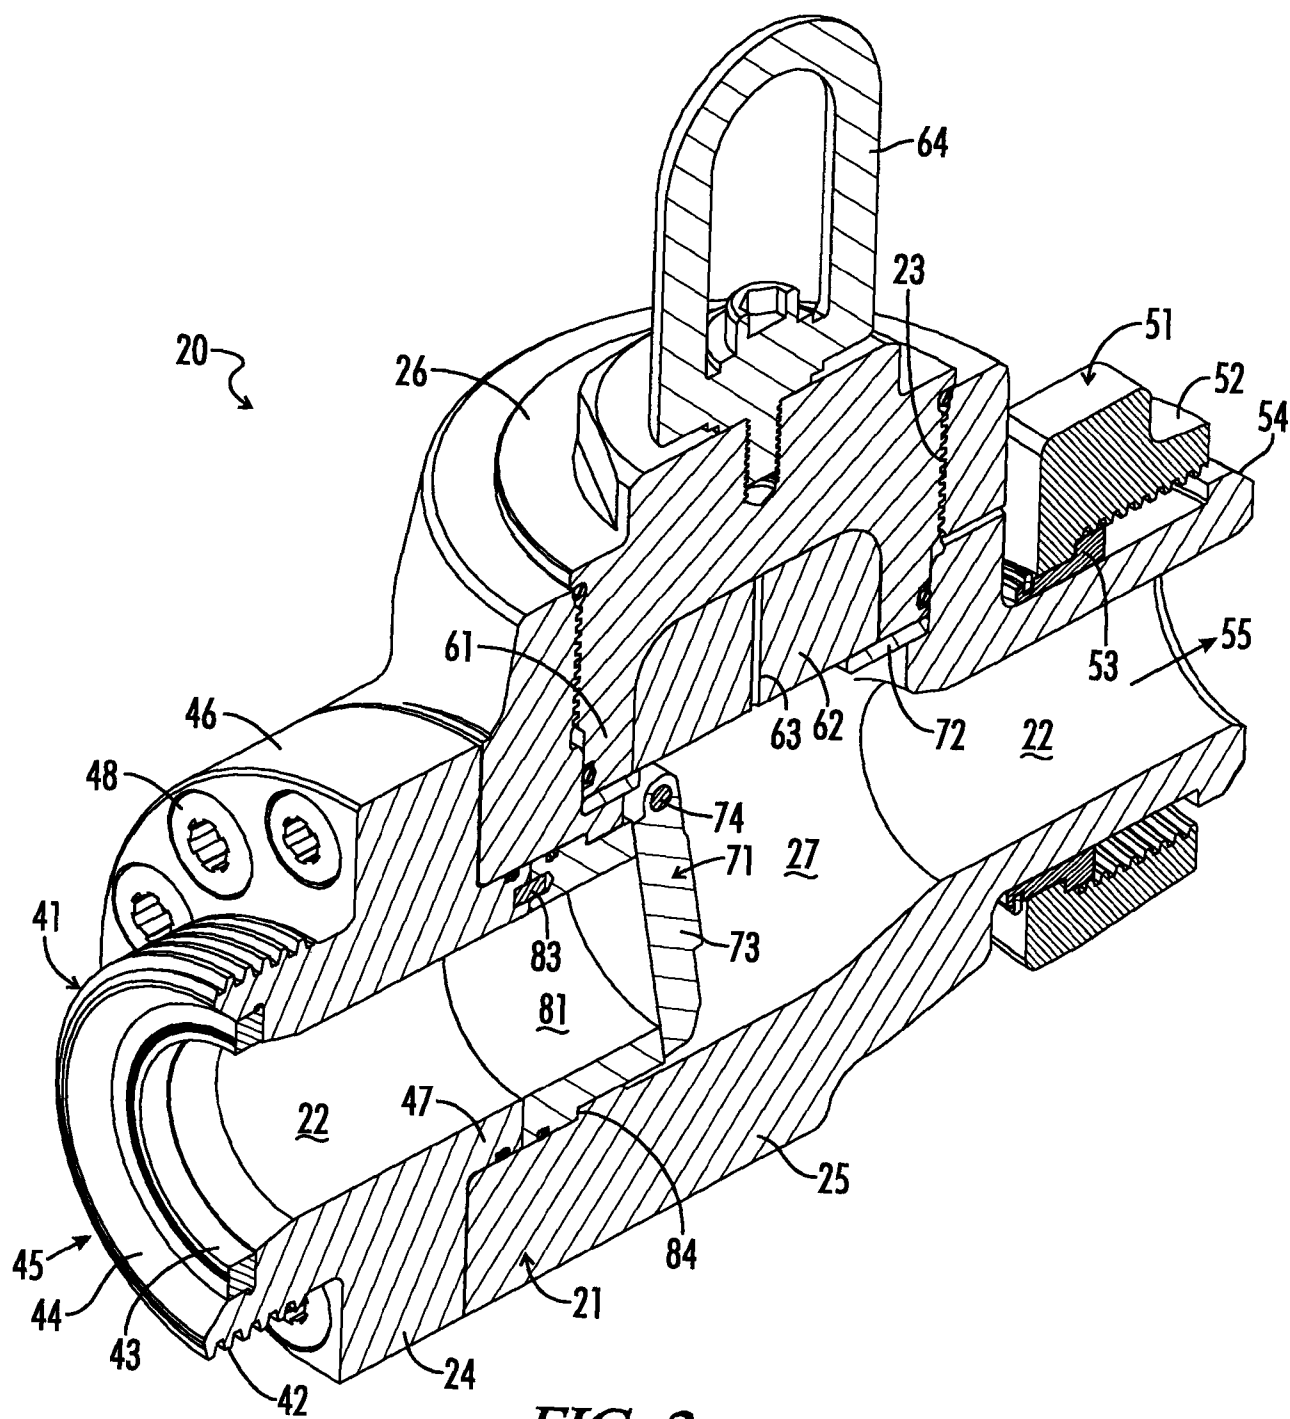


FIG. 2

3/8

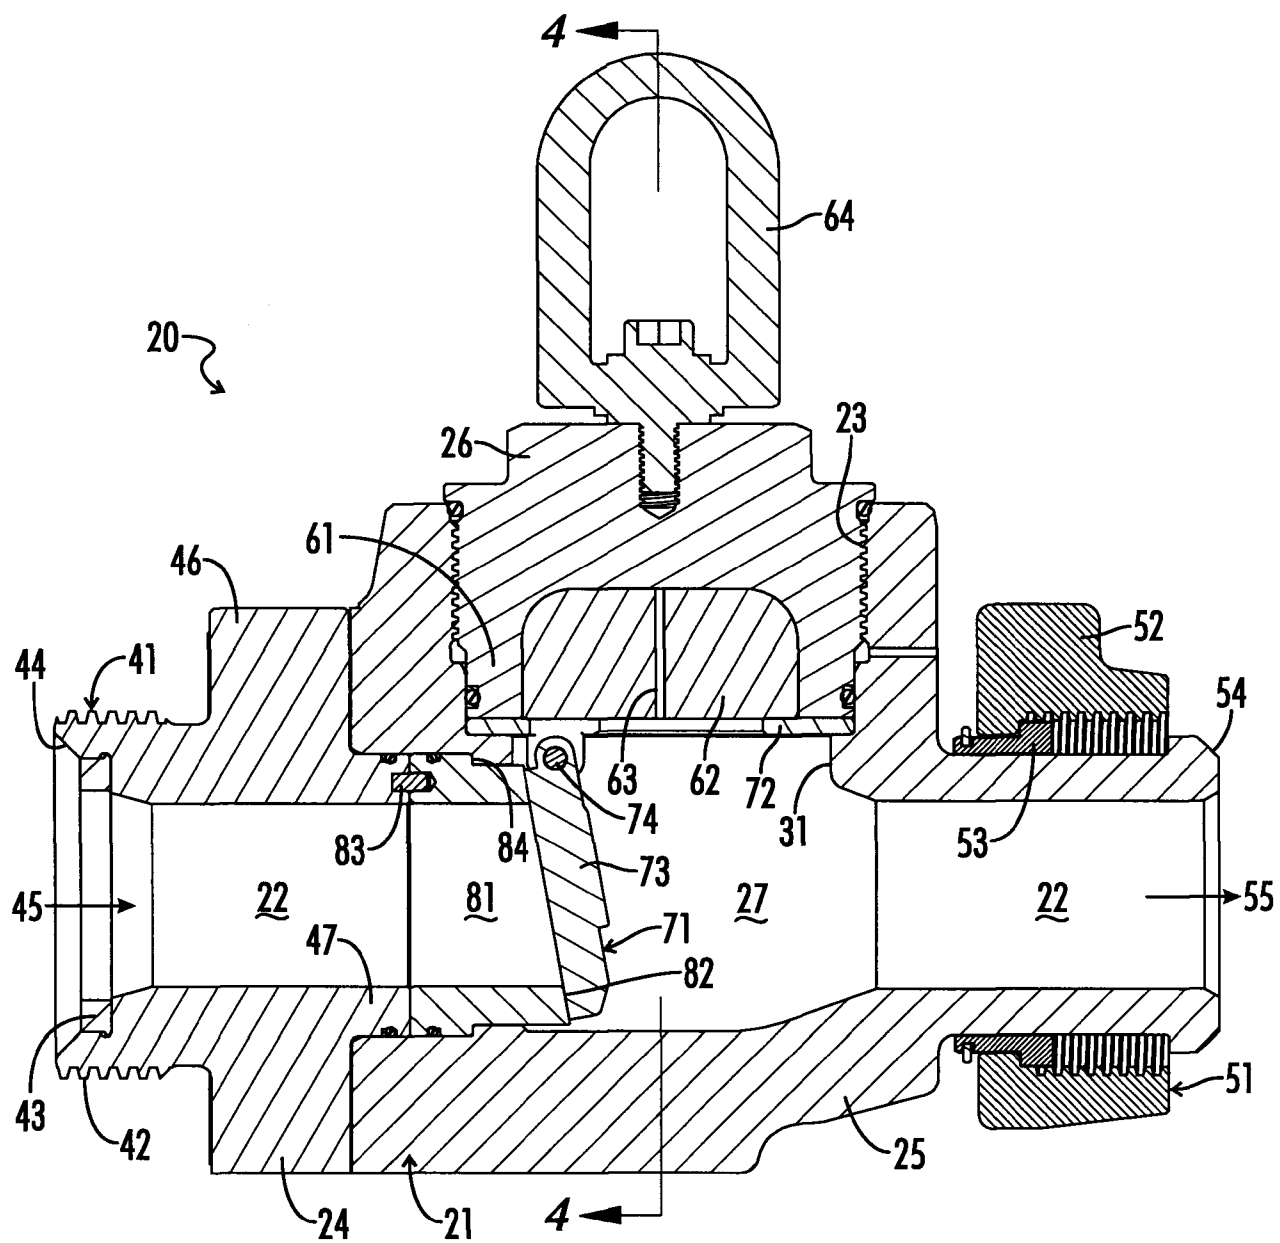


FIG. 3

4/8

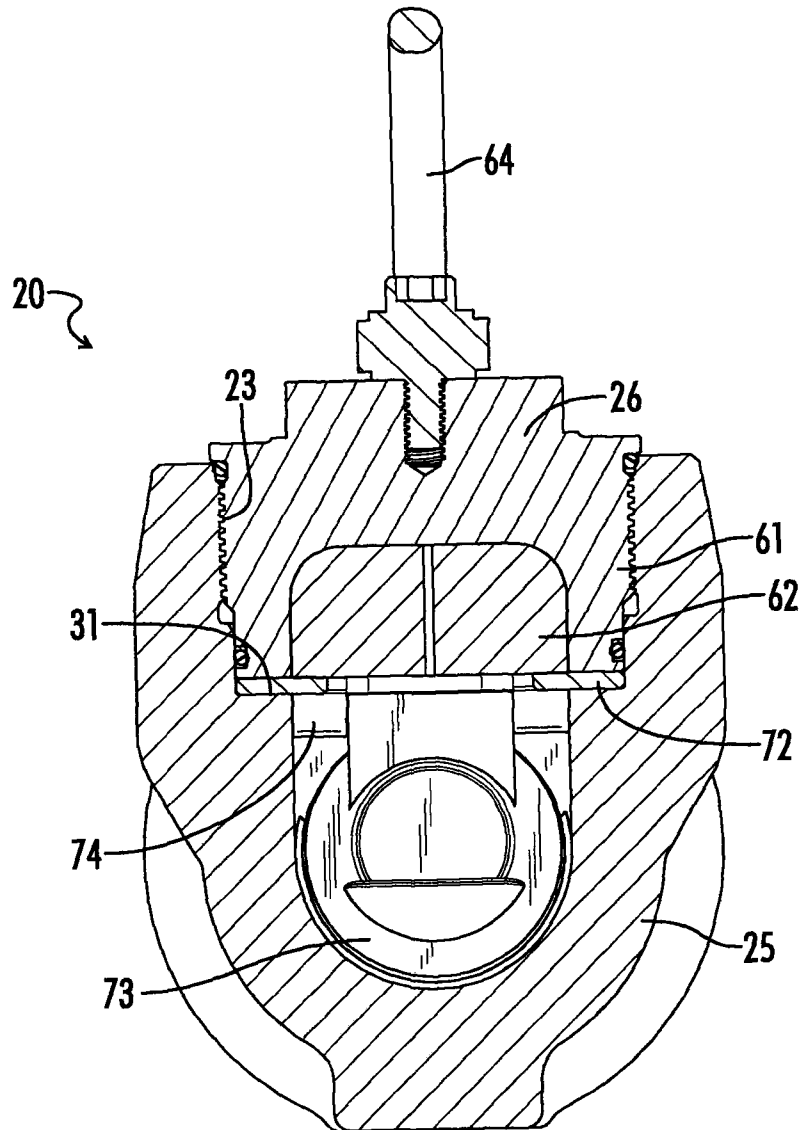


FIG. 4

5/8

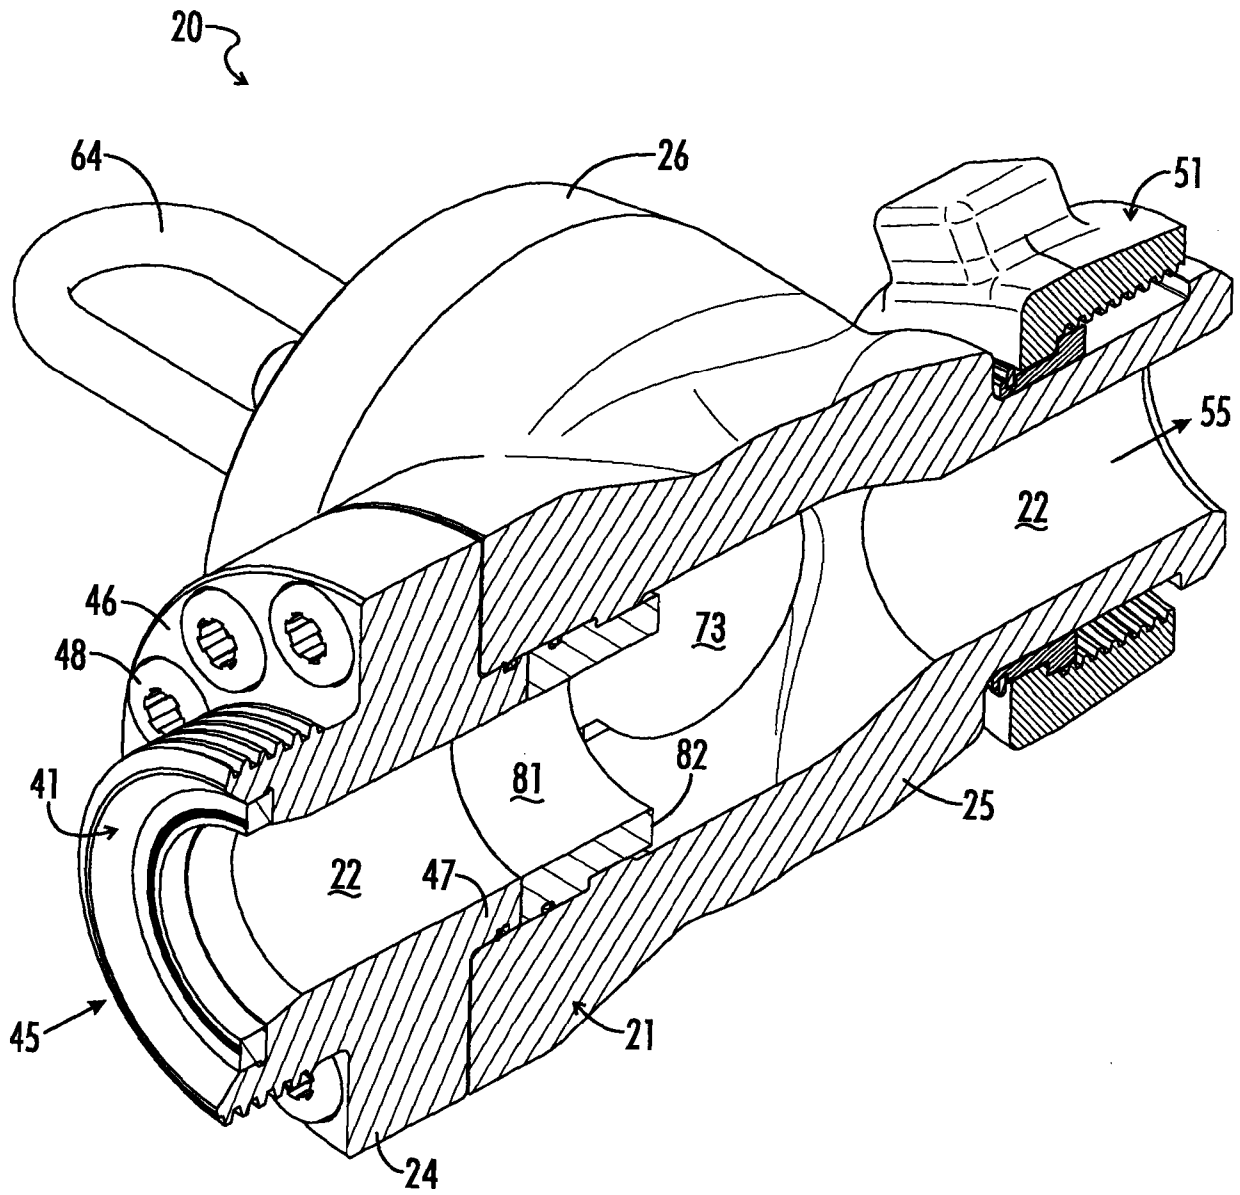
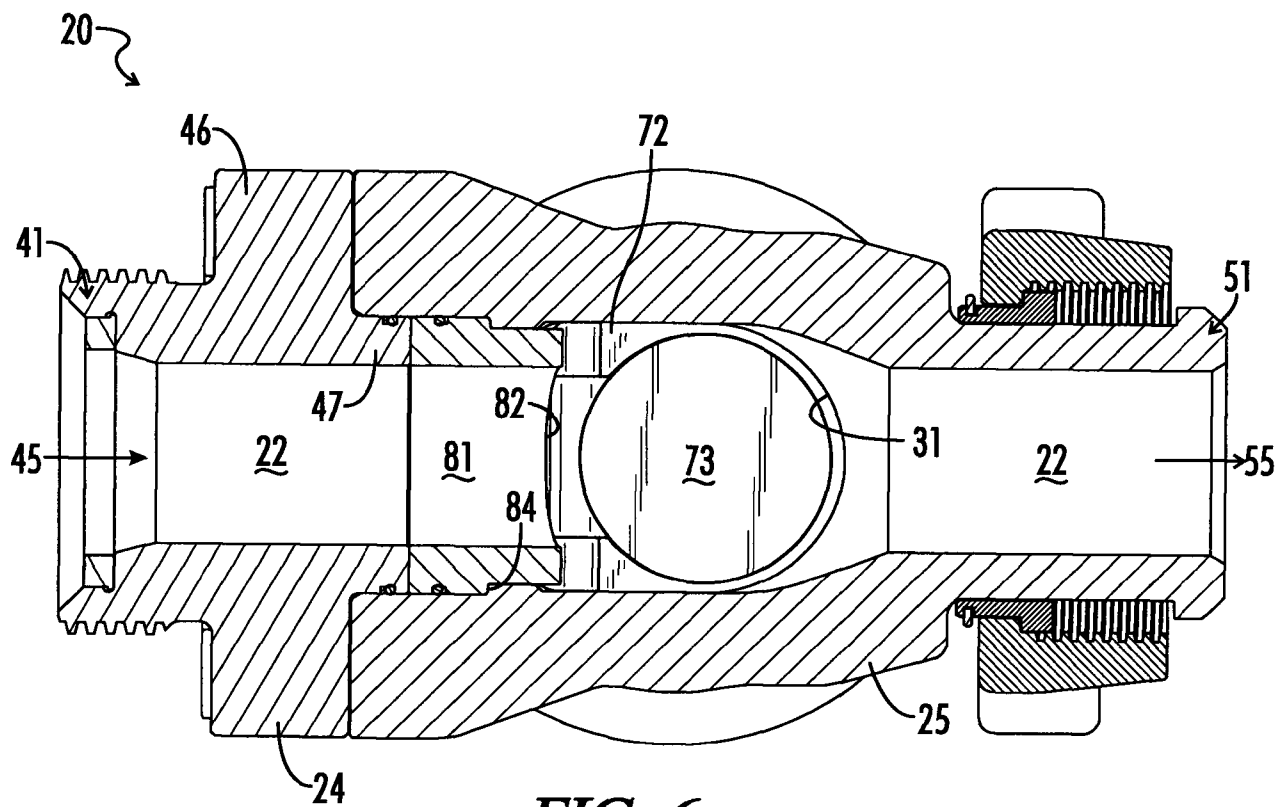


FIG. 5

6/8

**FIG. 6**

7/8

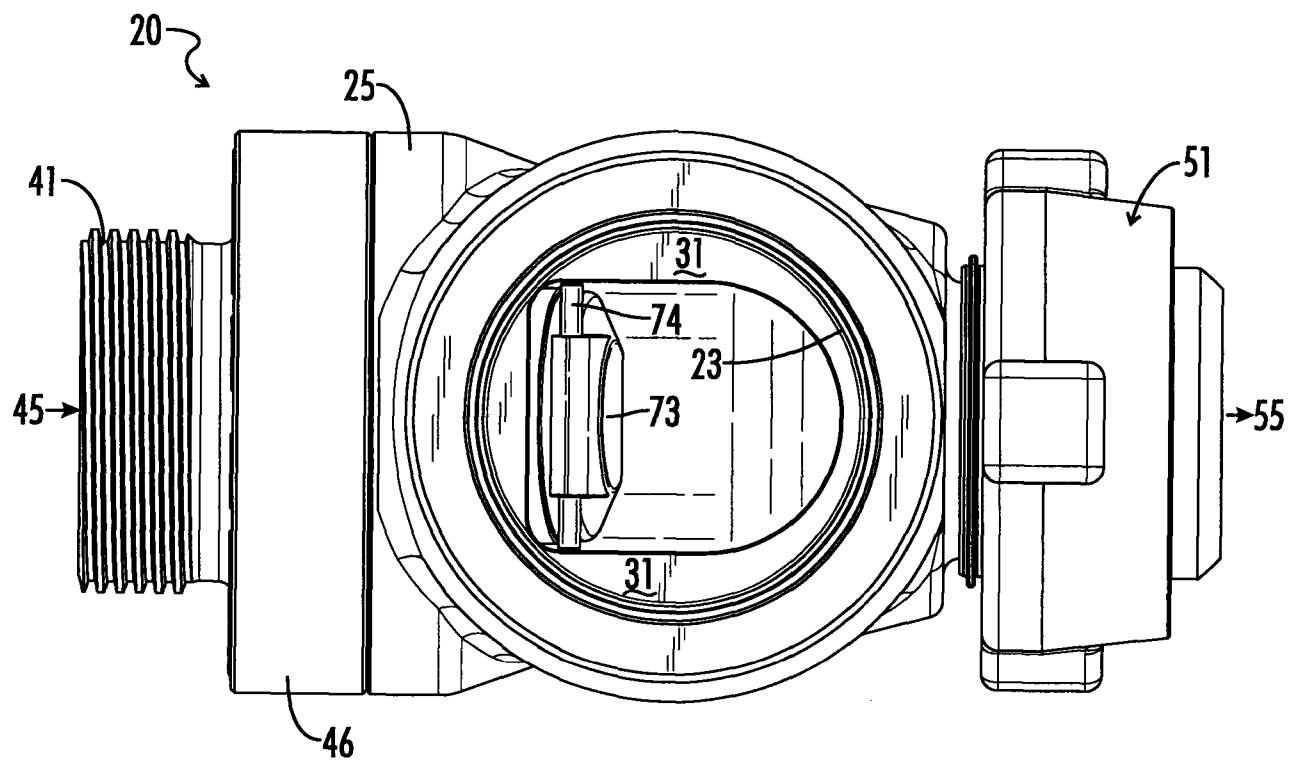


FIG. 7

8/8

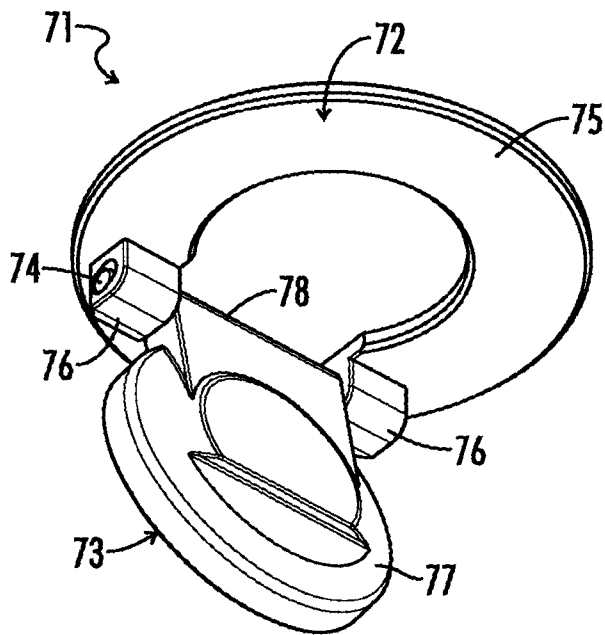


FIG. 8

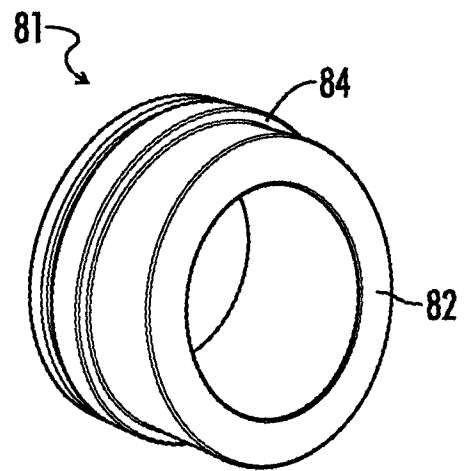


FIG. 9

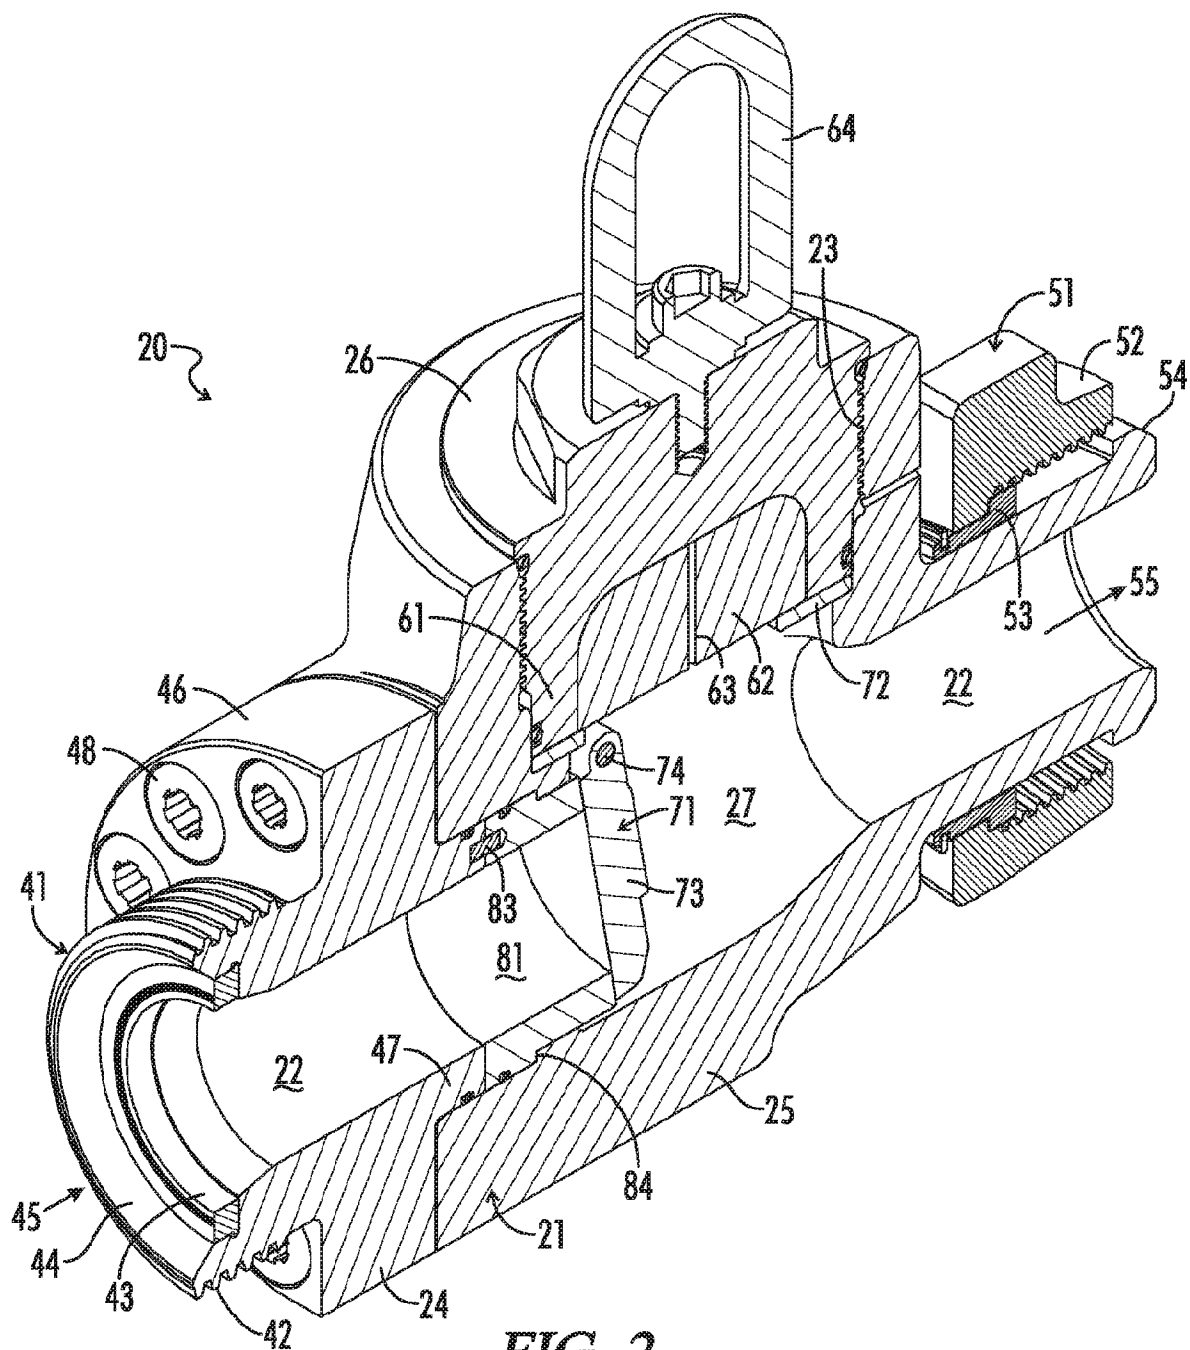


FIG. 2