

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2013/144194 A1

(43) International Publication Date  
3 October 2013 (03.10.2013)

WIPO | PCT

(51) International Patent Classification:

B23K 35/00 (2006.01) B23K 35/365 (2006.01)  
B23K 35/02 (2006.01) C22C 19/00 (2006.01)

HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(21) International Application Number:

PCT/EP2013/056500

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(22) International Filing Date:

27 March 2013 (27.03.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

12161742.7 28 March 2012 (28.03.2012) EP

(71) Applicant: ALFA LAVAL CORPORATE AB [SE/SE];  
Box 73, S-221 00 Lund (SE).

(72) Inventor: SJÖDIN, Per; Östra Vallgatan 37 A, 4 tr, S-223  
61 Lund (SE).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))



WO 2013/144194 A1

(54) Title: A NOVEL BRAZING CONCEPT

(57) Abstract: The present invention relates to an intermediate product for joining and coating by brazing comprising a base metal and a blend of boron and silicon, said base metal having a solidus temperature above 1040 °C, and the intermediate product has at least partly a surface layer of the blend on the base metal, wherein the boron in the blend is selected from a boron source, and the silicon in the blend is selected from a silicon source, and wherein the blend comprises boron and silicon in a ratio of boron to silicon within a range from about 3:100 wt/wt to about 100:3 wt/wt. The present invention relates also to a stacked intermediate product, to an assembled intermediate product, to a method of brazing, to a brazed product, to a use of an intermediate product, to a pre-brazed product, to a blend and to paint.

### A Novel Brazing Concept

The present invention relates to a novel brazing concept, an intermediate product for joining and/or coating by brazing. The present invention relates also

5 to a stacked intermediate product, to an assembled intermediate product, to a method of brazing, to a brazed product obtained by the method, to a use of an intermediate product, to a pre-brazed product, to a blend and to paint.

### Background

10 Today there are different joining methods for joining together alloys having high melting temperatures. By high temperature a melting temperature higher than 900°C is intended. One common method which is used is welding. Welding refers to a method wherein the base material with or without additional material is melted, i.e. creation of a cast product via melting and re-solidification.

15 Another joining method is brazing. During the brazing process a braze filler is added to the base material, and the braze filler is melted during the process at a temperature above 450 °C, i.e. forming a liquid interface, at a temperature lower than liquidus temperature of the base material to be joined. When brazing the liquid interface should have good wetting and flow. Soldering is a process in

20 which two or more metal items are joined together by melting and flowing of a filler metal, i.e. a solder, into the joint, the solder having a lower melting point than the work-piece. In brazing, the filler metal melts at a higher temperature than the solder, but the work-piece metal does not melt. The distinction between soldering and brazing is based on the melting temperature of the filler

25 alloy. A temperature of 450 °C is usually used as a practical delineating point between soldering and brazing.

When brazing a braze filler is applied in contact with the gap or the clearance between the base material to be joined. During the heating process the braze 30 filler melts and fills the gap to be joined. In the brazing process there are three major stages the first stage is called the physical stage. The physical stage includes wetting and flowing of the braze filler. The second stage normally

occurs at a given joining temperature. During this stage there is solid-liquid interaction, which is accompanied by substantial mass transfer. The base material volume that immediately adjoins the liquid filler metal either dissolves or is reacted with the filler metal in this stage. At the same time a small amount 5 of elements from the liquid phases penetrates into the solid base material. This redistribution of components in the joint area results in changes to the filler metal composition, and sometimes, the onset of solidification of the filler metal. The last stage, which overlaps the second, is characterized by the formation of 10 the final joint microstructure and progresses during solidification and cooling of the joint.

A method closely related to welding and brazing is diffusion brazing (DFB) also called Transient Liquid-phase bonding (TLP), or Activated Diffusion Bonding (ADB). Sometimes diffusion bonding is mentioned, but diffusion bonding refers 15 to diffusion brazing or diffusion welding and now diffusion bonding is considered to be a non-standard term.

Diffusion brazing (DFB), Transient Liquid-phase bonding (TLP), or Activated Diffusion Bonding (ADB) is a process that coalesces, or joins, metals by heating 20 them to a suitable brazing temperature at which either a preplaced filler metal will melt or flow by capillary attraction or a liquid phase will form in situ between two surfaces in contact with each other. In either case, the filler metal diffuses into the base material until the physical and mechanical properties of the joint become almost identical to those of the base metal. Two critical aspects of 25 DFB, TLP, or ADB are that:

- a liquid must be formed and become active in the joint area; and
- extensive diffusion of the filler metal elements into the base material must occur.

30

Ways of obtaining a joint close or the same as the one obtained when DFB, TLP, or ADB is used, but has the advantage of brazing, e.g having the

possibility to braze larger gaps etc, is by using a brazing technique and braze fillers disclosed by WO 2002/38327, WO 2008/060225 and WO 2008/060226. By using a braze filler, i.e. a braze alloy, with a composition close to the base material but with added melting point depressants, e.g. silicon and/or boron and/or phosphorus. By doing this the braze joint will have a composition close to the base material after brazing since braze filler had a similar composition as the base material, the braze filler blends with the base material due to dissolution of the base material and the melting point depressants diffuses into the base material.

10

There are many reasons for selecting a certain joining method, such as cost, productivity, safety, speed and properties of the joined product. Closely related E-modules will decrease the risk of high stresses in the material with higher E-module when the material is loaded. When the thermal expansion coefficient is similar the result will decrease the thermally induced stresses. When the electrochemical potential is similar the result will decrease the risk for corrosion.

The use of fillers, i.e. alloys, when joining base metals is a complicated process. The filler has to be in a form that could be applied to the base metal before heating. Usually the fillers are particles suitably produced by atomization, but the fillers may also be in form of foils produced by "melt-spinning", i.e. rapid solidification (RS). Regarding RS only a limited number of compositions are possible to produce by RS. The number of compositions that can be made as particles, i.e. powder, is greater and the normal production of powders is by atomizing. When the fillers are in form of powders then they are often combined with binders to form a paste, which could be applied to the base metal in any suitable way. To produce foils or to produce alloy powders are complicated processes and therefore costly. When powders are used the powders are suitable applied in form of a paste as mentioned above, this will add an extra step to the process since the paste need to be blended with the binders and other components, which are beneficial for the paste's properties. For both processes a great amount of work is carried out to get the right form, properties,

shape and composition of the filler before melting and joining. Therefore, one purpose for the invention is to reduce the process steps when joining base metals. Another purpose is to simplify the joining of the base metals and thus reduce costs.

5

If possible, when selecting braze fillers, a composition close to the base material is beneficial, since the base material has been selected for the product purposes. If it would have been possible and cost was no limit, it would be best to develop one braze filler for each base material. Therefore another purpose 10 with the invention is to decrease the needed number of braze fillers.

### The Invention

Accordingly, the present invention provides a solution to the technical problems and purposes by the novel and inventive brazing concept. The first aspect

15 relates to a blend for brazing of joints in products of base metals and/or for coating of products of base metals, which base metal has a solidus temperature above 1040 °C. The blend comprises boron and silicon, the boron is selected from a boron source, and the silicon is selected from a silicon source. The blend comprises boron and silicon in a ratio boron to silicon within a range from about 20 3:100 wt/wt to about 100:3 wt/wt and wherein the blend also comprises at least one binder selected from the group consisting of solvents, water, oils, gels, lacquers, varnish, binders based on monomers and/or polymers.

As an example may the ratio of boron and silicon in the blend be within a range

25 from about 5:100 wt/wt to about 1:1 wt/wt. According to another example may the ratio of boron and silicon in the blend be within a range from about 1:10 wt/wt to about 7:10 wt/wt. According to a further example may the blend have a ratio boron to silicon within a range from about 15:100 wt/wt to about 4:10 wt/wt.

The ratios are weight by weight.

30

According to one example the blend is for brazing of joints in products of base metals and/or for coating of products of base metals, which base metal has a

solidus temperature above 1040 °C. The blend comprises boron and silicon, the boron is selected from a boron source, and the silicon is selected from a silicon source. The blend comprises boron and silicon in a ratio boron to silicon within a range from 1:10 wt/wt to about 7:10 wt/wt and wherein the blend also 5 comprises one binder said binder being a lacquer or a gel.

As another example may the blend for brazing of joints in products of base metals and/or for coating of products of base metals, which base metal has a solidus temperature above 1040 °C. The blend comprises boron and silicon, the 10 boron is selected from a boron source, and the silicon is selected from a silicon source. The blend comprises boron and silicon in a ratio boron to silicon within a range from about 3:100 wt/wt to about 100:3 wt/wt and wherein the blend also comprises at least one binder selected from polyesters, polyethylene, polypropylene, acrylic polymers, (met)acrylic polymers, polyvinyl alcohol, 15 polyvinyl acetate, polystyrene.

Examples of particles size for the blend comprising boron and silicon, wherein the boron is selected from a boron source, and wherein the silicon is selected from silicon source may comprise particles having a particle size less than 250 20 µm. Another example of particles size may be less than 160 µm. A further example may be a particle size less than 100 µm. A further example may be a particle size less than 50 µm.

The blend of boron and silicon may be any type of blend between boron and 25 silicon. Boron may be a boron source. Examples of boron sources may be boron, B<sub>4</sub>C, B<sub>4</sub>Si, NiB, and FeB. Silicon may be a silicon source. Examples of Silicon source may be silicon, FeSi, SiC, and B<sub>4</sub>Si.

According to a further example the blend is for brazing of joints in products of 30 base metals and/or for coating of products of base metals, which base metal has a solidus temperature above 1040 °C. The blend comprises boron and silicon. The blend comprises boron and silicon in a ratio boron to silicon within a

range from 1:10 wt/wt to about 7:10 wt/wt and wherein the blend also comprises one binder said binder being a lacquer or a gel.

As a further example may the blend also comprises powders of base metal  
5 having a solidus temperature above 1040 °C.

As an example may the blend be a paint. The paint comprises boron and silicon in a ratio boron to silicon within a range from 1:10 wt/wt to about 7:10 wt/wt and wherein the blend also comprises one binder said binder being a lacquer.

10

As a further example may the blend be a paint. The paint comprises boron and silicon in a ratio boron to silicon within a range from 1:10 wt/wt to about 7:10 wt/wt. The paint comprises particles having particle size less than 50 µm and at least one binder may be selected from polyesters, polyethylene, polypropylene,  
15 acrylic polymers, (met)acrylic polymers, polyvinyl alcohol, polyvinyl acetate, polystyrene.

The second aspect relates to an intermediate product for joining and/or coating by brazing. The intermediate product comprises plates and/or parts of products  
20 of a base metal, which base metal has a solidus temperature above 1040 °C. The intermediate product comprises also at least part of the base metal has a surface layer of a blend, which blend comprises boron (B) and silicon (Si), wherein boron is selected from a boron source, and wherein silicon is selected from a silicon source. Boron and silicon in the blend are in a ratio boron to  
25 silicon within a range from about 3:100 wt/wt to about 100:3 wt/wt (weight by weight).

The new brazing concept provides for example joints which are obtained by a brazing alloy, which brazing alloy is formed in a melting process of the base  
30 metal and a blend of boron and silicon. The brazing alloy in melted form has been transported by capillary forces to the area of the joint mainly from neighboring areas. The temperature for the brazing concept is above 900 °C,

i.e. above delineating point between soldering and brazing. The formed brazing alloy is an alloy which has apart for the elements of a base metal liquidus temperature lowering elements. Therefore, the brazing alloy has a liquidus temperature lower than the base alloy.

5

The base metal is an alloy comprising elements such as iron (Fe), chromium (Cr), nickel (Ni), molybdenum (Mo), manganese (Mn), copper (Cu), etc.

According to one example may the base metal be selected from the group consisting of iron-based-alloys, nickel-based alloys, chromium-based alloys,

10 and copper based alloys. Examples of such alloys are found in the list in Table 1, the base metals are not limited to the list and is just examples of possible base metals.

According to one example may the intermediate product comprise plates and/or

15 parts of products of a base metal, which base metal has a solidus temperature above 1040 °C. The intermediate product comprises also at least part of the base metal has a surface layer of a blend, which blend comprises boron (B) and silicon (Si), wherein boron is selected from a boron source, and wherein silicon is selected from a silicon source. Boron and silicon in the blend are in a ratio 20 boron to silicon within a range from within a range from about 5:100 wt/wt to about 1:1 wt/wt. The base metal may be selected from the group consisting of iron-based-alloys, nickel-based alloys, chromium-based alloys, and copper based alloys.

25 According to a further example may the intermediate product comprise plates and/or parts of products of a base metal, which base metal has a solidus temperature above 1040 °C. The intermediate product comprises also at least part of the base metal has a surface layer of a blend, which blend comprises boron (B) and silicon (Si), wherein boron is selected from a boron source, and 30 wherein silicon is selected from a silicon source. Boron and silicon in the blend are in a ratio boron to silicon within a range from within a range from about 5:100 wt/wt to about 1:1 wt/wt. The blend may comprise one binder said binder

being a lacquer or a gel. The base metal may be selected from the group consisting of iron-based-alloys, nickel-based alloys, chromium-based alloys, and copper based alloys.

5

Table 1

Base metal	Approximate. solidus temperature [°C]	Approximate. liquidus temperature [°C]
Nickel 200/201	1435	1445
Nicrofer 5923hMo	1310	1360
Hastelloy ® C-2000 ® Alloy	1328	1358
Hastelloy B3	1370	1418
Alloy C22	1357	1399
Inconel 625	1290	1350
Alloy C 276	1325	1370
Nicrofer 3033	1330	1370
Nicrofer 3127HMo	1350	1370
AL6XN	1320	1400
254SMO	1325	1400
Monel 400	1299	1348
Pure Cu	1085	1085
Mild steel	1505	1535
Stainless steel Type 316	1390	1440
Stainless steel type 304	1399	1421

According to one example may the intermediate product comprises plates and/or parts of products of a base metal, which base metal has a solidus 10 temperature above 1040 °C and the base metal may comprise from about 15 to about 22 wt% chromium, from about 8 to about 22 wt% nickel, from about 0 to about 3 wt% manganese, from about 0 to about 1.5 wt% silicon, optionally from about 1 to about 8 wt% molybdenum, and balanced with iron, all percentage in percent by weight. The intermediate product comprises also at 15 least part of the base metal has a surface layer of a blend, which blend

comprises boron (B) and silicon (Si), wherein boron is selected from a boron source, and wherein silicon is selected from a silicon source. Boron and silicon in the blend are in a ratio boron to silicon within a range from about 3:100 wt/wt to about 100:3 wt/wt (weight by weight).

5

According to another example may the intermediate product comprises plates and/or parts of products of a base metal, which base metal has a solidus temperature above 1040 °C and the base metal may comprise from about 15 to about 22 wt% chromium, from about 8 to about 22 wt% nickel, from about 0.2 to 10 about 3 wt% manganese, from about 0.1 to about 1.5 wt% silicon, optionally from about 1 to about 8 wt% molybdenum, and balanced with iron, all percentage in percent by weight. The intermediate product comprises also at least part of the base metal has a surface layer of a blend, which blend comprises boron (B) and silicon (Si), wherein boron is selected from a boron source, and wherein silicon is selected from a silicon source. Boron and silicon 15 in the blend are in a ratio boron to silicon within a range from 1:10 wt/wt to about 7:10 wt/wt.

According to another example may the base metal comprise from about 15 to 20 about 22 wt% chromium, from about 8 to about 22 wt% nickel, from about 1 to about 3 wt% manganese, from about 0.5 to about 1.5 wt% silicon, optionally from about 1 to about 8 wt% molybdenum, and balanced with iron.

Depending on which alloys are used, i.e. base metals, there are different base 25 metals having different solidus temperature, i.e. the temperature point at which a material solidifies. According to one example may the solidus temperature of the base metal be above 1100 °C. According to one example of the invention may the solidus temperature of the base metal be above 1220 °C. According to another example may the solidus temperature of the base metal be above 1250 30 °C. According to a further alternative of the invention may the solidus temperature of the base metal be above 1300 °C.

According to one example may the blend according to the second aspect have a ratio boron to silicon within a range from about 5:100 wt/wt to about 1:1 wt/wt. According to another example may the blend have a ratio boron to silicon within a range from about 1:10 wt/wt to about 7:10 wt/wt. According to a further 5 example may the blend have a ratio boron to silicon within a range from about 15:100 wt/wt to about 4:10 wt/wt.

The blend of boron and silicon according to the second aspect may be any type of blend between boron and silicon. Boron may be a boron source, which could 10 be selected within the group consisting of boron, B<sub>4</sub>C, B<sub>4</sub>Si, NiB, and FeB. Silicon may be a silicon source which could be selected within the group consisting of silicon, FeSi, SiC, and B<sub>4</sub>Si.

The blend according to the second aspect may comprise particles having a 15 particle size less than 250 µm. According to one alternative may the particle size be less than 160 µm. According to another alternative may the particle size be less than 100 µm. According to a further alternative may the particle size be less than 50 µm.

20 As an example the blend according to the second aspect may also comprises at least one binder selected from the group consisting of solvents, water, oils, gels, lacquers, varnish, binders based for example on monomers or polymers. The binder may be selected from polyesters, polyethylene, polypropylene, acrylic polymers, (met)acrylic polymers, polyvinyl alcohol, polyvinyl acetate, 25 polystyrene etc.

According to one example may the intermediate product comprise plates and/or parts of products of a base metal, which base metal has a solidus temperature above 1040 °C. The intermediate product comprises also at least part of the 30 base metal has a surface layer of a blend, which blend comprises boron (B) and silicon (Si), wherein boron is selected from a boron source, and wherein silicon is selected from a silicon source. Boron and silicon in the blend are in a ratio

boron to silicon within a range from within a range from about 5:100 wt/wt to about 1:1 wt/wt. The blend may comprise one binder said binder being a lacquer or a gel.

5 The surface layer may be applied as a powder of the blend or by means such as physical vapor deposition (PVD), or chemical vapor deposition (CVD). Physical vapor deposition (PVD) is a variety of vacuum deposition and is a general term used to describe any of a variety of methods to deposit thin films by the condensation of a vaporized form of the desired film material onto

10 various work-piece surfaces, e.g. onto semiconductor wafers. The coating method involves purely physical processes such as high temperature vacuum evaporation with subsequent condensation, or plasma sputter bombardment rather than involving a chemical reaction at the surface to be coated as in chemical vapor deposition. Chemical vapor deposition (CVD) is a chemical

15 process used to produce high-purity, high-performance solid materials. The process is for example used in the semiconductor industry to produce thin films. In a typical CVD process, the wafer, i.e. the substrate, is exposed to one or more volatile precursors, which react and/or decompose on the substrate surface to produce the desired deposit. Frequently, volatile by-products are also

20 produced, which are removed by gas flow through the reaction chamber.

According to one example may the intermediate product comprise plates and/or parts of products of a base metal, which base metal has a solidus temperature above 1040 °C. The intermediate product comprises also at least part of the

25 base metal has a surface layer of a blend, which blend comprises boron (B) and silicon (Si), wherein boron is selected from a boron source, and wherein silicon is selected from a silicon source. The surface layer may be applied as a powder of the blend. Boron and silicon in the blend are in a ratio boron to silicon within a range from within a range from about 5:100 wt/wt to about 1:1 wt/wt. The

30 blend may comprise one binder said binder being a lacquer or a gel.

According to one example may the intermediate product comprise plates and/or parts of products of a base metal, which base metal has a solidus temperature above 1040 °C. The intermediate product comprises also at least part of the base metal has a surface layer of a blend, which blend comprises boron (B) and silicon (Si), wherein boron is selected from a boron source, and wherein silicon is selected from a silicon source. The surface layer may be applied as a powder of the blend. Boron and silicon in the blend are in a ratio boron to silicon within a range from within a range from 1:10 wt/wt to about 7:10 wt/wt. The blend may comprise one binder said binder being a lacquer or a gel.

10

The base metal of the invention may have a thickness < 1 mm, i.e. plates having a thickness < 1 mm. When the base metal has a thickness < 1 mm then the blend may be applied on the base metal in an amount less than 2.9 mg/mm<sup>2</sup>, preferably in an amount less than 2.8 mg/mm<sup>2</sup>. The advantage of applying an amount less than 2.9 mg/mm<sup>2</sup>, preferably in an amount less than 2.8 mg/mm<sup>2</sup> is that it decreases or reduces the risk of burning through the plates.

The base metal of the invention may have a thickness  $\geq$  1 mm.

20

The third aspect is related to an intermediate product which may be pre-brazed in such a way that the base metal and the surface layer of the blend is exposed to a temperature higher than the solidus temperature of the formed brazing alloy and lower than the solidus temperature of the base metal. A layer of brazing alloy is formed on the base metal in a pre-brazing step. The brazing alloy in the surface layer comprises the blend of boron (B) and silicon (Si) and the base metal.

When the intermediate products are plates the surface layer of the blend could be on one side of the plates, single surface layer, or on both sides of the plates, double surface layers. The plates may be cut, could be formed, could be

pressed or combinations thereof, before the application of the surface layer, after the application of the surface layer, or after the pre-brazing step.

When the intermediate products have other forms the surface layer of the blend

5 could be on one side of the product, single surface layer, or on two sides of the product, double surface layers, or the blend could be on several sides of the product. The product could be cut, could be formed, could be pressed or combinations thereof, before the application of the surface layer, after the application of the surface layer, or after the pre-brazing step.

10

The forth aspect relates to a stacked intermediate product for brazing. The stacked product comprises plates which are stacked, and that the surface layers of the plates either are in contact with a base metal on a plate or with another surface layer on another plate. The plates may have no surface layers,

15 single surface layers, double surface layers or combinations thereof. This means that a stacked product could have n-1 single surface layer plates and the last plate has no surface layer. Another example could be to have one or more plates with no surface layers in the middle and stacked on both sides of the middle plate could either single surface layer plates or double surface layers  
20 or both. The plates could be pre-brazed. The plates could be stacked in number of different ways.

The fifth aspect relates to an assembled intermediate product for brazing comprising one or more intermediate products, wherein at least one

25 intermediate product has a thickness  $\geq 1$  mm, this is the case when plates are thicker than 1 mm or when parts are thicker than 1 mm, and wherein the assembled intermediate product has at least one surface layer in contact with parts of a base metal or in contact with at least one surface layer of a part before brazing, and after brazing brazed joint are obtained in the contact areas.

30

The sixth aspect relates also to a stacked brazed product or assembled brazed product obtained by brazing a stacked or an assembled intermediate product,

wherein the stacked or the assembled intermediate product is brazed at a temperature below 1250 °C in a furnace in vacuum, in an inert gas, in a reducing atmosphere, or combinations thereof forming brazed joints between the stacked plates or the contact surfaces of the assembled intermediate 5 product. The formed brazing alloy is formed in a melting process of the base metal and the blend, and the brazing alloy in melted form has been transported by capillary forces to the area of the joint mainly from neighboring areas. According to another example may the product be brazed at a temperature below 1200 °C. According to a further example may the product be brazed at a 10 temperature above 1100 °C. According to a further example may the product be brazed within a range from about 1100 °C to about 1250 °C.

The seventh aspect relates to a method for brazing a product, which method comprises the following steps:

15

- (i) applying a blend on plates and or parts of products of base metal, said base metal having a solidus temperature above 1040°C, the blend comprises boron and silicon, the boron is selected from a boron source, and the silicon is selected from a silicon source, wherein the blend comprises boron and silicon in 20 a ratio boron to silicon within a range from about 3:100 wt/wt to about 100:3 wt/wt, preferably within a range from about 5:100 wt/wt to about 1:1 wt/wt,
- (ii) obtaining an intermediate product;
- (iii) optionally exposing the obtained intermediate product in step (ii) to a temperature higher than the solidus temperature of a forming brazing alloy and 25 lower than the solidus temperature of the base metal, and forming a layer of the brazing alloy on the base metal surface in a pre-brazing step;
- (iv) assembling or stacking the product from step (ii) or step (iii) with one or more products according to step (ii) or step (iii), or assembling or stacking the product with one or more parts or plates having no blend of silicon and boron,
- 30 and forming an assembled product or a stacked product;

- (v) brazing the assembled or stacked product from step (iv) at a temperature below 1250 °C in a furnace in vacuum, in an inert gas, in a reducing atmosphere or combinations thereof; and
- (vi) obtaining a brazed product.

5

According to an example may the brazed product obtained in step (vi) be provided with a joint(s) obtained by forming a brazing alloy in a melting process of the base metal and the blend, and transporting by capillary forces the brazing alloy in melted form to the area of the joint(s) mainly from neighboring areas.

10

According to another example may the solidus temperature of the base metal be above 1220 °C. According to another alternative of the invention may the solidus temperature of the base metal be above 1250 °C. According to a further alternative of the invention may the solidus temperature of the base metal be 15 above 1300 °C.

According to one example may the obtained product be brazed at a temperature below 1250 °C. According to another example may the product be brazed at a temperature below 1200 °C. According to a further example may 20 the product be brazed at a temperature above 1100°C. According to a further example may the product be brazed within a range from about 1100 °C to about 1250 °C.

The method may also comprise that in the step (iv) the product is brazed to a 25 base metal having thickness  $\geq$  1 mm, or brazed to a base metal having a thickness  $<$  1 mm, or brazed to one or more intermediate products according to the invention.

The method may also comprise that in step (ii) or step (iii) the product is cut, 30 formed, pressed or combinations thereof obtaining plates, preferably heat exchanger plates or reactor plates.

The method may also comprise that the obtained product in step (ii) or step (iii) is a plate and that in step (iv) the plates are stacked to produce a heat exchanger or a plate reactor.

5 The method may also comprise that the obtained brazed product is selected from the group consisting of heat exchangers, plate reactors, parts of reactors, parts of separators, parts of decanters, parts of pumps, part of valves etc.

10 The eighth aspect relates to a brazed product obtained by the method according to seventh aspect. The joints of the brazed product are obtained by the formed brazing alloy, which brazing alloy is formed in a melting process from the base metal and the blend, and flown to the joint from neighboring areas, elements found in the brazing alloy apart from the base metal elements are Si, B and optionally C, and wherein the base metal has a solidus 15 temperature above 1100 °C.

In the brazed product obtained by the method the volume of the formed brazing alloy is calculated from the following formula, see also Figure 2:

20 
$$\text{Volume} = \text{total area } A \times \text{length of joint}$$

$$\text{Total area } A = ((X - B) / 2) \times ((X - B) / 2) \times \tan \alpha$$

25 Wherein A is total area of the two triangles, X is the total width of the formed joint, B is the part of the formed joint where the volume of the formed brazing alloy in the center of the joint is negligible, and the height is calculated by measuring the angle  $\alpha$ , which is the angle of the between tangent of the pressed beam to the base.

30 The ninth aspect relates to a use of an intermediate product for brazing of heat exchangers, plate reactors, parts of reactors, parts of separators, parts of decanters, parts of pumps, part of valves etc.

The tenth aspect relates to a pre-brazed product for brazing comprising a plates and/or parts of products of base metal having a solidus temperature above 1040°C, which pre-brazed product is obtained by applying a surface layer of a blend on the plates and/or the parts of products of base metal, which blend

5 comprises boron and silicon, the boron is selected from a boron source, and the silicon is selected from a silicon source, wherein the blend comprises boron and silicon in a ratio boron to silicon within a range from about 3:100 wt/wt to about 100:3 wt/wt, preferably within a range from about 5:100 wt/wt to about 1:1 wt/wt, wherein the base metal and the surface layer is exposed to a temperature

10 higher than the solidus temperature of the formed brazing alloy and lower than the solidus temperature of the base metal, and a layer of the brazing alloy is obtained on the surface of the plates and/or the parts of products of base metal.

The present invention relates also to a blend for brazing of joints of base metals

15 and for coatings of base metals, which base metal has a solidus temperature above 1040 °C, and the blend comprises boron and silicon, the boron is selected from a boron source, and the silicon is selected from a silicon source. The blend comprises boron and silicon in a ratio boron to silicon within a range from about 3:100 wt/wt to about 100:3 wt/wt, preferably within a range from

20 about 5:100 wt/wt to about 1:1 wt/wt. According to one alternative may the blend also comprise powders of base metal having a solidus temperature above 1040 °C. The blend in the paint may comprise particles having a particle size < 50 µm.

25 The base metal of the invention is an alloy comprising elements such as iron (Fe), chromium (Cr), nickel (Ni), molybdenum (Mo), manganese (Mn), copper (Cu), etc. According to one alternative may the base metal be selected from the group consisting of iron-based-alloys, nickel-based alloys, chromium-based alloys, and copper based alloys.

30

The present invention relates also to a paint comprising a blend of boron and silicon, the boron is selected from a boron source, and the silicon is selected

from a silicon source, wherein the blend comprises boron and silicon in a ratio boron to silicon within a range from about 3:100 wt/wt to about 100:3 wt/wt, preferably within a range from about 5:100 wt/wt to about 1:1 wt/wt, and optionally powders of base metal having a solidus temperature above 1040 °C,  
5 and that the paint also comprises at least one binder selected from the group consisting of solvents, water, oils, gels, lacquers, varnish, binders based on monomers and/or polymers.

According to an alternative may the binder be selected from polyesters,  
10 polyethylene, polypropylene, acrylic polymers, met acrylic polymers, polyvinyl alcohol, polyvinyl acetate, polystyrene.

Other embodiments and alternatives are defined by the claims.

15 In the following will the invention be explained by the use of Figures 1 to 6. The figures are for the purpose of demonstrating the invention and are not intended to limit its scope.

#### Brief description of the drawings

20 Figure 1 is showing a circular pressed plate use in the Examples.  
Figure 2 is showing a graph of “Approximation”.  
Figure 3 is showing a diagram wherein the measured width as a function of applied amount (g/3500mm<sup>2</sup>) with trend lines.  
Figure 4 is showing another diagram in which calculated filled area of the  
25 braze joint based on the measured width as a function of applied amount (g/3500mm<sup>2</sup>) with trend lines.  
Figure 5 is showing another diagram in which the % of the tensile tested samples where the joint was stronger or the same as the than the plate material as a function of applied amount of blend (gram per 3500 mm<sup>2</sup>)  
30 Figure 6 is showing picture of one of the samples after joining.

Detailed description of the drawings

Figure 1 is showing a circular pressed plate, which is 42 mm in diameter and 0.4 mm thick, made of stainless steel type 316L. The pressed plate had two pressed beams V and H, each app 20 mm long. Beam V or v stands for left beam and beam H or h stands for right beam, and v and h are used in Examples 5 and 9.

Figure 2 shows approximation 1 which is based on a cross section of a brazed test sample. The cross section in Figure 2 shows the pressed beam in the top 10 of Figure 2. In the bottom of Figure 2 is the flat, earlier applied plate. In the capillary between the beam and the flat surface a joint is created. To estimate the amount of braze alloy created in the joint following approximations and calculations have been made. It has been estimated that the volume in the center of the joint is negligible. Therefore, the created braze alloy volume for 15 joints with a width, i.e. width B of 1.21 mm or less, are set to zero. On the outer sides of the beam, i.e.  $((X - B)/2)$ , formed braze alloy has been accumulated. Thus, the brazing alloy in melted form has been transported by capillary forces to the area of the joint mainly from neighboring areas forming the volumes 20 braze alloy of the triangles.

According to Figure 2, it is possible to calculate an area by estimate that two triangles are formed on each side of the centre of the joint. The angle in the triangle is measured to app.  $28^\circ$ . The total measured width is called X and the center width, B. The total area (A) of the two triangles are therefore  $A = 2 \times (((X - B)/2) \times ((X - B)/2) \times \tan (\alpha))/2$ , i.e. for Figure 2  $A = 2 \times (((X - 1.21)/2) \times ((X - 1.21)/2) \times \tan (28))/2$ . The total created volume of braze alloy, which had flown to the crevices, would be the area times the length of the two beams. Some of the formed braze alloy does not flow to the crevices and is left on the surface.

Figure 3 is showing a diagram wherein the measured width as a function of 30 applied amount ( $g/3500mm^2$ ) with trend lines. The results of the fillet test are shown in table 8 and 9 of Example 5 and in Figure 3. The trend lines of Figure 3 are base on  $Y = K \times X + L$ . The results of the measured widths and the

estimated areas are illustrated in the diagrams of Figures 3. The applied amounts, see Tables 8 and 9, were from 0.06 gram/3500 mm<sup>2</sup> to 0.96 gram/3500 mm<sup>2</sup>, which correspond to from app 0.017 mg/mm<sup>2</sup> to 0.274 mg/mm<sup>2</sup>, to be compared with app 1.3 – 5.1 mg of blend per mm<sup>2</sup> used in

5 Example 2.

The trend line  $Y = K \times X + L$  for the blend were measured, Y is the joint width, K is the inclination of the line, X is the applied amount of blend and L is a constant, see Figure 3. Thus, the width of braze joint:

10

$$Y \text{ (width for A3.3)} = 1.554 + 9.922 \times \text{(applied amount of blend A3.3)}$$

$$Y \text{ (width for B2)} = 0.626 + 10.807 \times \text{(applied amount of blend B2)}$$

$$Y \text{ (width for C1)} = 0.537 + 8.342 \times \text{(applied amount of blend C1)}$$

$$Y \text{ (width for F0)} = 0.632 + 7.456 \times \text{- (applied amount of blend F0)}$$

15

As observed from Figure 3 blends A3.3 out of blends A3.3, B2, C1, D0.5, E0.3 and F0 give the highest amount of braze alloy in the joint as a function of applied amount of blend. Sample F0 did not give any substantial joints below 0.20 gram per 3500 mm<sup>2</sup>.

20

Figure 4 is showing another diagram in which calculated filled area of the braze joint based on the measured width as a function of applied amount (gram/3500mm<sup>2</sup>) with trend lines. The trend line  $Y = K \times X - L$  for the blend were measured, Y is the area, K is the inclination of the line, X is the applied amount of blend and L is a constant, see Figure 4.

25

$$Y \text{ (area for A3.3)} = 4.361 \times \text{(applied amount of blend A3.3)} - 0.161$$

$$Y \text{ (area for B2)} = 3.372 \times \text{(applied amount of blend B2)} - 0.318$$

$$Y \text{ (area for C1)} = 2.549 \times \text{(applied amount of blend C1)} - 0.321$$

30

$$Y \text{ (area for F0)} = 0.569 \times \text{(applied amount of blend F0)} - 0.093$$

A rough estimation on the created volume based on the diagram in Figure 4 for e.g. an amount of 0.18 gram per  $3500\text{ mm}^2$ , excluding sample F0, due to "no" braze joints and sample D0.5 due to too little data, gives a value for the samples for created volume of braze alloy in the joint between the two beams,

5 see below.

$$\text{Volume (A3.3)} = 0.63 \times \text{length 40 (20 x 2)} = 25.2 \text{ mm}^3$$

$$\text{Volume (B2)} = 0.30 \times \text{length 40 (20 x 2)} = 12.0 \text{ mm}^3$$

$$\text{Volume (C1)} = 0.12 \times \text{length 40 (20 x 2)} = 4.8 \text{ mm}^3$$

10  $\text{Volume (E0.3)} = 0.10 \times \text{length 40 (20 x 2)} = 4.0 \text{ mm}^3$

Figure 5 is showing another diagram in which the % (percent) is the success rate of the tensile tested samples where the joint was stronger or the same as the plate material as a function of applied amount of blend, i.e. gram per  $3500\text{ mm}^2$ . When the plate was stronger than the joint, resulting in a split of the joint, the result was set to zero. For the samples that the joint were stronger than the plate material the difference in results was not statistical significant.

20 In the picture of Figure 6 is one of the samples shown after joining. The picture shows that there is a formed joint between the two pieces. The joined sample is from Example 10.

25 The invention is explained in more detail in by means the following Examples and the Examples are for illustrating the invention and are not intended to limit the scope of invention.

### Examples

30 The tests in these Examples were made to investigate if silicon, Si, were able to create a braze ally when silicon was applied on the surface of a test sample of base metal. Also different amounts of boron, B, were added since boron can decrease the melting point for braze alloys. Boron can also change the wetting

behavior of braze alloys. Properties of the tested blends were also investigated. In the Examples wt% is percent by weight and atm% is percent of atoms.

If nothing else is stated the test samples of base metal for all tests were  
5 cleaned by dish washing and with acetone before samples of the blends of silicon and boron were added to the test samples.

Example 1: Preparation of samples of blends of silicon and boron to be tested:

Test sample No. C1 was prepared by blending 118.0 gram of crystalline silicon  
10 powder particle size 325 mesh, 99,5% (metal basis) 7440-21-3 from Alfa Aesar - Johnsson Matthey Company, with 13.06 gram of crystalline boron powder particle size 325 mesh, 98% (metal basis) 7440-42-8 from Alfa Aesar - Johnsson Matthey Company and 77.0 gram of Nicorobraz S-30 binder from Wall Colmonoy in a Varimixer BEAR from Busch & Holm producing 208 gram of  
15 paste, see sample C1. All test samples were produced following the same procedure as test sample C1. The samples are summarised in Table 2.

Table 2

Sample No.	Boron [gram]	Silicon [gram]	S-30 Binder [gram]	Total Weight [gram]
F0	0.00	124.7	73.3	198
E0.3	4.30	123.9	72.1	200
D0.5	6.41	121.2	75.0	203
C1	13.06	118.0	77.0	208
B2	24.88	104.5	72.81	202
A3.3	11.46	22.9	19.3	54.0

20 Samples G15, H100, I66 and J was prepared the same way as samples F0, E0.3, D0.5, C1, B2 and A3.3 with the exception that another binder was used, the binder was Nicorobraz S-20 binder from Wall Colmonoy. The test samples are summarised in Table 3.

Table 3

Sample No.	Boron [gram]	Silicon [gram]	S-20 Binder [gram]	Total Weight [gram]
G15	0.37	2.24	3.1	5.7
H100	4.19	0	5.3	9.5
I66	1.80	2.70	5.5	10.0
J	2.03	2.02	5.0	9.0

The samples are also calculated to show ratio, percent by weight and percent by atoms, these are shown in Table 4

5

Table 4

Blend Sample No.	Ratio [wt/wt]		Amount [wt%]		Amount [atm%]	
	Boron	Silicon	Boron	Silicon	Boron	Silicon
F0	0	100	0	100	0	100
E0.3	3	100	3	97	8	92
D0.5	5	100	5	95	12	88
C1	10	100	9	91	21	79
B2	19	100	16	84	33	67
A3.3	33	100	25	75	46	54
G15	17	100	14	86	30	70
H100	100	0	100	0	100	0
I66	66	100	40	60	63	37
J	100	100	50	50	72	28

Measure of binder (polymeric and solvent) content in the S-20 and S-30 binder.

Also the content of "dry" material within the gels was tested. Samples of S-20 and S-30 were weight and thereafter placed in an oven for 18 hours at 98 °C.

10 After the samples had been taken out of the oven they were weight again. The results can be found in Table 5.

15

Table 5

Sample	Before [gram]	After [gram]	Polymeric proportion [wt%]
S-20	199.64	2.88	1.44
S-30	108.38	2.68	2.47

Example 2: Braze tests

When testing braze fillers of the prior art, the weight of the applied braze filler is 5 2.0 gram which correspond to 0.2 gram of silicon. Since blends of silicon and boron were to be tested similar amounts of silicon and boron in the tested compositions were used. The braze filler contains 10 wt% silicon, therefore 0.2 gram of blends of silicon and boron were applied on the test samples. The test samples were circular test pieces having a diameter of 83 mm and a thickness 10 of 0.8 mm and the test pieces were made of stainless steel type 316L. Since it was not expected that 0.2 gram of braze blend would correspond to 2 gram of 15 braze alloy because a "formed braze alloy" may first be created from the base metal and the braze blend, before it would flow, and that silicon and boron might only diffused into the base metal or even not melt the base metal a higher amount 0.4 gram was also tested. All samples were brazed in a vacuum 20 furnace at 1210 °C for 1hour. Double tests were used. Meaning, two weights, double test samples and six different blends,  $2 \times 2 \times 6 = 24$  samples, i.e. F0, E0.3, D0.5, C1, B2 and A3.3. The blends were applied on a circular area having a diameter of app 10 to 14 mm, i.e. a surface of 78 to 154 mm<sup>2</sup> or app 1.3 – 5.1 mg of blend per mm<sup>2</sup>.

Results:

It was clearly observed that the test pieces of the base metal had melted and some type of melts were created. It was also observed that the melts in some 25 aspects appeared as a braze alloy with flow. Without measuring the size of the wetting it appeared that an increased amount boron in the blends resulted in better wetting. However it was also seen that for most samples the whole thickness had melted and a hole was created in the middle of the test piece. For

the “0.2 gram samples” five out of twelve test pieces had holes, and for the “0.4 gram pieces” ten out of twelve.

One conclusion is therefore that it is not possible to change from a braze filler  
5 paste or the like and apply spots or lines with “comparative equal amounts” of  
blends of silicon and boron, since the blends of silicon and boron will melt a  
hole in the base metal if the test sample is thin, in this case 0.8 mm. If thicker  
10 test samples are used no holes might appear, but, “ditches” might be created in  
the base metal. This could be prevented or be improved by adding base metal  
15 as e.g. powder in silicon and boron blends. If only silicon is applied, i.e. sample  
F0, the result appear to have less flow and wetting properties than the other  
samples wherein both silicon and boron are applied.

#### Example 3: New applying procedure

15 In this Example the test plates were prepared for all fillet tests, corrosion tests  
and the tensile tests at the same time. From Example 2 it was concluded that  
the blends of silicon and boron it could be a risk to apply the blend in dots or  
lines on thin walled plates. Therefore, new test samples, i.e. test plates, were  
used for application of the different the blends of Si and B for the fillet tests,  
20 corrosion tests, and the tensile tests.

Accordingly, the new test samples were plates made of stainless steel type  
316L. The size of the plates were 100 mm wide, 180 to 200 mm long and the  
thickness were 0.4 mm. All plates were cleaned by dish washing and with  
25 acetone before application of samples of the blends of Si and B. The weight  
was measured. On each plate a part measured as 35 mm from the short side  
was masked.

30 The different test blends A3.3, B2, C1, D0.5, E0.3, F0, G15, H100, and I66  
were used. The test plates were “painted” with the blends on the unmasked  
surface area, which surface area had the size of 100 mm x 35 mm. The binder  
was S-30. After drying for more than 12 hours in room temperature the masking

tape was removed and the plate weight was measured for each plates. The weight presented in Table 6 below is the eight of the totally amount of the blends on the area of 100 mm x 35 mm = 3500mm<sup>2</sup> = 35 cm<sup>2</sup>.

5

Table 6

Test Plate No.	Ratio B : Si [wt/wt]	Weight of blend + dried binder [gram]	Weight of blend Si + B without binder [gram]	Weight of blend per area [mg/cm <sup>2</sup> ]
A3.3	33 : 100	0.0983	0.0959	2.74
B2	19 : 100	0.0989	0.0965	2.76
C1	10 : 100	0.1309	0.1277	3.65
D0.5	5 : 100	0.1196	0.1166	3.33
E0.3	3 : 100	0.0995	0.0970	2.77
H100	100 : 0	0.1100	0.1073	3.07
I66	66 : 100	0.0900	0.0878	2.51

Example 4: Corrosion-bend test of the samples.

From the test plates were slices cut out having width of 35 mm, meaning an applied surface area of 35 mm x 35 mm. Onto this surface area was a circular 10 pressed plate placed, see Figure 1, which press plate had a size of 42 mm in diameter and 0.4 mm thick made of stainless steel type 316L. The test samples were brazed 1 hour at 1210 °C. The tested plates for the corrosion tests had applied blend samples A3.3, B2, C1, D0.5, E0.3, H100, I66 and J, see Table 4.

15 The samples were tested according to corrosion test method ASTM A262, "Standard Practices for Detecting Susceptibility to inter-granular Attack in Austenitic Stainless Steels". "Practice E - Copper - Copper Sulfate - Sulfuric Acid. Test for Detecting Susceptibility to Inter-granular Attack in Austenitic Stainless Steels", was selected from the test method. The reason for selecting 20 this corrosion tests were that there is a risk that boron might react with chromium in the steel creating chromium borides, mainly in the grain boundaries, and then increases the risk for inter-granular corrosion attack,

“practice” in the standard were used, boiling 16% sulfuric acid together with copper sulfate in 20 hours and thereafter a bend test, according to chapter 30 in the standard.

5 Results from the corrosion test and sectioning of the test samples

The test pieces were bent tested according to the corrosion test method in chapter 30.1. None of the samples gave indications of inter granular attack at the ocular investigation of the bended surfaces. After the ASTM investigation the bended test samples were cut, ground and polished and the cross section 10 was studied in light optical microscope in EDS, i.e. Energy Dispersive Spectroscopy. The results are summarized in Table 7.

Table 7

Sample No.	Ocular investigation of surface for corrosion cracks when bended according to the ASTM test	Results of metallurgical investigation of the cross sectioned corrosion tested samples and bent tested test samples. SEM-EDS result of cracked phase
A3.3	No cracks	No corrosion A surface layer of app. max 8 µm with a few cracks. The phase that had cracked had a high Cr and B content, most probably a chromium boride phase.
B2	No cracks	No corrosion A surface layer of app. max 8 µm with a few cracks. The phase that had cracked had a high Cr and B content, most probably a chromium boride phase
C1	No cracks	No corrosion or cracks
D0.5	No cracks	No corrosion or cracks
E0.3	No cracks	No corrosion A surface layer of app. max 60 µm with a few cracks. The phase that had cracked had a high Si content generally <5wt%
H100	No cracks	Corroded surface and joint
I66	No cracks	No corrosion A surface layer of app. max 12 µm with a few cracks. The phase that had cracked had a high Cr and B content, most probably a chromium boride phase

J	No cracks	No corrosion A surface layer of app. max 20 µm with a few cracks. The phase that had cracked had a high Cr and B content, most probably a chromium boride phase
---	-----------	--

Comments:

Apparently when adding high amounts of boron, as for sample H100, J, I66, a fragile phase was formed on the surface, most probably a chromium boride phase, increasing with the amount of boron. A fragile phase was not seen in the H100 sample, most probably due to the corrosion on the surface. Also the amount of borides increased with the amount of boron, meaning it has to be taken into consideration that the corrosion properties might decrease when adding high amounts of boron, as for sample H100 that was attacked in the corrosion test. “The negative” effect with boron can be decreased by using thicker base metals and/or longer diffusion times. It is then possible to “dilute” boron in the base metal. Also for the normal amount of boron as for A3.3 and B2 a thinner fragile surface layer was formed. It was seen that for the low amount of boron in the samples, sample E0.3, a quite thick fragile surface layer, with a high silicon content generally > 5wt% of silicon, was formed with a different characteristic than for the fragile surfaces for A3.3, B2, H100, I66 and J. “The negative” effect with silicon can be decreased by using thicker base metals and/or longer diffusion times. It is then possible to “dilute” silicon in the base metal.

20 Example 5: Fillet test of the samples.

From test samples made according to Example 3, slices of the plates was cut out with the width of 35 mm, meaning an applied surface of 35 mm x 35 mm. Onto this surface was placed a circular pressed plate, see Figure 1, 42 mm in diameter and 0.4 mm thick, made of stainless steel type 316L. The pressed plate had two pressed beams, each app 20 mm long. The samples were brazed at app 1 hour at app 1200 °C.

The results from the fillet test show that there were the amounts of braze alloy found in the joint area created between the flat surface area onto which surface

area the blends were applied, which flat surface area was in contact with a pressed beam in the test sample seen in Figure 1. The amount of braze alloy was calculated by an approximation, see Figure 2, by calculate an area by estimate that two triangles are formed on each side of the centre of the joint. In 5 the middle part there is no or very small amounts of additional formed "brazing alloy". The two triangles can be measured by measuring the height (h) and the base (b), the total area of the two triangles are summing up to  $(h) \times (b)$  since there are two triangles. The problem with this calculation is that the height is hard to measure. Therefore we use the following equation for calculating of the 10 two triangle areas:

$$A = ((X - B) / 2) \times ((X - B) / 2) \times \tan \alpha$$

A is total area of the two triangles, X is the total width of the formed joint, B is the part of the formed joint where the volume of the formed brazing alloy in the 15 center of the joint is negligible. Thus, the base of each triangle is  $(X - B) / 2$ . The height is calculated by measuring the angle  $\alpha$ , which is the angle between the tangents of the pressed beam to the base.

To calculate the volume of the total created volume of the formed braze alloy 20 that had flown to the crevices, would be to measure the length of the two beams, i.e. each beam is 20 mm, and multiply the length and the total area.

The area of two triangles is the estimated area after brazing in Table 8 and 9. The volume is the volume of the formed brazing alloy on one of the beams. The 25 results from the fillet test are shown in table 8 and 9, and in Figure 3. In Table 8 and in Table 9 v and h stand for v = left beam and h = right beam.

Table 8

Sample No.	Applied binder Si + B [gram]	Width [mm]	Estimated Area after brazing [mm <sup>2</sup> ]	Volume [mm <sup>3</sup> ]
A3.3x-1v	0.06	2.69	0.29	5.8
A3.3x-1h	0.06	2.58	0.25	5.0
A3.3-1v	0.10	2.23	0.14	2.8
A3.3-1h	0.10	2.31	0.16	3.2
A3.3-2v	0.14	3.38	0.63	12.6
A3.3-2h	0.14	3.19	0.52	10.4
A3.3-3v	0.09	1.92	0.07	1.4
A3.3-3h	0.09	1.85	0.05	1.0
B2X-1v	0.18	2.12	0.11	2.2
B2X-1h	0.18	2.50	0.22	4.4
B2X-2v	0.15	2.31	0.16	3.2
B2X-2h	0.15	2.31	0.16	3.2
B2-1v	0.10	1.96	0.07	1.4
B2-1h	0.10	1.92	0.07	1.4
B2-2v	0.24	3.23	0.54	10.8
B2-2h	0.24	3.23	0.54	10.8
B2-3v	0.16	2.77	0.32	6.4
B2-3h	0.16	2.69	0.29	5.8
B4v	0.11	1.35	0.00	0
B4h	0.11	1.35	0.00	0

Measured values for the fillet test, samples A3.3 – B2/B4

Table 9

Sample No.	Applied binder Si + B [gram]	Width [mm]	Estimated Area after brazing [mm <sup>2</sup> ]	Volume [mm <sup>3</sup> ]
C1X-1v	0.22	2.50	0.22	4.4
C1X-1h	0.22	2.69	0.29	5.8
C1X-2v	0.33	3.08	0.46	9.2
C1X-2h	0.33	3.27	0.56	11.2
C1-1v	0.13	1.46	0.01	0.2
C1-1h	0.13	1.46	0.01	0.2
C1-2v	0.15	1.96	0.07	1.4
C1-2h	0.15	2.08	0.10	2.0
C1-3v	0.14	1.54	0.01	0.2
C1-3h	0.14	1.62	0.02	0.4
D0.5-1v	0.19	2.54	0.23	4.6
D0.5-1h	0.19	2.50	0.22	4.4
D0.5-2v	0.12	1.08	0.00	0
D0.5-2h	0.12	1.08	0.00	0
D0.5-3v	0.14	2.04	0.09	1.8
D0.5-3h	0.14	2.04	0.09	1.8
E0.3-1v	0.13	1.15	0.00	0
E0.3-1h	0.13	1.15	0.00	0
E0.3-2v	0.21	2.31	0.16	3.2
E0.3-2h	0.21	2.31	0.16	3.2
E0.3-3v	0.10	1.35	0.00	0
E0.3-3h	0.10	1.35	0.00	0
F0-1h	0.45	2.69	0.29	5.8
F0-2v	0.25	1.08	0.00	0
F0-2h	0.25	1.35	0.00	0
F0-3v	0.96	2.96	0.41	8.2
F0-3h	0.96	3.08	0.46	9.2

Measured values for the fillet test for samples C1 to F0

The results of the measured widths and the estimated areas are presented in  
5 the Tables 8 and 9, and illustrated in the diagrams of Figures 3. The applied

amounts, see Tables 8 and 9, were from 0.06 gram/3500 mm<sup>2</sup> to 0.96 gram/3500 mm<sup>2</sup>, which correspond to from app 0.017 mg/m<sup>2</sup> to 0.274 mg/mm<sup>2</sup>, to be compared with app 1.3 – 5.1 mg of blend per mm<sup>2</sup> used in Example 2.

5 The trend line  $Y = K \times X + L$  for the blend were measured, Y is the joint width, K is the inclination of the line, X is the applied amount of blend and L is a constant, see Figure 3. Thus, the width of braze joint:

$$Y (\text{width for A3.3}) = 1.554 + 9.922 \times (\text{applied amount of blend A3.3})$$

10  $Y (\text{width for B2}) = 0.626 + 10.807 \times (\text{applied amount of blend B2})$

$$Y (\text{width for C1}) = 0.537 + 8.342 \times (\text{applied amount of blend C1})$$

$$Y (\text{width for F0}) = 0.632 + 7.456 \times (\text{applied amount of blend F0})$$

As observed from the diagram blends A3.3 out of blends A3.3, B2, C1, D0.5, 15 E0.3 and F0 give the highest amount of braze alloy in the joint as a function of applied amount of blend. Sample F0 did not give any substantial joints below 0.20 gram per 3500 mm<sup>2</sup>.

The trend line  $Y = K \times X - L$  for the blend were measured, Y is the area, K is the 20 inclination of the line, X is the applied amount of blend and L is a constant, see Figure 4.

$$Y (\text{area for A3.3}) = 4.361 \times (\text{applied amount of blend A3.3}) - 0.161$$

$$Y (\text{area for B2}) = 3.372 \times (\text{applied amount of blend B2}) - 0.318$$

25  $Y (\text{area for C1}) = 2.549 \times (\text{applied amount of blend C1}) - 0.321$

$$Y (\text{area for F0}) = 0.569 \times (\text{applied amount of blend F0}) - 0.093$$

A rough estimation on the created volume based on the diagram in Figure 4 for 30 e.g. an amount of 0.18 gram per 3500 mm<sup>2</sup>, excluding sample F0, due to “no” braze joints and sample D0.5 due to too little data, gives a value for the samples for created volume of braze alloy in the joint between the two beams, see below.

Volume (A3.3) = 0.63 x length 40 (20 x 2) = 25.2 mm<sup>3</sup>

Volume (B2) = 0.30 x length 40 (20 x 2) = 12.0 mm<sup>3</sup>

Volume (C1) = 0.12 x length 40 (20 x 2) = 4.8 mm<sup>3</sup>

Volume (E0.3) = 0.10 x length 40 (20 x 2) = 4.0 mm<sup>3</sup>

5

Also blends with higher proportion of boron were tested e.g. sample G15, H100, I66 and J. All tested samples did work quite similar to blend A3.3 and B2 regarding the created braze alloy volume. However the metallurgical cross section of the brazed samples showed that the amount of borides was greater 10 and for sample H100, i.e. pure boron, also brittle high chromium phases were found on the surface where the blend earlier was applied. The hard phases were most probably chromium borides, which decreases the chromium content in the surrounding material, decreasing the corrosion resistance. This may be an issue when good corrosion resistance is wanted but is not an issue for non- 15 corrosive environment. The effect of boron could be decreased by changing the heat treatment and or by using a thicker base metal that can "absorb" a greater amount of boron. For a thicker material  $\geq 1\text{mm}$  this effect in the surface will also be less severe since the proportion of the surface volume compared to the base metal volume is much less than for a thin material  $< 1\text{mm}$  or  $< 0.5\text{mm}$ . The 20 chromium borides could be an advantage if better wear resistance is wanted. The metallurgical investigation also showed that for sample F0, i.e. pure silicon, a thick brittle silicon containing phase was found, with a thickness of  $> 50\%$  of the plate thickness for some areas in the investigated sample. The similar phase was also found in the joint. Cracks were found in this phase, with a 25 length  $> 30\%$  of the plate thickness. Such cracks will decrease the mechanical performance of the joined product and can be initiating points for corrosion and or fatigue cracks. The average measured hardness of the phase was over 400Hv (Vickers). This brittle phase is probably much harder to decrease, compared to the by boride phase, using thicker base metal or a change in heat 30 treatment. Still for thicker base metal this effect can be less severe.

Example 6 Tensile test of brazed joint

The original applied test plates were sliced into slices. The size of the sliced samples was app 100 mm wide, 180 to 200 mm long and the thickness 0.4 mm. The applied area for each slice was then 10 mm times 35 mm = 350mm<sup>2</sup>. On 5 the applied area a thicker part, 4 mm, of stainless steel type 316L was placed covering 30 mm of the total 35 mm applied surface. The thicker part was placed at the end of the slice leaving 5 mm of applied surface not covered by the thick plate. By doing this a decrease in the plate material strength due to the applied blend would be detected when tensile testing if the joint is stronger than the 10 plate. The thicker plate was also wider than the 10 mm slices. All test samples were brazed at app 1200°C for app 1 hour.

After brazing the thick part was mounted horizontally in a tensile test machine. The braze slice was firmly bent to 90° to a vertical direction. The samples were 15 mounted so that they could move in horizontal direction. The samples were then loaded and the braze joint were split.

Results

When the plate was stronger than the joint, so that the joint were split, the result 20 was set to zero. For the samples that the joint were stronger than the plate material the difference in results was not statistical significant. The results are shown as percent (%) of the tested samples where the joint were stronger than or the same as the plate as a function of applied amount, meaning that the joint was not split when tested. The results are summarized in Table 10 and in the 25 diagram of Figure 5.

Table 10

Blend of Si + B [gram]	A3.3-1 Success Rate [%]	B2-1 Success Rate [%]	C1-1 Success Rate [%]	D0.5-1 Success Rate [%]
0.0600	100			
0.0910	100			
0.0989		83		

0.1092		100		
0.1196				0
0.1309			50	
0.1399	100			
0.1402			50	
0.1428				0
0.1500		100		
0.1548			67	
0.1558		100		
0.1800		100		
0.1850				50
0.2200			100	
0.2417		100		
0.3000	100			
0.3300			100	

### Example 7

To establish the relationship between applied amount and the risk for burn through the plates, new tests were performed. For all tests blend B2, see Table 5 6, was used. To blend B2 was binder S-30 added. The test pieces which were tested were circular having a thickness of 0.8 mm and having a diameter of 83 mm. The base metal in the test plates were stainless steel type 316. For all samples the blend was applied in the center of the test sample. The applied area was 28 mm<sup>2</sup>, i.e. circular spot having a diameter of 6 mm. All test samples 10 were weight before and after application, and the results are summarized in Table 11. Thereafter the test samples were placed in a furnace at room temperature for 12 hours. The samples were weight again.

The test samples were all put in a furnace and were brazed at 1210 °C for app 15 1 hour. During brazing only the outer edges of each sample were in contact with the fixture material, keeping the plate center bottom surface not in contact with any material during brazing. The reason for keeping the plate center bottom

surface free of contacts is that a collapse or a burn through might be prevented if the center material is supported from below by the fixture material.

Applied amount and burn through results for the 0.8 mm samples are  
5 summarized in Table 11.

Table 11

Sample No.	Blend of Si + B and additional wet binder S-30 [gram]	Blend of Si + B and additional wet binder S-30 [mg/mm <sup>2</sup> ]	Blend of Si + B and additional dried binder S-30 [mg/mm <sup>2</sup> ]	Calculated amount of Blend of Si + B without binder [mg/mm <sup>2</sup> ]	Burn through [1] or [0]
1	0.020	0.714	0.464	0.453	0
2	0.010	0.357	0.232	0.226	0
3	0.040	1.429	0.928	0.905	0
4	0.030	1.0714	0.696	0.679	0
5	0.050	1.786	1.161	1.132	0
6	0.060	2.143	1.393	1.359	0
7	0.070	2.500	1.625	1.585	0
8	0.080	2.857	1.857	1.811	0
9	0.090	3.214	2.089	2.037	0
10	0.100	3.571	2.321	2.264	0
11	0.110	3.928	2.554	2.491	1
12	0.120	4.285	2.786	2.717	1
13	0.130	4.642	3.018	2.943	1
14	0.150	5.357	3.482	3.396	1
15	0.170	6.071	3.946	3.849	1
16	0.190	6.786	4.411	4.302	1
17	0.210	7.500	4.875	4.755	1
18	0.230	8.214	5.339	5.207	1
19	0.280	10.000	6.500	6.339	1
20	0.290	10.357	6.732	6.566	1

The tests show that there is a burn through between sample 10 and 11 for a plate having a thickness of 0.8 mm. Sample 10 has 2.264 mg/mm<sup>2</sup> applied amount of blend and sample 11 has 2.491 mg/mm<sup>2</sup>. For joining plates having thickness less than 1 mm, there is a risk with an amount within the range from 5 about 2.830 mg/mm<sup>2</sup> to about 3.114 mg/mm<sup>2</sup> for burning through the plates, the amount in the middle of this range is 2.972 mg/mm<sup>2</sup>. Therefore, for a plate having a thickness less than 1 mm an amount of less than 2.9 mg/mm<sup>2</sup> would be suitable for avoiding burning through the plate.

10

Example 8

In Example 8 a braze joint between two pressed heat exchanger plates are made in three different ways. The thickness of the heat exchanger plates are 0.4 mm.

15 In the first and second test samples an iron based braze filler with a composition close stainless steel type 316 were used, see WO 2002/38327. The braze filler had an increased amount of silicon to about 10 wt%, an amount boron to about 0.5 wt% and a decreased amount of Fe of about 10.5 wt%. In the first test sample the braze filler was applied in lines and in the second test 20 sample the braze filler was applied evenly on the surface. In both cases the filler was applied after pressing.

25 After brazing test sample 1 showed that the braze filler applied in lines was drawn to the braze joints. Some of the braze filler did not flow to the braze joint and therefore increased the thickness locally at the applied line. For test sample 2 the braze filler flowed to the braze joints, however some on the braze filler remained on the surface and increased the thickness. In test samples 1 and 2 the amount of braze filler corresponds to an amount of app 15 wt% of the plate material.

30

In test sample 3 A3.3 blend was used, see Table 6. The blend was applied before pressing evenly on the plate. The blend was applied in an amount that would create braze joint with similar sizes as for test samples 1 and 2.

5 Test sample 3 was applied with a layer having a thickness corresponding to a weight of app 1.5 wt% of the plate material. By applying blend A3.3 a braze alloy was formed from the base metal, and the formed braze alloy flow to the braze joints. Accordingly, the thickness of the plate decreased since more material was drawn to the braze joint than added blend on the surface.

10

Example 9 Tests with different Si - sources and B - sources

The tests which were performed in Example 9 were to investigate alternative boron – sources and silicon - sources. Blend B2, see Table 6, was selected as reference for the test. The alternative sources were tested with their ability to 15 create a joint. For each experiment either an alternative boron - source or an alternative silicon - source was tested. When using an alternative source the other element influence was assumed to be zero, meaning that it was only the weight of boron or silicon in the alternative component that was “measured”, see Table 12. For the reference blend B2, the weight ratio between silicon and 20 boron is 10 gram to 2 gram summing up to 12 gram. Each blend was mixed together with S-30 binder and the blend was applied on a steel plate according to Example 1. All samples were brazed a vacuum furnace at 1210 °C for 1hour.

Table 12

Sample	Alternative source	Added Amount [Si] [gram]	Added Amount [B] [gram]	Corresponding Amount [Si] [gram]	Corresponding Amount [B] [gram]
Si - B	Si - B	10.0	2.0	10.0	2.0
Si - B <sub>4</sub> C	B <sub>4</sub> C	10.0	2.6	10.0	2.0
Si - FeB	FeB	10.1	12.5	10.1	2.0
FeSi - B	FeSi	30.2	2.0	10.1	2.0
Si - NiB	NiB	10.1	13.0	10.1	2.0

25

The trend line  $Y = K \times X + L$  for blend B2 was measured, Y is the joint width, K is the inclination of the line for B2, X is the applied amount of blend and L is a constant for no applied amount of blend B2, see Figure 3. Thus, the width of braze joint  $Y = 0.626 + 10,807 \times (\text{applied amount of blend})$ .

5

In Table 13 v and h stand for v = left beam and h = right beam as in Example 5.

Table 13

Sample	Applied Amount [gram]	Joint Calculated Width Y [mm <sup>2</sup> ]	Joint Measured Width [mm <sup>2</sup> ]
Si - B <sub>4</sub> C - v	0.22	3.0	2.69
Si - B <sub>4</sub> C - h	0.22	3.0	2.88
Si - FeB - v	0.26	3.4	1.73
Si - FeB - h	0.26	3.4	1.73
FeSi - B - v	0.29	3.8	2.1
FeSi - B - h	0.29	3.8	2.1
Si - NiB - v	0.39	4.8	2.69
Si - NiB - h	0.39	4.8	2.88

The results in Table 13 show that it is possible to use B4C, NiB and FeB as

10 alternatives source to boron. When NiB were used the created amount was less than for pure boron however NiB could be used if an Ni alloying effect is wanted.

Example 10 Tests of base metals

15 In Example 10 a large number of different base metals were tested. All tests except for the mild steel and a Ni-Cu alloy were tested according to test Y.

For test Y two circular pressed test pieces with a thickness of app 0.8 mm were place onto each other. Each sample had a pressed circular beam. The top 20 faces of the beams were placed towards each other creating a circular crevice between the pieces. For each sample the B2 blend with binder S-20 were applied with a paint brush. The weight of the added amount was not measured

since the applying was not homogenous when applying with the paint brush. A picture of one of the samples after joining is presented in Figure 6.

The mild steel samples and the Ni-Cu samples were applied in the same way,  
 5 but for mild steel according to the tests made in example 5 “fillet test” and for  
 the Ni-Cu test with two flat test pieces. The samples except for the Ni-Cu were  
 “brazed” in a furnace at app 1200 °C, i.e. 1210 °C, for 1 h in vacuum  
 atmosphere furnace. The Ni-Cu sample was brazed at app 1130 °C for app 1h  
 in the same vacuum furnace. After “brazing” a joint was formed between the  
 10 pieces for all made test and a flow of created “braze alloy” made of the base  
 metal, to the joint was also observed for all tested samples. The results are  
 shown on Table 14.

Table 14

Base metal Sample No.	Cr [wt%]	Fe [wt%]	Mo [wt%]	Ni [wt%]	Cu [wt%]	Mn [wt%]	After Brazing Created joint?	After Brazing Flow of Braze Alloy?
1	-	0.3	-	99	-	0.2	Yes	Yes
2	21	0.6	16	62	0.4	-	Yes	Yes
3	22	0.7	16	59	1.6	-	Yes	Yes
4	0.6	1.9	29	68	0.2	-	Yes	Yes
5	21	4.4	13	58	-	-	Yes	Yes
6	19	5.0	9.0	63	0.4	-	Yes	Yes
7	15	5.5	17	60	-	0.3	Yes	Yes
8	1.1	5.6	28	63	0.6	0.4	Yes	Yes
9	19	6.2	2.6	70	1.7	0.4	Yes	Yes
10	33	32	1.7	33	0.4	0.6	Yes	Yes
11	27	33	6.5	32	1.1	1.4	Yes	Yes
12	27	36	3.4	32	1.0	1.4	Yes	Yes
13	24	44	7.2	23	0.3	1.5	Yes	Yes
14	20	48	4.3	25	1.1	1.2	Yes	Yes
15	19	50	6.3	25	0.2	-	Yes	Yes
16	20	54	6.5	19	0.6	0.4	Yes	Yes

17	29	64	2.4	3.5	-	-	Yes	Yes
18	28	66	2.2	3.5	-	-	Yes	Yes
19	0.3	1.1	-	66	31	1.6	Yes	Yes
20	0.17	99.5	-	-	-	0.3	Yes	Yes

The results in Table 14 show that braze alloys are formed between the blend and the base metal for each sample 1 to 20. The results show also that joints were created for each tested sample.

5

The examples show that boron was needed to create substantial amount of braze alloy, could fill the joints and also create strength in the joints. The examples also showed that boron was needed for the microstructure, since a thick fragile phase was found for the samples with no boron.

10

Claims

1. A blend for brazing of joints in products of base metals and/or for coating of products of base metals, which base metal has a solidus temperature above 1040 °C, which blend comprises boron and silicon, the boron is selected from a 5 boron source, and the silicon is selected from a silicon source, wherein the blend comprises boron and silicon in a ratio boron to silicon within a range from about 3:100 wt/wt to about 100:3 wt/wt, preferably within a range from about 5:100 wt/wt to about 1:1 wt/wt, and wherein the blend also comprises at least one binder selected from the group consisting of solvents, water, oils, gels, 10 lacquers, varnish, binders based on monomers and/or polymers.
2. The blend according to claim 1, wherein the at least one binder is selected from polyesters, polyethylene, polypropylene, acrylic polymers, (met)acrylic polymers, polyvinyl alcohol, polyvinyl acetate, polystyrene.
3. The blend according to claim 1 or 2, wherein the blend particles having 15 particles size less than 250 µm.
4. The blend according to any one of the preceding claims, wherein the 20 boron source is selected from boron, B<sub>4</sub>C, B<sub>4</sub>Si, NiB, and FeB, and the silicon source is selected from silicon, FeSi, SiC, and B<sub>4</sub>Si.
5. A blend according to any one of the preceding claims, wherein the blend 25 also comprises powders of base metal having a solidus temperature above 1040 °C.
6. A blend according to any one of the preceding claims, wherein the blend is a paint.
- 30 7. An intermediate product for joining and/or coating by brazing comprising plates and/or parts of products of a base metal and a blend of boron and silicon, said base metal having a solidus temperature above 1040 °C, and the

intermediate product has at least partly a surface layer of the blend on the base metal, wherein the boron in the blend is selected from a boron source, and the silicon in the blend is selected from a silicon source, and wherein the blend comprises boron and silicon in a ratio of boron to silicon within a range from

5 about 3:100 wt/wt to about 100:3 wt/wt.

8. An intermediate product according to claim 7, wherein the base metal has a thickness < 1 mm and the blend is applied on the base metal in an average amount less than 2.9 mg/mm<sup>2</sup>.

10

9. An intermediate product according to claim 7, wherein the base metal has a thickness ≥ 1 mm.

10. An intermediate product according to claim 7, 8 or 9, wherein the blend  
15 also comprises at least one binder selected from the group consisting of solvents, water, oils, gels, lacquers, varnish, binders based on monomers and/or polymers.

11. An intermediate product according to any one of claims 7 to 10, wherein  
20 the blend also comprises at least one binder selected from the group consisting of polyesters, polyethylene, polypropylene, acrylic polymers, met acrylic polymers, polyvinyl alcohol, polyvinyl acetate, polystyrene.

12. An intermediate product according to any one of claims 7 to 11, wherein  
25 the blend comprises particles having a particle size < 250 µm, preferably < 160 µm.

13. An intermediate product according to any one of claims 7 to 11, wherein the blend comprises particles having a particle size < 50 µm.

30

14. An intermediate product according to any one of claims 7 to 13, wherein the surface layer is applied as a powder of the blend or by means selected from spray deposit, physical vapor deposition, or chemical vapor deposition.
- 5 15. An intermediate product according to any one of claims 7 to 14, wherein the base metal is selected from the group consisting of iron based alloys, nickel based alloys, chromium based alloys, and copper based alloys.
- 10 16. An intermediate product according to any one of claims 7 to 15, wherein the base metal comprises from about 15 to about 22 wt% chromium, from about 8 to about 22 wt% nickel, from about 0 to about 3 wt% manganese, from about 0 to about 1.5 wt% silicon, optionally from about 1 to about 8 wt% molybdenum, and balanced with iron.
- 15 17. An intermediate product according to any one of claims 7 to 16, wherein the boron source is selected within the group consisting of boron, B<sub>4</sub>C, B<sub>4</sub>Si, NiB, and FeB, and the silicon source is selected within the group consisting of silicon, FeSi, SiC, and B<sub>4</sub>Si.
- 20 18. An intermediate product according to any one of claims 7 to 17, wherein the surface layer of the blend is provided on at least one side of a plate or the surface layer of the blend is on both sides of a plate.
- 25 19. An intermediate product according to any one of claims 7 to 18, wherein the base metal and the surface layer have been exposed to a temperature higher than the solidus temperature of the formed brazing alloy and lower than the solidus temperature of the base metal, and a layer of the brazing alloy has been formed on the base metal surface.
- 30 20. An intermediate product according to any one of claims 7 to 19, wherein the plates are cut, formed, pressed or combinations thereof before the

application of the surface layer, after the application of the surface layer or after forming the brazing alloy on the surface of the base metal.

21. A stacked intermediate product for brazing comprising an intermediate

5 product according to any one of claims 7 to 20, wherein the plates are stacked that the surface layers of the plates are either in contact with a base metal or with another surface layer on another plate.

22. A stacked intermediate product according to claim 21, wherein the stacked

10 plates have no surface layers, single surface layers i.e. on one side of the plate, double surface layers, i.e. one layer on each side of the plate, and/or combinations thereof.

23. An assembled intermediate product for brazing comprising one or more

15 intermediate products according to any one of claims 7 to 20, wherein at least one intermediate product has a thickness  $\geq 1$  mm, and wherein the assembled intermediate product has at least one surface layer in contact with a surface of at least one base metal or in contact with at least one surface layer before brazing, and after brazing brazed joint(s) is (are) obtained.

20

24. A stacked brazed product or an assembled brazed product obtained by

brazing a stacked or an assembled intermediate product according to any one of claims 21 to 23, wherein the stacked or the assembled intermediate product is brazed at a temperature below 1250 °C, in a furnace in vacuum, in an inert 25 gas, in a reducing atmosphere, or combinations thereof forming brazed joints of brazing alloy between the stacked plates or between contact surfaces of the assembled intermediate product, which brazing alloy is formed in a melting process of the base metal and the blend, and the brazing alloy in melted form has been transported by capillary forces to the area of the joint mainly from 30 neighboring areas.

25. A method of brazing a product, which method comprises the following steps:

(i) applying a blend on plates or parts of products of a base metal, said base metal having a solidus temperature above 1040°C, the blend comprises boron

5 and silicon, the boron is selected from a boron source, and the silicon is selected from a silicon source, wherein the blend comprises boron and silicon in a ratio boron to silicon within a range from about 3:100 wt/wt to about 100:3 wt/wt, preferably within a range from about 5:100 wt/wt to about 1:1 wt/wt,

(ii) obtaining an intermediate product according to any one of claims 7 to 20;

10 (iii) optionally exposing the obtained intermediate product in step (ii) to a temperature higher than the solidus temperature of the forming brazing alloy and lower than the solidus temperature of the base metal, and forming a layer of the brazing alloy on the base metal surface;

(iv) assembling or stacking the product from step (ii) or step (iii) with one or

15 more products according to step (ii) or step (iii), or assembling or stacking the product with one or more parts having no blend of silicon and boron, and forming an assembled product or a stacked product;

(v) brazing the assembled or stacked product from step (iv) to a temperature below 1250 °C in a furnace in vacuum, in an inert gas, in a reducing

20 atmosphere or combinations thereof; and

(vi) obtaining a brazed product.

26. The method according to claim 25, wherein the brazed product obtained in step (vi) is provided with a joint(s) obtained by forming a brazing alloy in a

25 melting process of the base metal and the blend, and transporting by capillary forces the brazing alloy in melted form to the area of the joint mainly from neighboring areas.

27. The method according to anyone of claims 25 to 26, wherein step (iv) the

30 product from step (ii) or step (iii) is brazed to a base metal having thickness  $\geq 1$  mm, or brazed to a base metal having a thickness  $< 1$  mm, or brazed to one or more intermediate products according to any one of claims 7 to 20.

28. The method according to any one of claims 25 to 27, wherein the base metal has a thickness < 1 mm and the blend is applied on the base metal in an average amount less than 2.9 mg/mm<sup>2</sup> calculated on silicon and boron.

5

29. The method according to any one of claims 25 to 28, wherein the product from step (ii) or step (iii) is cut, formed, pressed or combinations thereof obtaining plates, preferably heat exchanger plates or reactor plates.

10 30. The method according to any one of claims 25 to 29, wherein the obtained brazed product is selected from the group consisting of heat exchangers, plate reactors, parts of reactors, parts of separators, parts of decanters, parts of pumps, parts of valves.

15 31. A brazed product obtained by the method according to any one of claims 25 to 30, wherein joint(s) of the brazed product is obtained by a brazing alloy, which brazing alloy is formed in a melting process of the base metal and the blend, and the brazing alloy in melted form has been transported by capillary forces to the area of the joint mainly from neighboring areas.

20

32. The brazed product obtained by the method according to any one of claims 25 to 31, wherein elements found in the brazing alloy apart from the base metal elements are Si, B and optionally C, and wherein the base metal has a solidus temperature above 1040 °C.

25

33. Use of an intermediate product according to any one of claims 7 to 20 for brazing of parts or products for heat exchangers, plate reactors, parts of reactors, parts of separators, parts of decanters, parts of pumps, parts of valves.

30

34. A pre-brazed product for brazing comprising plates and/or parts of products of a base metal having a solidus temperature above 1040°C, which

pre-brazed product is obtained by applying a surface layer of a blend on the the plates and/or the parts of products of the base metal, which blend comprises boron and silicon, the boron is selected from a boron source, and the silicon is selected from a silicon source, wherein the blend comprises boron and silicon in

5 a ratio boron to silicon within a range from about 3:100 wt/wt to about 100:3 wt/wt, preferably within a range from about 5:100 wt/wt to about 1:1 wt/wt, wherein the base metal and the surface layer has been exposed to a temperature higher than the solidus temperature of the formed brazing alloy and lower than the solidus temperature of the base metal, and an obtained

10 layer of the brazing alloy is on the surface of the plates and/or the parts of products of base metal.

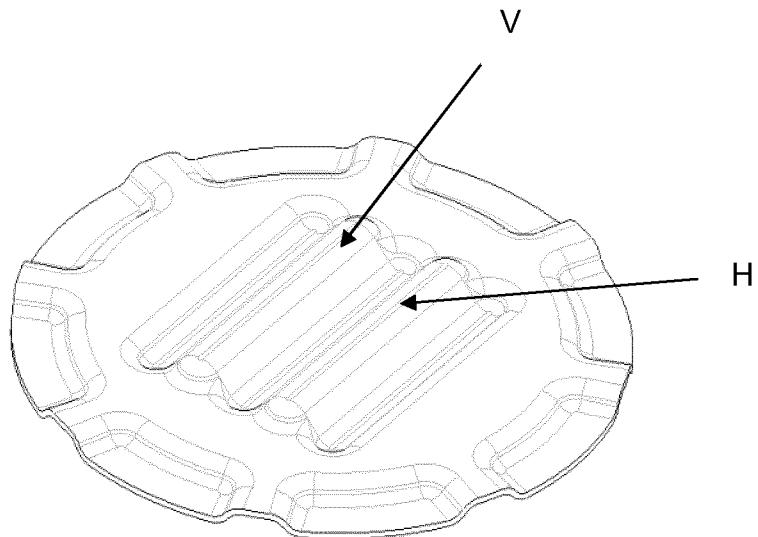


Figure 1



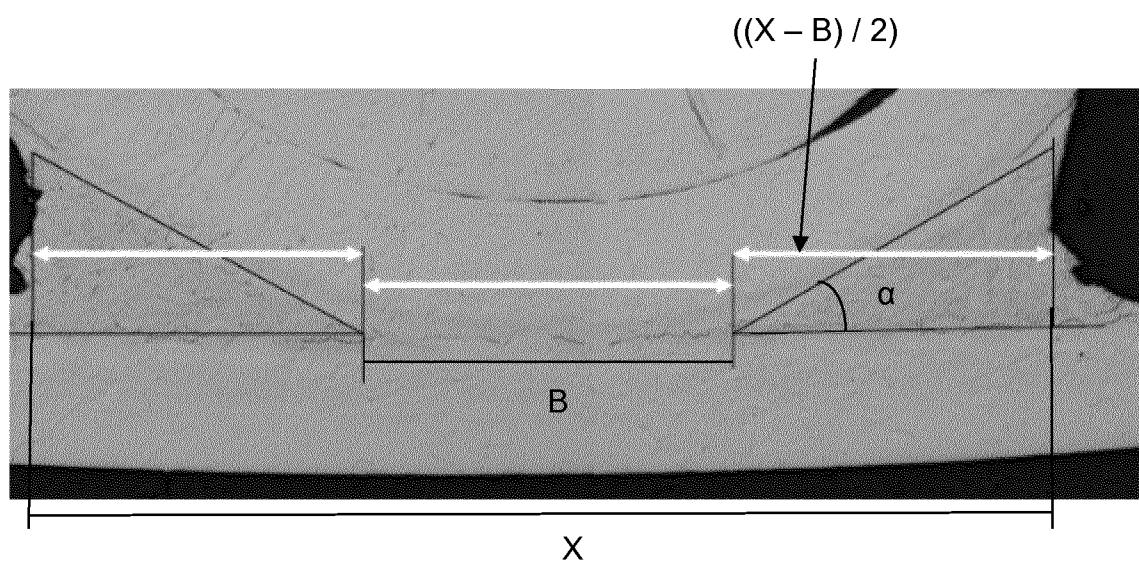


Figure 2

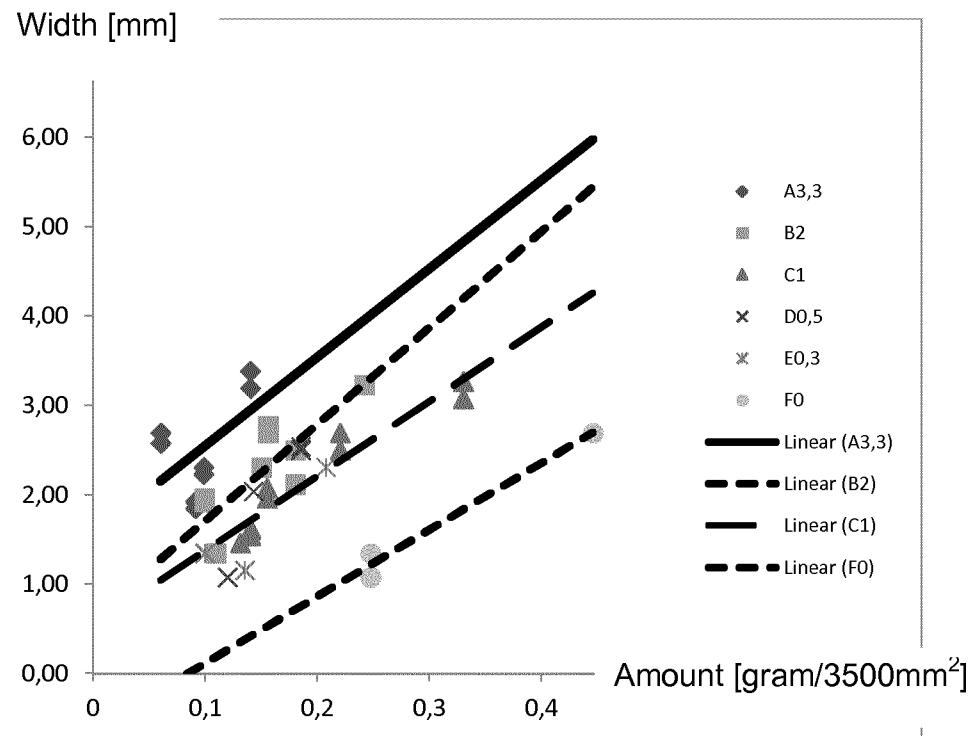

### Figure 3

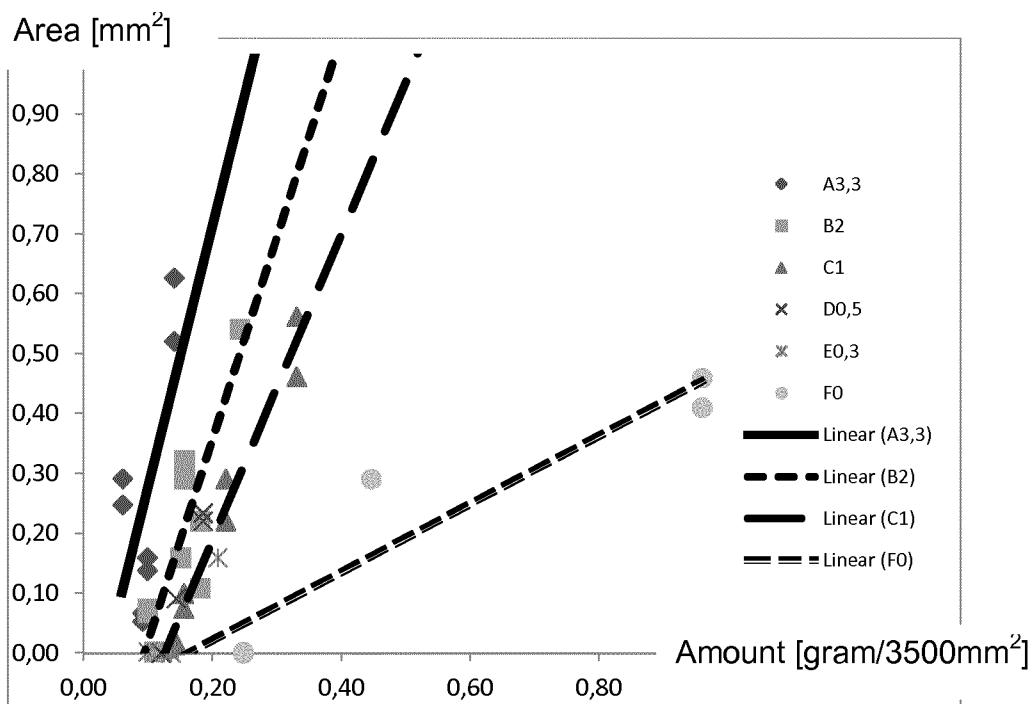

### Figure 4

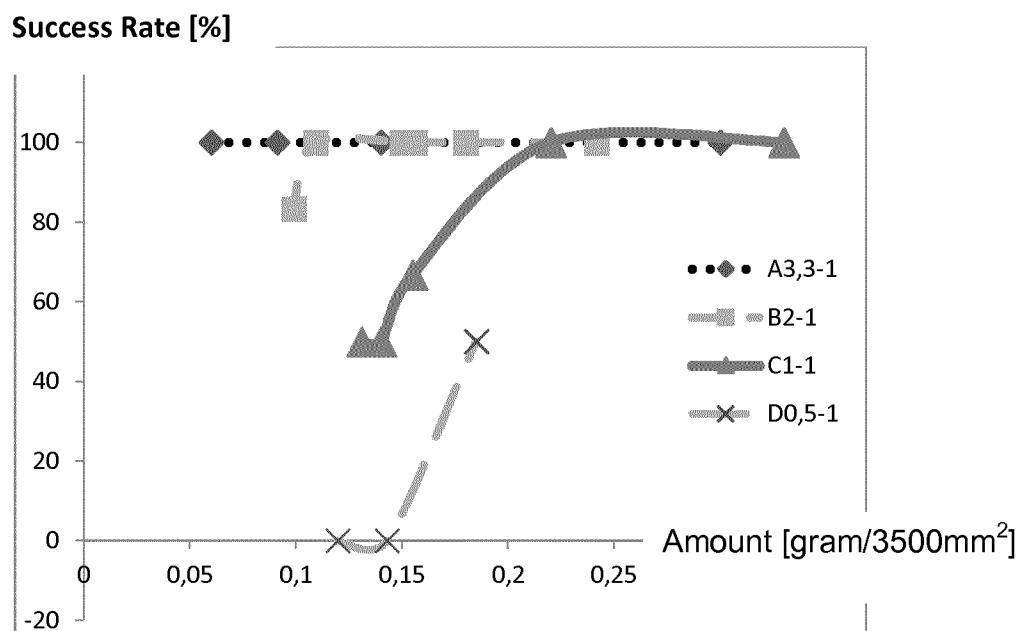


Figure 5

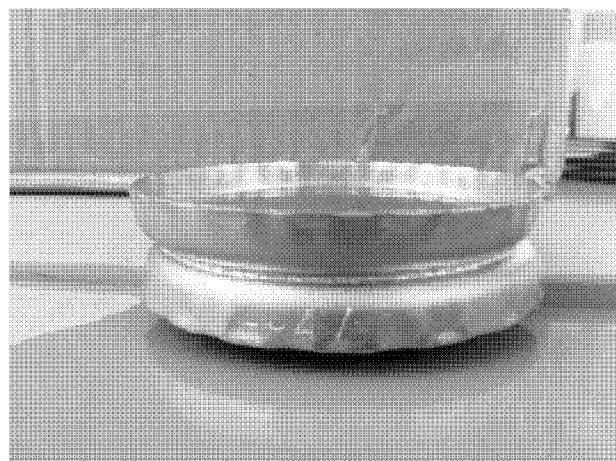


Figure 6

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/EP2013/056500

**A. CLASSIFICATION OF SUBJECT MATTER**  
INV. B23K35/00 B23K35/02 B23K35/365 C22C19/00  
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
B23K C22C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data, INSPEC

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2003/200835 A1 (MALIE ANDRE [FR] ET AL) 30 October 2003 (2003-10-30) page 1 - page 2; claims 1-4 -----	1-34
X	WO 2008/060225 A1 (ALFA LAVAL CORP AB [SE]; SJOEDIN PER [SE]) 22 May 2008 (2008-05-22) cited in the application page 2, line 23 - page 13, line 20; claims 1-16; table 1 -----	1-34
X	JP 2002 361479 A (SNECMA SERVICE) 18 December 2002 (2002-12-18) abstract ----- -/-	1-34

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance  
"E" earlier application or patent but published on or after the international filing date  
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  
"O" document referring to an oral disclosure, use, exhibition or other means  
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
11 July 2013	18/07/2013
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer  Chebeleu, Alice

## INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2013/056500

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 614 296 A (LESGOURGUES JACQUES [FR]) 30 September 1986 (1986-09-30) column 3 - column 4; claims 1-8; examples 1-6 -----	1-34
A	WO 2008/060226 A2 (ALFA LAVAL CORP AB [SE]; SJOEDIN PER [SE]) 22 May 2008 (2008-05-22) cited in the application page 3, line 25 - page 12, line 15; claims 1-16; examples 1-3 -----	1-34
A	US 2010/215983 A1 (PATEL VAISHALIBAHEN BHAGWANBHAI [US] ET AL) 26 August 2010 (2010-08-26) the whole document -----	1-34
A	US 6 109 505 A (MALIE ANDREHUBERT LOUIS [FR] ET AL) 29 August 2000 (2000-08-29) the whole document -----	1-34
A	EP 1 982 781 A1 (UNITED TECHNOLOGIES CORP [US]) 22 October 2008 (2008-10-22) the whole document -----	1-34

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2013/056500

Patent document cited in search report		Publication date	Patent family member(s)			Publication date
US 2003200835	A1	30-10-2003	NONE			
WO 2008060225	A1	22-05-2008	AU 2007320099 A1		22-05-2008	
			CA 2669961 A1		22-05-2008	
			CN 101588890 A		25-11-2009	
			EP 2081730 A1		29-07-2009	
			JP 2010510067 A		02-04-2010	
			KR 20090084942 A		05-08-2009	
			RU 2009122975 A		27-12-2010	
			SE 0602466 A		18-05-2008	
			US 2009305078 A1		10-12-2009	
			WO 2008060225 A1		22-05-2008	
JP 2002361479	A	18-12-2002	AT 361810 T		15-06-2007	
			CA 2378632 A1		29-09-2002	
			DE 60219982 T2		17-01-2008	
			EP 1245327 A1		02-10-2002	
			FR 2822741 A1		04-10-2002	
			JP 2002361479 A		18-12-2002	
			NO 20021545 A		30-09-2002	
US 4614296	A	30-09-1986	CA 1197399 A1		03-12-1985	
			DE 3267601 D1		02-01-1986	
			EP 0075497 A1		30-03-1983	
			FR 2511908 A1		04-03-1983	
			JP H0147273 B2		13-10-1989	
			JP S5844962 A		16-03-1983	
			US 4614296 A		30-09-1986	
WO 2008060226	A2	22-05-2008	AU 2007320100 A1		22-05-2008	
			CA 2669098 A1		22-05-2008	
			CN 101605628 A		16-12-2009	
			EP 2094431 A2		02-09-2009	
			JP 2010510068 A		02-04-2010	
			KR 20090080137 A		23-07-2009	
			RU 2009122954 A		27-12-2010	
			SE 0602467 A		18-05-2008	
			US 2010055495 A1		04-03-2010	
			WO 2008060226 A2		22-05-2008	
US 2010215983	A1	26-08-2010	US 2010215983 A1		26-08-2010	
			WO 2010096420 A1		26-08-2010	
US 6109505	A	29-08-2000	AT 378143 T		15-11-2007	
			CA 2277357 A1		23-01-2000	
			DE 69937521 T2		18-09-2008	
			EP 0974418 A1		26-01-2000	
			FR 2781399 A1		28-01-2000	
			JP 3780124 B2		31-05-2006	
			JP 2000061653 A		29-02-2000	
			NO 993581 A		24-01-2000	
			US 6109505 A		29-08-2000	
EP 1982781	A1	22-10-2008	EP 1982781 A1		22-10-2008	
			US 2011180199 A1		28-07-2011	