



HU000033246T2

(19) **HU**(11) Lajstromszám: **E 033 246**(13) **T2****MAGYARORSZÁG**
Szellemi Tulajdon Nemzeti Hivatala**EURÓPAI SZABADALOM**
SZÖVEGÉNEK FORDÍTÁSA

- (21) Magyar ügyszám: **E 12 194636**
- (22) A bejelentés napja: **2008. 05. 08.**
- (96) Az európai bejelentés bejelentési száma:
EP 20080194636
- (97) Az európai bejelentés közzétételi adatai:
EP 2584728 A1 **2013. 04. 24.**
- (97) Az európai szabadalom megadásának meghirdetési adatai:
EP 2584728 B1 **2016. 11. 23.**
- (51) Int. Cl.: **H04L 1/06** (2006.01)
H04L 1/04 (2006.01)
H04B 7/06 (2006.01)
H04J 13/00 (2006.01)

(30) Elsőbbségi adatok: 924286 P 2007. 05. 08. US 896114 2007. 08. 29. US	(73) Jogosult(ak): Samsung Electronics Co., Ltd, Gyeonggi-do 443-742 (KR)
(72) Feltaláló(k): Khan, Farooq, Gyeonggi-do 443-742 (KR) Tsai, Jiann-an, Gyeonggi-do 443-742 (KR) Zhang, Jianzhong, Gyeonggi-do 443-742 (KR)	(74) Képviselő: Sworks Nemzetközi Szabadalmi Ügyvivői Iroda Kft., Budapest

- (54) **Többszörös antennák átviteli diverzitás sémája**

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.



(11) **EP 2 584 728 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
23.11.2016 Bulletin 2016/47

(51) Int Cl.:
H04L 1106 ^(2006.01) **H04L 1104** ^(2006.01)
H04B 7106 ^(2006.01) **H04J 13100** ^(2011.01)

(21) Application number: **12194636.2**

(22) Date of filing: **08.05.2008**

(54) **Multiple antennas transmit diversity scheme**

Schema für die Sendediversität von Mehrfachantennen

Schéma de diversité en émission d'antennes multiples

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT
RO SE SI SK TR**

(30) Priority: **08.05.2007 US 924286 P
29.08.2007 US 896114**

(43) Date of publication of application:
24.04.2013 Bulletin 2013/17

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
08008691.1 / 2 009 829

(73) Proprietor: **Samsung Electronics Co., Ltd
Gyeonggi-do 443-742 (KR)**

(72) Inventors:
• **Khan, Farooq
Gyeonggi-do 443-742 (KR)**
• **Tsai, Jiann-an
Gyeonggi-do 443-742 (KR)**
• **Zhang, Jianzhong
Gyeonggi-do 443-742 (KR)**

(74) Representative: **Grünecker Patent- und
Rechtsanwälte
PartG mbB
Leopoldstraße 4
80802 München (DE)**

(56) References cited:
• **CHAE C B ET AL: "Antenna Grouping for STC",
IEEE C802.16E-04/365R1, XX, XX, 29 August 2004
(2004-08-29), XP003011102,**
• **Samsung: "R1-072238. Transmit Diversity for
4-Tx Antenna", 3GPP RAN WG1 Archives May
2007 3GPP, 2 May 2007 (2007-05-02),
XP002578959, Retrieved from the Internet:
URL:http://list.etsi.org/scripts/wa.exe?A1=ind0705&L=3gpp_tsg_ran_wg1&D=0&H=0&O=A&T=0
• **WOJCIECH TADEJ ET AL: "A Concise Guide to
Complex Hadamard Matrices", OPEN SYSTEMS
AND INFORMATION DYNAMICS, KLUWER
ACADEMIC PUBLISHERS, DO LNKD-
DOI:10.1007/S11080-006-8220-2, vol. 13, no. 2, 1
June 2006 (2006-06-01), pages 133-177,
XP019404900, ISSN: 1573-1324****

EP 2 584 728 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

5 **Field of the Invention**

[0001] The present invention relates to a method for transmitting data in a communication system, and more specifically, a process and circuits for transmitting information using multiple antennas transmission diversity scheme.

10 **Description of the Related Art**

[0002] A typical cellular radio system includes a number of fixed base stations and a number of mobile stations. Each base station covers a geographical area, which is defined as a cell.

15 **[0003]** Typically, a non-line-of-sight (NLOS) radio propagation path exists between a base station and a mobile station due to natural and man-made objects disposed between the base station and the mobile station. As a consequence, radio waves propagate while experiencing reflections, diffractions and scattering. The radio wave which arrives at the antenna of the mobile station in a downlink direction, or at the antenna of the base station in an uplink direction, experiences constructive and destructive additions because of different phases of individual waves generated due to the reflections, diffractions, scattering and out-of-phase recombination. This is due to the fact that, at high carrier frequencies typically
20 used in a contemporary cellular wireless communication, small changes in differential propagation delays introduces large changes in the phases of the individual waves. If the mobile station is moving or there are changes in the scattering environment, then the spatial variations in the amplitude and phase of the composite received signal will manifest themselves as the time variations known as Rayleigh fading or fast fading attributable to multipath reception. The time-varying nature of the wireless channel require very high signal-to-noise ratio (SNR) in order to provide desired bit error
25 or packet error reliability.

[0004] The scheme of diversity is widely used to combat the effect of fast fading by providing a receiver with multiple faded replicas of the same information-bearing signal.

30 **[0005]** The schemes of diversity in general fall into the following categories: space, angle, polarization, field, frequency, time and multipath diversity. Space diversity can be achieved by using multiple transmit or receive antennas. The spatial separation between the multiple antennas is chosen so that the diversity branches, i.e., the signals transmitted from the multiple antennas, experience fading with little or no correlation. Transmit diversity, which is one type of space diversity, uses multiple transmission antennas to provide the receiver with multiple uncorrelated replicas of the same signal. Transmission diversity schemes can further be divided into open loop transmit diversity and closed-loop transmission diversity schemes. In the open loop transmit diversity approach no feedback is required from the receiver. In one type
35 of closed loop transmit diversity, a receiver knows an arrangement of transmission antennas, computes a phase and amplitude adjustment that should be applied at the transmitter antennas in order to maximize a power of the signal received at the receiver. In another arrangement of closed loop transmit diversity referred to as selection transmit diversity (STD), the receiver provides feedback information to the transmitter regarding which antenna(s) to be used for transmission.

40 **[0006]** An example of open-loop transmission diversity scheme is the Alamouti 2×1 space-time diversity scheme. The Alamouti 2×1 space-time diversity scheme contemplates transmitting a Alamouti 2×2 block code using two transmission antennas using either two time slots (i.e., Space Time Block Code (STBC) transmit diversity) or two frequency subcarriers (i.e., Space Frequency Block Code (SFBC) transmit diversity).

45 **[0007]** One limitation of Alamouti 2×1 space-time diversity scheme is that this scheme can only be applied to two transmission antennas. In order to transmit data using four transmission antennas, a Frequency Switched Transmit Diversity (FSTD) or a Time Switched Transmit Diversity (TSTD) is combined with block codes. In case of combined SFBC+FSTD scheme or STBC+TSTD scheme, the matrix of the transmitted symbols from the four transmission antennas may be given as:

50

$$\begin{bmatrix} T_{11} & T_{12} & T_{13} & T_{14} \\ T_{21} & T_{22} & T_{23} & T_{24} \\ T_{31} & T_{32} & T_{33} & T_{34} \\ T_{41} & T_{42} & T_{43} & T_{44} \end{bmatrix} = \begin{bmatrix} S_1 & S_2 & 0 & 0 \\ -S_2^* & S_1^* & 0 & 0 \\ 0 & 0 & S_3 & S_4 \\ 0 & 0 & -S_4^* & S_3^* \end{bmatrix} \quad (1)$$

55

where T_{ij} represents symbol transmitted on the i th antenna and the j th subcarrier or j th time slot, and $i = 1,2,3,4$, $j = 1,2,3,4$ for the case of four transmission antennas, where S_1 , S_2 , S_3 and S_4 are symbols to be transmitted.

[0008] The problem with combined SFBC+FSTD scheme and STBC+TSTD schemes is that only a fraction of the total transmission antennas and hence power amplifier capability is used for transmission in a given frequency or time resource. This is indicated by '0' elements in the SFBC+FSTD and STBC+TSTD matrix given above. When the transmit power on the non-zero elements in the matrix is increased, bursty interference is generated to the neighboring cells degrading system performance. Generally, bursty interference manifests itself when certain phases of a frequency hopping pattern incur more interference than other phases.

[0009] The document "Antenna Grouping for STC", IEEE C802.16e-04/365r1, from Samsung Electronics, discloses an enhanced 4Tx transmission scheme with row exchange within a 4x4 time-space matrix.

SUMMARY OF THE INVENTION

[0010] It is therefore an object of the present invention to provide an improved method and transmitter circuit for transmitting data via multiple antennas.

[0011] It is another object to provide a method and transmitter circuit for transmitting data using multiple antennas transmission diversity scheme.

[0012] The present invention relates to apparatuses and methods to transmit and receive data according to the accompanying claims.

[0013] According to one aspect of the present invention, a method and transmitter circuit for data transmission is provided to modulate data to be transmitted into a plurality of modulated symbols, encode each pair of modulated symbols from among said plurality of symbols in accordance with a transmission diversity scheme to produce a plurality of 2 by 2 matrices, with each 2 by 2 matrix corresponding to each pair of modulated symbols, orthogonally spread the plurality of 2 by 2 matrices to generate an output matrix, and transmit the symbols in the output matrix via a plurality of antennas by using either a space time transmission diversity scheme, a space frequency transmission diversity scheme, or a combination of a space time transmission diversity scheme and a space frequency transmission diversity scheme.

[0014] The transmission diversity scheme may be an Alamouti diversity scheme, and each of the 2 by 2 matrices may be established by:

$$A = \frac{1}{\sqrt{2}} \begin{bmatrix} S_1 & S_2 \\ -S_2^* & S_1^* \end{bmatrix} \quad (2)$$

where S_1 and S_2 are one pair of the modulated symbols.

[0015] The orthogonal spreading of the plurality of 2 by 2 matrices may be performed according to an orthogonally spreading matrix selected from a group, comprising a Fourier matrix, a Hadamard matrix and a Zadoff-Chu sequence.

[0016] The step of orthogonally spreading the plurality of the 2 by 2 matrices may includes generating an M by M code matrix C comprising the plurality of the 2 by 2 matrices A_1 through A_n as the elements of the code matrix, with M corresponding to the number of the antennas, and the code matrix C being established by:

$$C = \begin{bmatrix} A_1 & A_1 & \dots & A_1 \\ A_2 & A_2 & \dots & A_2 \\ \vdots & \vdots & \ddots & \vdots \\ A_n & A_n & \dots & A_n \end{bmatrix} \quad (3)$$

where n is an integer between 0 and $N-1$, and $N=M/2$, generating an M by M spreading matrix which is a Kronecker product of an N by N orthogonally spreading matrix and an 2 by 2 matrix with all elements being 1, and orthogonally spreading the M by M code matrix C by an element-wise multiplication of the N by N code matrix C and the M by M spreading matrix to generating the N by N output matrix,

[0017] A selected pair of rows in the output matrix may be exchanged.

[0018] A selected pair of columns in the output matrix may be exchanged.

[0019] The exchanging of either the selected pair of rows or the selected pair of columns may be known by a receiver before receiving data from a transmitter.

[0020] According to another aspect of the present invention, a method for data transmission is provided to modulate data to be transmitted into a plurality of modulated symbols, encode each pair of modulated symbols from among said plurality of symbols in accordance with a transmission diversity scheme to result in a plurality of 2 by 2 matrices, with each 2 by 2 matrix corresponding to each pair of modulated symbols, generate an output matrix with the plurality of the 2 by 2 matrices as the elements of the output matrix, exchange either a selected pair of rows of the output matrix, or a

selected pair of columns of the output matrix, and transmit the symbols in the output matrix via a plurality of antennas by using either a space time transmission diversity scheme, a space frequency transmission diversity scheme, or a combination of a space time transmission diversity scheme and a space frequency transmission diversity scheme.

5 BRIEF DESCRIPTION OF THE DRAWINGS

[0021] A more complete appreciation of the invention, and many of the attendant advantages thereof, will be readily apparent as the same becomes better understood by reference to the following detailed description when considered in conjunction with the accompanying drawings in which like reference symbols indicate the same or similar components, wherein:

FIG. 1 is an illustration of an Orthogonal Frequency Division Multiplexing (OFDM) transceiver chain suitable for the practice of the principles of the present inventions;
 FIG. 2 is an illustration of a Space Time Block Code transmission diversity scheme for two transmission antennas;
 15 FIG. 3 is an illustration of a Space Frequency Block Code transmission diversity scheme for two transmission antennas;
 FIG. 4 is an illustration of an alternative Space Frequency Block Code transmission diversity scheme for two transmission antennas;
 FIG. 5 is an illustration of mapping of downlink reference signals in a contemporary 3rd Generation Partnership Project Long Term Evolution system;
 20 FIG. 6 is an illustration of a transmission diversity scheme for four transmission antennas according to a first embodiment of the principles of the present invention;
 FIG. 7 is an illustration of a transmission diversity scheme for four transmission antennas according to a second embodiment of the principles of the present invention;
 25 FIG. 8 is an illustration of a transmission diversity scheme for four transmission antennas according to a third embodiment of the principles of the present invention;
 FIG. 9 is an illustration of a column permutation embodiment practical according to the principles of the present invention, and
 FIG. 10 is an illustration of a transmitter constructed as an exemplary embodiment according to the principles of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0022] The present invention will be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. As those skilled in the art would realize, the described embodiments may be modified in various different ways, all without departing from the scope of the present invention.

[0023] FIG. 1 illustrates an Orthogonal Frequency Division Multiplexing (OFDM) transceiver chain. In a communication system using OFDM technology, at transmitter chain 110, control signals or data 111 is modulated by modulator 112 and is serial-to-parallel converted by Serial/Parallel (S/P) converter 113. Inverse Fast Fourier Transform (IFFT) unit 114 is used to transfer the signal from frequency domain to time domain. Cyclic prefix (CP) or zero prefix (ZP) is added to each OFDM symbol by CP insertion unit 116 to avoid or mitigate the impact due to multipath fading. Consequently, the signal is transmitted by transmitter (Tx) front end processing unit 117, such as an antenna (not shown), or alternatively, by fixed wire or cable. At receiver chain 120, assuming perfect time and frequency synchronization are achieved, the signal received by receiver (Rx) front end processing unit 121 is processed by CP removal unit 122. Fast Fourier Transform (FFT) unit 124 transfers the received signal from time domain to frequency domain for further processing.

[0024] The total bandwidth in an OFDM system is divided into narrowband frequency units called subcarriers. The number of subcarriers is equal to the FFT/IFFT size N used in the system. In general, the number of subcarriers used for data is less than N because some subcarriers at the edge of the frequency spectrum are reserved as guard subcarriers. In general, no information is transmitted on guard subcarriers.

[0025] The scheme of diversity is widely used to combat the effect of fast fading by providing a receiver with multiple faded replicas of the same information-bearing signal. An example of open-loop transmission diversity scheme is the Alamouti 2x1 space-time block code (STBC) transmission diversity scheme as illustrated in FIG. 2. In this approach, during any symbol period, i.e., time period, a transmitter transmits two data symbols via two transmission antennas to a receiver. As shown in FIG. 2, during the first symbol interval t_1 , symbols S_1 and S_2 are respectively transmitted via antennas ANT 1 and ANT 2. During the next symbol period t_2 , symbols $-S_2^*$ and S_1^* are respectively transmitted via antennas ANT 1 and ANT 2, where x^* represents complex conjugate of x . After receiving the signals, the receiver performs a plurality of processes to recover original symbols S_1 and S_2 . Note that the instantaneous channel gains g_1 and g_2 for ANT 1 and ANT 2, respectively, are required for processing at the receiver. Therefore, the transmitter needs

to transmit separate pilot symbols via both the antennas ANT 1 and ANT 2 for channel gain estimation at the receiver. The diversity gain achieved by Alamouti coding is the same as that achieved in Maximum Ratio Combining (MRC).

[0026] The 2x1 Alamouti scheme can also be implemented in a space-frequency block code (SFBC) transmission diversity scheme as illustrated in FIG. 3. As shown in FIG. 3, symbols \mathbf{S}_1 and \mathbf{S}_2 are respectively transmitted to a receiver via antennas ANT 1 and ANT 2 on a first subcarrier having frequency \mathbf{f}_1 in an Orthogonal Frequency Division Multiplexing (OFDM) system, symbols $-\mathbf{S}_2^*$ and \mathbf{S}_1^* are respectively transmitted via antennas ANT 1 and ANT 2 on a second subcarrier having frequency \mathbf{f}_2 . Therefore a matrix of transmitted symbols from antennas ANT 1 and ANT 2 can be written as:

$$\begin{bmatrix} T_{11} & T_{12} \\ T_{21} & T_{22} \end{bmatrix} = \begin{bmatrix} S_1 & -S_2^* \\ S_2 & S_1^* \end{bmatrix}, \quad (4)$$

[0027] The received signal at the receiver on subcarrier having frequency \mathbf{f}_1 is \mathbf{r}_1 , and the received signal at the receiver on subcarrier having frequency \mathbf{f}_2 is \mathbf{r}_2 . \mathbf{r}_1 and \mathbf{r}_2 can be written as:

$$\begin{aligned} r_1 &= h_1 s_1 + h_2 s_2 + n_1 \\ r_2 &= -h_1 s_2^* + h_2 s_1^* + n_2 \end{aligned}, \quad (5)$$

where \mathbf{h}_1 and \mathbf{h}_2 are channel gains from ANT 1 and ANT 2 respectively. We also assume that the channel from a given antennas does not change between subcarrier having frequency \mathbf{f}_1 and subcarrier having frequency \mathbf{f}_2 . The receiver performs equalization on the received signals and combines the two received signals (\mathbf{r}_1 and \mathbf{r}_2) to recover the symbols \mathbf{S}_1 and \mathbf{S}_2 . The recovered symbols $\hat{\mathbf{S}}_1$ and $\hat{\mathbf{S}}_2$ can be written as:

$$\begin{aligned} \hat{s}_1 &= h_1^* r_1 + h_2 r_2^* \\ &= h_1^* (h_1 s_1 + h_2 s_2 + n_1) + h_2 (-h_1 s_2^* + h_2 s_1^* + n_2)^* \\ &= (|h_1|^2 + |h_2|^2) s_1 + h_1^* n_1 + h_2 n_2^* \\ \hat{s}_2 &= h_2^* r_1 + h_1 r_2^* \\ &= h_2^* (h_1 s_1 + h_2 s_2 + n_1) + h_1 (-h_1 s_2^* + h_2 s_1^* + n_2)^* \\ &= (|h_1|^2 + |h_2|^2) s_2 + h_2^* n_1 + h_1 n_2^* \end{aligned} \quad (6)$$

[0028] It can be seen that both of the transmitted symbols $\hat{\mathbf{S}}_1$ and $\hat{\mathbf{S}}_2$ achieve full spatial diversity, that is, the each of the transmitted symbols $\hat{\mathbf{S}}_1$ and $\hat{\mathbf{S}}_2$ completely removes an interference from the other one:

[0029] An alternative mapping for two transmission antennas SFBC scheme is shown in FIG. 4. A matrix of transmitted symbols from antennas ANT 1 and ANT 2 can be written as:

$$\begin{bmatrix} T_{11} & T_{12} \\ T_{21} & T_{22} \end{bmatrix} = \begin{bmatrix} S_1 & S_2 \\ -S_2^* & S_1^* \end{bmatrix}, \quad (7)$$

[0030] The transmit matrix in Equation (7) for the scheme in FIG. 4 is a transpose of the transmit matrix in Equation (4) for the scheme shown in FIG. 3.

[0031] Other proposals found in the art for four transmission antennas transmit diversity combines Frequency Switched Transmit Diversity (FSTD) or Time Switched Transmit Diversity (TSTD) with block codes. In case of combined SF-BC+FSTD scheme or STBC+TSTD scheme, the matrix of the transmitted symbols from the four transmission antennas are given as:

$$\begin{bmatrix} T_{11} & T_{12} & T_{13} & T_{14} \\ T_{21} & T_{22} & T_{23} & T_{24} \\ T_{31} & T_{32} & T_{33} & T_{34} \\ T_{41} & T_{42} & T_{43} & T_{44} \end{bmatrix} = \begin{bmatrix} S_1 & S_2 & 0 & 0 \\ -S_2^* & S_1^* & 0 & 0 \\ 0 & 0 & S_3 & S_4 \\ 0 & 0 & -S_4^* & S_3^* \end{bmatrix} \quad (8)$$

where T_{ij} represents symbol transmitted on the i th antenna and the j th subcarrier or j th time slot, and $i = 1,2,3,4$, $j = 1,2,3,4$ for the case of four transmission antennas. A and B are block codes given as below.

$$A = \frac{1}{\sqrt{2}} \begin{bmatrix} S_1 & S_2 \\ -S_2^* & S_1^* \end{bmatrix}$$

$$B = \frac{1}{\sqrt{2}} \begin{bmatrix} S_3 & S_4 \\ -S_4^* & S_3^* \end{bmatrix} \quad (9)$$

[0032] An equivalent representation of the above SFBC+FSTD transmit signal given in equation (1) exists in the following form. Let the transmit signal vector $y(i) = [y^{(0)}(i) y^{(1)}(i) y^{(2)}(i) y^{(3)}(i)]^T$ denote the transmit signal vector on four transmit antennas for the i th subcarrier. The transmit signal generated from the SFBC+FSTD scheme in (1) can be equivalently written as follows, assuming the transmit signal is mapped to the four consecutive subcarriers $4i, 4i+1, 4i+2, 4i+3$:

$$\begin{bmatrix} y^{(0)}(4i) \\ y^{(1)}(4i) \\ y^{(2)}(4i) \\ y^{(3)}(4i) \\ y^{(0)}(4i+1) \\ y^{(1)}(4i+1) \\ y^{(2)}(4i+1) \\ y^{(3)}(4i+1) \\ y^{(0)}(4i+2) \\ y^{(1)}(4i+2) \\ y^{(2)}(4i+2) \\ y^{(3)}(4i+2) \\ y^{(0)}(4i+3) \\ y^{(1)}(4i+3) \\ y^{(2)}(4i+3) \\ y^{(3)}(4i+3) \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 & j & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & j & 0 & 0 \\ 1 & 0 & 0 & 0 & -j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & j & 0 \\ 0 & 0 & 0 & -1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & j \\ 0 & 0 & 1 & 0 & 0 & 0 & -j & 0 \end{bmatrix} \times \begin{bmatrix} \text{Re}(S_1(i)) \\ \text{Re}(S_2(i)) \\ \text{Re}(S_3(i)) \\ \text{Re}(S_4(i)) \\ \text{Im}(S_1(i)) \\ \text{Im}(S_2(i)) \\ \text{Im}(S_3(i)) \\ \text{Im}(S_4(i)) \end{bmatrix} \quad (10)$$

where each of $S_1(i), S_2(i), S_3(i), S_4(i)$ is a functions of index i .

[0033] The problem with combined SFBC+FSTD scheme and STBC+TSTD schemes is that only a fraction of the total transmission antennas and hence power amplifier (PA) capability is used for transmission in a given frequency or time resource. This is indicated by '0' elements in the SFBC+FSTD and STBC+TSTD matrix given above. When the transmit power on the non-zero elements in the matrix is increased, bursty interference is generated to the neighboring cells degrading system performance.

[0034] The downlink reference signals mapping for four transmission antennas in the 3GPP LTE (3rd Generation Partnership Project Long Term Evolution) system is shown in FIG. 5. The notation R_p is used to denote a resource element used for reference signal transmission on antenna port p . It can be noted that density on antenna ports 2 and 3 is half the density on antenna ports 0 and 1. This leads to weaker channel estimates on antenna ports 2 and 3 relative to channel estimates on antenna ports 0 and 1.

[0035] In the current invention we describe an open-loop transmission diversity scheme where Alamouti block code is spread with an orthogonal function to provide diversity for transmissions via more than two transmission antennas. We will describe the invention assuming a Fourier matrix. It should be noted that the principles of the current invention can be easily extended and applied to the cases of other orthogonal functions such as Hadamard function or Zadoff-Chu (ZC) sequences.

[0036] A Fourier matrix is a $N \times N$ square matrix with entries given by:

$$P_N = e^{j2\pi mn/N} \quad m, n = 0, 1, \dots, (N-1) \quad (11)$$

[0037] For example, a 2x2 Fourier matrix can be expressed as:

$$P_2 = \begin{bmatrix} 1 & 1 \\ 1 & e^{j\pi} \end{bmatrix} = \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix} \quad (12)$$

[0038] Similarly, a 4x4 Fourier matrix can be expressed as:

$$P_4 = \begin{bmatrix} 1 & 1 & 1 & 1 \\ 1 & e^{j\pi/2} & e^{j\pi} & e^{j3\pi/2} \\ 1 & e^{j\pi} & e^{j2\pi} & e^{j3\pi} \\ 1 & e^{j3\pi/2} & e^{j3\pi} & e^{j9\pi/2} \end{bmatrix} = \begin{bmatrix} 1 & 1 & 1 & 1 \\ 1 & j & -1 & -j \\ 1 & -1 & 1 & -1 \\ 1 & -j & -1 & j \end{bmatrix} \quad (13)$$

[0039] Multiple Fourier matrices can be defined by introducing a shift parameter (g/G) in the Fourier matrix. The entry of the multiple Fourier matrices is given by:

$$P_{mn} = e^{j2\pi \frac{m}{N} \left(n + \frac{g}{G} \right)} \quad m, n = 0, 1, \dots, (N-1) \quad (14)$$

[0040] A set of four 2x2 Fourier matrices can be defined by taking G=4, and g=0, 1, 2 and 3 are written as:

$$P_2^0 = \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix} \quad (15)$$

$$P_2^1 = \begin{bmatrix} 1 & 1 \\ e^{j\pi/4} & -e^{j\pi/4} \end{bmatrix} \quad (16)$$

$$P_2^2 = \begin{bmatrix} 1 & 1 \\ e^{j\pi/2} & -e^{j\pi/2} \end{bmatrix} \quad (17)$$

$$P_2^3 = \begin{bmatrix} 1 & 1 \\ e^{j3\pi/4} & -e^{j3\pi/4} \end{bmatrix} \quad (18)$$

[0041] Note that in addition to the set of four Fourier matrices listed above, we can also apply row or column permuted versions of these set of Fourier matrices. For example, the row and column permutations of the matrix P_2^0 is given by:

$$P_2^5 = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 1 \\ -1 & 1 \end{bmatrix}, \quad P_2^6 = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & -1 \\ 1 & 1 \end{bmatrix} \quad (19)$$

[0042] For each Fourier matrix, there are two permuted versions. So the total number of the spread matrix P is 12.

[0043] In a k-th Zadoff-Chu sequence, an n-th entry $c_k(n)$ of the k-th Zadoff-Chu sequence can be expressed as:

$$c_x(n) = e^{j2\pi k \frac{n(n+1)/2 + qn}{L}} \text{ where } L \text{ is a positive odd integer}$$

$$c_x(n) = e^{j2\pi k \frac{n^2/2 + qn}{L}} \text{ where } L \text{ is a positive even integer} \quad (20)$$

where k is an integer which is relatively prime with L, and q is an integer.

[0044] A Hadamard matrix of order n is a solution to Hadamard's matrimum determinant problem. An equivalent definition of the Hadamard matrices is given by:

$$H_n H_n^T = nI_n \quad (21)$$

where In is an n × n identity matrix.

[0045] For example, a Hadamard matrix of order 4 can be expresses as:

$$H_4 = \begin{bmatrix} 1 & 1 & 1 & 1 \\ 1 & -1 & 1 & -1 \\ 1 & 1 & -1 & -1 \\ 1 & -1 & -1 & 1 \end{bmatrix} \quad (22)$$

[0046] In a first embodiment according to the principles of the present invention, we assume that four symbols **S**₁, **S**₂, **S**₃ and **S**₄ are transmitted on four subcarriers using four transmission antennas. Let us define matrix A and B as below.

$$A = \frac{1}{\sqrt{2}} \begin{bmatrix} S_1 & S_2 \\ -S_2^* & S_1^* \end{bmatrix}$$

$$B = \frac{1}{\sqrt{2}} \begin{bmatrix} S_3 & S_4 \\ -S_4^* & S_3^* \end{bmatrix} \quad (23)$$

[0047] It can be seen that each matrix A and B is an Alamouti code for the pair of symbols **S**₁ and **S**₂, and the pair of symbols **S**₃ and **S**₄, respectively. We construct a 2 x 2 matrix with A and B as its elements and perform an element-by-element multiplication with an expanded 2 x 2 Fourier matrix as below. Note that the operator * denotes element-wise multiplication and 0 denotes kronecker product.

$$T_i = \frac{1}{\sqrt{2}} \begin{bmatrix} A & A \\ B & B \end{bmatrix} \cdot * \left(P_2^i \otimes \begin{bmatrix} 1 & 1 \\ 1 & 1 \end{bmatrix} \right), \text{ for } i=1, \dots, 12. \quad (24)$$

[0048] For i = 0 case, the resulting 4x4 matrix denoting discrete Fourier transform DFT-spread SFBC or DFT-spread STBC is given as below.

$$\begin{aligned}
 T_0 &= \frac{1}{\sqrt{2}} \begin{bmatrix} A & A \\ B & B \end{bmatrix} \cdot * \left(P_2^0 \otimes \begin{bmatrix} 1 & 1 \\ 1 & 1 \end{bmatrix} \right) \\
 &= \frac{1}{\sqrt{2}} \begin{bmatrix} A & A \\ B & B \end{bmatrix} \cdot * \left(\frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix} \otimes \begin{bmatrix} 1 & 1 \\ 1 & 1 \end{bmatrix} \right) \\
 &= \frac{1}{\sqrt{4}} \begin{bmatrix} S_1 & S_2 & S_1 & S_2 \\ -S_2^* & S_1^* & -S_2^* & S_1^* \\ S_3 & S_4 & -S_3 & -S_4 \\ -S_4^* & S_3^* & S_4^* & -S_3^* \end{bmatrix}
 \end{aligned} \tag{25}$$

[0049] For the case where the spreading matrix is a permuted version of the Fourier matrix, for example, for $i=5$, we have

$$\begin{aligned}
 T_5 &= \frac{1}{\sqrt{2}} \begin{bmatrix} A & A \\ B & B \end{bmatrix} \cdot * \left(P_2^5 \otimes \begin{bmatrix} 1 & 1 \\ 1 & 1 \end{bmatrix} \right) \\
 &= \frac{1}{\sqrt{2}} \begin{bmatrix} A & A \\ B & B \end{bmatrix} \cdot * \left(\frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 1 \\ -1 & 1 \end{bmatrix} \otimes \begin{bmatrix} 1 & 1 \\ 1 & 1 \end{bmatrix} \right) \\
 &= \frac{1}{\sqrt{4}} \begin{bmatrix} S_1 & S_2 & S_1 & S_2 \\ -S_2^* & S_1^* & -S_2^* & S_1^* \\ -S_3 & -S_4 & S_3 & S_4 \\ S_4^* & -S_3^* & -S_4^* & S_3^* \end{bmatrix}
 \end{aligned} \tag{26}$$

[0050] For a given matrix (for example matrix T_0), the element on row m , column n is denoted by $[T_0]_{m,n}$ and $[T_0]_{m,n}$ represents the symbol transmitted on the m th antenna and the n th subcarrier or n th time slot, $m = 1, 2, 3, 4$ and $n = 1, 2, 3, 4$ for the case of four transmission antennas. FIG. 6 is an illustration of the transmission diversity scheme for four transmission antennas and four time slots according to the first embodiment of the principles of the present invention.

[0051] It can be noted that the same principle can be applied to the case where the 4x4 matrix transmission is over a mix of subcarriers and time slots. For example, the four elements (index n) can be constructed with 2 subcarriers and 2 time slots.

[0052] In a second embodiment according to the principles of the present invention, we exchange the second row and the third row of T_i , thus resulting in a new SFBC matrix called $T_{i,r}$. $T_{i,r}$ is useful for evening out pilot-density disparity inherent in the reference signal structure of the LTE system. For example, $T_{0,r}$ is given by the following.

$$T_{0,r} = \frac{1}{\sqrt{4}} \begin{bmatrix} S_1 & S_2 & S_1 & S_2 \\ S_3 & S_4 & -S_3 & -S_4 \\ -S_2^* & S_1^* & -S_2^* & S_1^* \\ -S_4^* & S_3^* & S_4^* & -S_3^* \end{bmatrix} \tag{27}$$

[0053] FIG. 7 is an illustration of the transmission diversity scheme for four transmission antennas and four time slots according to the second embodiment of the principles of the present invention.

[0054] In a third embodiment according to the principles of the present invention, we propose to exchange the second and the third row of the SFBC-FSTD matrix as expressed in Equation (8), thus resulting in new SFBC matrix as expressed in the following Equation (28). By this operation, symbols S_1 and S_2 are transmitted over antennas ports 0 and 2 while symbols S_3 and S_4 are transmitted over antenna ports 1 and 3 as given by the transmit matrix below. Again, this is useful for evening out pilot-density disparity inherent in the reference signal structure of the LTE system.

$$\begin{bmatrix} S_1 & S_2 & 0 & 0 \\ 0 & 0 & S_3 & S_4 \\ -S_2^* & S_1^* & 0 & 0 \\ 0 & 0 & -S_4^* & S_3^* \end{bmatrix} \quad (28)$$

[0055] FIG. 8 is an illustration of the transmission diversity scheme for four transmission antennas and four time slots according to the third embodiment of the principles of the present invention.

[0056] In a fourth embodiment according to the principles of the present invention, we switch the second and third columns of matrix T_5 , thus resulting in a new matrix expressed in the following Equation (29):

$$T_P = \frac{1}{\sqrt{4}} \begin{bmatrix} S_1 & S_1 & S_2 & S_2 \\ -S_2^* & -S_2^* & S_1^* & S_1^* \\ -S_3 & S_3 & -S_4 & S_4 \\ S_4^* & -S_4^* & -S_3^* & S_3^* \end{bmatrix} \quad (29)$$

[0057] An example of column permutation according to the principles of the current invention is given in FIG. 9. In step S301, output matrix T_5 is generated according the method described in the first embodiment of the present invention. In step S302, the second column and the third column of output matrix T_5 is exchanged (i.e., permuted) to generate a new output matrix T_P . In step S303, the symbols in output matrix T_P is transmitted via multiple antennas.

[0058] It should be noted that the principles of the current invention also apply to the cases where columns other than the second and the third column are switched. Also, the base station can perform column switching in a predetermined fashion which is known to the user equipment. It is also possible to always use the fixed permuted matrix T_P as shown in Equation (29).

[0059] FIG. 10 is an illustration of a transmitter constructed as an exemplary embodiment according to the principles of the present invention. Transmitter 200 is constructed with a modulator 210, a precoding unit 220, a spreading unit 230 and a plurality of antennas 240. Modulator 210 modulates data to be transmitted into a plurality of modulated symbols. Precoding unit 220 encodes each pair of modulated symbols from among said plurality of symbols in accordance with a transmission diversity scheme to result in a plurality of 2 by 2 matrices. Here, each 2 by 2 matrix corresponds to each pair of modulated symbols. Spreading unit 230 orthogonally spreads the plurality of 2 by 2 matrices to generate an output matrix. The symbols in the output matrix is transmitted through the plurality of antennas 240 by using either a space time transmission diversity scheme, a space frequency transmission diversity scheme, or a combination of a space time transmission diversity scheme and a space frequency transmission diversity scheme.

Claims

1. A method for transmitting data, the method comprising:

modulating data to be transmitted into a plurality of modulated symbols; and
transmitting the plurality of modulated symbols according to an output matrix via a plurality of antennas through a plurality of frequency subcarriers,
wherein a first symbol and a second symbol are transmitted via a first antenna through a first frequency subcarrier and a second frequency subcarrier respectively, a third symbol and a fourth symbol are transmitted via a second antenna through a third frequency subcarrier and a fourth frequency subcarrier respectively, an inverse complex conjugate of the second symbol and a complex conjugate of the first symbol are transmitted via a third antenna through the first frequency subcarrier and the second frequency subcarrier respectively, and an inverse complex conjugate of the fourth symbol and a complex conjugate of the third symbol are transmitted via a fourth antenna through the third frequency subcarrier and the fourth frequency subcarrier respectively, and
wherein density of resource elements used for reference signal transmission on the third antenna and the fourth antenna is lower than density of resource elements used for reference signal transmission on the first antenna and the second antenna, wherein the output matrix is characterized:

5

$$\begin{bmatrix} S_1 & S_2 & 0 & 0 \\ 0 & 0 & S_3 & S_4 \\ -S_2^* & S_1^* & 0 & 0 \\ 0 & 0 & -S_4^* & S_3^* \end{bmatrix}$$

10

where S_1, S_2, S_3 and S_4 are the plurality of modulated symbols to be transmitted via the plurality of antennas.

2. The method as claimed in claim 1, wherein when the plurality of modulated symbols transmitted through the plurality of frequency subcarriers $4i, 4i+1, 4i+2$ and $4i+3$, the output matrix is characterized according to:

15

20

25

30

35

40

$$\begin{bmatrix} y^{(0)}(4i) \\ y^{(1)}(4i) \\ y^{(2)}(4i) \\ y^{(3)}(4i) \\ y^{(0)}(4i+1) \\ y^{(1)}(4i+1) \\ y^{(2)}(4i+1) \\ y^{(3)}(4i+1) \\ y^{(0)}(4i+2) \\ y^{(1)}(4i+2) \\ y^{(2)}(4i+2) \\ y^{(3)}(4i+2) \\ y^{(0)}(4i+3) \\ y^{(1)}(4i+3) \\ y^{(2)}(4i+3) \\ y^{(3)}(4i+3) \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 & j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & -j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & j & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & -1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & -j & 0 \end{bmatrix} \begin{bmatrix} \text{Re}(S_1(i)) \\ \text{Re}(S_2(i)) \\ \text{Re}(S_3(i)) \\ \text{Re}(S_4(i)) \\ \text{Im}(S_1(i)) \\ \text{Im}(S_2(i)) \\ \text{Im}(S_3(i)) \\ \text{Im}(S_4(i)) \end{bmatrix}$$

where $S_1(i), S_2(i), S_3(i)$ and $S_4(i)$ are the plurality of modulated symbols.

45

3. The method as claimed in claim 1, wherein density of resource elements used for reference signal transmission on the third antenna and the fourth antenna is half of density of resource elements used for reference signal transmission on the first antenna and the second antenna.

4. An apparatus for transmitting data, the apparatus comprising:

50

a modulator for modulating data to be transmitted into a plurality of modulated symbols; and
a transmitter for transmitting the plurality of modulated symbols according to an output matrix via a plurality of antennas through a plurality of frequency subcarriers,

55

wherein a first symbol and a second symbol are transmitted via a first antenna through a first frequency subcarrier and a second frequency subcarrier respectively, a third symbol and a fourth symbol are transmitted via a second antenna through a third frequency subcarrier and a fourth frequency subcarrier respectively, an inverse complex conjugate of the second symbol and a complex conjugate of the first symbol are transmitted via a third antenna through the first frequency subcarrier and the second frequency subcarrier respectively, and an inverse complex conjugate of the fourth symbol and a complex conjugate of the third symbol are transmitted via a fourth antenna through the third frequency subcarrier and the fourth frequency subcarrier respectively, and

wherein density of resource elements used for reference signal transmission on the third antenna and the fourth antenna is lower than density of resource elements used for reference signal transmission on the first antenna and the second antenna, wherein the output matrix is characterized:

5

10

$$\begin{bmatrix} S_1 & S_2 & 0 & 0 \\ 0 & 0 & S_3 & S_4 \\ -S_2^* & S_1^* & 0 & 0 \\ 0 & 0 & -S_4^* & S_3^* \end{bmatrix}$$

where S_1 , S_2 , S_3 and S_4 are the plurality of modulated symbols to be transmitted via the plurality of antennas.

15

5. The apparatus as claimed in claim 4, wherein when the plurality of modulated symbols transmitted through the plurality of frequency subcarriers $4i$, $4i+1$, $4i+2$ and $4i+3$, the output matrix is characterized according to:

20

25

30

35

40

$$\begin{bmatrix} y^{(0)}(4i) \\ y^{(1)}(4i) \\ y^{(2)}(4i) \\ y^{(3)}(4i) \\ y^{(0)}(4i+1) \\ y^{(1)}(4i+1) \\ y^{(2)}(4i+1) \\ y^{(3)}(4i+1) \\ y^{(0)}(4i+2) \\ y^{(1)}(4i+2) \\ y^{(2)}(4i+2) \\ y^{(3)}(4i+2) \\ y^{(0)}(4i+3) \\ y^{(1)}(4i+3) \\ y^{(2)}(4i+3) \\ y^{(3)}(4i+3) \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 & j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & -j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & j & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & -1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & -j & 0 \end{bmatrix} \begin{bmatrix} \text{Re}(S_1(i)) \\ \text{Re}(S_2(i)) \\ \text{Re}(S_3(i)) \\ \text{Re}(S_4(i)) \\ \text{Im}(S_1(i)) \\ \text{Im}(S_2(i)) \\ \text{Im}(S_3(i)) \\ \text{Im}(S_4(i)) \end{bmatrix}$$

45

where $S_1(i)$, $S_2(i)$, $S_3(i)$ and $S_4(i)$ are the plurality of modulated symbols.

50

6. The apparatus as claimed in claim 4, wherein density of resource elements used for reference signal transmission on the third antenna and the fourth antenna is half of density of resource elements used for reference signal transmission on the first antenna and the second antenna.

55

7. A method for receiving data, the method comprising:

receiving a plurality of symbols transmitted according to an output matrix via a plurality of antennas through a plurality of frequency subcarriers,

demodulating the plurality of symbols; and

wherein a first symbol and a second symbol are transmitted via a first antenna through a first frequency subcarrier and a second frequency subcarrier respectively, a third symbol and a fourth symbol are transmitted via a second antenna through a third frequency subcarrier and a fourth frequency subcarrier respectively, an inverse complex

conjugate of the second symbol and a complex conjugate of the first symbol are transmitted via a third antenna through the first frequency subcarrier and the second frequency subcarrier respectively, and an inverse complex conjugate of the fourth symbol and a complex conjugate of the third symbol are transmitted via a fourth antenna through the third frequency subcarrier and the fourth frequency subcarrier respectively, and
 5 wherein density of resource elements used for reference signal transmission on the third antenna and the fourth antenna is lower than density of resource elements used for reference signal transmission on the first antenna and the second antenna, and wherein the channel is estimated based on such reference signals, wherein the output matrix is characterized:

$$\begin{bmatrix} S_1 & S_2 & 0 & 0 \\ 0 & 0 & S_3 & S_4 \\ -S_2^* & S_1^* & 0 & 0 \\ 0 & 0 & -S_4^* & S_3^* \end{bmatrix}$$

where S_1, S_2, S_3 and S_4 are the plurality of symbols to be transmitted via the plurality of antennas.

8. The method as claimed in claim 7, wherein when the plurality of symbols transmitted through the plurality of frequency subcarriers $4i, 4i+1, 4i+2$ and $4i+3$, the output matrix is characterized according to:

$$\begin{bmatrix} y^{(0)}(4i) \\ y^{(1)}(4i) \\ y^{(2)}(4i) \\ y^{(3)}(4i) \\ y^{(0)}(4i+1) \\ y^{(1)}(4i+1) \\ y^{(2)}(4i+1) \\ y^{(3)}(4i+1) \\ y^{(0)}(4i+2) \\ y^{(1)}(4i+2) \\ y^{(2)}(4i+2) \\ y^{(3)}(4i+2) \\ y^{(0)}(4i+3) \\ y^{(1)}(4i+3) \\ y^{(2)}(4i+3) \\ y^{(3)}(4i+3) \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 & j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & -j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & j & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & -1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & -j & 0 \end{bmatrix} \begin{bmatrix} \text{Re}(S_1(i)) \\ \text{Re}(S_2(i)) \\ \text{Re}(S_3(i)) \\ \text{Re}(S_4(i)) \\ \text{Im}(S_1(i)) \\ \text{Im}(S_2(i)) \\ \text{Im}(S_3(i)) \\ \text{Im}(S_4(i)) \end{bmatrix}$$

where $S_1(i), S_2(i), S_3(i)$ and $S_4(i)$ are the plurality of symbols.

9. The method as claimed in claim 7, wherein density of resource elements used for reference signal transmission on the third antenna and the fourth antenna is half of density of resource elements used for reference signal transmission on the first antenna and the second antenna.

10. An apparatus for receiving data, the apparatus comprising:

a receiver for receiving a plurality of symbols transmitted according to an output matrix via a plurality of antennas

through a plurality of frequency subcarriers,
 a demodulator for demodulating the plurality of symbols; and
 wherein a first symbol and a second symbol are transmitted via a first antenna through a first frequency subcarrier
 and a second frequency subcarrier respectively, a third symbol and a fourth symbol are transmitted via a second
 antenna through a third frequency subcarrier and a fourth frequency subcarrier respectively, an inverse complex
 conjugate of the second symbol and a complex conjugate of the first symbol are transmitted via a third antenna
 through the first frequency subcarrier and the second frequency subcarrier respectively, and an inverse complex
 conjugate of the fourth symbol and a complex conjugate of the third symbol are transmitted via a fourth antenna
 through the third frequency subcarrier and the fourth frequency subcarrier respectively, and
 wherein density of resource elements used for reference signal transmission on the third antenna and the fourth
 antenna is lower than density of resource elements used for reference signal transmission on the first antenna
 and the second antenna,
 and the receiver further comprises means for performing channel estimation based on such reference signals,
 wherein the output matrix is characterized:

$$\begin{bmatrix} S_1 & S_2 & 0 & 0 \\ 0 & 0 & S_3 & S_4 \\ -S_2^* & S_1^* & 0 & 0 \\ 0 & 0 & -S_4^* & S_3^* \end{bmatrix}$$

where S_1, S_2, S_3 and S_4 are the plurality of symbols to be transmitted via the plurality of antennas.

11. The apparatus as claimed in claim 10 wherein when the plurality of symbols transmitted through the plurality of frequency subcarriers $4i, 4i+1, 4i+2$ and $4i+3$, the output matrix is characterized according to:

$$\begin{bmatrix} y^{(0)}(4i) \\ y^{(1)}(4i) \\ y^{(2)}(4i) \\ y^{(3)}(4i) \\ y^{(0)}(4i+1) \\ y^{(1)}(4i+1) \\ y^{(2)}(4i+1) \\ y^{(3)}(4i+1) \\ y^{(0)}(4i+2) \\ y^{(1)}(4i+2) \\ y^{(2)}(4i+2) \\ y^{(3)}(4i+2) \\ y^{(0)}(4i+3) \\ y^{(1)}(4i+3) \\ y^{(2)}(4i+3) \\ y^{(3)}(4i+3) \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 & j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & -j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & j & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & -1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & -j & 0 \end{bmatrix} \begin{bmatrix} \text{Re}(S_1(i)) \\ \text{Re}(S_2(i)) \\ \text{Re}(S_3(i)) \\ \text{Re}(S_4(i)) \\ \text{Im}(S_1(i)) \\ \text{Im}(S_2(i)) \\ \text{Im}(S_3(i)) \\ \text{Im}(S_4(i)) \end{bmatrix}$$

where $S_1(i), S_2(i), S_3(i)$ and $S_4(i)$ are the plurality of symbols.

12. The apparatus as claimed in claim 10 wherein density of resource elements used for reference signal transmission

on the third antenna and the fourth antenna is half of density of resource elements used for reference signal transmission on the first antenna and the second antenna.

5 **Patentansprüche**

1. Ein Verfahren zum Senden von Daten, wobei das Verfahren umfasst:

10 Modulieren von Daten, die zu Senden sind, in eine Mehrzahl an modulierten Symbolen; und
 Senden der Mehrzahl an modulierten Symbolen gemäß einer Ausgabematrix über eine Mehrzahl an Antennen
 über eine Mehrzahl an Frequenzteilträgern;
 wobei ein erstes Symbol und ein zweites Symbol über eine erste Antenne über einen ersten Frequenzteilträger
 beziehungsweise einen zweiten Frequenzteilträger gesendet werden, ein drittes Symbol und ein viertes Symbol
 15 über eine zweite Antenne über einen dritten Frequenzteilträger beziehungsweise einen vierten Frequenzteil-
 träger gesendet werden, eine invers komplex Konjugierte des zweiten Symbols und ein komplex Konjugierte
 des ersten Symbols über eine dritte Antenne über den ersten Frequenzteilträger beziehungsweise den zweiten
 Frequenzteilträger gesendet werden und eine invers komplex Konjugierte des vierten Symbols und eine komplex
 konjugierte des dritten Symbols über eine vierte Antenne über den dritten Frequenzteilträger beziehungsweise
 den vierten Frequenzteilträger gesendet werden; und
 20 wobei die Dichte der Ressource-Elemente, die für eine Übertragung eines Referenzsignals über die dritte
 Antenne und die vierte Antenne verwendet werden, niedriger als die Dichte von Ressource-Elementen ist, die
 für eine Übertragung eines Referenzsignals über die erste Antenne und die zweite Antenne verwendet werden,
 wobei die Ausgabematrix **gekennzeichnet ist durch**:

25

$$\begin{bmatrix} S_1 & S_2 & 0 & 0 \\ 0 & 0 & S_3 & S_4 \\ -S_2^* & S_1^* & 0 & 0 \\ 0 & 0 & -S_4^* & S_3^* \end{bmatrix}$$

30

wobei S_1, S_2, S_3 und S_4 die Mehrzahl an über die Mehrzahl an Antennen zu übertragenden modulierten Symbolen
 ist.

35

2. Das Verfahren, wie es in Anspruch 1 beansprucht ist, in dem, wenn die Mehrzahl an modulierten Symbolen über
 die Mehrzahl an Frequenzteilträgern $4i, 4i+1, 4i+2$ und $4i+3$ gesendet wird, die Ausgabematrix **gekennzeichnet ist
 durch**:

40

45

50

55

$$\begin{array}{l}
 5 \\
 10 \\
 15 \\
 20 \\
 25
 \end{array}
 \begin{array}{l}
 y^{(0)}(4i) \\
 y^{(1)}(4i) \\
 y^{(2)}(4i) \\
 y^{(3)}(4i) \\
 y^{(0)}(4i+1) \\
 y^{(1)}(4i+1) \\
 y^{(2)}(4i+1) \\
 y^{(3)}(4i+1) \\
 y^{(0)}(4i+2) \\
 y^{(1)}(4i+2) \\
 y^{(2)}(4i+2) \\
 y^{(3)}(4i+2) \\
 y^{(0)}(4i+3) \\
 y^{(1)}(4i+3) \\
 y^{(2)}(4i+3) \\
 y^{(3)}(4i+3)
 \end{array}
 =
 \begin{array}{l}
 1 \ 0 \ 0 \ 0 \ j \ 0 \ 0 \ 0 \\
 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \\
 0 \ -1 \ 0 \ 0 \ 0 \ j \ 0 \ 0 \\
 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \\
 0 \ 1 \ 0 \ 0 \ 0 \ j \ 0 \ 0 \\
 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \\
 1 \ 0 \ 0 \ 0 \ -j \ 0 \ 0 \ 0 \\
 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \\
 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \\
 0 \ 0 \ 1 \ 0 \ 0 \ 0 \ j \ 0 \\
 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \\
 0 \ 0 \ 0 \ -1 \ 0 \ 0 \ 0 \ j \\
 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \\
 0 \ 0 \ 0 \ 1 \ 0 \ 0 \ 0 \ j \\
 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \\
 0 \ 0 \ 1 \ 0 \ 0 \ 0 \ -j \ 0
 \end{array}
 \begin{array}{l}
 \text{Re}(S_1(i)) \\
 \text{Re}(S_2(i)) \\
 \text{Re}(S_3(i)) \\
 \text{Re}(S_4(i)) \\
 \text{Im}(S_1(i)) \\
 \text{Im}(S_2(i)) \\
 \text{Im}(S_3(i)) \\
 \text{Im}(S_4(i))
 \end{array}$$

wobei $S_1(i)$, $S_2(i)$, $S_3(i)$ und $S_4(i)$ die Mehrzahl an modulierten Symbolen ist.

3. Das Verfahren, wie es in Anspruch 1 beansprucht ist, in dem die Dichte von Ressource-Elementen, die für die Übertragung eines Referenzsignals über die dritte Antenne und die vierte Antenne verwendet werden, die Hälfte der Dichte von Ressource-Elementen ist, die für die Übertragung eines Referenzsignals über die erste Antenne und die zweite Antenne verwendet werden.

4. Eine Vorrichtung zum Senden von Daten, wobei die Vorrichtung umfasst:

einen Modulator zum Modulieren von Daten, die zu Senden sind, in eine Mehrzahl an modulierten Symbolen; und einen Sender zum Senden der Mehrzahl an modulierten Symbolen gemäß einer Ausgabematrix über eine Mehrzahl an Antennen über eine Mehrzahl an Frequenzteilträgern;

wobei ein erstes Symbol und ein zweites Symbol über eine erste Antenne über einen ersten Frequenzteilträger beziehungsweise einen zweiten Frequenzteilträger gesendet werden, ein drittes Symbol und ein viertes Symbol über eine zweite Antenne über einen dritten Frequenzteilträger beziehungsweise einen vierten Frequenzteilträger gesendet werden, eine invers komplex Konjugierte des zweiten Symbols und ein komplex Konjugierte des ersten Symbols über eine dritte Antenne über den ersten Frequenzteilträger beziehungsweise den zweiten Frequenzteilträger gesendet werden und eine invers komplex Konjugierte des vierten Symbols und eine komplex konjugierte des dritten Symbols über eine vierte Antenne über den dritten Frequenzteilträger beziehungsweise den vierten Frequenzteilträger gesendet werden; und

wobei die Dichte der Ressource-Elemente, die für eine Übertragung eines Referenzsignals über die dritte Antenne und die vierte Antenne verwendet werden, niedriger als die Dichte von Ressource-Elementen ist, die für eine Übertragung eines Referenzsignals über die erste Antenne und die zweite Antenne verwendet werden, wobei die Ausgabematrix **gekennzeichnet ist durch**:

5

$$\begin{bmatrix} S_1 & S_2 & 0 & 0 \\ 0 & 0 & S_3 & S_4 \\ -S_2^* & S_1^* & 0 & 0 \\ 0 & 0 & -S_4^* & S_3^* \end{bmatrix}$$

10

wobei S_1, S_2, S_3 und S_4 die Mehrzahl an über die Mehrzahl an Antennen zu übertragenden modulierten Symbolen ist.

15

5. Die Vorrichtung, wie sie in Anspruch 4 beansprucht ist, wobei, wenn die Mehrzahl an modulierten Symbolen über die Mehrzahl an Frequenzteilträgern $4i, 4i+1, 4i+2$ und $4i+3$ gesendet wird, die Ausgabematrix **gekennzeichnet ist durch:**

20

25

30

35

40

$$\begin{bmatrix} y^{(0)}(4i) \\ y^{(1)}(4i) \\ y^{(2)}(4i) \\ y^{(3)}(4i) \\ y^{(0)}(4i+1) \\ y^{(1)}(4i+1) \\ y^{(2)}(4i+1) \\ y^{(3)}(4i+1) \\ y^{(0)}(4i+2) \\ y^{(1)}(4i+2) \\ y^{(2)}(4i+2) \\ y^{(3)}(4i+2) \\ y^{(0)}(4i+3) \\ y^{(1)}(4i+3) \\ y^{(2)}(4i+3) \\ y^{(3)}(4i+3) \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 & j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & -j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & j & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & -1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & -j & 0 \end{bmatrix} \begin{bmatrix} \text{Re}(S_1(i)) \\ \text{Re}(S_2(i)) \\ \text{Re}(S_3(i)) \\ \text{Re}(S_4(i)) \\ \text{Im}(S_1(i)) \\ \text{Im}(S_2(i)) \\ \text{Im}(S_3(i)) \\ \text{Im}(S_4(i)) \end{bmatrix}$$

45

wobei $S_1(i), S_2(i), S_3(i)$ und $S_4(i)$ die Mehrzahl an modulierten Symbolen ist.

50

6. Die Vorrichtung, wie sie in Anspruch 4 beansprucht ist, wobei die Dichte von Ressource-Elementen, die für die Übertragung eines Referenzsignals über die dritte Antenne und die vierte Antenne verwendet werden, die Hälfte der Dichte von Ressource-Elementen ist, die für die Übertragung eines Referenzsignals über die erste Antenne und die zweite Antenne verwendet werden.

55

7. Ein Verfahren zum Empfangen von Daten, wobei das Verfahren umfasst:

Empfangen von einer Mehrzahl an Symbolen, die gemäß einer Ausgabematrix über eine Mehrzahl an Antennen über eine Mehrzahl an Frequenzteilträgern gesendet werden;

Demodulieren der Mehrzahl an Symbolen; und

wobei ein erstes Symbol und ein zweites Symbol über eine erste Antenne über einen ersten Frequenzteilträger beziehungsweise einen zweiten Frequenzteilträger gesendet werden, ein drittes Symbol und ein viertes Symbol über eine zweite Antenne über einen dritten Frequenzteilträger beziehungsweise einen vierten Frequenzteil-

träger gesendet werden, eine invers komplex Konjugierte des zweiten Symbols und ein komplex Konjugierte des ersten Symbols über eine dritte Antenne über den ersten Frequenzteilträger beziehungsweise den zweiten Frequenzteilträger gesendet werden und eine invers komplex Konjugierte des vierten Symbols und eine komplex konjugierte des dritten Symbols über eine vierte Antenne über den dritten Frequenzteilträger beziehungsweise den vierten Frequenzteilträger gesendet werden; und

wobei die Dichte der Ressource-Elemente, die für eine Übertragung eines Referenzsignals über die dritte Antenne und die vierte Antenne verwendet werden, niedriger als die Dichte von Ressource-Elementen ist, die für eine Übertragung eines Referenzsignals über die erste Antenne und die zweite Antenne verwendet werden, und wobei der Kanal auf der Grundlage solcher Referenzsignale geschätzt wird, wobei die Ausgabematrix **gekennzeichnet ist durch:**

$$\begin{bmatrix} S_1 & S_2 & 0 & 0 \\ 0 & 0 & S_3 & S_4 \\ -S_2^* & S_1^* & 0 & 0 \\ 0 & 0 & -S_4^* & S_3^* \end{bmatrix}$$

wobei S_1, S_2, S_3 und S_4 die Mehrzahl an über die Mehrzahl an Antennen zu übertragenden modulierten Symbolen ist.

8. Das Verfahren, wie es in Anspruch 7 beansprucht ist, in dem, wenn die Mehrzahl an Symbolen über die Mehrzahl an Frequenzteilträgern $4i, 4i+1, 4i+2$ und $4i+3$ gesendet wird, die Ausgabematrix **gekennzeichnet ist durch:**

$$\begin{bmatrix} y^{(0)}(4i) \\ y^{(1)}(4i) \\ y^{(2)}(4i) \\ y^{(3)}(4i) \\ y^{(0)}(4i+1) \\ y^{(1)}(4i+1) \\ y^{(2)}(4i+1) \\ y^{(3)}(4i+1) \\ y^{(0)}(4i+2) \\ y^{(1)}(4i+2) \\ y^{(2)}(4i+2) \\ y^{(3)}(4i+2) \\ y^{(0)}(4i+3) \\ y^{(1)}(4i+3) \\ y^{(2)}(4i+3) \\ y^{(3)}(4i+3) \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 & j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & -j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & j & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & -1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & -j & 0 \end{bmatrix} \begin{bmatrix} \text{Re}(S_1(i)) \\ \text{Re}(S_2(i)) \\ \text{Re}(S_3(i)) \\ \text{Re}(S_4(i)) \\ \text{Im}(S_1(i)) \\ \text{Im}(S_2(i)) \\ \text{Im}(S_3(i)) \\ \text{Im}(S_4(i)) \end{bmatrix}$$

wobei $S_1(i), S_2(i), S_3(i)$ und $S_4(i)$ die Mehrzahl an Symbolen ist.

9. Das Verfahren, wie es in Anspruch 7 beansprucht ist, in dem die Dichte von Ressource-Elementen, die für die Übertragung eines Referenzsignals über die dritte Antenne und die vierte Antenne verwendet werden, die Hälfte der Dichte von Ressource-Elementen ist, die für die Übertragung eines Referenzsignals über die erste Antenne

und die zweite Antenne verwendet werden.

10. Eine Vorrichtung zum Empfangen von Daten, wobei die Vorrichtung umfasst:

5 einen Empfänger zum Empfangen von einer Mehrzahl an Symbolen, die gemäß einer Ausgabematrix über eine Mehrzahl an Antennen über eine Mehrzahl an Frequenzteilträgern gesendet werden;
 einen Demodulator zum Demodulieren der Mehrzahl an Symbolen; und
 wobei ein erstes Symbol und ein zweites Symbol über eine erste Antenne über einen ersten Frequenzteilträger
 beziehungsweise einen zweiten Frequenzteilträger gesendet werden, ein drittes Symbol und ein viertes Symbol
 10 über eine zweite Antenne über einen dritten Frequenzteilträger beziehungsweise einen vierten Frequenzteil-
 träger gesendet werden, eine invers komplex Konjugierte des zweiten Symbols und ein komplex Konjugierte
 des ersten Symbols über eine dritte Antenne über den ersten Frequenzteilträger beziehungsweise den zweiten
 Frequenzteilträger gesendet werden und eine invers komplex Konjugierte des vierten Symbols und eine komplex
 15 konjugierte des dritten Symbols über eine vierte Antenne über den dritten Frequenzteilträger beziehungsweise
 den vierten Frequenzteilträger gesendet werden; und
 wobei die Dichte der Ressource-Elemente, die für eine Übertragung eines Referenzsignals über die dritte
 Antenne und die vierte Antenne verwendet werden, niedriger als die Dichte von Ressource-Elementen ist, die
 für eine Übertragung eines Referenzsignals über die erste Antenne und die zweite Antenne verwendet werden,
 20 und wobei der Empfänger weiterhin Mittel zum Ausführen einer Kanalschätzung auf der Grundlage solcher
 Referenzsignale umfasst, wobei die Ausgabematrix **gekennzeichnet ist durch**:

$$\begin{bmatrix}
 S_1 & S_2 & 0 & 0 \\
 0 & 0 & S_3 & S_4 \\
 -S_2^* & S_1^* & 0 & 0 \\
 0 & 0 & -S_4^* & S_3^*
 \end{bmatrix}$$

30 wobei S_1, S_2, S_3 und S_4 die Mehrzahl an über die Mehrzahl an Antennen zu übertragenden modulierten Symbolen
 ist.

11. Die Vorrichtung, wie sie in Anspruch 10 beansprucht ist, wobei, wenn die Mehrzahl an Symbolen über die Mehrzahl
 an Frequenzteilträgern $4i, 4i+1, 4i+2$ und $4i+3$ gesendet wird, die Ausgabematrix **gekennzeichnet ist durch**:

35

40

45

50

55

$$\begin{array}{l}
 5 \\
 10 \\
 15 \\
 20 \\
 25
 \end{array}
 \begin{array}{l}
 y^{(0)}(4i) \\
 y^{(1)}(4i) \\
 y^{(2)}(4i) \\
 y^{(3)}(4i) \\
 y^{(0)}(4i+1) \\
 y^{(1)}(4i+1) \\
 y^{(2)}(4i+1) \\
 y^{(3)}(4i+1) \\
 y^{(0)}(4i+2) \\
 y^{(1)}(4i+2) \\
 y^{(2)}(4i+2) \\
 y^{(3)}(4i+2) \\
 y^{(0)}(4i+3) \\
 y^{(1)}(4i+3) \\
 y^{(2)}(4i+3) \\
 y^{(3)}(4i+3)
 \end{array}
 =
 \begin{array}{l}
 1 \ 0 \ 0 \ 0 \ j \ 0 \ 0 \ 0 \\
 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \\
 0 \ -1 \ 0 \ 0 \ 0 \ j \ 0 \ 0 \\
 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \\
 0 \ 1 \ 0 \ 0 \ 0 \ j \ 0 \ 0 \\
 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \\
 1 \ 0 \ 0 \ 0 \ -j \ 0 \ 0 \ 0 \\
 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \\
 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \\
 0 \ 0 \ 1 \ 0 \ 0 \ 0 \ j \ 0 \\
 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \\
 0 \ 0 \ 0 \ -1 \ 0 \ 0 \ 0 \ j \\
 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \\
 0 \ 0 \ 0 \ 1 \ 0 \ 0 \ 0 \ j \\
 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \\
 0 \ 0 \ 1 \ 0 \ 0 \ 0 \ -j \ 0
 \end{array}
 \begin{array}{l}
 \text{Re}(S_1(i)) \\
 \text{Re}(S_2(i)) \\
 \text{Re}(S_3(i)) \\
 \text{Re}(S_4(i)) \\
 \text{Im}(S_1(i)) \\
 \text{Im}(S_2(i)) \\
 \text{Im}(S_3(i)) \\
 \text{Im}(S_4(i))
 \end{array}$$

wobei $S_1(i)$, $S_2(i)$, $S_3(i)$ und $S_4(i)$ die Mehrzahl an Symbolen ist.

12. Die Vorrichtung, wie sie in Anspruch 10 beansprucht ist, wobei die Dichte von Ressource-Elementen, die für die Übertragung eines Referenzsignals über die dritte Antenne und die vierte Antenne verwendet werden, die Hälfte der Dichte von Ressource-Elementen ist, die für die Übertragung eines Referenzsignals über die erste Antenne und die zweite Antenne verwendet werden.

Revendications

1. Un procédé de transmission de données, le procédé comprenant:

moduler des données à transmettre en une pluralité de symboles modulés; et transmettre la pluralité de symboles modulés en fonction d'une matrice de sortie par une pluralité d'antennes à travers une pluralité de sous-porteuses de fréquence, dans lequel un premier symbole et un second symbole sont transmis par une première antenne par l'intermédiaire d'une première sous-porteuse de fréquence et une seconde sous-porteuse de fréquence, respectivement, un troisième symbole et un quatrième symbole sont transmis par une deuxième antenne par l'intermédiaire d'une troisième sous-porteuse de fréquence et une quatrième sous-porteuse de fréquence, respectivement, un conjugué complexe inverse du deuxième symbole et d'un conjugué complexe du premier symbole sont transmis par une troisième antenne à travers la première sous-porteuse de fréquence et la seconde sous-porteuse de fréquence respectivement, et un conjugué complexe inverse du quatrième symbole et un conjugué complexe du troisième symbole sont transmis par une quatrième antenne à travers la troisième sous-porteuse de fréquence et la quatrième sous-porteuse de fréquence respectivement, et dans lequel la densité des éléments de ressource utilisée pour la transmission du signal de référence sur la troisième antenne et la quatrième antenne est inférieure à la densité des éléments de ressources utilisés pour la transmission du signal de référence sur la première antenne et la seconde antenne, dans lequel la matrice de sortie est **caractérisé par**:

5

$$\begin{bmatrix} S_1 & S_2 & 0 & 0 \\ 0 & 0 & S_3 & S_4 \\ -S_2^* & S_1^* & 0 & 0 \\ 0 & 0 & -S_4^* & S_3^* \end{bmatrix}$$

10

où S1, S2, S3 et S4 sont la pluralité de symboles modulés à être transmis par la pluralité d'antennes

2. Le procédé selon la revendication 1, dans lequel, lorsque la pluralité de symboles modulés transmis à travers la pluralité de sous-porteuses de fréquence $4i$, $4i + 1$, $4i + 2$ et $4i + 3$, la matrice de sortie est **caractérisée par**

15

20

25

30

35

40

$$\begin{bmatrix} y^{(0)}(4i) \\ y^{(1)}(4i) \\ y^{(2)}(4i) \\ y^{(3)}(4i) \\ y^{(0)}(4i+1) \\ y^{(1)}(4i+1) \\ y^{(2)}(4i+1) \\ y^{(3)}(4i+1) \\ y^{(0)}(4i+2) \\ y^{(1)}(4i+2) \\ y^{(2)}(4i+2) \\ y^{(3)}(4i+2) \\ y^{(0)}(4i+3) \\ y^{(1)}(4i+3) \\ y^{(2)}(4i+3) \\ y^{(3)}(4i+3) \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 & j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & -j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & j & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & -1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & -j & 0 \end{bmatrix} \begin{bmatrix} \text{Re}(S_1(i)) \\ \text{Re}(S_2(i)) \\ \text{Re}(S_3(i)) \\ \text{Re}(S_4(i)) \\ \text{Im}(S_1(i)) \\ \text{Im}(S_2(i)) \\ \text{Im}(S_3(i)) \\ \text{Im}(S_4(i)) \end{bmatrix}$$

où S1 (i), S2 (i), S3 (i) et S4 (i) sont la pluralité de symboles modulés.

45

3. Le procédé selon la revendication 1, dans lequel la densité des éléments de ressources utilisés pour la transmission du signal de référence sur la troisième antenne et la quatrième antenne est la moitié de la densité des éléments de ressources utilisés pour la transmission du signal de référence sur la première antenne et la seconde antenne.

4. Un appareil pour la transmission de données, l'appareil comprenant:

50

un modulateur pour moduler des données à transmettre en une pluralité de symboles modulés; et
 un émetteur pour transmettre la pluralité de symboles modulés selon une matrice de sortie par une pluralité d'antennes à travers une pluralité de sous-porteuses de fréquence,
 dans lequel un premier symbole et un second symbole sont transmis par une première antenne par l'intermédiaire d'une première sous-porteuse de fréquence et une seconde sous-porteuse de fréquence, respectivement, un troisième symbole et un quatrième symbole sont transmis par une deuxième antenne par l'intermédiaire d'une troisième sous-porteuse de fréquence et une quatrième sous-porteuse de fréquence, respectivement, un conjugué complexe inverse du deuxième symbole et d'un conjugué complexe du premier symbole sont transmis une troisième antenne à travers la première sous-porteuse de fréquence et la seconde sous-porteuse de fré-

55

quence respectivement, et un conjugué complexe inverse du quatrième symbole et un conjugué complexe du troisième symbole sont transmis par une quatrième antenne à travers la troisième sous-porteuse de fréquence et la quatrième sous-porteuse de fréquence respectivement, et

5 dans lequel la densité des éléments de ressource utilisée pour la transmission du signal de référence sur la troisième antenne et la quatrième antenne est inférieure à la densité des éléments de ressources utilisés pour la transmission du signal de référence sur la première antenne et la seconde antenne, dans lequel la matrice de sortie est **caractérisée par**:

$$10 \quad \begin{bmatrix} S_1 & S_2 & 0 & 0 \\ 0 & 0 & S_3 & S_4 \\ -S_2^* & S_1^* & 0 & 0 \\ 0 & 0 & -S_4^* & S_3^* \end{bmatrix}$$

15

où S1, S2, S3 et S4 sont la pluralité de symboles modulés à être transmis par la pluralité d'antennes.

5. L'appareil selon la revendication 4, dans lequel, lorsque la pluralité de symboles modulés transmis à travers la pluralité de sous-porteuses de fréquence $4i$, $4i + 1$, $4i + 2$ et $4i + 3$, la matrice de sortie est **caractérisée par**:

$$25 \quad \begin{bmatrix} y^{(0)}(4i) \\ y^{(1)}(4i) \\ y^{(2)}(4i) \\ y^{(3)}(4i) \\ y^{(0)}(4i+1) \\ y^{(1)}(4i+1) \\ y^{(2)}(4i+1) \\ y^{(3)}(4i+1) \\ y^{(0)}(4i+2) \\ y^{(1)}(4i+2) \\ y^{(2)}(4i+2) \\ y^{(3)}(4i+2) \\ y^{(0)}(4i+3) \\ y^{(1)}(4i+3) \\ y^{(2)}(4i+3) \\ y^{(3)}(4i+3) \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 & j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & -j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & j & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & -1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & -j & 0 \end{bmatrix} \begin{bmatrix} \text{Re}(S_1(i)) \\ \text{Re}(S_2(i)) \\ \text{Re}(S_3(i)) \\ \text{Re}(S_4(i)) \\ \text{Im}(S_1(i)) \\ \text{Im}(S_2(i)) \\ \text{Im}(S_3(i)) \\ \text{Im}(S_4(i)) \end{bmatrix}$$

30

35

40

45

50 où S1 (i), S2 (i), S3 (i) et S4 (i) sont la pluralité de symboles modulés.

6. L'appareil selon la revendication 4, dans lequel la densité des éléments de ressources utilisés pour la transmission du signal de référence sur la troisième antenne et la quatrième antenne est la moitié de la densité des éléments de ressources utilisés pour la transmission du signal de référence sur la première antenne et la seconde antenne.

55 7. Procédé de réception de données, le procédé comprenant:

recevoir une pluralité de symboles transmis selon une matrice de sortie par une pluralité d'antennes à travers

une pluralité de sous-porteuses de fréquence,
 démoduler la pluralité de symboles; et
 dans lequel un premier symbole et un second symbole sont transmis par une première antenne par l'intermédiaire
 d'une première sous-porteuse de fréquence et une seconde sous-porteuse de fréquence, respectivement, un
 troisième symbole et un quatrième symbole sont transmis par une deuxième antenne par l'intermédiaire d'une
 troisième sous-porteuse de fréquence et une quatrième sous-porteuse de fréquence, respectivement, un con-
 jugué complexe inverse du deuxième symbole et un conjugué complexe du premier symbole sont transmis par
 une troisième antenne à travers la première sous-porteuse de fréquence et la seconde sous-porteuse de fré-
 quence respectivement, et un conjugué complexe inverse du quatrième symbole et un conjugué complexe du
 troisième symbole sont transmis par une quatrième antenne à travers la troisième sous-porteuse de fréquence
 et la quatrième sous-porteuse de fréquence respectivement, et
 dans lequel la densité des éléments de ressource utilisés pour la transmission du signal de référence sur la
 troisième antenne et la quatrième antenne est inférieure à la densité des éléments de ressource utilisés pour
 la transmission du signal de référence sur la première antenne et la seconde antenne, et dans lequel le canal
 est estimé en se basant sur ces signaux de référence, dans lequel la matrice de sortie est **caractérisée par**:

$$\begin{bmatrix} S_1 & S_2 & 0 & 0 \\ 0 & 0 & S_3 & S_4 \\ -S_2^* & S_1^* & 0 & 0 \\ 0 & 0 & -S_4^* & S_3^* \end{bmatrix}$$

où S1, S2, S3 et S4 sont la pluralité de symboles devant être transmis par la pluralité d'antennes.

8. Le procédé selon la revendication 7, dans lequel, lorsque la pluralité de symboles transmis par la pluralité de sous-
 porteuses de fréquence $4i$, $4i + 1$, $4i + 2$ et $4i + 3$, la matrice de sortie est **caractérisée par**:

$$\begin{bmatrix} y^{(0)}(4i) \\ y^{(1)}(4i) \\ y^{(2)}(4i) \\ y^{(3)}(4i) \\ y^{(0)}(4i+1) \\ y^{(1)}(4i+1) \\ y^{(2)}(4i+1) \\ y^{(3)}(4i+1) \\ y^{(0)}(4i+2) \\ y^{(1)}(4i+2) \\ y^{(2)}(4i+2) \\ y^{(3)}(4i+2) \\ y^{(0)}(4i+3) \\ y^{(1)}(4i+3) \\ y^{(2)}(4i+3) \\ y^{(3)}(4i+3) \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 & j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & -j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & j & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & -1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & -j & 0 \end{bmatrix} \begin{bmatrix} \text{Re}(S_1(i)) \\ \text{Re}(S_2(i)) \\ \text{Re}(S_3(i)) \\ \text{Re}(S_4(i)) \\ \text{Im}(S_1(i)) \\ \text{Im}(S_2(i)) \\ \text{Im}(S_3(i)) \\ \text{Im}(S_4(i)) \end{bmatrix}$$

où S1 (i), S2 (i), S3 (i) et S4 (i) sont la pluralité de symboles.

9. Le procédé selon la revendication 7, dans lequel la densité des éléments de ressources utilisés pour la transmission du signal de référence sur la troisième antenne et la quatrième antenne est la moitié de la densité des éléments de ressources utilisés pour la transmission du signal de référence sur la première antenne et la seconde antenne.

5 10. Dispositif destiné à recevoir des données, l'appareil comprenant:

un récepteur pour recevoir une pluralité de symboles transmis selon une matrice de sortie par une pluralité d'antennes à travers une pluralité de sous-porteuses de fréquence, un démodulateur pour démoduler la pluralité de symboles; et
 10 dans lequel un premier symbole et un second symbole sont transmis par une première antenne par l'intermédiaire d'une première sous-porteuse de fréquence et une seconde sous-porteuse de fréquence, respectivement, un troisième symbole et un quatrième symbole sont transmis par une deuxième antenne par l'intermédiaire d'une troisième sous-porteuse de fréquence et une quatrième sous-porteuse de fréquence, respectivement, un conjugué complexe inverse du deuxième symbole et un conjugué complexe du premier symbole sont transmis par
 15 une troisième antenne à travers la première sous-porteuse de fréquence et la seconde sous-porteuse de fréquence respectivement, et un conjugué complexe inverse du quatrième symbole et un conjugué complexe du troisième symbole sont transmis par une quatrième antenne à travers la troisième sous-porteuse de fréquence et la quatrième sous-porteuse de fréquence respectivement, et
 20 dans lequel la densité des éléments de ressource utilisés pour la transmission du signal de référence sur la troisième antenne et la quatrième antenne est inférieure à la densité des éléments de ressources utilisés pour la transmission du signal de référence sur la première antenne et la seconde antenne et le récepteur comprend en outre des moyens pour effectuer l'estimation du canal basée sur ces signaux de référence, dans lequel la matrice de sortie est **caractérisée par** :

25

$$\begin{bmatrix} S_1 & S_2 & 0 & 0 \\ 0 & 0 & S_3 & S_4 \\ -S_2^* & S_1^* & 0 & 0 \\ 0 & 0 & -S_4^* & S_3^* \end{bmatrix}$$

30

où S1, S2, S3 et S4 sont la pluralité de symboles devant être transmis par l'intermédiaire de la pluralité d'antennes.

35

11. L'appareil selon la revendication 10, dans lequel, lorsque la pluralité de symboles transmis par la pluralité de sous-porteuses de fréquence $4i + 1$, $4i + 2$ et $3 + 4i$, la matrice de sortie est caractérisée selon

40

45

50

55

$$\begin{array}{l}
 5 \\
 10 \\
 15 \\
 20 \\
 25
 \end{array}
 \begin{array}{l}
 y^{(0)}(4i) \\
 y^{(1)}(4i) \\
 y^{(2)}(4i) \\
 y^{(3)}(4i) \\
 y^{(0)}(4i+1) \\
 y^{(1)}(4i+1) \\
 y^{(2)}(4i+1) \\
 y^{(3)}(4i+1) \\
 y^{(0)}(4i+2) \\
 y^{(1)}(4i+2) \\
 y^{(2)}(4i+2) \\
 y^{(3)}(4i+2) \\
 y^{(0)}(4i+3) \\
 y^{(1)}(4i+3) \\
 y^{(2)}(4i+3) \\
 y^{(3)}(4i+3)
 \end{array}
 =
 \begin{array}{l}
 1 \ 0 \ 0 \ 0 \ j \ 0 \ 0 \ 0 \\
 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \\
 0 \ -1 \ 0 \ 0 \ 0 \ j \ 0 \ 0 \\
 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \\
 0 \ 1 \ 0 \ 0 \ 0 \ j \ 0 \ 0 \\
 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \\
 1 \ 0 \ 0 \ 0 \ -j \ 0 \ 0 \ 0 \\
 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \\
 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \\
 0 \ 0 \ 1 \ 0 \ 0 \ 0 \ j \ 0 \\
 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \\
 0 \ 0 \ 0 \ -1 \ 0 \ 0 \ 0 \ j \\
 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \\
 0 \ 0 \ 0 \ 1 \ 0 \ 0 \ 0 \ j \\
 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \\
 0 \ 0 \ 1 \ 0 \ 0 \ 0 \ -j \ 0
 \end{array}
 \begin{array}{l}
 \text{Re}(S_1(i)) \\
 \text{Re}(S_2(i)) \\
 \text{Re}(S_3(i)) \\
 \text{Re}(S_4(i)) \\
 \text{Im}(S_1(i)) \\
 \text{Im}(S_2(i)) \\
 \text{Im}(S_3(i)) \\
 \text{Im}(S_4(i))
 \end{array}$$

où S1 (i), S2 (i), S3 (i) et S4 (i) sont la pluralité de symboles.

- 30 **12.** L'appareil selon la revendication 10, dans lequel la densité des éléments de ressources utilisés pour la transmission du signal de référence sur la troisième antenne et la quatrième antenne est la moitié de la densité des éléments de ressources utilisés pour la transmission du signal de référence sur la première antenne et la seconde antenne.

35

40

45

50

55

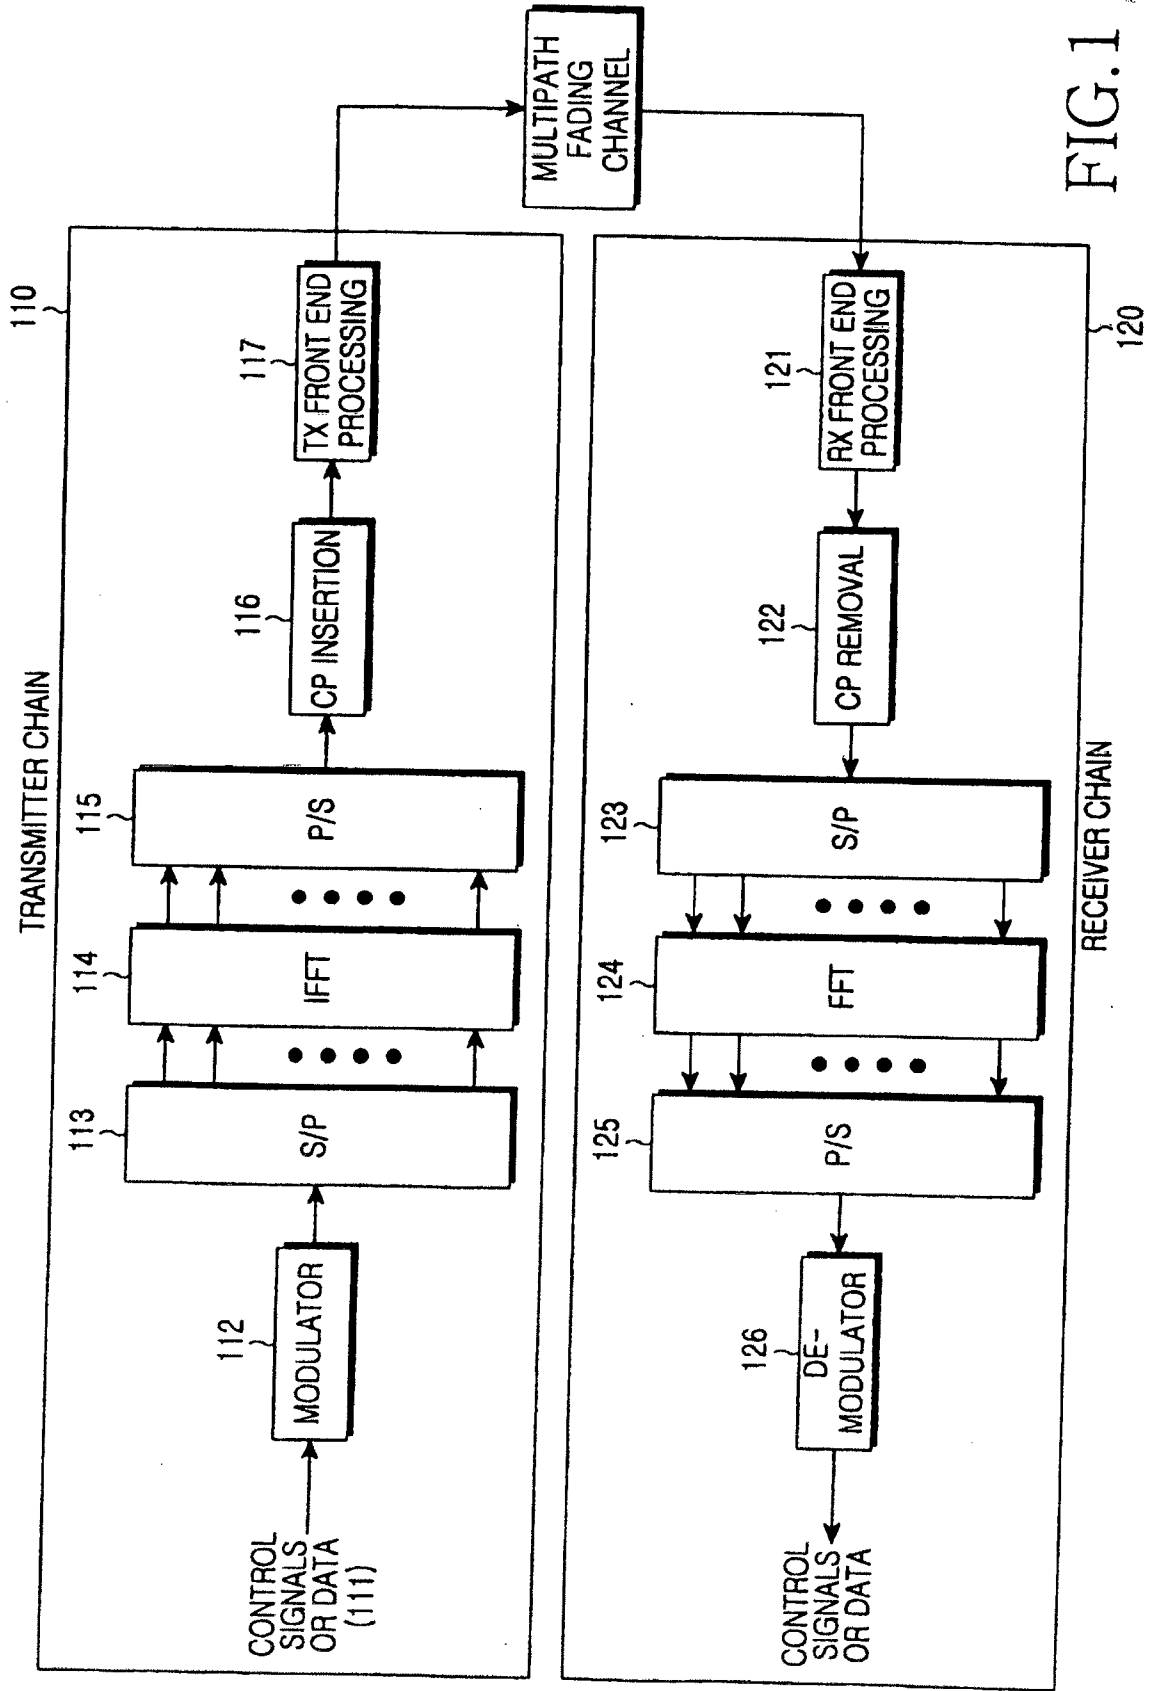


FIG. 1

	t1	t2
ANT 1	S_1	$-S_2^*$
ANT 2	S_2	S_1^*

FIG.2

	f1	f2
ANT 1	S_1	$-S_2^*$
ANT 2	S_2	S_1^*

FIG.3

	f1	f2
ANT 1	S_1	S_2
ANT 2	$-S_2^*$	S_1^*

FIG.4

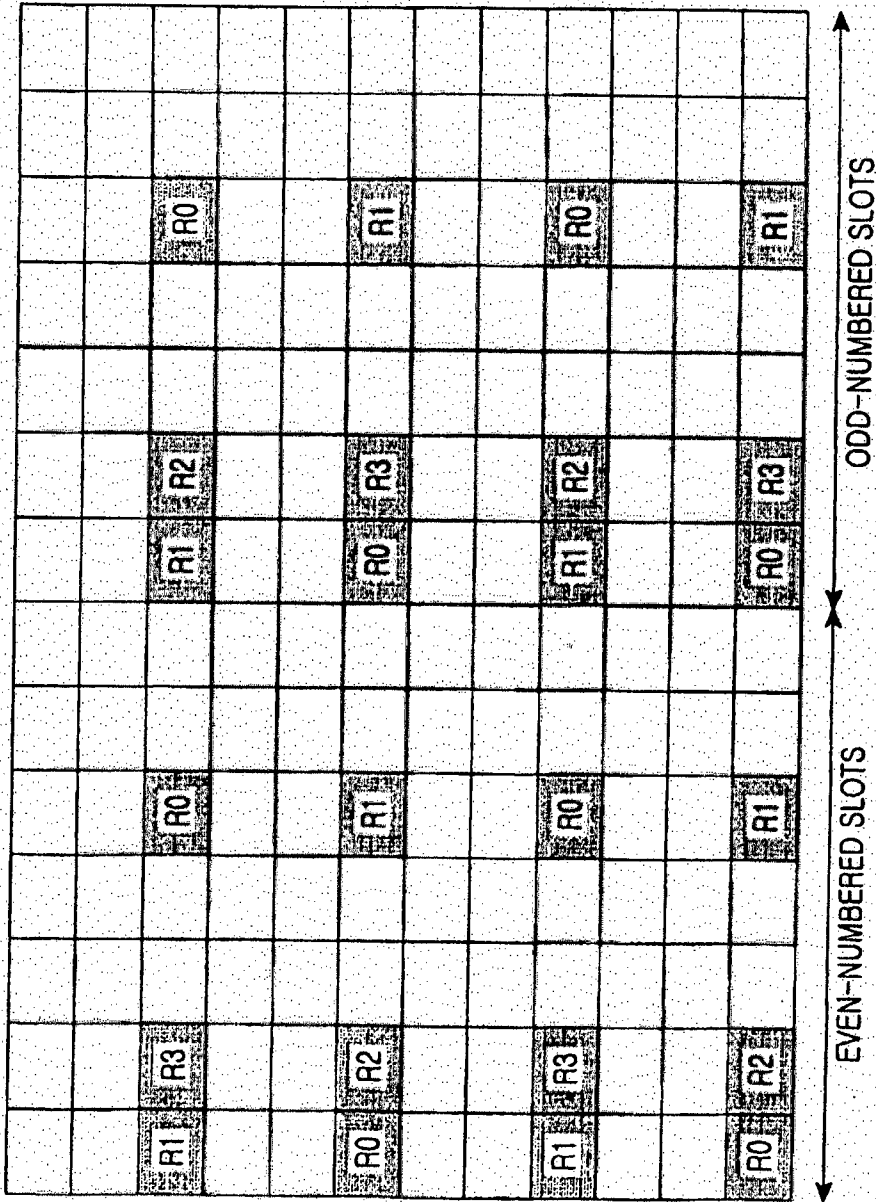


FIG.5

	t1	t2	t3	t4
ANT 1	S_1	S_2	S_1	S_2
ANT 2	$-S_2^*$	S_1^*	$-S_2^*$	S_1^*
ANT 3	S_3	S_4	S_3	S_4
ANT 4	$-S_4^*$	S_3^*	$-S_4^*$	S_3^*


FIG.6

	t1	t2	t3	t4
ANT 1	S_1	S_2	S_1	S_2
ANT 2	S_3	S_4	S_3	S_4
ANT 3	$-S_2^*$	S_1^*	$-S_2^*$	S_1^*
ANT 4	$-S_4^*$	S_3^*	$-S_4^*$	S_3^*

FIG.7

	t1	t2	t3	t4
ANT 1	S_1	S_2	0	0
ANT 2	0	0	S_3	S_4
ANT 3	$-S_2^*$	S_1^*	0	0
ANT 4	0	0	$-S_4^*$	S_3^*

FIG.8

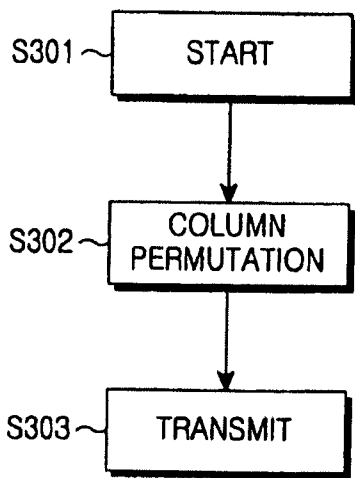

$$T_5 = \begin{bmatrix} S_1 & S_2 & S_1 & S_2 \\ -S_2^* & S_1^* & -S_2^* & S_1^* \\ -S_3 & -S_4 & S_3 & S_4 \\ S_4^* & -S_3^* & -S_4^* & S_3^* \end{bmatrix}$$



$$T_P = \begin{bmatrix} S_1 & S_1 & S_2 & S_2 \\ -S_2^* & -S_2^* & S_1^* & S_1^* \\ -S_3 & S_3 & -S_4 & S_4 \\ S_4^* & -S_4^* & -S_3^* & S_3^* \end{bmatrix}$$

FIG.9

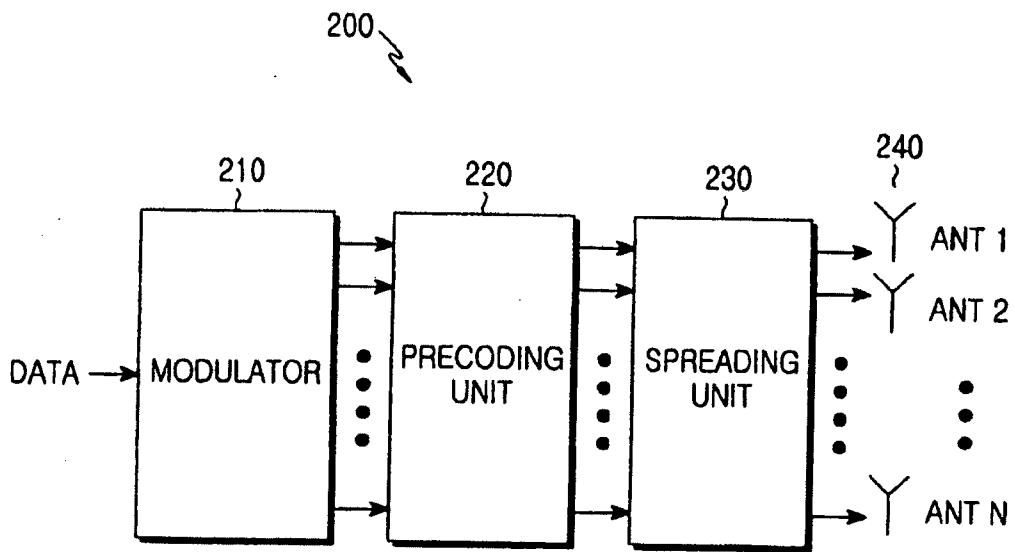


FIG.10



Szabadalmi igénypontok

1. Eljárás adatok átvitelére, az eljárás tartalmazza:

átviendő adatok modulálását több modulált szimbólumba; és

az több modulált szimbólum átvitelét output mátrix szerint a több antennán át több

5 frekvencia szubkarrieren keresztül,

ahol első szimbólum és második szimbólum át vannak vize első antennán át első

frekvencia szubkarrieren keresztül illetve második frekvencia szubkarrieren keresztül,

harmadik szimbólum és negyedik szimbólum át vannak vize második antennán át

harmadik frekvencia szubkarrieren keresztül illetve negyedik frekvencia szubkarrieren

10 keresztül, a második szimbólum inverz komplex konjugáltja és az első szimbólum

komplex konjugáltja át vannak vize harmadik antennán át az első frekvencia

szubkarrieren keresztül illetve a második frekvencia szubkarrieren keresztül és

negyedik szimbólum inverz komplex konjugáltja és harmadik szimbólum komplex

konjugáltja át vannak vize negyedik antennán át a harmadik frekvencia szubkarrieren

15 keresztül illetve negyedik frekvencia szubkarrieren keresztül, és

ahol erőforrás elemek sűrűsége, amelyek referencia jel átvitelre vannak használva a

harmadik antennán át és a negyedik antennán át, kisebb, mint erőforrás elemek

sűrűsége, amelyek referencia jel átvitelre vannak használva az első antennán és a második

antennán, ahol az output mátrixra jellemző:

20

$$\begin{bmatrix} S_1 & S_2 & 0 & 0 \\ 0 & 0 & S_3 & S_4 \\ -S_2^* & S_1^* & 0 & 0 \\ 0 & 0 & -S_4^* & S_3^* \end{bmatrix}$$

ahol S_1 , S_2 , S_3 és S_4 a több antennán át átviendő több modulált szimbólum.

25 2. Az 1. igénypont szerinti eljárás, ahol ha a több modulált szimbólum át van vize a több

frekvencia szubkarrieren $4i$, $4i+1$, $4i+2$ és $4i+3$ keresztül, az output mátrix a következők

szerint van jellemezve:

$$\begin{matrix}
 y^{(0)}(4l) \\
 y^{(1)}(4l) \\
 y^{(2)}(4l) \\
 y^{(3)}(4l) \\
 y^{(0)}(4l+1) \\
 y^{(1)}(4l+1) \\
 y^{(2)}(4l+1) \\
 y^{(3)}(4l+1) \\
 y^{(0)}(4l+2) \\
 y^{(1)}(4l+2) \\
 y^{(2)}(4l+2) \\
 y^{(3)}(4l+2) \\
 y^{(0)}(4l+3) \\
 y^{(1)}(4l+3) \\
 y^{(2)}(4l+3) \\
 y^{(3)}(4l+3)
 \end{matrix}
 =
 \begin{bmatrix}
 1 & 0 & 0 & 0 & j & 0 & 0 & 0 \\
 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
 0 & -1 & 0 & 0 & 0 & j & 0 & 0 \\
 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
 0 & 1 & 0 & 0 & 0 & j & 0 & 0 \\
 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
 1 & 0 & 0 & 0 & -j & 0 & 0 & 0 \\
 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
 0 & 0 & 1 & 0 & 0 & 0 & j & 0 \\
 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
 0 & 0 & 0 & -1 & 0 & 0 & 0 & j \\
 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
 0 & 0 & 0 & 1 & 0 & 0 & 0 & j \\
 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
 0 & 0 & 1 & 0 & 0 & 0 & -j & 0
 \end{bmatrix}
 \begin{matrix}
 \text{Re}(S_1(l)) \\
 \text{Re}(S_2(l)) \\
 \text{Re}(S_3(l)) \\
 \text{Re}(S_4(l)) \\
 \text{Im}(S_1(l)) \\
 \text{Im}(S_2(l)) \\
 \text{Im}(S_3(l)) \\
 \text{Im}(S_4(l))
 \end{matrix}$$

ahol $S_1(l)$, $S_2(l)$, $S_3(l)$ és $S_4(l)$ a több modulált szimbólum.

- 5 3. Az 1. igénypont szerinti eljárás, ahol erőforrás elemek sűrűsége, amelyek referencia jel átvitelére vannak használva a harmadik antennán és a negyedik antennán, fele az erőforrás elemek sűrűségének, amelyek referencia jel átvitelére vannak használva az első antennán és a második antennán.
- 10 4. Berendezés adatok átvitelére, a berendezés tartalmaz:
 modulátort átvendő adatok modulálására több modulált szimbólumba; és
 adót a több modulált szimbólum átvitelére output mátrix szerint több antennán át több frekvencia szubkarrieren keresztül,
 ahol első szimbólum és második szimbólum át vannak vité első antennán át első
 15 frekvencia szubkarrieren keresztül illetve második frekvencia szubkarrieren keresztül,
 harmadik szimbólum és negyedik szimbólum át vannak vité második antennán át
 harmadik frekvencia szubkarrieren keresztül illetve negyedik frekvencia szubkarrieren
 keresztül, a második szimbólum inverz komplex konjugáltja és az első szimbólum
 komplex konjugáltja át vannak vité harmadik antennán át az első frekvencia
 20 szubkarrieren keresztül illetve második frekvencia szubkarrieren keresztül és a
 negyedik szimbólum inverz komplex konjugáltja és a harmadik szimbólum komplex

-3-

konjugáltja át vannak víve negyedik antennán át a harmadik frekvencia szubkarrieren illetve a negyedik frekvencia szubkarrieren keresztül, és

ahol erőforrás elemek sűrűsége, amely referencia jel átvitelére vannak használva a harmadik antennán és a negyedik antennán át, kisebb, mint erőforrás elemek sűrűsége,

- 5 amelyek referencia jel átvitelére vannak használva az első antennán és a második antennán, ahol az output mátrixra jellemző, hogy :

$$\begin{bmatrix} S_1 & S_2 & 0 & 0 \\ 0 & 0 & S_3 & S_4 \\ -S_2^* & S_1^* & 0 & 0 \\ 0 & 0 & -S_4^* & S_3^* \end{bmatrix}$$

ahol S_1 , S_2 , S_3 és S_4 a több antennán átvendő több modulált szimbólum.

10

5. A 4. igénypont szerinti berendezés 4, ahol ha a több modulált szimbólum át van víve a több frekvencia szubkarrieren $4i$, $4i+1$, $4i+2$ és $4i+3$ keresztül, az output mátrixra

jellemző:

$$\begin{bmatrix} y^{(0)}(4i) \\ y^{(1)}(4i) \\ y^{(2)}(4i) \\ y^{(3)}(4i) \\ y^{(0)}(4i+1) \\ y^{(1)}(4i+1) \\ y^{(2)}(4i+1) \\ y^{(3)}(4i+1) \\ y^{(0)}(4i+2) \\ y^{(1)}(4i+2) \\ y^{(2)}(4i+2) \\ y^{(3)}(4i+2) \\ y^{(0)}(4i+3) \\ y^{(1)}(4i+3) \\ y^{(2)}(4i+3) \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 & j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & -j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & j & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & -1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & -j & 0 \end{bmatrix} \begin{bmatrix} \text{Re}(S_1(i)) \\ \text{Re}(S_2(i)) \\ \text{Re}(S_3(i)) \\ \text{Re}(S_4(i)) \\ \text{Im}(S_1(i)) \\ \text{Im}(S_2(i)) \\ \text{Im}(S_3(i)) \\ \text{Im}(S_4(i)) \end{bmatrix}$$

15

-4-

ahol $S_1(i)$, $S_2(i)$, $S_3(i)$ és $S_4(i)$ az több modulált szimbólum.

6. A 4. igénypont szerinti berendezés, ahol erőforrás elemek sűrűsége, amelyek referenciacjel átvitelére vannak használva a harmadik antennán és a negyedik antennán,
 5 fele erőforrás elemek sűrűségének, amelyek referenciacjel átvitelére vannak használva az első antennán és a második antennán.

7. Eljárás adatok vételére, az eljárás tartalmazza:

- több szimbólum vételét, amelyek át vannak vité output mátrix szerint több antennán át
 10 több frekvencia szubkarrieren keresztül,
 több szimbólum demodulálását; és
 ahol első szimbólum és második szimbólum át vannak vité első antennán át az első frekvencia szubkarrieren keresztül illetve második frekvencia szubkarrieren keresztül,
 harmadik szimbólum és negyedik szimbólum át vannak vité második antennán
 15 harmadik frekvencia szubkarrieren keresztül illetve negyedik frekvencia szubkarrieren keresztül, a második szimbólum inverz komplex konjugáltja és az első szimbólum komplex konjugáltja át vannak vité harmadik antennán az első frekvencia szubkarrieren keresztül illetve a második frekvencia szubkarrieren keresztül, és a negyedik szimbólum inverz komplex konjugáltja és a harmadik szimbólum komplex konjugáltja át vannak
 20 vité negyedik antennán át a harmadik frekvencia szubkarrieren keresztül illetve a negyedik frekvencia szubkarrieren keresztül, és

ahol erőforrás elemek sűrűsége, amelyek referenciacjel átvitelre vannak használva a harmadik antennán és a negyedik antennán, kisebb, mint erőforrás elemek sűrűsége, amelyek referenciacjel átvitelre vannak használva az első antennán és a második antennán, és ahol a csatorna meg van becsülve, amely ilyen referenciacjelre alapul,
 25 ahol az output mátrixra jellemző:

$$\begin{bmatrix} S_1 & S_2 & 0 & 0 \\ 0 & 0 & S_3 & S_4 \\ -S_2^* & S_1^* & 0 & 0 \\ 0 & 0 & -S_4^* & S_3^* \end{bmatrix}$$

-5-

ahol S_1, S_2, S_3 és S_4 a több antennán átvendő több szimbólum.

8. A 7. igénypont szerinti eljárás, ahol ha a több szimbólum, amely át van vevve a több frekvencia szubkarrieren $4i, 4i+1, 4i+2$ és $4i+3$ keresztül, az output mátrixra jellemző:

5

$$\begin{bmatrix} y^{(1)}(4i) \\ y^{(2)}(4i) \\ y^{(3)}(4i) \\ y^{(4)}(4i) \\ y^{(1)}(4i+1) \\ y^{(2)}(4i+1) \\ y^{(3)}(4i+1) \\ y^{(4)}(4i+1) \\ y^{(1)}(4i+2) \\ y^{(2)}(4i+2) \\ y^{(3)}(4i+2) \\ y^{(4)}(4i+2) \\ y^{(1)}(4i+3) \\ y^{(2)}(4i+3) \\ y^{(3)}(4i+3) \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 & j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & -j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & j & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & -1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & -j & 0 \end{bmatrix} \begin{bmatrix} \text{Re}(S_1(i)) \\ \text{Re}(S_2(i)) \\ \text{Re}(S_3(i)) \\ \text{Re}(S_4(i)) \\ \text{Im}(S_1(i)) \\ \text{Im}(S_2(i)) \\ \text{Im}(S_3(i)) \\ \text{Im}(S_4(i)) \end{bmatrix}$$

ahol $S_1(i), S_2(i), S_3(i)$ és $S_4(i)$ a több szimbólum.

10

9. A 7. igénypont szerinti eljárás, ahol erőforrás elemek sűrűsége, amely referencia jel átvételre van használva a harmadik antennán és a negyedik antennán, fele erőforrás elemek sűrűségének, amelyek referencia jel átvételére vannak használva az első antennán és a második antennán.

15

10. Berendezés adatok vételére, a berendezés tartalmazza:

vevőt több szimbólum vételére, amelyek át vannak vevve output mátrix szerint több antennán át a több frekvencia szubkarrieren keresztül,
demodulátort a több szimbólum demodulálására; és

20

ahol első szimbólum és második szimbólum át vannak vevve első antennán át első frekvencia szubkarrieren keresztül illetőleg második frekvencia szubkarrieren keresztül,

-6-

- harmadik szimbólum és negyedik szimbólum át vannak vité második antennán át harmadik frekvencia szubkarrieren keresztül illetve negyedik frekvencia szubkarrieren keresztül, a második szimbólum inverz komplex konjugáltja és az első szimbólum komplex konjugáltja át vannak vité harmadik antennán át az első frekvencia szubkarrieren keresztül illetve a második frekvencia szubkarrieren keresztül, és a negyedik szimbólum inverz komplex konjugáltja és a harmadik szimbólum komplex konjugáltja át vannak vité negyedik antennán át a harmadik frekvencia szubkarrieren keresztül illetve a negyedik frekvencia szubkarrieren keresztül, és
- ahol erőforrás elemek sűrűsége, amelyek referencia jel átvitelre vannak használva a harmadik antennán és a negyedik antennán, kisebb, mint erőforrás elemek sűrűsége, amelyek referencia jel átvitelre vannak használva az első antennán és a második antennán,
- és a vevő továbbá tartalmaz eszközt csatorna becslés megvalósítására, amely olyan referencia jeleken alapul, ahol az output mátrixra jellemző:

$$15 \quad \begin{bmatrix} S_1 & S_2 & 0 & 0 \\ 0 & 0 & S_3 & S_4 \\ -S_2^* & S_1^* & 0 & 0 \\ 0 & 0 & -S_4^* & S_3^* \end{bmatrix}$$

ahol S_1 , S_2 , S_3 és S_4 a több antennán átvendő több szimbólum.

- 20 11. A 10. igénypont szerinti berendezés, ahol ha a több szimbólum a több frekvencia szubkarrieren $4i$, $4i+1$, $4i+2$ és $4i+3$ keresztül van átvité, az output mátrixra jellemző:

-7-

$$\begin{bmatrix}
 y^{(0)}(4i) \\
 y^{(1)}(4i) \\
 y^{(2)}(4i) \\
 y^{(3)}(4i) \\
 y^{(0)}(4i+1) \\
 y^{(1)}(4i+1) \\
 y^{(2)}(4i+1) \\
 y^{(3)}(4i+1) \\
 y^{(0)}(4i+2) \\
 y^{(1)}(4i+2) \\
 y^{(2)}(4i+2) \\
 y^{(3)}(4i+2) \\
 y^{(0)}(4i+3) \\
 y^{(1)}(4i+3) \\
 y^{(2)}(4i+3) \\
 y^{(3)}(4i+3)
 \end{bmatrix}
 =
 \begin{bmatrix}
 1 & 0 & 0 & 0 & j & 0 & 0 & 0 \\
 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
 0 & -1 & 0 & 0 & 0 & j & 0 & 0 \\
 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
 0 & 1 & 0 & 0 & 0 & j & 0 & 0 \\
 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
 1 & 0 & 0 & 0 & -j & 0 & 0 & 0 \\
 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
 0 & 0 & 1 & 0 & 0 & 0 & j & 0 \\
 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
 0 & 0 & 0 & -1 & 0 & 0 & 0 & j \\
 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
 0 & 0 & 0 & 1 & 0 & 0 & 0 & j \\
 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
 0 & 0 & 1 & 0 & 0 & 0 & -j & 0
 \end{bmatrix}
 \begin{bmatrix}
 \operatorname{Re}(S_1(i)) \\
 \operatorname{Re}(S_2(i)) \\
 \operatorname{Re}(S_3(i)) \\
 \operatorname{Re}(S_4(i)) \\
 \operatorname{Im}(S_1(i)) \\
 \operatorname{Im}(S_2(i)) \\
 \operatorname{Im}(S_3(i)) \\
 \operatorname{Im}(S_4(i))
 \end{bmatrix}$$

ahol $S_1(i)$, $S_2(i)$, $S_3(i)$ és $S_4(i)$ a több szimbólum.

- 5 12. A 10. igénypont szerinti berendezés, ahol erőforrás elemek sűrűsége, amelyek referencia jel átvitelre vannak használva a harmadik antennán és a negyedik antennán, fele erőforrás elemek sűrűségének, amelyek referencia jel átvitelre vannak használva az első antennán és a második antennán.