



(51) International Patent Classification:
F16B 37/04 (2006.01)

(21) International Application Number:
PCT/US2010/023162

(22) International Filing Date:
4 February 2010 (04.02.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
200900474 12 February 2009 (12.02.2009) ES

(71) Applicant (for all designated States except US): **ILLINOIS TOOL WORKS INC.** [US/US]; 3600 West Lake Avenue, Glenview, Illinois 60026 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **TEJERO SALINERO, Isaac** [ES/ES]; San Sebastián, 2, 3^o 2^a, Molins De Rei, E-08750 Barcelona (ES).

(74) Agent: **HAUPTMAN, Benjamin J.**; Lowe Hauptman Ham & Berner, LLP, 1700 Diagonal Road, Suite 300, Alexandria, Virginia 22314 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))

(54) Title: REMOVABLE LONG-LIVED AND REUSABLE U-SHAPED HYBRID NUT



(57) Abstract: A NUT WITH A C-SHAPED PROFILE, wherein the upper base (10), has a hole with at least one thread for the arrangement of the screwed device and wherein the lower base (11), which is aligned with the axis of the preceding hole, has another hole for receiving a nut tightening screw, said upper base being provided with incisions which define horizontal connecting portions (8) separated from the body of said upper base and longitudinal connecting portions (7) which form an extension of the former and which join together said upper base (10) and lower base (11), which lower base (11) has a retaining claw (1) designed to facilitate application of a tool for slackening the pressure which the nut applies to the panel to which it is fixed; which nut has a bottom rear flange (2) and has side stops on said upper base (10) which form an anti-rotation mechanism when a screw is tightened on the nut; said bottom rear flange (2) freeing from pressure said upper base (10) during assembly on the panel; and said longitudinal connecting portions (7) are overdimensioned.

REMOVABLE LONG-LIVED AND REUSABLE U-SHAPED HYBRID NUT**FIELD OF THE INVENTION**

The present invention relates to a nut with a C-shaped
5 profile, of the type formed by means of punching of a
flat strip which, folded in the manner of a clip, is
mounted on a panel and which has a passage for a screw
and at least a single thread for the screwed member,
wherein a device for extracting the nut as well as other
10 improvements to the clip nut are provided.

PRIOR ART

Clip nuts, various categories of which exist, are widely
known in the art, the common feature of all of them being
15 that they are formed by a metal sheet which is folded
onto itself, said fold and the rigidity or elasticity
thereof acting as a tensioning spring during fixing to
the panel onto which it is mounted.

20 For example, the known document ES1020704 describes a
clip of this type where the nut is tightened by means of
a screw which is mounted on a single thread formed by a
helical profile in the upper strip of the clip. Said clip
is provided with shaped incisions for facilitating the
25 movement and elasticity of said upper strip with respect
to the lower part of the clip nut and adapting
advantageously to different panel thicknesses.

This has been the basic idea behind further developments
30 in the industry, namely that of promoting said
elasticity, as for example in the patent FR2719347, where
additional punched forms or "reliefs" are provided in the

metal sheet so as to eliminate any possible interference between the movable part and the fixed part of the nut. This is in general an overall goal of the industry, for this type of nut, which the present invention also aims
5 to achieve.

It must be said that, despite the results achieved by the prior art, it still suffers from a number of drawbacks. For example, generally speaking, there exists the
10 aforementioned problem of excessive rigidity of said known nuts. This consists in the great difficulty of arranging them in position and the practical impossibility of removing them from the panel once they have performed their function or have deteriorated or
15 become obsolete.

Another existing drawback at present is the specialized nature of said type of nuts resulting from the limited range of their elastic action. Thus, some nuts are
20 suitable for panels with a large thickness, while other nuts are suitable for smaller thicknesses, such that they are not interchangeable in terms of use and, generally speaking, for each specific nut there is a reduction in the range of thicknesses of the panels for which they may
25 be satisfactorily used.

Another drawback which the present invention aims to solve is that associated with the high torsional forces which may arise when tightening the screw. Owing to the
30 intrinsic constructional nature of the nuts according to the art, they are relatively weak in response to torsional forces which may deform the upper strip and damage the nut.

The present invention aims to overcome said drawbacks. These and other advantages of the invention will become clearer during the course of the description thereof
5 provided below.

BRIEF DESCRIPTION OF THE INVENTION

Nut with a C-shaped profile, of the type formed by means of punching of a flat strip which, folded in the form of
10 a clip, is mounted on a panel and which has a passage for a screw and at least a single thread for the screwed member, there being provided a retaining claw, a bottom rear flange, side stops, open zones or reliefs situated at the front or rear of the hole in the lower base,
15 together with horizontal and longitudinal connecting portions.

The upper strip is provided with a fixing element for a screw, of the type consisting of an approximately conical
20 or spherical tube having a multiple threading with or without a self-locking property, or, in another embodiment, said threaded cylinder is replaced by a single-thread helical mechanism.

25 The arrangement of the elements described, as shown in the accompanying drawings and illustrated in the corresponding description of the practical embodiments, achieves all the predefined objects of the invention.

30 In particular, the retaining claw allows easy insertion of a tool, such as the tip of a screwdriver, which is able to slacken the retaining pressure of the clip nut on

the panel, thereby allowing easy removal thereof.

A nut according to the present invention, owing to its constructional configuration, also has an improved
5 elastic behavior which has the effect of making it easier to perform mounting thereof on the panel and improving the rigidity of the nuts according to the prior art.

Finally, the provision of its anti-torsion mechanism
10 ensures an improved performance compared to the prior art upon tightening of the screw.

BRIEF DESCRIPTION OF THE DRAWINGS

In order to facilitate understanding of the invention
15 three sheets of drawings are provided solely by way of a non-limiting example thereof.

Figure 1 shows a perspective view of one of the
20 embodiments of the present invention.

Figure 2 is a perspective view, from below, of the
embodiment shown in the preceding figure.

Figure 3 is another perspective view of the nut shown in
25 the preceding figures.

Figure 4 is a plan view of a metal sheet showing the
positions of the incisions and deformed zones forming the
parts of the nut as shown in the preceding figures.

30 Figures 5 and 6 show respective perspective views of a nut according to the present invention, mounted on a

panel, and the tip of a screwdriver acting on a retaining claw for releasing said nut from the panel.

Figure 7 is an elevation view of the nut according to the embodiment of the preceding figures, mounted on the panel, showing the heightwise overdimensioning of its longitudinal connecting portions.

Figure 8 is a perspective view of another possible embodiment of the present invention, more specifically with a self-locking multiple threading.

Figure 9 is another perspective view of another possible embodiment of the invention, this time with a tightening cross-section formed by a helical line of a single thread acting against the screw.

DETAILED DESCRIPTION OF THE INVENTION

The present invention consists of a nut with a C-shaped profile, of the type formed by a punched metal sheet folded onto itself for fixing onto a panel, wherein one of the arms, i.e. the upper base (10) has, formed therein, a hole for the arrangement of a screwed device with at least one thread and wherein the other arm, i.e. the lower base (11) has, aligned with the axis of the preceding hole, another hole for receiving the screw for tightening the nut.

The nut according to the invention is preferably made of heat-treated tempered carbon steel. This feature means that it has the mechanical hardness and elasticity properties which are necessary and convenient for this

type of product. In the same way it may be made of any type of material with hardness and elasticity properties which are suitable for the desired application.

- 5 As shown in Figure 4, the nut according to the invention may be obtained from a flat strip by means of deformation and punching so as to form all the parts thereof.

Folding is performed so as to form an upper strip (10)
10 and a lower strip (11) which are provided with a hole for receiving the screw or tightening member which is applied against the nut, it being possible to vary the shape of the retaining element depending on the intended use of the nut or the tightening member used. As shown in
15 Figures 1 to 7, in said embodiment the means for retaining the screw is a threaded cylinder with a multiple thread, while in the embodiment shown in Figure 8, said screw retaining element is designed with a self-locking feature.

20 A zone with an approximately conical or spherical geometrical form may exist at the joining point between said threaded cylinder (6) and said upper base (10), facilitating on the one hand the positioning of the screw
25 and increasing the rigidity of the said screwed section.

In Figure 9 the retaining element consists of a slit or track forming a helical line of a single retaining thread, whereby, in accordance with the prior art, it may
30 have radial slits.

In general, as already stated, any retaining element inside said type of nut is considered as being included

within the basic idea of the invention.

During use of the nut described, the latter is fitted around the panel by means of elastic deformation of its strips (10 and 11) in the form of a clip. The upper strip (10) is constructed, as a result of its shaped incisions and in accordance with the prior art, so as to be detached from the remainder of the nut, forming horizontal connecting portions (8), as shown in the figures. This allows suitable movement of said strip (10) avoiding any interference or collision with the fixed parts of the clip nut.

In the invention, as shown in Figure 7, the longitudinal connecting portions (7) which join together the upper strip (10) and the lower strip (11) have an overdimensioned height compared to the prior art. If "P" is the maximum thickness of the panel envisaged for use with the nut described, the height of said longitudinal connecting portion (7) now exceeds not only said height "P", but also the sum of said distance and the height "h" between the lower base and the highest point of a retaining claw (1), this being a characteristic feature of the present invention.

25

It is this retaining claw which allows, as shown in Figures 5 and 6, easy disassembly of the nut by means, for example, of the tip of a screwdriver, improving considerably the performance characteristics of said types of nut which is always very difficult to remove.

30

Said retaining claw (1) in the preferred embodiment has a form which is approximately that of an inverted "U",

viewed in a transverse plane close to the plane of said lower base (11). The object of said arrangement is to facilitate the action of the nut extraction tool which acts on said retaining claw (1). The function of said retaining claw (1) is also assisted by clearance spaces or reliefs which are formed around it, i.e. rear reliefs (4) and front reliefs (5) (see Figures) which are intended to facilitate the action of a tool for freeing said nut from the panel.

10

The nut according to the invention also has an anti-rotation mechanism acting against the torsional forces present during screwing together of the part. In fact, there is a bottom rear flange (2) and side stops (3) on said upper base (10) which form said anti-rotation mechanism.

Said rear flange (2) extends from the lower base (11) according to one of the characteristic features of the present invention. This bottom rear flange (2) allows, when the nut is pushed during assembly thereof, the upper base (10) to move freely depending on the thickness of the panel, reducing the force needed to perform said assembly.

25

The figures also show the presence of lateral projections on said surfaces, acting as stops, these limiting the possible travel during interaction of said movable parts with each other.

30

As a whole, the nut according to the present invention, within the categories of clip nuts or clamping nuts which are C-shaped, or U-shaped to describe them in another

way, achieves all the predefined objects, providing a highly versatile fast-action nut which can be advantageously adapted to a wide range of panel thicknesses and which, being provided with a mechanism
5 for removing the nut, separating it from the panel on which it was mounted, includes improved anti-rotation functions, being able to adapt to different means for retaining the tightening member.

10 It is understood that the final details and form described here may be varied provided that they do not modify the basic idea of the invention.

CLAIMS

1. A NUT WITH A C-SHAPED PROFILE, of the type formed by a punched metal sheet folded onto itself for fixing onto a panel, wherein one of the arms, i.e. the upper base (10), has a hole for the arrangement of a screwed device with at least one thread and wherein the other arm, i.e. the lower base (11), which is aligned with the axis of the preceding hole, has another hole for receiving the nut tightening screw, said upper base (10) being provided with incisions which define horizontal connecting portions (8) separated from the body of said upper base (10) and longitudinal connecting portions (7) which form an extension of the former and which join together said upper base (10) and lower base (11), which has a retaining claw (1) which is designed to facilitate application of a tool for slackening the pressure which the nut applies to the panel to which it is fixed; which has a bottom rear flange (2) and side stops (3) on said upper base (10) which form an anti-rotation mechanism when a screw is tightened on the nut; said bottom rear flange (2) freeing from pressure said upper base (10) during assembly on the panel; and said longitudinal connecting portions (7) are overdimensioned, i.e. their height is greater than the sum of the greatest thickness "P" of the panel foreseen for use with said nut and the height "h" of said retaining claw in relation to said lower base (11).

2. THE NUT WITH A C-SHAPED PROFILE as claimed in claim 1, wherein said retaining claw has a form which is approximately that of an inverted "U" in a transverse plane close to the plane of said lower base (11).

3. THE NUT WITH A C-SHAPED PROFILE as claimed in the preceding claims, which has rear reliefs (4) and front reliefs (5) designed to facilitate the action of a tool for freeing said nut from the panel.

4. THE NUT WITH A C-SHAPED PROFILE as claimed in the preceding claims, which has lateral projections on said bottom rear flange (2) and said side stops (3), acting as stops, these limiting the possible travel during interaction of said movable parts with each other.

5. THE NUT WITH A C-SHAPED PROFILE as claimed in the preceding claims, wherein said screwed device is a threaded cylinder (6) with a multiple thread.

6. THE NUT WITH A C-SHAPED PROFILE as claimed in the preceding claim, wherein an approximately conical or spherical geometrical form is present at the joining zone between said threaded cylinder (6) and said upper base (10).

7. THE NUT WITH A C-SHAPED PROFILE as claimed in the preceding claim, wherein said threaded cylinder is modified being provided with a self-locking multiple threading.

8. THE NUT WITH A C-SHAPED PROFILE as claimed in claims 1 to 4, wherein said screwed device is formed by a helical line.

9. THE NUT WITH A C-SHAPED PROFILE as claimed in the preceding claim, wherein said helical line has radial incisions.

1/3

FIG. 1

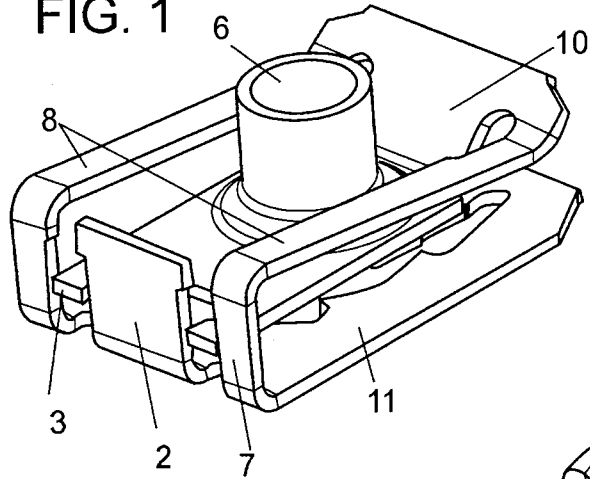


FIG. 2


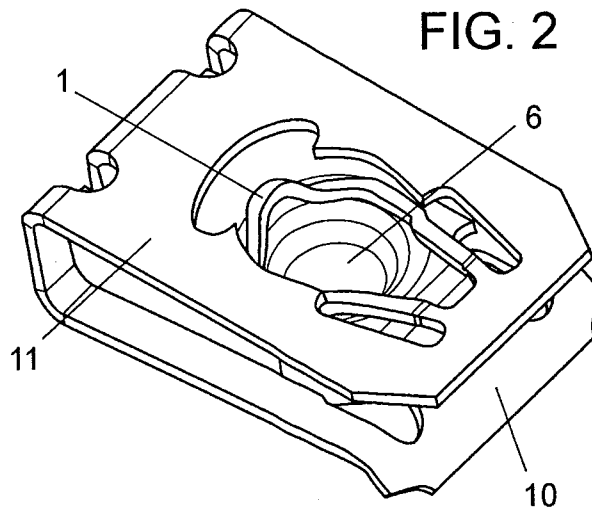


FIG. 3

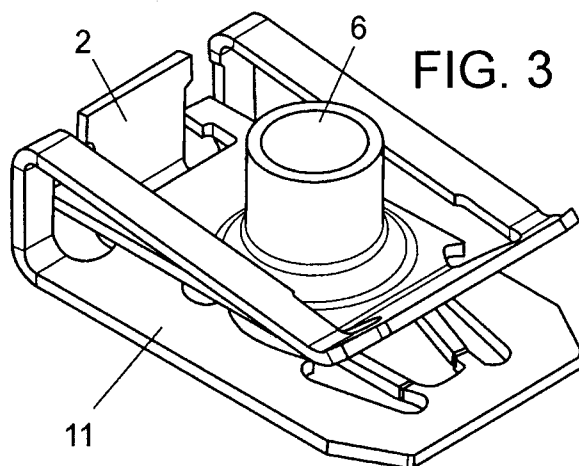

2 / 3

FIG. 4

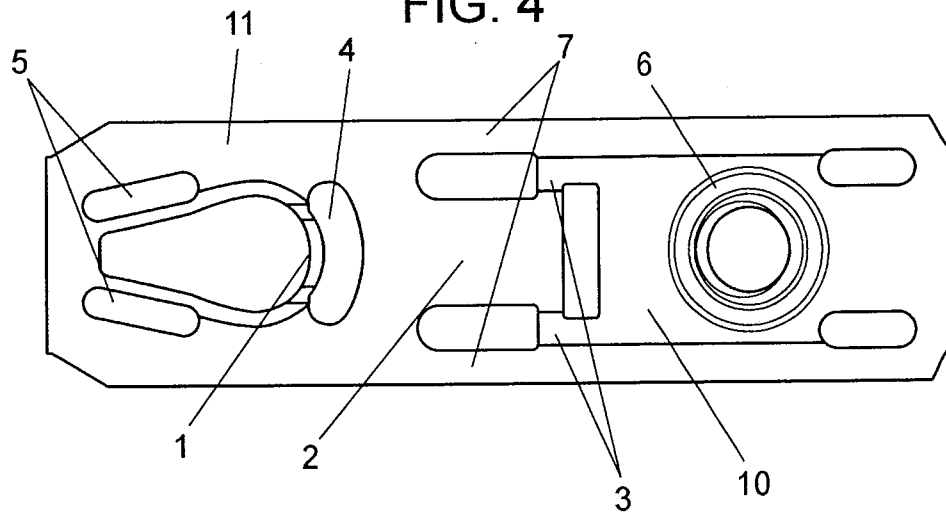


FIG. 5

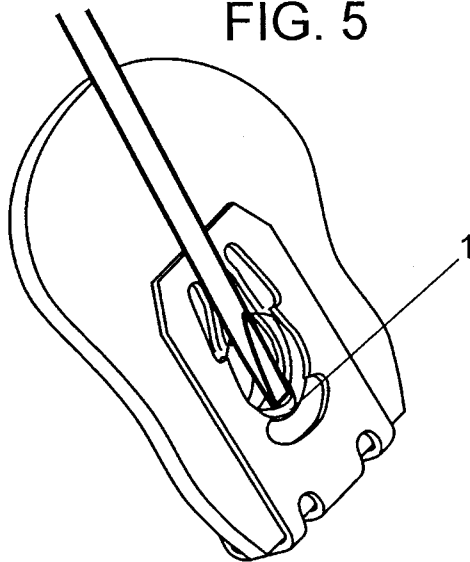


FIG. 6

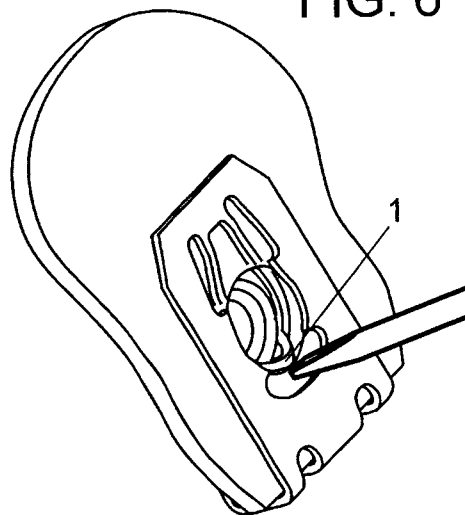


FIG. 7

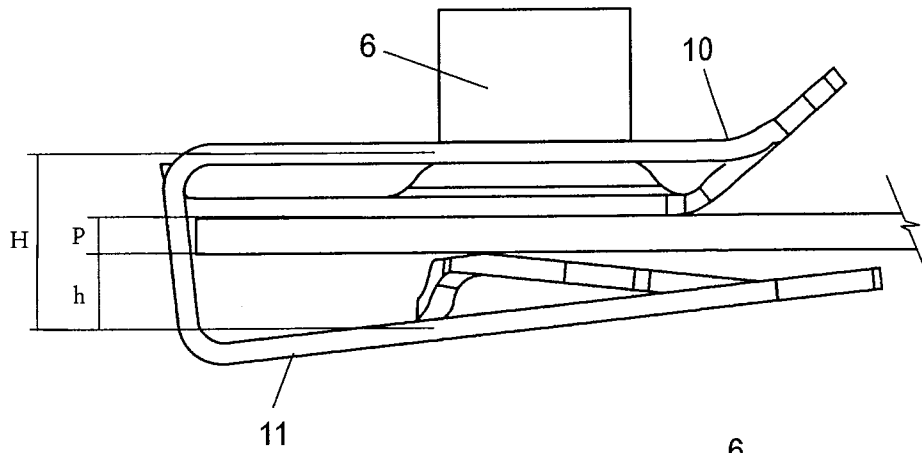


FIG. 8


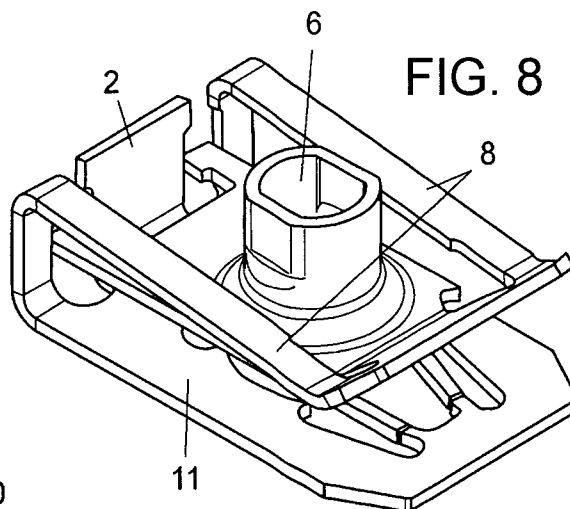


FIG. 9

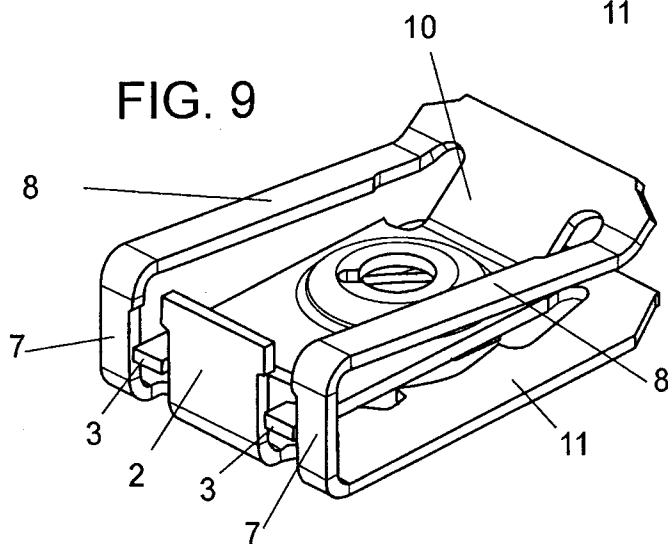

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2010/023162

A. CLASSIFICATION OF SUBJECT MATTER
INV. F16B37/04
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
F16B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 298 07 055 U1 (MARK RUDOLF [AT]; MARK THOMAS [AT]) 10 June 1998 (1998-06-10) page 5, lines 17-34	1-9
A	US 4 729 706 A (PETERSON FRANCIS C [US] ET AL FRANCIS C PETERSON [US] ET AL) 8 March 1988 (1988-03-08) column 2, line 33 - column 3, line 24	1-9

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

17 May 2010

Date of mailing of the international search report

28/05/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Rochus, Johann

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2010/023162

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 29807055	U1	10-06-1998	NONE
US 4729706	A	08-03-1988	CA 1296205 C 25-02-1992
		DE 3743038 A1	20-10-1988
		JP 63251616 A	19-10-1988
		JP 2537555 Y2	04-06-1997
		JP 8001543 U	01-11-1996