

(51) International Patent Classification:
H04J 3/06 (2006.01)

(21) International Application Number:

PCT/US2012/034853

(22) International Filing Date:

25 April 2012 (25.04.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/480,700

29 April 2011 (29.04.2011)

US

(71) Applicant (for all designated States except US): **CORNING CABLE SYSTEMS LLC** [US/US]; 800 17th Street NW, Hickory, North Carolina 28602 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BERLIN, Igor** [IL/US]; 9129 Wandering Trail Drive, Potomac, Maryland 20854 (US). **PIKULA, Dragan** [CA/US]; 431 Bluegrass Drive, Horseheads, New York 14845 (US). **SAUER, Mi-****chael** [DE/US]; 39 Houghton Circle, Corning, New York 14830 (US). **SCHMIDT, Gerald B** [DE/US]; 131 Davis Street, Painted Post, New York 14870 (US).(74) Agent: **MONTGOMERY, C. Keith**; Corning Cable Systems LLC, 800 17th Street NW, PO Box 489, Hickory, North Carolina 28603-0489 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,

[Continued on next page]

(54) Title: DETERMINING PROPAGATION DELAY OF COMMUNICATIONS IN DISTRIBUTED ANTENNA SYSTEMS, AND RELATED COMPONENTS, SYSTEMS AND METHODS

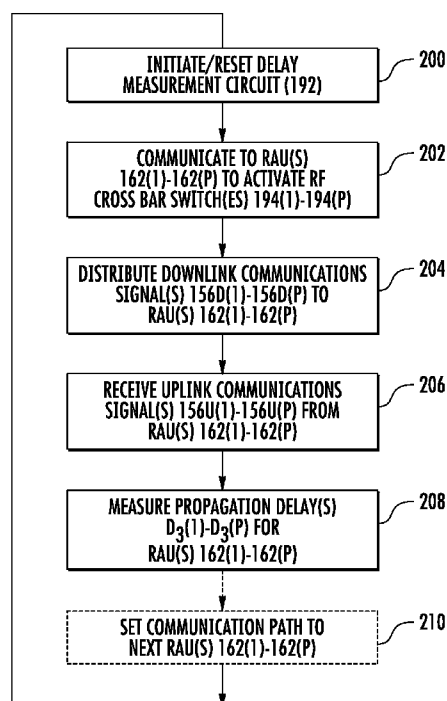


FIG. 10

(57) Abstract: Components, systems, and methods for determining propagation delay of communications in distributed antenna systems are disclosed. The propagation delay of communications signals distributed in the distributed antenna systems is determined. If desired, the propagation delay(s) can be determined on a per remote antenna unit basis for the distributed antenna systems. The propagation delay(s) can be provided by the distributed antenna systems to a network or other system to be taken into consideration for communications services or operations that are based on communications signal delay. As another non-limiting example, propagation delay can be determined and controlled for each remote antenna unit to be uniquely distinguish the remote antenna units. In this manner, the location of a client device communicating with a remote antenna unit can be determined within the communication range of the remote antenna unit.



UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

DETERMINING PROPAGATION DELAY OF COMMUNICATIONS IN DISTRIBUTED ANTENNA SYSTEMS, AND RELATED COMPONENTS, SYSTEMS, AND METHODS

PRIORITY CLAIM

[0001] The present application claims priority U.S. Provisional Patent Application Serial No. 61/480,700 filed on April 29, 2011, entitled “DETERMINING PROPAGATION DLEAY OF COMMUNICATIONS IN DISTRIBUTED ANTENNA SYTEMS, AND RELATED COMPONENTS, SYSTEMS, AND METHODS,” which is incorporated herein by reference in its entirety.

RELATED APPLICATIONS

[0002] The present application is also related to U.S. Patent Application Serial No. 12/914,585 filed on October 28, 2010, entitled “SECTORIZATION IN DISTRIBUTED ANTENNA SYSTEMS, AND RELATED COMPONENTS AND METHODS,” which is incorporated herein by reference in its entirety.

BACKGROUND

Field of the Disclosure

[0003] The technology of the disclosure relates to determining propagation delay in distributed radio frequency (RF) communications signals communicated over optical fiber in distributed antenna systems.

Technical Background

[0004] Wireless communication is rapidly growing, with ever-increasing demands for high-speed mobile data communication. As an example, so-called “wireless fidelity” or “WiFi” systems and wireless local area networks (WLANs) are being deployed in many different types of areas (e.g., coffee shops, airports, libraries, etc.). Distributed antenna systems communicate with wireless devices called “clients” (e.g., for WiFi services) or “user equipment” (e.g., for cellular services) which must reside within the wireless range or “cell coverage area” in order to communicate with an access point device.

[0005] One approach to deploying a distributed antenna system involves the use of radio frequency (RF) antenna coverage areas, also referred to as “antenna coverage

areas.” Antenna coverage areas can have a radius in the range from a few meters up to twenty meters as an example. Combining a number of access point devices creates an array of antenna coverage areas. Because the antenna coverage areas each cover small areas, there are typically only a few users (clients) per antenna coverage area. This allows for minimizing the amount of RF bandwidth shared among the wireless system users. It may be desirable to provide antenna coverage areas in a building or other facility to provide distributed antenna system access to clients within the building or facility. However, it may be desirable to employ optical fiber to distribute communications signals. Benefits of optical fiber include increased bandwidth.

[0006] One type of distributed antenna system for creating antenna coverage areas, called “Radio-over-Fiber” or “RoF,” utilizes RF signals sent over optical fibers. Such systems can include head-end equipment optically coupled to a plurality of remote antenna units that each provides antenna coverage areas. The remote antenna units can each include RF transceivers coupled to an antenna to transmit RF signals wirelessly, wherein the remote antenna units are coupled to the head-end equipment via optical fiber links. The RF transceivers in the remote antenna units are transparent to the RF signals. The remote antenna units convert incoming optical RF signals from an optical fiber downlink to electrical RF signals via optical-to-electrical (O/E) converters, which are then passed to the RF transceiver. The RF transceiver converts the electrical RF signals to electromagnetic signals via antennas coupled to the RF transceiver provided in the remote antenna units. The antennas also receive electromagnetic signals (i.e., electromagnetic radiation) from clients in the antenna coverage area and convert them to electrical RF signals (i.e., electrical RF signals in wire). The remote antenna units then convert the electrical RF signals to optical RF signals via electrical-to-optical (E/O) converters. The optical RF signals are then sent over an optical fiber uplink to the head-end equipment.

[0007] It may be desired to provide such optical fiber-based distributed communications systems indoors, such as inside a building or other facility, to provide indoor wireless communication for clients. Otherwise, wireless reception may be poor or not possible for wireless communication clients located inside the building. In this regard, the remote antenna units can be distributed throughout locations inside a building to extend wireless communication coverage throughout the building. However, other services may be affected. For example, cellular communications protocols may be based on time based protocols. However, distributing cellular communications to remote antenna units inside a building or other environment can increase delay or introduce path

dependent variability of observed delays due to the propagation delay of the communications signals being distributed to the remote antenna units and responses received at the remote antenna units being distributed back to head-end equipment. If the delay(s) exceeds a certain level, the bandwidth of the communications system may be reduced. Other undesired effects can also result from delay exceeding certain levels, including interference. As another example, providing localization services for a client, such as emergency 911 (E911) services, may be determined or calculated based on over-the-air delay between communications from a client and a communications tower. However, if the client is communicating over a distributed antenna system, the propagation delay of the distributed antenna system increases the delay thus possibly resulting in an incorrect determination of a location of the client.

[0008] Delay can be compensated for in a cellular communications system, but the cellular communications system may be unaware of indoor distributed antenna systems that increase the delay as a result of propagation delay. Also, a cellular communications system may provide for the ability to set a flag or other indicator to indicate that distributed antenna systems are present in coverage areas for communications antennas or towers. However, this setting may only provide for the ability of the cellular communications system to approximate additional propagation delay present which may not be accurate.

SUMMARY OF THE DETAILED DESCRIPTION

[0009] Embodiments disclosed in the detailed description include components, systems, and methods for determining propagation delay of communications in distributed antenna systems. The propagation delay of communications signals distributed in the distributed antenna systems is determined. If desired, the propagation delay(s) can be determined on a per remote antenna unit basis for the distributed antenna systems. The propagation delay(s) can be provided by the distributed antenna systems to a network or other system to be taken into consideration for communications services or operations that are based on communications signal delay. Delay based operations may be made more effective, efficient, and/or accurate by knowing the propagation delay experienced in a distributed antenna system.

As a non-limiting example, the determined propagation delay(s) can be taken into consideration for communications services or operations that are based on communications signal delay. As another non-limiting example, the propagation delay(s)

may be associated with communication antennas or towers that are mapped and stored in a database(s) to be used for communications services or operations based on communications signal delay. As another non-limiting example, the arrangement of the base station, repeaters, or communication towers in a network may be repositioned based on the determined propagation delay. As another non-limiting example, propagation delay can be determined and controlled for each remote antenna unit to be uniquely distinguish the remote antenna units. In this manner, the location of a client device communicating with a remote antenna unit can be determined within the communication range of the remote antenna unit.

[0010] In this regard, in one embodiment, a distributed antenna system is provided. The system comprises at least one downlink radio frequency (RF) interface configured to receive downlink RF signals and distribute the downlink RF signals over at least one downlink communications medium to one or more remote antenna units (RAUs). This system also comprises at least one uplink RF interface configured to receive uplink RF signals over at least one uplink communications medium from the one or more RAUs. This system also comprises at least one propagation delay measurement circuit communicatively coupled to the at least one downlink RF interface and the at least one uplink RF interface and configured to measure propagation delay between the distribution of the downlink RF signals by the at least one downlink RF interface and the receipt of the downlink RF signals as uplink RF signals by the at least one uplink RF interface. This system also comprises a controller communicatively coupled to the at least one propagation delay measurement circuit. This controller is configured to communicate to an RAU among the one or more RAUs to return received downlink RF signals as uplink RF signals to the at least one uplink RF interface. This controller is also configured to activate the at least one downlink RF interface to distribute the received downlink RF signals to the RAU among the one or more RAUs. This controller is also configured to determine the propagation delay as a function of delay between the at least one downlink RF interface and the RAU among the one or more RAUs, and as a function of delay between the RAU among the one or more RAUs and the at least one uplink RF interface from the at least one propagation delay measurement circuit.

[0011] In another embodiment, a method of determining propagation delay in a distributed antenna system is provided. This method includes communicating to a remote antenna unit (RAU) among one or more RAUs to return received downlink radio frequency (RF) signals from at least one downlink RF interface as uplink RF signals to at

least one uplink RF interface. The method also includes activating the at least one downlink RF interface to distribute the received downlink RF signals to the RAU among the one or more RAUs. This method also includes distributing the downlink RF signals to the RAU among the one or more RAUs over at least one downlink communications medium. This method also includes receiving the distributed downlink RF signals as the uplink RF signals from the RAU among the one or more RAUs over at least one uplink communications medium. This method also includes determining propagation delay using at least one propagation delay measurement circuit as a function of delay between the at least one downlink RF interface and the RAU among the one or more RAUs, and as a function of delay between the RAU among the one or more RAUs and the at least one uplink RF interface.

[0012] As a non-limiting example, the distributed antenna system may be an optical fiber-based distributed antenna system, but such is not required. The embodiments disclosed herein are also applicable to other distributed antenna systems, including those that include other forms of communications media for distribution of communications signals, including electrical conductors and wireless transmission. The embodiments disclosed herein may also be applicable to distributed antenna system may also include more than one communications media for distribution of communications signals.

[0013] Additional features and advantages will be set forth in the detailed description which follows, and in part will be readily apparent to those skilled in the art from that description or recognized by practicing the embodiments as described herein, including the detailed description that follows, the claims, as well as the appended drawings.

[0014] The drawings illustrate various embodiments, and together with the description serve to explain the principles and operation of the concepts disclosed.

BRIEF DESCRIPTION OF THE FIGURES

[0015] **FIG. 1** is a schematic diagram of an exemplary optical fiber-based distributed antenna system;

[0016] **FIG. 2** is a more detailed schematic diagram of exemplary head-end equipment and a remote antenna unit (RAU) that can be deployed in the optical fiber-based distributed antenna system of **FIG. 1**;

[0017] **FIG. 3** is a partially schematic cut-away diagram of an exemplary building infrastructure in which the optical fiber-based distributed antenna system in **FIG. 1** can be employed;

[0018] **FIG. 4** is a schematic diagram of exemplary head-end equipment to provide radio frequency (RF) communication services over optical fiber to RAUs or other remote communications devices in an optical fiber-based distributed antenna system;

[0019] **FIG. 5** is a schematic diagram of an exemplary distributed antenna system with alternative equipment to provide RF communication services over optical fiber and digital data services as electrical signals to RAUs or other remote communications devices in an optical fiber-based distributed antenna system;

[0020] **FIG. 6** is a schematic diagram of providing digital data services as electrical signals and RF communication services over optical fiber to RAUs or other remote communications devices in the optical fiber-based distributed antenna system of **FIG. 5**;

[0021] **FIG. 7** is a schematic diagram of an exemplary distributed antenna system illustrating propagation delays present in the distributed antenna system;

[0022] **FIG. 8** is a schematic diagram of an exemplary distributed antenna system configured to communicate tracking signals to tracking RAUs to provide localization services for client devices;

[0023] **FIG. 9** is a schematic diagram of determining total propagation delay within the exemplary distributed antenna system in **FIG. 7**;

[0024] **FIG. 10** is a flowchart illustrating an exemplary process of measuring total propagation delay within the exemplary distributed antenna system in **FIG. 9**;

[0025] **FIGS. 11A-11E** are schematic diagrams of exemplary propagation delay measurement circuits used for determining propagation delay in a distributed antenna system;

[0026] **FIG. 12** is a schematic diagram of determining propagation delay of optical fiber within an exemplary optical fiber-based distributed antenna system;

[0027] **FIG. 13** is a schematic diagram of providing additional propagation delay in an exemplary optical fiber-based distributed antenna system; and

[0028] **FIG. 14** is a schematic diagram of a generalized representation of an exemplary computer system that can be included in any of the modules provided in the exemplary distributed antenna systems and/or their components described herein, including but not limited to a head end controller (HEC), wherein the exemplary computer system is adapted to execute instructions from an exemplary computer-readable media.

DETAILED DESCRIPTION

[0029] Reference will now be made in detail to the embodiments, examples of which are illustrated in the accompanying drawings, in which some, but not all embodiments are shown. Indeed, the concepts may be embodied in many different forms and should not be construed as limiting herein; rather, these embodiments are provided so that this disclosure will satisfy applicable legal requirements. Whenever possible, like reference numbers will be used to refer to like components or parts.

[0030] Embodiments disclosed in the detailed description include components, systems, and methods for determining propagation delay of communications in distributed antenna systems. The propagation delay of communications signals distributed in the distributed antenna systems is determined. If desired, the propagation delay(s) can be determined on a per remote antenna unit basis for the distributed antenna systems. The propagation delay(s) can be provided by the distributed antenna systems to a network or other system to be taken into consideration for communications services or operations that are based on communications signal delay. Delay based operations may be made more effective, efficient, and/or accurate by knowing the propagation delay experienced in a distributed antenna system.

As a non-limiting example, the determined propagation delay(s) can be to be taken into consideration for communications services or operations that are based on communications signal delay. As another non-limiting example, the propagation delay(s) may be associated with communication antennas or towers that are mapped and stored in a database(s) to be used for communications services or operations based on communications signal delay. As another non-limiting example, the arrangement of the base station, repeaters, or communication towers in a network may be repositioned based on the determined propagation delay. As another non-limiting example, propagation delay can be determined and controlled for each remote antenna unit to be uniquely distinguish the remote antenna units. In this manner, the location of a client device communicating with a remote antenna unit can be determined within the communication range of the remote antenna unit.

[0031] Before discussing examples of distributed antenna systems that determine propagation delay of communications signals distributed within the distributed antenna systems, exemplary distributed antenna systems capable of distributing communications signals to distributed or remote antenna units is first described with regard to **FIGS. 1-6**. Embodiments of determining propagation delay of communications signals distributed in

distributed antenna systems starts at **FIG. 7**. The distributed antenna systems in **FIGS. 1-6** discussed below include distribution of radio frequency (RF) communications signals, but the distributed antenna systems are not limited to distribution of RF communications signals. Further, the distributed antenna systems in **FIGS. 1-6** discussed below include distribution of communications signals over optical fiber, but the distributed antenna systems are not limited to distribution over optical fiber.

[0032] In this regard, **FIG. 1** is a schematic diagram of an embodiment of a distributed antenna system. In this embodiment, the system is an optical fiber-based distributed antenna system **10**. The optical fiber-based distributed antenna system **10** is configured to create one or more antenna coverage areas for establishing communications with wireless client devices located in the RF range of the antenna coverage areas. The optical fiber-based distributed antenna system **10** provides RF communication services (e.g., cellular services). In this embodiment, the optical fiber-based distributed antenna system **10** includes head-end equipment (HEE) **12** such as a head-end unit (HEU), one or more remote antenna units (RAUs) **14**, and an optical fiber **16** that optically couples the HEE **12** to the RAU **14**. The RAU **14** is a type of remote communications unit. In general, a remote communications unit can support wireless communications, wired communications, or both. The RAU **14** can support wireless communications and may also support wired communications. The HEE **12** is configured to receive communications over downlink electrical RF signals **18D** from a source or sources, such as a network or carrier as examples, and provide such communications to the RAU **14**. The HEE **12** is also configured to return communications received from the RAU **14**, via uplink electrical RF signals **18U**, back to the source or sources. In this regard in this embodiment, the optical fiber **16** includes at least one downlink optical fiber **16D** to carry signals communicated from the HEE **12** to the RAU **14** and at least one uplink optical fiber **16U** to carry signals communicated from the RAU **14** back to the HEE **12**.

[0033] One downlink optical fiber **16D** and one uplink optical fiber **16U** could be provided to support multiple channels each using wave-division multiplexing (WDM), as discussed in U.S. Patent Application Serial No. 12/892,424 entitled "Providing Digital Data Services in Optical Fiber-based Distributed Radio Frequency (RF) Communications Systems, And Related Components and Methods," incorporated herein by reference in its entirety. Other options for WDM and frequency-division multiplexing (FDM) are disclosed in U.S. Patent Application Serial No. 12/892,424, any of which can be employed in any of the embodiments disclosed herein. Further, U.S. Patent Application

Serial No. 12/892,424 also discloses distributed digital data communications signals in a distributed antenna system which may also be distributed in the optical fiber-based distributed antenna system **10** either in conjunction with RF communications signals or not.

[0034] The optical fiber-based distributed antenna system **10** has an antenna coverage area **20** that can be disposed about the RAU **14**. The antenna coverage area **20** of the RAU **14** forms an RF coverage area **21**. The HEE **12** is adapted to perform or to facilitate any one of a number of Radio-over-Fiber (RoF) applications, such as RF identification (RFID), wireless local-area network (WLAN) communication, or cellular phone service. Shown within the antenna coverage area **20** is a client device **24** in the form of a mobile device as an example, which may be a cellular telephone as an example. The client device **24** can be any device that is capable of receiving RF communications signals. The client device **24** includes an antenna **26** (e.g., a wireless card) adapted to receive and/or send electromagnetic RF signals.

[0035] With continuing reference to **FIG. 1**, to communicate the electrical RF signals over the downlink optical fiber **16D** to the RAU **14**, to in turn be communicated to the client device **24** in the antenna coverage area **20** formed by the RAU **14**, the HEE **12** includes an electrical-to-optical (E/O) converter **28**. The E/O converter **28** converts the downlink electrical RF signals **18D** to downlink optical RF signals **22D** to be communicated over the downlink optical fiber **16D**. The RAU **14** includes an optical-to-electrical (O/E) converter **30** to convert received downlink optical RF signals **22D** back to electrical RF signals to be communicated wirelessly through an antenna **32** of the RAU **14** to client devices **24** located in the antenna coverage area **20**.

[0036] Similarly, the antenna **32** is also configured to receive wireless RF communications from client devices **24** in the antenna coverage area **20**. In this regard, the antenna **32** receives wireless RF communications from client devices **24** and communicates electrical RF signals representing the wireless RF communications to an E/O converter **34** in the RAU **14**. The E/O converter **34** converts the electrical RF signals into uplink optical RF signals **22U** to be communicated over the uplink optical fiber **16U**. An O/E converter **36** provided in the HEE **12** converts the uplink optical RF signals **22U** into uplink electrical RF signals, which can then be communicated as uplink electrical RF signals **18U** back to a network or other source. The HEE **12** in this embodiment is not able to distinguish the location of the client devices **24** in this embodiment. The client device **24** could be in the range of any antenna coverage area **20** formed by an RAU **14**.

[0037] FIG. 2 is a more detailed schematic diagram of the exemplary optical fiber-based distributed antenna system 10 of FIG. 1 that provides electrical RF service signals for a particular RF service or application. In an exemplary embodiment, the HEE 12 includes a service unit 37 that provides electrical RF service signals by passing (or conditioning and then passing) such signals from one or more outside networks 38 via a network link 39. In a particular example embodiment, this includes providing cellular signal distribution in the frequency range from 400 MegaHertz (MHz) to 2.7 GigaHertz (GHz). Any other electrical RF signal frequencies are possible. In another exemplary embodiment, the service unit 37 provides electrical RF service signals by generating the signals directly. In another exemplary embodiment, the service unit 37 coordinates the delivery of the electrical RF service signals between client devices 24 within the antenna coverage area 20.

[0038] With continuing reference to FIG. 2, the service unit 37 is electrically coupled to the E/O converter 28 that receives the downlink electrical RF signals 18D from the service unit 37 and converts them to corresponding downlink optical RF signals 22D. In an exemplary embodiment, the E/O converter 28 includes a laser suitable for delivering sufficient dynamic range for the RoF applications described herein, and optionally includes a laser driver/amplifier electrically coupled to the laser. Examples of suitable lasers for the E/O converter 28 include, but are not limited to, laser diodes, distributed feedback (DFB) lasers, Fabry-Perot (FP) lasers, and vertical cavity surface emitting lasers (VCSELs).

[0039] With continuing reference to FIG. 2, the HEE 12 also includes the O/E converter 36, which is electrically coupled to the service unit 37. The O/E converter 36 receives the uplink optical RF signals 22U and converts them to corresponding uplink electrical RF signals 18U. In an example embodiment, the O/E converter 36 is a photodetector, or a photodetector electrically coupled to a linear amplifier. The E/O converter 28 and the O/E converter 36 constitute a “converter pair” 35, as illustrated in FIG. 2.

[0040] In accordance with an exemplary embodiment, the service unit 37 in the HEE 12 can include an RF signal conditioner unit 40 for conditioning the downlink electrical RF signals 18D and the uplink electrical RF signals 18U, respectively. The service unit 37 can include a digital signal processing unit (“digital signal processor”) 42 for providing to the RF signal conditioner unit 40 an electrical signal that is modulated onto an RF carrier to generate a desired downlink electrical RF signal 18D. The digital signal

processor **42** is also configured to process a demodulation signal provided by the demodulation of the uplink electrical RF signal **18U** by the RF signal conditioner unit **40**. The HEE **12** can also include an optional central processing unit (CPU) **44** for processing data and otherwise performing logic and computing operations, and a memory unit **46** for storing data, such as data to be transmitted over a WLAN or other network for example.

[0041] With continuing reference to **FIG. 2**, the RAU **14** also includes a converter pair **48** comprising the O/E converter **30** and the E/O converter **34**. The O/E converter **30** converts the received downlink optical RF signals **22D** from the HEE **12** back into downlink electrical RF signals **50D**. The E/O converter **34** converts uplink electrical RF signals **50U** received from the client device **24** into the uplink optical RF signals **22U** to be communicated to the HEE **12**. The O/E converter **30** and the E/O converter **34** are electrically coupled to the antenna **32** via an RF signal-directing element **52**, such as a circulator for example. The RF signal-directing element **52** serves to direct the downlink electrical RF signals **50D** and the uplink electrical RF signals **50U**, as discussed below. In accordance with an exemplary embodiment, the antenna **32** can include any type of antenna, including but not limited to one or more patch antennas, such as disclosed in U.S. Patent Application Serial No. 11/504,999, filed August 16, 2006 entitled “Radio-over-Fiber Transponder With A Dual-Band Patch Antenna System,” and U.S. Patent Application Serial No. 11/451,553, filed June 12, 2006 entitled “Centralized Optical Fiber-Based Wireless Picocellular Systems and Methods,” both of which are incorporated herein by reference in their entireties.

[0042] With continuing reference to **FIG. 2**, the optical fiber-based distributed antenna system **10** also includes a power supply **54** that provides an electrical power signal **56**. The power supply **54** is electrically coupled to the HEE **12** for powering the power-consuming elements therein. In an exemplary embodiment, an electrical power line **58** runs through the HEE **12** and over to the RAU **14** to power the O/E converter **30** and the E/O converter **34** in the converter pair **48**, the optional RF signal-directing element **52** (unless the RF signal-directing element **52** is a passive device such as a circulator for example), and any other power-consuming elements provided. In an exemplary embodiment, the electrical power line **58** includes two wires **60** and **62** that carry a single voltage and are electrically coupled to a DC power converter **64** at the RAU **14**. The DC power converter **64** is electrically coupled to the O/E converter **30** and the E/O converter **34** in the converter pair **48**, and changes the voltage or levels of the electrical power signal **56** to the power level(s) required by the power-consuming

components in the RAU **14**. In an exemplary embodiment, the DC power converter **64** is either a DC/DC power converter or an AC/DC power converter, depending on the type of electrical power signal **56** carried by the electrical power line **58**. In another example embodiment, the electrical power line **58** (dashed line) runs directly from the power supply **54** to the RAU **14** rather than from or through the HEE **12**. In another example embodiment, the electrical power line **58** includes more than two wires and may carry multiple voltages.

[0043] To provide further exemplary illustration of how an optical fiber-based distributed antenna system can be deployed indoors, **FIG. 3** is provided. **FIG. 3** is a partially schematic cut-away diagram of a building infrastructure **70** employing an optical fiber-based distributed antenna system. The system may be the optical fiber-based distributed antenna system **10** of **FIGS. 1** and **2**. The building infrastructure **70** generally represents any type of building in which the optical fiber-based distributed antenna system **10** can be deployed. As previously discussed with regard to **FIGS. 1** and **2**, the optical fiber-based distributed antenna system **10** incorporates the HEE **12** to provide various types of communication services to coverage areas within the building infrastructure **70**, as an example. For example, as discussed in more detail below, the optical fiber-based distributed antenna system **10** in this embodiment is configured to receive wireless RF signals and convert the RF signals into RoF signals to be communicated over the optical fiber **16** to multiple RAUs **14**. The optical fiber-based distributed antenna system **10** in this embodiment can be, for example, an indoor distributed antenna system (IDAS) to provide wireless service inside the building infrastructure **70**. These wireless signals can include cellular service, wireless services such as RFID tracking, Wireless Fidelity (WiFi), local area network (LAN), WLAN, public safety, wireless building automations, and combinations thereof, as examples.

[0044] With continuing reference to **FIG. 3**, the building infrastructure **70** in this embodiment includes a first (ground) floor **72**, a second floor **74**, and a third floor **76**. The floors **72**, **74**, **76** are serviced by the HEE **12** through a main distribution frame **78** to provide antenna coverage areas **80** in the building infrastructure **70**. Only the ceilings of the floors **72**, **74**, **76** are shown in **FIG. 3** for simplicity of illustration. In the example embodiment, a main cable **82** has a number of different sections that facilitate the placement of a large number of RAUs **14** in the building infrastructure **70**. Each RAU **14** in turn services its own coverage area in the antenna coverage areas **80**. The main cable **82** can include, for example, a riser cable **84** that carries all of the downlink and uplink

optical fibers **16D**, **16U** to and from the HEE **12**. The riser cable **84** may be routed through an interconnect unit (ICU) **85**. The ICU **85** may be provided as part of or separate from the power supply **54** in **FIG. 2**. The ICU **85** may also be configured to provide power to the RAUs **14** via the electrical power line **58**, as illustrated in **FIG. 2** and discussed above, provided inside an array cable **87**, or tail cable or home-run tether cable as other examples, and distributed with the downlink and uplink optical fibers **16D**, **16U** to the RAUs **14**. The main cable **82** can include one or more multi-cable (MC) connectors adapted to connect select downlink and uplink optical fibers **16D**, **16U**, along with an electrical power line, to a number of optical fiber cables **86**.

[0045] The main cable **82** enables multiple optical fiber cables **86** to be distributed throughout the building infrastructure **70** (e.g., fixed to the ceilings or other support surfaces of each floor **72**, **74**, **76**) to provide the antenna coverage areas **80** for the first, second, and third floors **72**, **74**, and **76**. In an example embodiment, the HEE **12** is located within the building infrastructure **70** (e.g., in a closet or control room), while in another example embodiment, the HEE **12** may be located outside of the building infrastructure **70** at a remote location. A base transceiver station (BTS) **88**, which may be provided by a second party such as a cellular service provider, is connected to the HEE **12**, and can be co-located or located remotely from the HEE **12**. A BTS is any station or signal source that provides an input signal to the HEE **12** and can receive a return signal from the HEE **12**. In a typical cellular system, for example, a plurality of BTSs are deployed at a plurality of remote locations to provide wireless telephone coverage. Each BTS serves a corresponding cell and when a mobile client device enters the cell, the BTS communicates with the mobile client device. Each BTS can include at least one radio transceiver for enabling communication with one or more subscriber units operating within the associated cell. As another example, wireless repeaters or bi-directional amplifiers could also be used to serve a corresponding cell in lieu of a BTS. Alternatively, radio input could be provided by a repeater, picocell or femtocell as other examples.

[0046] The optical fiber-based distributed antenna system **10** in **FIGS. 1-3** and described above provides point-to-point communications between the HEE **12** and the RAU **14**. A multi-point architecture is also possible as well. With regard to **FIGS. 1-3**, each RAU **14** communicates with the HEE **12** over a distinct downlink and uplink optical fiber pair to provide the point-to-point communications. Whenever an RAU **14** is installed in the optical fiber-based distributed antenna system **10**, the RAU **14** is connected to a distinct downlink and uplink optical fiber pair connected to the HEE **12**.

The downlink and uplink optical fibers **16D**, **16U** may be provided in a fiber optic cable. Multiple downlink and uplink optical fiber pairs can be provided in a fiber optic cable to service multiple RAUs **14** from a common fiber optic cable. For example, with reference to **FIG. 3**, RAUs **14** installed on a given floor **72**, **74**, or **76** may be serviced from the same optical fiber **16**. In this regard, the optical fiber **16** may have multiple nodes where distinct downlink and uplink optical fiber pairs can be connected to a given RAU **14**. One downlink optical fiber **16D** could be provided to support multiple channels each using wavelength-division multiplexing (WDM), as discussed in U.S. Patent Application Serial No. 12/892,424 entitled “Providing Digital Data Services in Optical Fiber-based Distributed Radio Frequency (RF) Communications Systems, And Related Components and Methods,” incorporated herein by reference in its entirety. Other options for WDM and frequency-division multiplexing (FDM) are also disclosed in U.S. Patent Application Serial No. 12/892,424, any of which can be employed in any of the embodiments disclosed herein.

[0047] The HEE **12** may be configured to support any frequencies desired, including but not limited to US FCC and Industry Canada frequencies (824-849 MHz on uplink and 869-894 MHz on downlink), US FCC and Industry Canada frequencies (1850-1915 MHz on uplink and 1930-1995 MHz on downlink), US FCC and Industry Canada frequencies (1710-1755 MHz on uplink and 2110-2155 MHz on downlink), US FCC frequencies (698-716 MHz and 776-787 MHz on uplink and 728-746 MHz on downlink), EU R & TTE frequencies (880-915 MHz on uplink and 925-960 MHz on downlink), EU R & TTE frequencies (1710-1785 MHz on uplink and 1805-1880 MHz on downlink), EU R & TTE frequencies (1920-1980 MHz on uplink and 2110-2170 MHz on downlink), US FCC frequencies (806-824 MHz on uplink and 851-869 MHz on downlink), US FCC frequencies (896-901 MHz on uplink and 929-941 MHz on downlink), US FCC frequencies (793-805 MHz on uplink and 763-775 MHz on downlink), and US FCC frequencies (2495-2690 MHz on uplink and downlink).

[0048] **FIG. 4** is a schematic diagram of exemplary HEE **90** that may be employed with any of the distributed antenna systems disclosed herein, including but not limited to the optical fiber-based distributed antenna system **10** in **FIGS. 1-3**. The HEE **90** in this embodiment is configured to distribute RF communication services over optical fiber. In this embodiment as illustrated in **FIG. 4**, the HEE **90** includes a head-end controller (HEC) **91** that manages the functions of the HEE **90** components and communicates with external devices via interfaces, such as an RS-232 port **92**, a Universal Serial Bus (USB)

port **94**, and an Ethernet port **96**, as examples. The HEE **90** can be connected to a plurality of BTSs, transceivers **100(1)-100(T)**, and the like via BTS inputs **101(1)-101(T)** and BTS outputs **102(1)-102(T)**. The notation “1-T” indicates that any number of BTS transceivers can be provided up to T number with corresponding BTS inputs and BTS outputs. The BTS inputs **101(1)-101(T)** are downlink connections and the BTS outputs **102(1)-102(T)** are uplink connections. Each BTS input **101(1)-101(T)** is connected to a downlink interface in the form of a downlink BTS interface card (BIC) **104** in this embodiment, which is located in the HEE **90**, and each BTS output **102(1)-102(T)** is connected to an uplink BIC **106** also located in the HEE **90**. The downlink BIC **104** is configured to receive incoming or downlink RF signals from the BTS inputs **101(1)-101(T)** and split the downlink RF signals into copies to be communicated to the RAUs **14**, as illustrated in **FIG. 2**. In this embodiment, thirty-six (36) RAUs **14(1)-14(36)** are supported by the HEE **90**, but any number of RAUs **14** may be supported by the HEE **90**. The uplink BIC **106** is configured to receive the combined outgoing or uplink RF signals from the RAUs **14** and split the uplink RF signals into individual BTS outputs **102(1)-102(T)** as a return communication path.

[0049] With continuing reference to **FIG. 4** the downlink BIC **104** is connected to a midplane interface card **108** in this embodiment. The uplink BIC **106** is also connected to the midplane interface card **108**. The downlink BIC **104** and uplink BIC **106** can be provided in printed circuit boards (PCBs) that include connectors that can plug directly into the midplane interface card **108**. The midplane interface card **108** is in electrical communication with a plurality of optical interfaces provided in the form of optical interface cards (OICs) **110** in this embodiment, which provide an optical to electrical communication interface and vice versa between the RAUs **14** via the downlink and uplink optical fibers **16D**, **16U** and the downlink BIC **104** and uplink BIC **106**. The OICs **110** include the E/O converter **28** like discussed with regard to **FIG. 1** that converts electrical RF signals from the downlink BIC **104** to optical RF signals, which are then communicated over the downlink optical fibers **16D** to the RAUs **14** and then to client devices. The OICs **110** also include the O/E converter **36** like in **FIG. 1** that converts optical RF signals communicated from the RAUs **14** over the uplink optical fibers **16U** to the HEE **90** and then to the BTS outputs **102(1)-102(T)**.

[0050] With continuing reference to **FIG. 4**, the OICs **110** in this embodiment support up to three (3) RAUs **14** each. The OICs **110** can also be provided in a PCB that includes a connector that can plug directly into the midplane interface card **108** to couple the links

in the OICs **110** to the midplane interface card **108**. The OICs **110** may consist of one or multiple optical interface modules (OIMs). In this manner, the HEE **90** is scalable to support up to thirty-six (36) RAUs **14** in this embodiment since the HEE **90** can support up to twelve (12) OICs **110**. If less than thirty-six (36) RAUs **14** are to be supported by the HEE **90**, less than twelve (12) OICs **110** can be included in the HEE **90** and plugged into the midplane interface card **108**. One OIC **110** is provided for every three (3) RAUs **14** supported by the HEE **90** in this embodiment. OICs **110** can also be added to the HEE **90** and connected to the midplane interface card **108** if additional RAUs **14** are desired to be supported beyond an initial configuration. With continuing reference to **FIG. 4**, the HEU **91** can also be provided that is configured to be able to communicate with the downlink BIC **104**, the uplink BIC **106**, and the OICs **110** to provide various functions, including configurations of amplifiers and attenuators provided therein.

[0051] **FIG. 5** is a schematic diagram of another exemplary distributed antenna system **120** that may be employed according to the embodiments disclosed herein to provide RF communication services. In this embodiment, the distributed antenna system **120** includes optical fiber for distributing RF communication services. The distributed antenna system **120** in this embodiment is comprised of three (3) main components. One or more radio interfaces provided in the form of radio interface modules (RIMs) **122(1)-122(M)** in this embodiment are provided in HEE **124** to receive and process downlink electrical RF communications signals **126D(1)-126D(R)** prior to optical conversion into downlink optical RF communications signals. The RIMs **122(1)-122(M)** provide both downlink and uplink interfaces. The processing of the downlink electrical RF communications signals **126D(1)-126D(R)** can include any of the processing previously described above in the HEE **12** in **FIGS. 1-4**. The notations “1-R” and “1-M” indicate that any number of the referenced component, 1-R and 1-M, respectively, may be provided. As will be described in more detail below, the HEE **124** is configured to accept a plurality of RIMs **122(1)-122(M)** as modular components that can easily be installed and removed or replaced in the HEE **124**. In one embodiment, the HEE **124** is configured to support up to four (4) RIMs **122(1)-122(M)** as an example.

[0052] Each RIM **122(1)-122(M)** can be designed to support a particular type of radio source or range of radio sources (i.e., frequencies) to provide flexibility in configuring the HEE **124** and the distributed antenna system **120** to support the desired radio sources. For example, one RIM **122** may be configured to support the Personal Communication Services (PCS) radio band. Another RIM **122** may be configured to support the 700 MHz

radio band. In this example, by inclusion of these RIMs **122**, the HEE **124** would be configured to support and distribute RF communications signals on both PCS and LTE 700 radio bands. RIMs **122** may be provided in the HEE **124** that support any frequency bands desired, including but not limited to the US Cellular band, Personal Communication Services (PCS) band, Advanced Wireless Services (AWS) band, 700 MHz band, Global System for Mobile communications (GSM) 900, GSM 1800, and Universal Mobile Telecommunication System (UMTS). RIMs **122** may be provided in the HEE **124** that support any wireless technologies desired, including but not limited to Code Division Multiple Access (CDMA), CDMA200, 1xRTT, Evolution – Data Only (EV-DO), UMTS, High-speed Packet Access (HSPA), GSM, General Packet Radio Services (GPRS), Enhanced Data GSM Environment (EDGE), Time Division Multiple Access (TDMA), Long Term Evolution (LTE), iDEN, and Cellular Digital Packet Data (CDPD).

[0053] RIMs **122** may be provided in the HEE **124** that support any frequencies desired, including but not limited to US FCC and Industry Canada frequencies (824-849 MHz on uplink and 869-894 MHz on downlink), US FCC and Industry Canada frequencies (1850-1915 MHz on uplink and 1930-1995 MHz on downlink), US FCC and Industry Canada frequencies (1710-1755 MHz on uplink and 2110-2155 MHz on downlink), US FCC frequencies (698-716 MHz and 776-787 MHz on uplink and 728-746 MHz on downlink), EU R & TTE frequencies (880-915 MHz on uplink and 925-960 MHz on downlink), EU R & TTE frequencies (1710-1785 MHz on uplink and 1805-1880 MHz on downlink), EU R & TTE frequencies (1920-1980 MHz on uplink and 2110-2170 MHz on downlink), US FCC frequencies (806-824 MHz on uplink and 851-869 MHz on downlink), US FCC frequencies (896-901 MHz on uplink and 929-941 MHz on downlink), US FCC frequencies (793-805 MHz on uplink and 763-775 MHz on downlink), and US FCC frequencies (2495-2690 MHz on uplink and downlink).

[0054] The downlink electrical RF communications signals **126D(1)-126D(R)** are provided to a plurality of optical interfaces provided in the form of optical interface modules (OIMs) **128(1)-128(N)** in this embodiment to convert the downlink electrical RF communications signals **126D(1)-126D(N)** into downlink optical RF signals **130D(1)-130D(R)**. The notation “1-N” indicates that any number of the referenced component 1-N may be provided. The OIMs **128** may be configured to provide one or more optical interface components (OICs) that contain O/E and E/O converters, as will be described in more detail below. The OIMs **128** support the radio bands that can be provided by the

RIMs **122**, including the examples previously described above. Thus, in this embodiment, the OIMs **128** may support a radio band range from 400 MHz to 2700 MHz, as an example, so providing different types or models of OIMs **128** for narrower radio bands to support possibilities for different radio band-supported RIMs **122** provided in the HEE **124** is not required. Further, as an example, the OIMs **128** may be optimized for sub-bands within the 400 MHz to 2700 MHz frequency range, such as 400 - 700 MHz, 700 MHz - 1 GHz, 1 GHz - 1.6 GHz, and 1.6 GHz – 2.7 GHz, as examples.

[0055] The OIMs **128(1)-128(N)** each include E/O converters to convert the downlink electrical RF communications signals **126D(1)-126D(R)** to downlink optical RF signals **130D(1)-130D(R)**. The downlink optical RF signals **130D(1)-130D(R)** are communicated over downlink optical fiber(s) **133D** to a plurality of RAUs **132(1)-132(P)**. The notation “1-P” indicates that any number of the referenced component 1-P may be provided. O/E converters provided in the RAUs **132(1)-132(P)** convert the downlink optical RF signals **130D(1)-130D(R)** back into downlink electrical RF communications signals **126D(1)-126D(R)**, which are provided over downlinks **134(1)-134(P)** coupled to antennas **136(1)-136(P)** in the RAUs **132(1)-132(P)** to client devices in the reception range of the antennas **136(1)-136(P)**.

[0056] E/O converters are also provided in the RAUs **132(1)-132(P)** to convert uplink electrical RF communications signals **126U(1)-126U(R)** received from client devices through the antennas **136(1)-136(P)** into uplink optical RF signals **138U(1)-138U(R)** to be communicated over uplink optical fibers **133U** to the OIMs **128(1)-128(N)**. The OIMs **128(1)-128(N)** include O/E converters that convert the uplink optical signals **138U(1)-138U(R)** into uplink electrical RF communications signals **140U(1)-140U(R)** that are processed by the RIMs **122(1)-122(M)** and provided as uplink electrical RF communications signals **142U(1)-142U(R)**. Downlink electrical digital signals **143D(1)-143D(P)** communicated over downlink electrical medium or media (hereinafter “medium”) **145D(1)-145D(P)** are provided to the RAUs **132(1)-132(P)**, such as from a digital data services (DDS) controller and/or DDS switch as provided by example in **FIG. 5**, separately from the RF communication services, as well as uplink electrical digital signals **143U(1)-143U(P)** communicated over uplink electrical medium **145U(1)-145U(P)**, as also illustrated in **FIG. 6**. Common elements between **FIG. 5** and **FIG. 6** are illustrated in **FIG. 6** with common element numbers. Power may be provided in the downlink and/or uplink electrical medium **145D(1)-145D(P)** and/or **145U(1)-145U(P)** to the RAUs **132(1)-132(P)**.

[0057] FIG. 6 is a schematic diagram of providing digital data services and RF communication services to RAUs and/or other remote communications units in the distributed antenna system 120 of FIG. 6. Common components between FIGS. 5 and 6 and other figures provided have the same element numbers and thus will not be re-described. As illustrated in FIG. 6, a power supply module (PSM) 153 may be provided to provide power to the RIMs 122(1)-122(M) and radio distribution cards (RDCs) 147 that distribute the RF communications from the RIMs 122(1)-122(M) to the OIMs 128(1)-128(N) through RDCs 149. A PSM 155 may also be provided to provide power the OIMs 128(1)-128(N). An interface 151, which may include web and network management system (NMS) interfaces, may also be provided to allow configuration and communication to the RIMs 122(1)-122(M) and other components of the distributed antenna system 120. A microcontroller, microprocessor, or other control circuitry 157 may be included in HEE 160 (FIG. 7) to provide control operations for the HEE 160, including the determination of propagation delay in the distributed antenna system 120.

[0058] As discussed above with regard to FIGS. 1-6, the remote antenna units in distributed antenna systems can be distributed throughout locations inside a building to extend wireless communication coverage throughout the building. This may be advantageous when wireless communication coverage inside a building would otherwise be poor or not possible due to the indoor environment. However, other services may be affected as a result of providing distributed antenna systems. For example, cellular communications protocols may be time or delay based protocols. As non-limiting examples, time delay of arrival (TDOA) or Advanced Forward Link Translation (AFLT) techniques or algorithms may be used to determining delay of communications signals with client devices. However, distributing cellular communications to remote antenna units inside a building or other environment can increase delay due to the propagation delay of the communications signals being distributed to the remote antenna units and responses received at the remote antenna units being distributed back to head-end equipment. If the delay exceeds a certain level, the bandwidth of the communications system may be reduced. As another example, providing localization services for a client, such as emergency 911 (E911) services, may be determined or calculated based on over-the-air delay between communications from a client and a communications tower. However, if the client is communicating over a distributed antenna system, the propagation delay of the distributed antenna system increases the delay, thus possibly resulting in an incorrect determination of location of the client.

[0059] Propagation delay can be compensated for in a cellular communications system, but the cellular communications system may be unaware of distributed antenna systems that will increase the propagation delay. Delay can be compensated for in a cellular communications system, but the cellular communications system may be unaware of indoor distributed antenna systems that increase delay as a result of propagation delay. Also, a cellular communications system may provide for the ability to set a flag or other indicator to indicate that distributed antenna systems are present in coverage areas for communications antenna or towers. However, this setting may only provide for the ability of the cellular communications system to approximate additional propagation delay present which may not be accurate.

[0060] In this regard, embodiments disclosed below include components, systems, and methods for determining propagation delay of communications in distributed antenna systems. Such distributed antenna systems may be any of the distributed antenna systems **10**, **120** described above as non-limiting examples. Another example of a distributed antenna system **150** is provided in **FIG. 7** to illustrate propagation delay. The distributed antenna system **150** could be any of the distributed antenna systems **10**, **120** described above with regard to **FIGS. 1-6**. As illustrated in **FIG. 7**, network management equipment **152** may be provided by a communications provider, such as a cellular network provider as an example. The network management equipment **152** may be circuit switched or packet switched network equipment as examples. Downlink and uplink communications signals **154D(1)-154D(X)**, **154U(1)-154U(X)** may be provided from and to the network management equipment **152** to a base station **159** to be interfaced with the distributed antenna system **150**. The notation “1-X” indicates that any number of downlink and uplink communications signals may be provided from and to the network management equipment **152** to the base station **159** to be interfaced with the distributed antenna system **150**. The base station **159** may act as a repeater **158** if communications signal levels need to be amplified to maintain signal integrity. Propagation delay **D₁** is shown between the network management equipment **152** and the base station **159**/repeater **158** to signify the propagation delay therebetween.

[0061] With continuing reference to **FIG. 7**, the downlink and uplink communications signals **154D(1)-154D(X)**, **154U(1)-154U(X)** can be interfaced to HEE **160**. The HEE **160** may include any of the equipment previously described above for the HEE **12**, **90** in **FIGS. 1-6** as examples. Propagation delay **D₂** is shown between the base station **159**/repeater **158** and the HEE **160** to signify the propagation delay therebetween.

As previously discussed, communications signals, namely the downlink and uplink communications signals **154D(1)-154D(X)**, **154U(1)-154U(X)**, are split and communicated between the HEE **160** and RAUs **162(1)-162(P)** as downlink and uplink communications signals **156D(1)-156D(P)**, **156U(1)-156U(P)** over downlink and uplink communications medium **164D**, **164U**. The notation “1-P” signifies that the downlink communications signals **156D(1)-156D(P)** may be split by the HEE **160** into any number of downlink communications signals desired according to the number of RAUs **162** supported by the distributed antenna system **150**. The notation “1-P” also signifies that the uplink communications signals **156U(1)-156U(P)** may be split by the HEE **160** into any number of uplink communications signals desired according to the number of RAUs **162** supported by the distributed antenna system **150**.

[0062] The downlink and uplink communications medium **164D**, **164U** may be any medium, including but not limited to electrical conductor, optical fiber, and air (i.e., wireless transmission). Propagation delay **D₃** is shown between the HEE **160** and the RAUs **162(1)-162(P)** to signify the propagation delay therebetween. Propagation delay **D₃** comprises propagation delay **D₃'** present in the distribution of the downlink and uplink communications signals **156D(1)-156D(P)**, **156U(1)-156U(P)** in the HEE **160** and propagation delay **D₃''** present over the downlink and uplink communications medium **164D**, **164U**. The downlink and uplink communications medium **164D**, **164U** may comprise 1-P individual lines dedicated to each RAU **162(1)-162(P)**, or single lines whereby the downlink and uplink communications signals **156D(1)-156D(P)**, **156U(1)-156U(P)** are multiplexed on the single lines. If the downlink and uplink communications medium **164D**, **164U** is optical fiber, WDM may be employed as an example. If the downlink and uplink communications medium **164D**, **164U** is electrical conductors or air (i.e., wireless transmission), FDM may be employed as an example.

[0063] With continuing reference to **FIG. 7**, the downlink communications signals **156D(1)-156D(P)** are communication by the RAUs **162(1)-162(P)** to antennas **166(1)-166(P)** to be transmitted over the air wirelessly to client devices **24** in the range of the antennas **166(1)-166(P)**. Normally, the client device **24** is in range of one of the antennas **166(1)-166(P)**. Propagation delay **D₄** is shown between the RAUs **162(1)-162(P)** and the antennas **166(1)-166(P)** to signify the propagation delay therebetween. Because the antennas **166(1)-166(P)** are normally provided within the same housing of the RAUs **162(1)-162(P)** or in close proximity to the RAUs **162(1)-162(P)**, the propagation delay **D₄** may be negligible as compared with the propagation delay **D₃**. The client devices **24**

can communicate uplink communications signals **156U(1)-156U(P)** to one or more of the antennas **166(1)-166(P)** to be distributed to the RAUs **162(1)-162(P)**. Again, the propagation delay **D₄** is shown between the antennas **166(1)-166(P)** and the RAUs **162(1)-162(P)** to signify the propagation delay therebetween. The uplink communications signals **156U(1)-156U(P)** are communicated from the RAUs **162(1)-162(P)** to the HEE **160** over uplink communications medium **164U**. Again, the propagation delay **D₃** is shown between the RAUs **162(1)-162(P)** and the HEE **160** to signify the propagation delay therebetween. The uplink communications signals **156U(1)-156U(P)** are communicated from the HEE **160** to the base station **159/repeater 158** and the network management equipment **152**, which incur propagation delays **D₂** and **D₁**, respectively.

[0064] Thus, the total propagation delay from the network management equipment **152** to the antennas **166(1)-166(P)** for downlink communications is **D₁ + D₂ + D₃ + D₄**. The round trip delay from the network management equipment **152** to the antennas **166(1)-166(P)** and back for downlink and uplink communications is $2 * (D_1 + D_2 + D_3 + D_4)$. The network management equipment **152** may be aware of propagation delays **D₁** and **D₂** depending on configuration. However, the network management equipment **152** may be unaware of propagation delays **D₃** and **D₄** due to the distributed antenna system **150**. Or, the network management equipment **152** may be aware of propagation delays **D₃** and **D₄**, but such delays are assumed as constant delays, which may not be the actual propagation delays and thus may be inaccurate.

[0065] In the example of an optical fiber communication medium, the optical fiber distance is equal to the product of velocity (i.e., speed of light) and time (i.e., propagation delay). Transmission in optical fiber experiences an approximately five (5) nanosecond (ns) delay per meter, since light travels about half the speed of light compared to an RF transmission over the air. This distance can be used to approximate the location of the RAUs **162(1)-162(P)** if the coordinates of the HEE **160** are known in this example. Both the HEE **160** coordinates and the propagation delay can be used to calculate the location of the client device **24** in a distributed antenna system using a triangulation and time of flight approach as an example.

[0066] In this regard, in embodiments discussed, the propagation delay of communications signals distributed in the distributed antenna systems is determined. As a non-limiting example, the propagation delays **D₃** and/or **D₄** may be determined in the distributed antenna system **150** of FIG. 7 to provide this information to the network

management equipment **152** or other system or device. As will be discussed in more detail below, components may be employed in the distributed antenna system **150** in **FIG. 7** to determine propagation delays **D₃** and/or **D₄**. The determined propagation delay(s) can be provided by the distributed antenna system **150** to be taken into consideration for communications services or operations that are based on communications signal delay. Delay based operations may be made more effective, efficient, and/or accurate by knowing the propagation delay experienced in a distributed antenna system. As a non-limiting example, the propagation delay(s) may be associated with communication antennas or towers that are mapped and stored in a database(s) to be used for communications services or operations based on communications signal delay. As another non-limiting example, the arrangement of the base station **159**, repeaters **158**, or communication towers in a network may be repositioned based on the determined propagation delay.

[0067] Further, as an example, the propagation delay **D₃** in the distributed antenna system **150** in **FIG. 7** may be different depending on which RAU **162(1)-162(P)** / antenna **166(1)-166(P)** combination the client device **24** is communicating. This is because the RAUs **162(1)-162(P)** may be placed at different locations where the distance between each of the RAUs **162(1)-162(P)** varies with respect to the HEE **160**. Thus, embodiments disclosed herein also allow determination of the propagation delay on a per RAU **162(1)-162(P)** basis. In this regard, the particular RAU **162(1)-162(P)** in which the client device **24** is in communication may be determinable or known. In this regard, in certain embodiments disclosed herein, the client device **24** is configured to include client device identification information as uplink communication data to the RAU **162(1)-162(P)** and to the HEE **160** and network management equipment **152** without receiving a tracking signal or other signal configured to provide localization services. For example, Global System for Mobile Communications (GSM) network compatible client devices are configured to automatically initiate providing client device identification information over a network. The locations of the RAUs **162(1)-162(P)** in the distributed antenna system **150** are configured and known in the HEE **160**. By knowing and correlating the particular RAU **162(1)-162(P)** in which the client device **24** established communication, the HEE **160** is able to determine and/or provide the location of the client device **24** as being within the antenna coverage area formed by the particular RAU **162(1)-162(P)**. The correlation of client device identification information from the client device **24** with the location of the RAU **162(1)-162(P)** is retained when communicated to the HEE **160**.

and is not lost by being combined, such as by splitters or combiners as examples, with communications from other RAUs **162(1)-162(P)**.

[0068] In other embodiments, a signal used for determining the location of client devices **24** (also referred to herein as “tracking signal”), and which may also be referred to as a pilot signal, beacon signal, or pilot beacon signal, is distributed by the HEE **160** to one or more tracking RAUs **170(1)-170(Q)** in the distributed antenna system **150**. The notation “1-Q” is to signify that any number of tracking RAUs desired may be provided in the distributed antenna system **150**. Determined propagation delay can be associated with a particular client device **24** based on a determination of which tracking RAU **170(1)-170(Q)** the client device **24** is most closely located. For example, signal strength may be used to determine which tracking RAU **170(1)-170(Q)** the client device **24** is most closely located. One or more tracking signals **TS(1)-TS(V)** may be generated by a tracking signal generator **172** or pilot or beacon generator as examples. The notation “1-V” indicates that any number of tracking signals may be generated. The tracking signals **TS(1)-TS(V)** may be unique signals that can be associated with a particular location or zone in the optical fiber-based distributed antenna system. For example, in a code division multiple access (CDMA) network, cell identification is included in a channel separate from communications traffic that can be used as the tracking signals **TS(1)-TS(V)**. In this manner, the tracking signals **TS(1)-TS(V)** are radiated through downlink communications medium **173D(1)-173D(U)** to antennas **174(1)-174(Q)** associated with the tracking RAUs **170(1)-170(Q)** to be communicated to client devices **24** within range of the antenna coverage area formed by the tracking RAUs **170(1)-170(Q)**. The notation “1-U” indicates that any number of downlink communications medium may be generated.

[0069] When the client device **24** wirelessly receives a tracking signal **TS(1)-TS(V)**, the client device **24** communicates its identification information and identification of the tracking signal **TS(1)-TS(V)** back to one of the antennas **166(1)-166(P)** and through the uplink communications medium **164U** to the RAUs **162(1)-162(P)** to be communicated back to the HEE **160**. The HEE **160** can provide this information to a network or carrier. In this manner, the client device identification information and identification of the tracking signal **TS(1)-TS(V)** can be associated with the location of a particular RAU **162(1)-162(P)** that received and transmitted the tracking signal **TS(1)-TS(V)** in the distributed antenna system **150** to provide or determine a location of the client device **24**.

[0070] In this regard, **FIG. 8** illustrates a schematic diagram of the exemplary distributed antenna system **150** that is configured to communicate tracking signals **TS(1)-**

TS(V) from the HEE **160** to certain tracking RAUs **170(1)-170(Q)** to provide localization services. The tracking RAUs **170(1)-170(Q)** can contain the same components and configuration as the RAUs **162(1)-162(P)**. Thus, this configuration of the distributed antenna system **150** employs the tracking signal **TS(1)-TS(V)** provided on downlinks to the tracking RAUs **170(1)-170(Q)** to provide localization services. The difference is that the tracking RAUs **170(1)-170(Q)** are communicatively coupled to channels or links provided by the HEE **160** that are dedicated to carry the tracking signal **TS(1)-TS(V)**. Each tracking signal **TS(1)-TS(V)** has a unique identification from the other tracking signals **TS(1)-TS(V)** in this embodiment. The tracking RAUs **170(1)-170(Q)** selected to receive tracking signals **TS(1)-TS(V)** can be strategically located within different tracking zones **176** in a building **178** or other infrastructure. For example, **FIG. 8** illustrates four tracking zones **176(1)-176(4)**. Each tracking zone **176(1)-176(4)** may represent a floor within the building **178** wherein a tracking RAU **170(1)-170(Q)** is located on each floor.

[0071] With continuing reference to **FIG. 8**, in this embodiment, the tracking signal **TS(1)-TS(V)** is not used for communications, and the client devices **24** can receive the tracking signal **TS(1)-TS(V)** from the tracking RAUs **170(1)-170(Q)** over a greater distance than communications. Thus, when client devices **24** are located within range of a particular tracking RAU **170(1)-170(Q)**, the client device **24** will receive the particular tracking signal **TS(1)-TS(V)** designated for the floor communicated to the tracking RAU **170(1)-170(Q)**. The client device **24** can then communicate client device identification information regarding the received tracking signal **TS(1)-TS(V)** back to the HEE **160** and over a network **180**. Thus, the particular floor in which the client device **24** is located can be provided or determined. Note that although the example of tracking illustrates four (4) tracking zones **176(1)-176(4)**, the disclosure herein is not limited to providing a particular number of tracking zones or tracking RAUs placed in the tracking zones to receive and wirelessly transmit a tracking signal to client devices.

[0072] With continuing reference to **FIG. 8**, other RAUs **162(1)-162(P)** that are not configured to receive and wirelessly transmit the tracking signals **TS(1)-TS(V)** are also provided in the distributed antenna system **150**. In this embodiment, these RAUs **162(1)-162(P)** form antenna coverage areas in each of the tracking zones **176(1)-176(4)** that are not associated with providing tracking signals or location services. The RAUs **162(1)-162(P)** can be like the RAUs **14**, **132** previously described and illustrated in **FIGS. 1-6** that provide downlink network communications to client devices in range of the antenna

coverage areas and receive wireless communications from the client devices to communicate uplink communication data back to the HEE **160** and over the network **180**. More than one RAU **162(1)-162(P)** may be provided in a given zone **176(1)-176(4)** to provide communications between client devices **24** inside the building **178** and the network **180**.

[0073] As also illustrated in **FIG. 8**, the tracking RAUs **170(1)-170(Q)** could also be configured to transmit downlink communication data to client devices **24** in addition to the tracking signals **TS(1)-TS(V)**. For example, tracking RAU **170(Q)** is configured to receive both tracking signal **TS(3)** and downlink communication data from the HEE **160** and transmit both to client devices **24** in range of the tracking RAU **170(Q)**. When the client device **24** is in range of the tracking RAU **170(Q)**, the client device **24** receives the tracking signal **TS(3)** and the downlink communication data. The client device **24** can transmit client device identification information and uplink communication data back to the HEE **160** and over the network **180**. The tracking RAU **170(Q)** may be configured to receive uplink communication data from a client device **24**, or may be configured to only transmit the tracking signal **TS(3)** and downlink communication data to a client device **24**. In the latter case, a second RAU **162(P)** located in proximity to the tracking RAU **170(Q)** may be configured to receive the client device identification information and uplink communication data from the client device **24** to provide to the HEE **160** and the network **180**.

[0074] **FIG. 9** is a schematic diagram of determining total propagation delay within the exemplary distributed antenna system **150** in **FIG. 7**. Note however that determining total propagation delay could also be performed in the exemplary distributed antenna systems **10**, **120** discussed above as well, and the embodiments of determining propagation delay herein are not limited to any particular type or configuration of distributed antenna system. Common elements with the distributed antenna system **150** in **FIG. 7** are provided with common element numbers in **FIG. 9**. In this embodiment, determining the total propagation delay within the distributed antenna system **150** consists of determining propagation delay of the distribution of the downlink communications signals **156D(1)-156D(P)** to the RAUs **162(1)-162(P)** and the propagation delay of distribution of the uplink communications signals **156U(1)-156U(P)** to the HEE **160**. In this embodiment, this delay consists of the propagation delay **D₃**, because it is assumed that the propagation delay **D₄** from the RAUs **162(1)-162(P)** to the antennas **166(1)-166(P)**, as illustrated in **FIG. 7**, is negligible when compared to the

propagation delay D_3 . Also, the propagation delay D_3 in this embodiment consists of a plurality of propagation delays $D_3(1)-D_3(P)$ since each RAU 162(1)-162(P) may not be located the same distance from the HEE 160 and/or communicatively coupled using the same type of communications medium.

[0075] With continuing reference to FIG. 9, to determine the propagation delays $D_3(1)-D_3(P)$, a propagation delay measurement circuit(s) 192(1)-192(M) may be associated with each RIM 190(1)-190(M) in the HEE 160. By providing the propagation delay measurement circuits 192(1)-192(M) associated with each RIM 190(1)-190(M), the propagation delay from the RIMs 190(1)-190(M) to the RAUs 162(1)-162(P) can be determined, which is estimated in this embodiment to be the total propagation delay of the distributed antenna system 150. The propagation delay measurement circuit 192 is used to measure the propagation delay of the time to distribute the downlink communications signals 156D(1)-156D(P) from the RIMs 190(1)-190(M) and OIMs 191(1)-191(N) to the RAUs 162(1)-162(P) and for responsive uplink communications signals 156U(1)-156U(P) to be distributed back from the RAUs 162(1)-162(P) to the HEE 160 in this embodiment. The RIMs 190(1)-190(M) may be like the RIMs 120(1)-120(M) illustrated in FIGS. 5 and 6 and previously described above. The OIMs 191(1)-191(N) may be like the OIMs 122(1)-122(M) illustrated in FIGS. 5 and 6 and previously described above. Examples of propagation delay measurement circuits that may be provided as the propagation delay measurement circuit 192 are described in more detail below. In this embodiment, because multiple RAUs 162(1)-162(P) are provided, the propagation delay D_3 will be composed of a plurality of propagation delays $D_3(1)-D_3(P)$. The longest of the propagation delays $D_3(1)-D_3(P)$ may be considered to be the propagation delay of the distributed antenna system 150 or an average of the propagation delays $D_3(1)-D_3(P)$ as non-limiting examples.

[0076] With continuing reference to FIG. 9, to measure propagation delay, RF cross bar switches 194(1)-194(P) are provided in each of the RAUs 162(1)-162(P). The RF cross bar switches 194(1)-194(P) are coupled to O/E and E/O converters 196(1)-196(P) in the RAUs 162(1)-162(P). The RF cross bar switches 194(1)-194(P) are provided to reverse received downlink communications signals 156D(1)-156D(P) received on the downlink communications medium 164D back onto the uplink communications medium 164U as uplink communications signals 156U(1)-156U(P) before the downlink communications signals 156D(1)-156D(P) are distributed to the antennas 166(1)-166(P). The propagation delay measurement circuit 192 measures the time between when the

downlink communications signals **156D(1)-156D(P)** are distributed from the HEE **160** and when the downlink communications signals **156D(1)-156D(P)** are received back at the propagation delay measurement circuit **192** as uplink communications signals **156U(1)-156U(P)** to determine the propagation delay **D₃**. The propagation delay measurement circuit **192** will measure the propagation delay for one communication path between the HEE **160** and a particular RAU **162**.

[0077] With continuing reference to **FIG. 9** and as illustrated in the exemplary flowchart in **FIG. 10**, to measure the propagation delay **D₃(1)-D₃(P)** for each RAU **162(1)-162(P)**, the HEE **160** can be configured to control the distribution of downlink communications signals **156D(1)-156D(P)**. Propagation delay may be measured for each RAU **162(1)-162(P)** communications path before normal RF communications are allowed to be active in the distributed antenna system **150**. A head-end controller (HEC) **199** or other control circuitry may be provided in the HEE **160**, as illustrated in **FIG. 9**, to perform the process in **FIG. 10** to determine propagation delay. In this regard, the HEC **199** can initiate or reset the propagation delay measurement circuit **192**, as illustrated in **FIG. 10** (block **200** in **FIG. 10**). The HEC **199** also communicates to an RAU(s) **162(1)-162(P)** to activate the RF cross bar switch(es) **194(1)-194(P)** to redirect the received downlink communications signals **156D(1)-156D(P)** to the uplink communications medium **164U** as the uplink communications signals **156U(1)-156U(P)** (block **202** in **FIG. 10**). The HEC **199** may configure certain components in the HEE **160** so that the downlink communications signals **156D(1)-156D(P)** are only distributed to one RAU **162(1)-162(P)** at a time during propagation propagation delay measurement. Thereafter, the HEE **160** distributes the downlink communications signals **156D(1)-156D(P)** to the RAU(s) **162(1)-162(P)** (block **204** in **FIG. 10**). For example, the distributed downlink communications signals **156D(1)-156D(P)** may be of the modulation frequency of serial communications, such as 315 MHz as one non-limiting example. The RF cross bar switch(es) **194(1)-194(P)** will direct the received downlink communications signals **154D(1)-154D(P)** onto the uplink communications medium **164U** as illustrated in **FIG. 9**. The HEE **160** will receive the uplink communications signals **156U(1)-156U(P)** from the RAU(s) **162(1)-162(P)** (block **206** in **FIG. 10**). The propagation delay measurement circuit **192** will then determine the time of receipt of the uplink communications signals **156U(1)-156U(P)** to determine the propagation delay(s) **D₃(1)-D₃(P)** for the RAU(s) **162(1)-162(P)** (block **208** in **FIG. 10**).

[0078] With continuing reference to **FIG. 10**, the HEC **199** may be configured to measure the propagation delays $D_3(1)-D_3(P)$ for one RAU **162** at a time since the propagation delays $D_3(1)-D_3(P)$ will likely be different due to the RAUs **162(1)-162(P)** being located at difference distances from the HEE **160**. In this regard, the process in **FIG. 10** can be performed for one RAU **162** at one time. A switch or switches **197** may be provided in the HEE **160** and controllable by the HEC **199** to be switched to one or more of the RAUs **162(1)-162(P)** at a time to set the communication path to distribute communications signals to the desired RAU(s) **162(1)-162(P)** (block **210** in **FIG. 10**). For example, the switch **197** may be comprised of transmit optical sub-assemblies (TOSAs) and receive optical sub-assemblies (ROSAs) that are activated and deactivated to control which RAUs **162(1)-162(P)** receive communications signals from the HEE **160**. Control of which RAUs **162(1)-162(P)** receive communications signals from the HEE **160** provides the identification of the RAU **162(1)-162(P)** associated with a given propagation delay determined using the propagation delay measurement circuit **192**. When a next propagation delay D_3 for a given RAU **162** is to be measured, the HEC **199** can set the communication path to a next RAU **162** (block **210**) to measure the propagation delay D_3 for the given RAU **162**. The process in **FIG. 10** can be repeated until all propagation delays $D_3(1)-D_3(P)$ for all RAUs **162(1)-162(P)** are determined. The propagation delays $D_3(1)-D_3(P)$ can be stored and communicated by the HEC **199** to the network management equipment **152** (**FIG. 7**) as desired. The HEC **199** may also store and/or communicate the determined propagation delay along with the identification of the client device **24** and/or the determined location of the client device **24**. The location of the client device **24** may be determined or determinable based on the methods discussed above.

[0079] Any type of propagation delay measurement circuit may be employed for the propagation delay measurement circuits **192(1)-192(M)** in the HEE **160** in **FIG. 9** to measure propagation delay. As non-limiting examples, **FIGS. 11A-11E** are schematic diagrams of exemplary propagation delay measurement circuits that may be employed as the propagation delay measurement circuits **192(1)-192(M)**.

[0080] **FIG. 11A** illustrates a first example of a propagation delay measurement circuit **192A** that employs a fast counter for measuring propagation delay of one communication path between an RIM **190** and an RAU **162**. With reference to **FIG. 11A**, the propagation delay measurement circuit **192A** employs an AND gate **220** that provides an output line **222** to a counter **224**. The AND gate **220** acts as a switch to activate the

counter **224** when a downlink communications signal **156D** is active or on the downlink communications medium **164D** and the corresponding uplink communications signal **156U** is not detected. When the downlink communications signal **156D** is detected by a downlink communications signal detector **225** (e.g., a power detector), an input line **226** to the AND gate **220** is raised high (i.e., a Voltage level signifying a logical “1”). The corresponding uplink communications signals **156U** will not be detected until the downlink communications signal **156D** reaches the configured RAU **162** and is routed through the RF cross bar switch **194** back onto the uplink communications medium **164U**. Thus initially, an input line **228** providing a detection of the uplink communications signal **156U** will be low (i.e., a Voltage level signifying a logical “0”), which will be inverted by an inverter **230** to provide a high Voltage level to the AND gate **220**. During this condition, the output line **222** of the AND gate **220** passes an oscillating clock signal **232** (e.g., a 1.0 GHz signal) to the counter **224** to accumulate clock pulses from the clock signal **232**. The accumulated clock pulses are provided to a fast counter **234** to provide a count representative of propagation delay. The frequency of the clock signal **232** should be a frequency that is much greater than the propagation delay so that the resolution of the counter **224** will be sufficient to accurately measurement propagation delay in the distributed antenna system **150**.

[0081] With continuing reference to **FIG. 11A**, once the downlink communications signal **156D** is detected by an uplink communications signal detector **233** (e.g., a power detector) at the propagation delay measurement circuit **192A** as a received uplink communications signal **156U**, the input line **228** will be set high. In response, the AND gate **220** will shut off the counter **224**. The HEC **199** can read the counter value present in the fast counter **234** over a data bus **236** to determine the propagation delay of the downlink communications signal **156D**. Before a subsequent propagation delay is measured using the propagation delay measurement circuit **192A**, the counter **224** is reset by the HEC **199** using a reset line **238**.

[0082] **FIGS. 11B-11D** illustrate other examples of propagation delay measurement circuits **192**. For example, **FIG. 11B** illustrates an alternate propagation delay measurement circuit **192B** that is similar to the propagation delay measurement circuit **192A** in **FIG. 11A**. Common elements are labeled with common element numbers. In the propagation delay measurement circuit **192B** in **FIG. 11B**, the output line **222** from the AND gate **220** is input directly into the fast counter **234**. The HEC **199** can read the counter value present in the fast counter **234** over the data bus **236** to determine the

propagation delay of the downlink communications signal **156D**. **FIG. 11C** illustrates another alternate propagation delay measurement circuit **192C** that is similar to the propagation delay measurement circuit **192A** in **FIG. 11A**. Common elements are labeled with common element numbers. In the propagation delay measurement circuit **192C** in **FIG. 11C**, a first counter **224A** is provided as a substitute to an AND gate wherein the clock signals are accumulated by a second counter **224B** on detection of the uplink communications signal **156U**. The HEC **199** can read the counter value present in the fast counter **234** over the data bus **236** to determine the propagation delay of the downlink communications signal **156D**.

[0083] **FIG. 11D** illustrates another alternate propagation delay measurement circuit **192D** that is similar to the propagation delay measurement circuit **192A** in **FIG. 11A**. Common elements are labeled with common element numbers. In the propagation delay measurement circuit **192D** in **FIG. 11D**, the output line **222** from the AND gate **220** is input into an analog interrogator circuit **239** to accumulate clock pulses from the clock signal **232**. An output **241** from the analog interrogator circuit **239** is provided to the counter **224** to provide the propagation delay. The HEC **199** can read the counter value present in the counter **224** over the data bus **236** to determine the propagation delay of the downlink communications signal **156D**.

[0084] **FIG. 11E** illustrates another alternate propagation delay measurement circuit **192E** that is similar to the propagation delay measurement circuit **192D** in **FIG. 11D**. Common elements are labeled with common element numbers. In the propagation delay measurement circuit **192E** in **FIG. 11E**, the output **241** from the interrogator **239** is input into an analog-to-digital (A/D) converter **243** to convert an analog representation of accumulated clock pulses by the interrogator **239** into a digital representation of propagation delay. The HEC **199** can read the digital value of the propagation delay over the data bus **236** to determine the propagation delay of the downlink communications signal **156D**.

[0085] The determined propagation delay may depend on the edge detect latencies of the downlink communications signal detector **225** and uplink communications signal detector **233** and the clock frequency of the clock signal **232** in the propagation delay measurement circuits **192A-192E**. If the detectors **225**, **232** have fixed latency, this fixed latency can be calculated and removed from the determined propagation delay. If one assumes a purely random nature of latency, one can express the standard deviation of latency delay.

$$\sigma_{delay} = \frac{\sqrt{\sigma^2_{clock} + \sigma^2_{tx_edge} + \sigma^2_{rx_edge}}}{\sqrt{n_samples}}$$

[0086] For example, if the clock period of the clock signal **232** is 1 nanosecond (ns), and the transmit edge (tx_edge) and receive edge (rx_edge) detection delay of the detectors **225**, **233** is a standard deviation of 2 ns, the final measurement standard deviation is 2.88 ns. Using 2 ns clock periods in the clock signal **232** would produce standard deviation of 3.05 ns. If one were to use a ten (10) measurement sample, the overall standard deviation is reduced to less than approximately 1 ns. Inherent resolution of a single measurement is defined by a clock period, (1 or 2 ns). Resolution can be improved by taking more samples. Translated into optical fiber length, one could estimate less than 1 meter (m) resolution.

[0087] It may be desired to only determine the propagation delay **D3''** of the downlink and uplink communications medium **164D**, **164U** in the distributed antenna system **150** in **FIGS. 7** and **9**. This is opposed to determining the total propagation delay **D3** comprised of the HEE **160** propagation delay **D3'** and the downlink and uplink communications medium **164D**, **164U** propagation delay **D3''**, as discussed above. In this regard, **FIG. 12** is a schematic diagram of the distributed antenna system **150** in **FIGS. 7** and **9**. However, the propagation delay measurement circuits **192** are disposed in each of the OIMs **191(1)-191(N)** as propagation delay measurement circuits **192(1)-192(N)**. In this regard, the propagation delay measurement circuits **192(1)-192(N)** can measure the propagation delay of the communication paths between the downlink communications medium **164D** and the return uplink communications medium **164U** between the OIMs **191(1)-191(N)** and the RAUs **162(1)-162(P)**. The processes previously described with regard to **FIG. 10** to measure the total propagation delays in the distributed antenna system **150** is equally applicable to this embodiment for measuring the propagation delays in the communication paths between the downlink communications medium **164D** and the return uplink communications medium **164U**.

[0088] Variations in propagation delays in a downlink and/or uplink communications medium as a result of variations in length variations in placement of RAUs may not be distinguishable, or may not be distinguishable for all RAUs. Also, it may be desired to equalize propagation delay caused by variations in propagation delays in a downlink and uplink communications medium, such as by result of variations in length variations in placement of RAUs. In this regard, **FIG. 13** illustrates a distributed antenna system **150'**

that includes common components indicated by common element numbers with the distributed antenna system **150** in **FIG. 7**. However, additional propagation delay can be provided in the downlink and uplink communications medium **164D**, **164U** by a propagation delay generator **193**. In this regard, a propagation delay generator **193** is provided and is configured to be controlled to add or otherwise change propagation delay to the downlink and uplink communications medium **164D**, **164U**. As an example, the propagation delay generator **193** may contain a plurality of delay paths vary in propagation delay. For example, different lengths of optical fiber may be provided in the propagation delay generator **193** to represent different additional propagation delays.

[0089] With continuing reference to **FIG. 13**, the specific downlink and uplink communications medium **164D**, **164U** in which the additional propagation delay is added is controlled by an optical path matrix switch **195**. The optical path matrix switch **195** is configured to control in which path in the propagation delay generator **193** a given downlink and/or uplink communications medium **164D**, **164U** takes in the propagation delay generator **193**. The switched path selected controls the amount of additional propagation delay added by the propagation delay generator **193** to a given downlink and/or uplink communications medium **164D**, **164U**, and thus to the RAU **162** connected to the given downlink and uplink communications medium **164D**, **164U**. The propagation delay generator **193** and optical path matrix switch **195** may include a controller, such as a microprocessor or microcontroller, that is configured to communicate with the HEE **160** as an example. The HEE **160** may control the optical path matrix switch **195** to control the selected propagation delay among of propagation delays provided by the propagation delay generator **193** for a given downlink and/or uplink communications medium **164D**, **164U**.

[0090] **FIG. 14** is a schematic diagram representation of additional detail regarding the exemplary HEC **199** and/or any other microprocessor, microcontroller, or controller disclosed herein in the exemplary form of an exemplary computer system **240** adapted to execute instructions from an exemplary computer-readable medium to perform power management functions. The HEC **199** may be included in the HEE **160** as previously discussed. In this regard, the HEC **199** may comprise the computer system **240** within which a set of instructions for causing the HEC **199** to perform any one or more of the methodologies discussed herein may be executed. The HEC **199** may be connected (e.g., networked) to other machines in a LAN, an intranet, an extranet, or the Internet. The HEC **199** may operate in a client-server network environment, or as a peer machine in a

peer-to-peer (or distributed) network environment. While only a single device is illustrated, the term “device” shall also be taken to include any collection of devices that individually or jointly execute a set (or multiple sets) of instructions to perform any one or more of the methodologies discussed herein. The HEC 199 may be a circuit or circuits included in an electronic board card, such as a printed circuit board (PCB) as an example, a server, a personal computer, a desktop computer, a laptop computer, a personal digital assistant (PDA), a computing pad, a mobile device, or any other device, and may represent, for example, a server or a user’s computer.

[0091] The exemplary computer system 240 of the HEC 199 in this embodiment includes a processing device or processor 242, a main memory 244 (e.g., read-only memory (ROM), flash memory, dynamic random access memory (DRAM) such as synchronous DRAM (SDRAM), etc.), and a static memory 246 (e.g., flash memory, static random access memory (SRAM), etc.), which may communicate with each other via the data bus 236. Alternatively, the processing device 242 may be connected to the main memory 244 and/or static memory 246 directly or via some other connectivity means. The processing device 242 may be a controller, and the main memory 244 or static memory 246 may be any type of memory, each of which can be included in the HEE 160.

[0092] The processing device 242 represents one or more general-purpose processing devices such as a microprocessor, central processing unit, or the like. More particularly, the processing device 242 may be a complex instruction set computing (CISC) microprocessor, a reduced instruction set computing (RISC) microprocessor, a very long instruction word (VLIW) microprocessor, a processor implementing other instruction sets, or processors implementing a combination of instruction sets. The processing device 242 is configured to execute processing logic in instructions 248 for performing the operations and steps discussed herein.

[0093] The computer system 240 may further include a network interface device 250. The computer system 240 also may or may not include an input 252 to receive input and selections to be communicated to the computer system 240 when executing instructions. The computer system 240 also may or may not include an output 254, including but not limited to a display, a video display unit (e.g., a liquid crystal display (LCD) or a cathode ray tube (CRT)), an alphanumeric input device (e.g., a keyboard), and/or a cursor control device (e.g., a mouse).

[0094] The computer system 240 may or may not include a data storage device that includes instructions 256 stored in a computer-readable medium 258 embodying any one

or more of the propagation delay measurement methodologies or functions described herein. The instructions **256** may also reside, completely or at least partially, within the main memory **244** and/or within the processing device **242** during execution thereof by the computer system **240**, the main memory **244** and the processing device **242** also constituting computer-readable medium. The instructions **256** may further be transmitted or received over a network **260** via the network interface device **250**.

[0095] While the computer-readable medium **258** is shown in an exemplary embodiment to be a single medium, the term “computer-readable medium” should be taken to include a single medium or multiple media (e.g., a centralized or distributed database, and/or associated caches and servers) that store the one or more sets of instructions. The term “computer-readable medium” shall also be taken to include any medium that is capable of storing, encoding or carrying a set of instructions for execution by the processing device and that cause the processing device to perform any one or more of the methodologies of the embodiments disclosed herein. The term “computer-readable medium” shall accordingly be taken to include, but not be limited to, solid-state memories, optical and magnetic medium, and carrier wave signals.

[0096] The embodiments disclosed herein include various steps. The steps of the embodiments disclosed herein may be performed by hardware components or may be embodied in machine-executable instructions, which may be used to cause a general-purpose or special-purpose processor programmed with the instructions to perform the steps. Alternatively, the steps may be performed by a combination of hardware and software.

[0097] The embodiments disclosed herein may be provided as a computer program product, or software, that may include a machine-readable medium (or computer-readable medium) having stored thereon instructions, which may be used to program a computer system (or other electronic devices) to perform a process according to the embodiments disclosed herein. A machine-readable medium includes any mechanism for storing or transmitting information in a form readable by a machine (e.g., a computer). For example, a machine-readable medium includes a machine-readable storage medium (e.g., read only memory (“ROM”), random access memory (“RAM”), magnetic disk storage medium, optical storage medium, flash memory devices, etc.), a machine-readable transmission medium (electrical, optical, acoustical or other form of propagated signals (e.g., carrier waves, infrared signals, digital signals, etc.)), etc.

[0098] Unless specifically stated otherwise as apparent from the previous discussion, it is appreciated that throughout the description, discussions utilizing terms such as “processing,” “computing,” “determining,” “displaying,” or the like, refer to the action and processes of a computer system, or similar electronic computing device, that manipulates and transforms data represented as physical (electronic) quantities within the computer system’s registers and memories into other data similarly represented as physical quantities within the computer system memories or registers or other such information storage, transmission, or display devices.

[0099] The algorithms and displays presented herein are not inherently related to any particular computer or other apparatus. Various systems may be used with programs in accordance with the teachings herein, or it may prove convenient to construct more specialized apparatuses to perform the required method steps. The required structure for a variety of these systems will appear from the description above. In addition, the embodiments described herein are not described with reference to any particular programming language. It will be appreciated that a variety of programming languages may be used to implement the teachings of the embodiments as described herein.

[00100] Those of skill in the art would further appreciate that the various illustrative logical blocks, modules, circuits, and algorithms described in connection with the embodiments disclosed herein may be implemented as electronic hardware, instructions stored in memory or in another computer-readable medium and executed by a processor or other processing device, or combinations of both. The components of the distributed antenna systems described herein may be employed in any circuit, hardware component, integrated circuit (IC), or IC chip, as examples. Memory disclosed herein may be any type and size of memory and may be configured to store any type of information desired. To clearly illustrate this interchangeability, various illustrative components, blocks, modules, circuits, and steps have been described above generally in terms of their functionality. How such functionality is implemented depends upon the particular application, design choices, and/or design constraints imposed on the overall system. Skilled artisans may implement the described functionality in varying ways for each particular application, but such implementation decisions should not be interpreted as causing a departure from the scope of the present embodiments.

[00101] The various illustrative logical blocks, modules, and circuits described in connection with the embodiments disclosed herein may be implemented or performed with a processor, a Digital Signal Processor (DSP), an Application Specific Integrated

Circuit (ASIC), a Field Programmable Gate Array (FPGA) or other programmable logic device, discrete gate or transistor logic, discrete hardware components, or any combination thereof designed to perform the functions described herein. A controller may be a processor. A processor may be a microprocessor, but in the alternative, the processor may be any conventional processor, controller, microcontroller, or state machine. A processor may also be implemented as a combination of computing devices, e.g., a combination of a DSP and a microprocessor, a plurality of microprocessors, one or more microprocessors in conjunction with a DSP core, or any other such configuration.

[00102] The embodiments disclosed herein may be embodied in hardware and in instructions that are stored in hardware, and may reside, for example, in Random Access Memory (RAM), flash memory, Read Only Memory (ROM), Electrically Programmable ROM (EPROM), Electrically Erasable Programmable ROM (EEPROM), registers, a hard disk, a removable disk, a CD-ROM, or any other form of computer-readable medium known in the art. An exemplary storage medium is coupled to the processor such that the processor can read information from, and write information to, the storage medium. In the alternative, the storage medium may be integral to the processor. The processor and the storage medium may reside in an ASIC. The ASIC may reside in a remote station. In the alternative, the processor and the storage medium may reside as discrete components in a remote station, base station, or server.

[00103] It is also noted that the operational steps described in any of the exemplary embodiments herein are described to provide examples and discussion. The operations described may be performed in numerous different sequences other than the illustrated sequences. Furthermore, operations described in a single operational step may actually be performed in a number of different steps. Additionally, one or more operational steps discussed in the exemplary embodiments may be combined. It is to be understood that the operational steps illustrated in the flow chart diagrams may be subject to numerous different modifications as will be readily apparent to one of skill in the art. Those of skill in the art would also understand that information and signals may be represented using any of a variety of different technologies and techniques. For example, data, instructions, commands, information, signals, bits, symbols, and chips that may be referenced throughout the above description may be represented by voltages, currents, electromagnetic waves, magnetic fields or particles, optical fields or particles, or any combination thereof.

[00104] Further, as used herein, it is intended that terms “fiber optic cables” and/or “optical fibers” include all types of single mode and multi-mode light waveguides, including one or more optical fibers that may be upcoated, colored, buffered, ribbonized and/or have other organizing or protective structure in a cable such as one or more tubes, strength members, jackets or the like. The optical fibers disclosed herein can be single mode or multi-mode optical fibers. Likewise, other types of suitable optical fibers include bend-insensitive optical fibers, or any other expedient of a medium for transmitting light signals. An example of a bend-insensitive, or bend resistant, optical fiber is ClearCurve® Multimode fiber commercially available from Corning Incorporated. Suitable fibers of this type are disclosed, for example, in U.S. Patent Application Publication Nos. 2008/0166094 and 2009/0169163, the disclosures of which are incorporated herein by reference in their entirety.

[00105] Many modifications and other embodiments of the embodiments set forth herein will come to mind to one skilled in the art to which the embodiments pertain having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. For example, the distributed antenna systems could include any type or number of communications mediums, including but not limited to electrical conductors, optical fiber, and air (i.e., wireless transmission). The distributed antenna systems may distribute any type of communications signals, including but not limited to RF communications signals and digital data communications signals, examples of which are described in U.S. Patent Application Serial No. 12/892,424 entitled “Providing Digital Data Services in Optical Fiber-based Distributed Radio Frequency (RF) Communications Systems, And Related Components and Methods,” incorporated herein by reference in its entirety. Multiplexing, such as WDM and/or FDM, may be employed in any of the distributed antenna systems described herein, such as according to the examples provided in U.S. Patent Application Serial No. 12/892,424.

[00106] Therefore, it is to be understood that the description and claims are not to be limited to the specific embodiments disclosed and that modifications and other embodiments are intended to be included within the scope of the appended claims. It is intended that the embodiments cover the modifications and variations of the embodiments provided they come within the scope of the appended claims and their equivalents. Although specific terms are employed herein, they are used in a generic and descriptive sense only and not for purposes of limitation.

We claim:

1. A distributed antenna system apparatus, comprising:
 - at least one downlink radio frequency (RF) interface configured to receive downlink RF signals and distribute the downlink RF signals over at least one downlink communications medium to one or more remote antenna units (RAUs);
 - at least one uplink RF interface configured to receive uplink RF signals over at least one uplink communications medium from the one or more RAUs;
 - at least one propagation delay measurement circuit communicatively coupled to the at least one downlink RF interface and the at least one uplink RF interface and configured to measure propagation delay between the distribution of the downlink RF signals by the at least one downlink RF interface and the receipt of the downlink RF signals as uplink RF signals by the at least one uplink RF interface; and
 - a controller communicatively coupled to the at least one propagation delay measurement circuit and configured to:
 - communicate to an RAU among the one or more RAUs to return received downlink RF signals as uplink RF signals to the at least one uplink RF interface;
 - activate the at least one downlink RF interface to distribute the received downlink RF signals to the RAU among the one or more RAUs; and
 - determine the propagation delay as a function of delay between the at least one downlink RF interface and the RAU among the one or more RAUs, and as a function of delay between the RAU among the one or more RAUs and the at least one uplink RF interface from the at least one propagation delay measurement circuit.
2. The distributed antenna system apparatus of claim 1, wherein the at least one downlink communications medium and the at least one uplink communications medium includes at least one optical fiber medium.
3. The distributed antenna system apparatus of claim 2, wherein the at least one downlink communications medium and the at least one uplink communications medium includes at least one electrical conductor medium.

4. The distributed antenna system apparatus of claim 1, wherein the at least one downlink communications medium and the at least one uplink communications medium includes at least one air media.
5. The distributed antenna system apparatus of claim 1, wherein the controller is further configured to store the propagation delay in memory.
6. The distributed antenna system apparatus of claim 1, wherein the controller is further configured to communicate the propagation delay over a network.
7. The distributed antenna system apparatus of claim 1, wherein the controller is further configured to communicate to the RAU among the one or more RAUs to not return received downlink RF signals as uplink RF signals to the at least one uplink RF interface.
8. The distributed antenna system apparatus of any of claims 1-7, wherein the controller is further configured to, for each selected RAU among the one or more RAUs
communicate to the selected RAU among the one or more RAUs to return received downlink RF signals as uplink RF signals to the at least one uplink RF interface;
activate the at least one downlink RF interface to distribute the received downlink RF signals to the selected RAU among the one or more RAUs; and
determine the propagation delay between the at least one downlink RF interface and the selected RAU among the one or more RAUs from the at least one propagation delay measurement circuit.
9. The distributed antenna system apparatus of any of claims 1-7, wherein the at least one propagation delay measurement circuit is configured to measure the propagation delay between the at least one downlink RF interface and the RAU among the one or more RAUs.
10. The distributed antenna system apparatus of claim 9, wherein the at least one propagation delay measurement circuit is located at the at least one downlink RF interface to measure the propagation delay between the at least one downlink RF interface and the RAU among the one or more RAUs.

11. The distributed antenna system apparatus of any of claims 1-7, wherein the at least one propagation delay measurement circuit is configured to measure the propagation delay between the at least one downlink communications medium and the at least one uplink communications medium.
12. The distributed antenna system apparatus of any of claims 1-7, wherein the at least one downlink RF interface is comprised of at least one radio interface module.
13. The distributed antenna system apparatus of any of claims 1-7, further comprising at least one optical RF interface providing at least a portion of the at least one downlink RF interface and the at least one uplink RF interface, the at least one optical RF interface configured to:
- receive the downlink RF signals as downlink electrical RF signals;
 - convert the received downlink electrical RF signals to downlink optical RF signals;
 - receive the uplink RF signals from the one or more RAUs as uplink optical RF signals; and
 - convert the received uplink optical RF signals into uplink electrical RF signals.
14. The distributed antenna system apparatus of claim 13, wherein the at least one propagation delay measurement circuit is located at the at least one optical RF interface to measure the propagation delay between the at least one downlink interface and the RAU among the one or more RAUs.
15. The distributed antenna system apparatus of claim 14, wherein the at least one propagation delay measurement circuit is configured to measure the propagation delay between the at least one downlink communications medium and the at least one uplink communications medium.
16. The distributed antenna system apparatus of any of claims 1-7, wherein the at least one propagation delay measurement circuit is comprised of:
- a downlink communications signal detector configured to detect the downlink RF signals;

an uplink communications signal detector configured to detect the uplink RF signals; and

a counter configured to count propagation delay between the detection of the downlink RF signals by the downlink communications signal detector and the detection of the uplink RF signals by the uplink communications signal detector.

17. The distributed antenna system apparatus of any of claims 1-7,

wherein the at least one downlink RF interface is comprised of a plurality of downlink RF interfaces and the at least one uplink RF interface is comprised of a plurality of uplink RF interfaces, and

wherein the at least one propagation delay measurement circuit is comprised of a plurality of propagation delay measurement circuits, each of the plurality of propagation delay measurement circuits communicatively coupled to one downlink RF interface among the plurality of downlink RF interfaces and one uplink RF interface among the plurality of uplink RF interfaces.

18. The distributed antenna system apparatus of any of claims 1-7, wherein the controller is further configured to communicate to the RAU among the one or more RAUs over the at least one downlink communications medium to return received downlink RF signals as uplink RF signals to the at least one uplink RF interface.

19. The distributed antenna system apparatus of any of claims 1-7, further comprising a propagation delay generator configured to add additional propagation delay to at least one of the at least one downlink communications medium and the at least one uplink communications medium.

20. The distributed antenna system apparatus of any of claims 1-7, wherein the propagation delay generator is configured to equality the propagation delay between each of the least one of the at least one downlink communications medium and the at least one uplink communications medium.

21. A method of determining propagation delay in a distributed antenna system apparatus, comprising:

communicating to a remote antenna unit (RAU) among one or more RAUs to return received downlink radio frequency (RF) signals from at least one downlink RF interface as uplink RF signals to at least one uplink RF interface;

activating the at least one downlink RF interface to distribute the received downlink RF signals to the RAU among the one or more RAUs;

distributing the downlink RF signals to the RAU among the one or more RAUs over at least one downlink communications medium;

receiving the distributed downlink RF signals as the uplink RF signals from the RAU among the one or more RAUs over at least one uplink communications medium; and

determining propagation delay using at least one propagation delay measurement circuit as a function of delay between the at least one downlink RF interface and the RAU among the one or more RAUs, and as a function of delay between the RAU among the one or more RAUs and the at least one uplink RF interface.

22. The method of claim 21, further comprising storing the propagation delay in memory.

23. The method of claim 22, further comprising communicating the propagation delay over a network.

24. The method of claim 22, further comprising communicating to the RAU among the one or more RAUs to not return received downlink RF signals as uplink RF signals to the at least one uplink RF interface.

25. The method of any of claims 21-24, wherein, for each selected RAU among the one or more RAUs, comprising:

communicating to the selected RAU among the one or more RAUs to return received downlink RF signals as uplink RF signals to the at least one uplink RF interface;

activating the at least one downlink RF interface to distribute the received downlink RF signals to the selected RAU among the one or more RAUs; and

determining the propagation delay between the at least one downlink RF interface and the selected RAU among the one or more RAUs from the at least one propagation delay measurement circuit.

26. The method of any of claims 21-24, wherein determining the propagation delay further comprises measuring the propagation delay between the at least one downlink RF interface and the RAU among the one or more RAUs.

27. The method of any of claims 21-24, wherein determining the propagation delay further comprises measuring the propagation delay between the at least one downlink communications medium and the at least one uplink communications medium.

28. The method of any of claims 21-24, further comprising:

receiving the downlink RF signals as downlink electrical RF signals at at least one optical RF interface providing at least a portion of the at least one downlink RF interface and the at least one uplink RF interface;

converting the received downlink electrical RF signals to downlink optical RF signals at the at least one optical RF interface;

receiving the uplink RF signals from the one or more RAUs as uplink optical RF signals at the at least one optical RF interface; and

converting the received uplink optical RF signals into uplink electrical RF signals at the at least one optical RF interface.

29. The method of any of claims 21-24, wherein determining the propagation delay further comprises measuring the propagation delay between the at least one downlink interface and the RAU among the one or more RAUs using at least one propagation delay measurement circuit located at the at least one optical RF interface.

30. The method of any of claims 21-24, wherein determining the propagation delay further comprises:

detecting the downlink RF signals distributed on the at least one downlink communications medium;

detecting the uplink RF signals received on the at least one downlink communications medium in response to the distribution of the downlink RF signals on the at least one downlink communications medium; and


counting, using a propagation delay counter, the propagation delay between the detection of the downlink RF signals by a downlink communications signal detector and the detection of the uplink RF signals by a uplink communications signal detector.

31. The method of any of claims 21-24, further comprising communicating to the RAU among the one or more RAUs over the at least one downlink communications medium to return received downlink RF signals as uplink RF signals to the at least one uplink RF interface.

32. The method of any of claims 21-24, further comprising adding additional propagation delay to at least one of the at least one downlink communications medium and the at least one uplink communications medium.

33. The method of any of claims 21-24, further comprising equalizing the propagation delay between the least one of the at least one downlink communications medium and the at least one uplink communications medium.

1/15

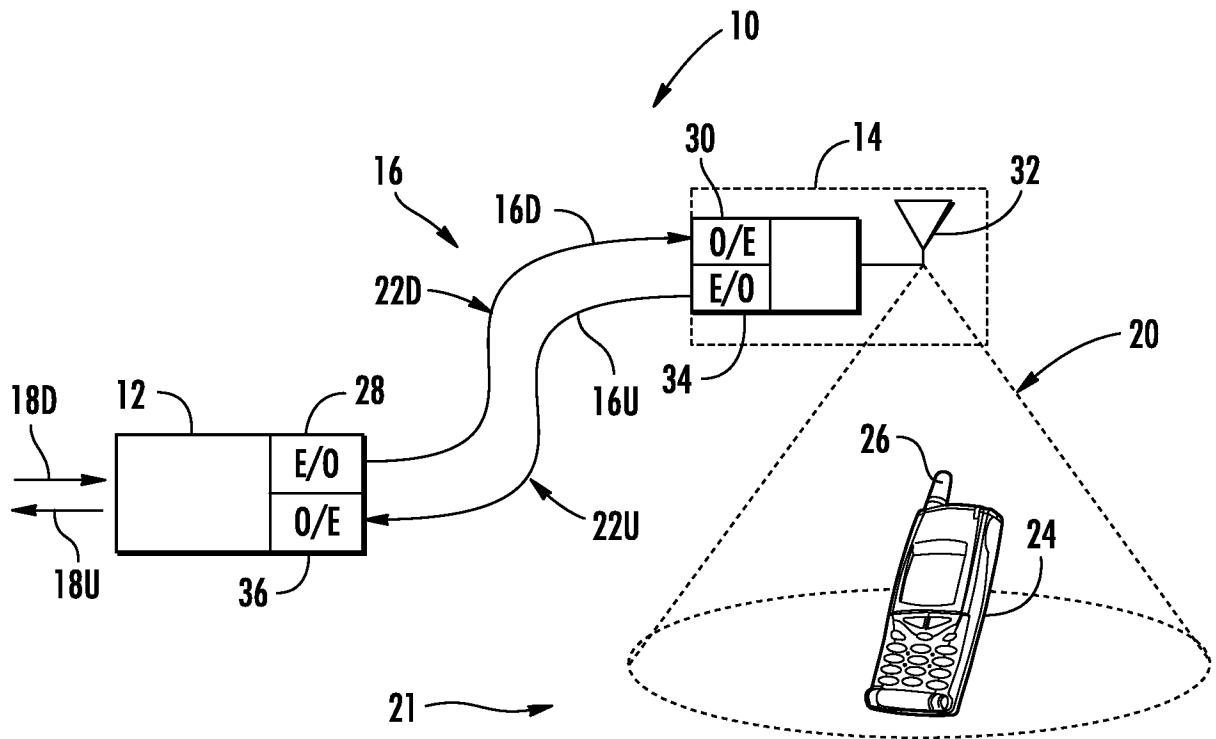**FIG. 1**

2/15

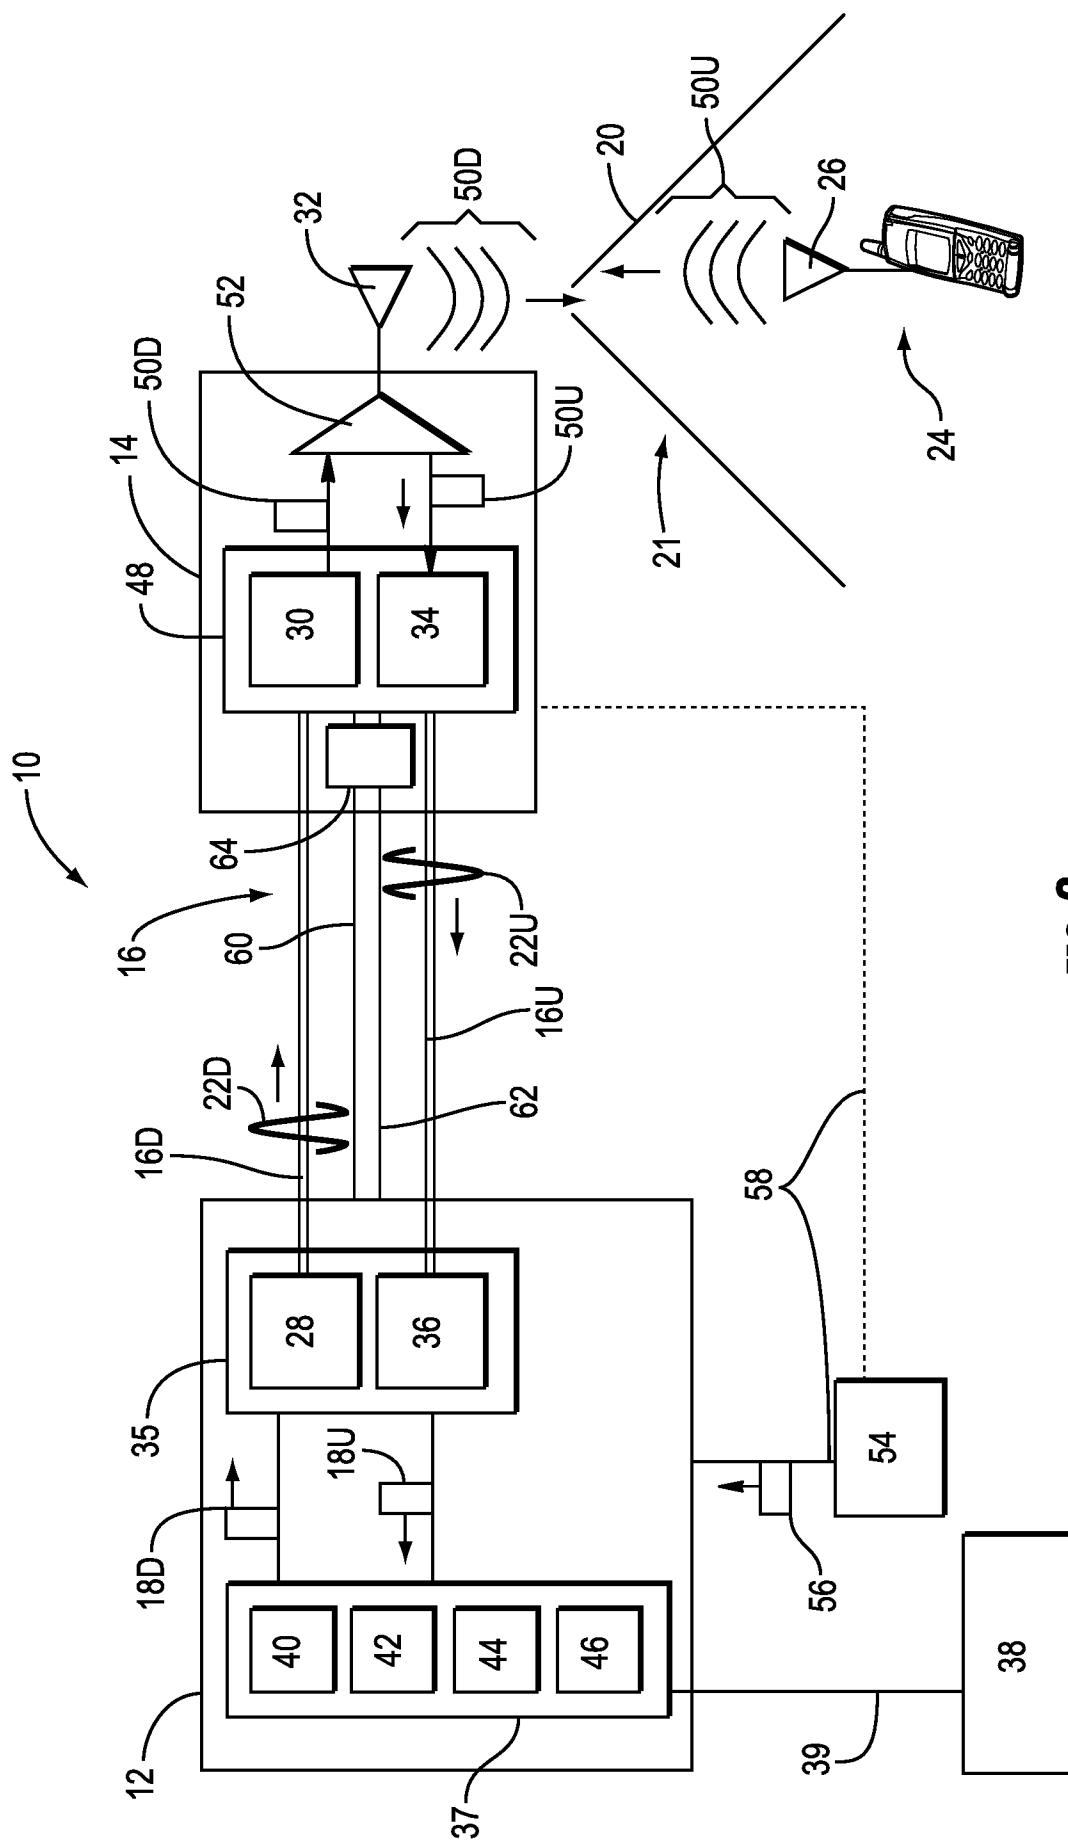
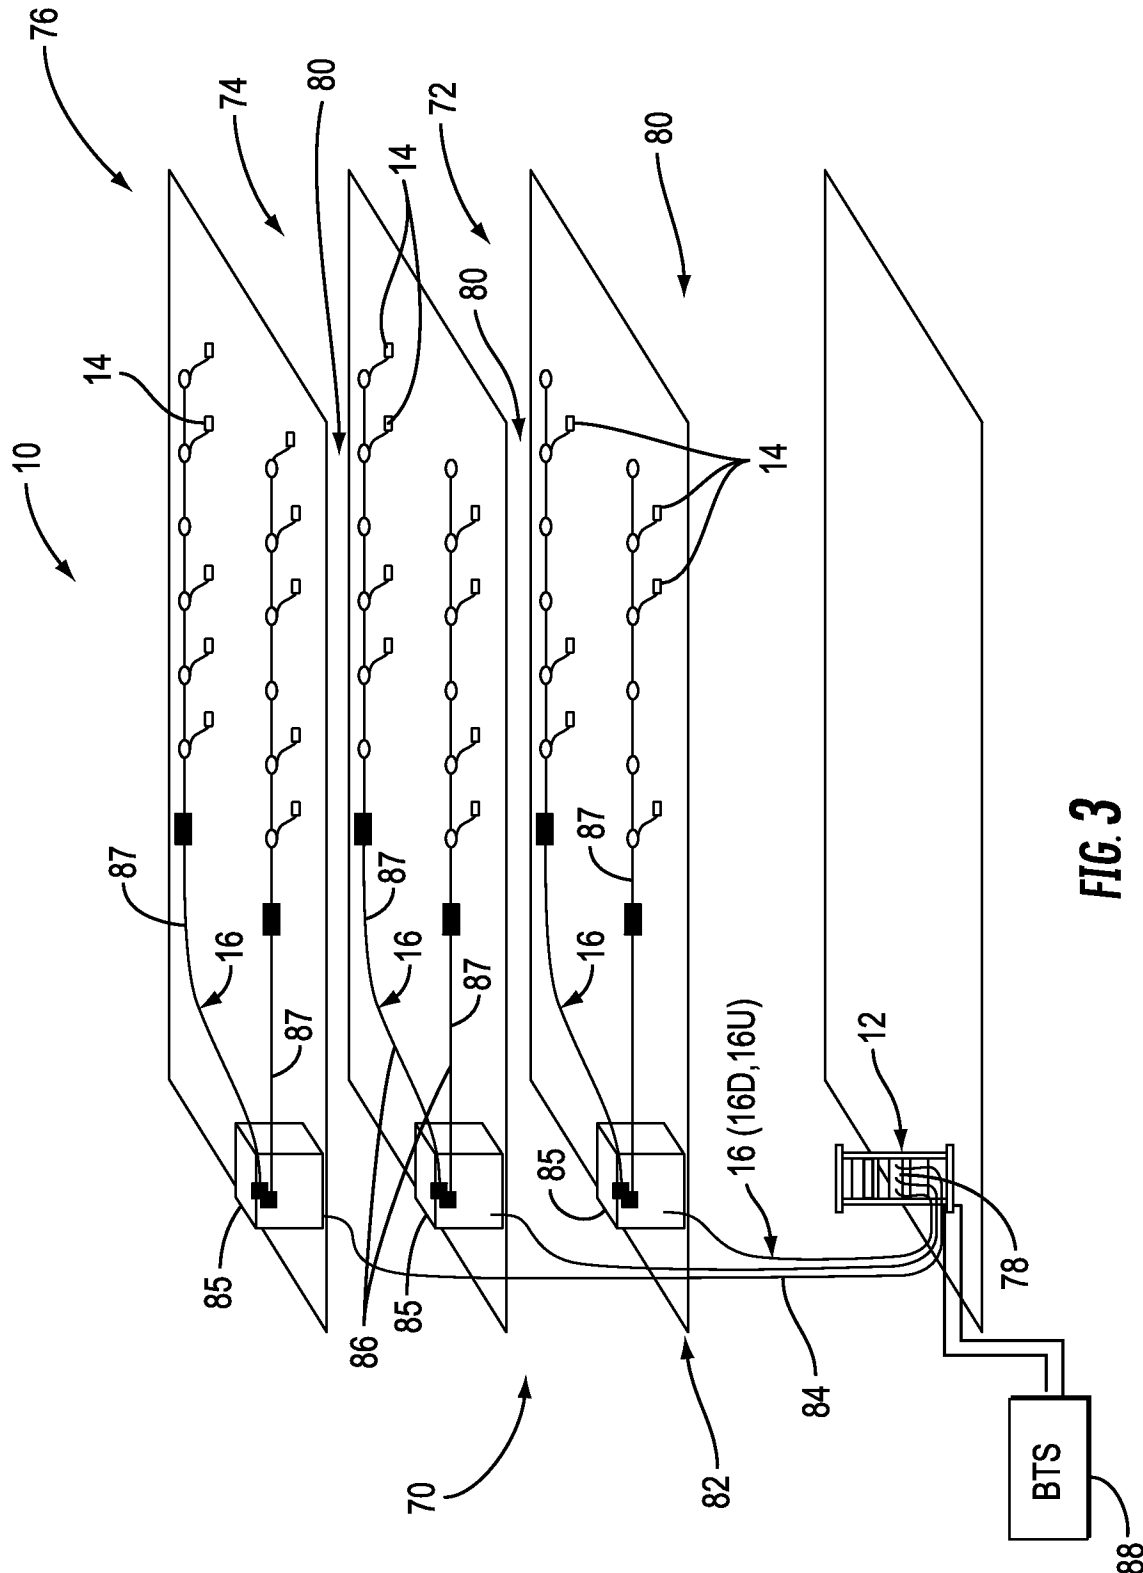


FIG. 2



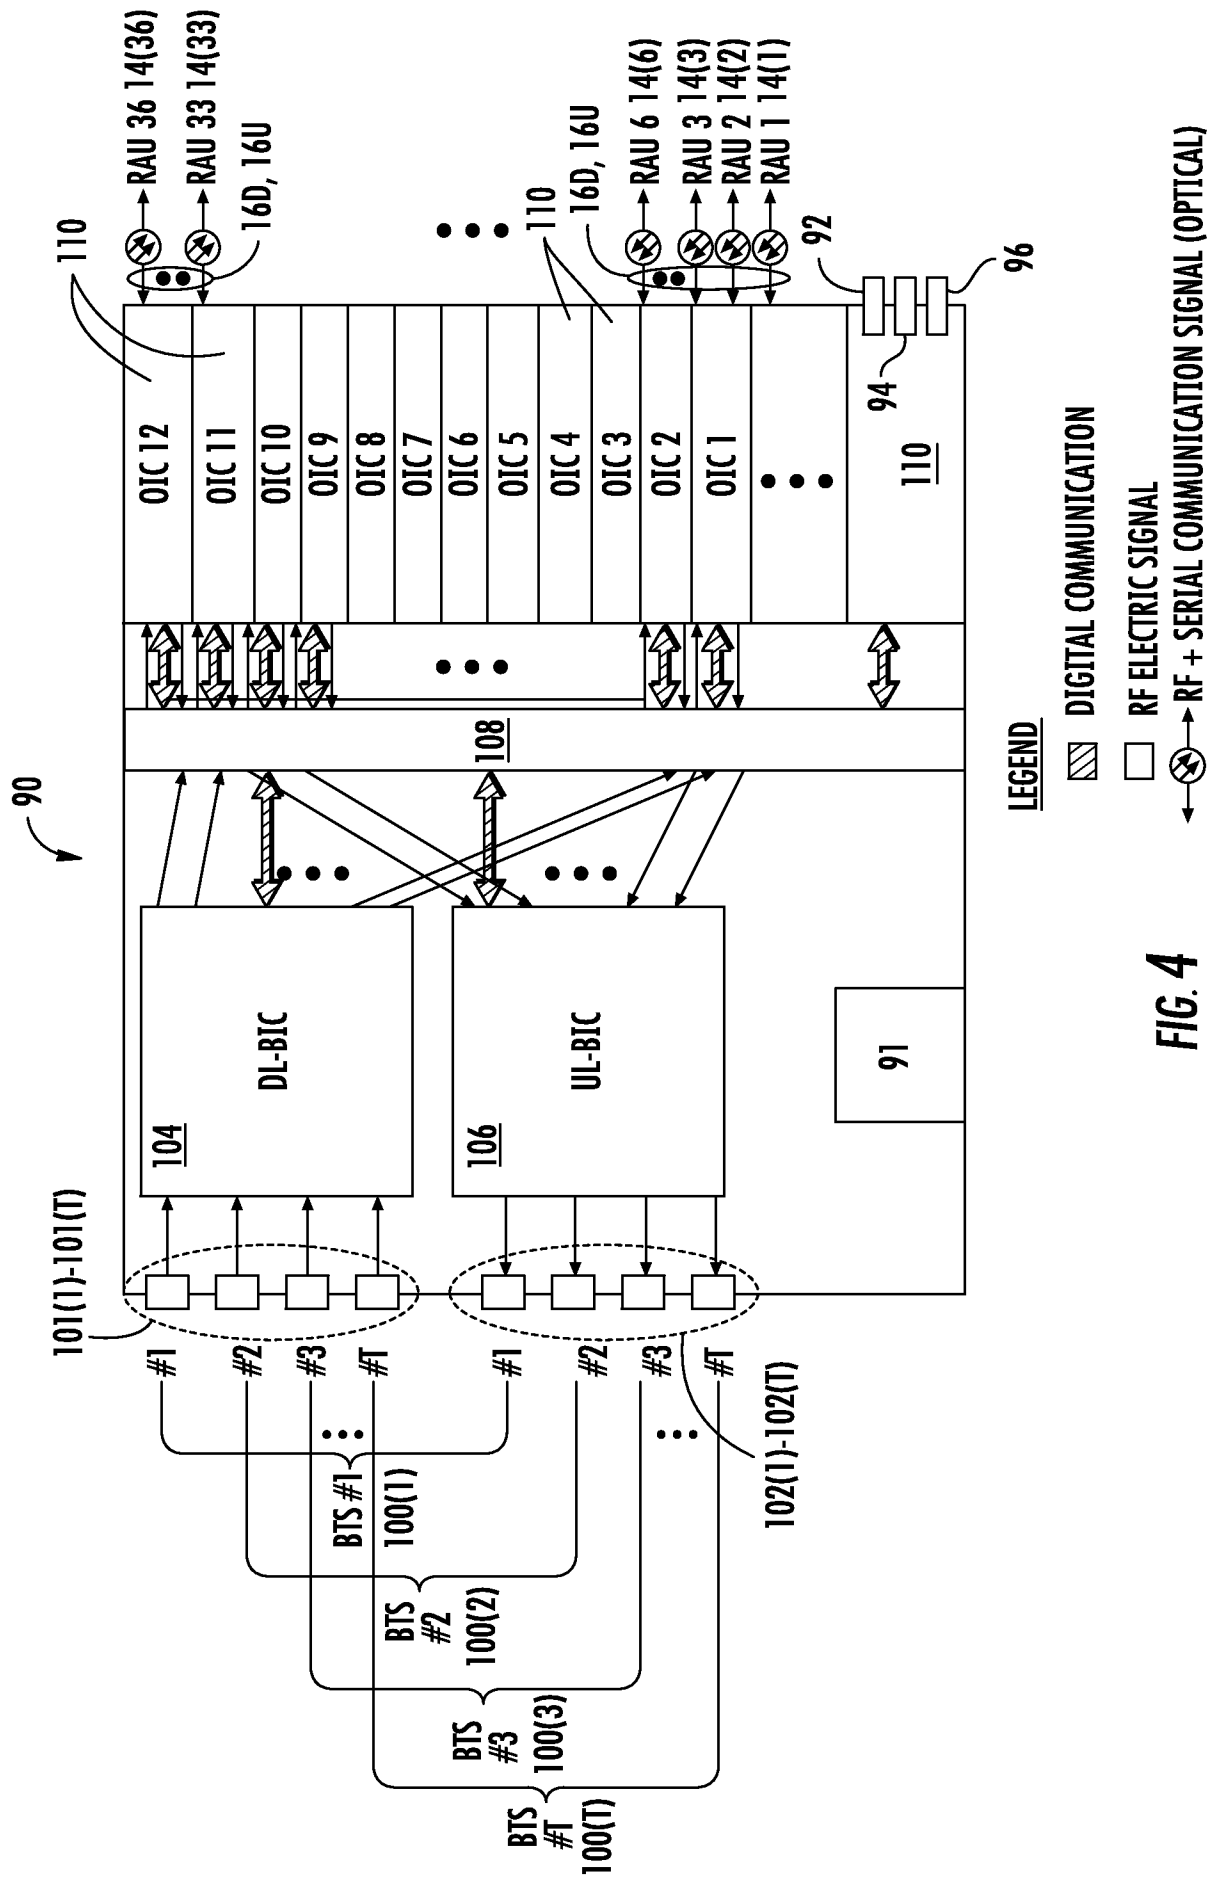


FIG. 4

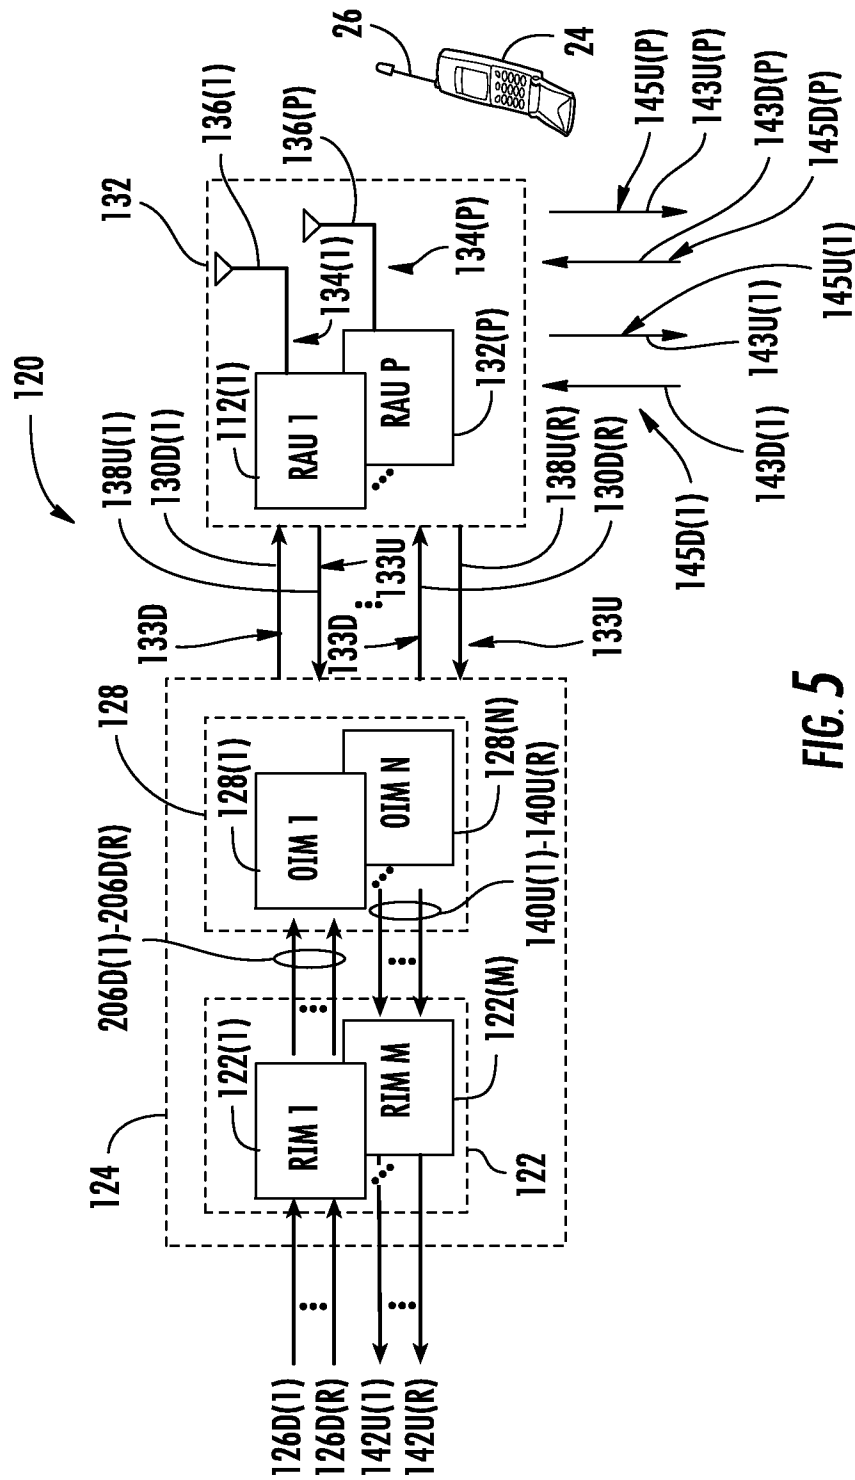


FIG. 5

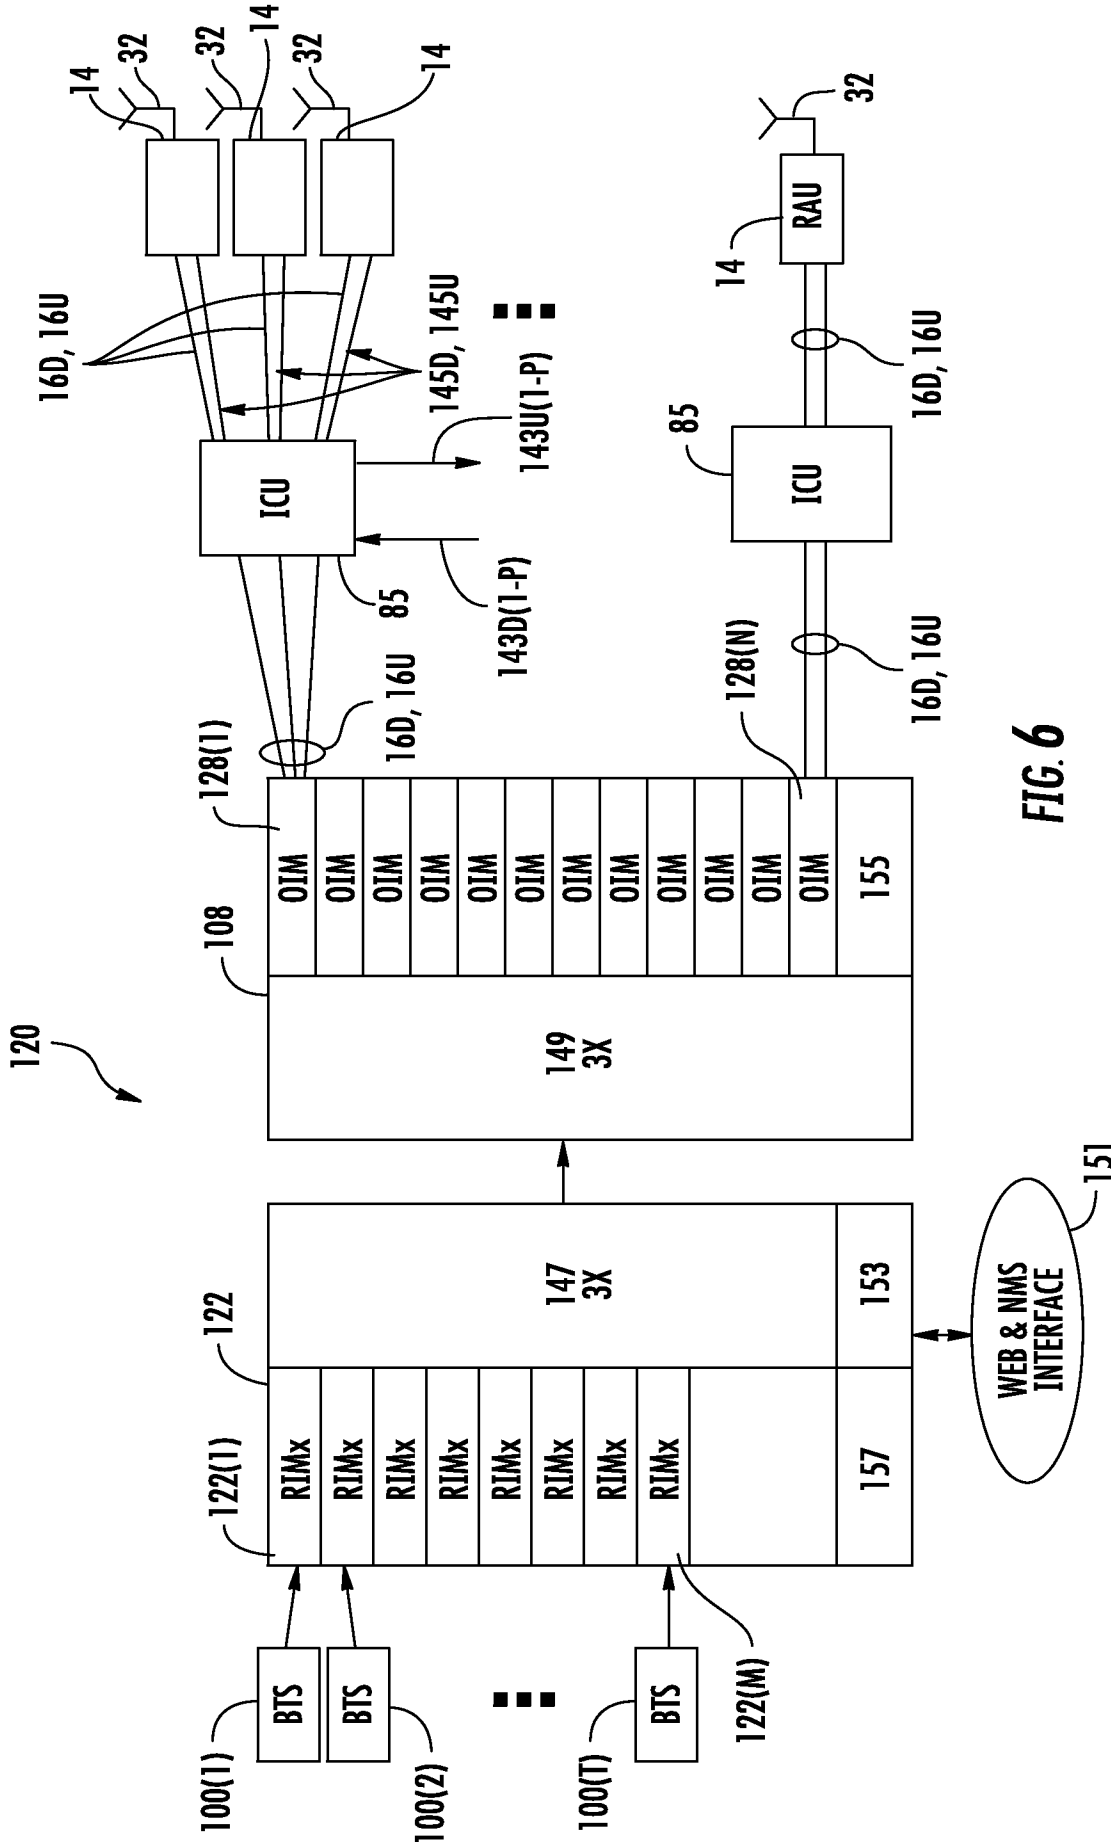


FIG. 6

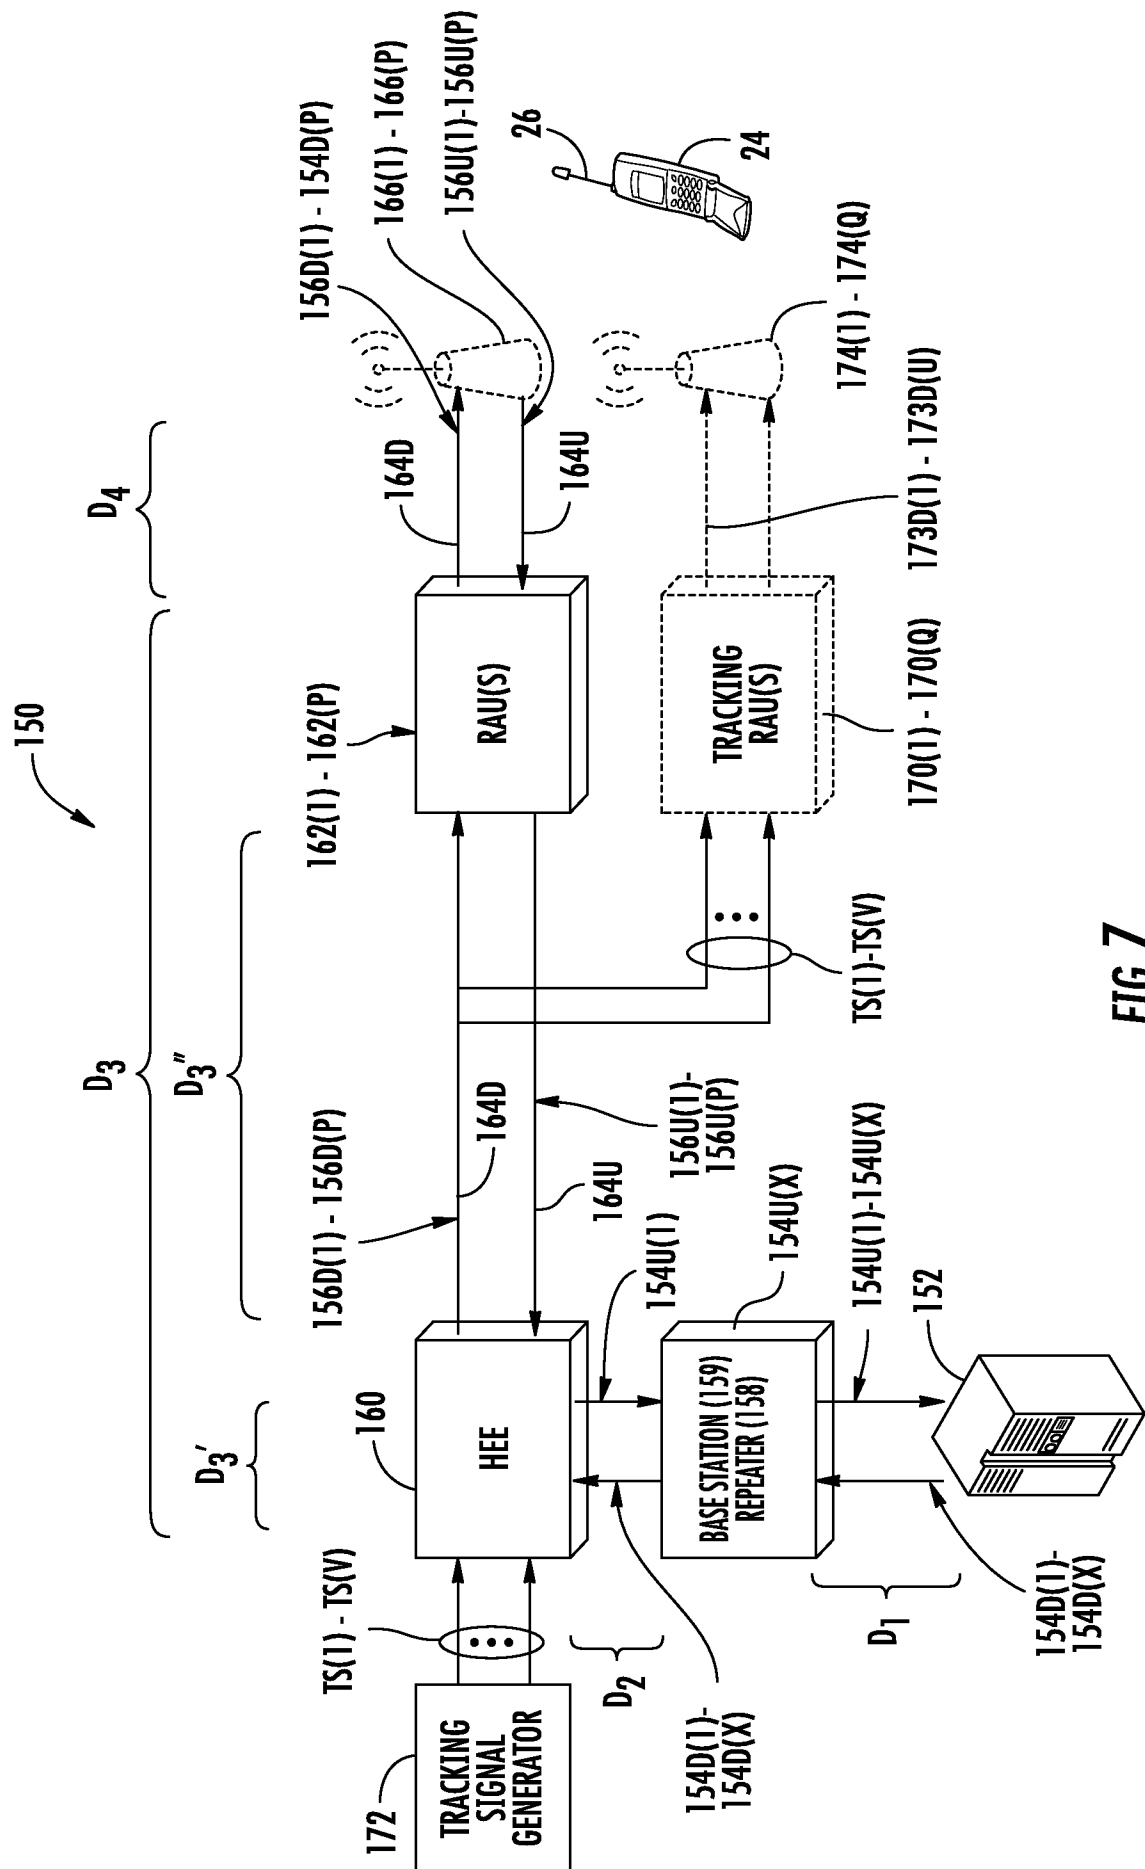
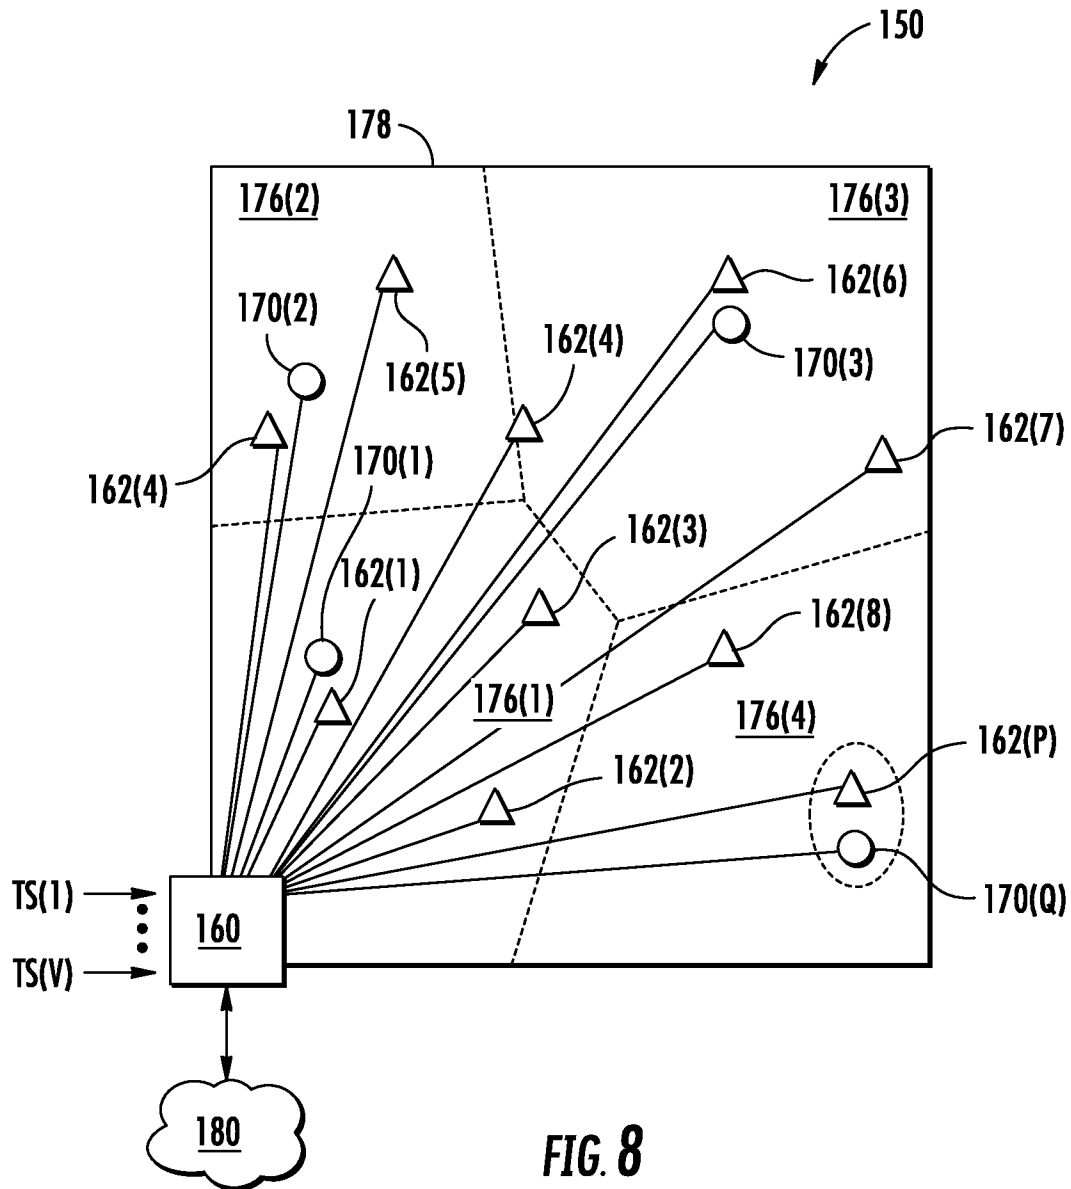


FIG. 7

8/15



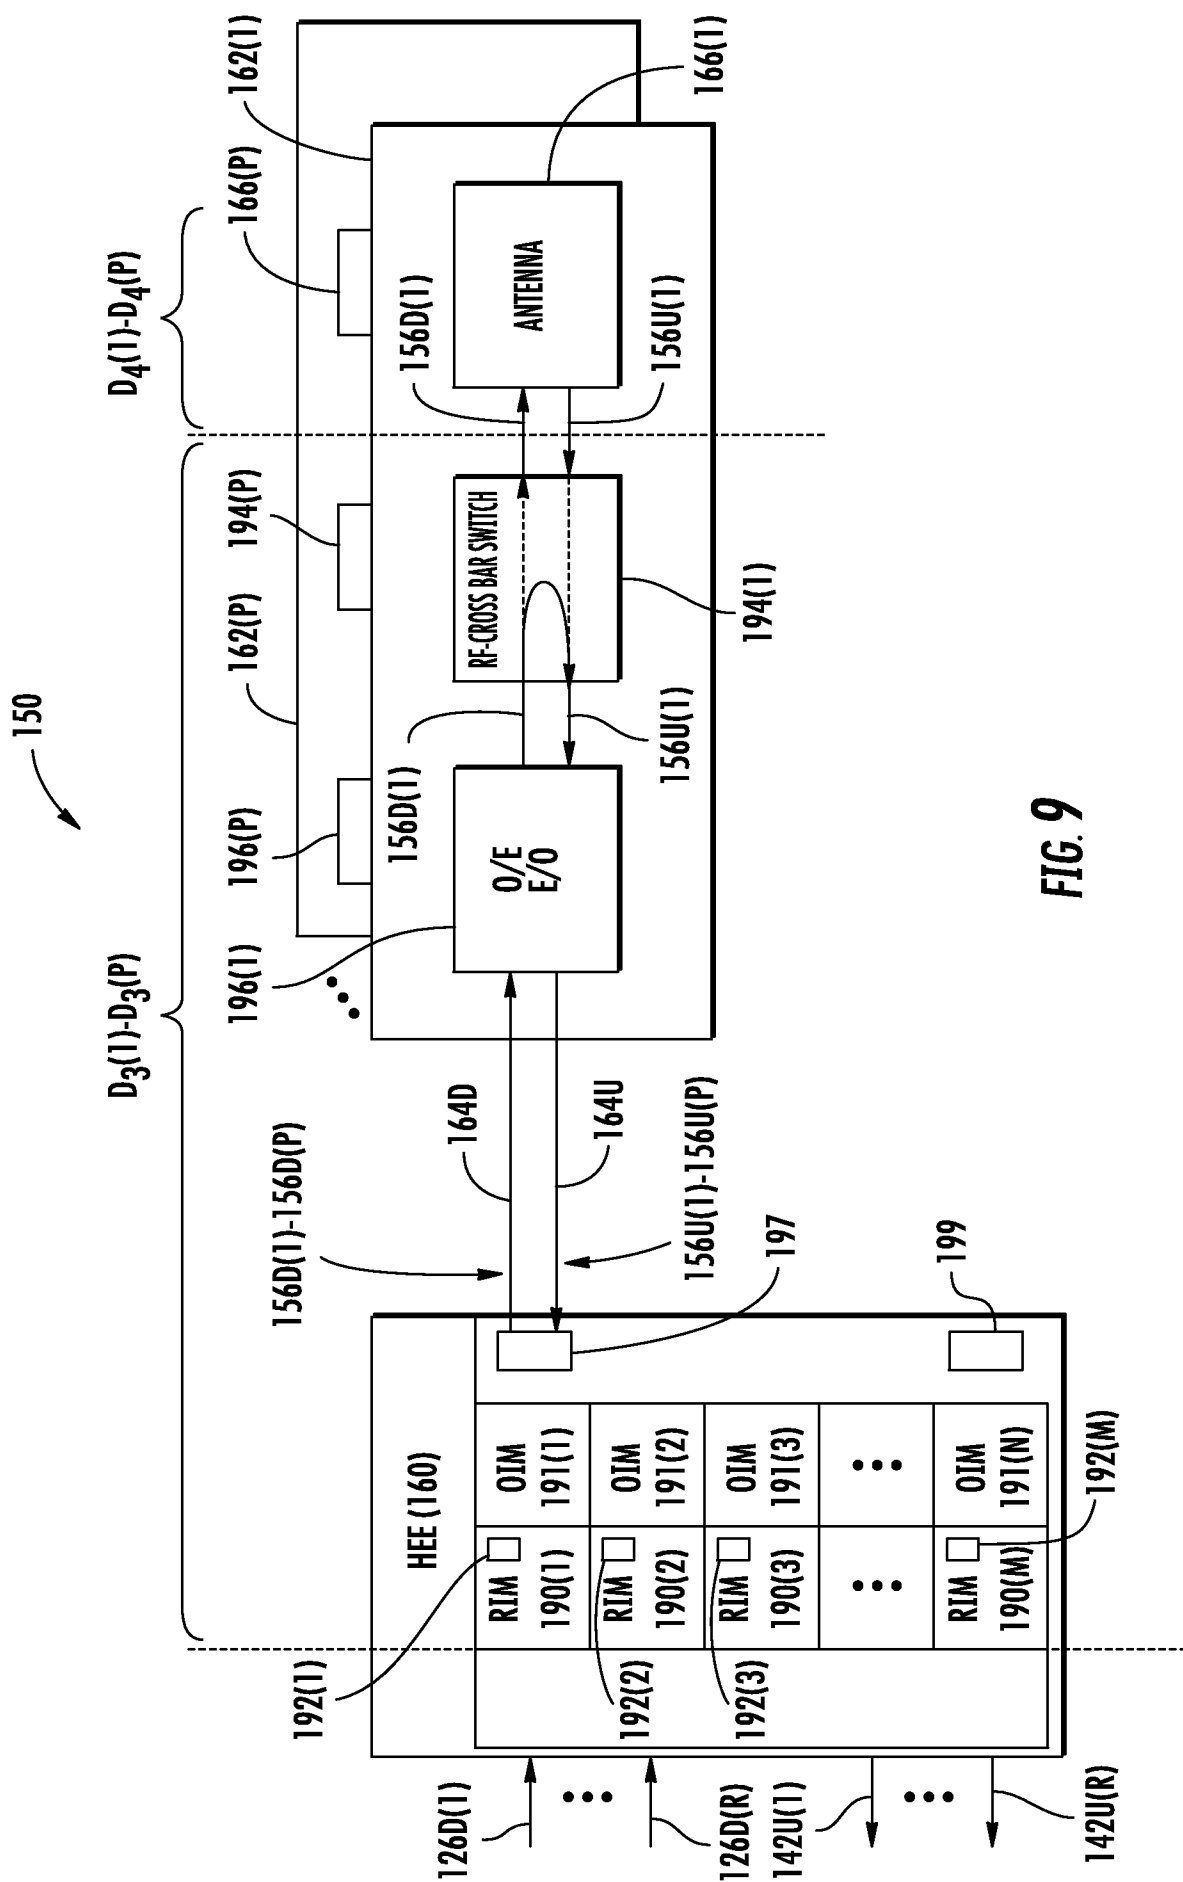
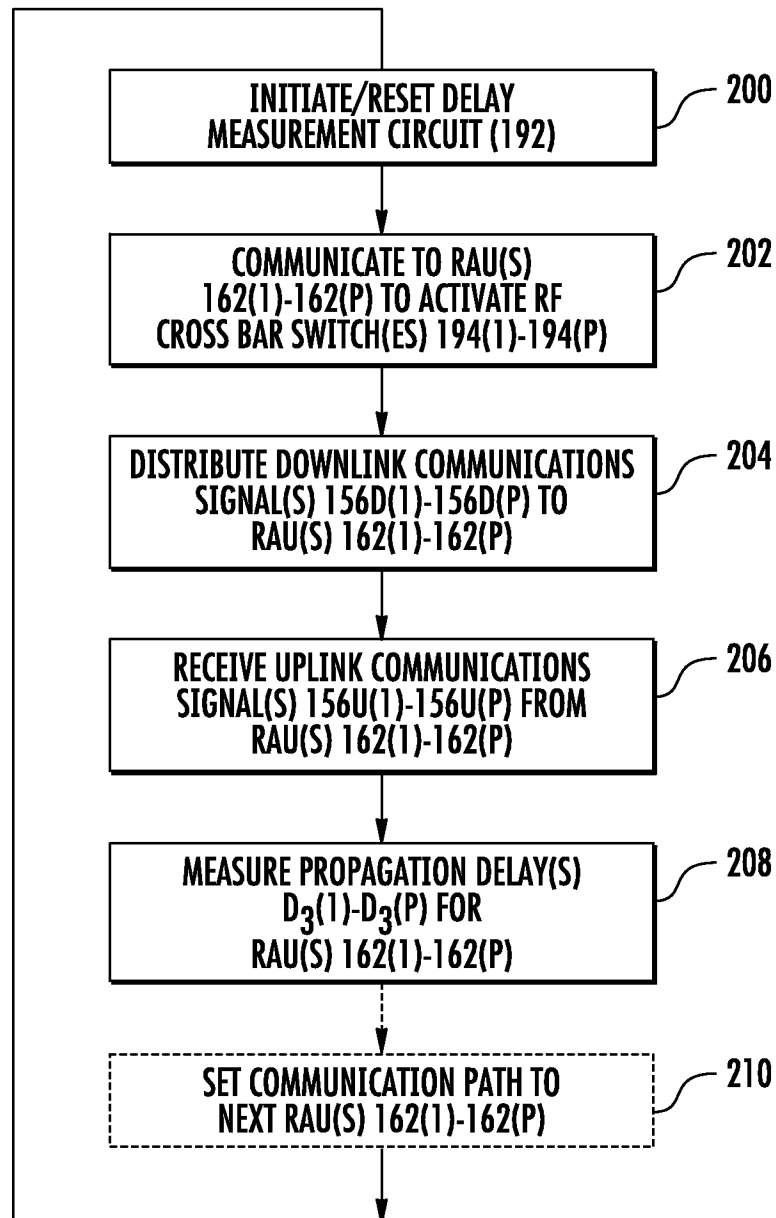


FIG. 9

10/15

**FIG. 10**

11/15

FIG. 11A

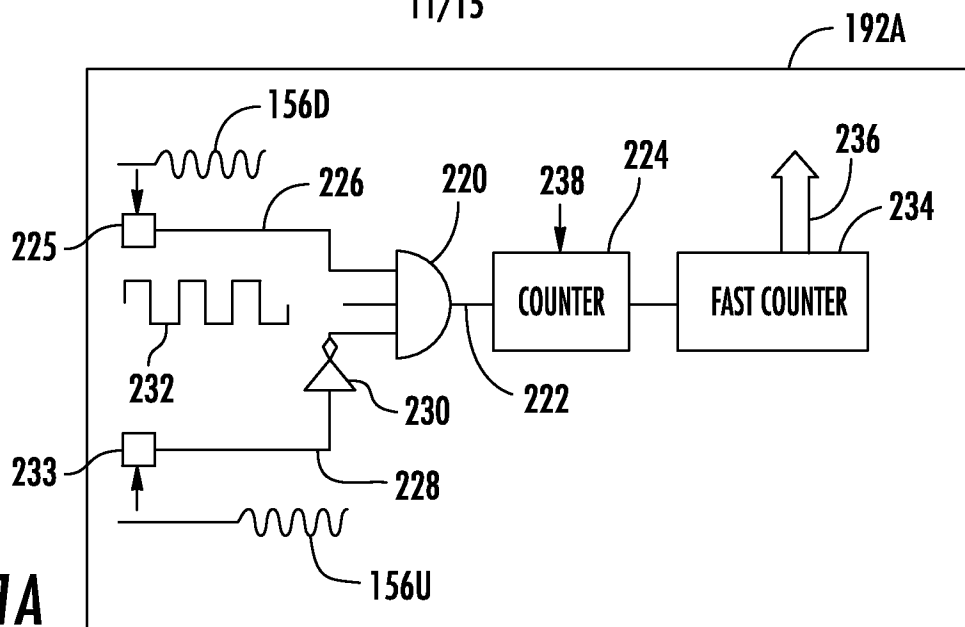


FIG. 11B


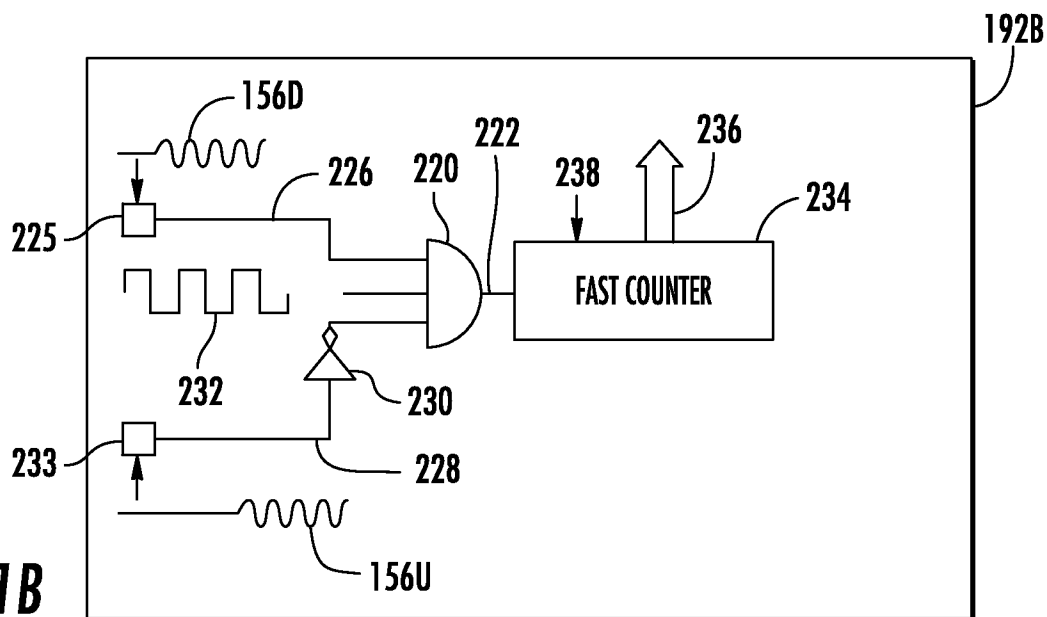


FIG. 11C

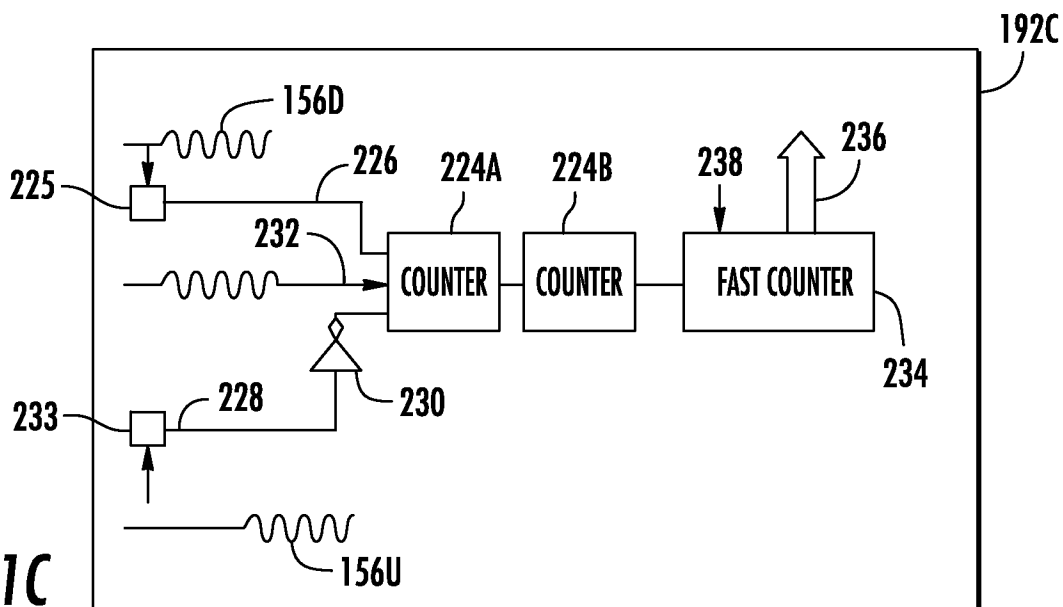

12/15

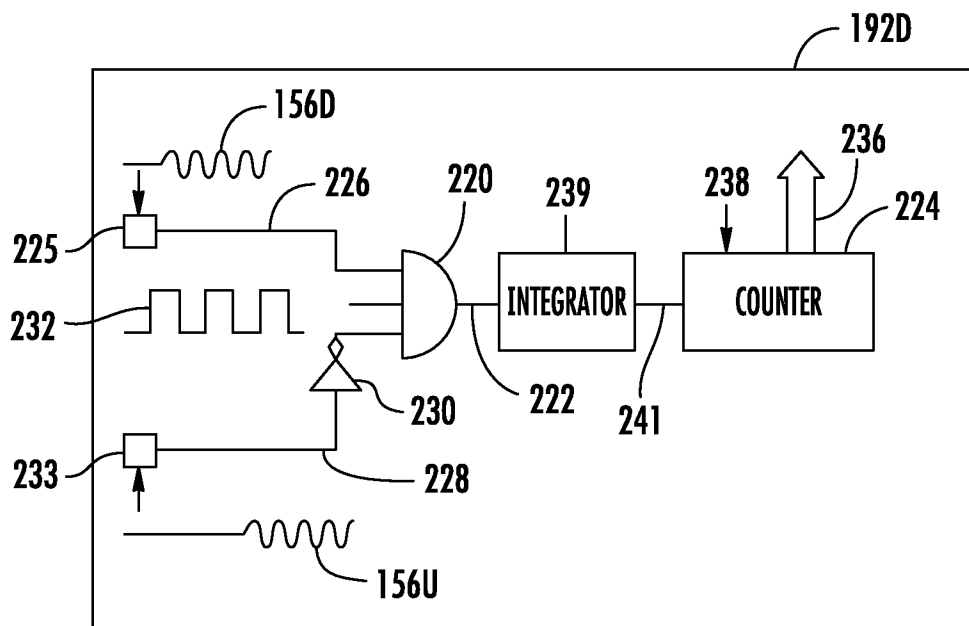


FIG. 11D

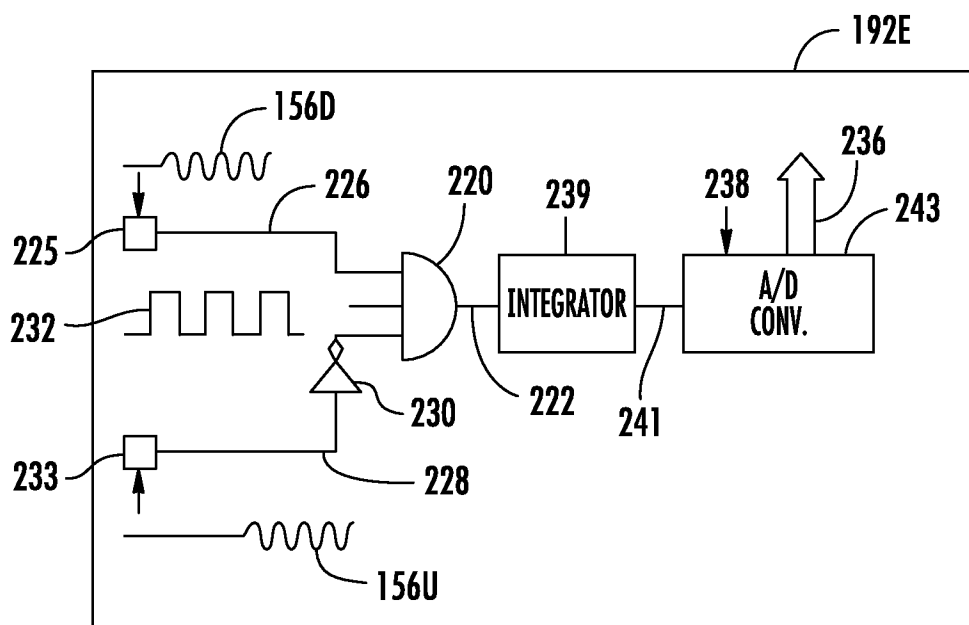


FIG. 11E

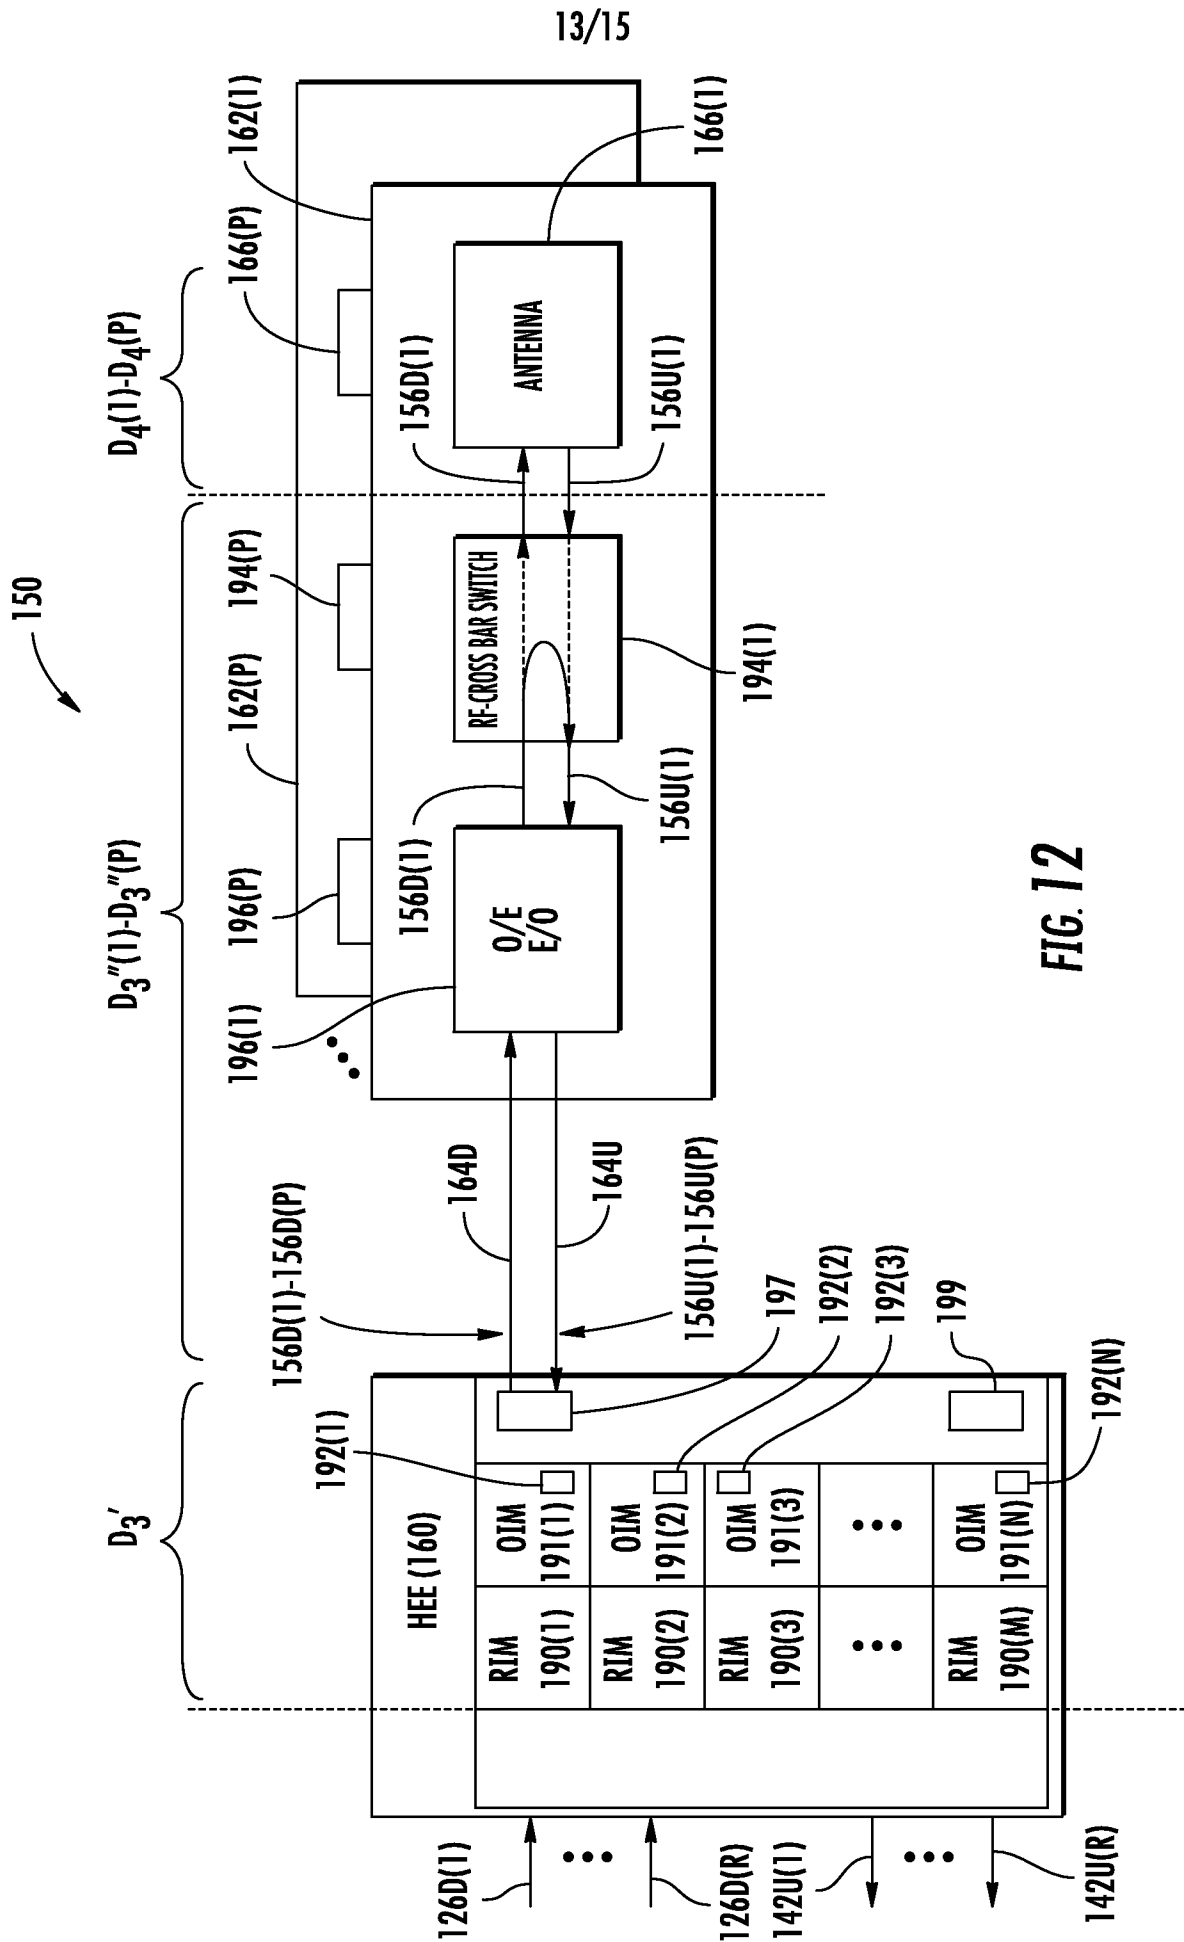


FIG. 12

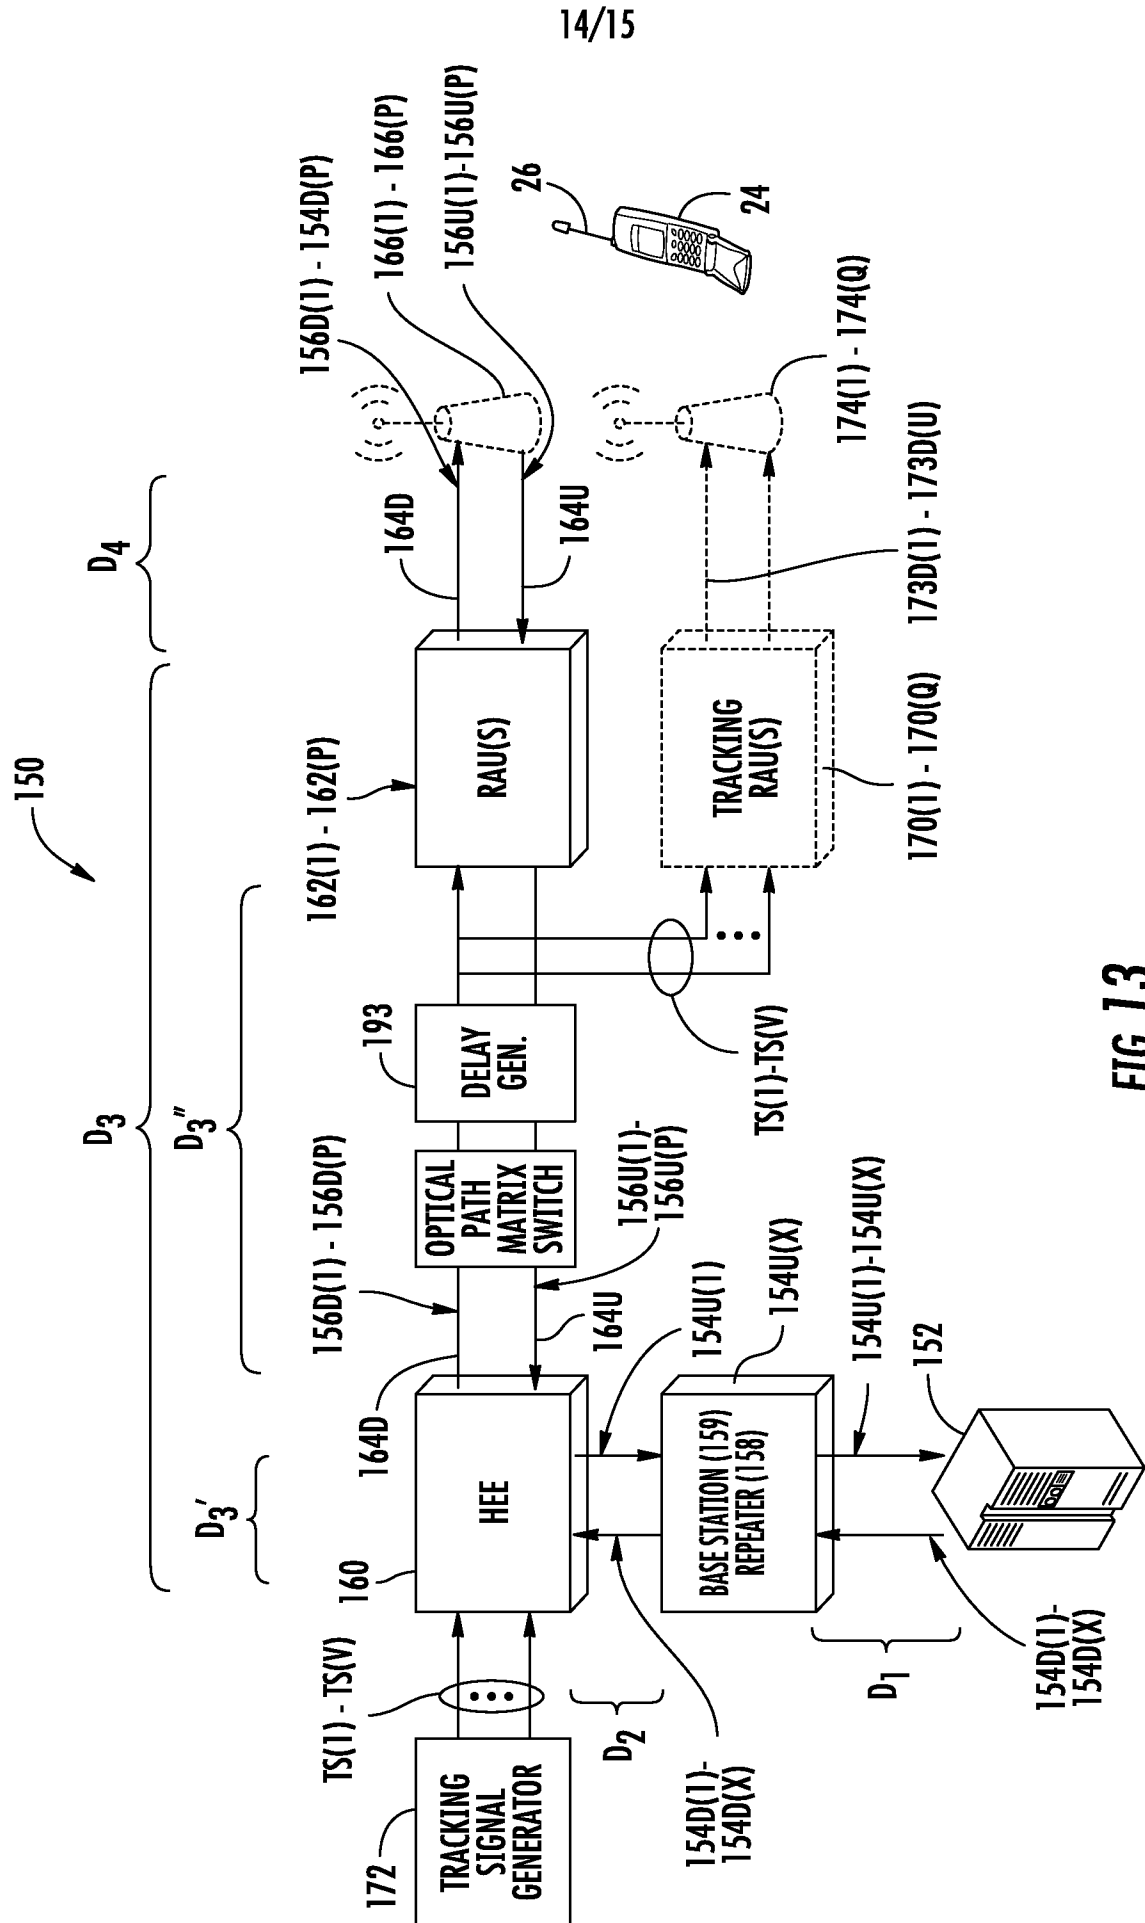


FIG. 13

15/15

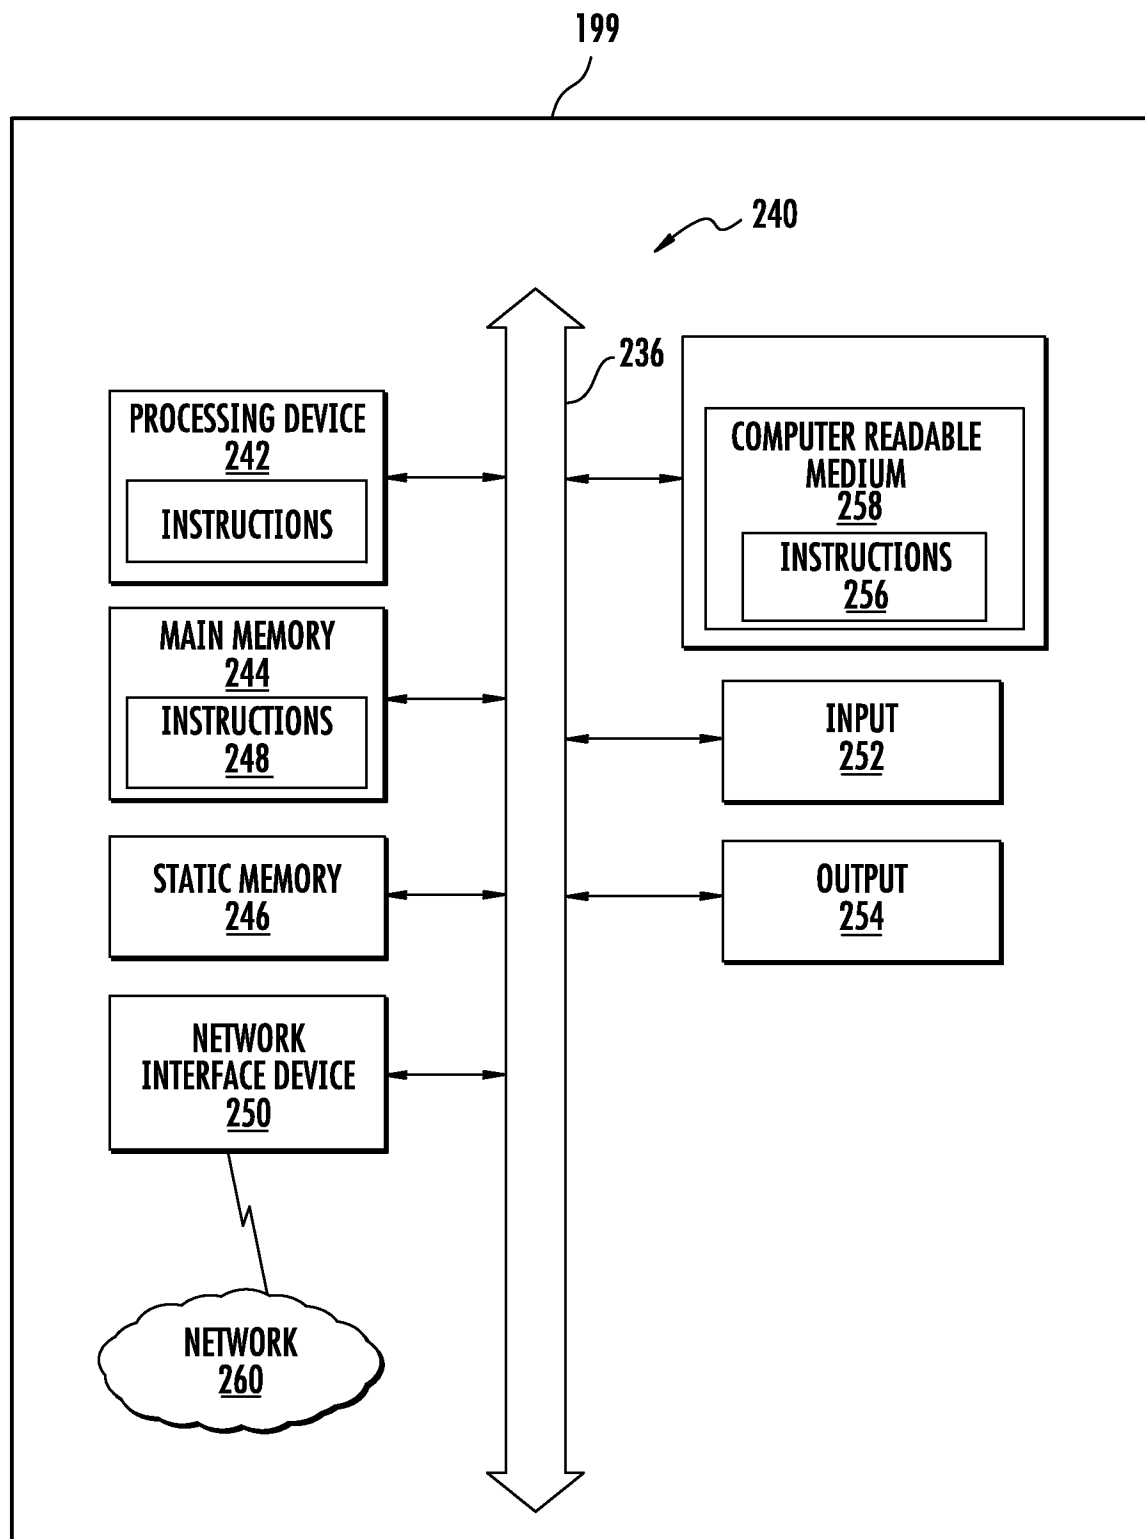


FIG. 14

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2012/034853

A. CLASSIFICATION OF SUBJECT MATTER IPC(8) - H04J 3/06 (2012.01) USPC - 370/508 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC(8) - H04B 17/00; H04J 3/00, 3/06 (2012.01) USPC - 370/508, 519; 455/67.14 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) Micropatent.com; Google Patents; Google Scholar		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 6,654,590 B2 (BOROS et al) 25 November 2003 (25.11.2003) entire document	1-33
Y	US 5,793,772 A (BURKE et al) 11 August 1998 (11.08.1998) entire document	1-33
Y	US 2008/0253280 A1 (TANG et al) 16 October 2008 (16.10.2008) entire document	13-15, 28, 29
Y	US 2009/0180407 A1 (SABAT et al) 16 July 2009 (16.07.2009) entire document	17
☐ Further documents are listed in the continuation of Box C. ☐		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 11 July 2012		Date of mailing of the international search report 06 AUG 2012
Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US, Commissioner for Patents P.O. Box 1450, Alexandria, Virginia 22313-1450 Facsimile No. 571-273-3201		Authorized officer: Blaine R. Copenheaver PCT Helpdesk: 571-272-4300 PCT OSP: 571-272-7774